

جمهوری اسلامی ایران

سازمان برنامه و بودجه

ضوابط و معیارهای فنی شبکه های آبیاری و مکنشی

نقشه های تپ سازه های فنی

دفتر تحقیقات و معیارهای فنی

نشریه شماره ۱۰۲

انتشارات سازمان برنامه و بودجه ۷۱/۰۰/۳



جمهوری اسلامی ایران
سازمان برنامه و بودجه

بسمه تعالی

به:	دستورالعمل شماره ۲۲-۵۶-۳۹۲-۱
موضوع:	موضوع: ضوابط و معیارهای فنی شبکه های آبیاری و زهکشی نقشه های تیپ سازه های فنی
تذکر:	تذکر:
<p>باستناد ماده ۲۳ قانون برنامه و بودجه کشور و آئین نامه استانداردهای اجرایی طرحهای عمرانی این دستورالعمل از نوع <input type="text" value="گروه ۲"/> مذکور در ماده هفت آئین نامه در <input type="text" value="یک"/> صفحه صادر میگردد . تاریخ مندرج در ماده ۸ آئین نامه در مورد این دستورالعمل <input type="text" value="۷۱/۷/۱"/> میباشد .</p> <p>به پیوست نشریه شماره ۱۰۷ دفتر تحقیقات و معیارهای فنی این سازمان تحت عنوان " ضوابط و معیارهای فنی شبکه های آبیاری و زهکشی . نقشه های تیپ سازه های فنی " اسلاخ می شود .</p> <p>دستگاههای اجرایی و مهندسان مشاور می توانند مفاد نشریه یاد شده و ضوابط و معیارهای مندرج در آن را ضمن تطبیق با شرایط کار خود در طرحهای عمرانی مورد استفاده قرار دهند .</p> <p style="text-align: center;">مسعود روشنی زنجانی معاون رئیس جمهور و رئیس سازمان برنامه و بودجه</p>	

۳-۱۳۴۱

مقدمه

هدف از تهیه این نشریه نقشه های تیپ سازه های فنی شبکه های آبیاری در بخش های آبیاری و پرورش درختان و مهندسی ریزش در این زمینه است که پس از تهیه این ضوابط اجرا خواهند شد. نتایج عمومی این مطالعات بصورت نقشه های تیپ اجرایی کانالها و سازه های فنی شبکه های آبیاری در بخش های آبیاری و پرورش درختان تهیه شده است. نقشه های تیپ در این مجموعه در اندازه های ۱:۱۰۰ تهیه و در سبک آرنایم بر حسب مورد جدول یا توضیحات ضروری ارائه شده است. این مجموعه در ۱۰ بخش شرح زیر تنظیم گردیده است:

Conveyance Structures	سازه های انتقال جریان آب	بخش اول
Regulating Structures	سازه های تنظیم جریان آب	بخش دوم
Protecting Structures	سازه های حفاظتی	بخش سوم
Drainage Structures	سازه های زهکشی	بخش چهارم
Water Measurement Structures	سازه های اندازه گیری جریان آب	بخش پنجم
Energy Dissipator Structures	سازه های انرژی گیر	بخش ششم
Pipes	لوله ها	بخش هفتم
Safety Facilities	وسایل ایمنی	بخش هشتم
Typical Canal & Road Sections	مقاطع کانالها و راههای دسترسی	بخش نهم
General Notes	اطلاعات عمومی	بخش دهم

مطالب مندرج روی نقشه های شماره 20/2/1/01, 02, 03 اطلاعات عمومی مربوط به سازه های این مجموعه آورده اند.

مبانی طراحی در انجام محاسبات فنی سازه های این نشریه بشرح زیر است:

۱- این مبانی: - طراحی سازه ها بر اساس آیین روش AASHTO-83 انجام شده است.

- حداقل میگرد لازم برای کنترل گدازهای بی مطابق با ضوابط U.S.B.R. تعیین شده است.

- حداکثر فاصله میگرد با طبق استاندارد شماره ۵-۱۸ مونت استاندارد و تحقیقات صنعتی ایران تعیین شده است.

- بارزنده پهنای ماشین و مطابق با ضمیمه دستورنوی شماره ۱۱ وزارت راه - سازمان برنامه تعیین شده است.

- بارزنده پهنای پیاده رو مطابق با ضوابط U.S.B.R. تعیین شده است.

- تمامی عملیات اجرایی باید با مشخصات فنی عمومی شبکه های آبیاری در بخش نشریه شماره ۱۰۸ و تحقیقات و معیارهای سازمان برنامه و بودجه مطابقت داشته باشد.

۲- مصالح مصرفی: ۱- بتن: بتن مورد مصرف با عیار ۲۵۰ کیلوگرم سیمان و شکرکعب میباشد.

مقادیر مشخصه بتن ۳۰۰ کیلوگرم بر سانتیمتر مربع دی مکعب ۲۰ سانتیمتری میباشد.

۲- میکرد: میکرد صرفی از نوع A-II با فشار جاری شدن ۳۰۰۰ کیلوگرم بر سانتیمتر مربع میباشد.

۳-۲- سیمان: در مناطقی که بتن در معرض تاثیر سولفات با قرار گیر باید از سیمان تیپ II یا سیمان تیپ V استفاده شود که بستگی به میزان سولفات موجود در آب و خاک دارد.

۳- روش محاسبه:

در محاسبات سازه از روش تنش مجاز Working Stress استفاده شده است. اما لازم است یادآوری است که چون میکرد و مصرفی از نوع A-II است و تنش مجاز آن $\sigma = 1500$ کیلوگرم بر سانتیمتر مربع میباشد. نتایج محاسبات بارش نهایی نیز بر مبنای تیاج طرحی بارش تنش مجاز منتهی میشود.

۴- بارگذاری: - بارزنده ماشین آلات مطابق با ضمیمه دستورنوی شماره ۱۱ وزارت راه - سازمان برنامه تعیین شده که عبارتست از کامیون استاندارد ۵۵ تنی

بارزنده پیاده رو و شرح زیر میباشد:

- پیاده روی ساختمانها با Stoplog بزرگ بارزنده ۷۵۰ کیلوگرم بر متر مربع طرحی شده.

- پیاده روی ساختمانها بدون Stoplog بزرگ بارزنده ۵۰۰ کیلوگرم بر متر مربع طرحی شده.

- بزرگترین فشار ارتعاش خاک (فشار افقی) از آیین نامه مهندسی آیین امریکا استفاده شده است. در این آیین نامه نوع خاک ریزیمای پشت دیوارهای حالت

پنج گروه طبقه بندی گردیده و فشار افقی خاک برای هر گروه تعیین شده است. با مطالعه نقشه خاکشناسی این میانگین فشار افقی خاک از گروههای ۲، ۳ و ۴ بزرگ بارگذاری انتخاب شده است که میزان آن ۸۱٪ بر متر مربع میباشد.

۵- جزئیات آیین گذاری:

بزرگ رعایت ممانتهای کارکابی در این آیین گذاری طبق ضوابط آیین کاربرد ۵-۱۸ مونت استاندارد و تحقیقات صنعتی ایران انجام شده است و خط

بزرگ حداقل در صد میکرد و ضوابط U.S.B.R. استفاده شده است.

بزرگ اعضاء و قطعات قوسی با ضخامت کمتر از ۲۰ سانتیمتر کمترین زوایا را تا ۹۰ درجه و بزرگترین ضخامت ۲۰ سانتیمتر و بیشتر در زوایا تا ۹۰ درجه

در بعضی موارد که آیین با قطر ۱۶ سانتیمتر سطح مقطع کمتر از سطح مقطع مورد نیاز داشته است از آیین شماره ۱۲ استفاده شده است.

حداقل قطر آهنا برای سازه های آبی ۴ است که حداقل آن در جهت ضربه آهنا میگرد استاندارد ۱۶ منظور شده است.

حداکثر فاصله آهنا: حداکثر فاصله آهناهای خمشی ۲۵ سانتیمتر یا ۱۵٪ از ضخامت آن میباشد. در مورد دیگر مقاومت خمشی دال با آیین گذاری فاصله ۲۵ سانتیمتری

از یکدیگر خمشی موجود باشد فاصله آهنا ۳۰ سانتیمتر شده است.

حداکثر فاصله آهناهایی که برای جلوگیری از ترک خوردن بتن کاربرد ۳۳ سانتیمتر است.

در پایان لازم است آقای احمد آل حسین آقای یوسف شفیع آقای میرجوشنگ بان آقای حسین مجاری کناری آقای حمید ساسانی آقای ضابط

و خانم فرشته امینیان و خانم پری شهباز گردگرتی از مهندسین مشاور پاپیلا که مسئولیت تهیه این مجموعه را عهده دار بوده اند و نیز کارشناسان شرح

زیر که در بررسی نهایی این نشریه همکاری داشته اند تشکر و قدردانی نماید:

- آقایان حسین شفیع فرید سید کبریا شفی
- آقایان حسن شهنیاد و صدیقا بنوری
- آقایان جعفر نظری و ترابشا کاظمی
- از سازمان برنامه و بودجه
- از مهندسین مشاور و ریکم
- از مهندسین مشاور و مهاباد گدش

در تحقیقات و معیارهای فنی
ژرفشان ۱۳۷۰

1- American Railway Engineering Association - AREA
2-: 2-1 Type 2 - Coarse-grained Soil of Low permeability due to admixture of particles of silt and clay
2-2 Type 3 - Fine silt and granular materials with conspicuous clay content; or residual soil with stones

Unless otherwise shown on reinforcement drawings, details and notes shown have are typical for all reinforcement drawings that are referred to this drawing.

GENERAL NOTES

ENGINEER:

The Engineer is an Engineering organization or body who uses these drawings for construction purposes

DESIGN CRITERIA:

Structural design is based on working stress method using $f'_c = 250 \text{ Kg/cm}^2$ specified compressive concrete strength at 28 days (or 300 Kg/cm^2 for cubic sample, concrete B-300) and $f_y = 3000 \text{ Kg/cm}^2$ Specified minimum yield strength of reinforcement.

Both A C I 318 (83) and the AASHTO (77) standards have been used for design of structures.

Thickness of concrete or reinforced concrete members are shown minimum, and can be increased by the ENGINEERS if required.

BEARING CAPACITY:

Foundation bearing pressures for small structures are of small magnitude and will ordinarily be less than allowable bearing pressure for the various soil types.

Foundation treatment is required however for low density or expansive soils. Unsuitable material should be overexcavated and replaced with compacted, nonexpansive soil.

LEAN CONCRETE:

In order to have a clean and stable base for pouring concrete & for formwork of foundation, a layer of lean concrete ($150 \text{ Kg cement/m}^3$) with at least 10cm. thickness may be used with prior approval of the ENGINEER.

JOINTS:

Shear key will be used in wall to foundation construction joints as directed by the ENGINEER.

Waterstop in expansion and contraction joints filler material and location of expansion joints shall be directed by the Engineer based upon local conditions.

Placement of construction joints during concrete placement will be in accordance with the ENGINEER'S approval.

SYMBOLS:

—○— A circle at the end of a bar indicates a bend.

Splices shown thus ———— indicate a lapped splice, not a bend in the bar.

DIMENSIONS

Dimensions shown for the bars in the list of reinforcement are to the back of the bars and dimensions shown for bar spacings are to the center lines of the bars unless otherwise shown. Clear cover dimensions are marked c_1 . All dimensions in the bar lists are calculated and can be rounded off up to 5% by the ENGINEER.

COVER

Place the reinforcement so that the clear distance between face of concrete and nearest reinforcement is 4cm. for $\phi 16$ bars and smaller and 5cm. for $\phi 18$ bars and larger; except provide a clear distance from face of concrete $p_1 a c e d$

against earth or rock of 5cm. where member thickness is 22 cm. or less and 7.5 cm. where member thickness is greater than 22 cm, the clear distance being to the design dimension line reinforcement paralleling construction joints should have a minimum of 5cm. clear cover.


BENT BARS AND STANDARD HOOKS:

The minimum radius or bend measured on the inside of the bars for all reinforcement requiring bending and for standard hooks shall not be less than the values shown in the table:

Minimum diameters of bend for standard hooks

	Bar diameter mm	Minimum diameter Hook
Main Reinforcement	8 to 25	6 bar diameter
Stirrups & tie hooks	8 to 12 14 to 16	40mm. 50mm. 65mm.

The minimum extensions of bars for standard hook are shown in the following figure:

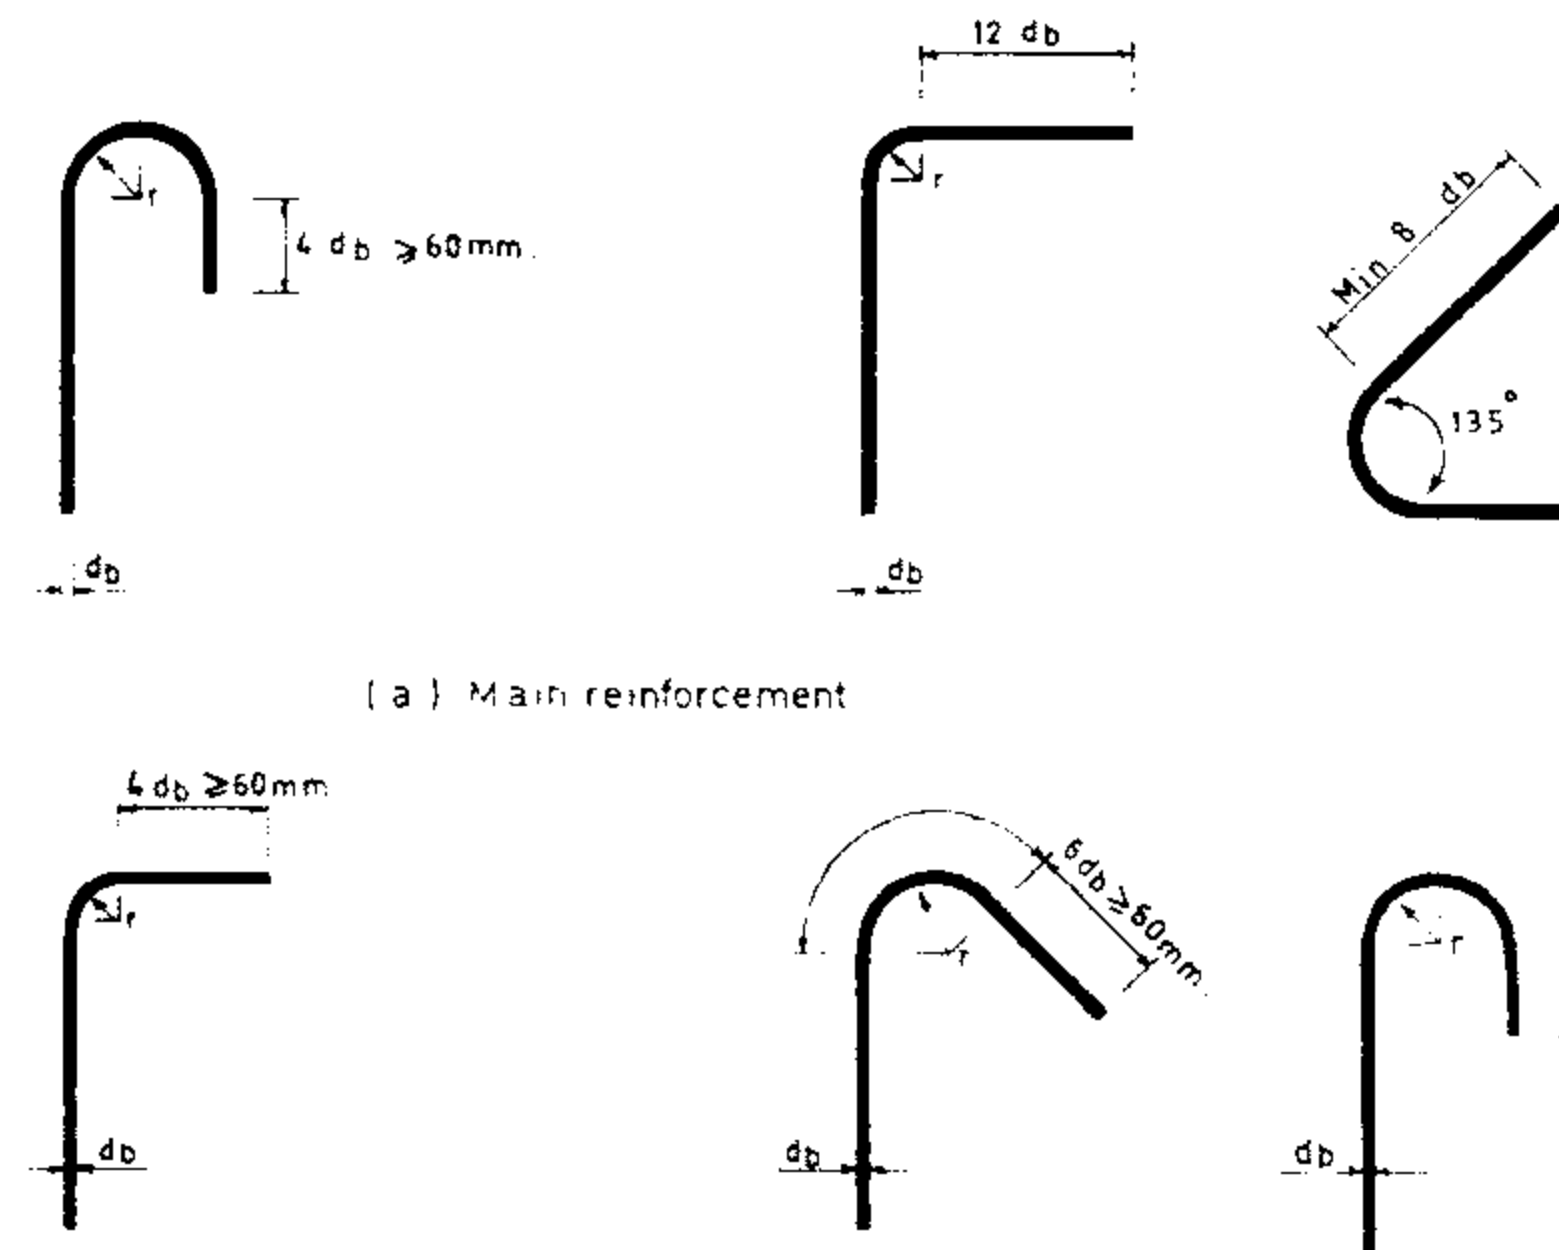

(a) Main reinforcement

(b) Stirrups and ties

STANDARD HOOKS

REINFORCEMENT DOWELS:

Dowels may be indicated on the drawing thus $\phi 14 (d)$ dowels shall have a min. embedment and projection equal to that required for lap splicing a bar of the same diameter.

PLACING:

Bars at small openings (max. 45cm.) in walls and slabs may be spread apart not more than $1\frac{1}{2}$ times the bar spacing.

Reinforcement may be adjusted in the field to clear waterstops, keys, form ties, anchor bars, seals, recesses, embedded metalwork, and conduits except in heavily

reinforced areas. In such cases relocation of the embedded materials must be considered. In no case should bars be bent to greater than 6 to 1 slope. Where possible, reinforcement shall be placed to maintain a clear distance of at least 2.5cm. between the reinforcement and anchor bolt, form ties, or other embedded metalwork. Reinforcement parallel to anchor bolts or other embedded metalwork shall be placed to maintain a clear distance of at least 1 times the max. size aggregate. Reinforcement not to be placed between or within 10cm. of main power leads.

SPACING:

The first and last bars in slabs and walls, stirrups in beams, and ties in columns are to start and end at a maximum of one half of the adjacent bar spacing.

SPLICES:


Unless otherwise shown the minimum length of lap for splicing parallel bars shall be $1.7 l_d$. l_d shall be as given in table A. When reinforcing bars of different size are to be spliced, the lap length shall be governed the smaller diameter bar. Splices are to be made so that the given distances to face of concrete will be maintained. The min. lap requirement s for non-parallel bars shall be as given in table B.

TABLE A
Development length l_d

db mm	l_d cm
8 to 16	30
8 to 20	35
22	40
24	50
26	60
28	70
30	80
32	90
34	100

TABLE B
Length of splice s for non-parallel bar

ANGLE	s
0 to 10	$0.9 l_d$
10 to 30	$1.0 l_d$
30 to 50	$1.2 l_d$
50 to 65	$1.4 l_d$
65 to 80	$1.5 l_d$
80 to 90	$1.7 l_d$

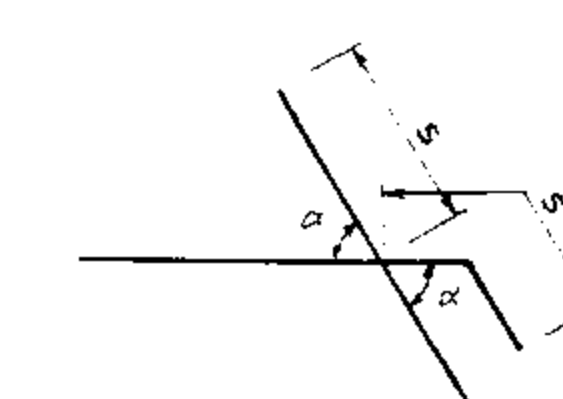

Provide a hook if proper length cannot be obtained by bending and extending bar.

ACCESSORIES:

Bar supports spacers and other accessories are not shown on the design dwgs. The recommendations of ACI 315 or other approved supporting systems may be used.

REFERENCE:

Unless otherwise shown follow the recommendations established by American concrete institutes.

BARS WITH VARIABLE UNIT LENGTH

Length quantities listed for variable bars are average length only. Exact length of bars shall be considered base on the structure dimensions.

LEAN CONCRETE


Lean concrete, its mix design, thickness and method of application shall be determined by the Engineer based on project status and field conditions.

REFERENCE DWGS: See also dwgs. N^o. 20/2/1/02 & 20/2/1/03


Scale:	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. N ^o 20/2/1/01	
Approved:	Sheet-N ^o 1 of 3	Rev. N ^o

GENERAL NOTES
CONCRETE REINFORCEMENT


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU

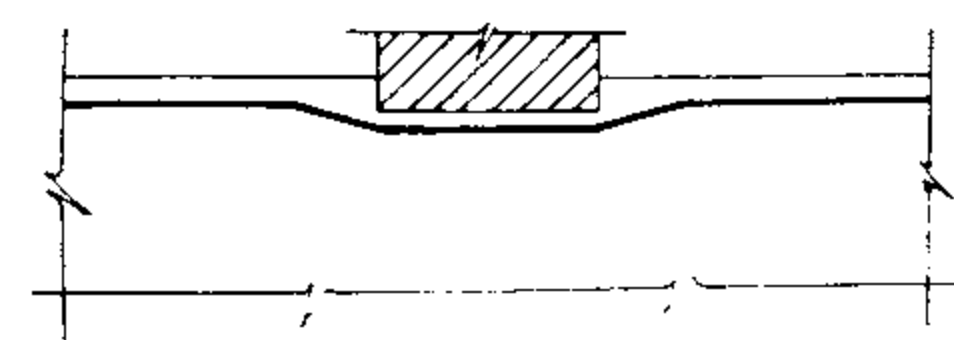


RECESS LESS THAN 8 cm.

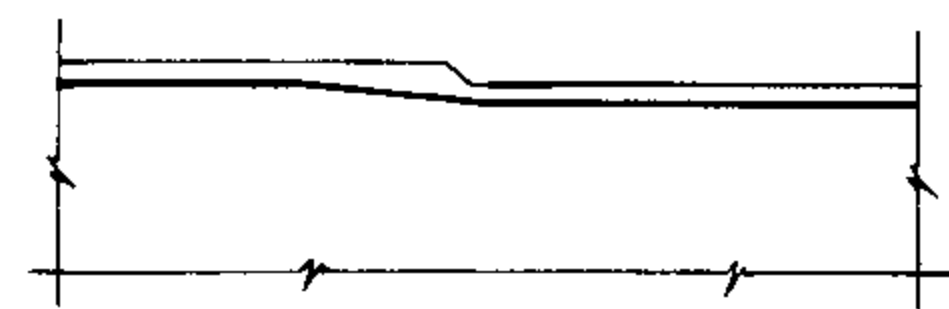


OFFSET 8 cm. OR LESS

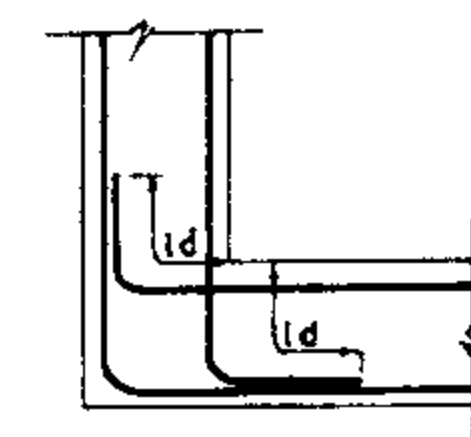


MEMBERS LESS THAN 1d IN THICKNESS

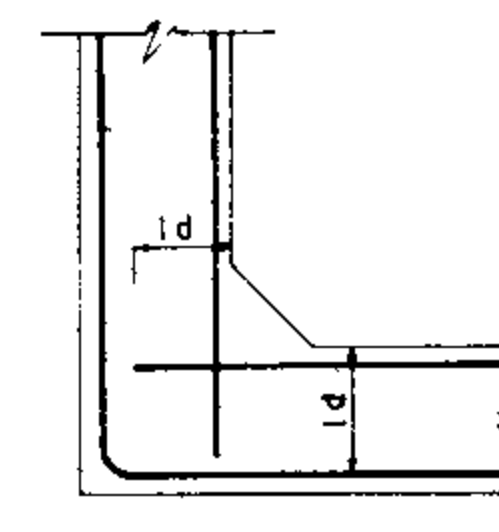



FILLET LESS THAN 30 cm.

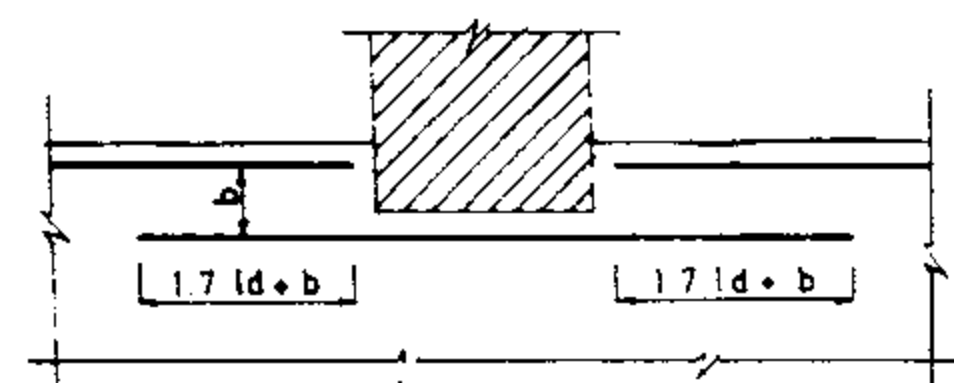


RECESS 8 cm. TO 20 cm.

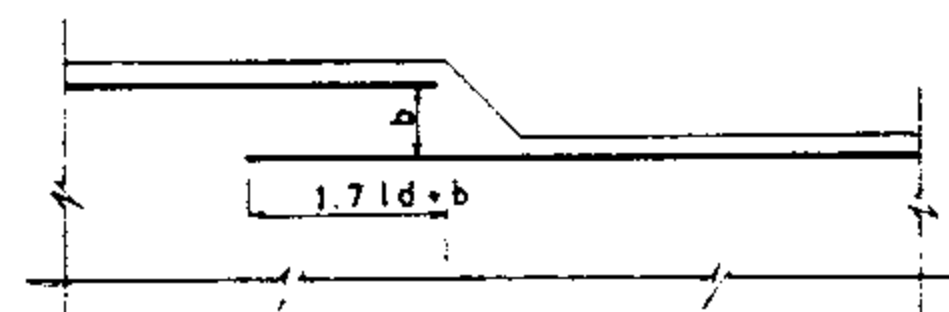


8 cm. < OFFSET < 20 cm.

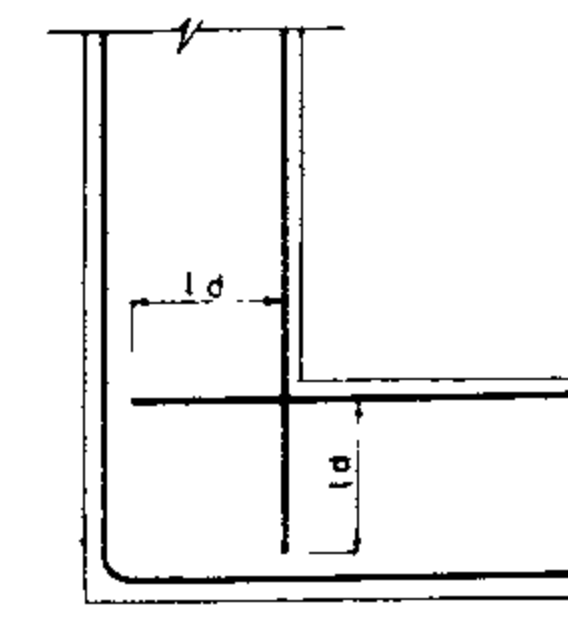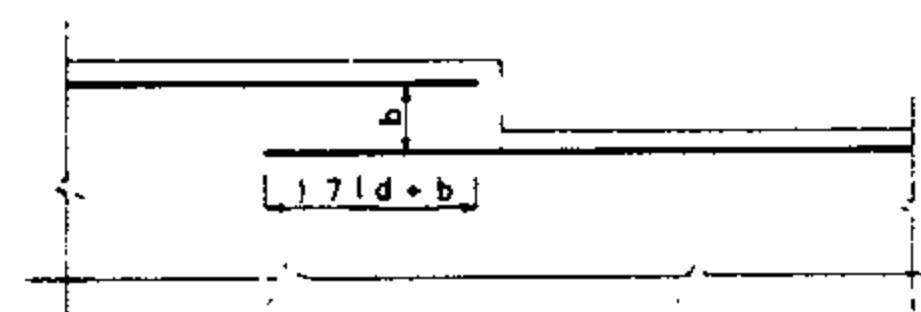


MEMBERS GREATER THAN 1d IN THICKNESS

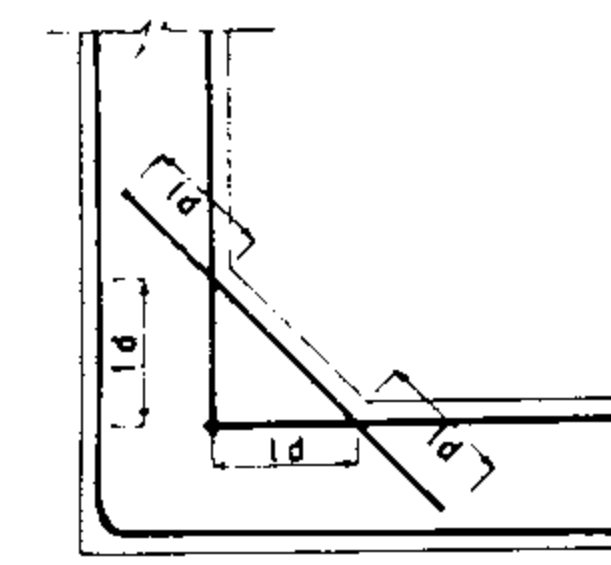


FILLET 30 cm. OR GREATER

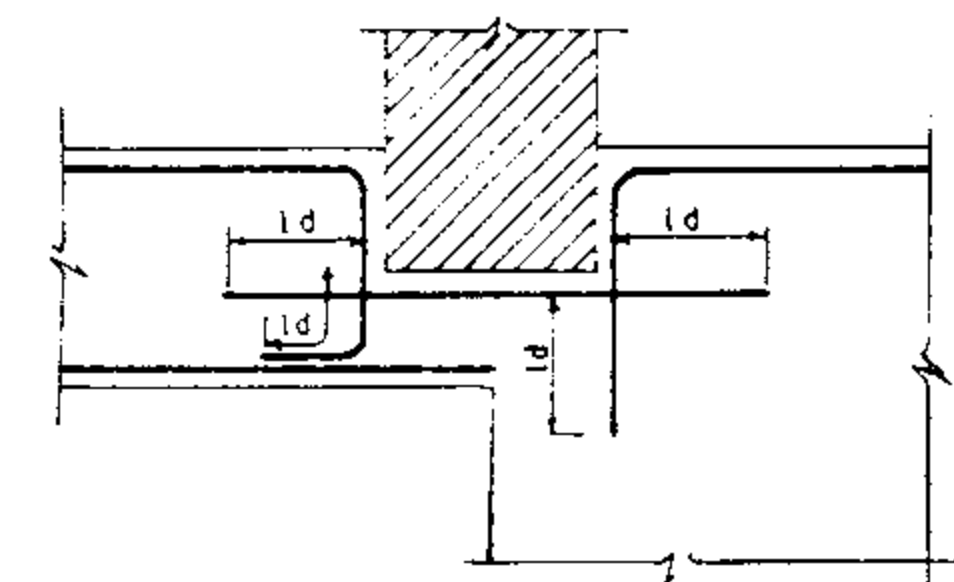


RECESS 20 cm. AND GREATER

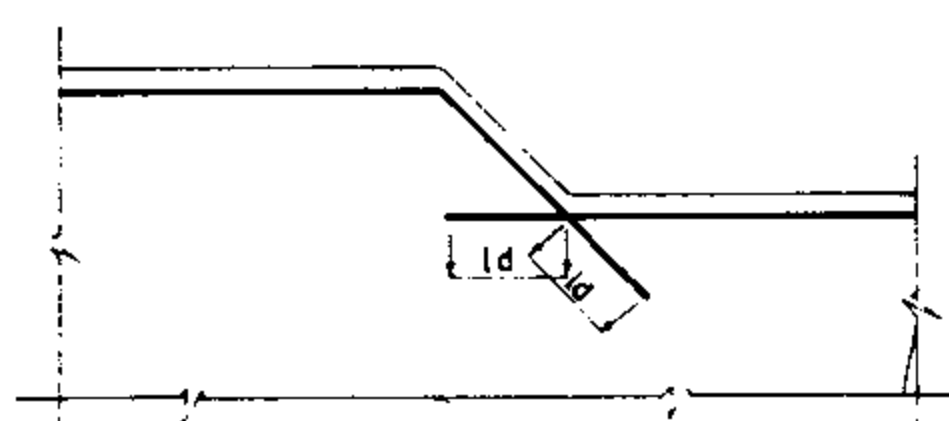

ANGULATED

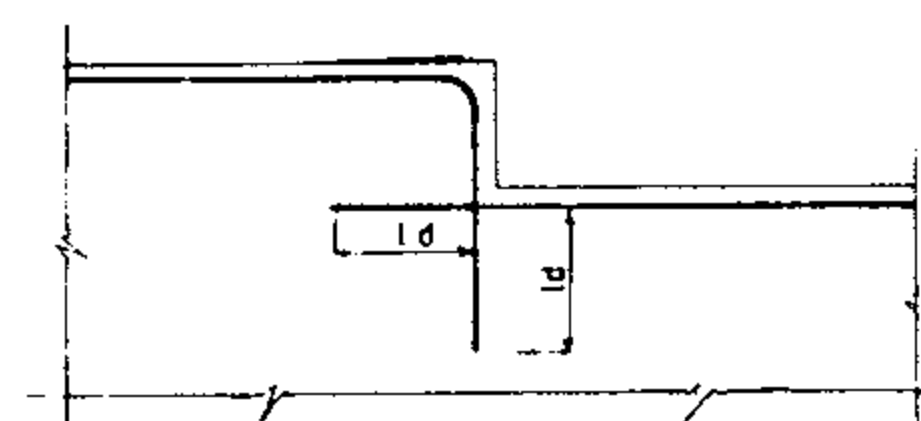


RIGHT ANGLE

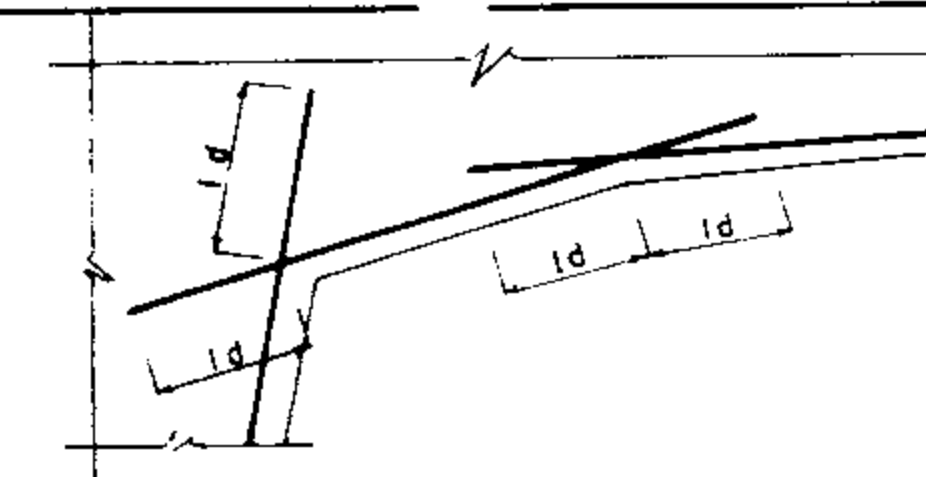


FORMED CORNER


TYPICAL CORNER DETAILS

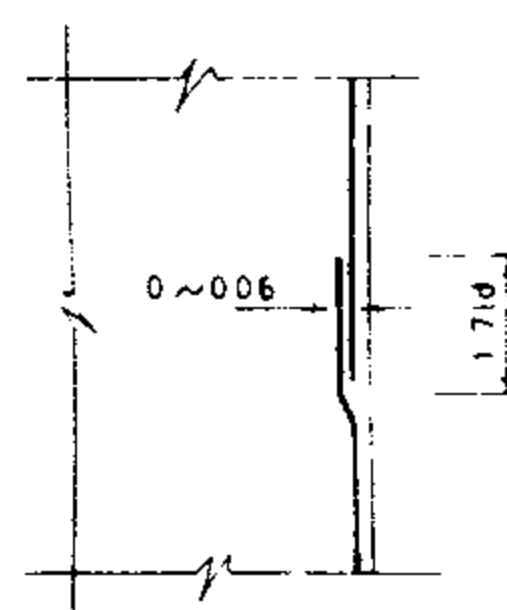


OVER LAP

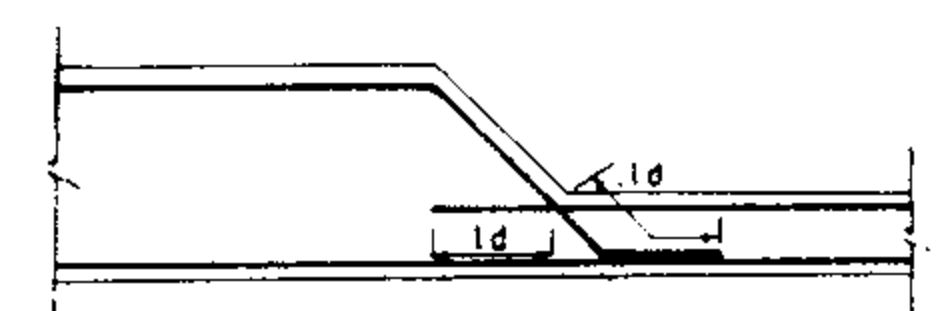

OFFSET 20cm. or MORE
RESTRICTED MEMBER THICKNESS

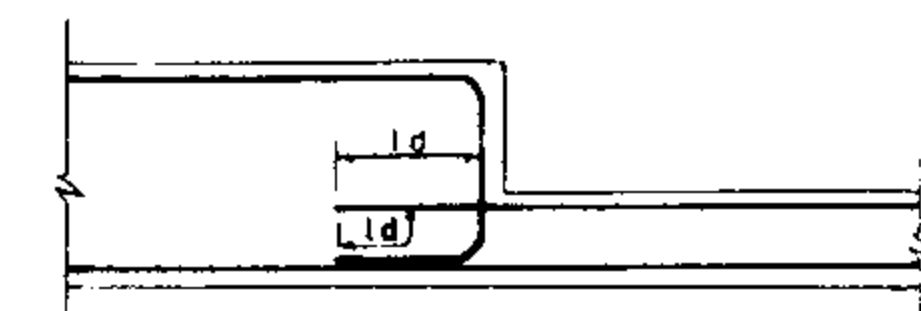

TYPICAL OFFSET DETAILS

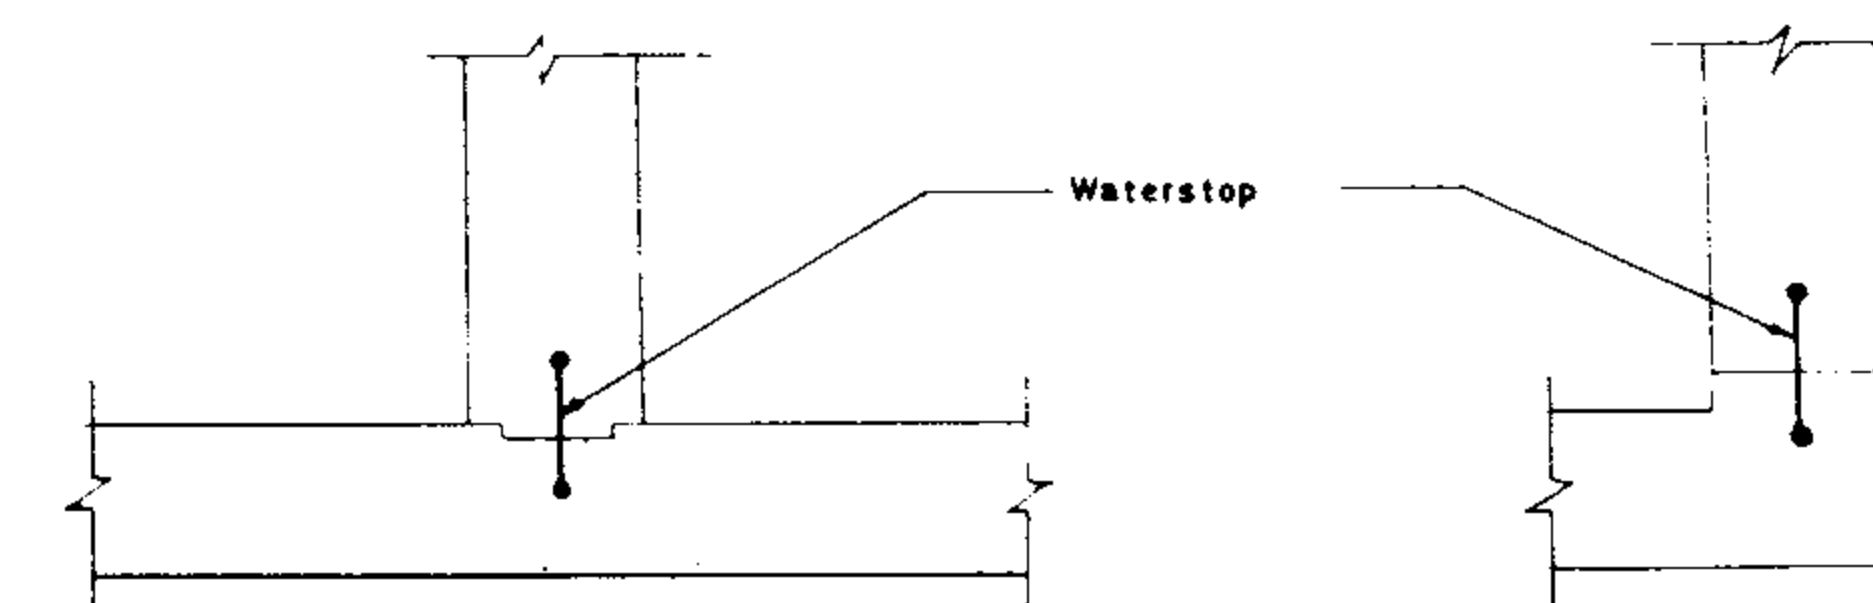


WATERSTOP


REFERENCE DWGS: See also dwgs. No 20/2/1/01 & 20/2/1/03

Scale:	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG No. 20/2/1/02	GENERAL NOTES DETAILING REINFORCEMENT JOINT, WATERSTOP
Approved	Sheet No.2 of 3 Rev No.	


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU

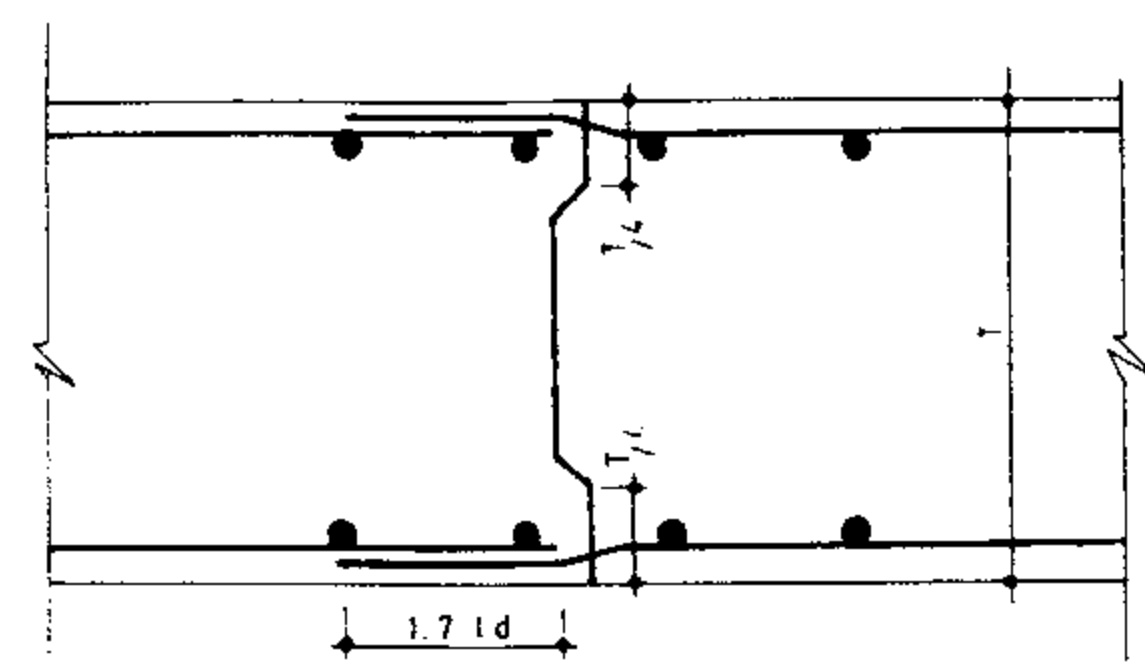

CONTINUED REINFORCEMENT

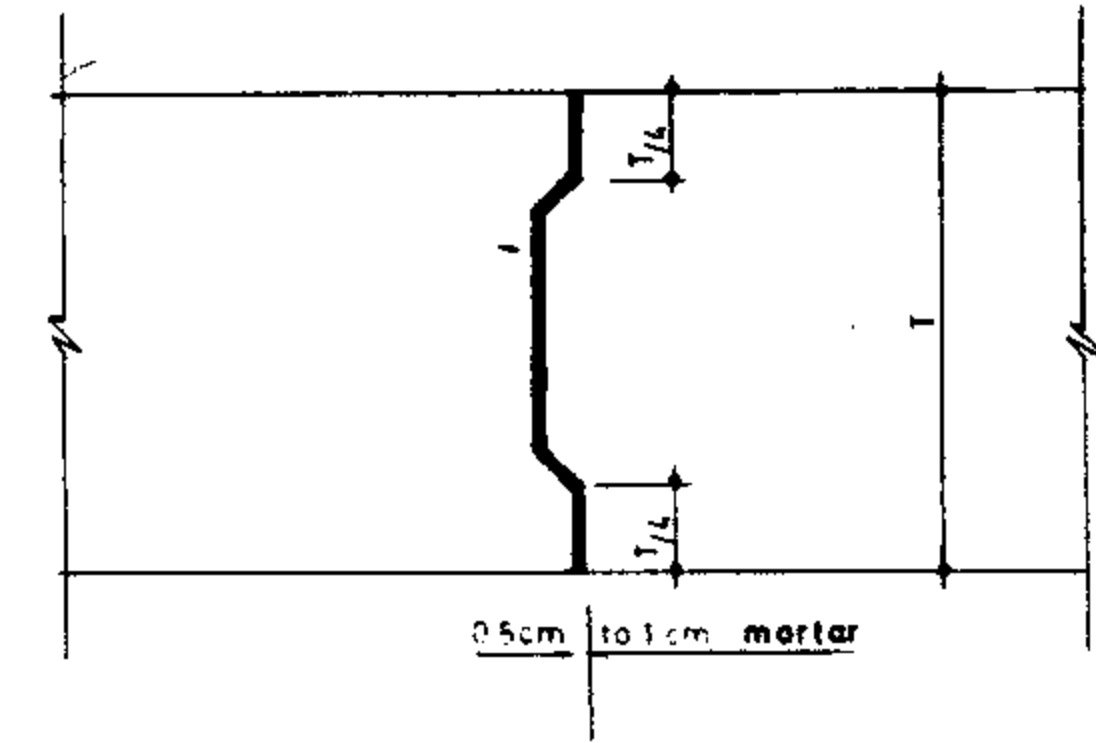


NON CONTINUED REINFORCEMENT OR PLAIN CONCRETE

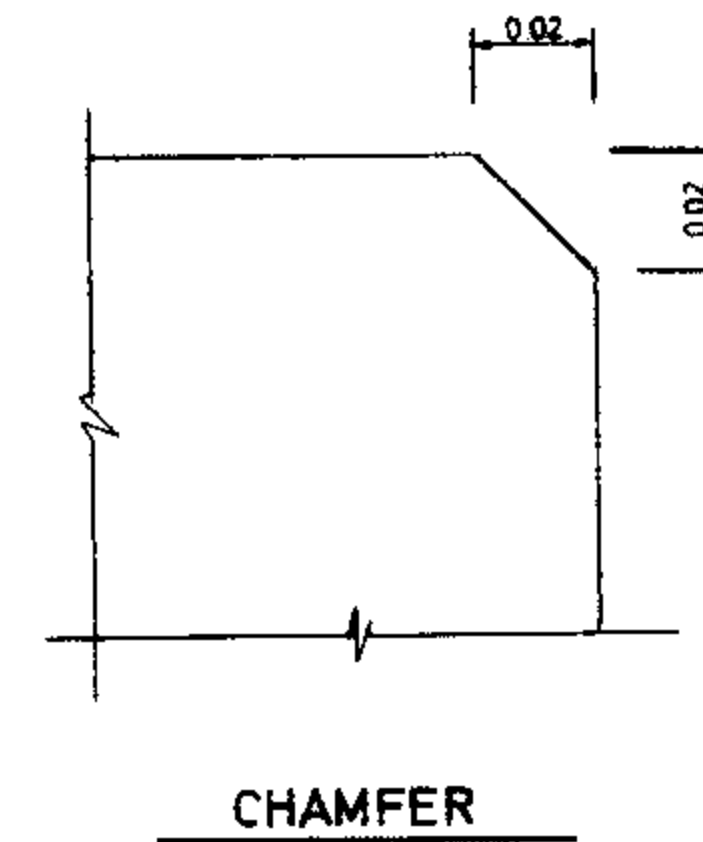


CHAMFER

CONSTRUCTION JOINT WITH SHEAR KEY

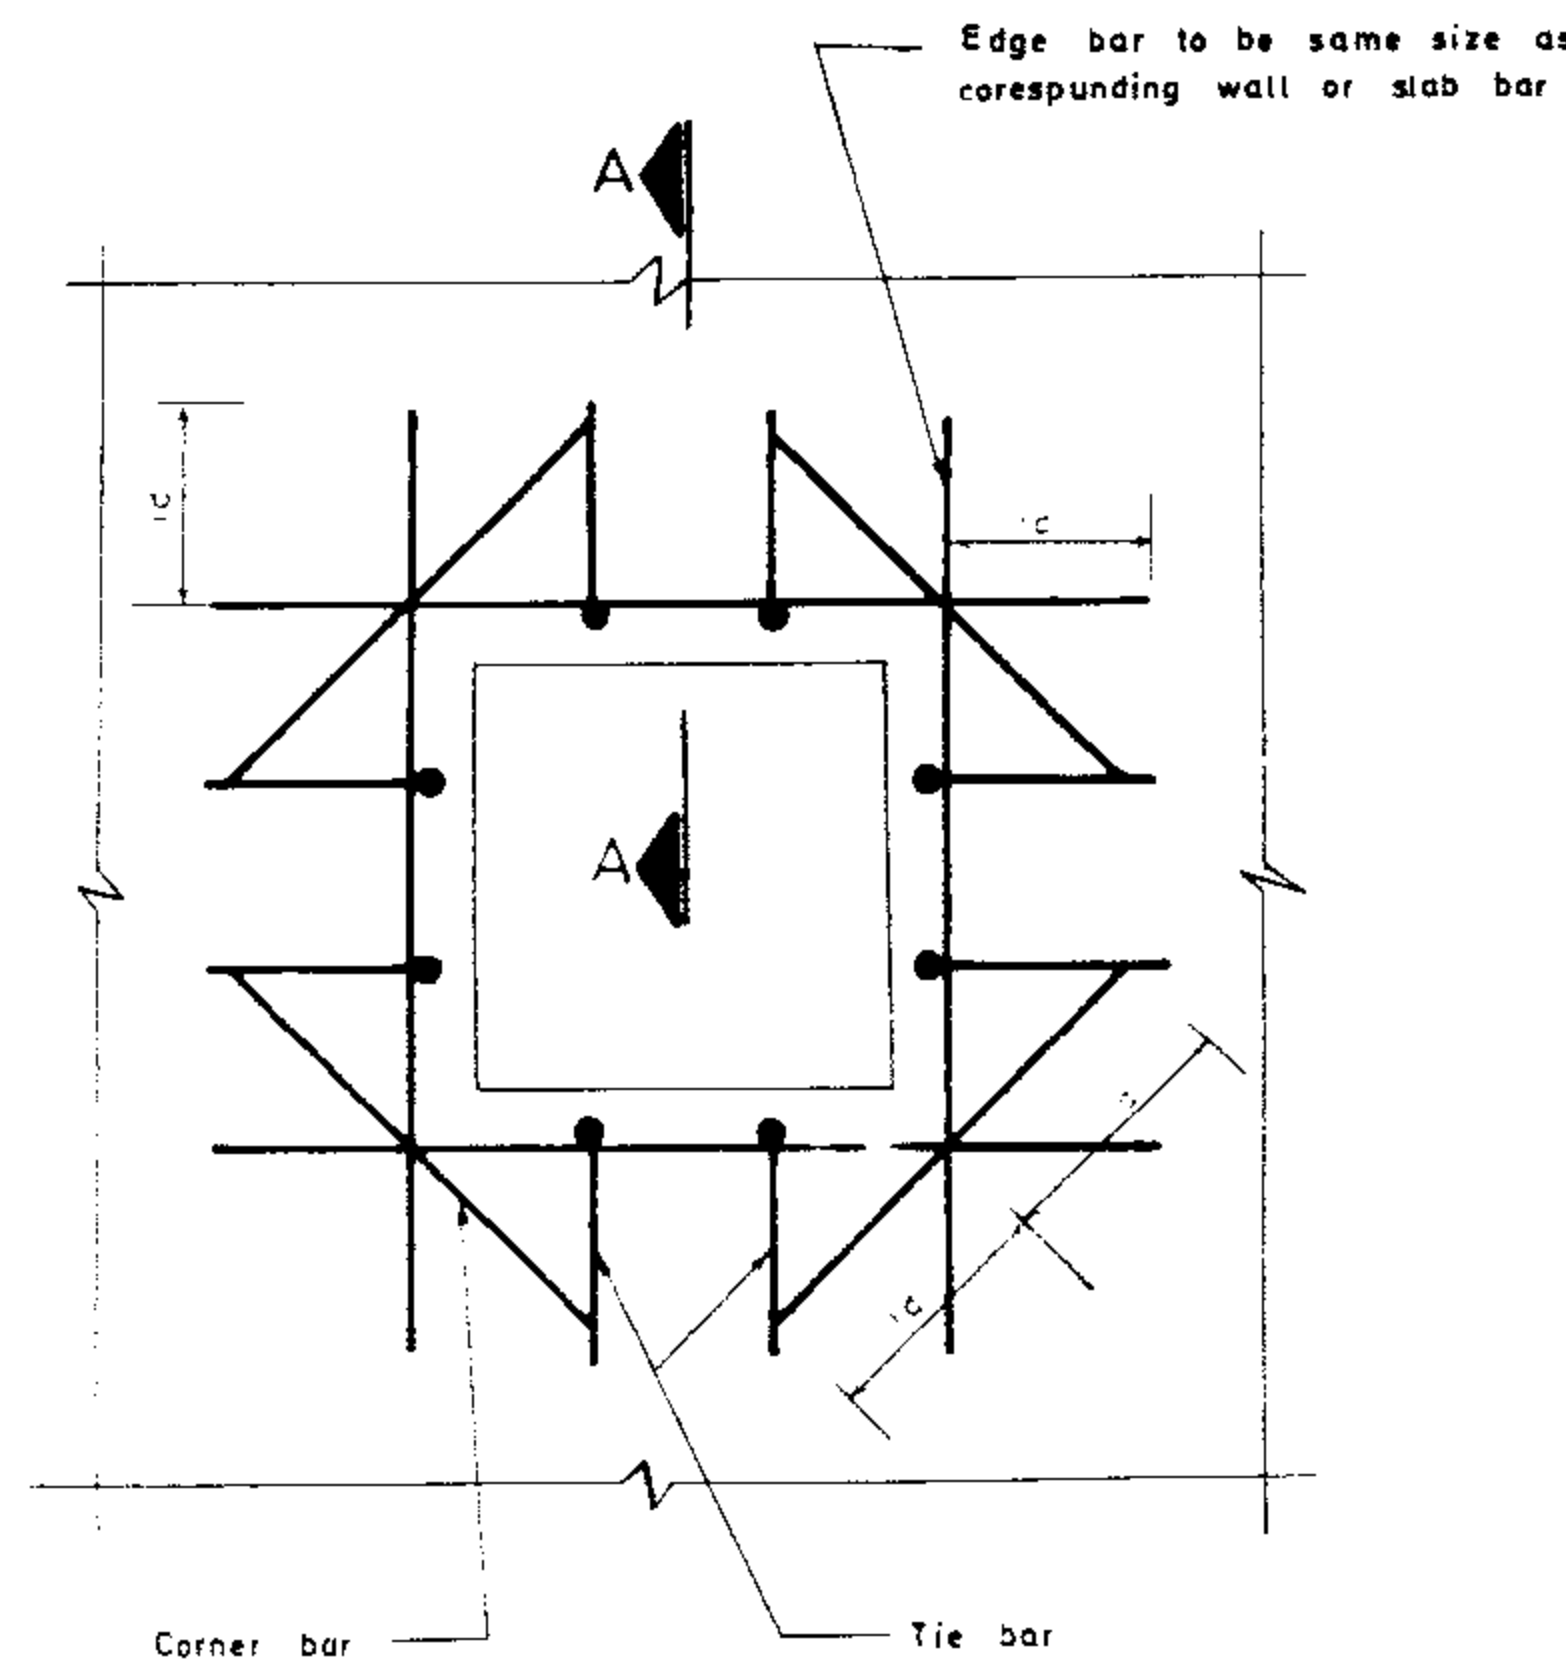

REINFORCEMENT AROUND OPENING IN WALLS AND SLABS

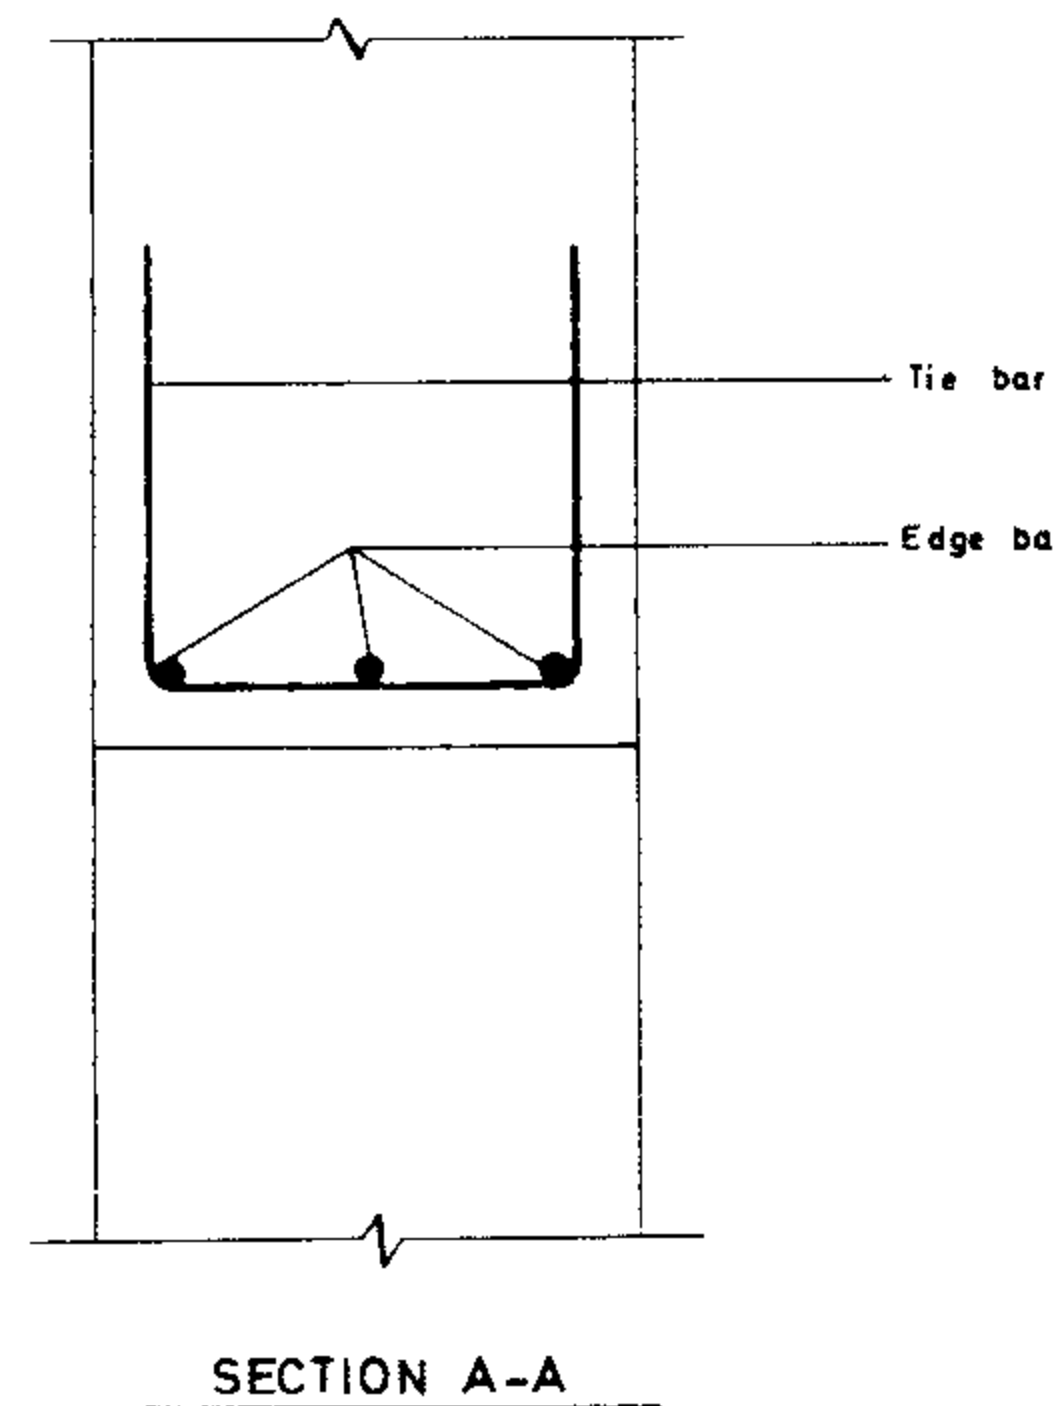

SECTION A-A


Table for reinforcement around openings

MEMBER THICKNESS	TIE BAR	EDGE BARS	CORNER BARS
LESS THAN 25cm	NONE	N ^o = 2	N ^o = 2 ∅ 14
25 TO 45cm	NONE	N ^o = 3	N ^o = 2 ∅ 14
45 TO 90cm	∅ 14 @ 25	N ^o = 3	N ^o = 3 ∅ 16
OVER 90cm	∅ 18 @ 25	SPACE @ 25cm	N ^o = 3 ∅ 22




-Corner bars required if either dimension opening is greater than 45 cm.

Omit edge and tie bars along sides of opening where dimension is less than 40 cm.

-Use corner bars in face of recesses deeper than 10cm if either dimension of recess is greater than 45 cm.

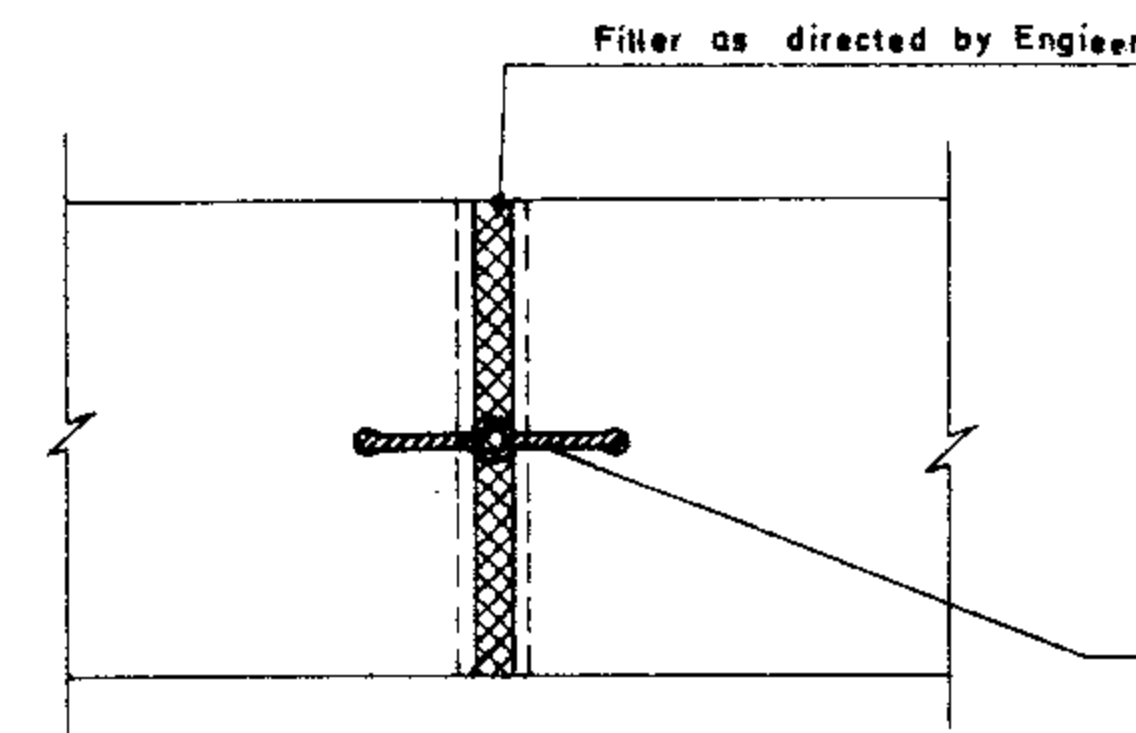

EXPANSION JOINT

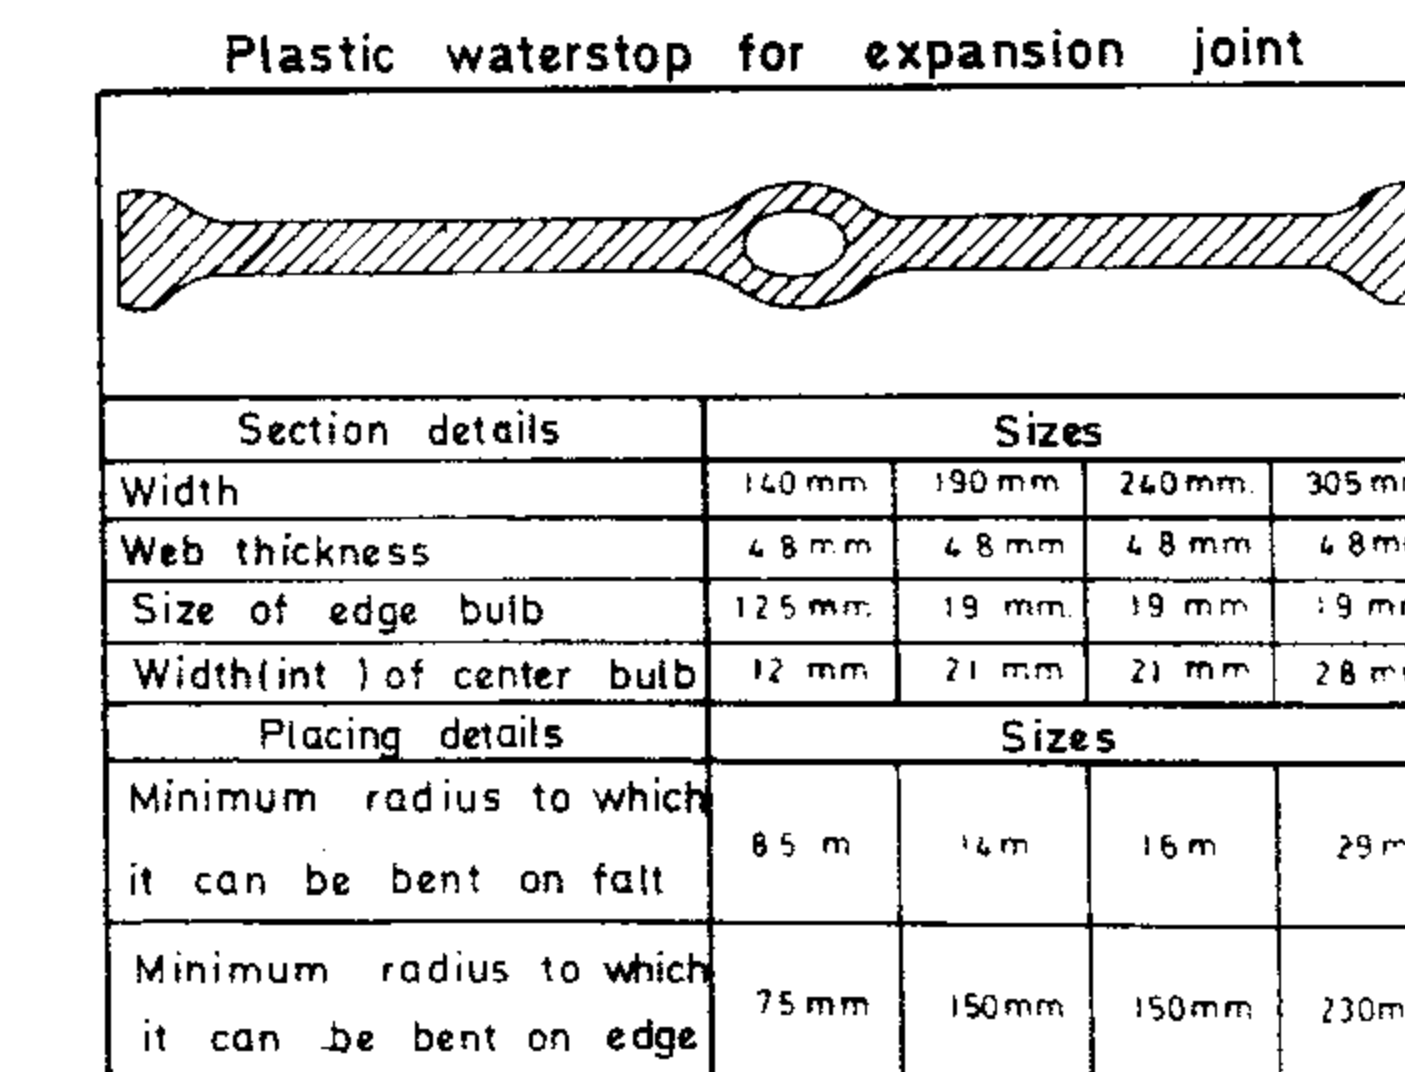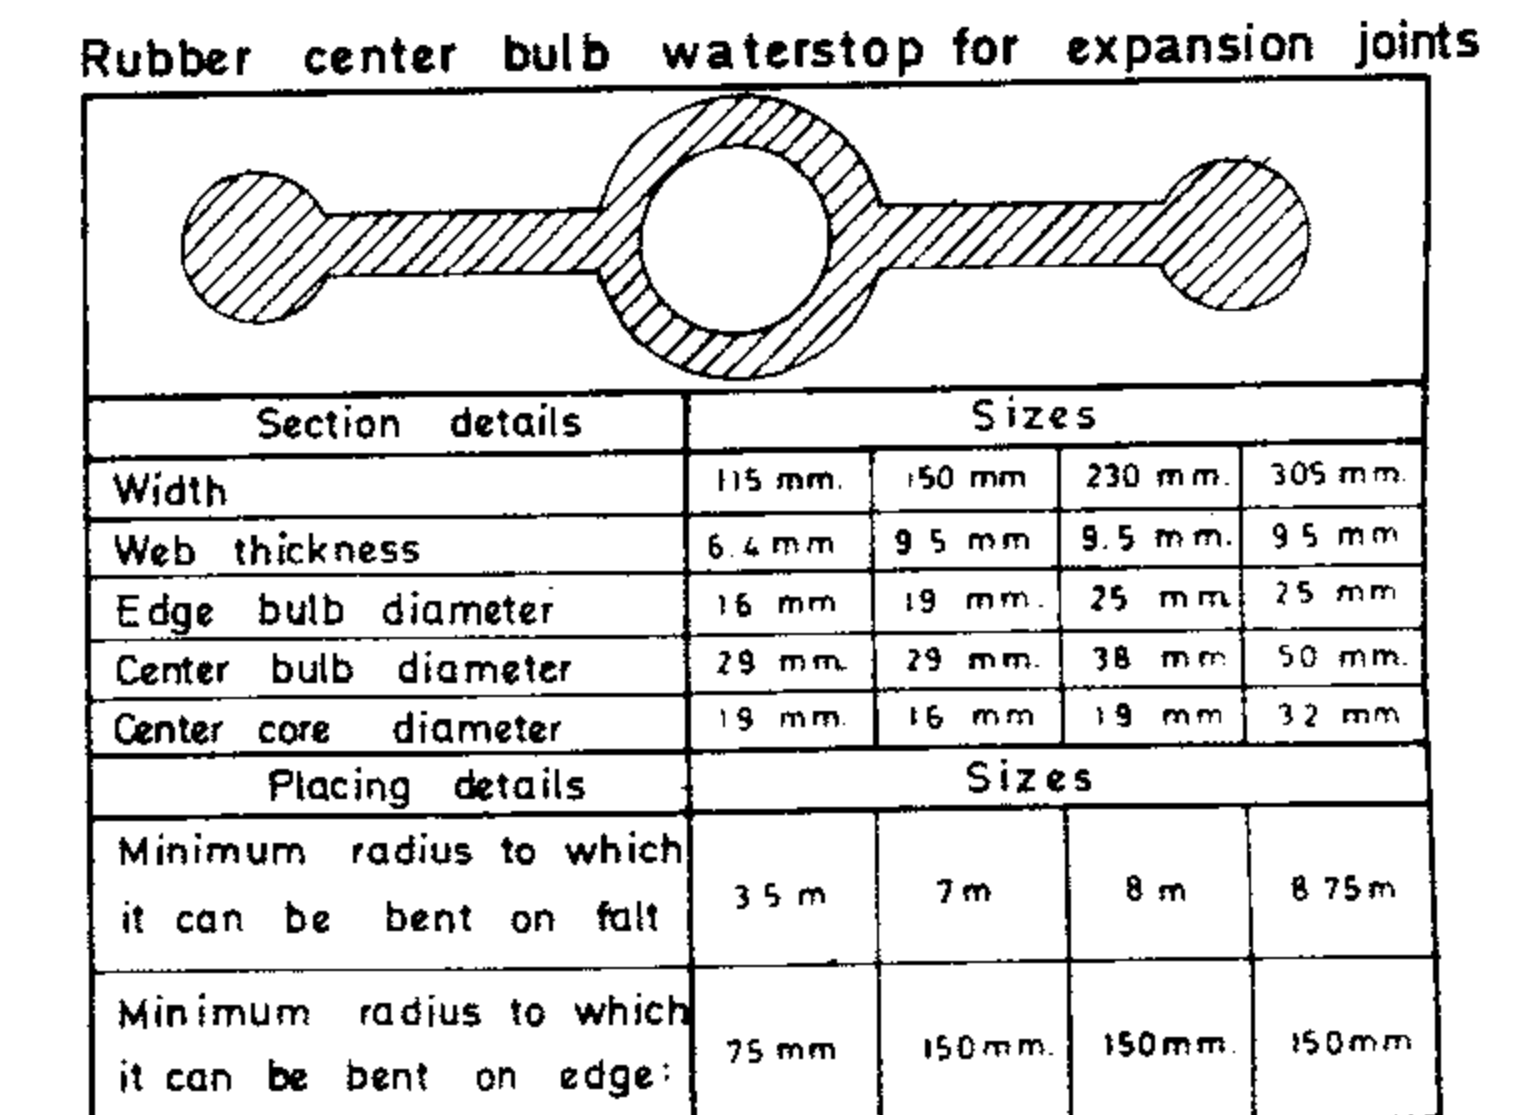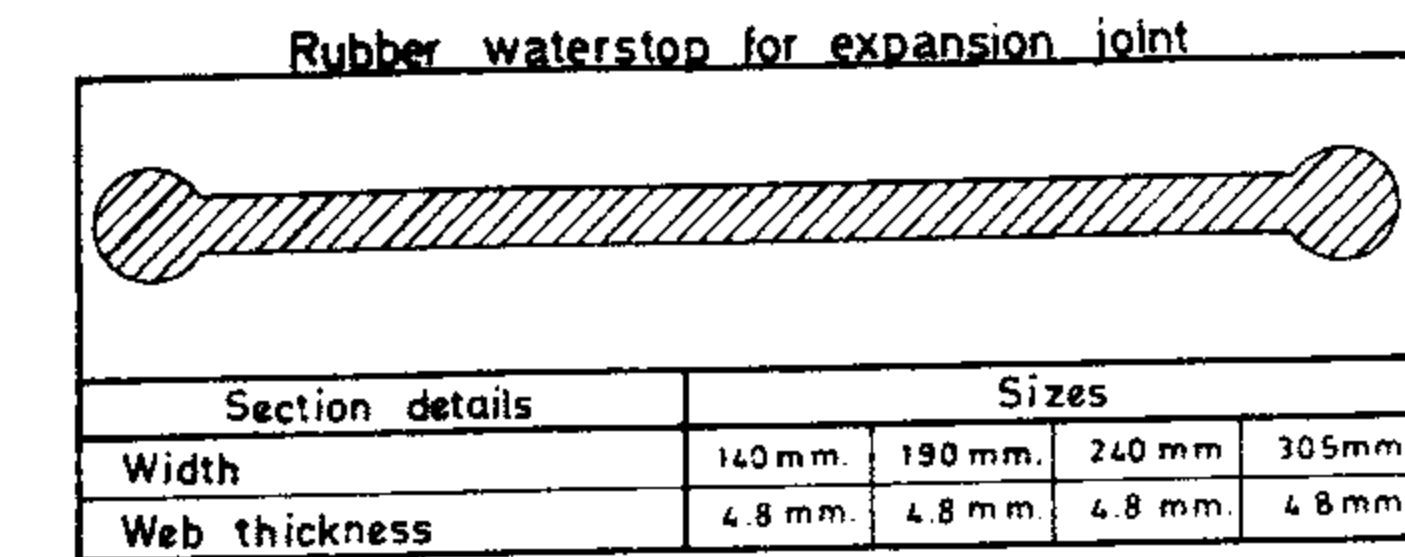











In most cases of water work structures where expansion joints are used waterstops are required.

REFERENCE DWGS: See also dwgs. No 20/2/1/01 & 20/2/1/02

Scale	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. No. 20/2/1/03	
Approved:	Sheet No. 3 of 3	Rev No.

GENERAL NOTES
DETILING REINFORCEMENT
JOINT WATERSTOP

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU

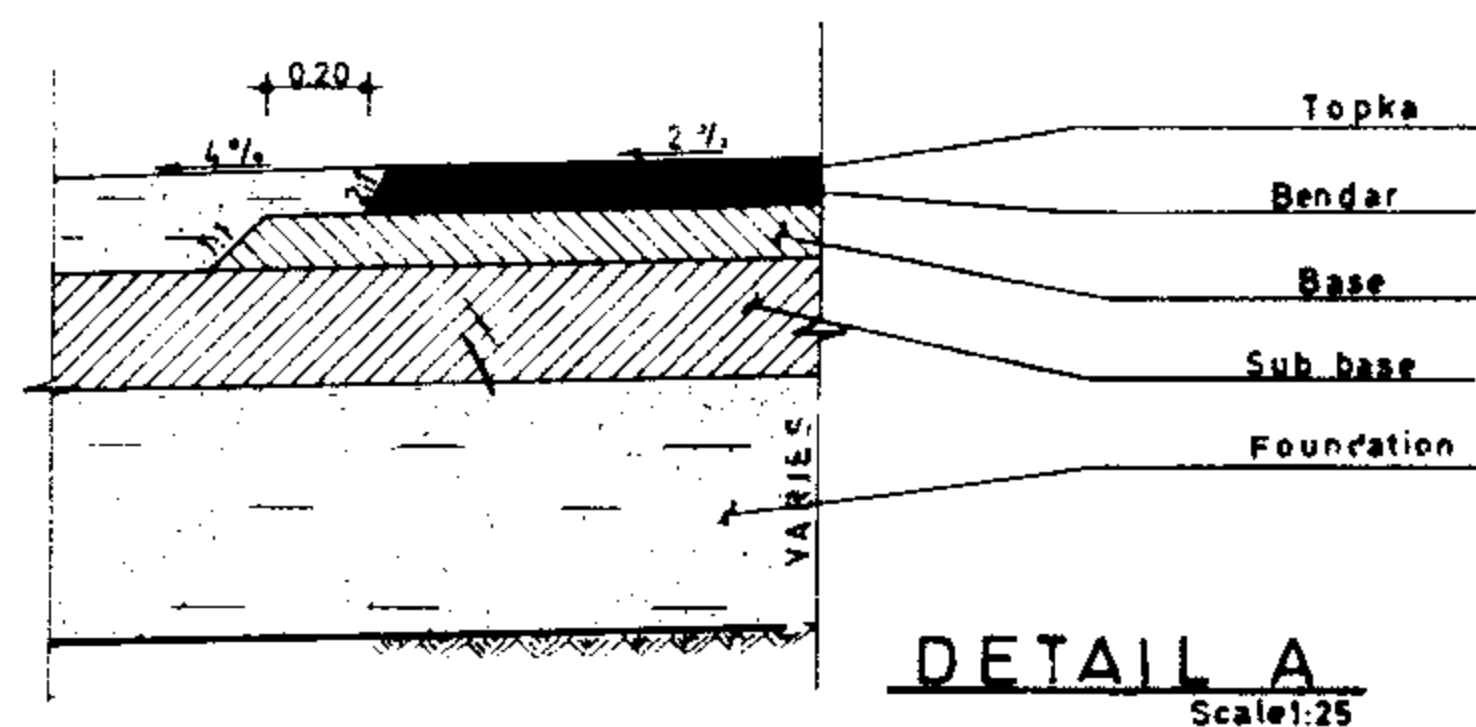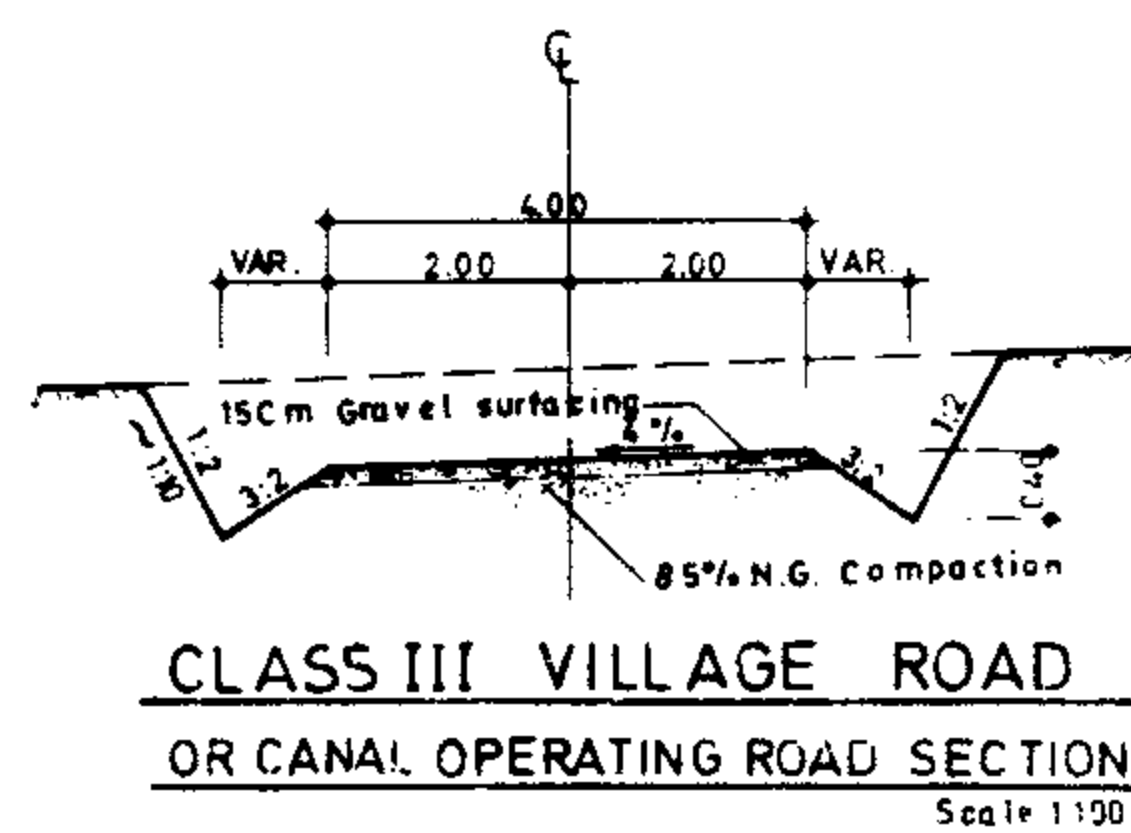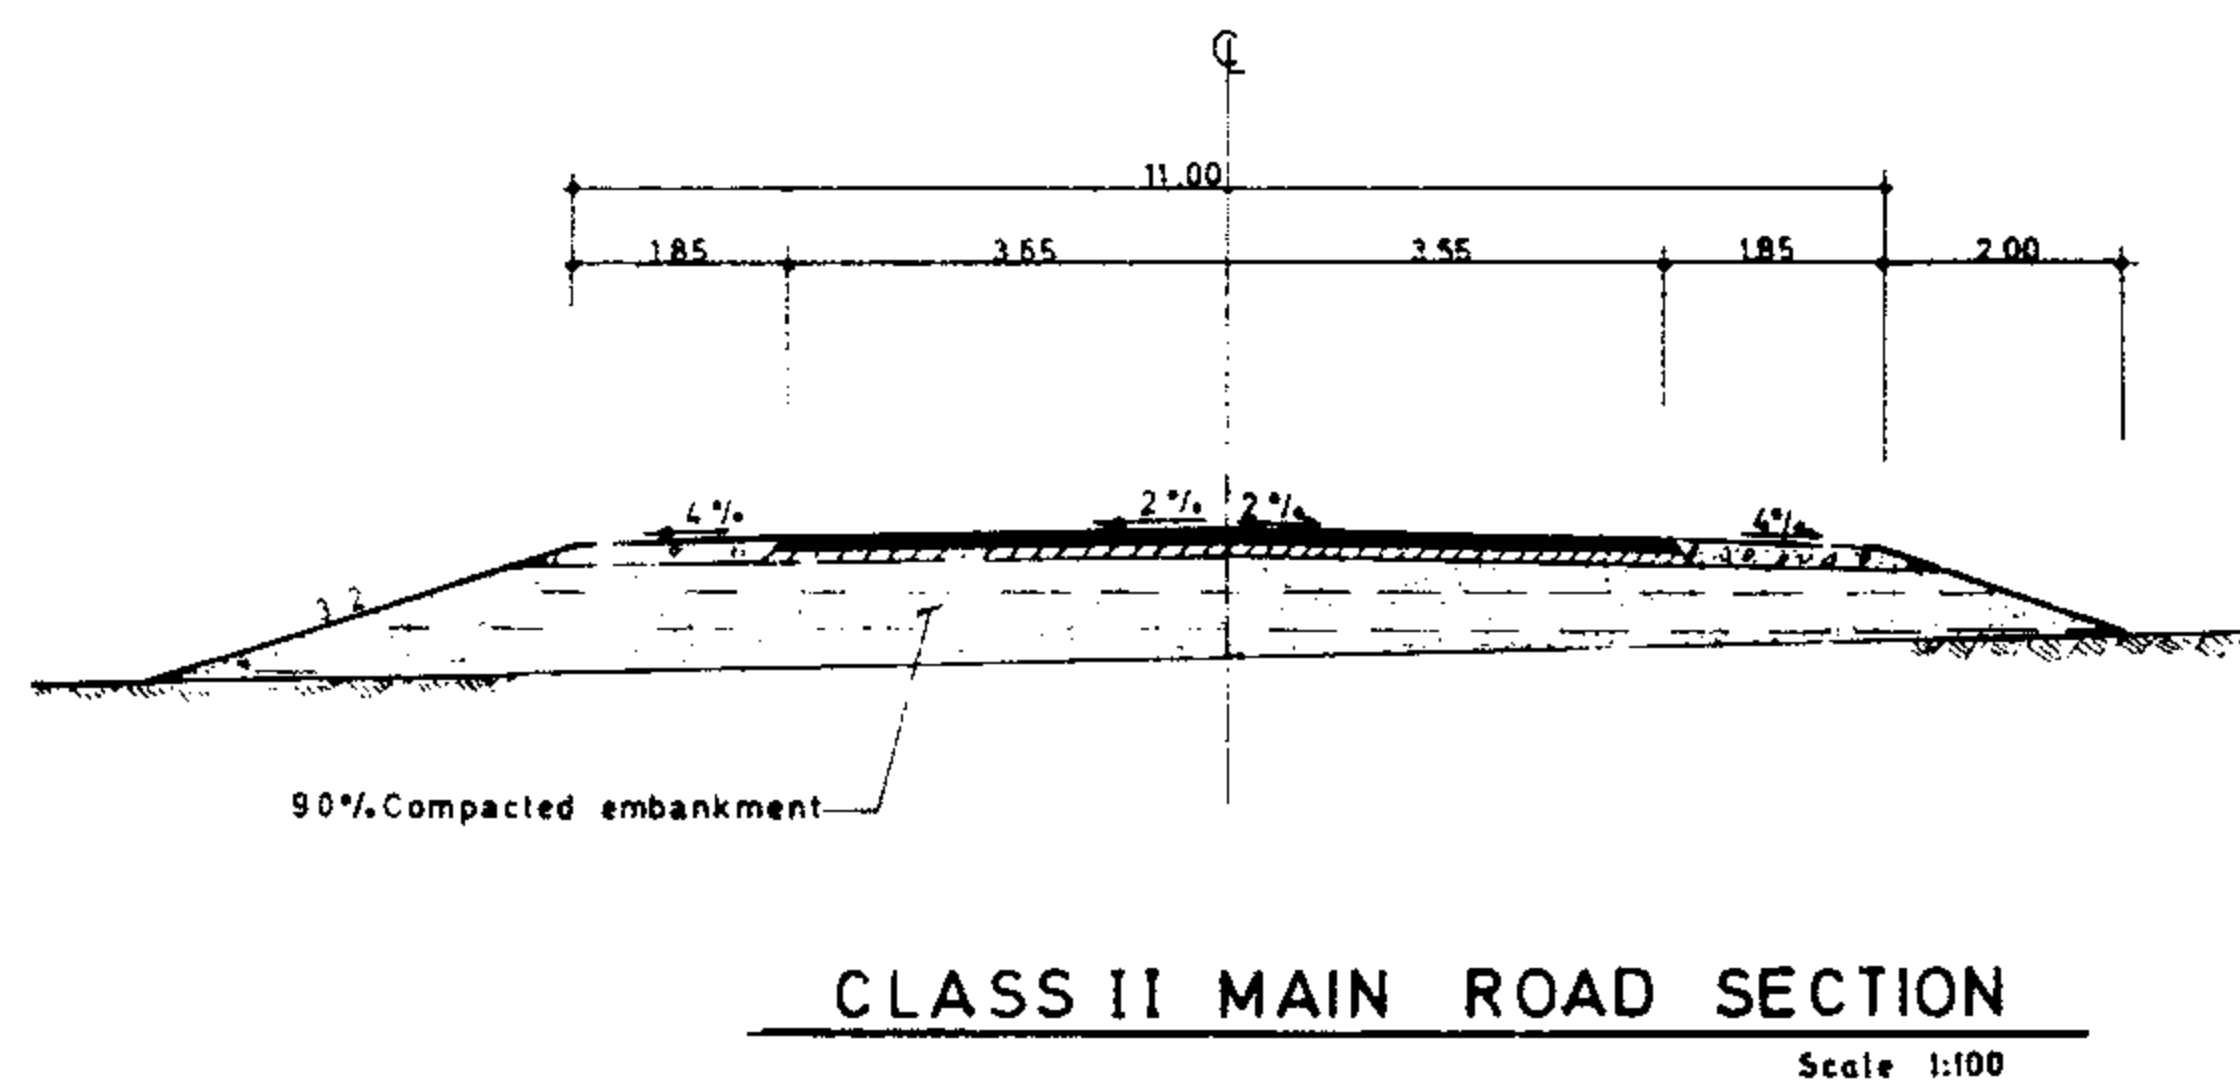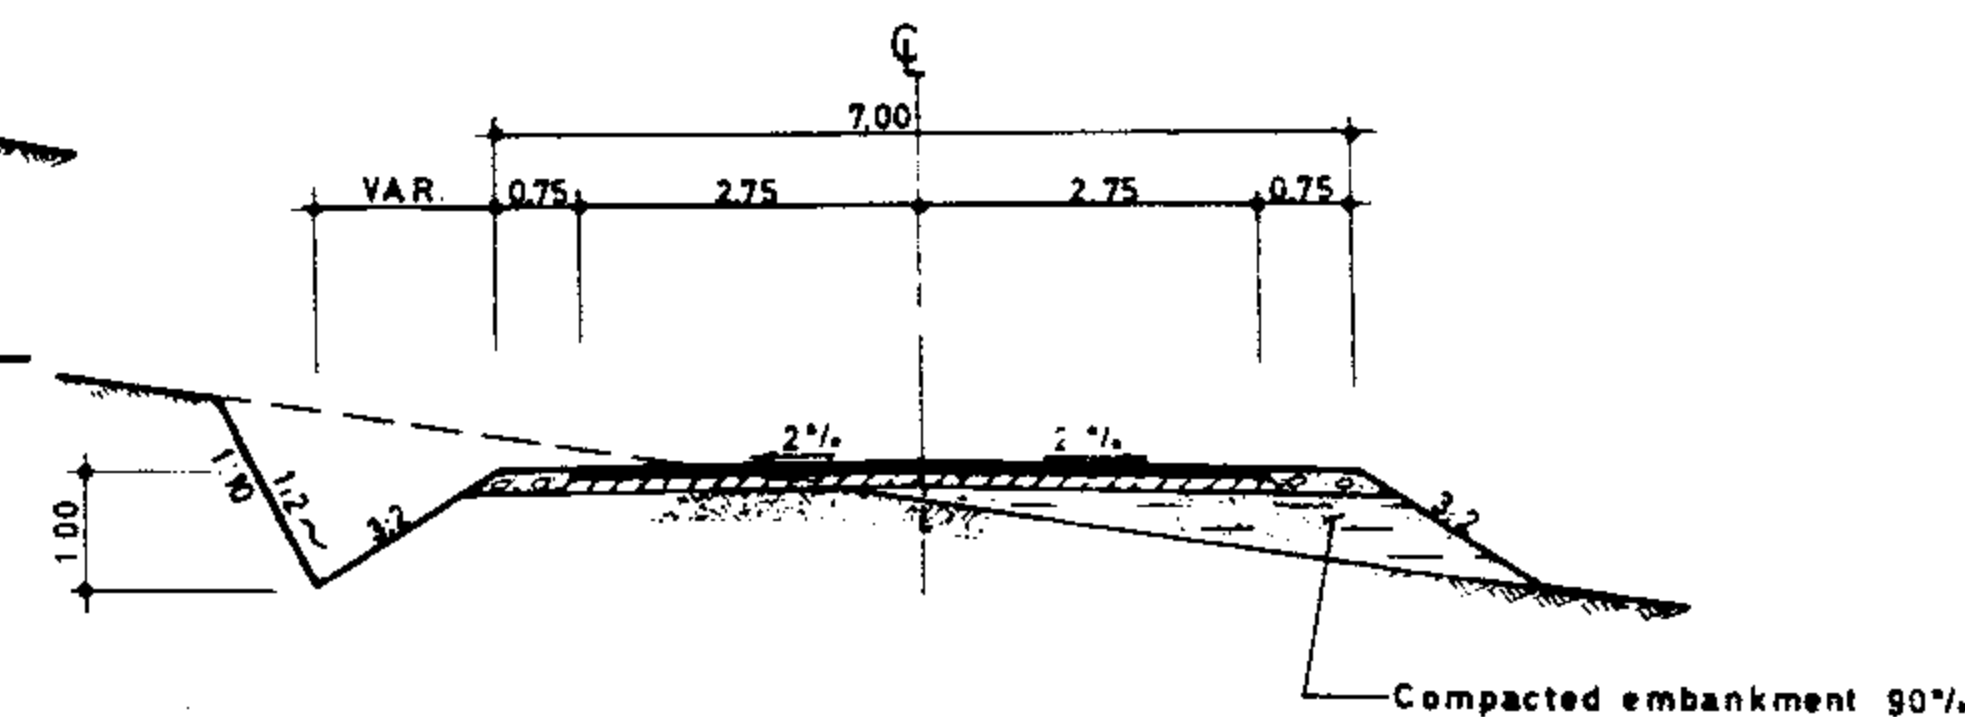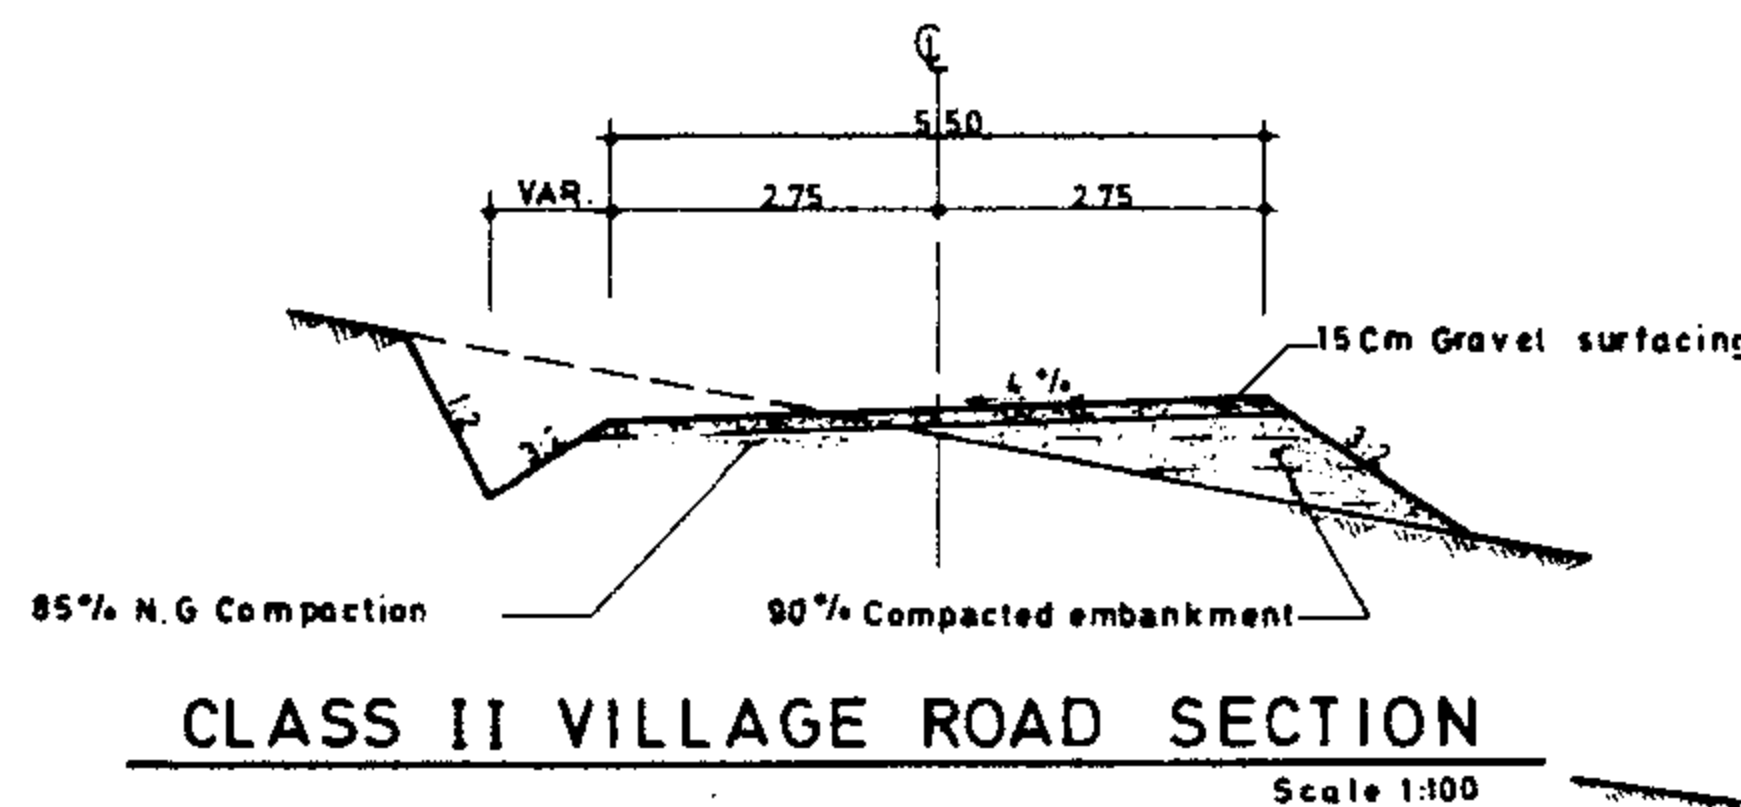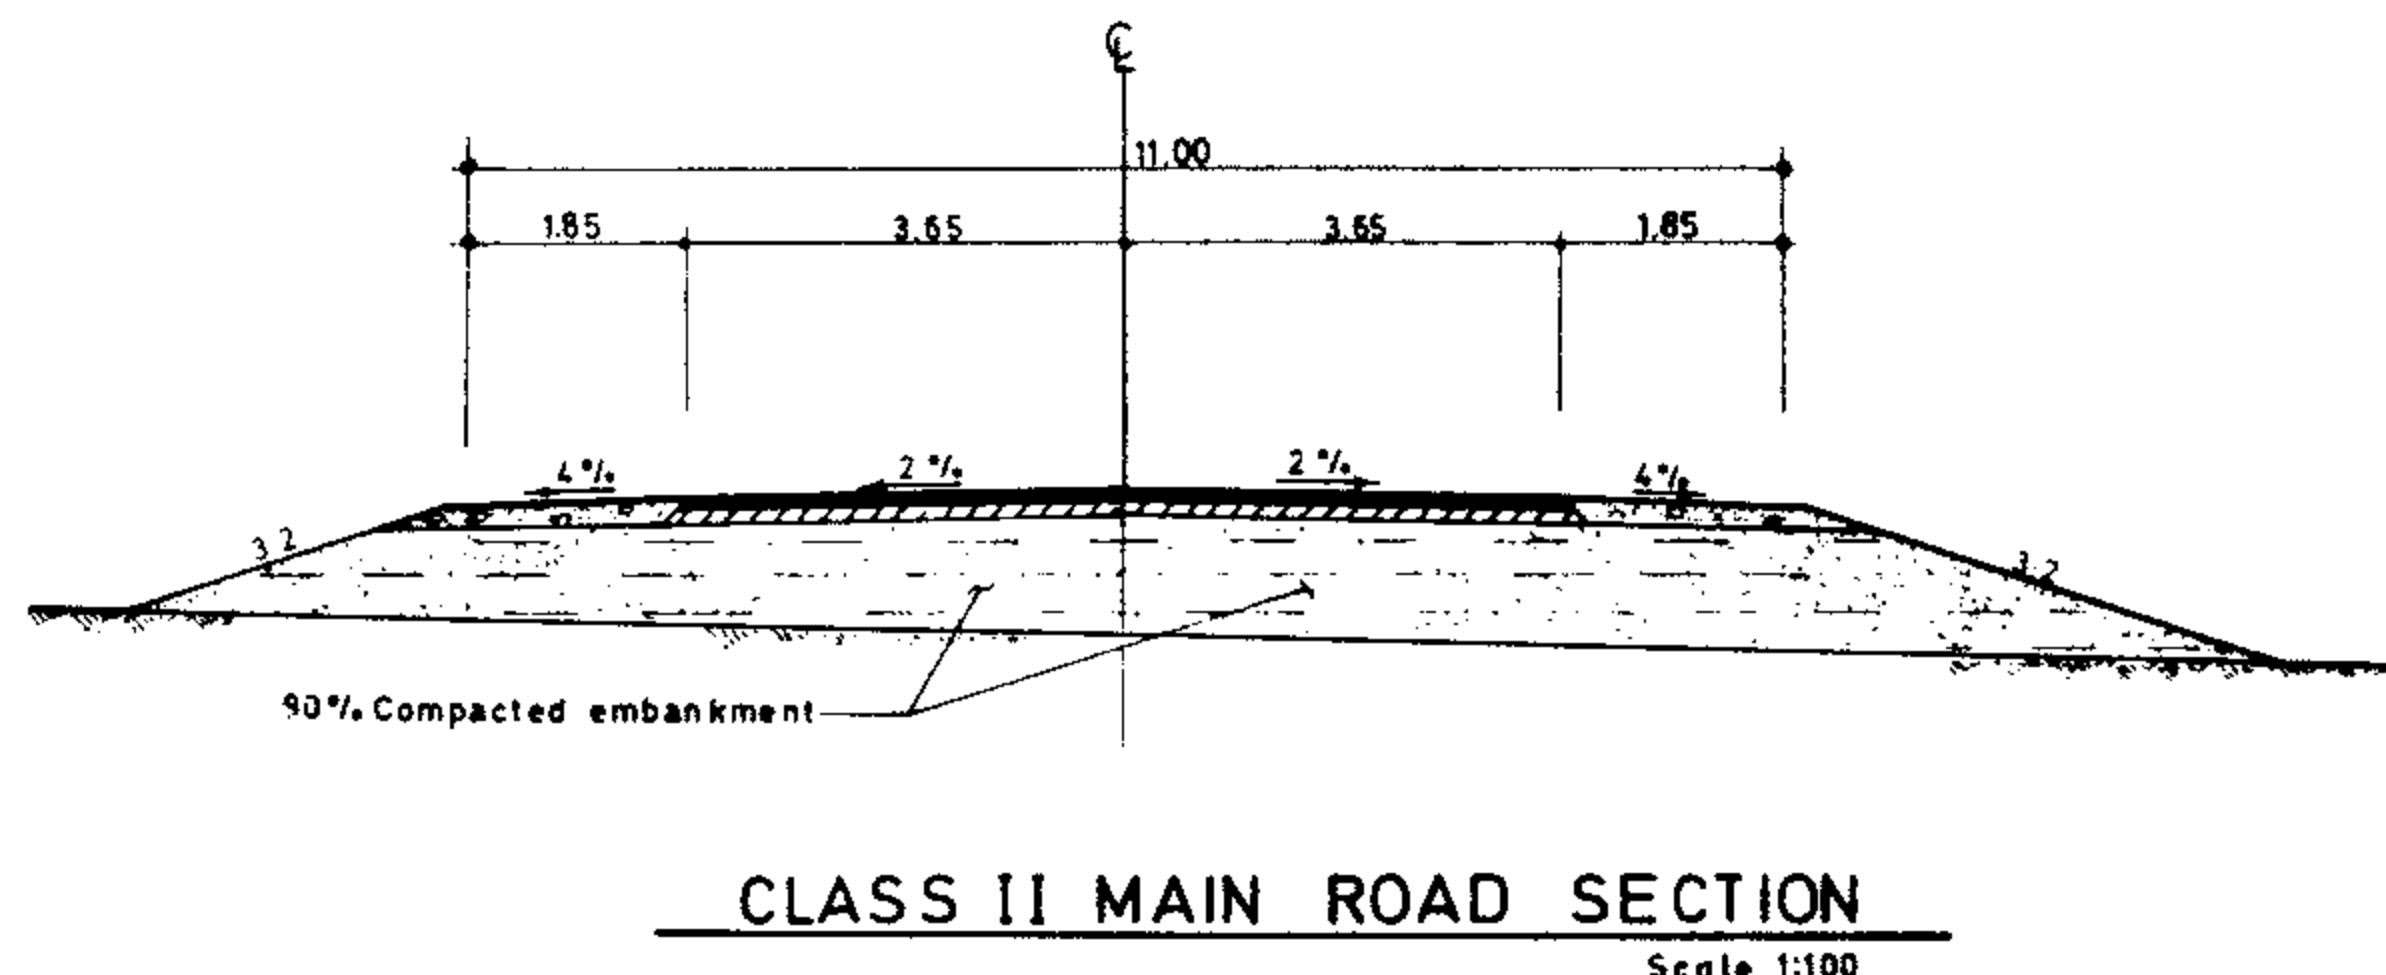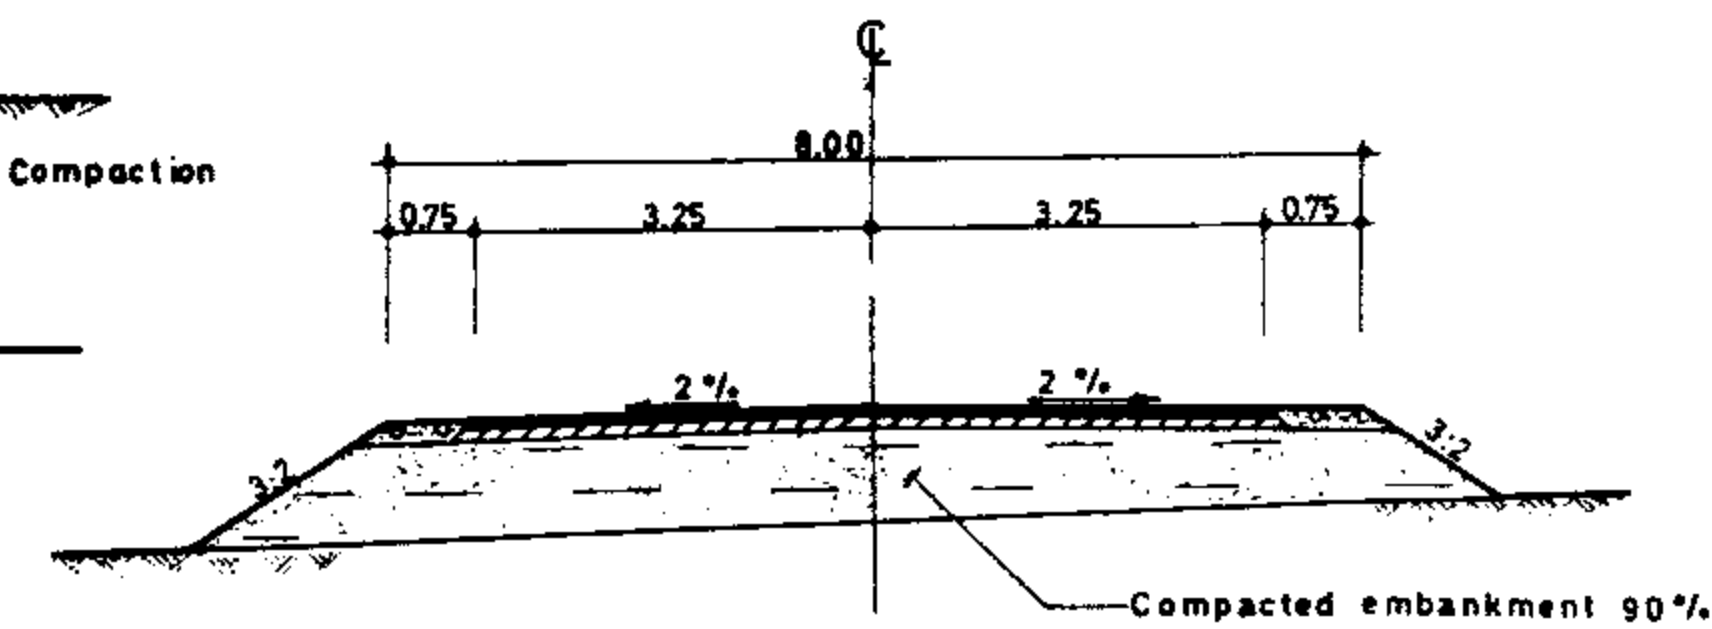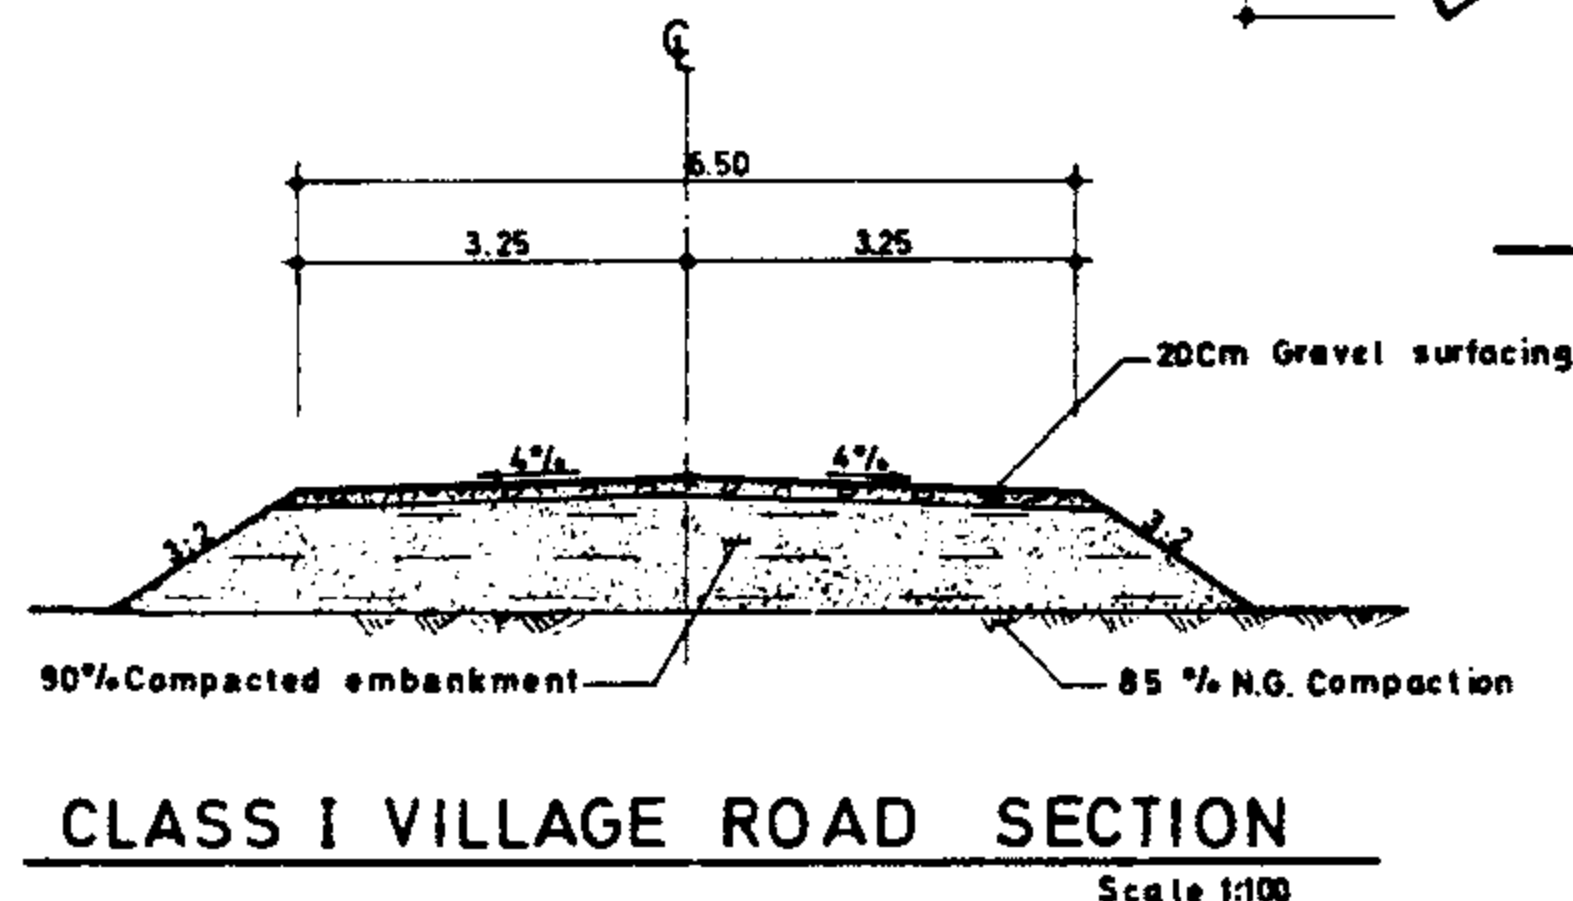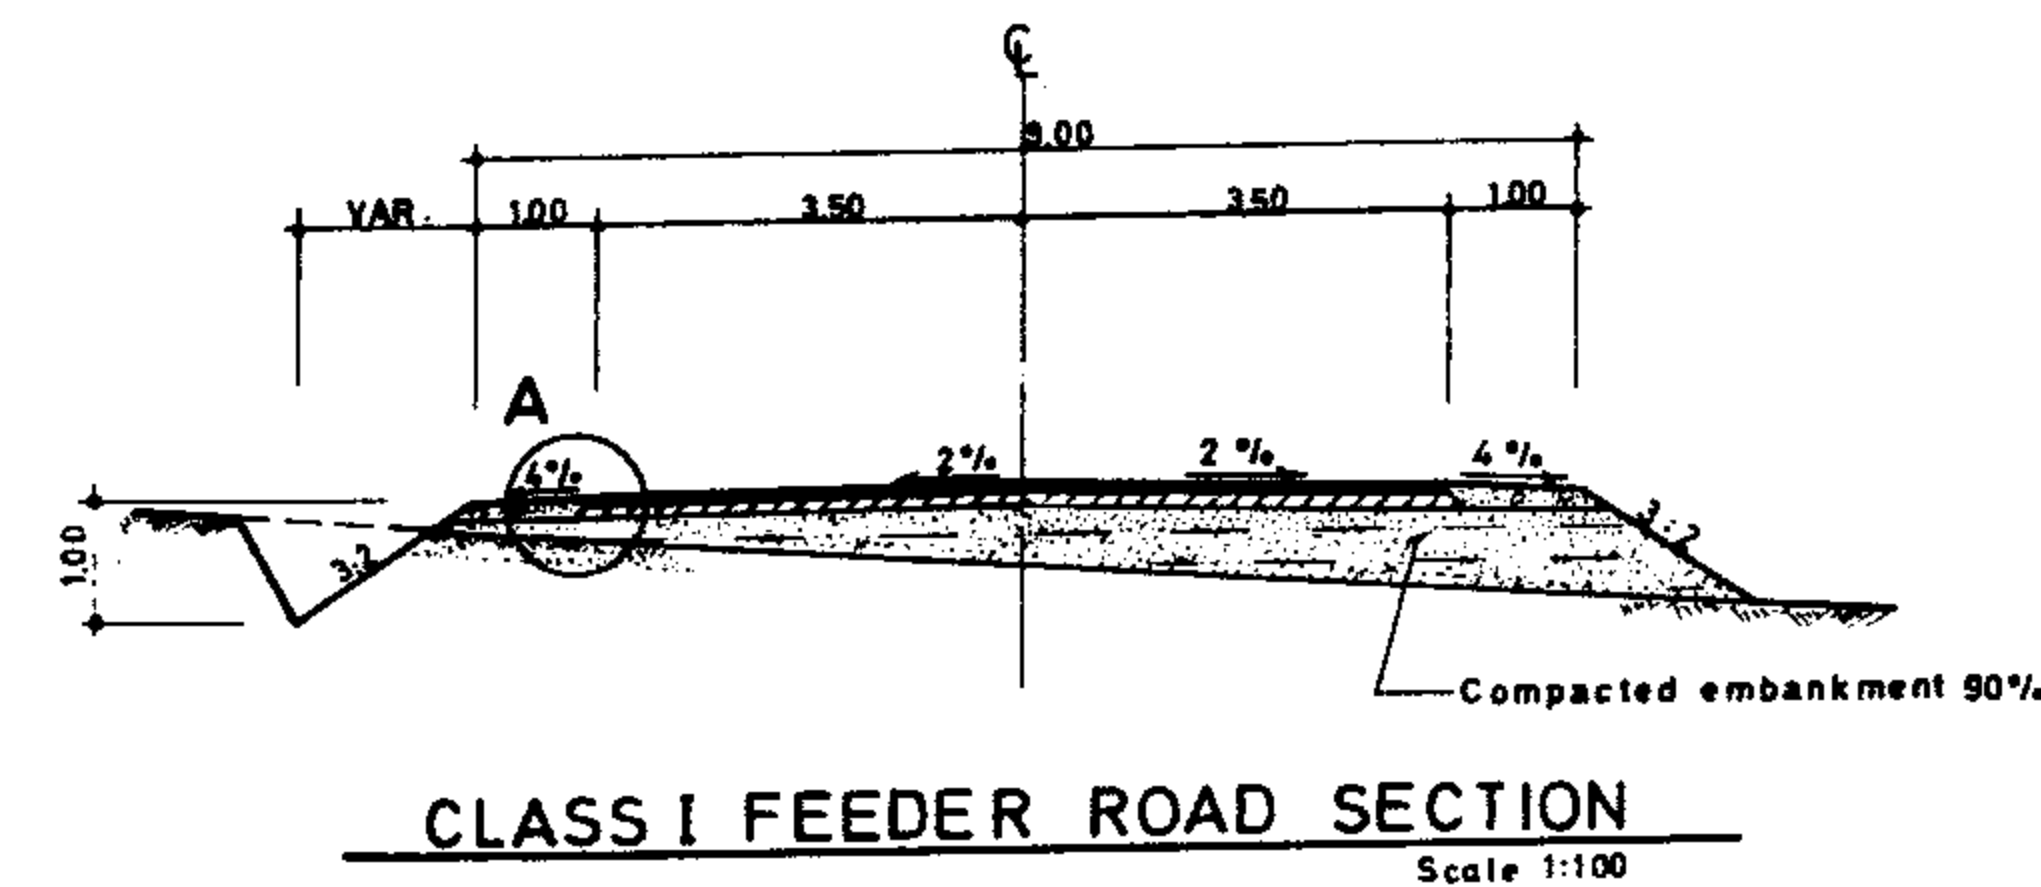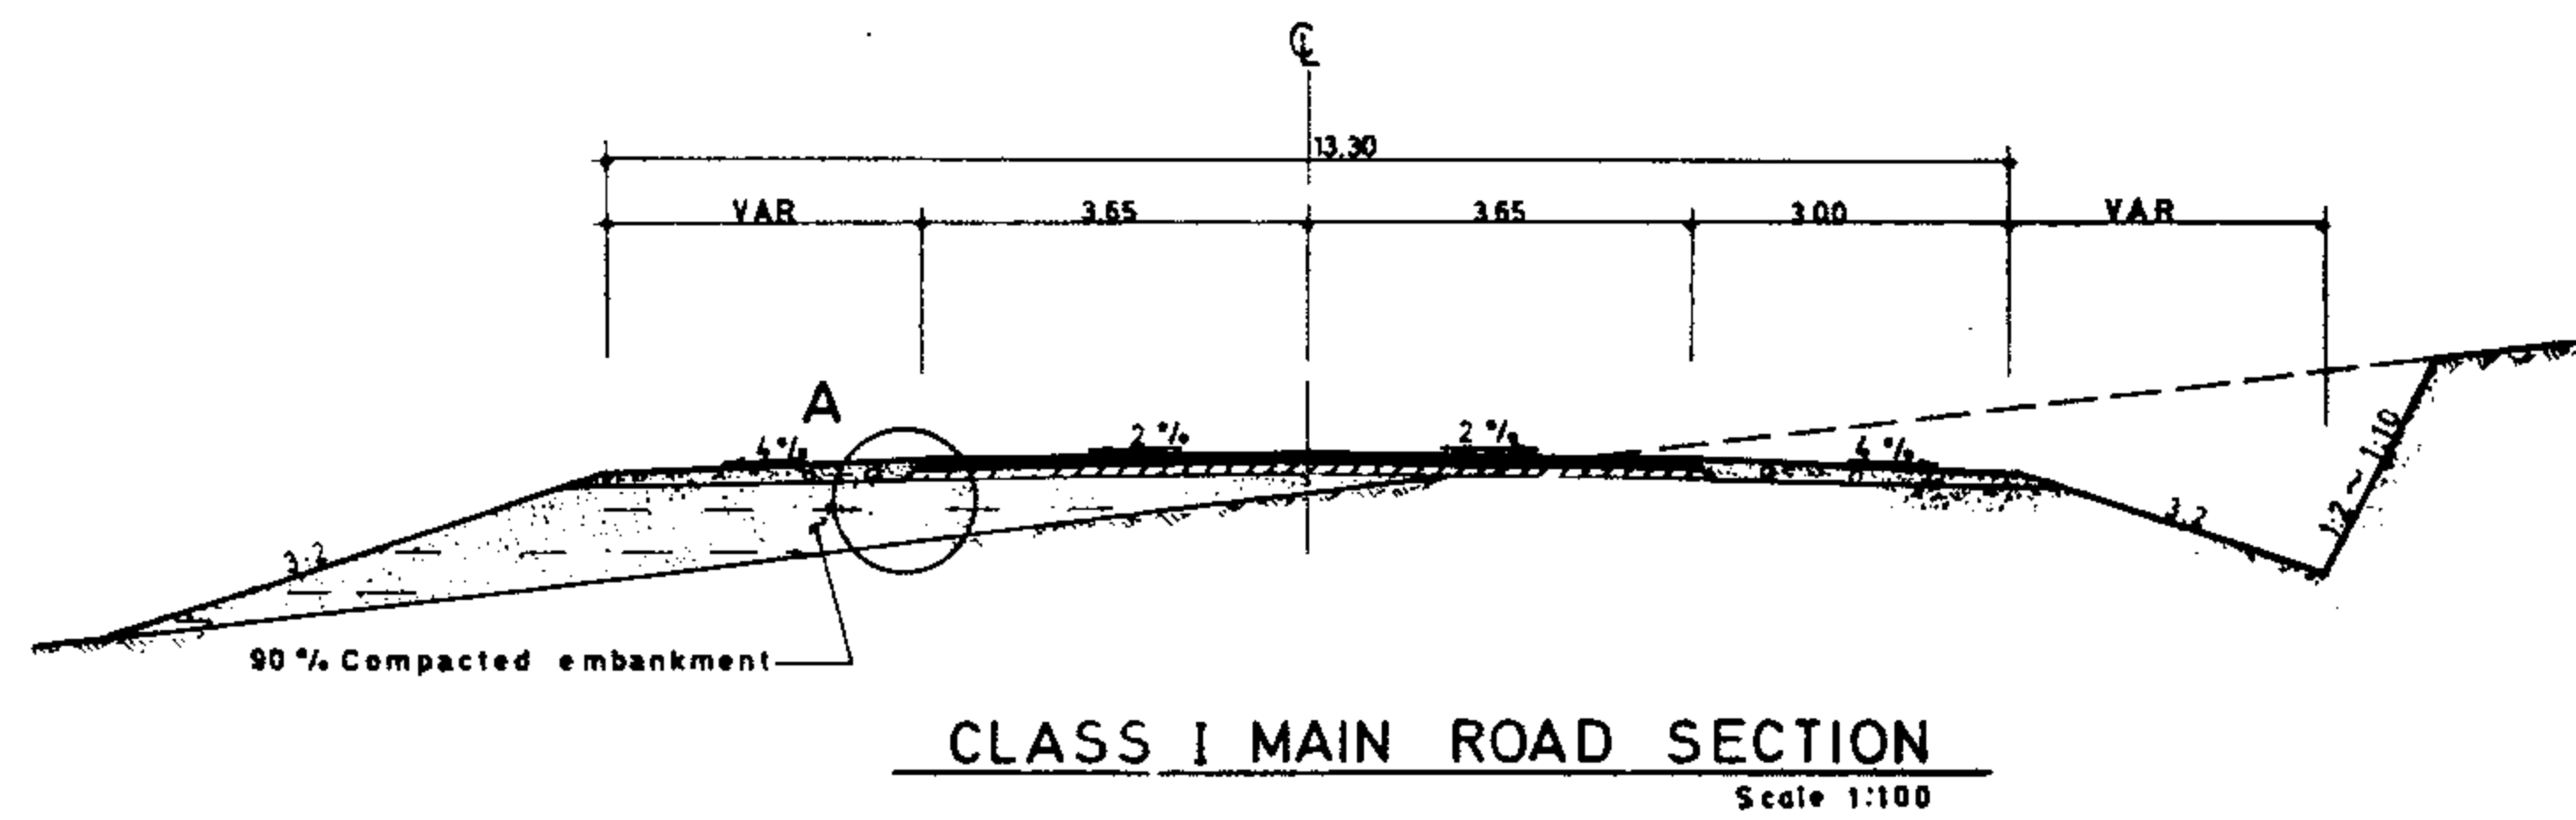

NOTE:

For roads class I & II, parkings should be provided every 1000 meters on both side (circular No 1.113525 - 22964 dated 23_10_1358 of plan & budget organization)

REFERENCE DWGS:

Scale:1:100

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG No 19/4/1/01

Approved


Sheet No 1 of 1

Rev. No

TYPICAL ROAD SECTIONS
DIMENSIONS

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU




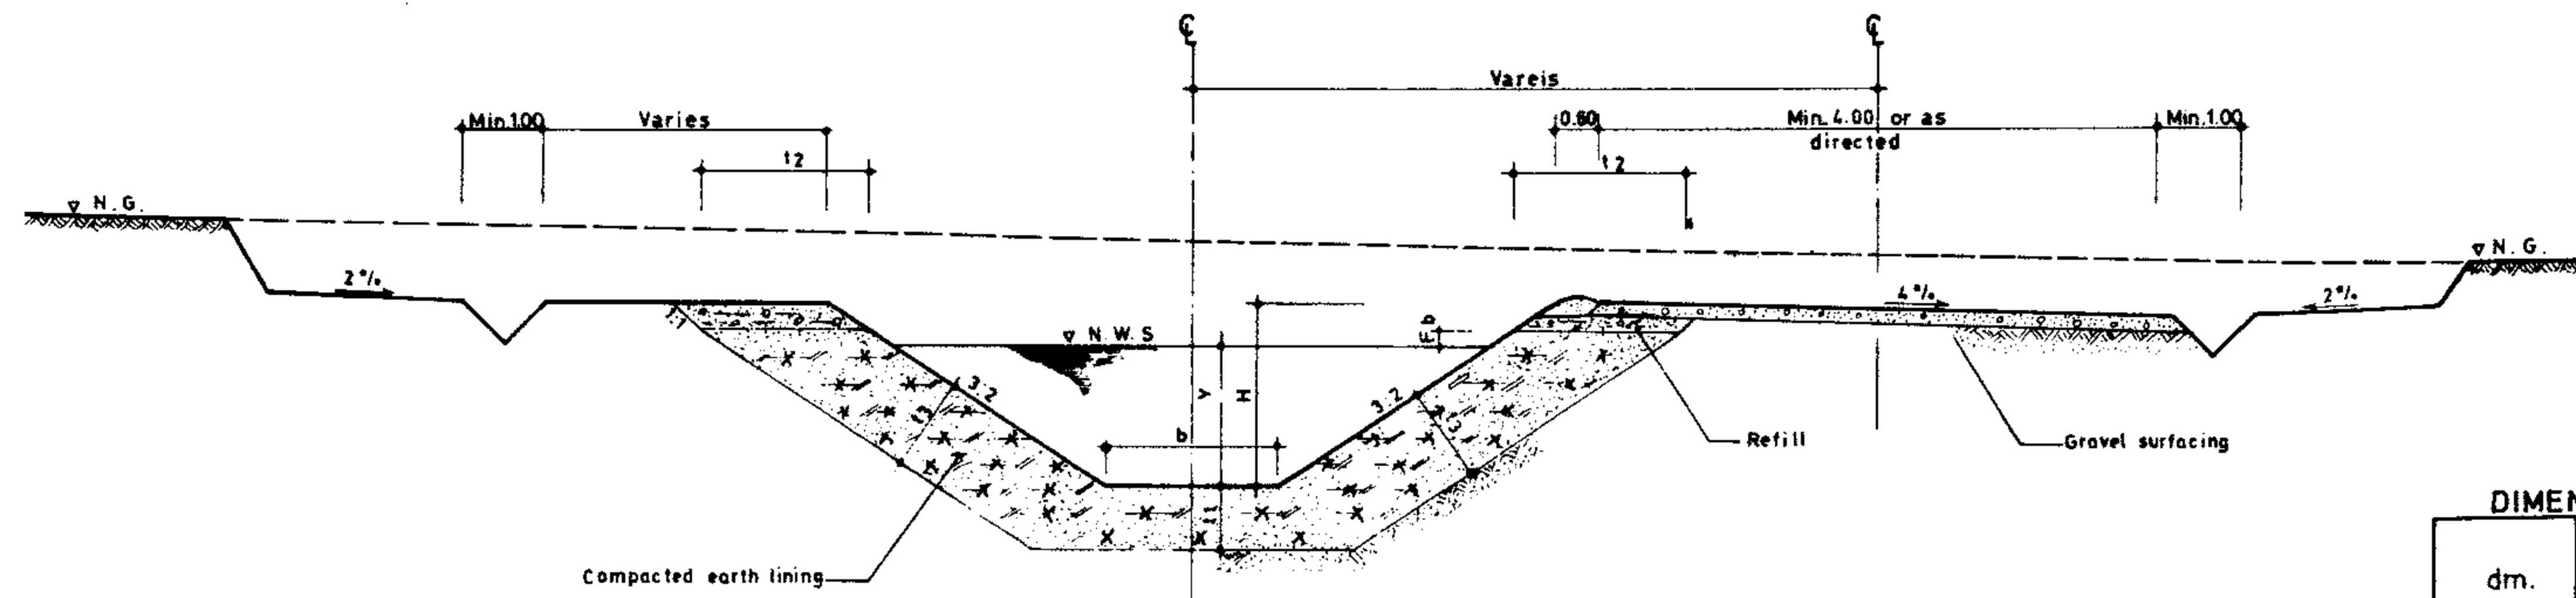

EARTH LINING IN BOTTOM AND SIDES


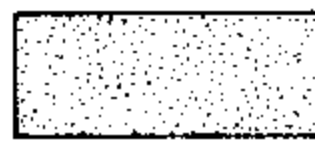

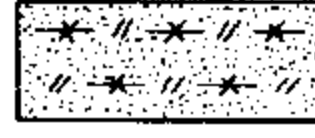

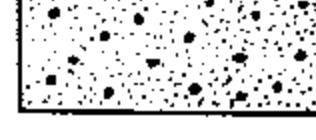
DIMENSION TABLE


dm.	t1	t2	t3	
			1.5:1	2:1
< 0.60	0.30	1.00	0.555	0.45
0.60 - 1.20	0.45	1.20	0.666	0.54
1.20 - 1.80	0.60	1.80	1.00	0.80
1.80 <	0.60	2.40	1.33	1.07

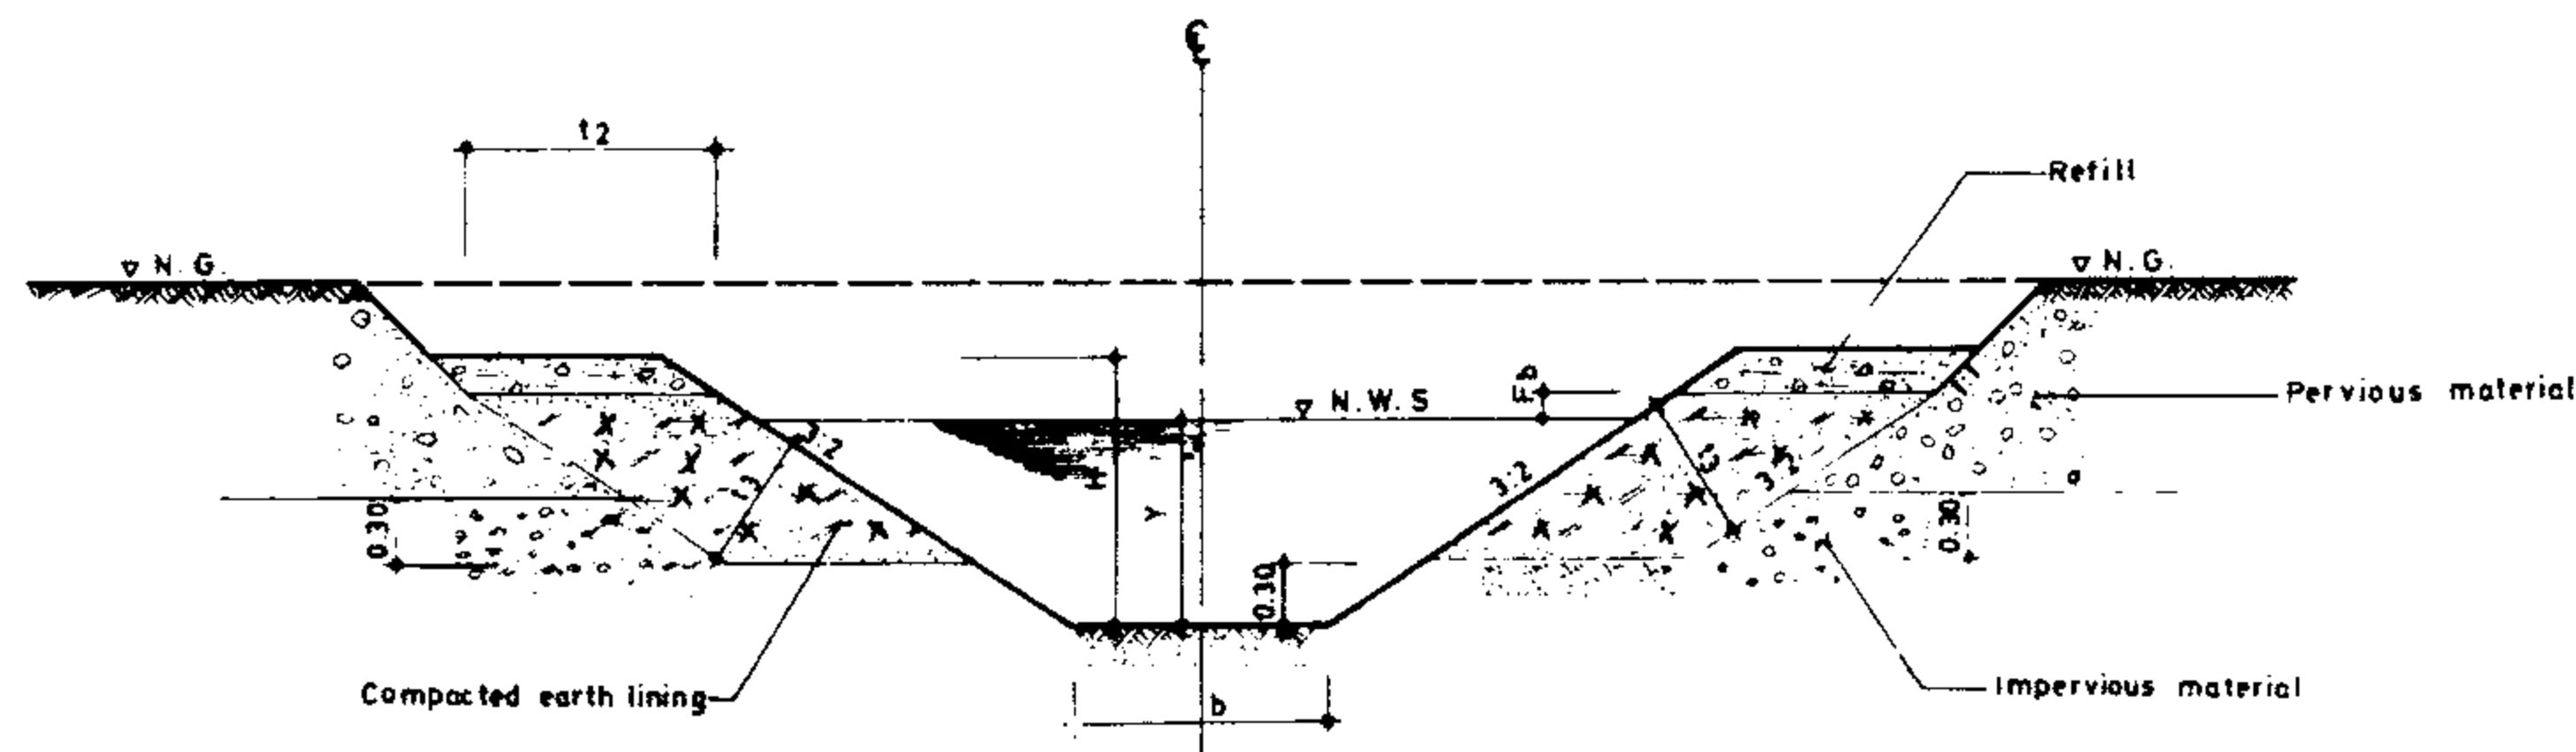

EARTH LINING IN SIDES ONLY

LEGEND:

-  Refill
-  Normal embankment
-  Compacted embankment
-  Compacted earth lining
-  Pervious material
-  Impervious material

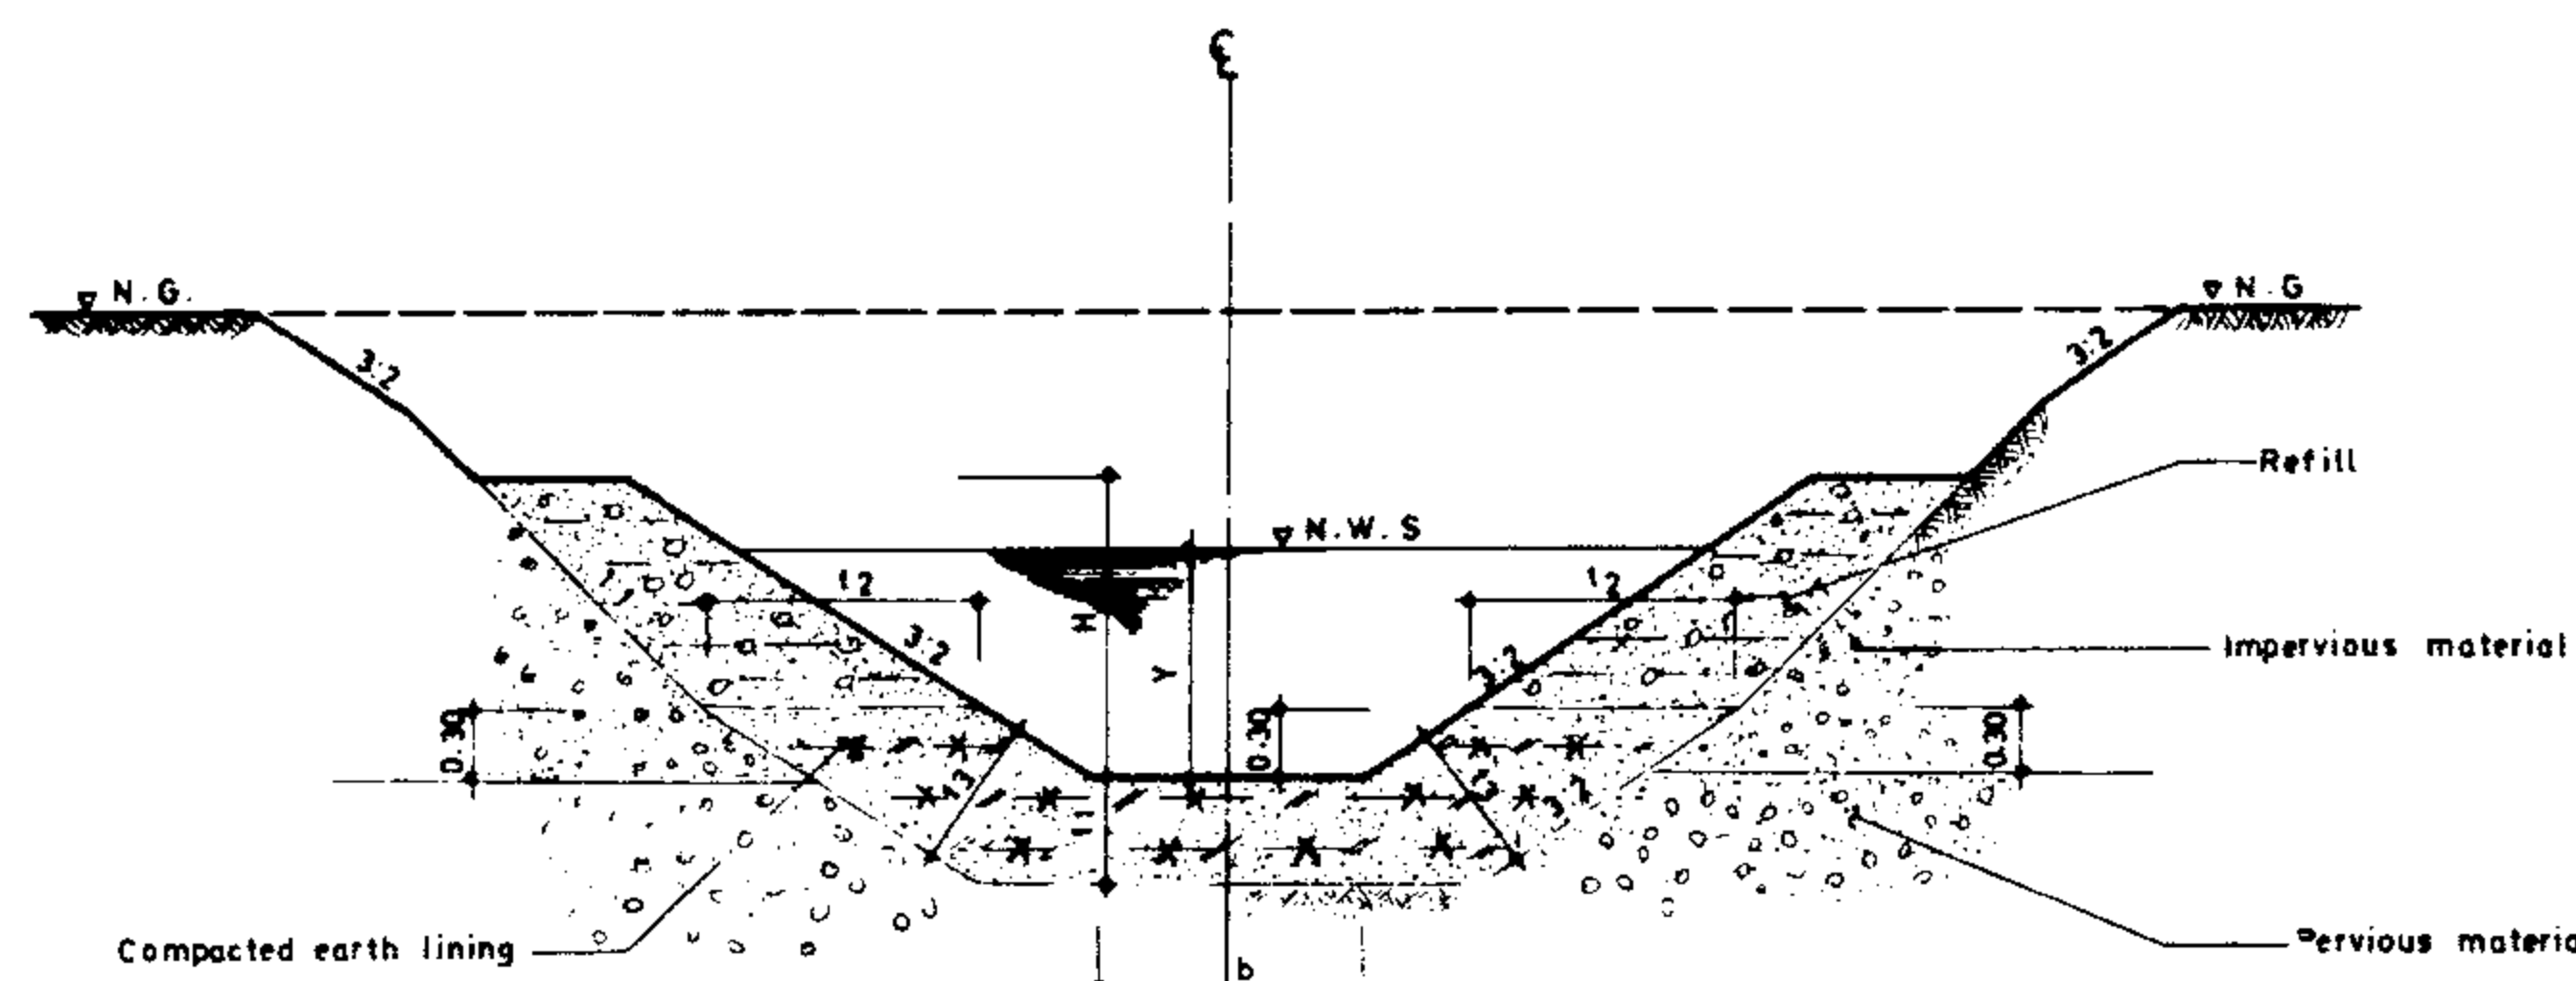

EARTH LINING IN BOTTOM ONLY

NOTES:

1. All cut side slopes to be directed by the engineer.
2. All "V" ditches dimensions to be determined by the engineer.
3. "H", "Y", "Fb" and "b" shall be defined by the engineer.

REFERENCE DWGS: For general notes see dwg № 20/2/1/01 TO 20/2/1/03
See also dwg № 19/3/1/01

Scale: 1:50

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG. № 19/3/1/02


Approved:

Sheet № 2 of 2

Rev. №


TYPICAL CANAL SECTION IN CUT
WITH EARTH LINING

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU

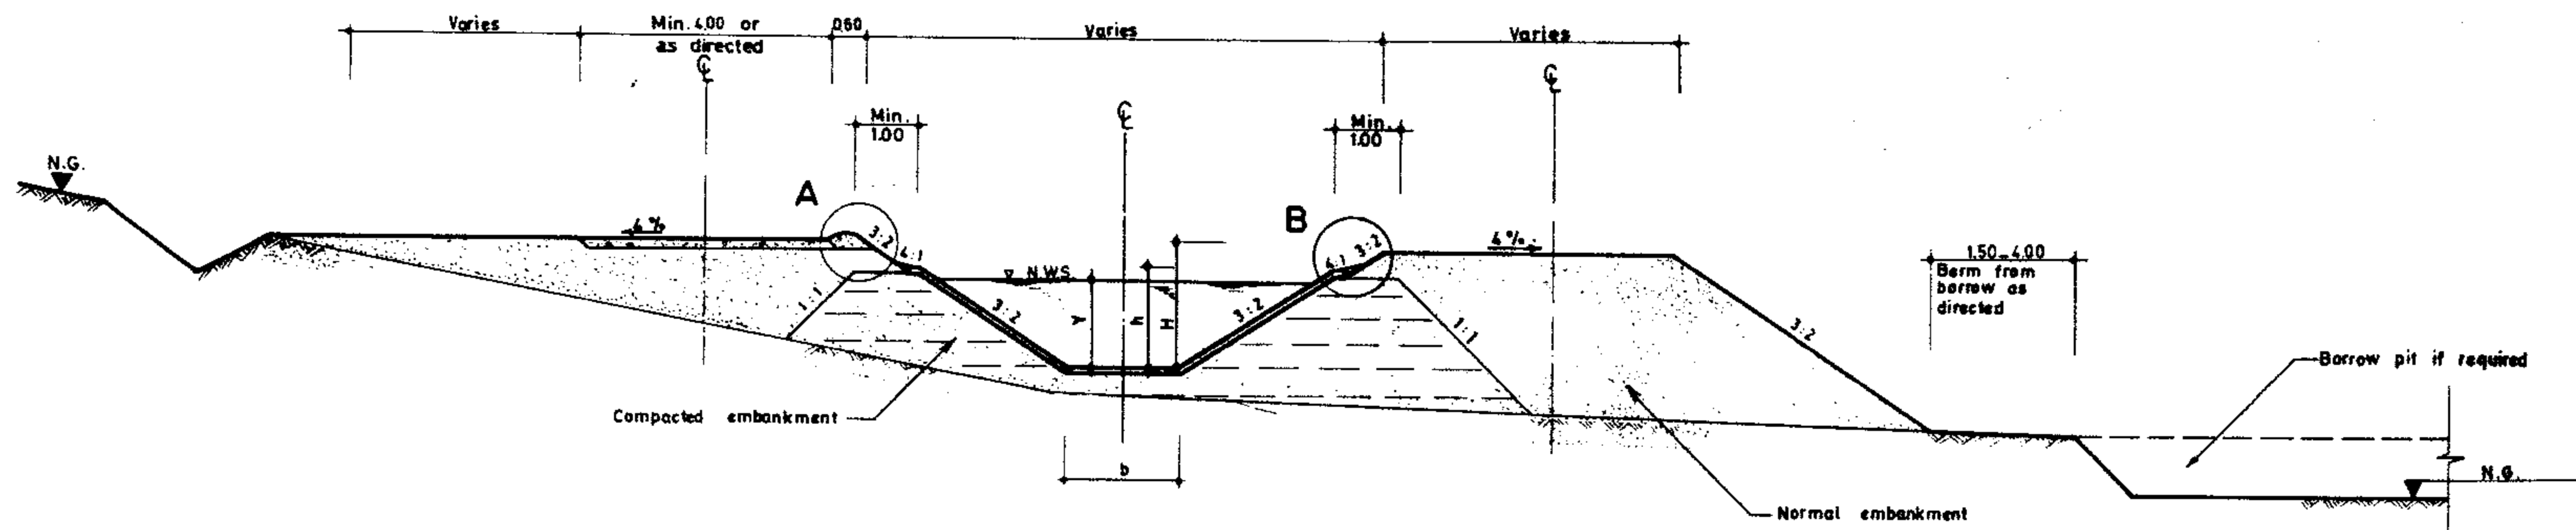


TYPICAL CONCRETE LINED CANAL SECTION IN FILL

Scale 1:100

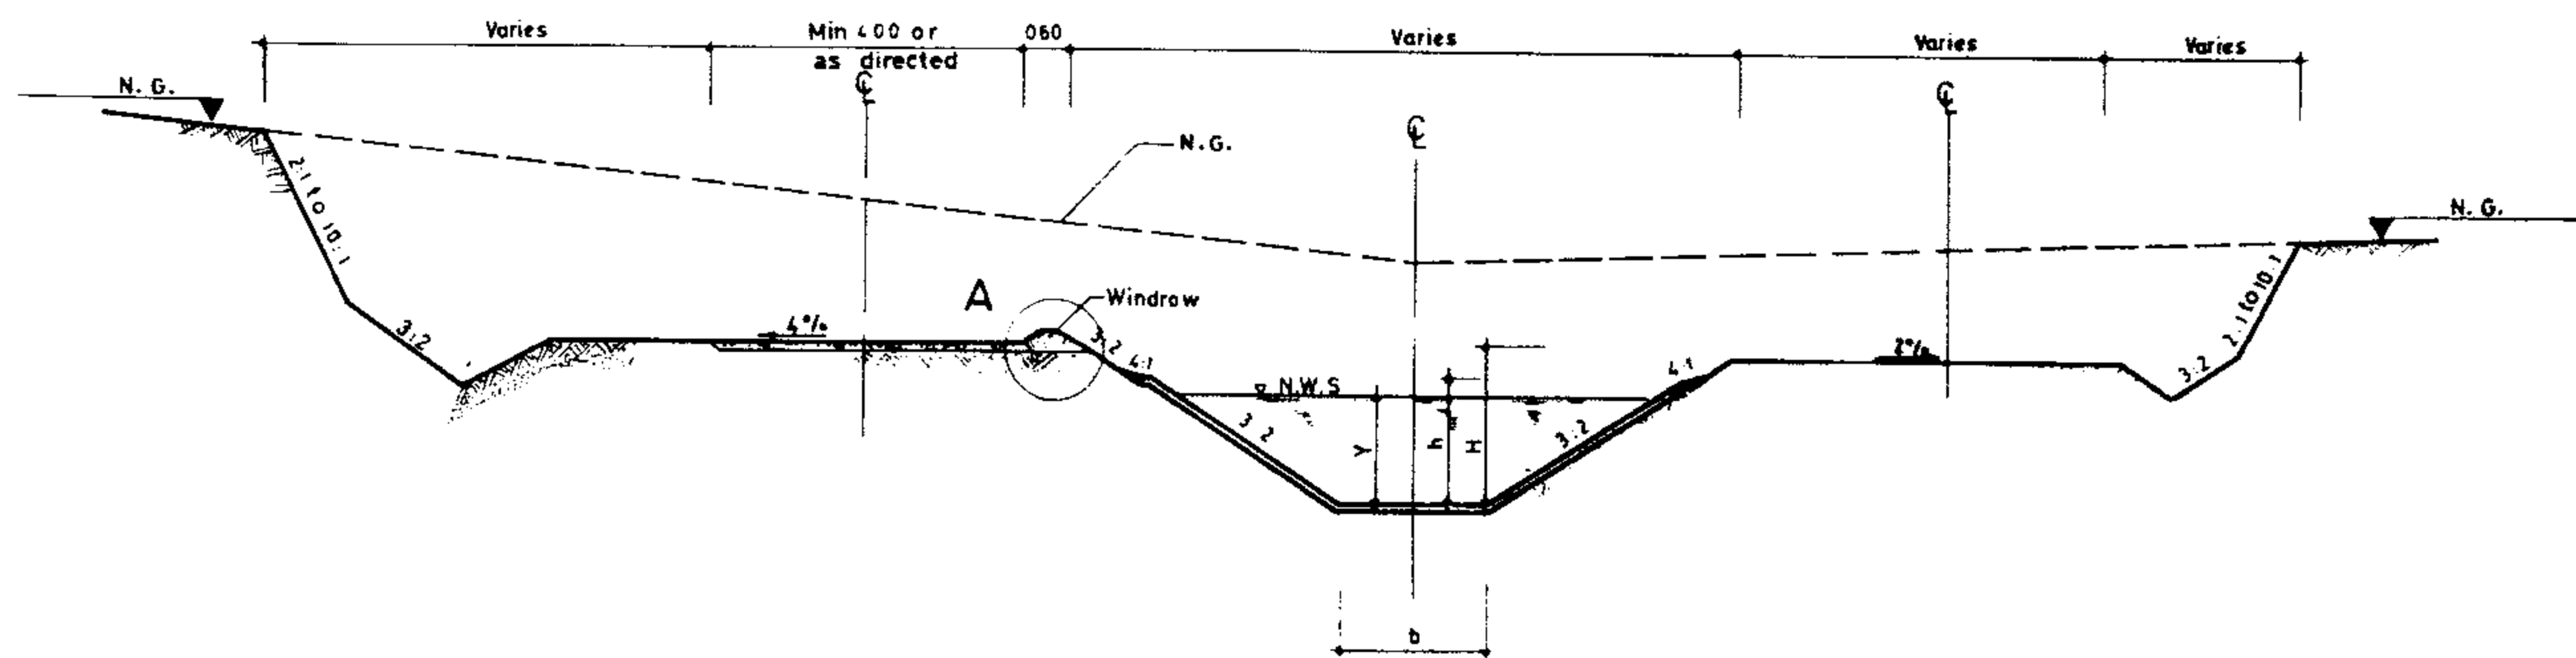


TYPICAL CONCRETE LINED CANAL SECTION IN CUT

Scale 1:100

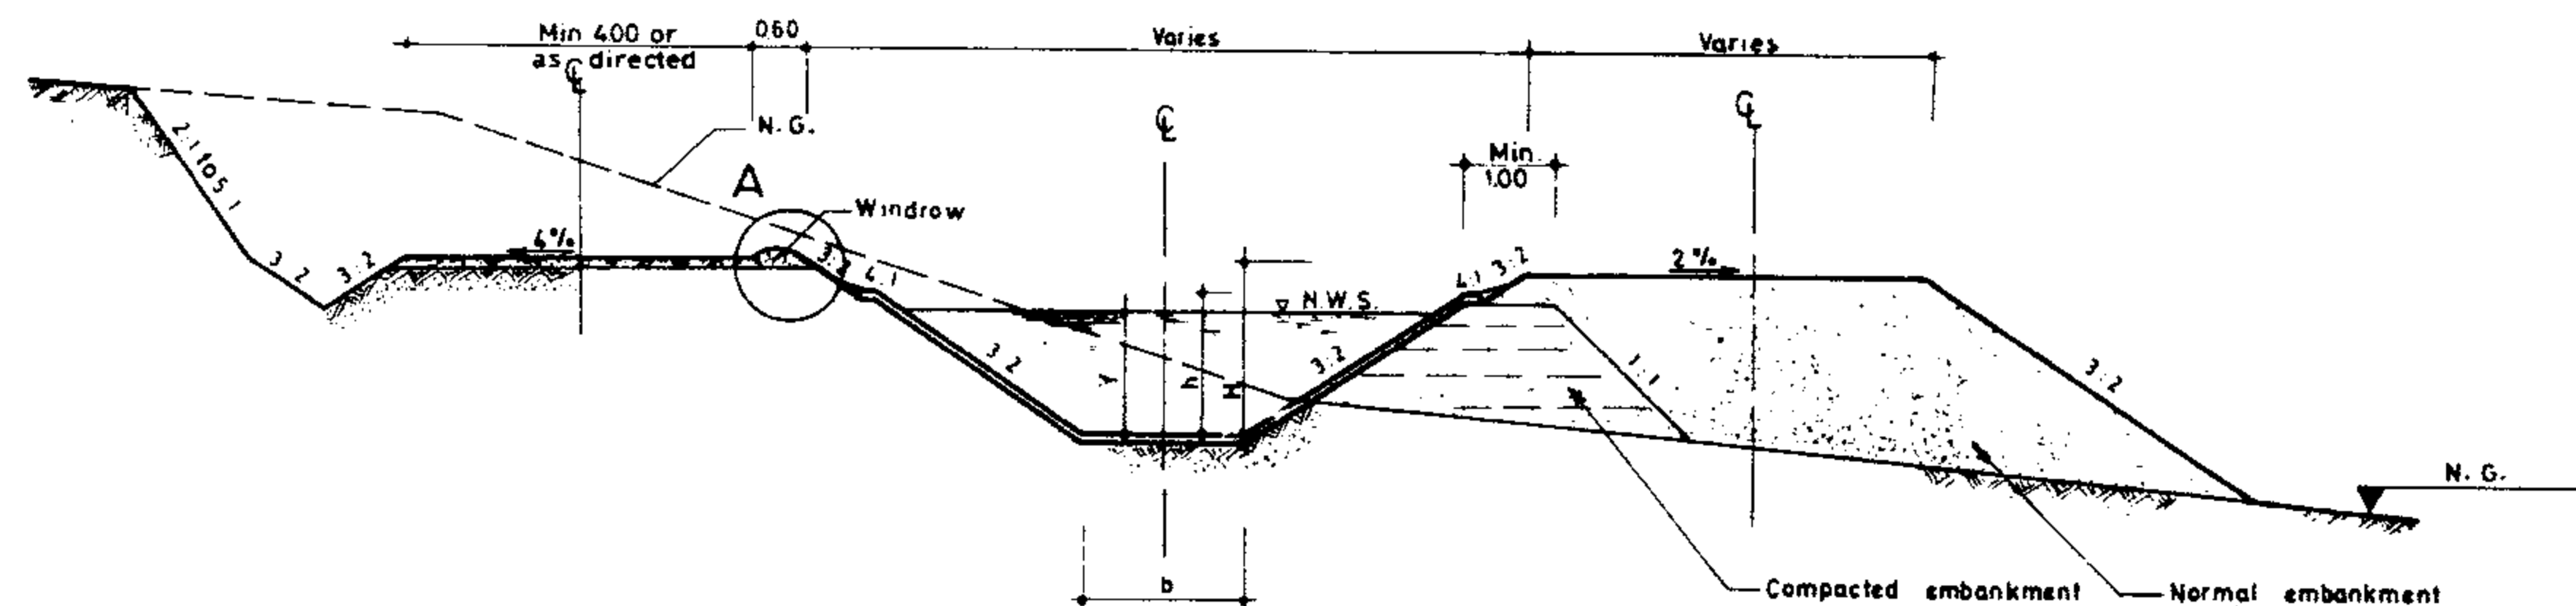


TYPICAL CONCRETE LINED CANAL SECTION IN PARTIAL FILL

Scale 1:100

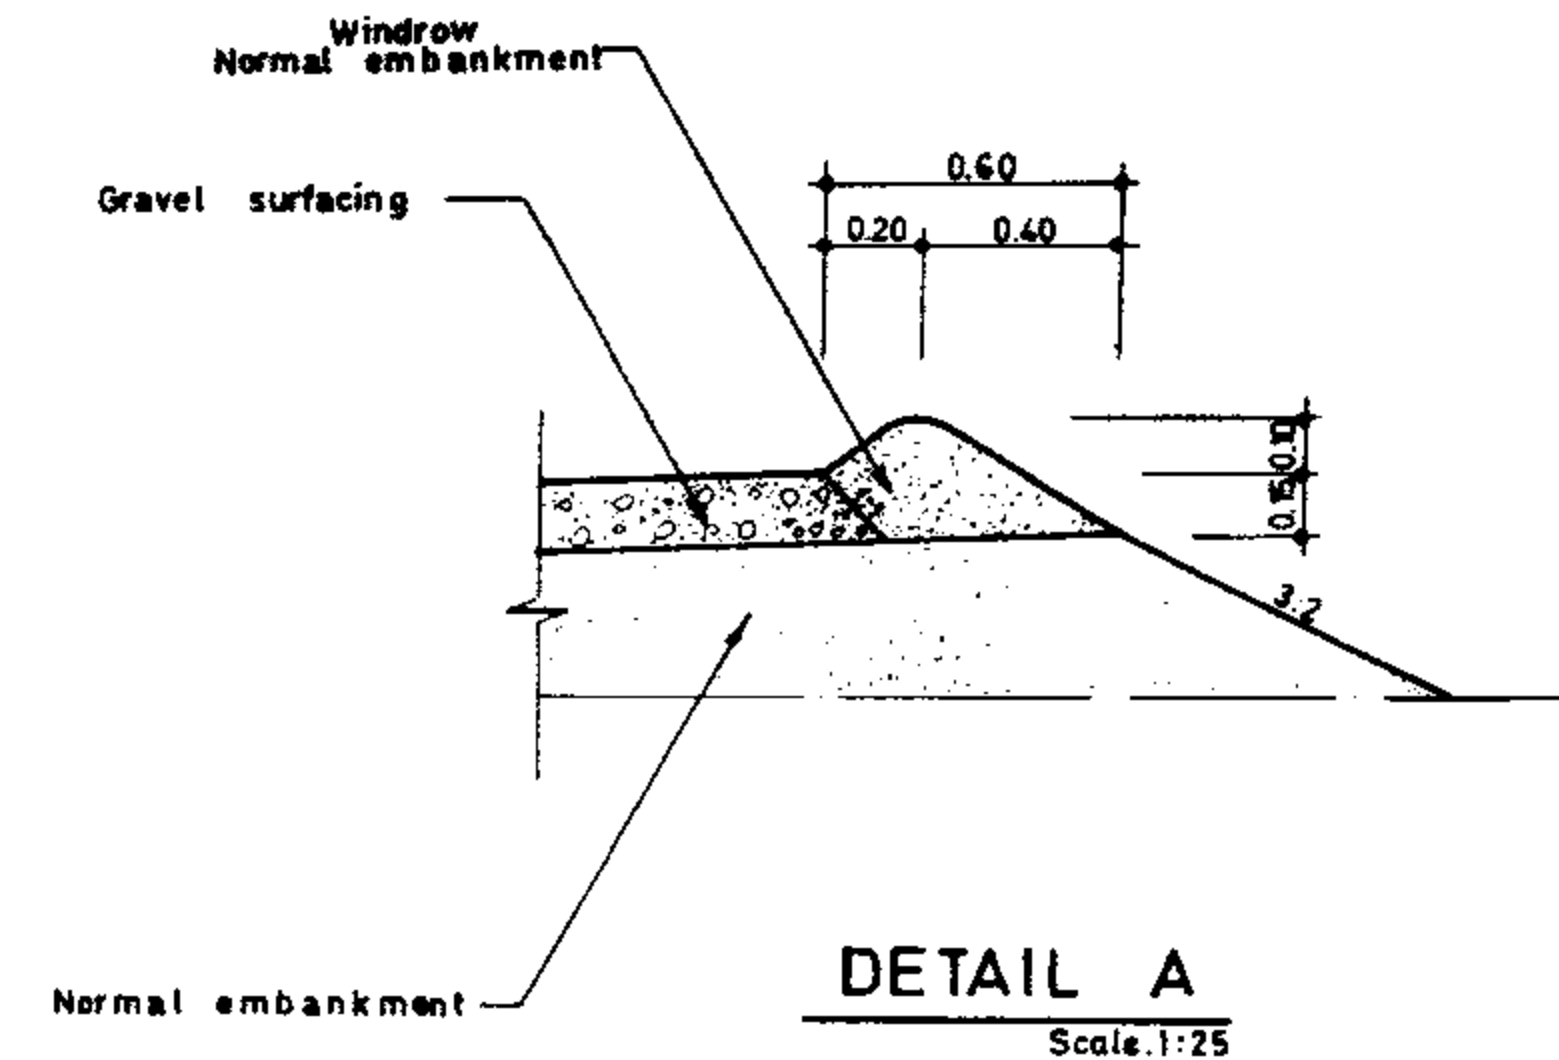

DETAIL A

Scale 1:25

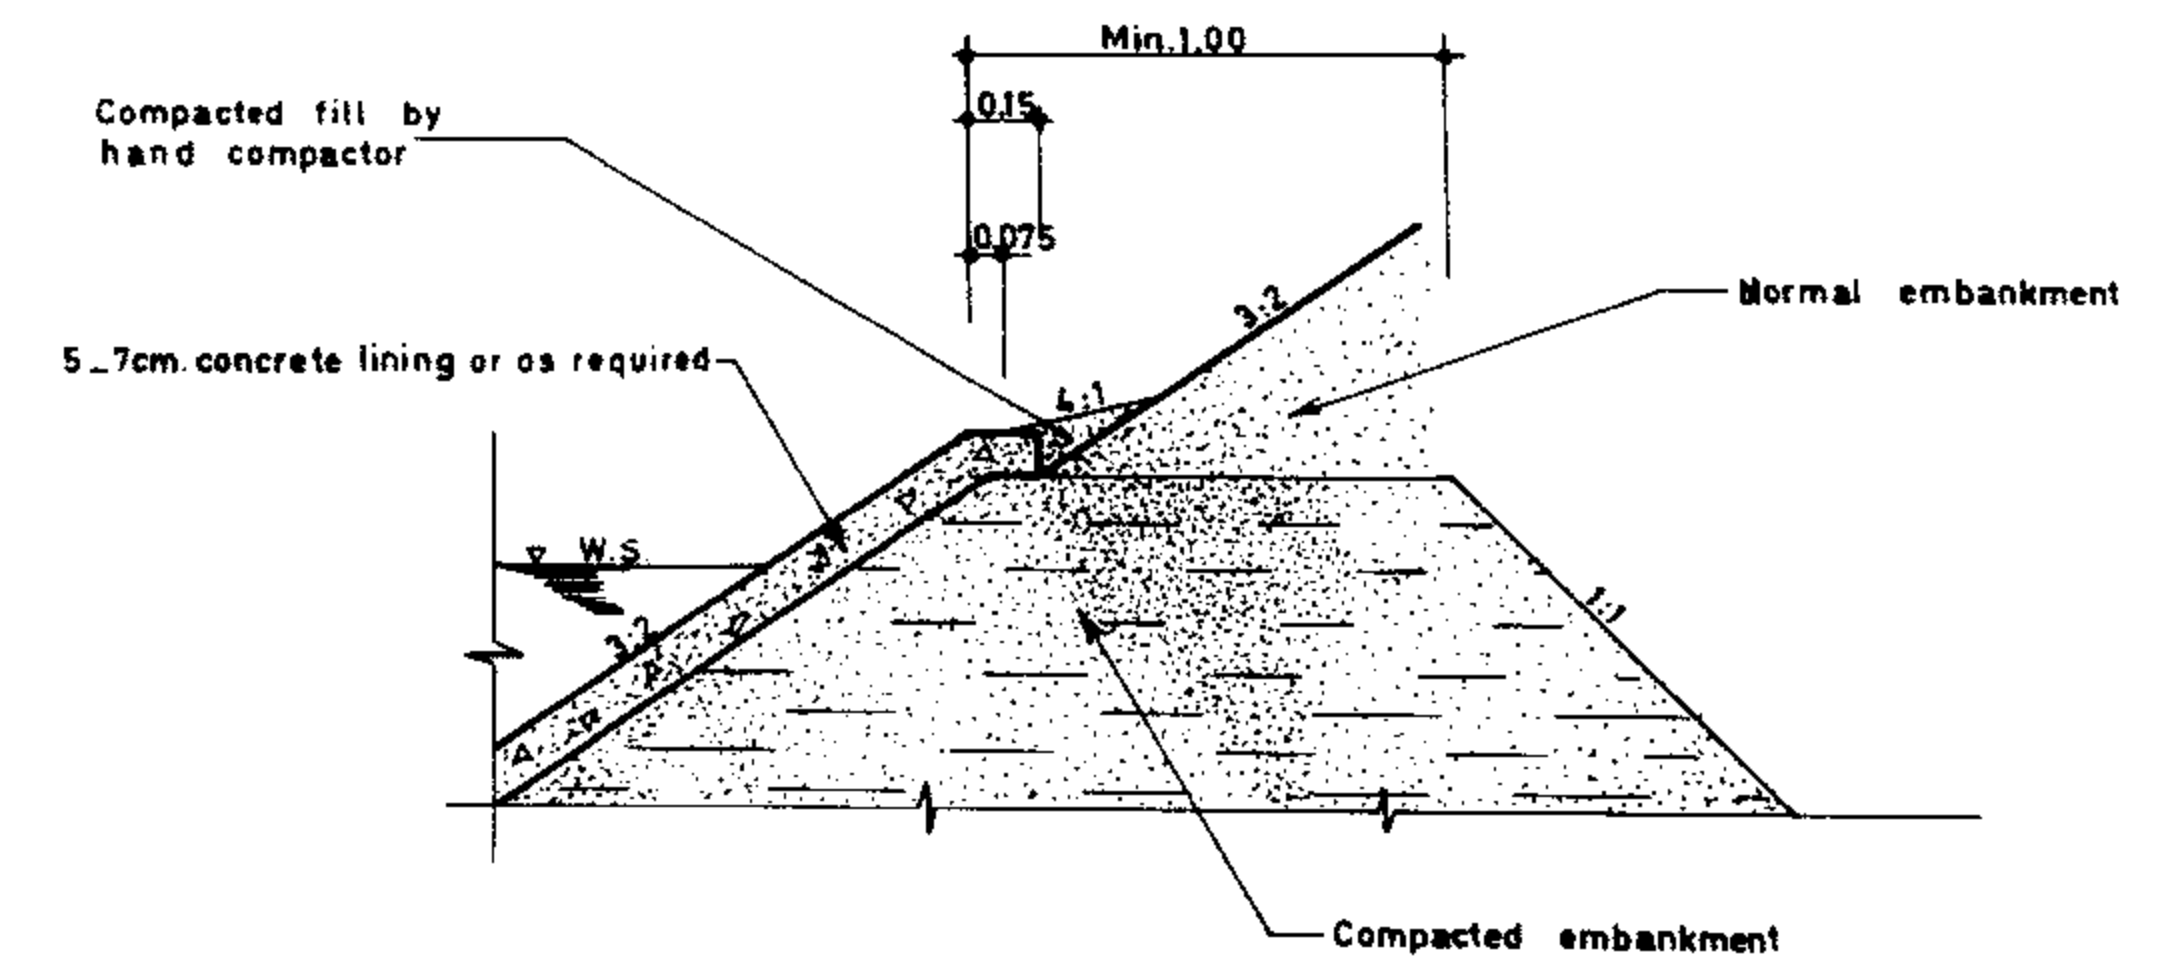

DETAIL B

Scale 1:25

NOTES:

1. All cut side slopes to be directed by the engineer.
2. All "V" ditches dimensions to be determined by the engineer.
3. "H", "Y", "h" and "b" shall be defined by the engineer.

REFERENCE DWGS: For general notes see dwgs. No 20/2/1/01 TO 20/2/1/03

Scale: 1:100-1:25

IRRIGATION & DRAINAGE STANDARDS

Date

DWG No 19/2/1/01


Approved

Sheet No 1 of 1


Rev. No

TYPICAL CONCRETE LINED CANAL SECTIONS


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND STANDARD BUREAU

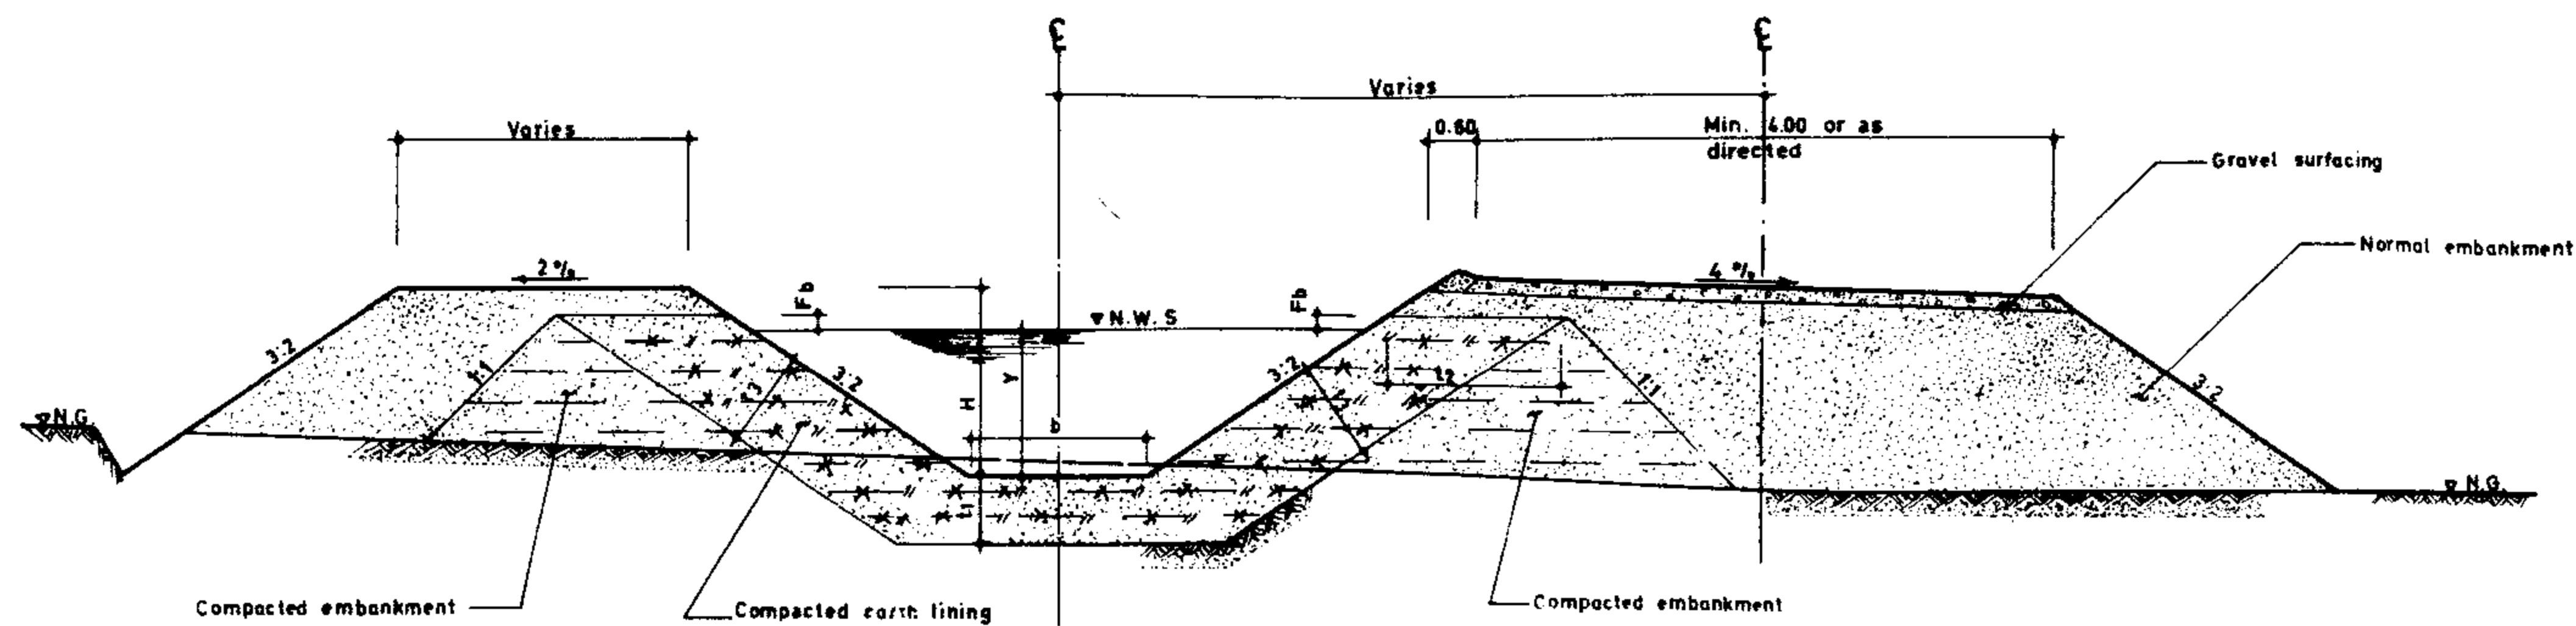

EARTH LINING IN BOTTOM AND SIDES

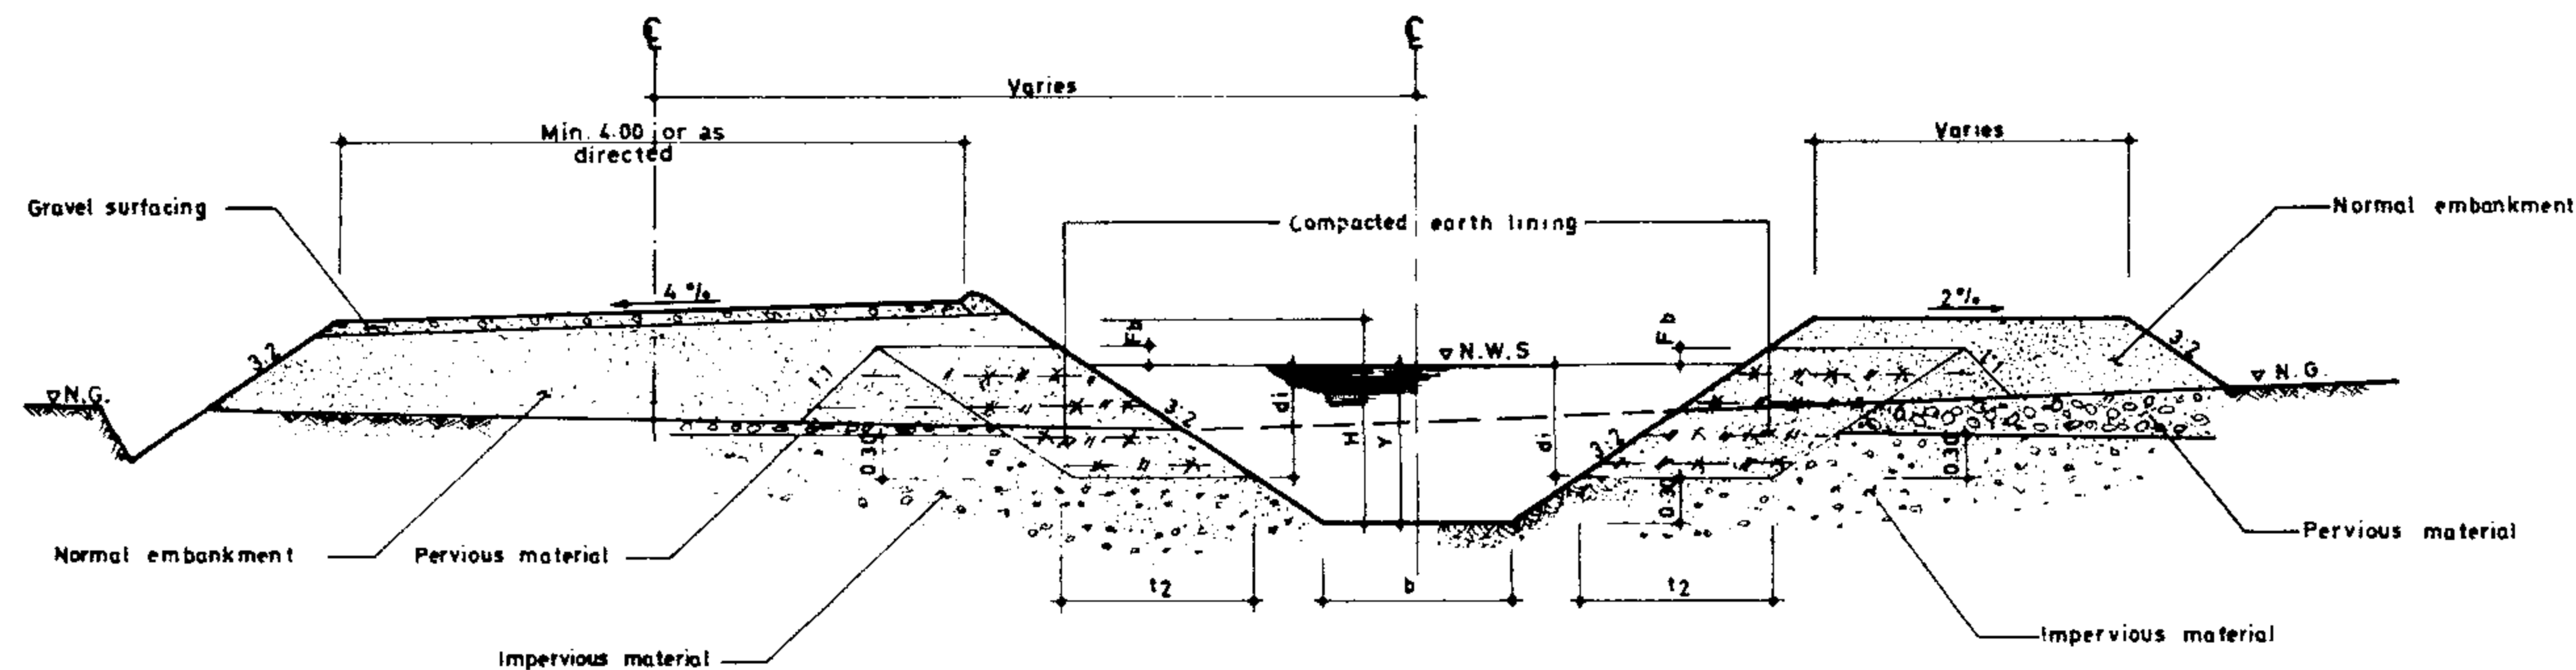

EARTH LINING IN SIDES ONLY

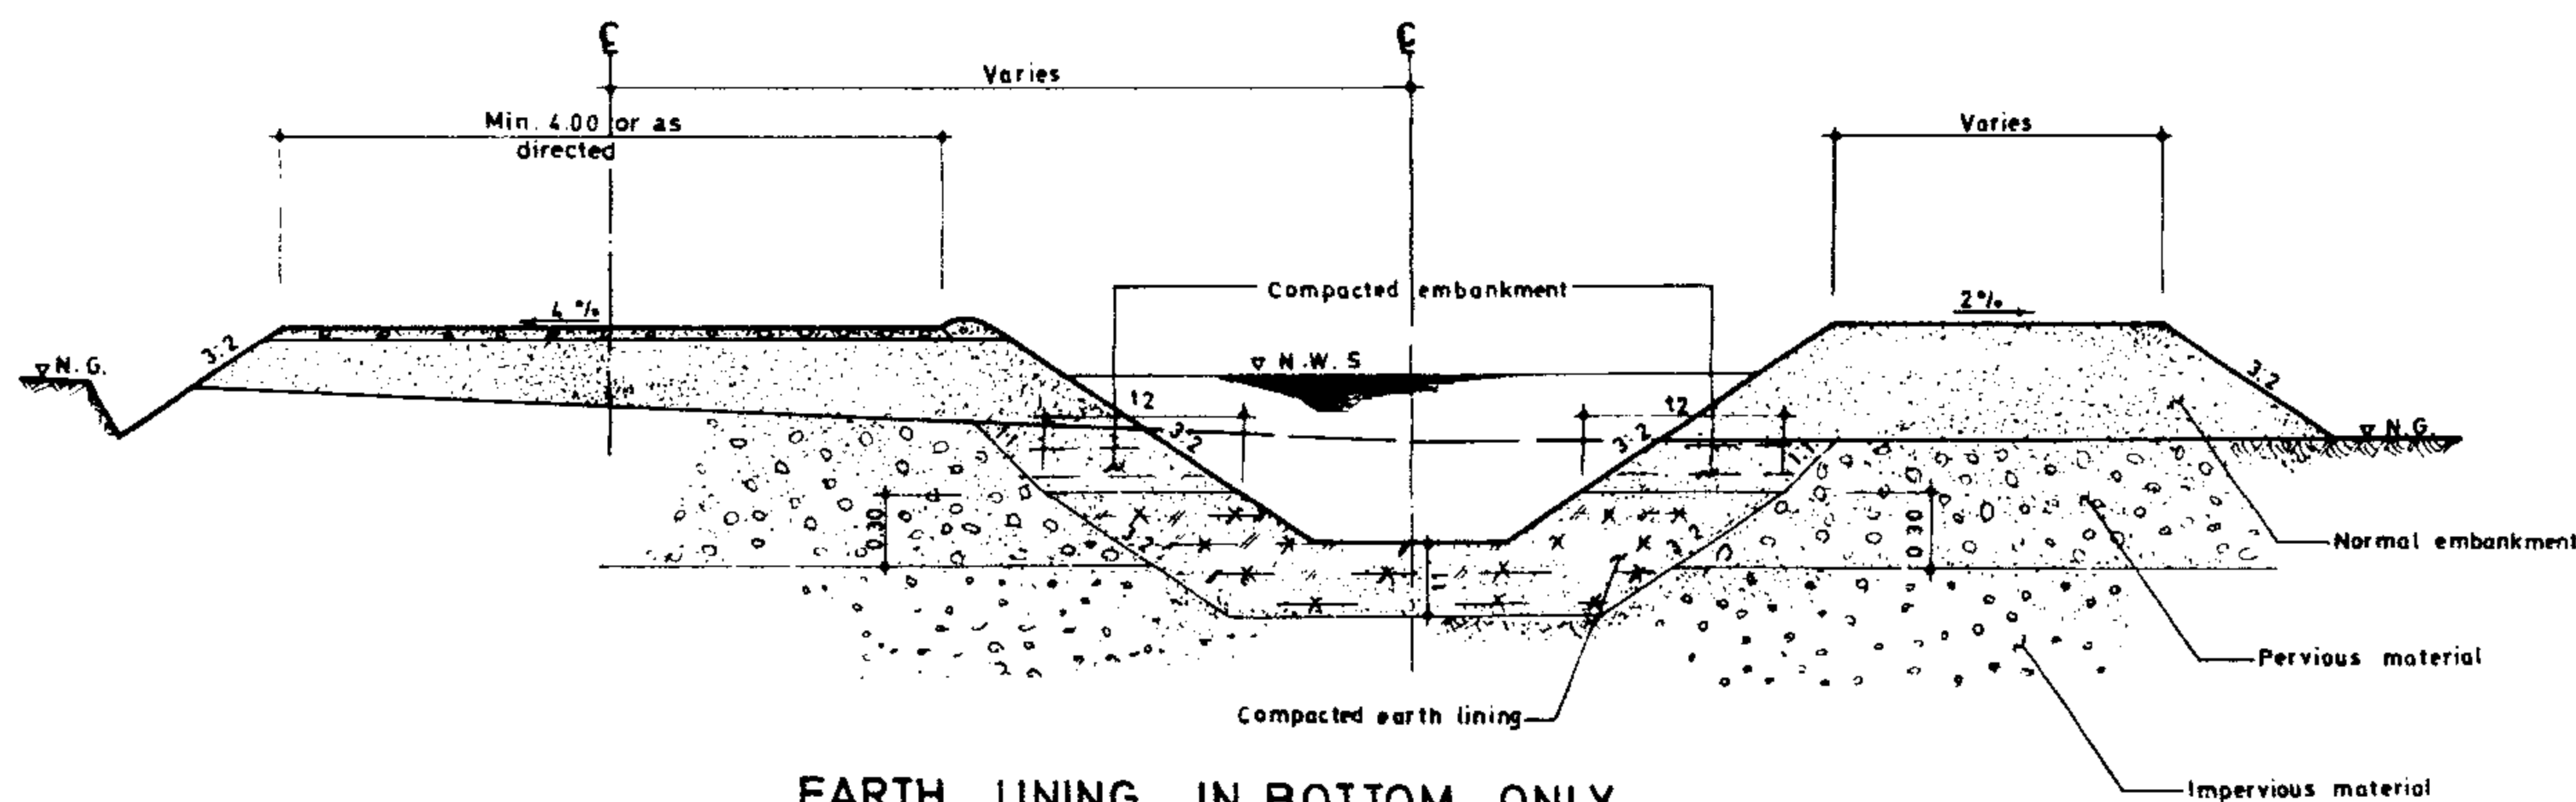
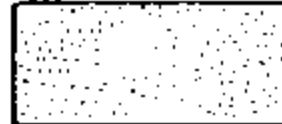

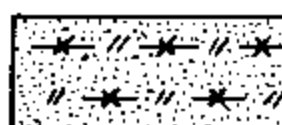




EARTH LINING IN BOTTOM ONLY

DIMENSION TABLE

dm.	t ₁	t ₂	t ₃	
			1.5:1	2:1
< 0.60	0.30	1.00	0.555	0.45
0.60 - 1.20	0.45	1.20	0.666	0.54
1.20 - 1.80	0.60	1.80	1.00	0.80
1.80 <	0.60	2.40	1.33	1.07

LEGEND:

-  Refill
-  Normal embankment
-  Compacted embankment
-  Compacted earth lining
-  Pervious material
-  Impervious material

NOTES:

1. All cut side slopes to be directed by the engineer.
2. All "V" ditches dimensions to be determined by the engineer.
3. "H", "Y", "Fb", "di" and "b" shall be defined by the engineer.

REFERENCE DWGS For general notes see dwg No 20/2/1/01 TO 20/2/1/03
See also dwg No 19/3/1/02

Scale: 1:50

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG. No 19/3/1/01


Approved:

Sheet. No 1 of 2


Rev. No

TYPICAL CANAL SECTION IN FILL & CUT
WITH EARTH LINING


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJE
TECHNICAL RESEARCH AND
STANDARD BUREAU

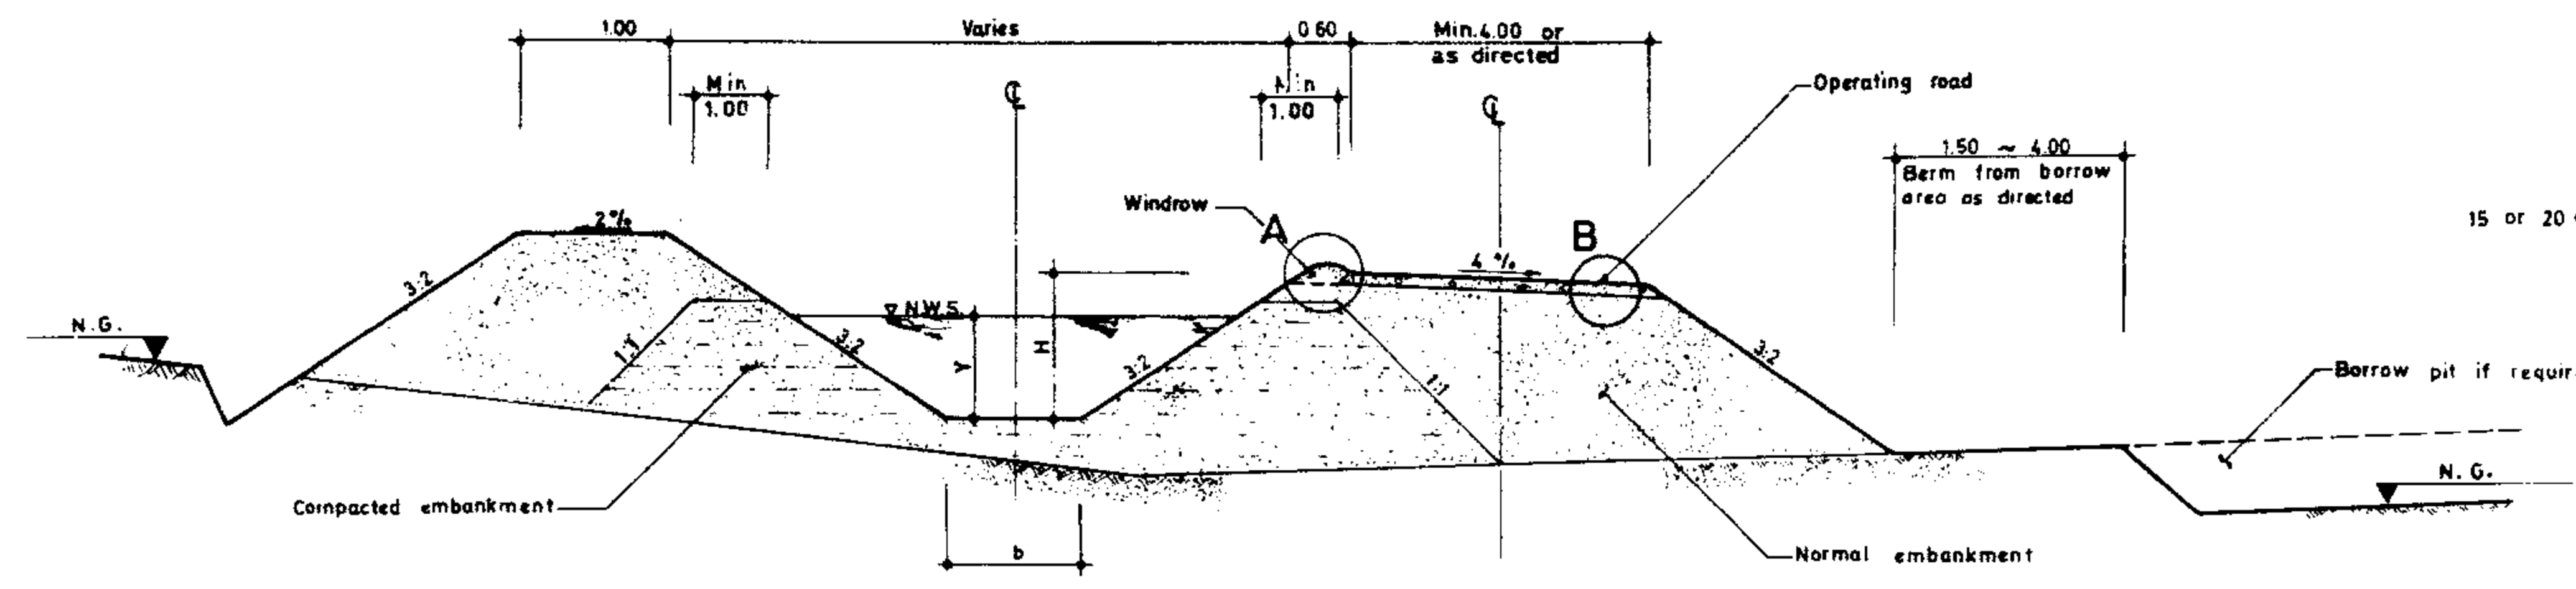


TYPICAL UNLINED CANAL SECTION TOTALLY IN FILL
Scale 1:100

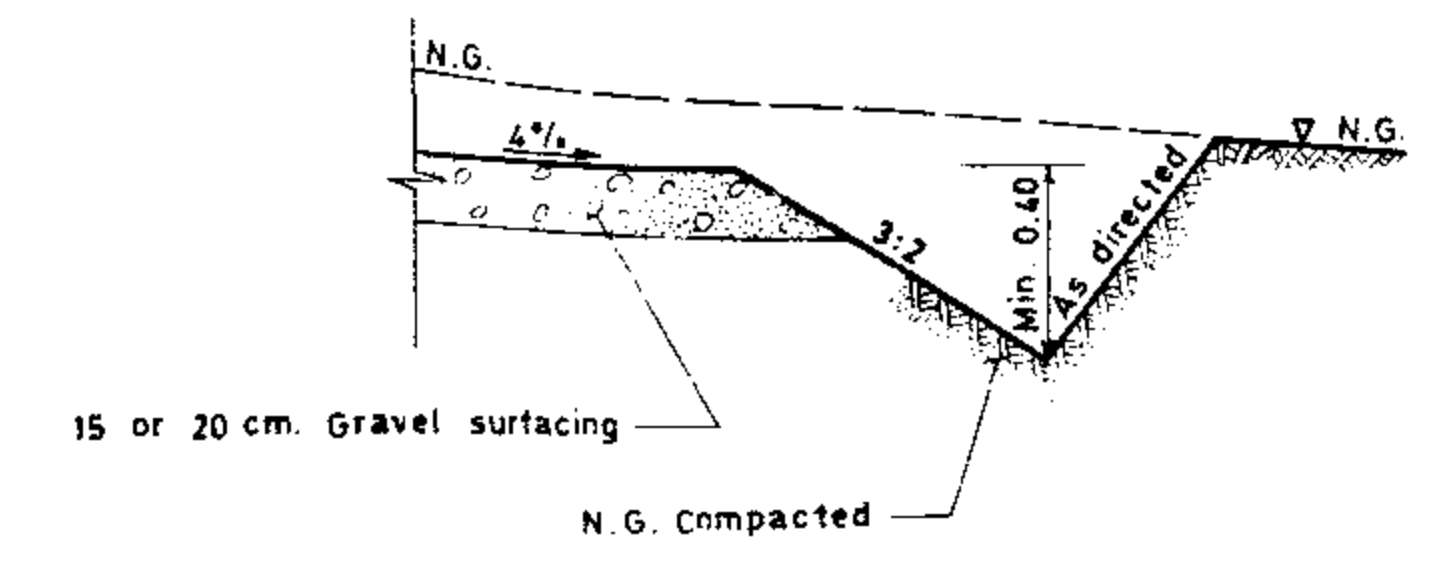


DETAIL C
Scale 1:25

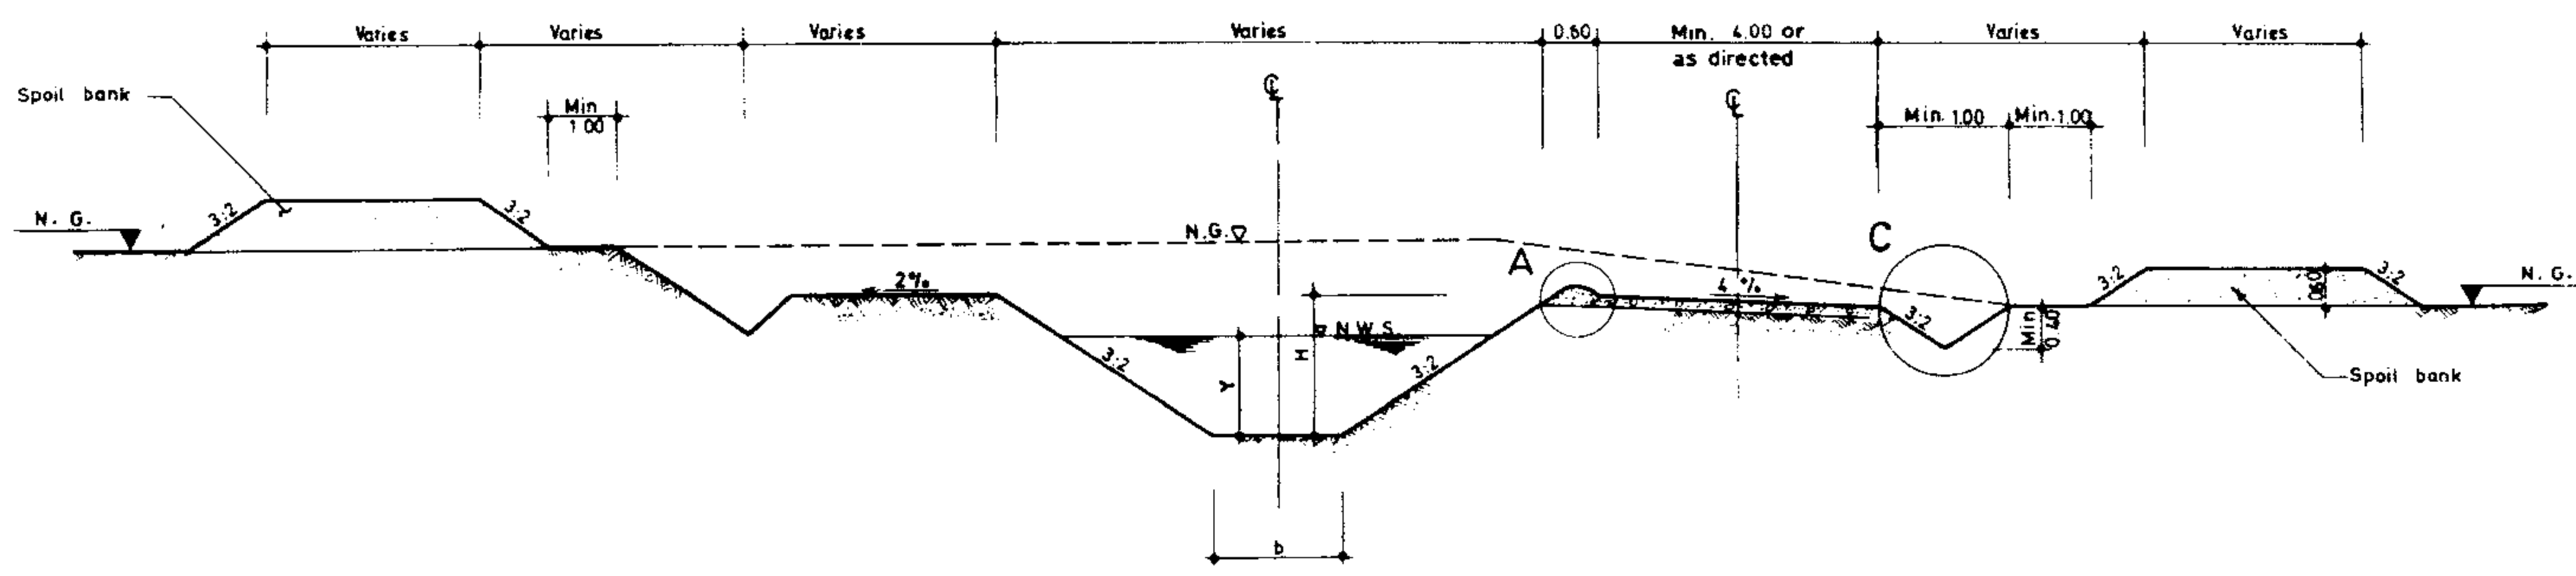


TYPICAL UNLINED CANAL SECTION IN CUT
Scale 1:100

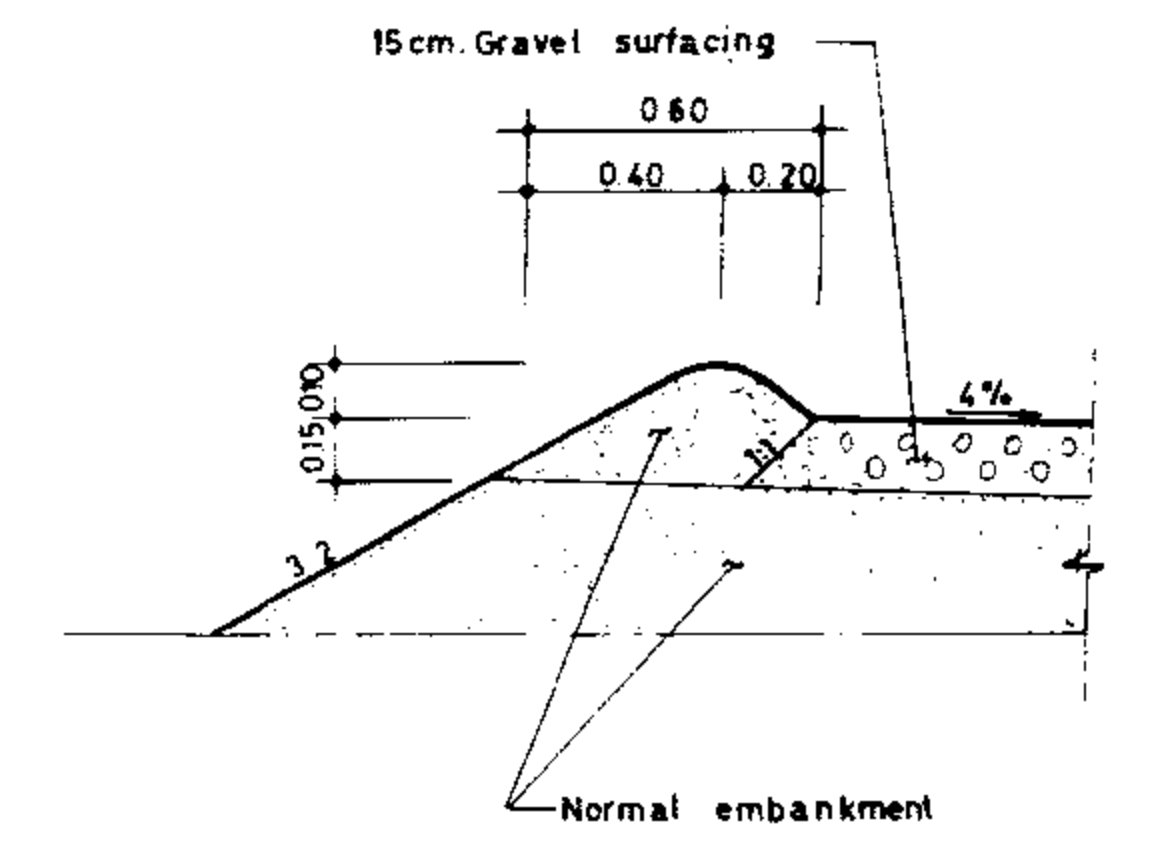

DETAIL A
Scale 1:25

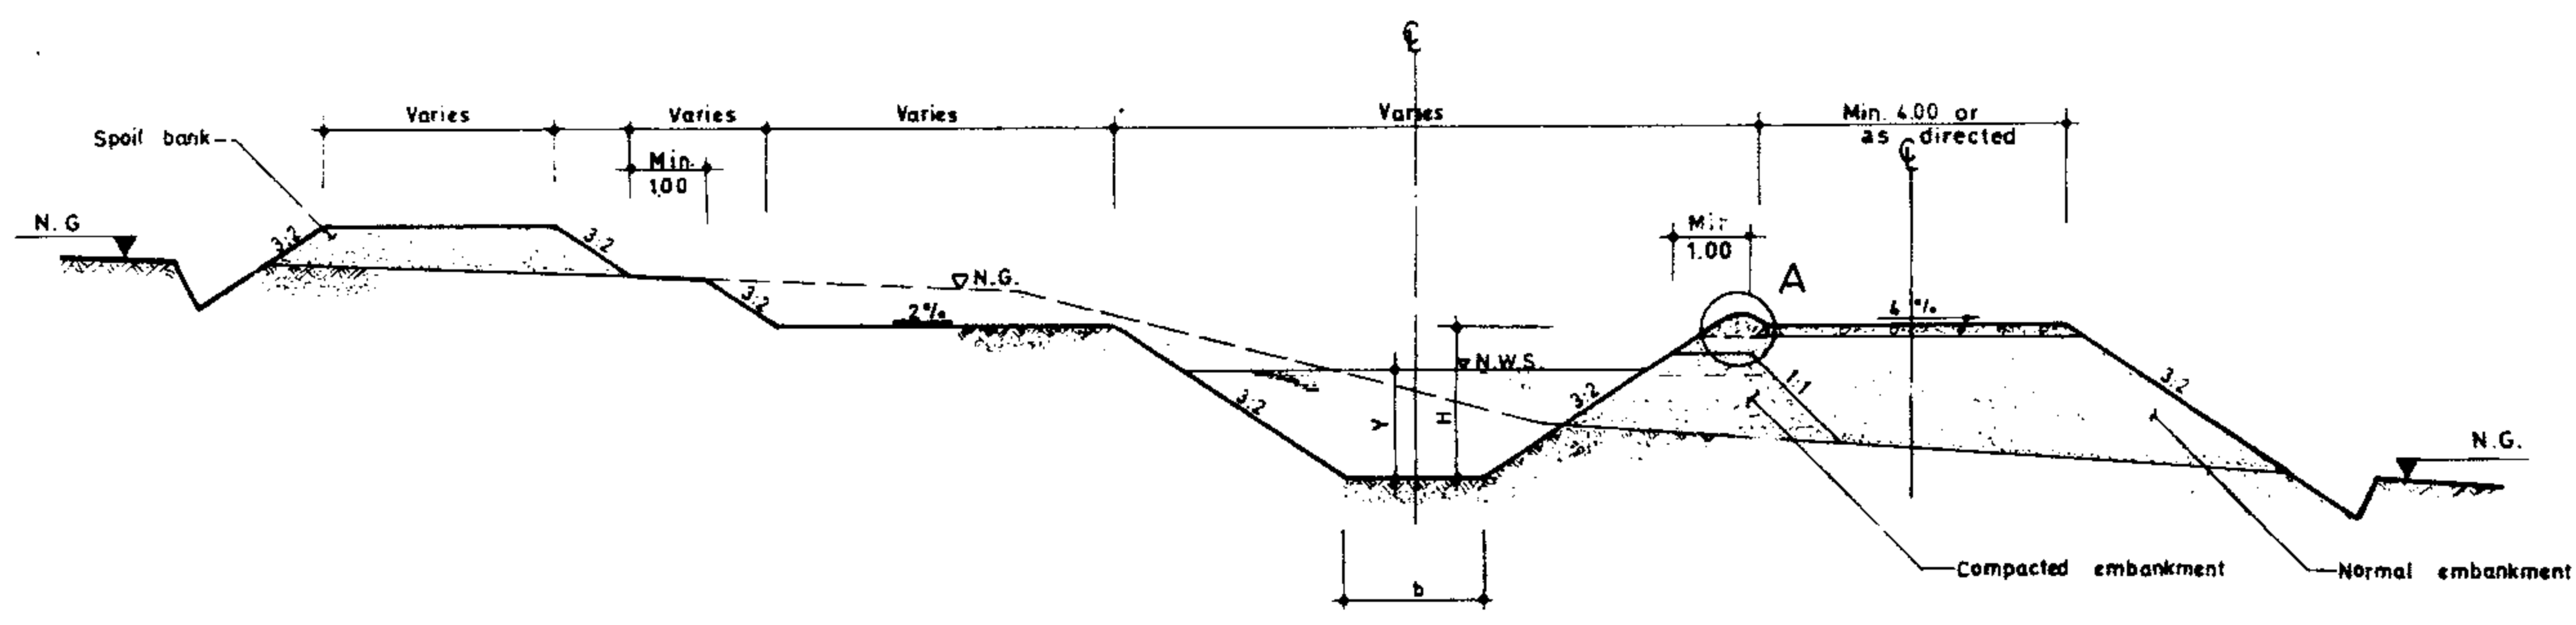

TYPICAL UNLINED CANAL SECTION IN CUT AND PARTIAL FILL
Scale 1:100

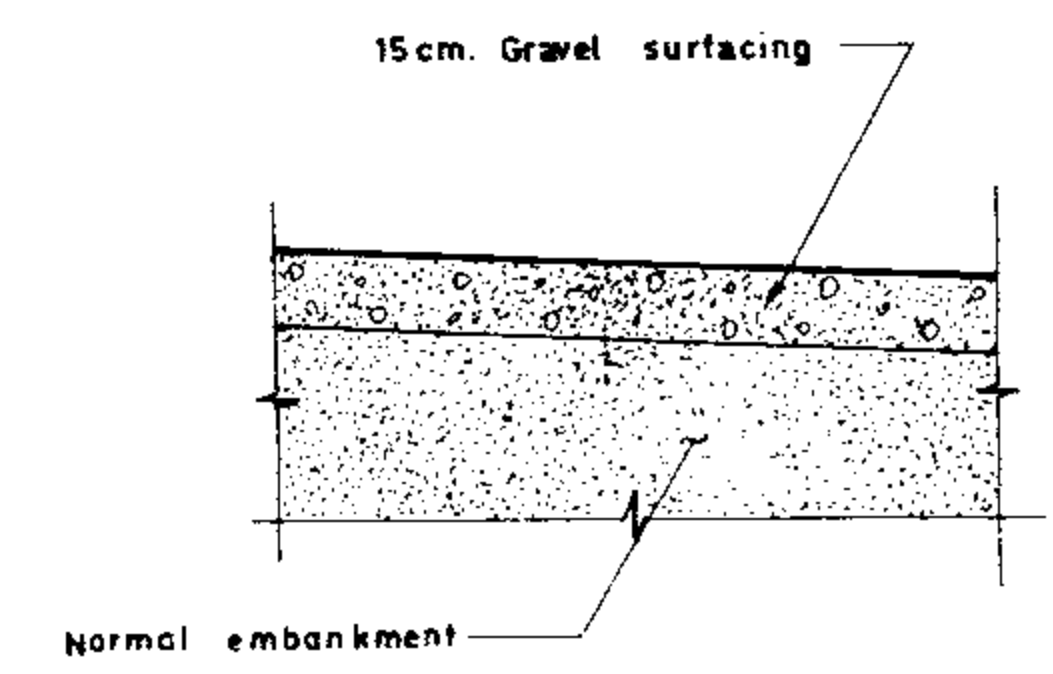


DETAIL B
Scale 1:25

- NOTES:
1. All cut side slopes to be directed by the engineer.
 2. All "Y" ditch dimensions to be determined by the engineer.
 3. "H", "Y" and "b" shall be defined by the engineer.


REFERENCE DWGS: For general notes see dwgs. No 20/2/1/01 TO 20/2/1/03

Scale: 1:100-1:25	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG No 19/1/1/01	TYPICAL UNLINED CANAL SECTIONS
Approved:	Sheet No 1 of 1 Rev No	


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

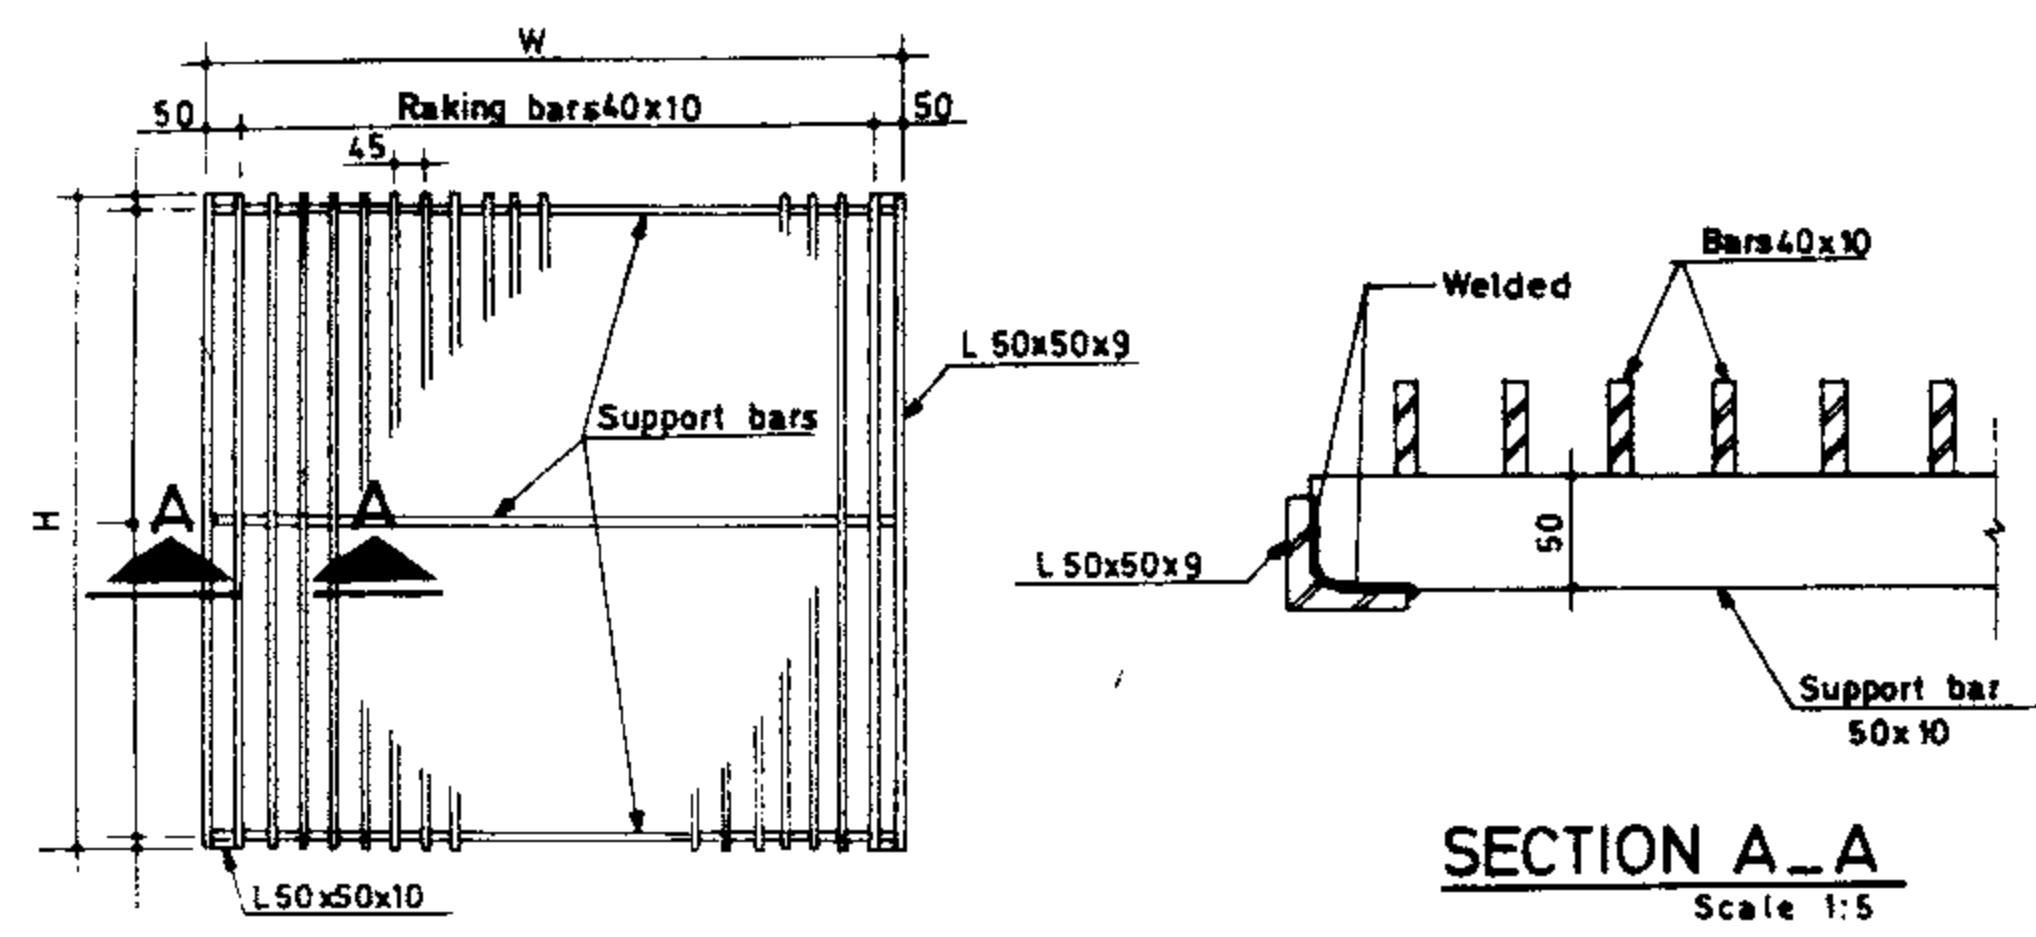


PLAN
(GRATING) Scale 1:20

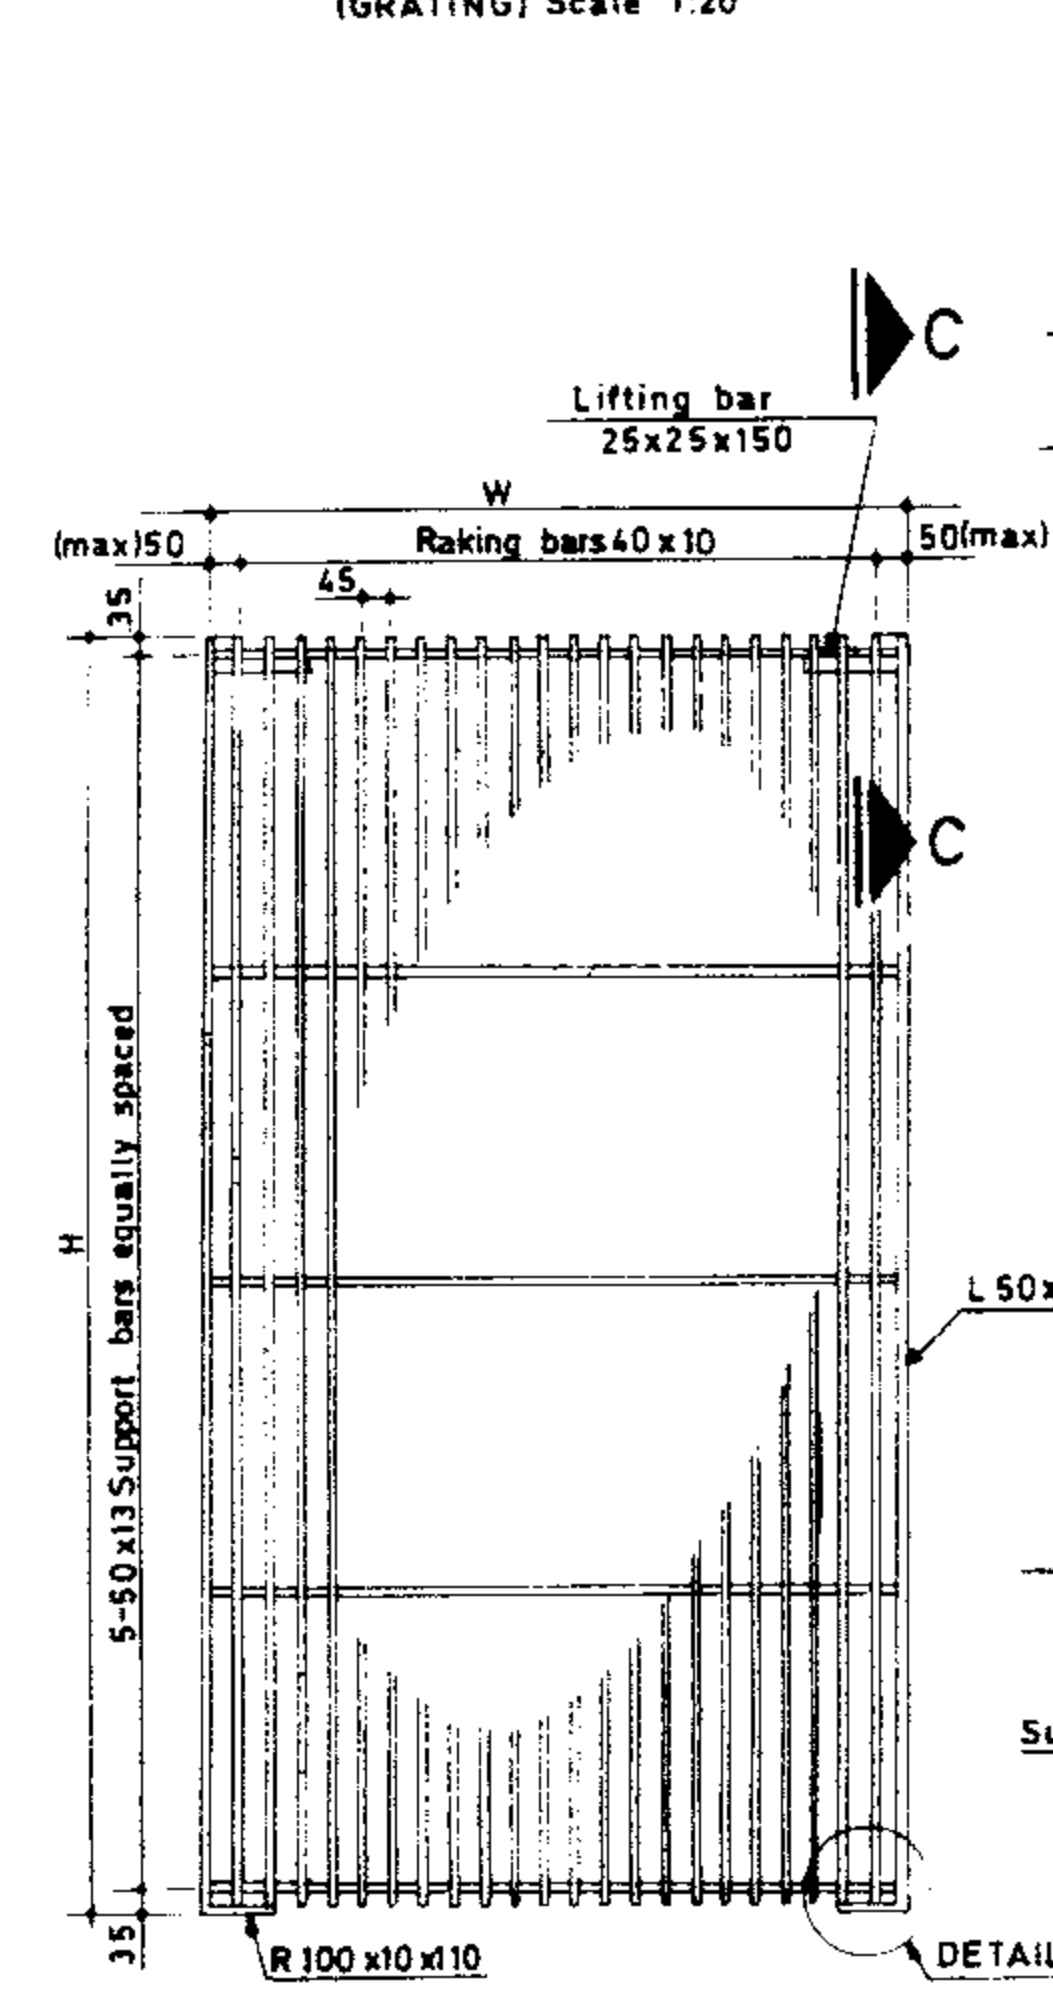


SECTION A-A
Scale 1:5

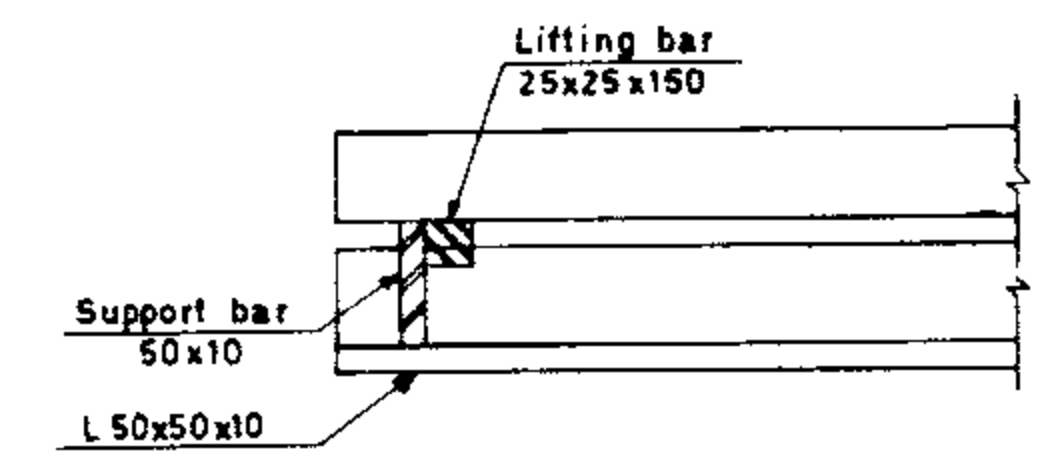


SECTION C-C
Scale 1:5

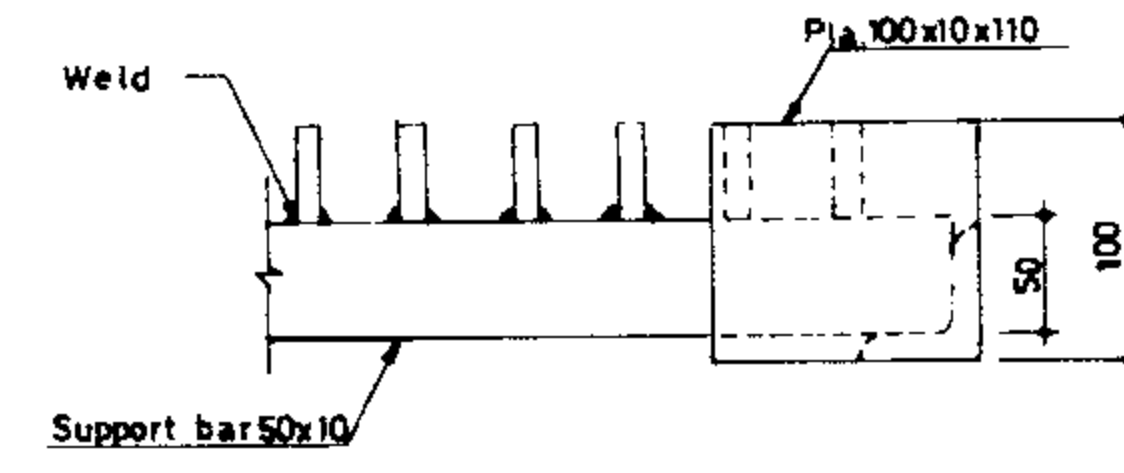


VIEW D-D
Scale 1:5

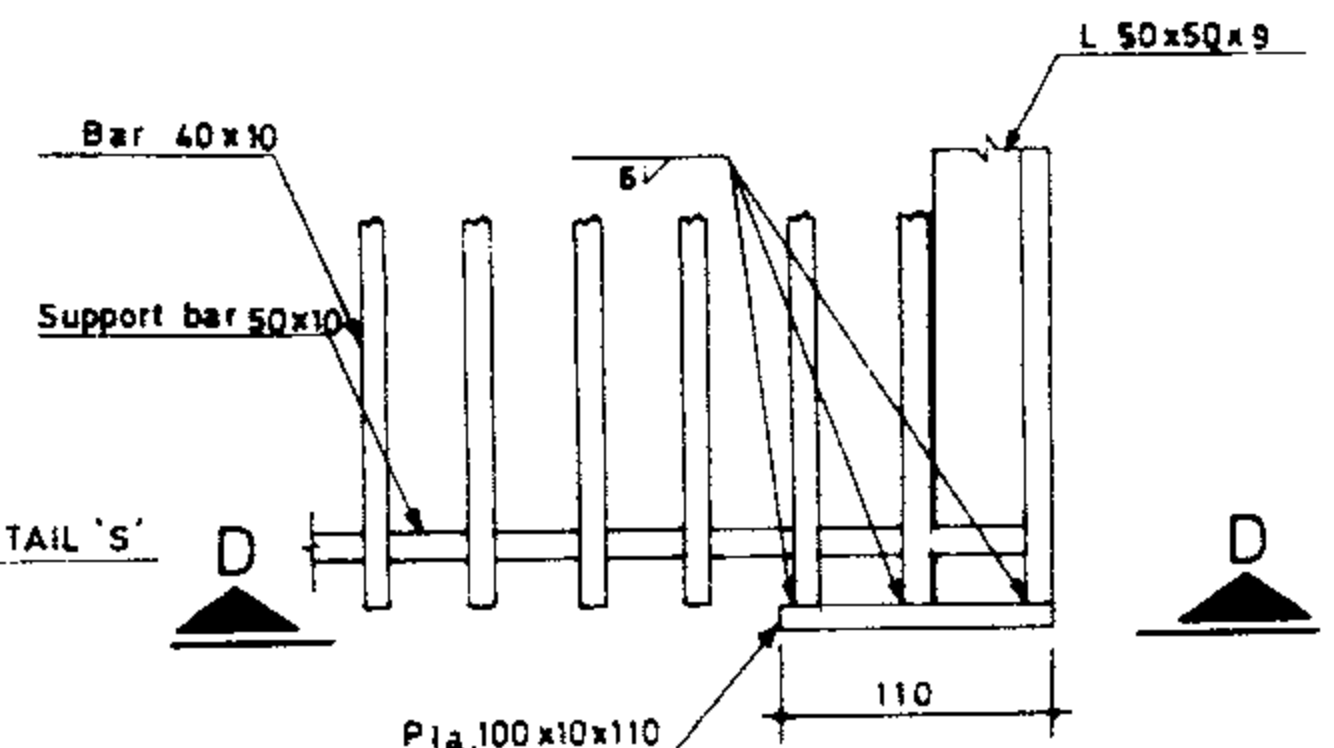


DETAIL S
Scale 1:5

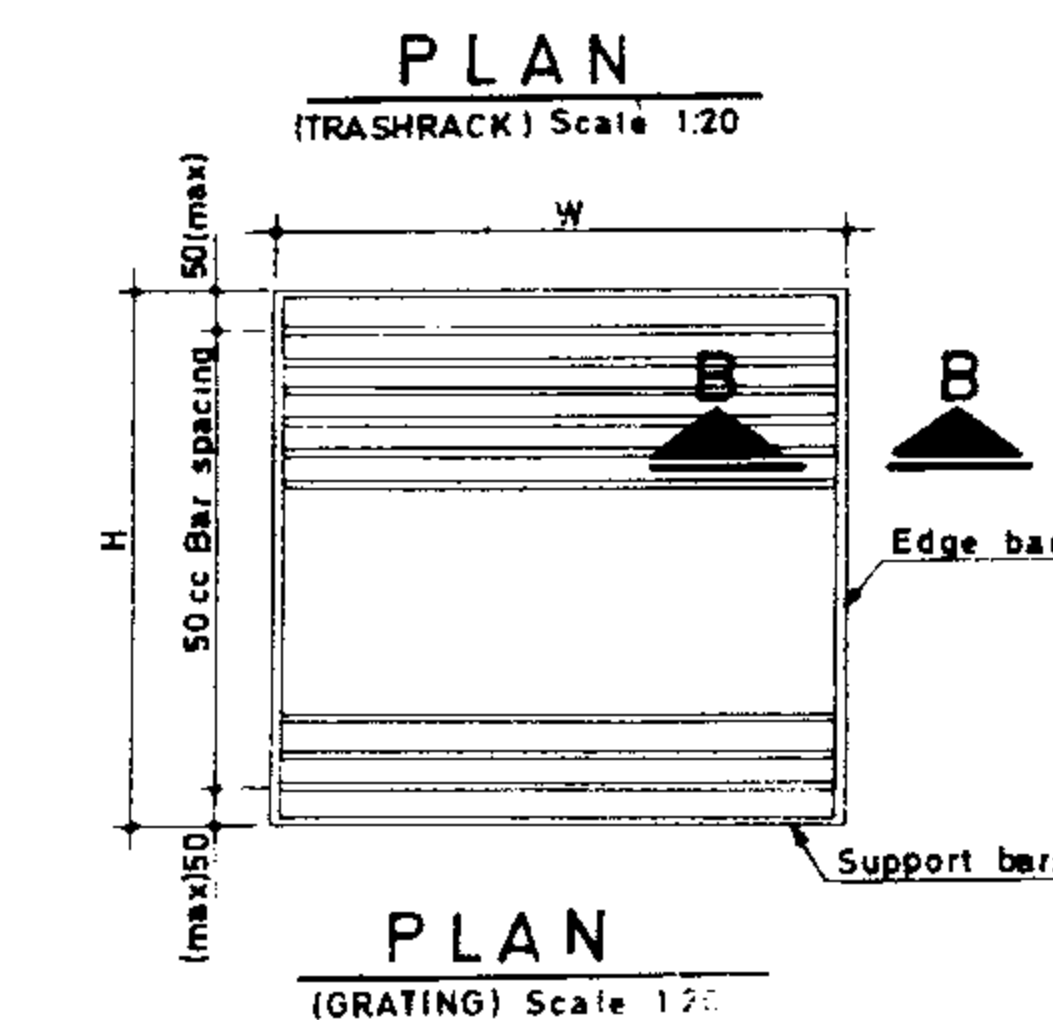


PLAN
(GRATING) Scale 1:20

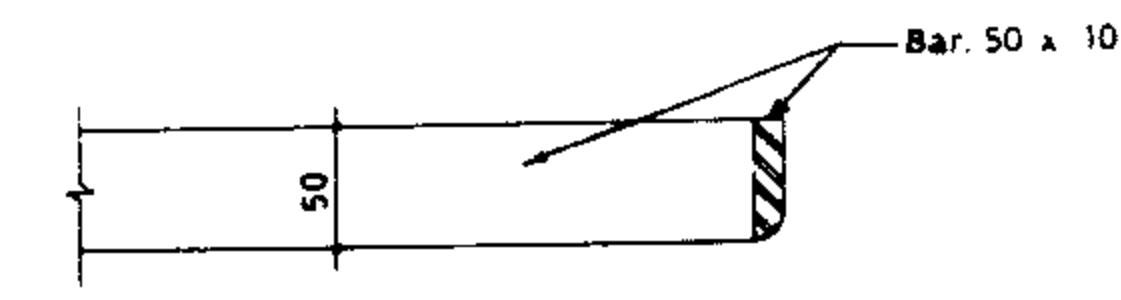


SECTION B-B
Scale 1:5

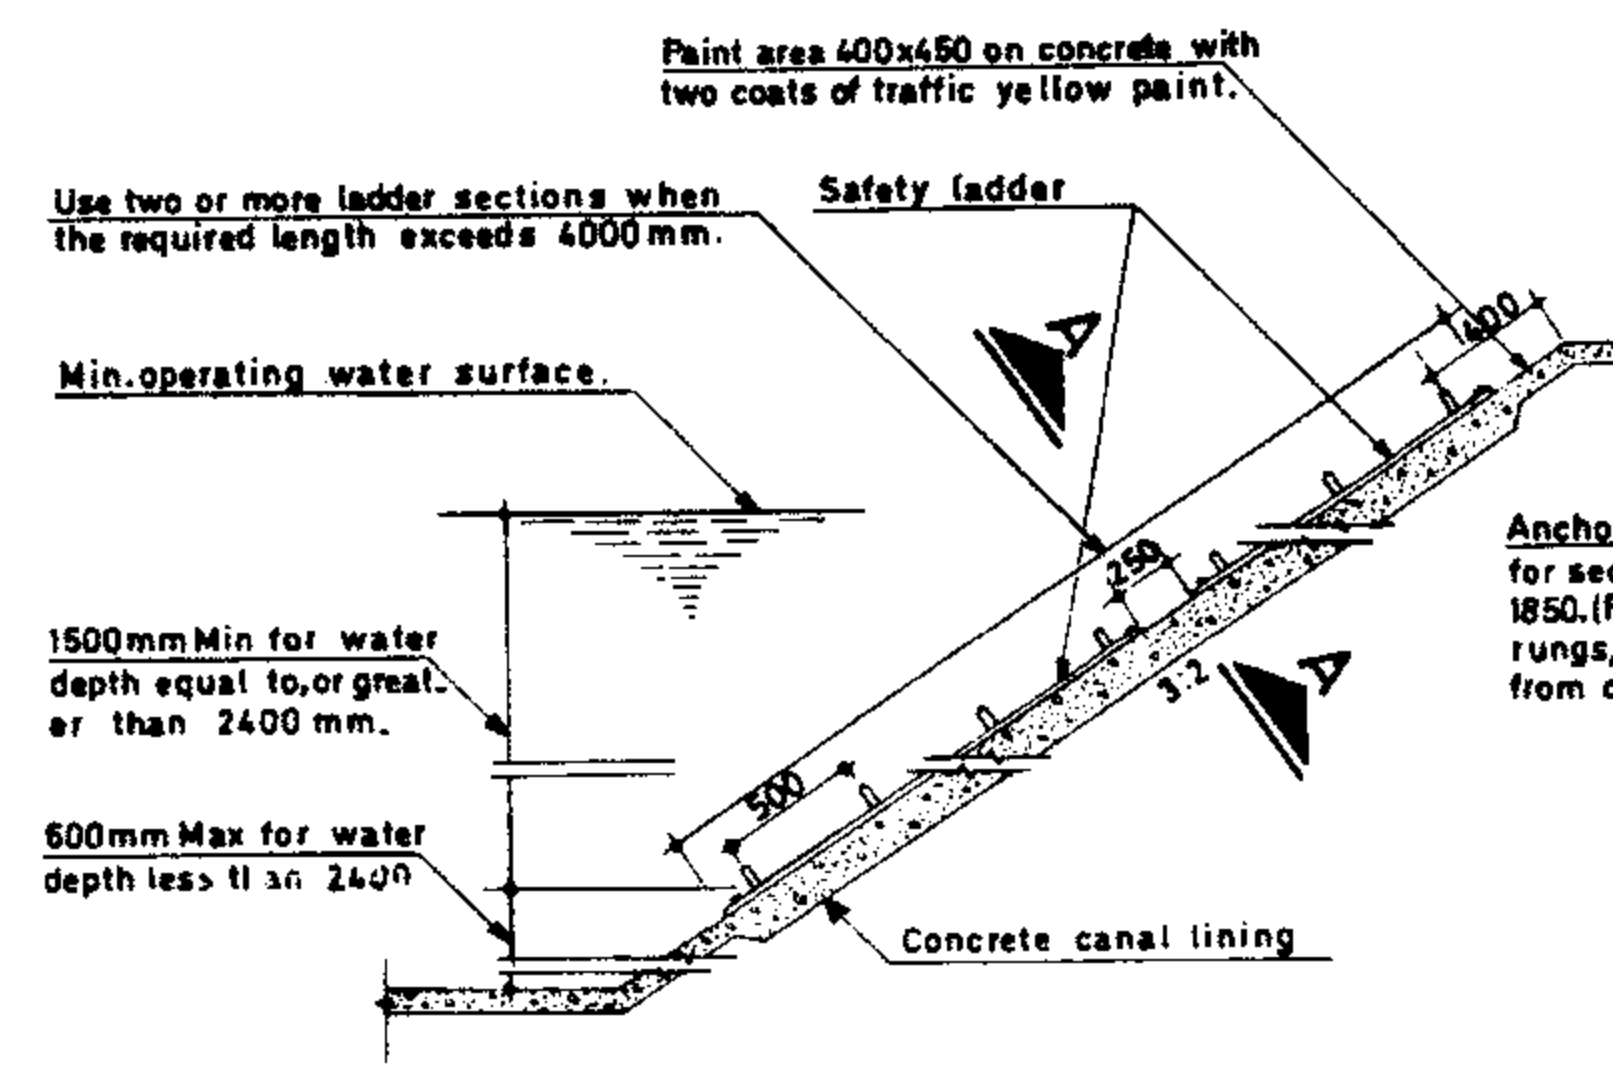


PREFABRICATED LADDER
Not to scale

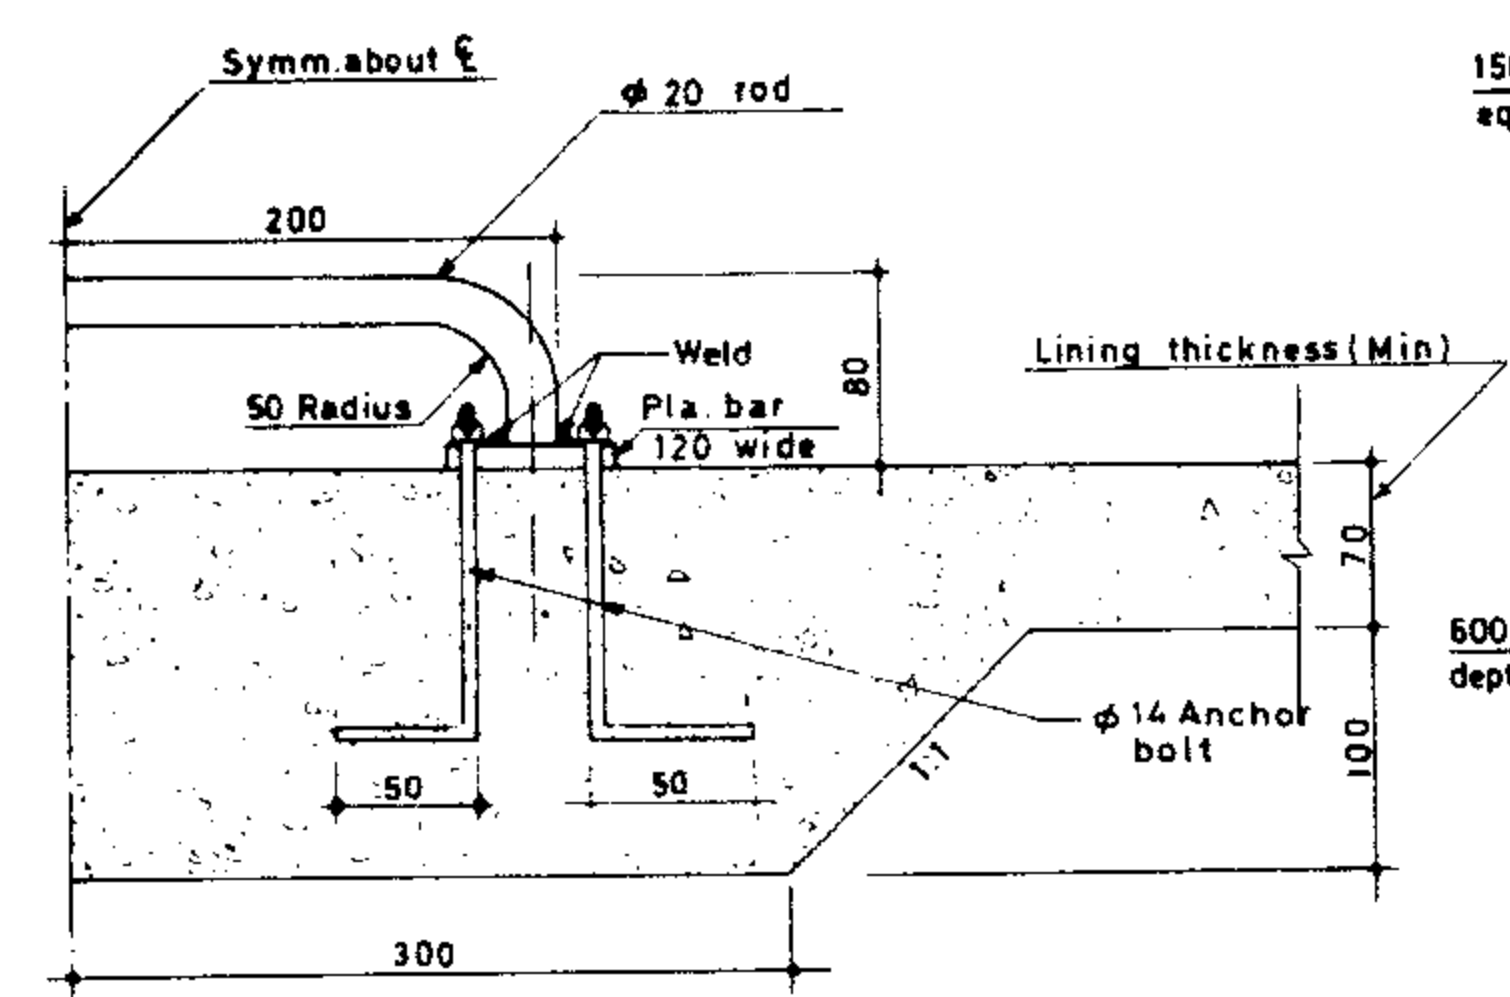


SECTION A-A
Scale 1:5

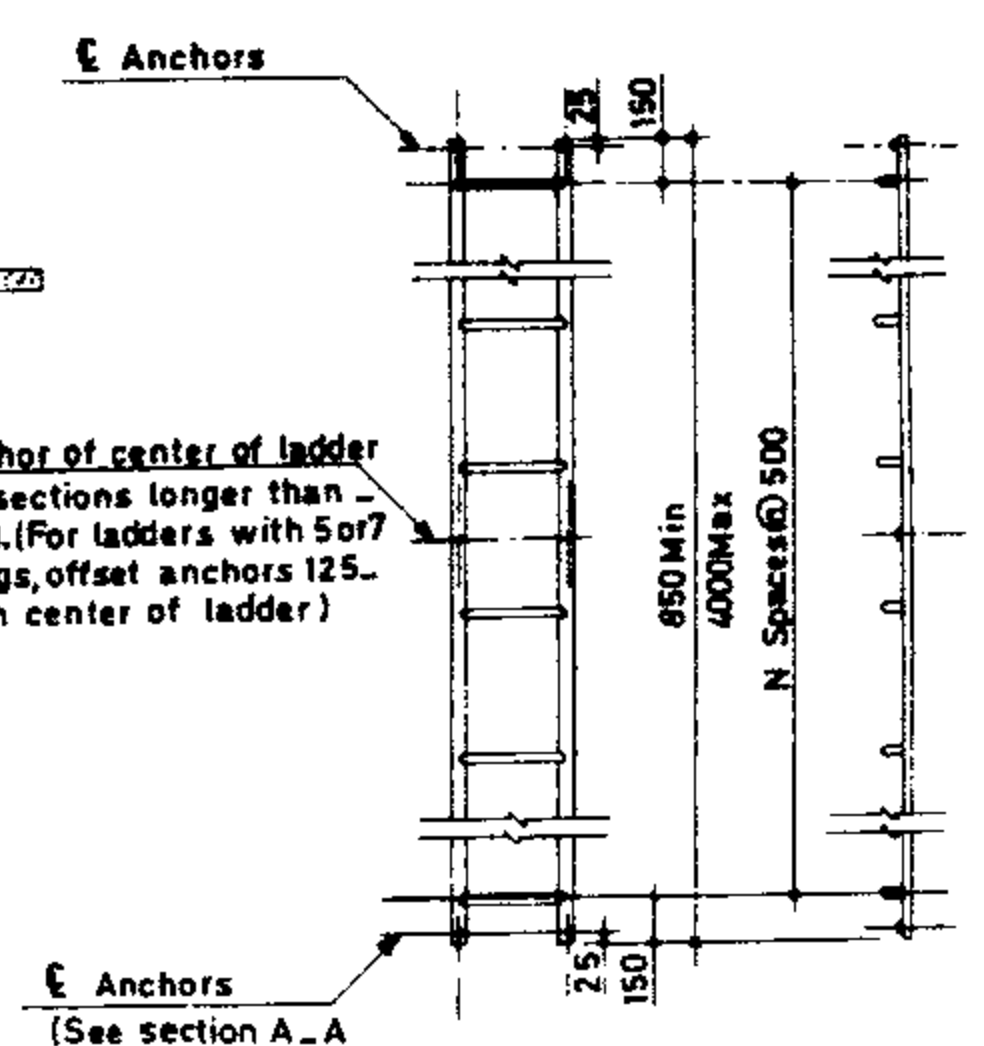


LADDER SECTION
Not to scale

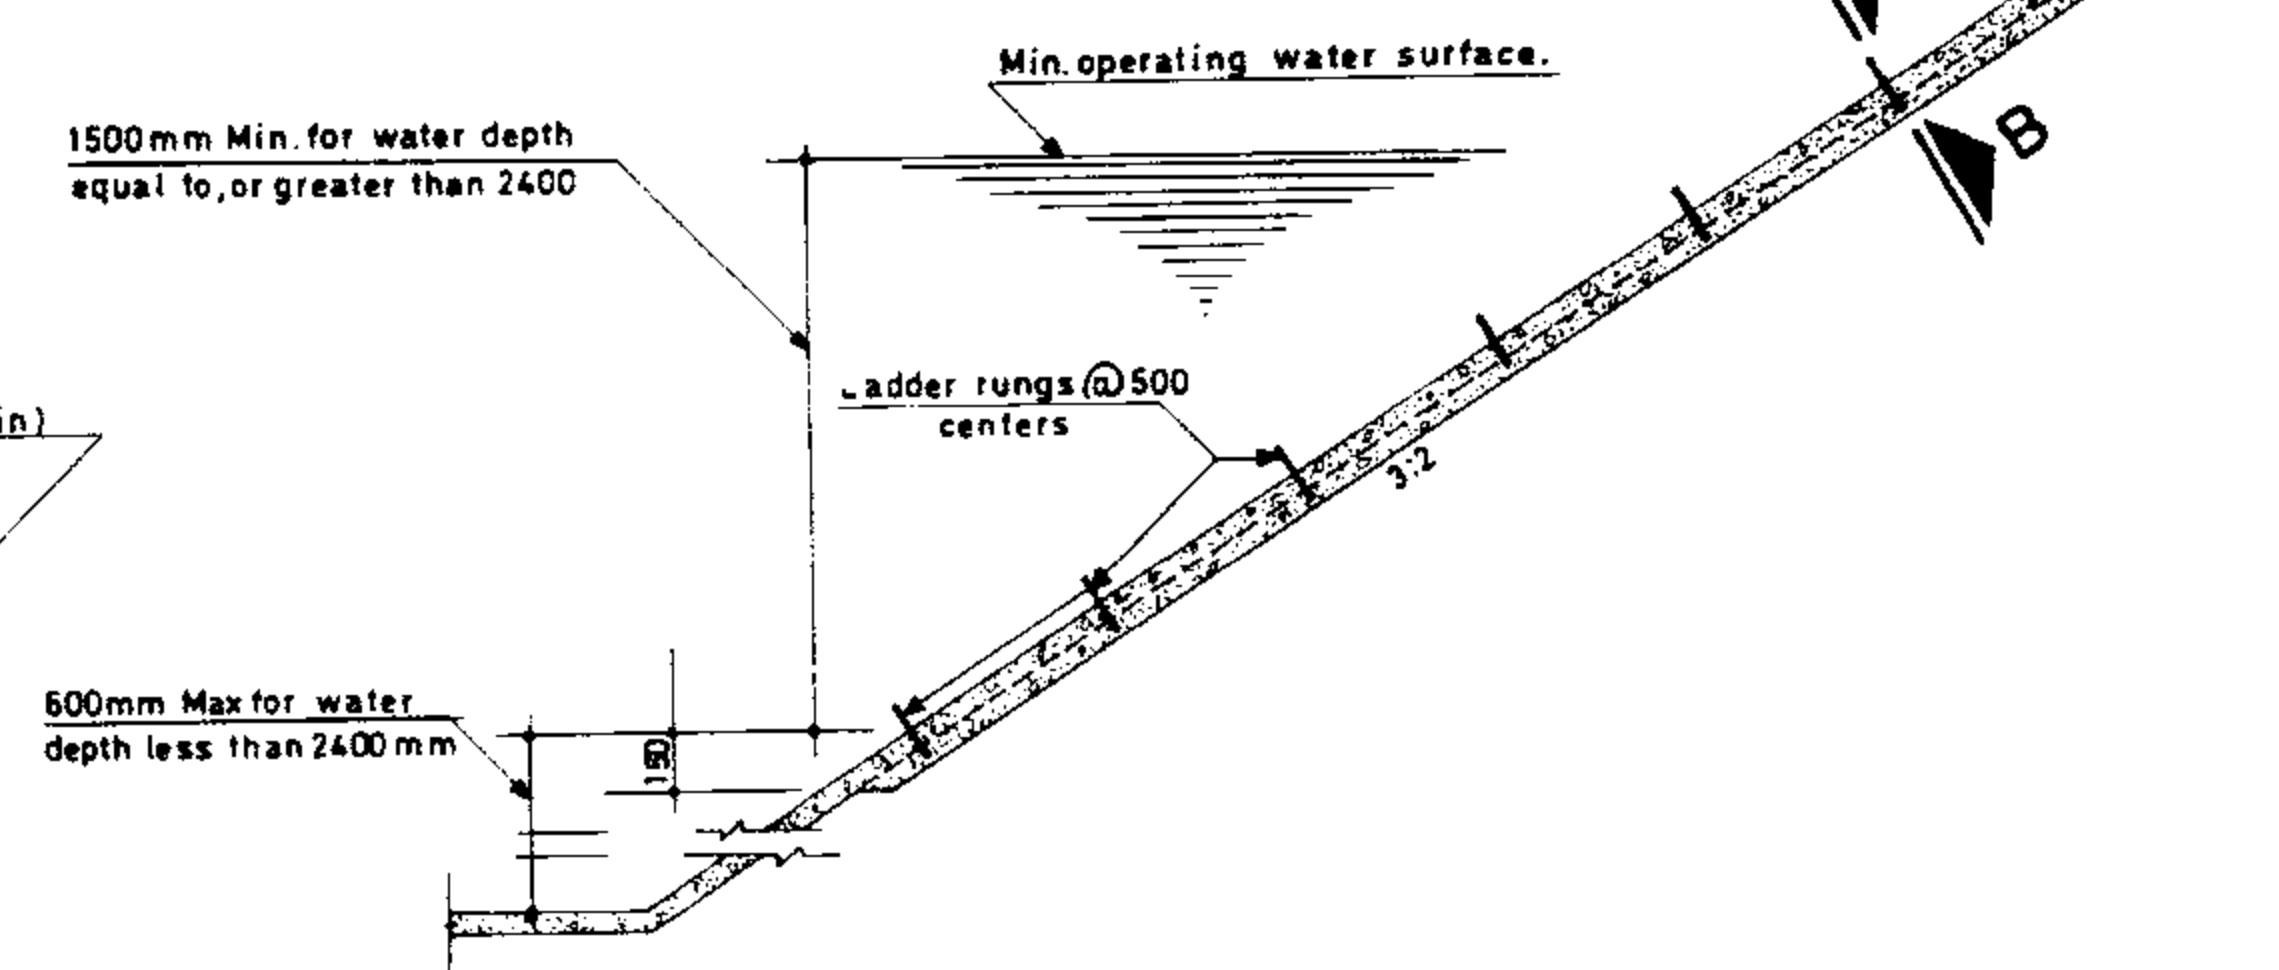

INSTALLATION DETAIL
(LADDER RUNG) Not to scale

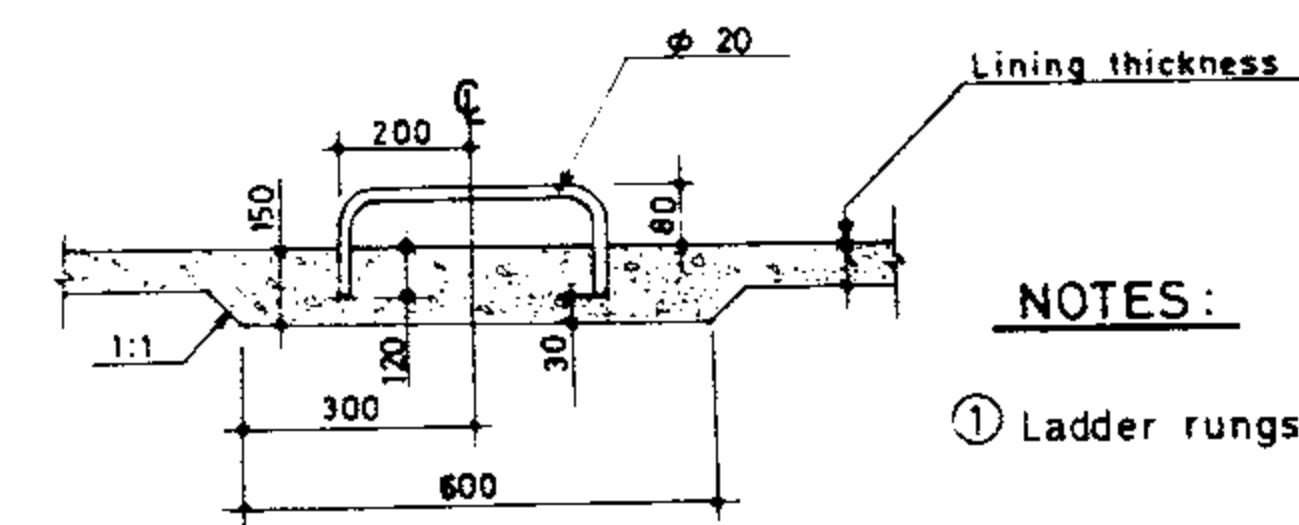

SECTION B-B
Not to scale

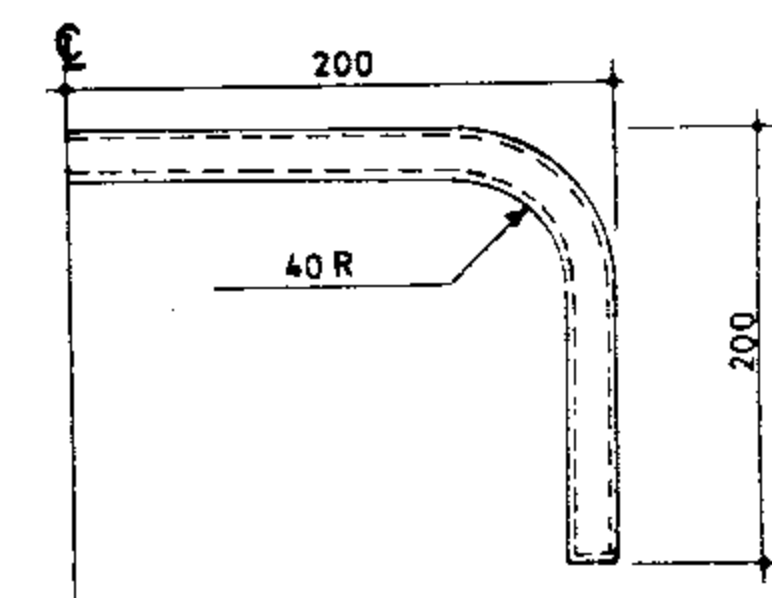

LADDER RUNG
Not to scale

NOTES:

- ① Ladder to be used on sides of canal where the vertical lining height is 0.75 m or more.
- ② Ladders to be located opposite each other at 220 m interval on each side of the canal, and upstream of structures as directed.
- ③ Ladders to be fabricated from steel or aluminum.
- ④ Ladders shall be anchored to the canal lining with stainless steel expansion type or impact type anchors, subject to the approval of the contracting officer.
- ⑤ Ladders to be painted yellow after fabrication.
- ⑥ W and H shall be determined base on field conditions

NOTES:


- ① Ladder rungs to be placed during concrete lining operations, located opposite each other at 220 m intervals on each side of the canal, and upstream of structures as directed.
- ② Ladder rungs are not required on sides of canals where the vertical lining height is less than 0.75 m.
- ③ All dimensions are in mm, except otherwise shown.

REFERENCE DWGS:	
-----------------	--


Scale: 1:20, 1:5	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. NO. 18/3/1/01	
Approved:	Sheet. NO. 1 of 1	Rev. NO.

GRATING, TRASHRACK AND LADDER PLANS, SECTIONS AND DETAILS
--


ISLAMIC REPUBLIC OF IRAN MINISTRY OF PLAN & BUDGET TECHNICAL RESEARCH AND STANDARDS BUREAU

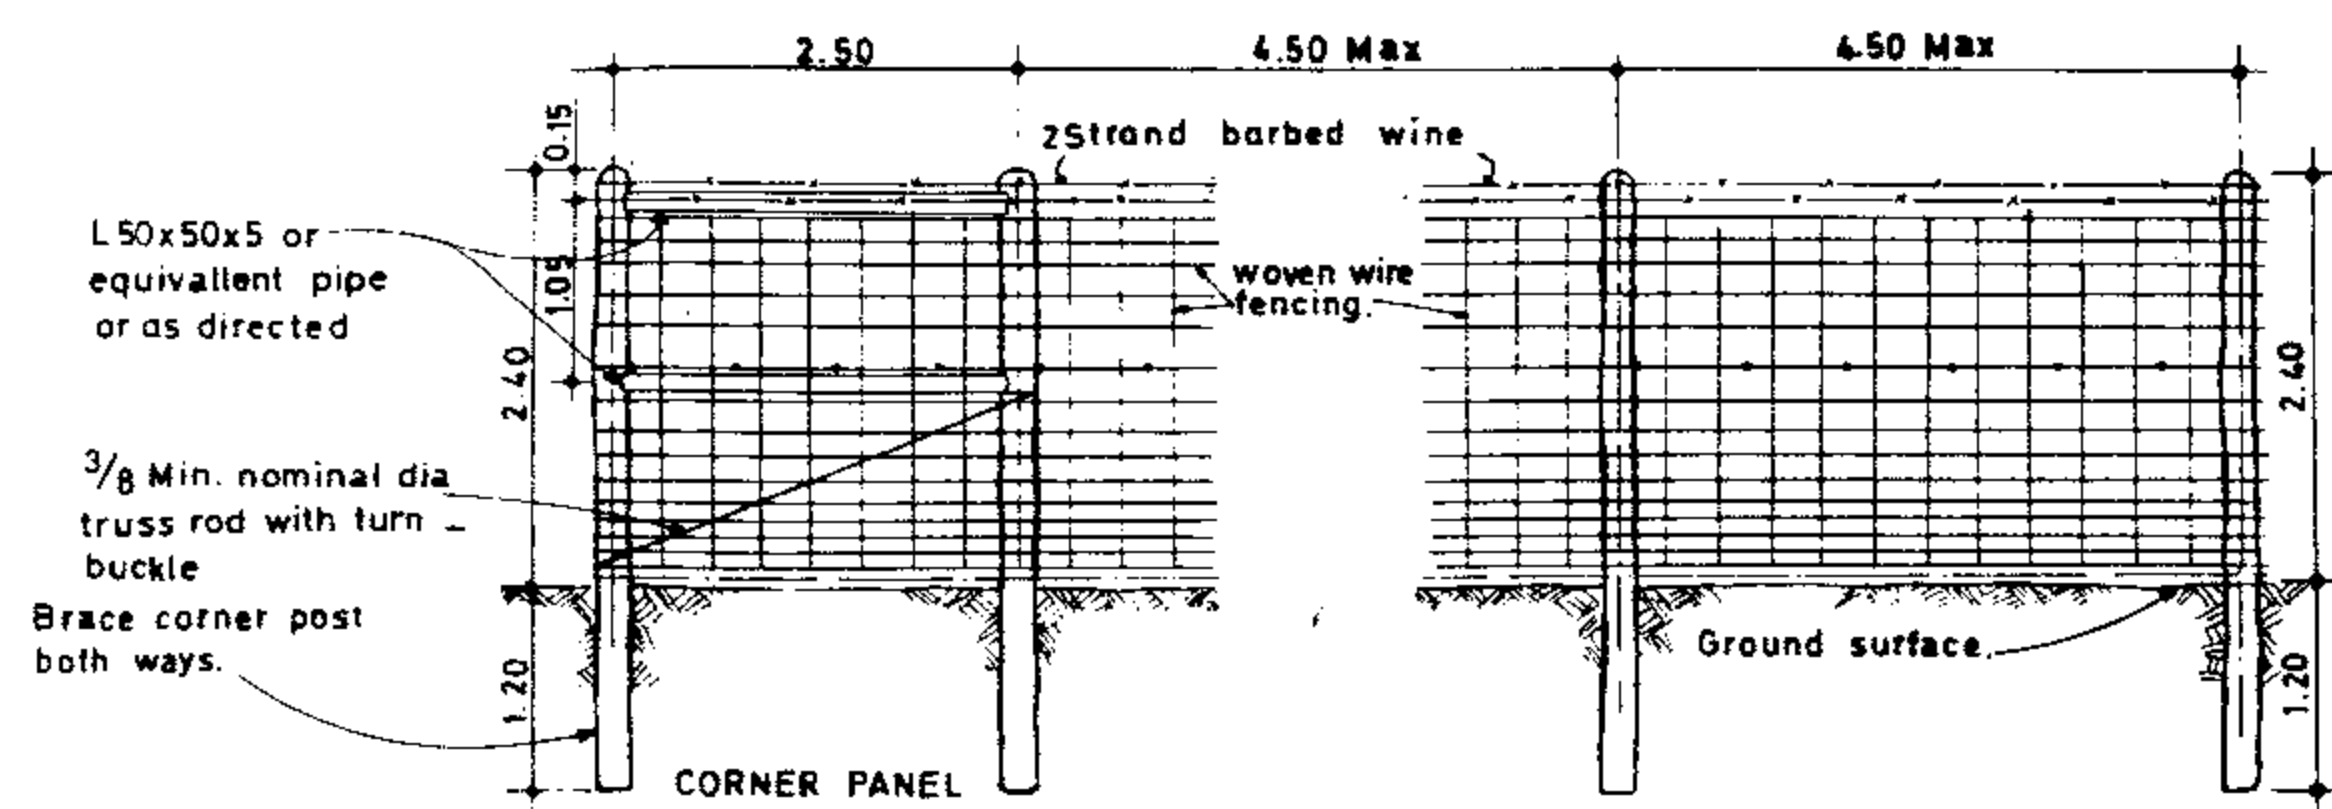



ANIMAL PROOF FENCING
Not to scale

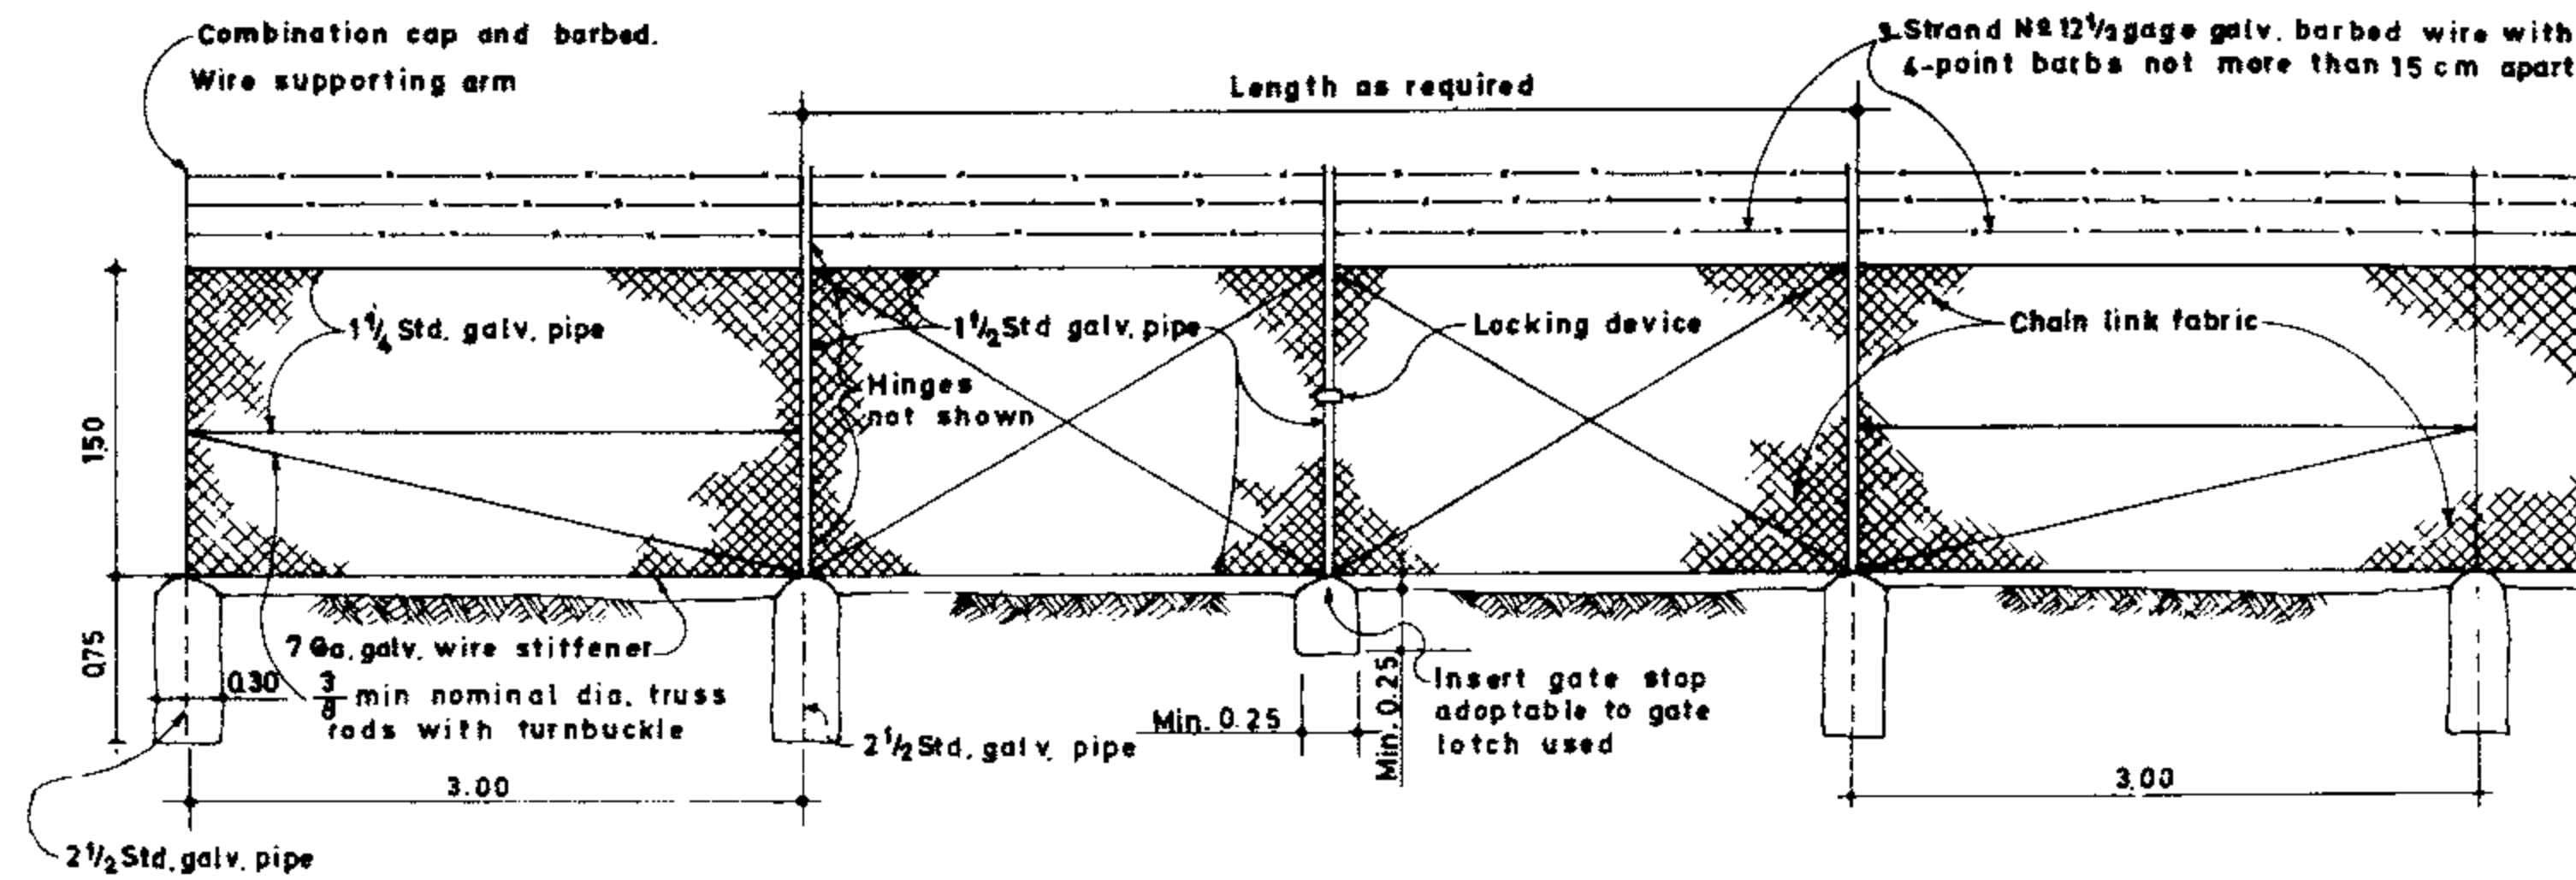

GATE AND ADJOINING PANELS
Scale 1:50

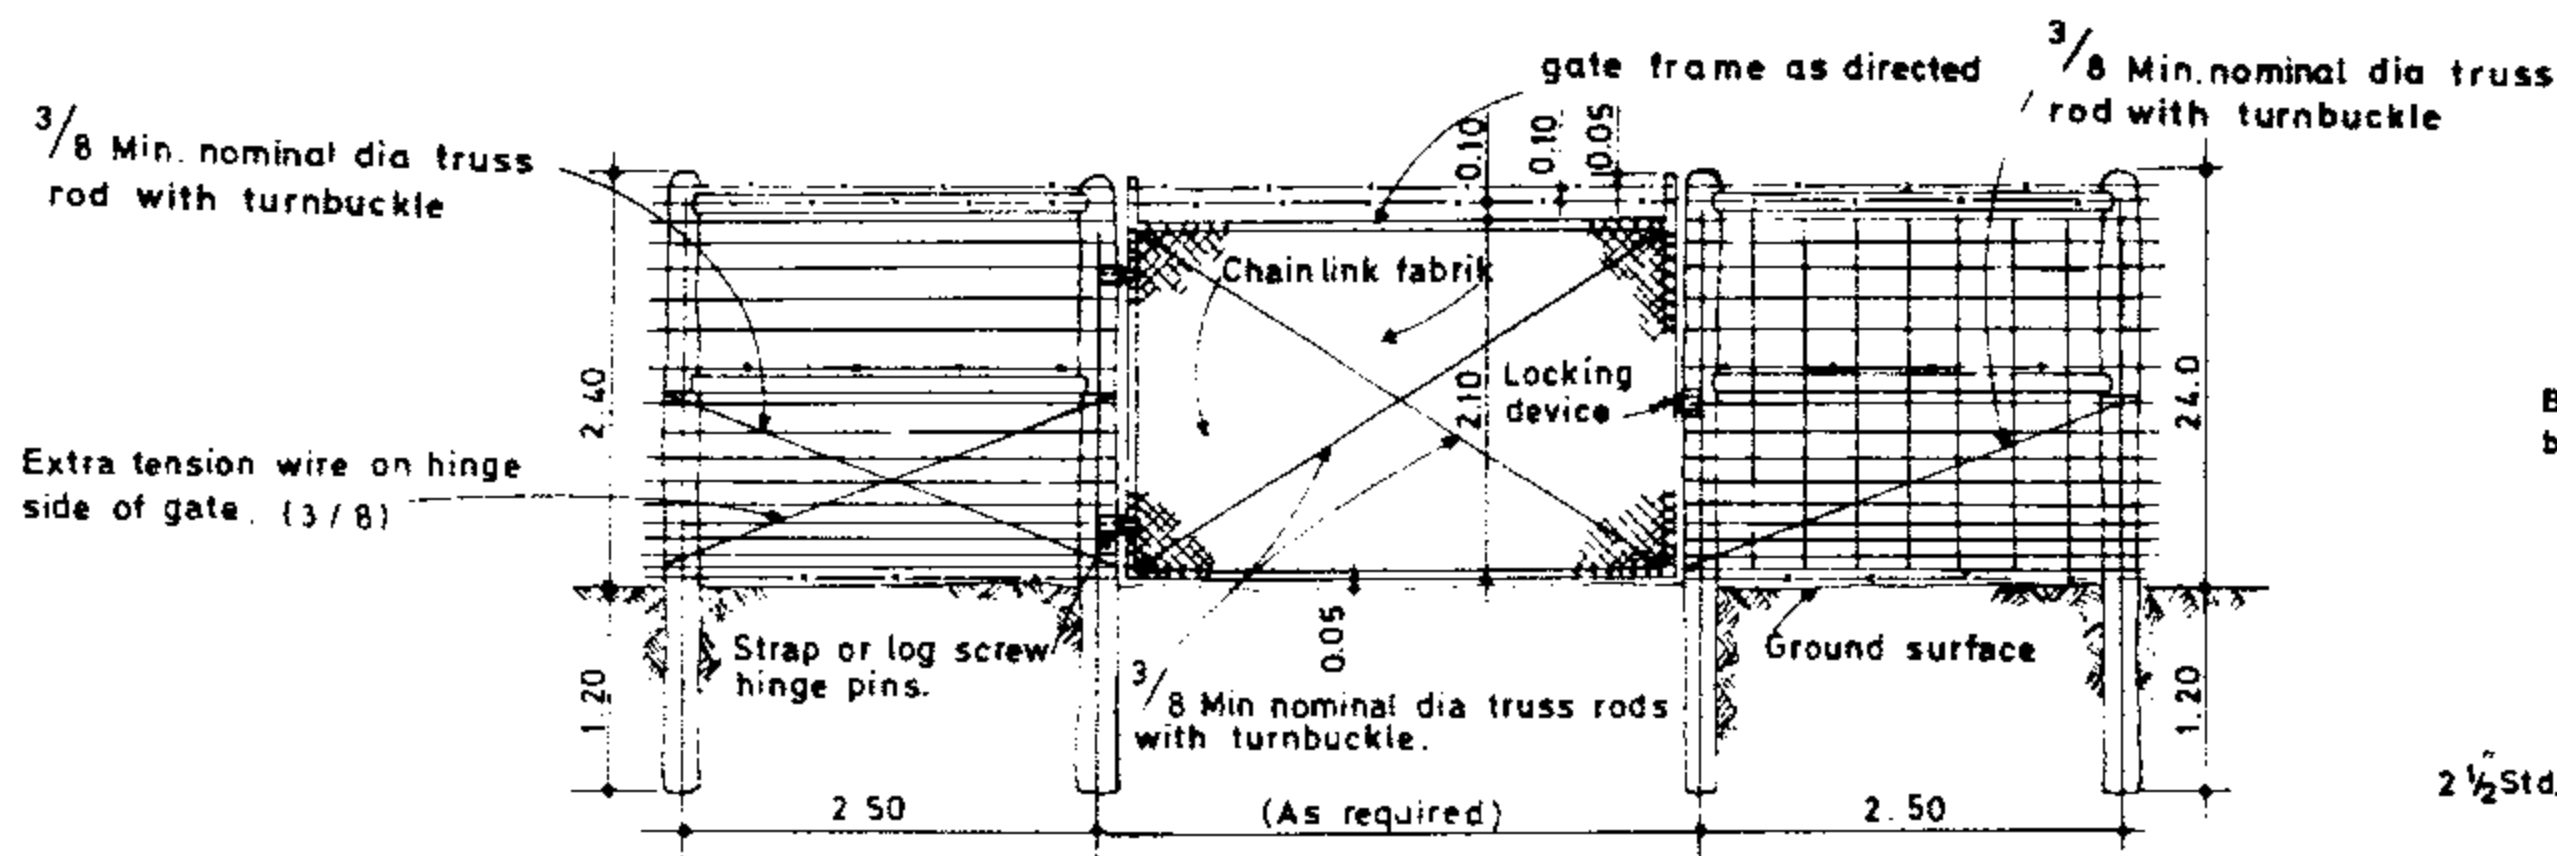


GATE AND ADJOINING PANELS
Not to scale

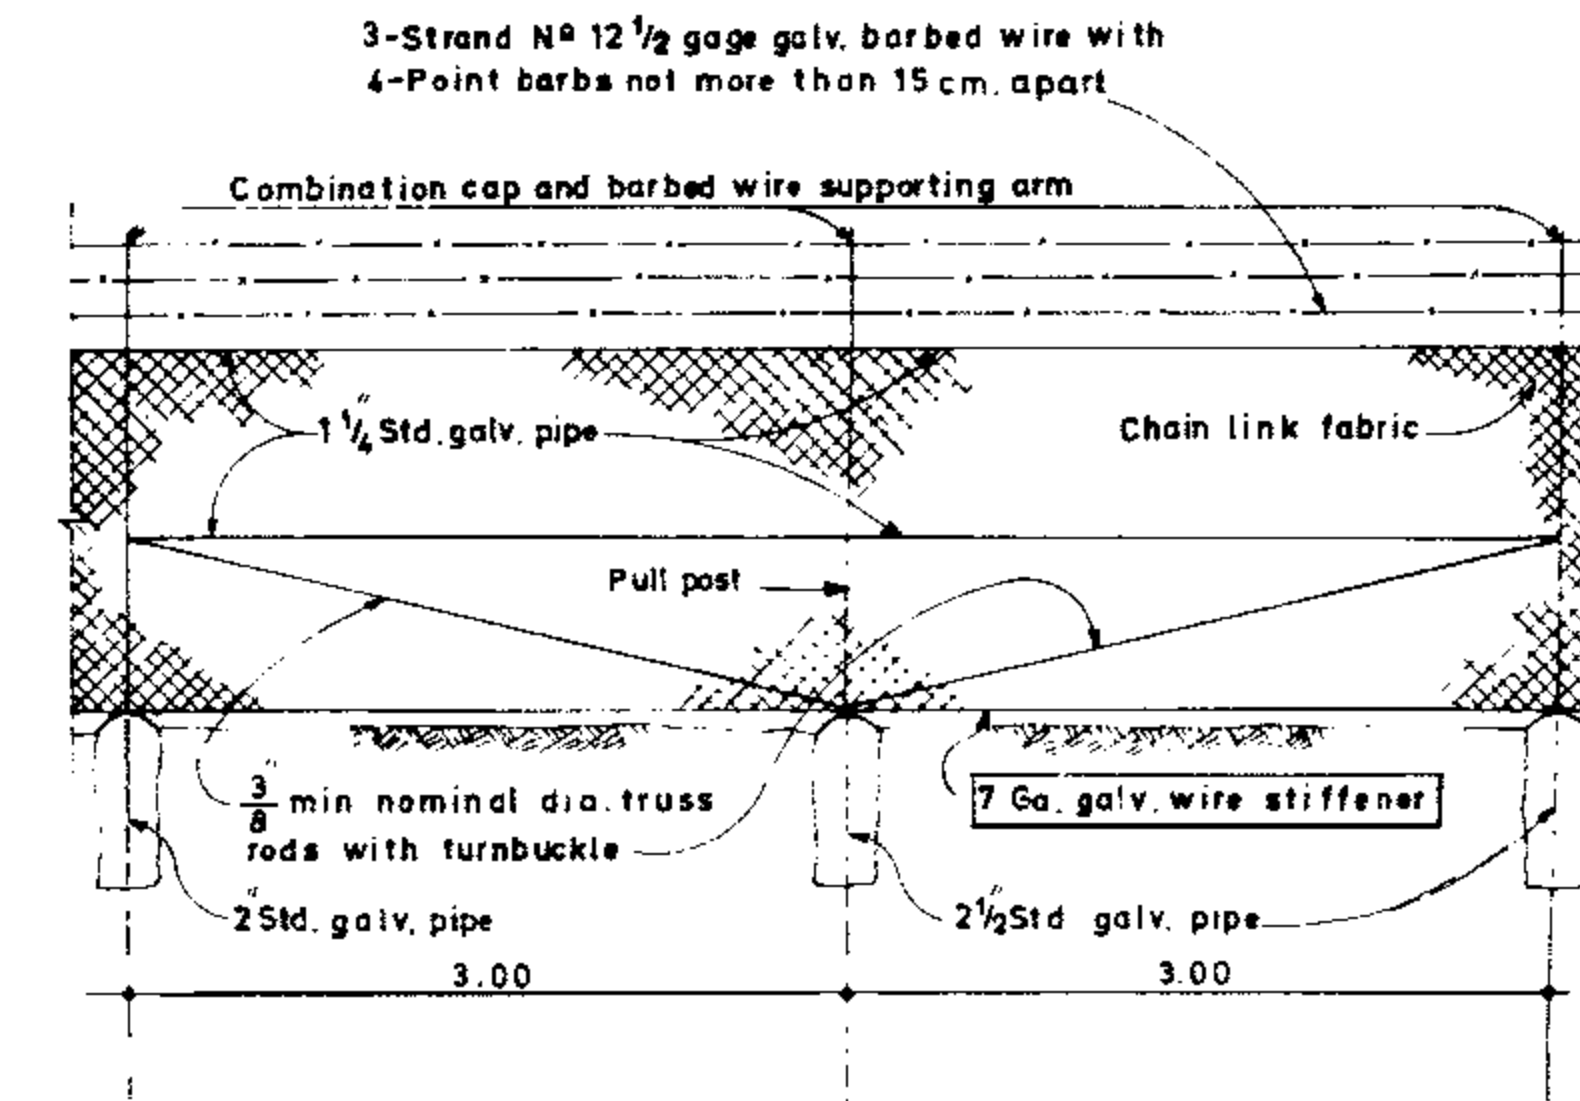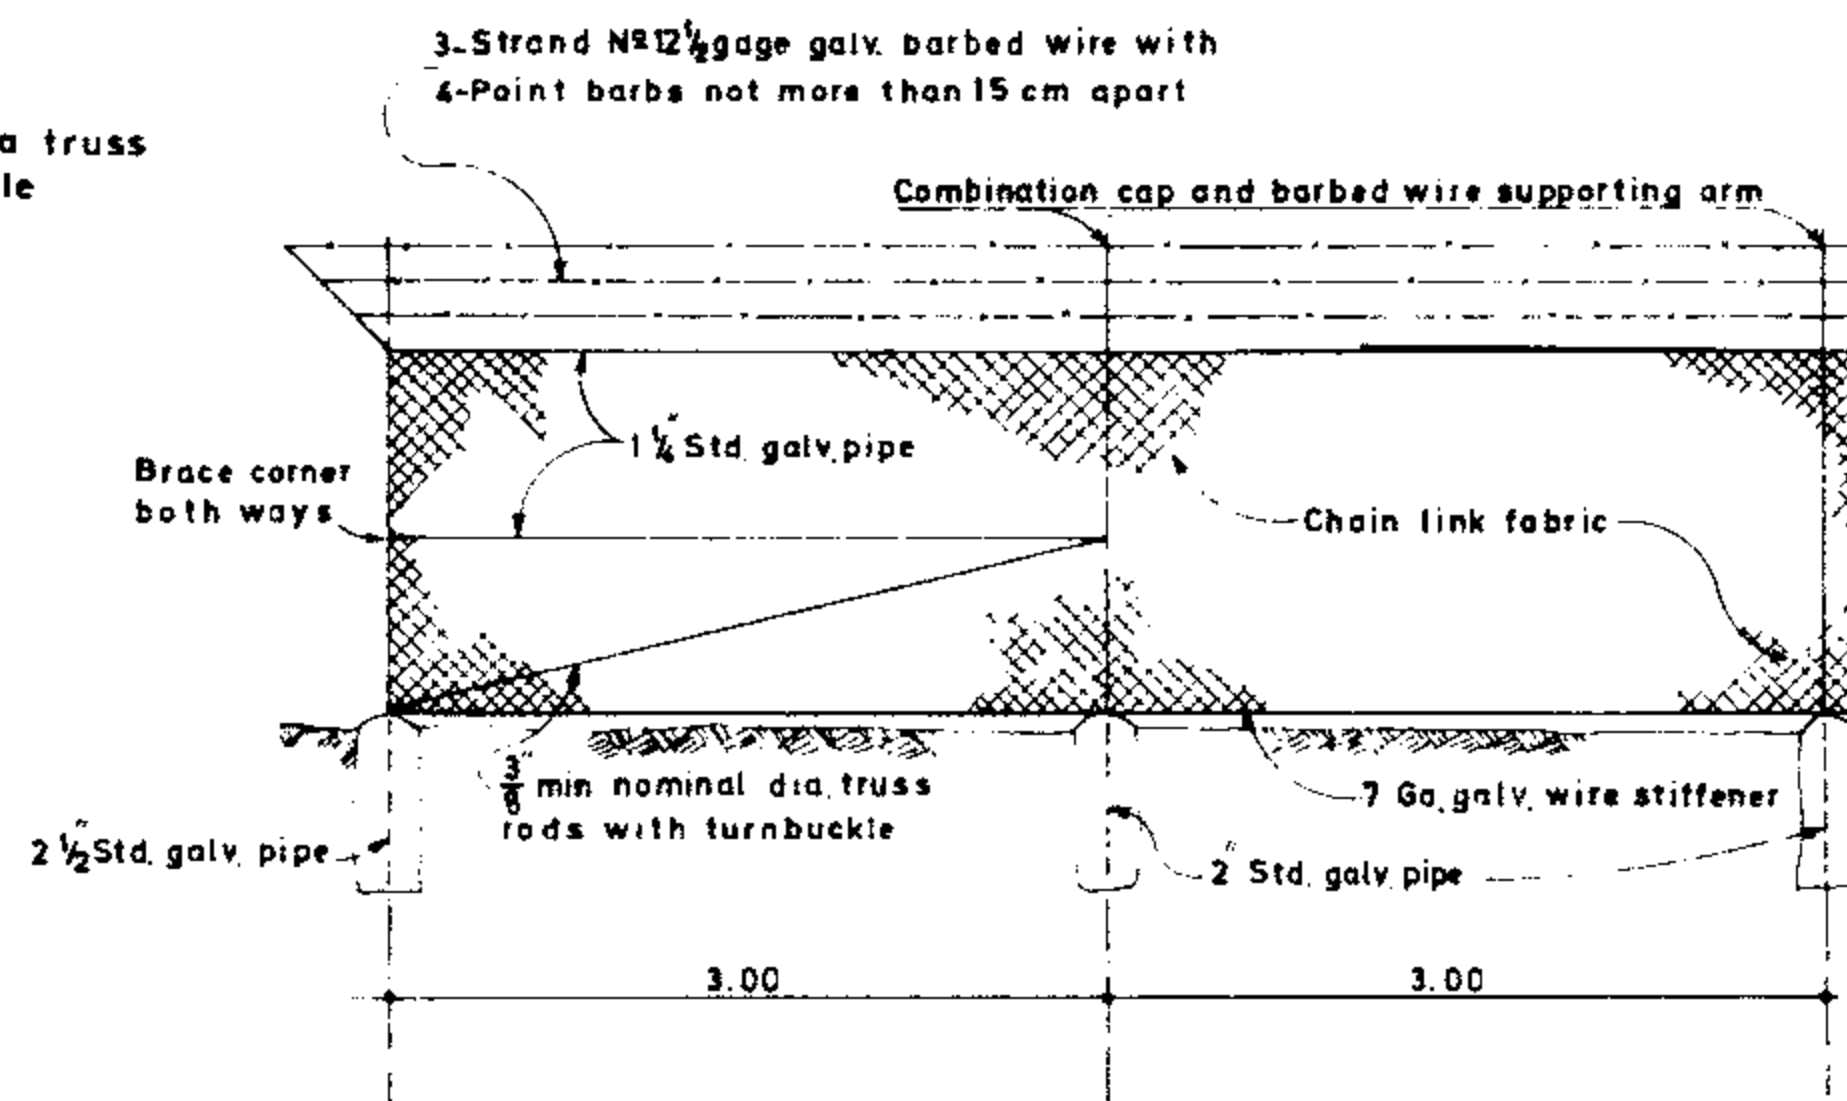


NOTES:

1. Maximum length of fence without a corner, end, gate, or brace post shall be 300 m.
2. Additional brace posts shall be placed where directed by the engineer.
3. Fence on curve shall have brace posts spaced as follows:
 - Curve radius less than 150 m, every 2nd post.
 - Curve radius 150-300 m, every 5th post.
 - Curve radius over 300 m, every 7th post.
- All wood posts to be placed with butt end down.
- All wood posts to be placed in undisturbed natural ground or compacted fill.
- Woven wire fencing shall have NR 10 gage top and bottom wires with NR 12 1/2 gage intermediate and stay wires, spacing of stays shall be 30 cm.
- Chain link fabric shall be attached to gate framework in accordance with the manufacturer's standard instructions.

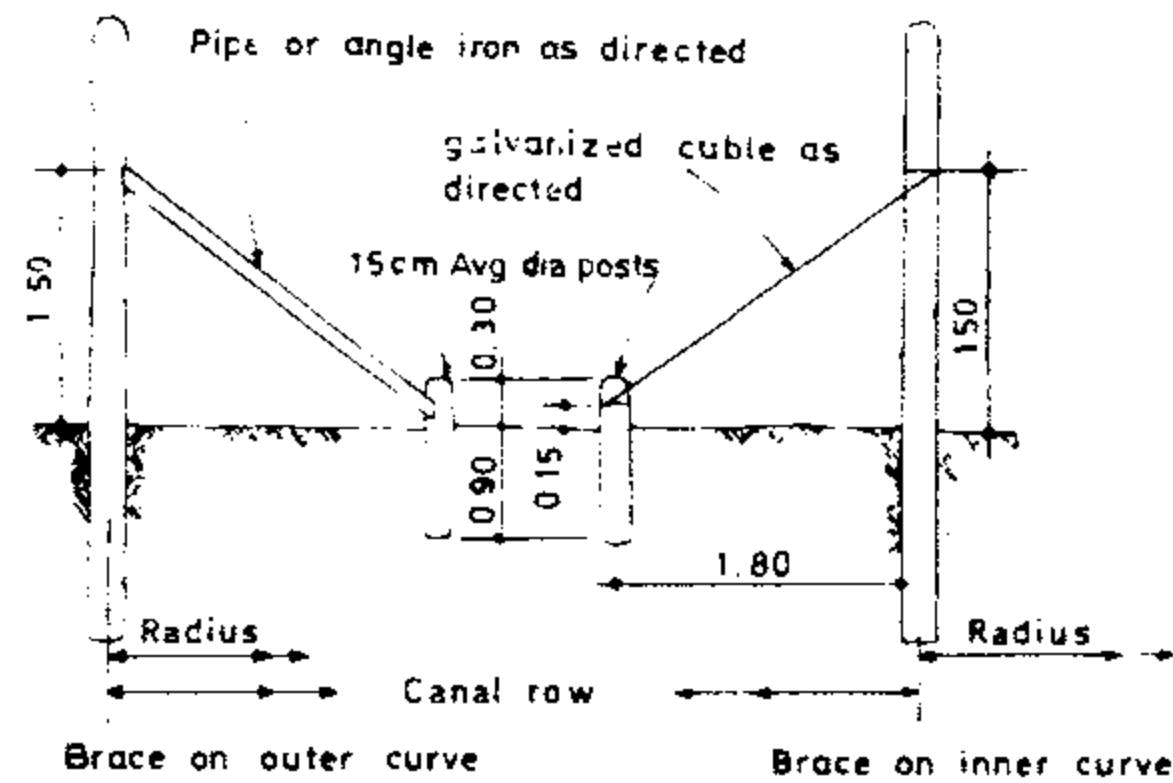


BRACE POSTS ON CURVE
Not to scale

4. This drawing has been prepared for wooden post. There is no restriction for other material such as angle iron steel pipe or concrete posts.

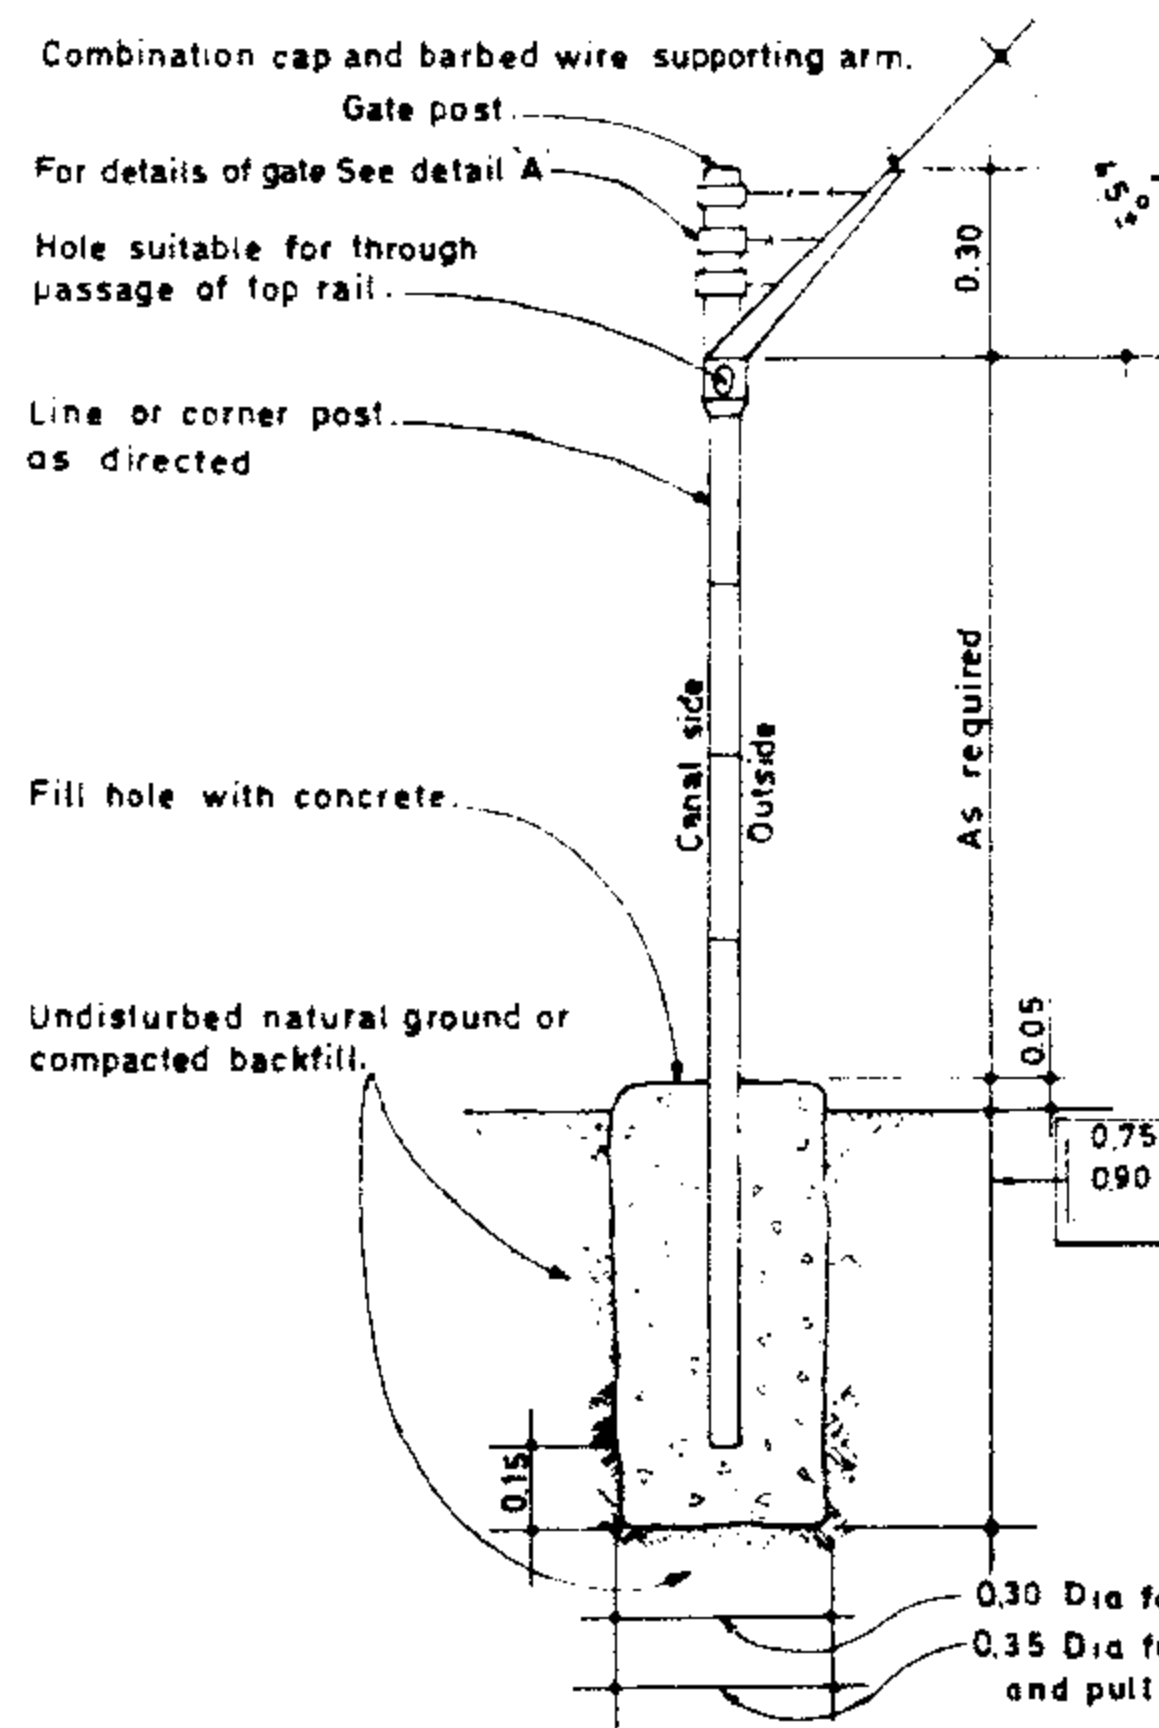

TYPICAL SECTION
Scale 1:20

CORNER AND PLAIN PANELS
Scale 1:50

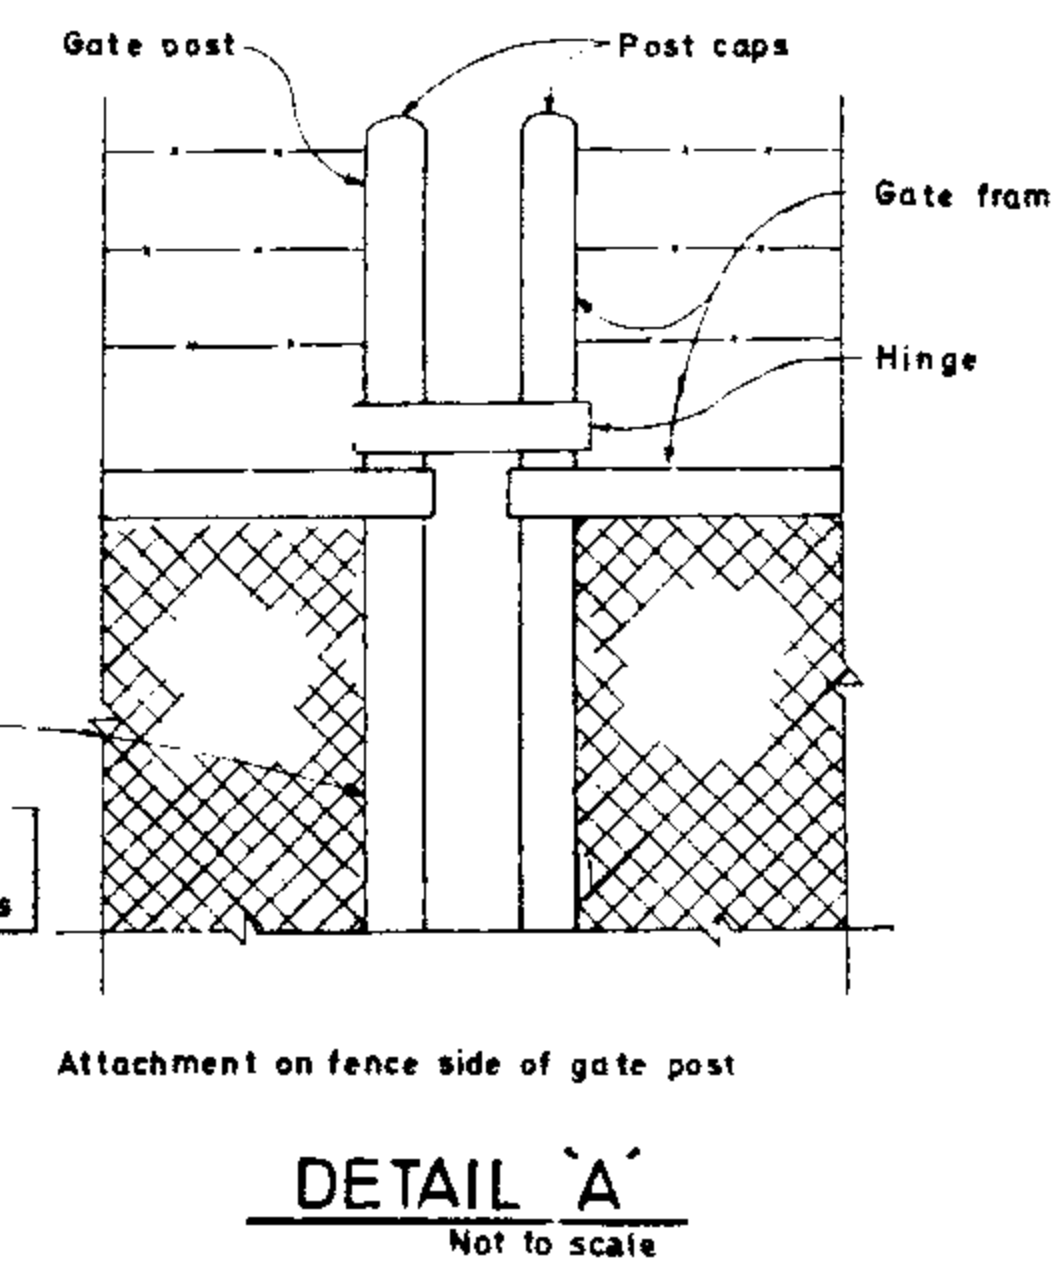

DETAIL A
Not to scale

PANELS ADJOINING PULL POST
Scale 1:50

NOTES:

1. All pipe diameters shown are iron pipe sizes, standard weight.
2. Maximum interval between pull posts 60m.
3. Barbed wire guard to be mounted vertically on all gate posts.
4. Chain link fabric shall be attached to fence framework in accordance with the manufacturer's standard instructions.
5. Barbed wire supporting arms shall be fabricated from 1 1/2 inch pipe.
6. They shall be welded in place or otherwise secured to prevent rotation.
7. School safety fence 210 high. Urban school fence 150 high.

REFERENCE DWGS:

Scale: 1:50, 1:20

IRRIGATION & DRAINAGE STANDARDS

Date:


DWG. No 18/1/1/C1

FENCE

Approved:




Sheet No 1 of 1 Rev. No

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

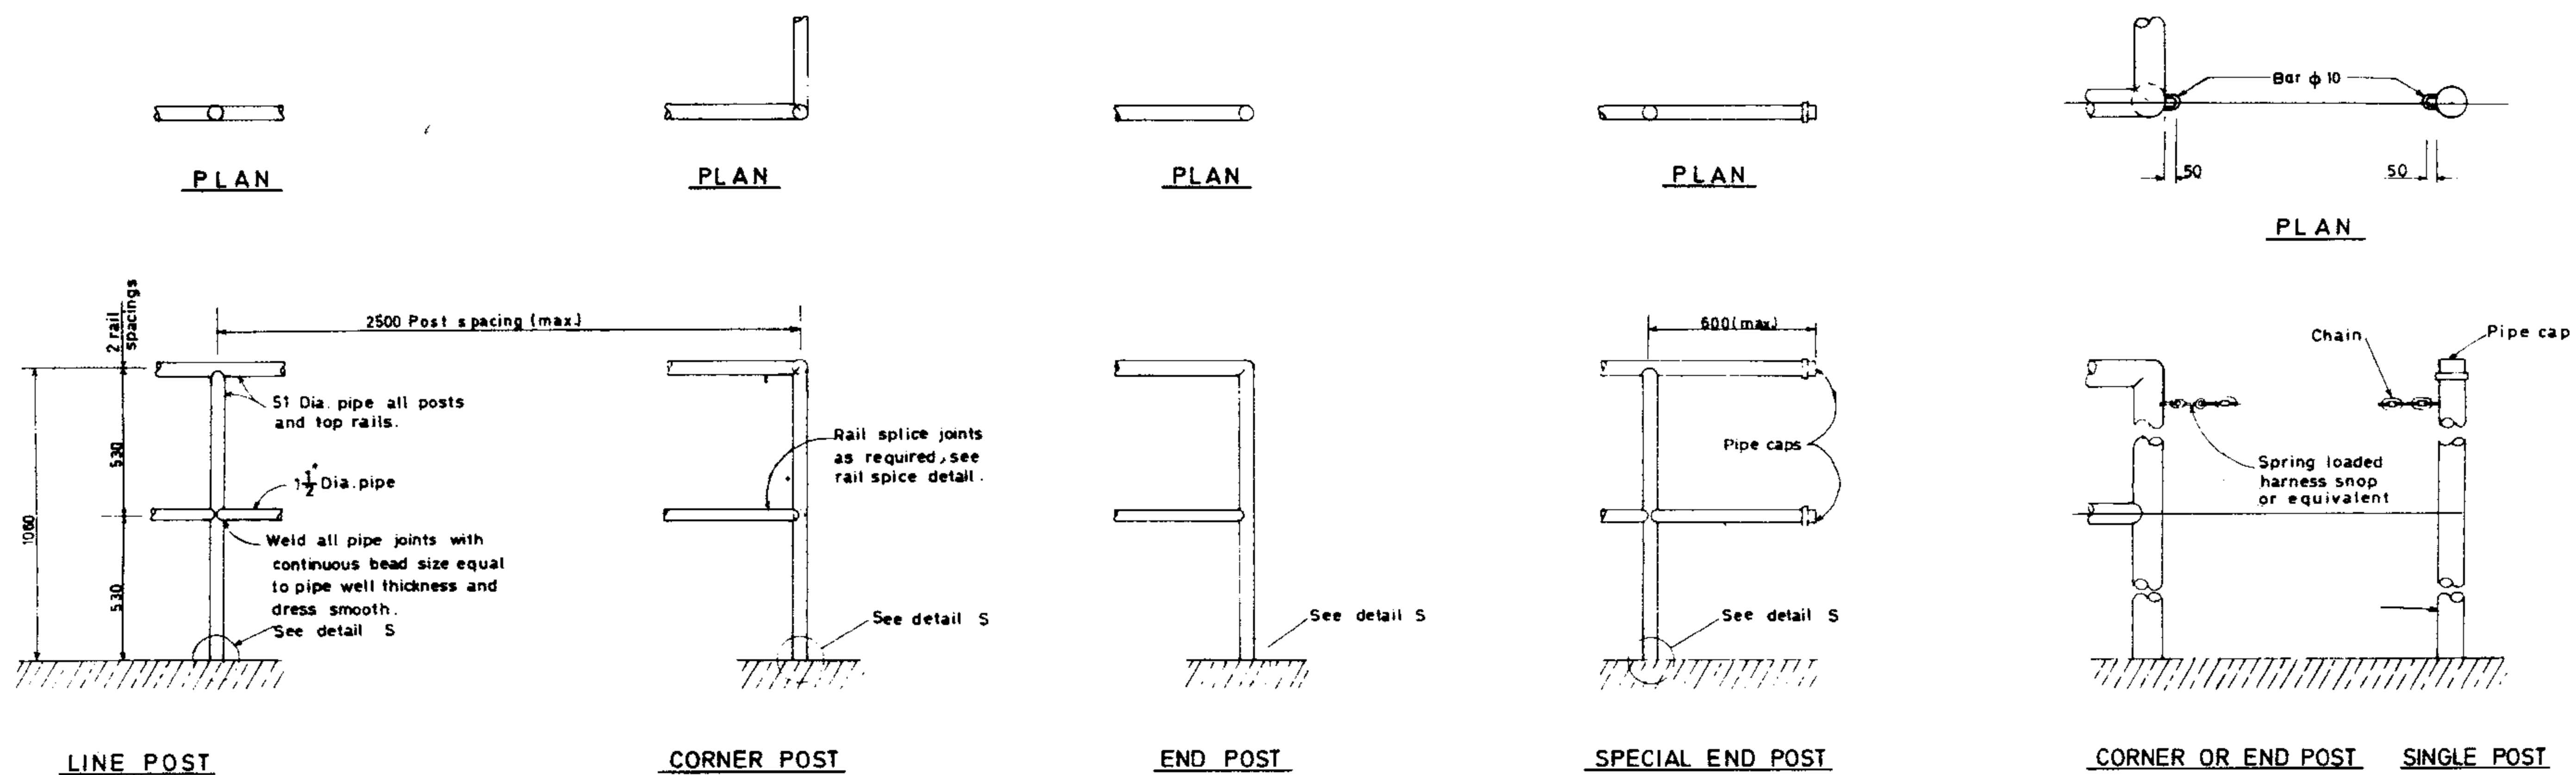

Elevation
PIPE HANDRAIL DETAILS
Scale 1:20

Elevation
GUARD CHAIN DETAIL
Scale 1:10

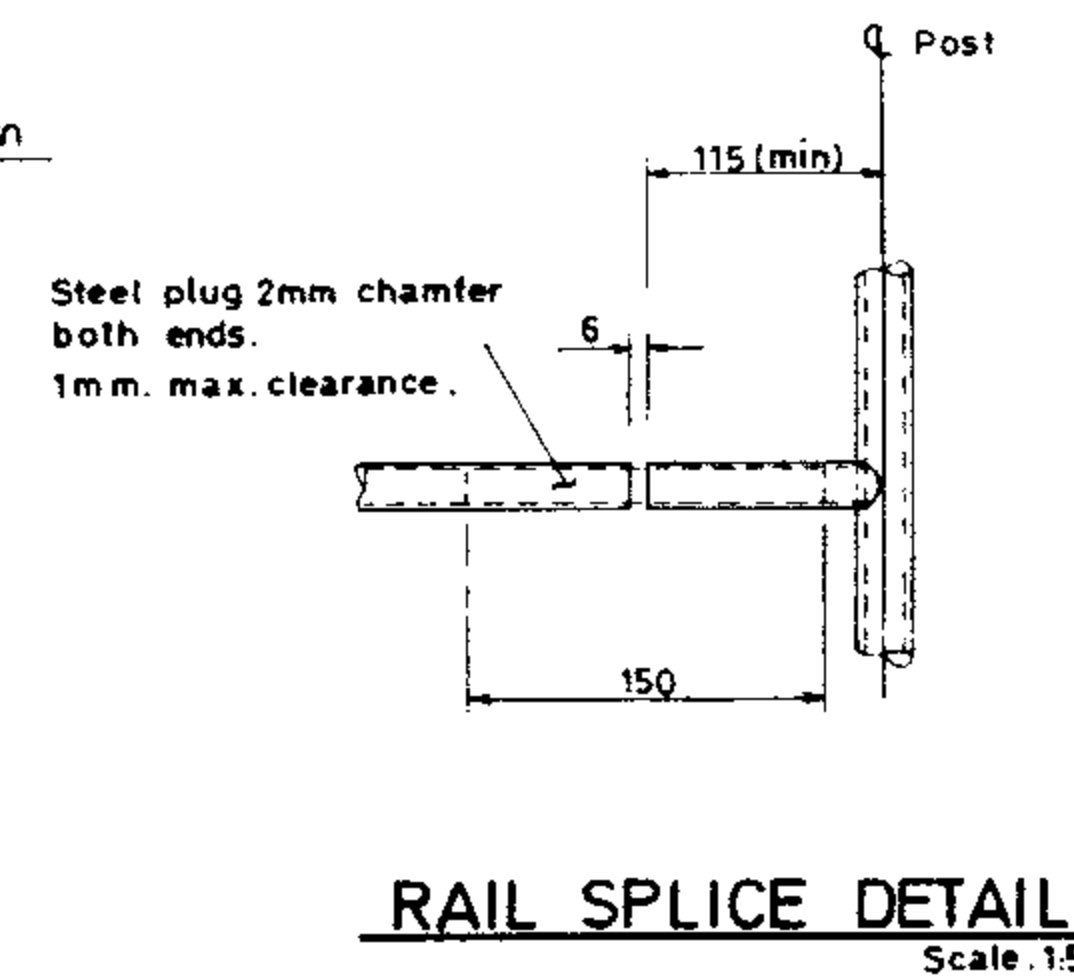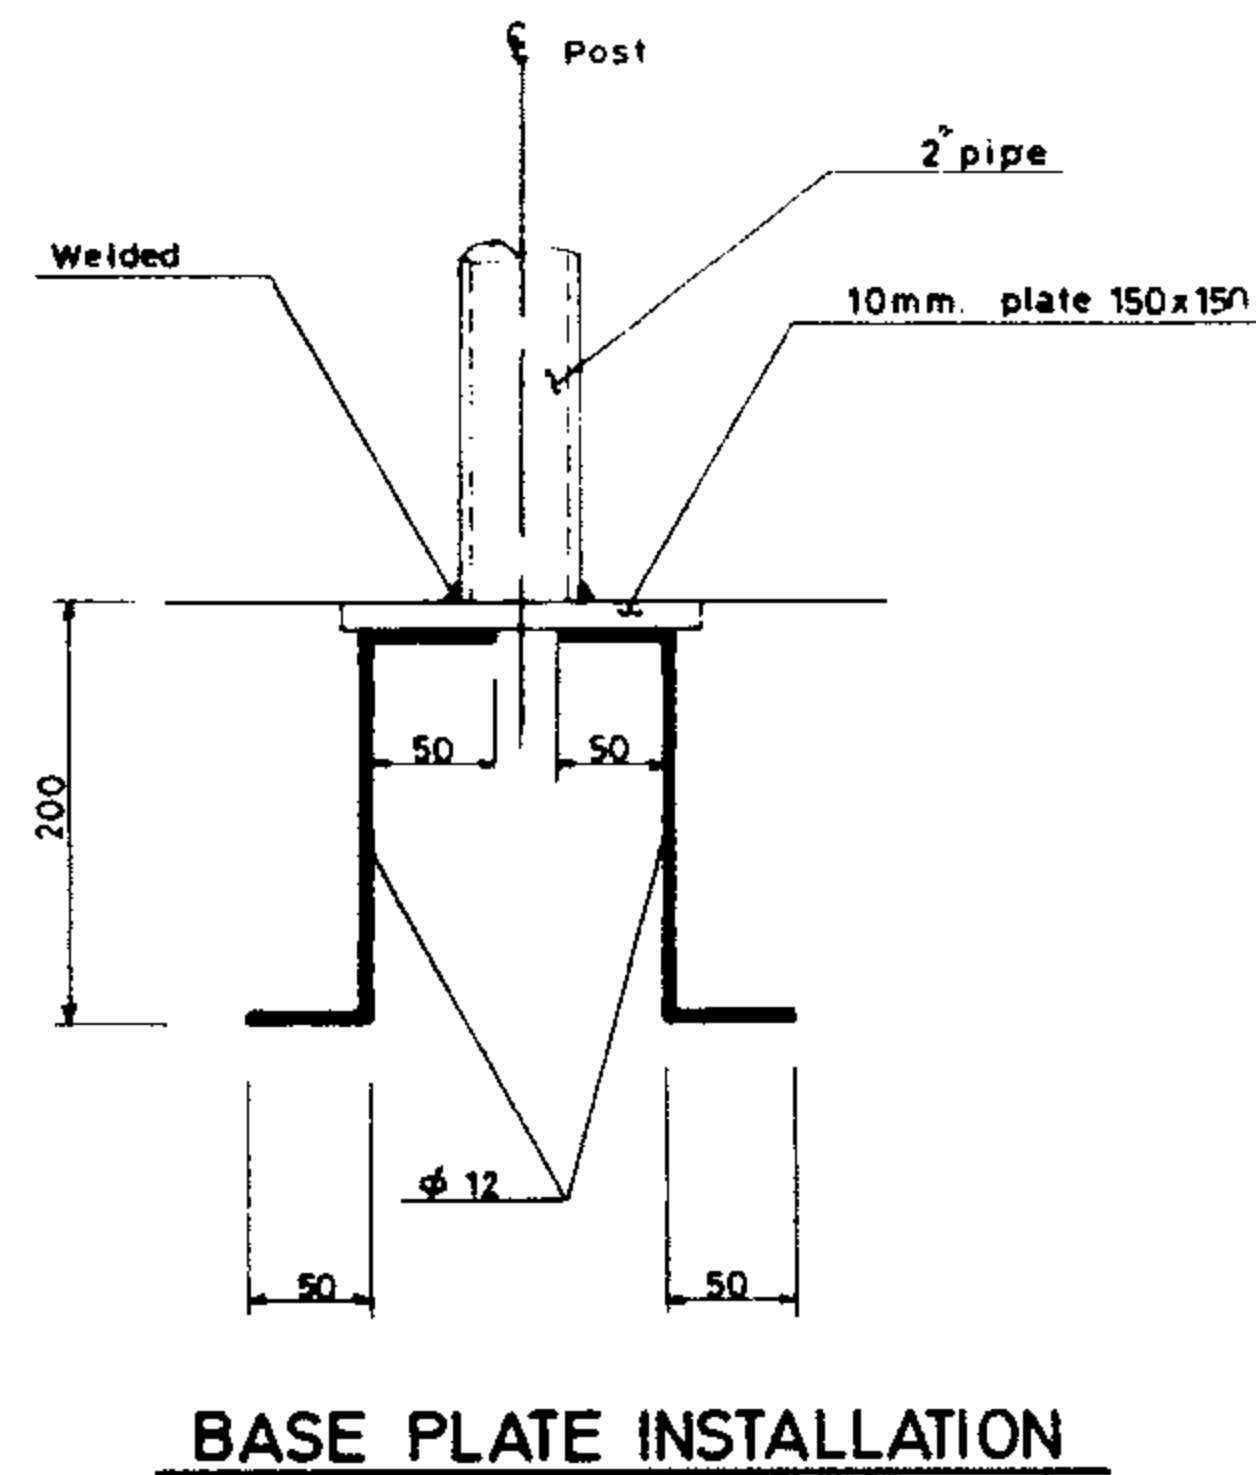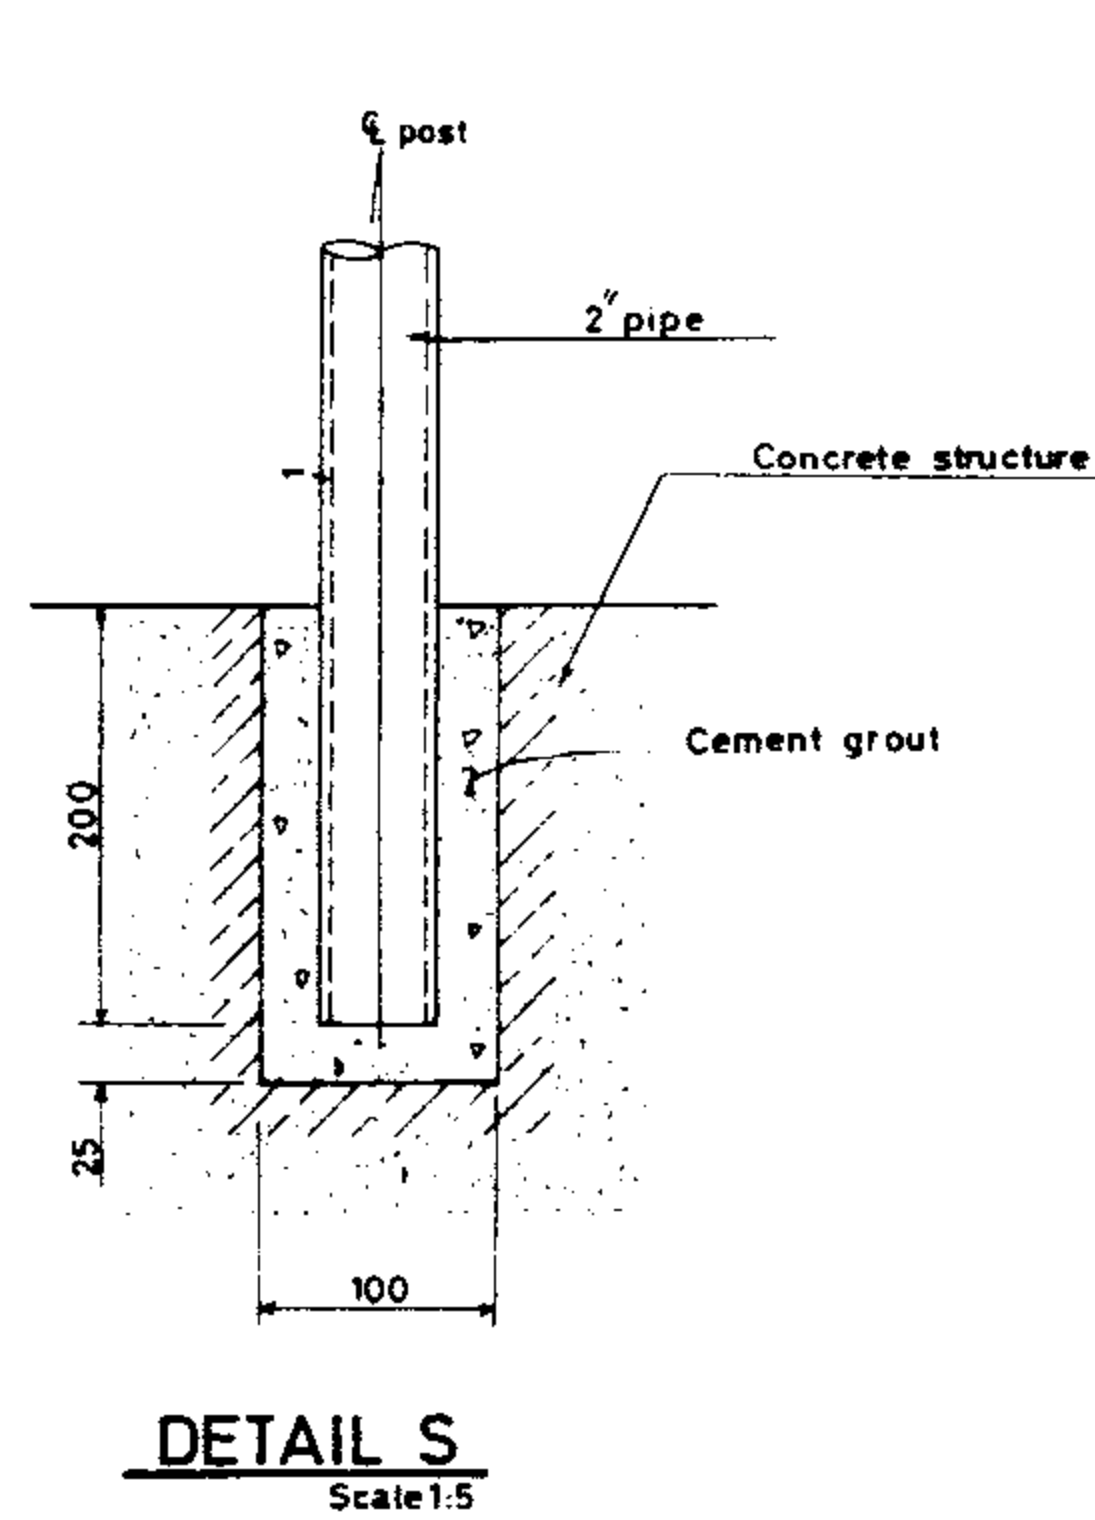

NOTES:

- ① Where posts are embedded in concrete slabs less than 0.30 deep, maintain 0.025 clear from bottom of blockout to bottom of slab.
- ② Where posts are anchored in concrete walls post shall be placed at the centerline of post edge of structure or expansion joint shall be 0.15 meters.
- ③ All dimensions are in 'mm' except otherwise shown.

REFERENCE DWGS:

Scale: 1:20 1:10
1:5

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG. NO 18/2/1/01


PIPE HANDRAIL, GUARD POST
AND GUIDE POST

Approved:


Sheet NO 1 of 1

Rev. NO

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUD.
TECHNICAL RESEARCH AND
STANDARD BUREAU

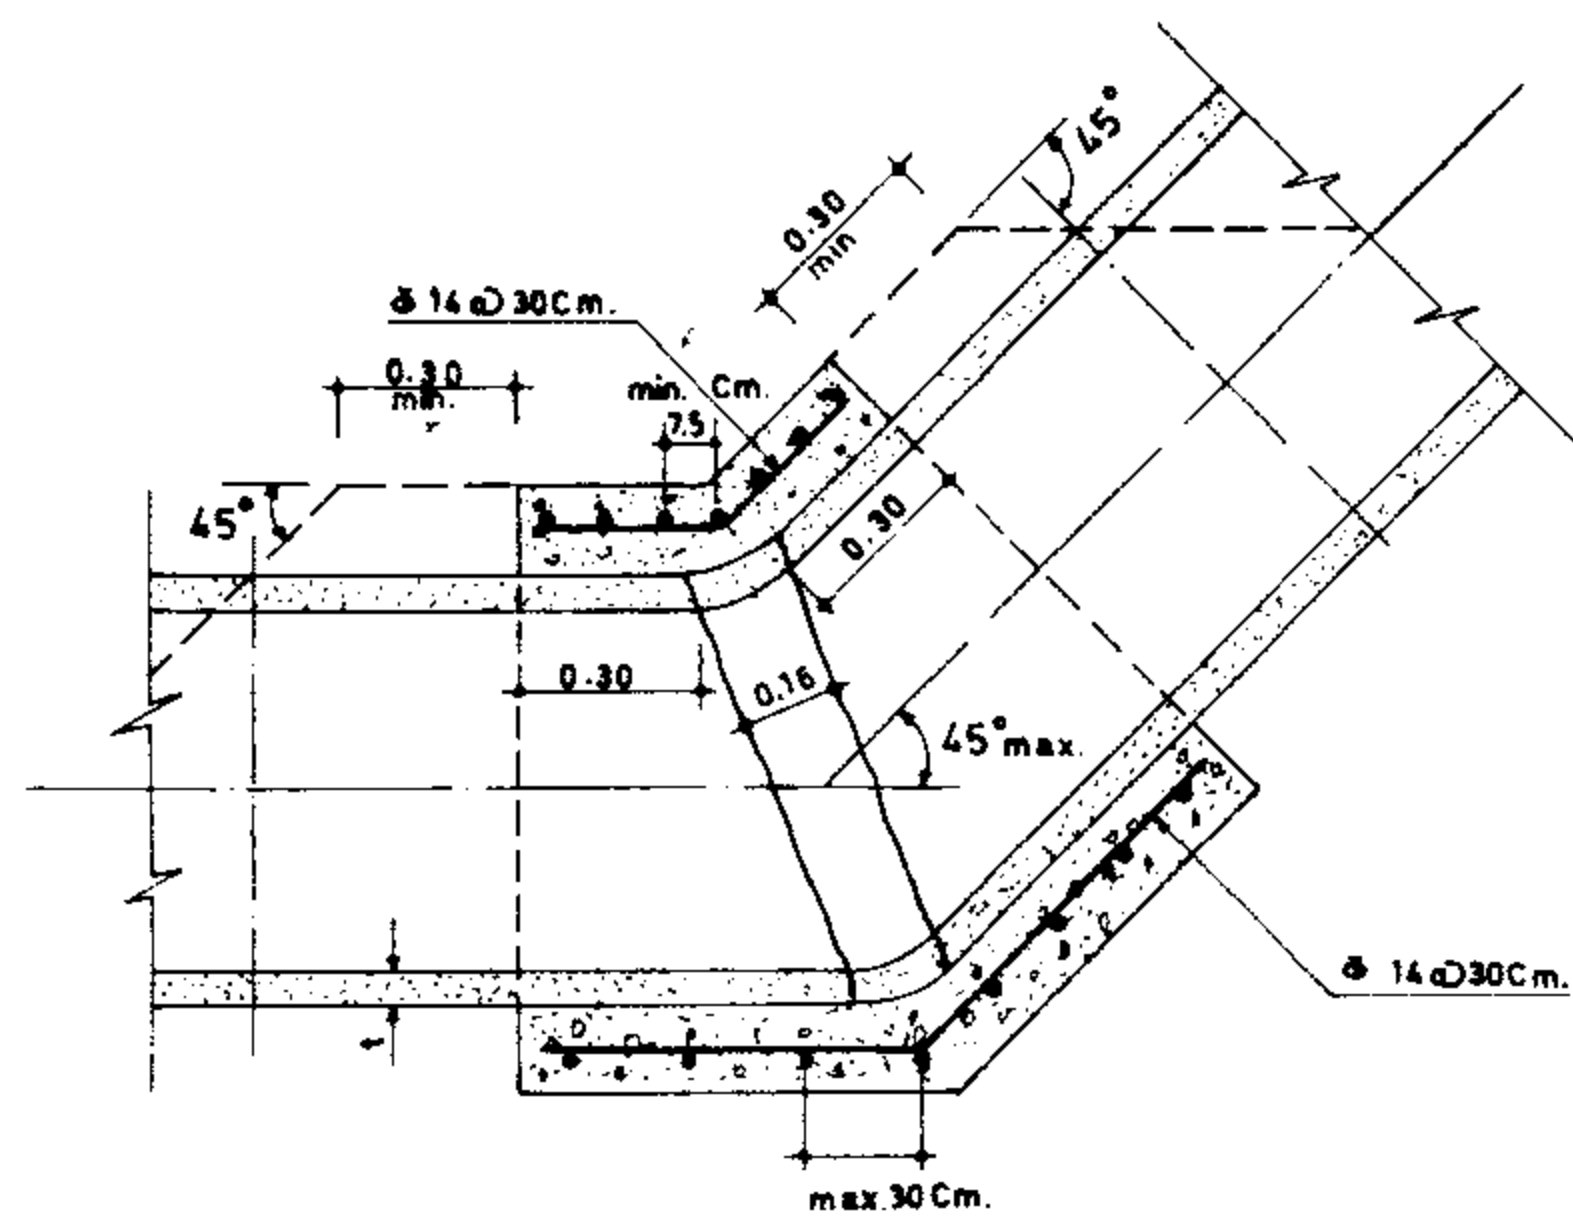


**BENDS FOR PRECAST
CONCRETE PRESSURE PIPE.** SC.1:20

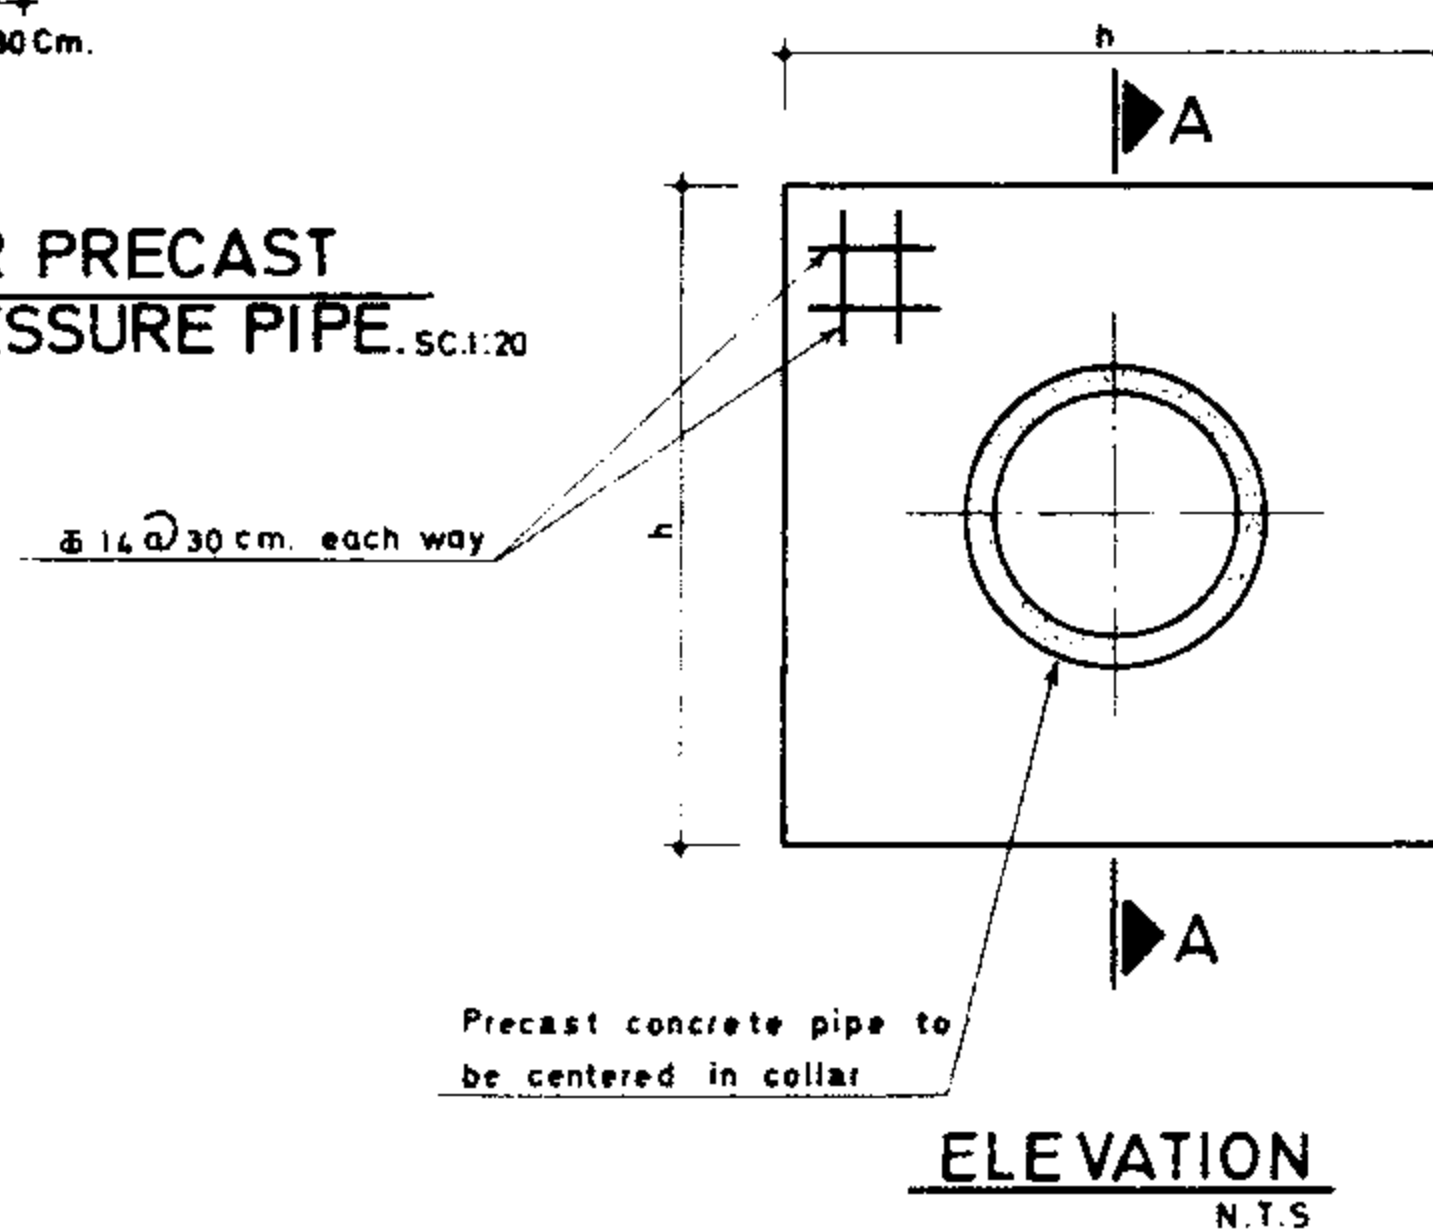


ELEVATION
N.T.S

DIMENSIONS AND
ESTIMATED QUANTITIES

Dia. m.	h	t _c	CONC. m ³	R/Bar kg.	FORM m ²
40	1.40	15			
50	1.60	15			
60	1.80	15			
70	2.00	15			
80	2.20	15			
90	2.40	20			
100	2.40	20			
110	2.60	20			
120	2.70	20			

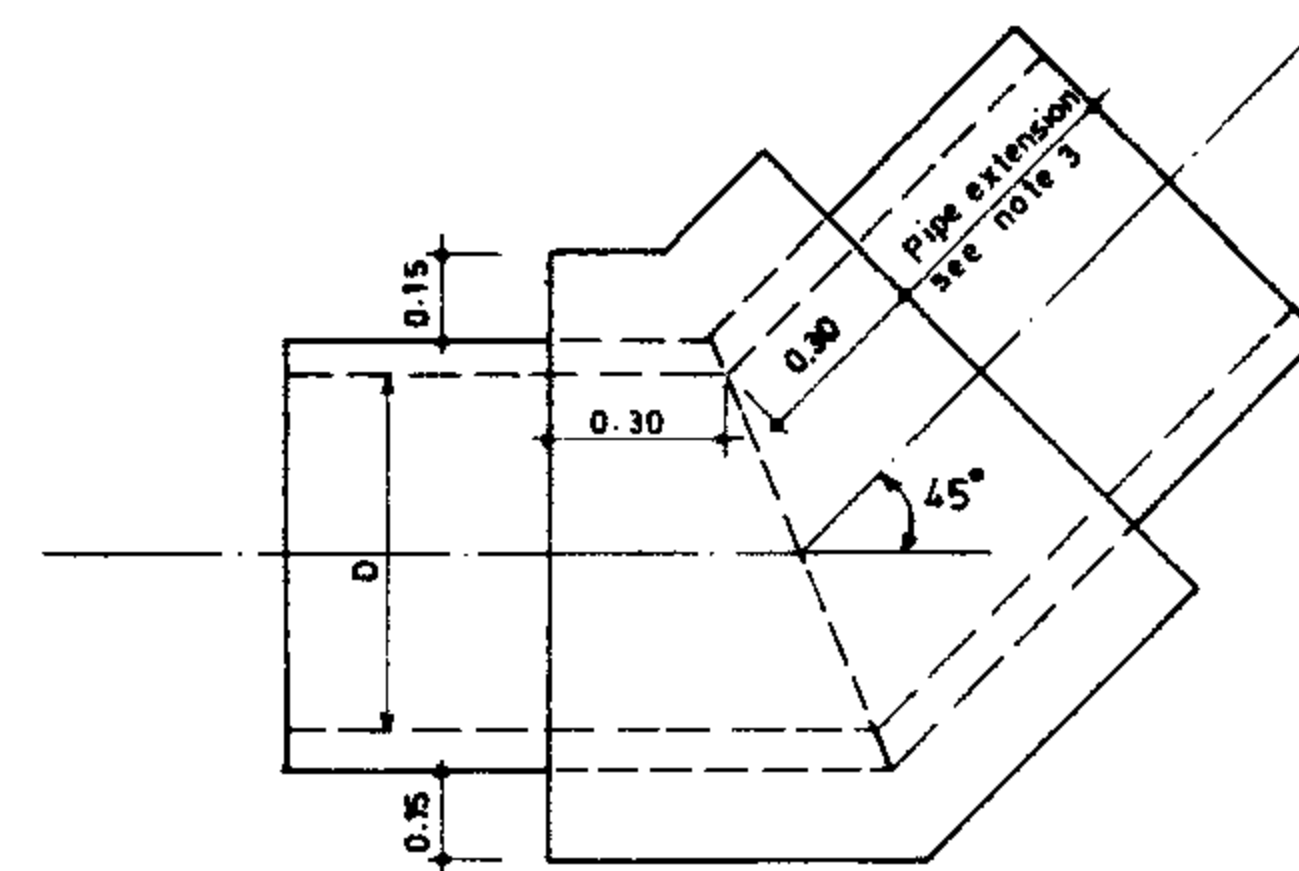


**ASBESTOS CEMENT
PIPE** SC.1:20

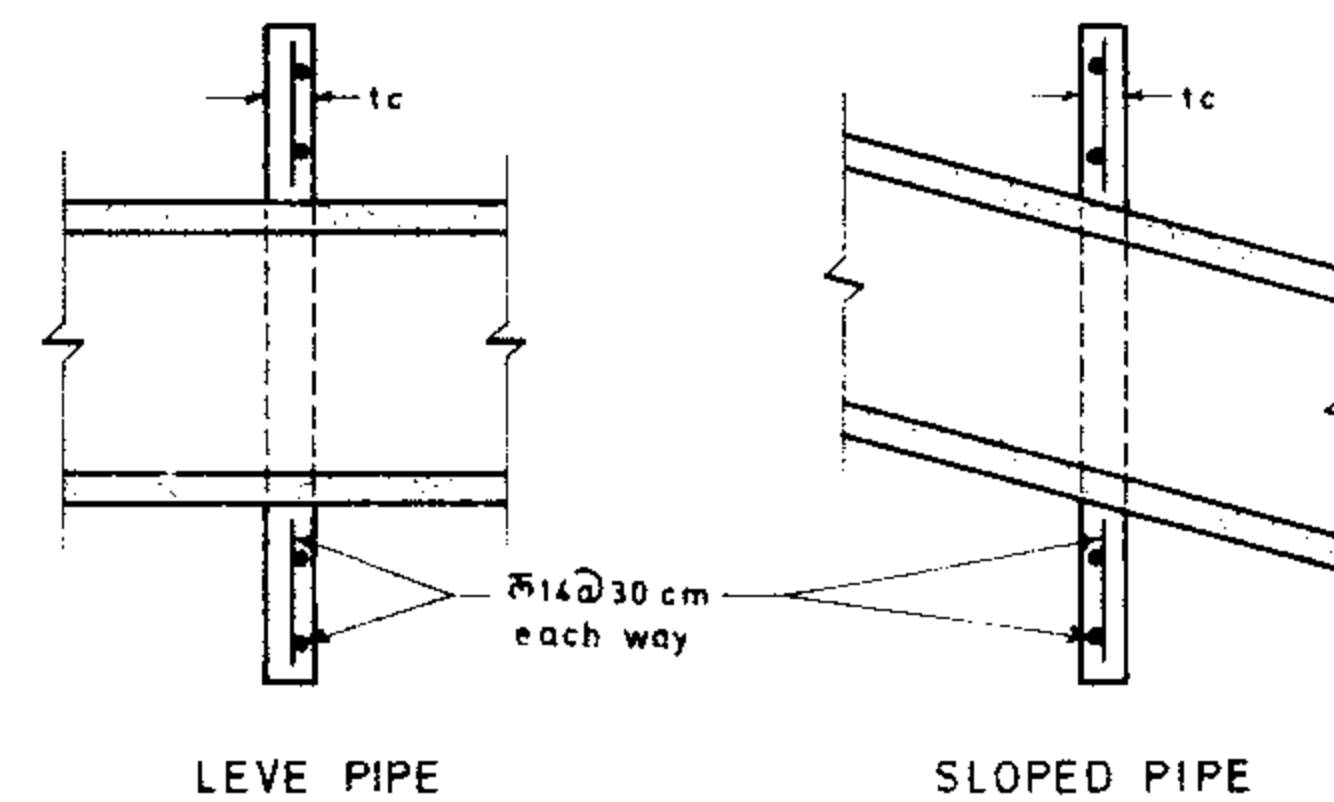


SECTION A-A
N.T.S

NOTES:

- 1- Compact backfill to top of encasement at all bends.
- 2- Elevation of compacted backfill for bended mitered pipe bends shall be the same as the elevation of compacted backfill specified for the adjacent pipe.
- 3- Pipe extension shall be 45cm max. when $D \leq 90$ cm and max. $\frac{1}{2}D$ when $D > 90$ cm. Min extension shall be 20 cm.

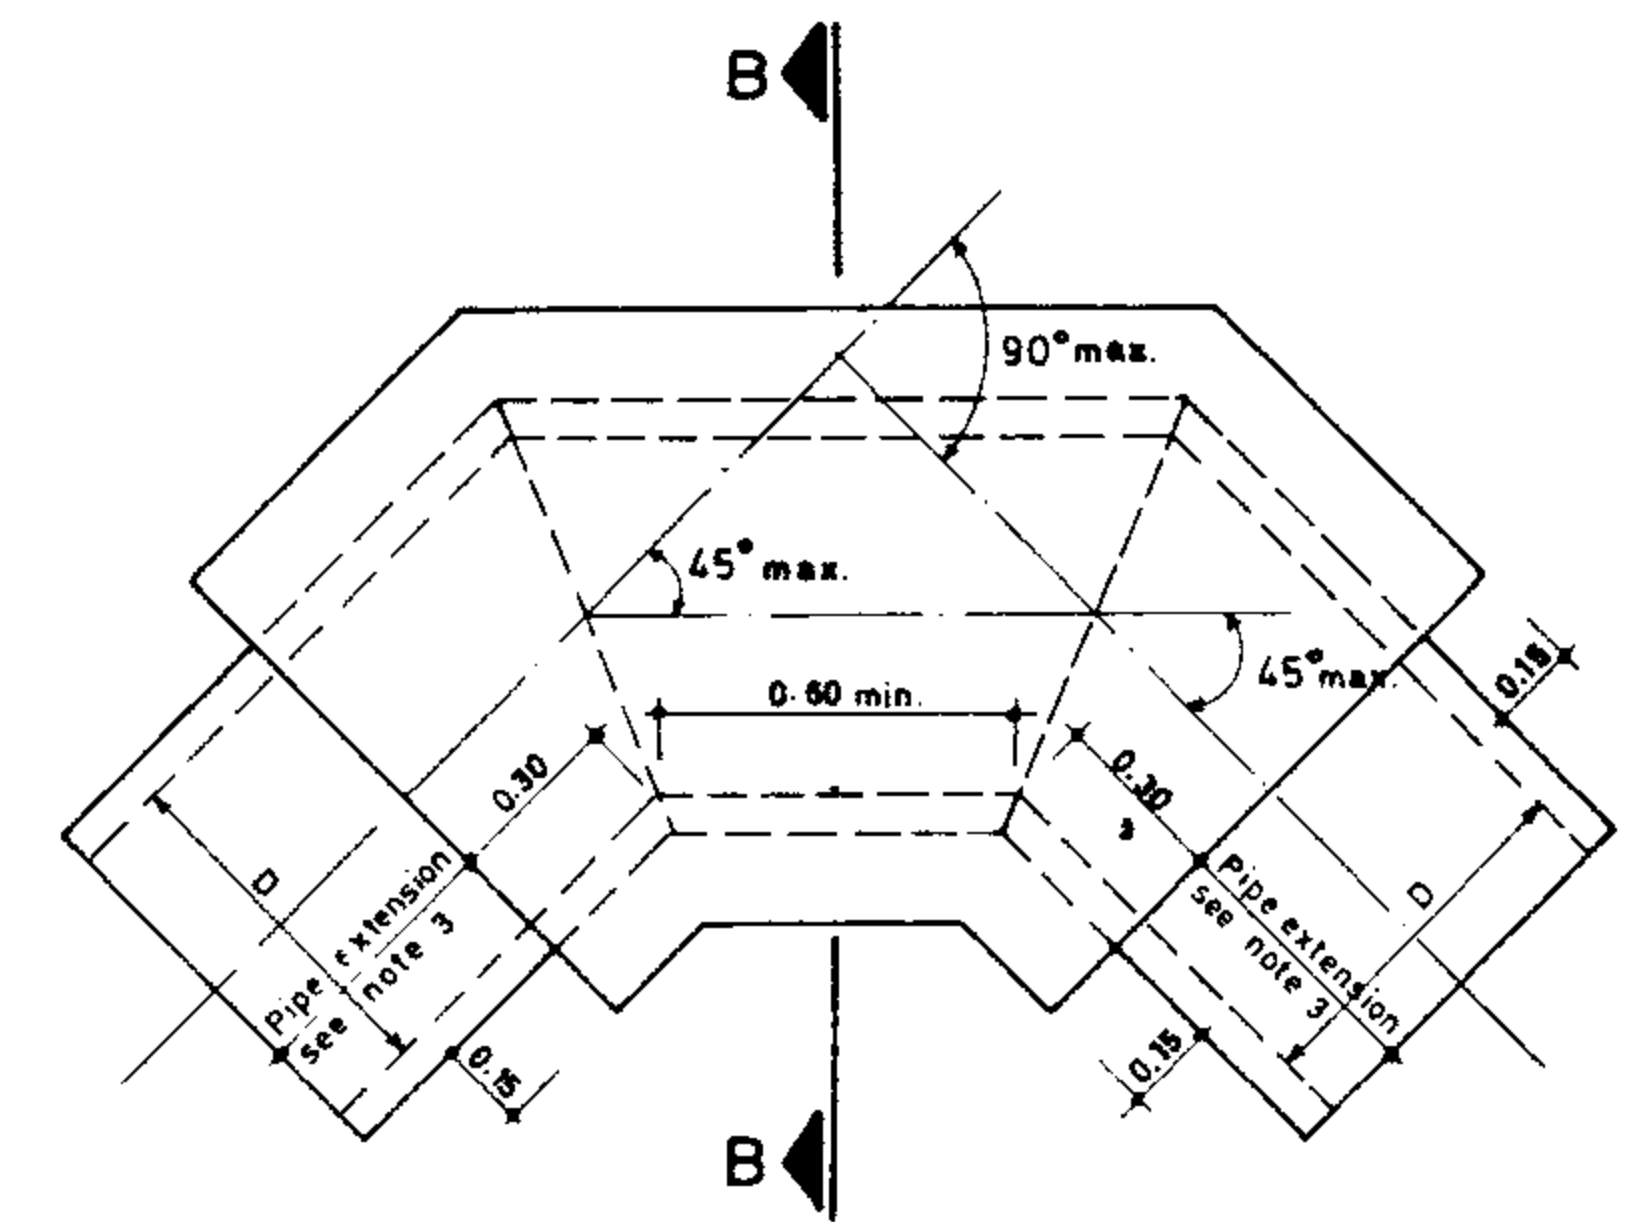

BENDS FOR PRESSURE
SC.1:20

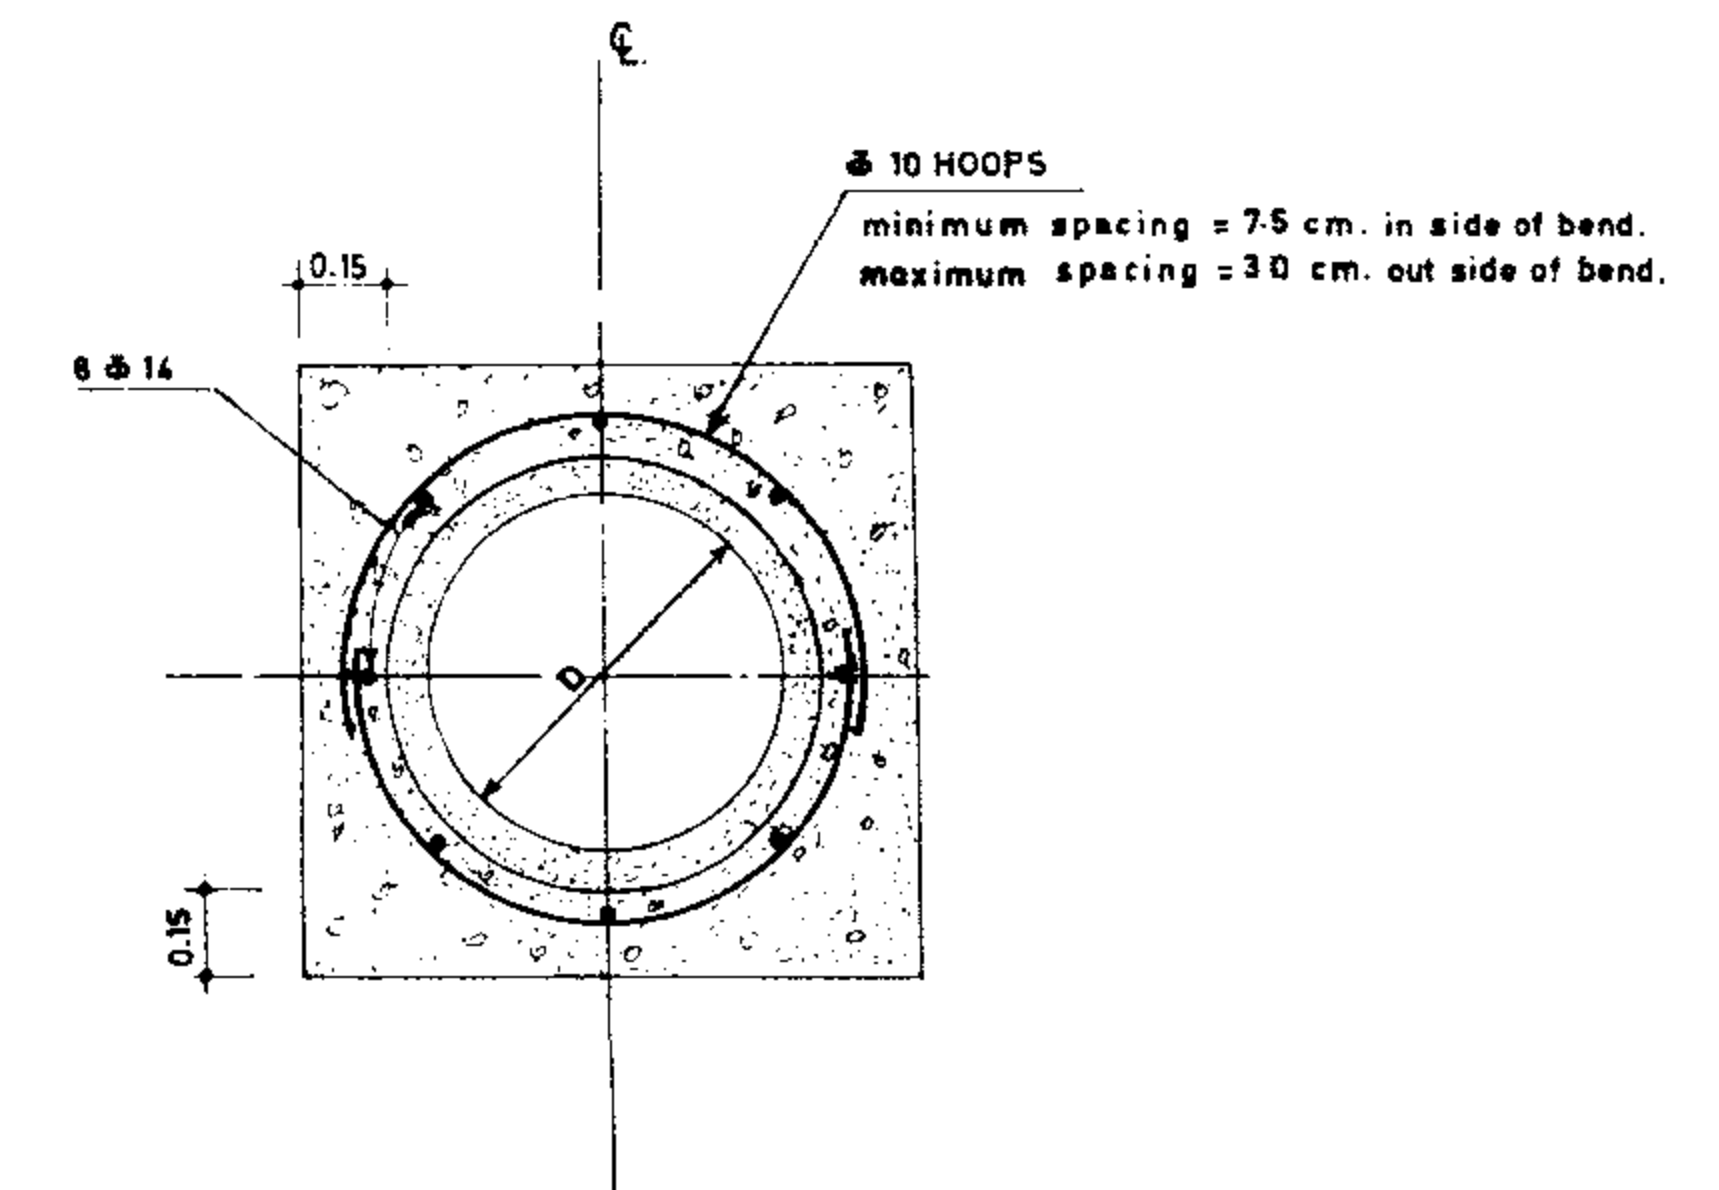

SECTION B-B
SC.1:20

REFERENCE DWGS: For general notes see dwgs No 20/2/1/01 TO 20/2/1/03

Scale: 1:20

IRRIGATION & DRAINAGE STANDARDS

Date:


DWG No 17/3/1/01

Approved:

Sheet No: 1 of 1 Rev. No:


**BEND AND COLLAR FOR
PRECAST CONCRETE
PRESSURE PIPE**

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

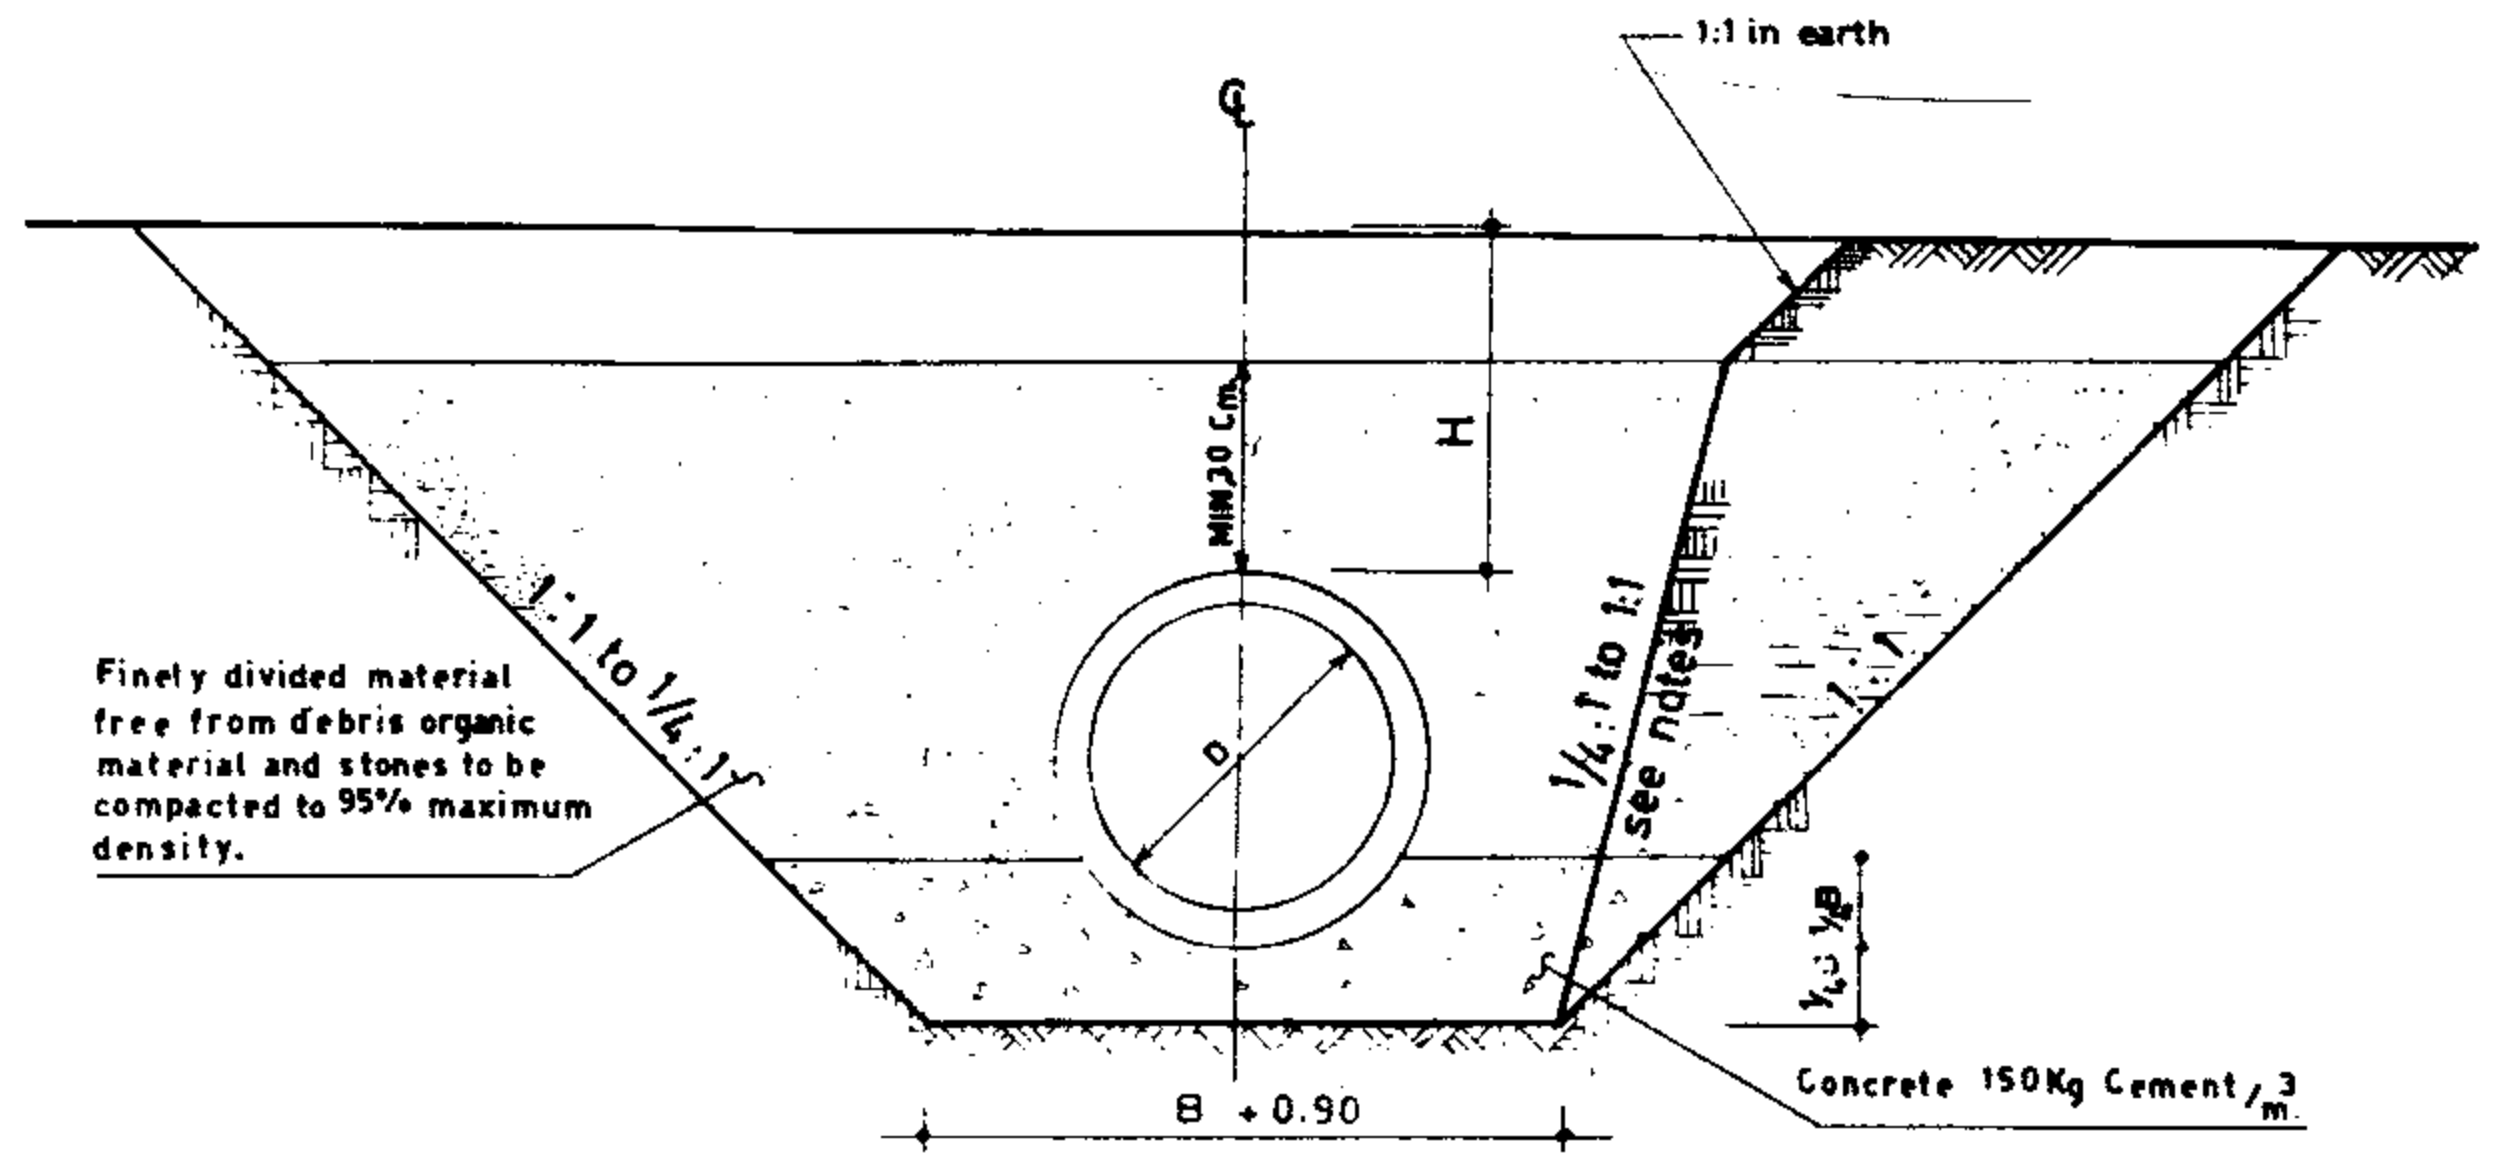

CONCRETE PIPE PLACING TYPE I

$H \leq 3.00m.$ for pipe group I
 $H \leq 4.50m.$ for pipe group II
 $H \leq 6.00m.$ for pipe group III
 Minimum cover = 30 cm.

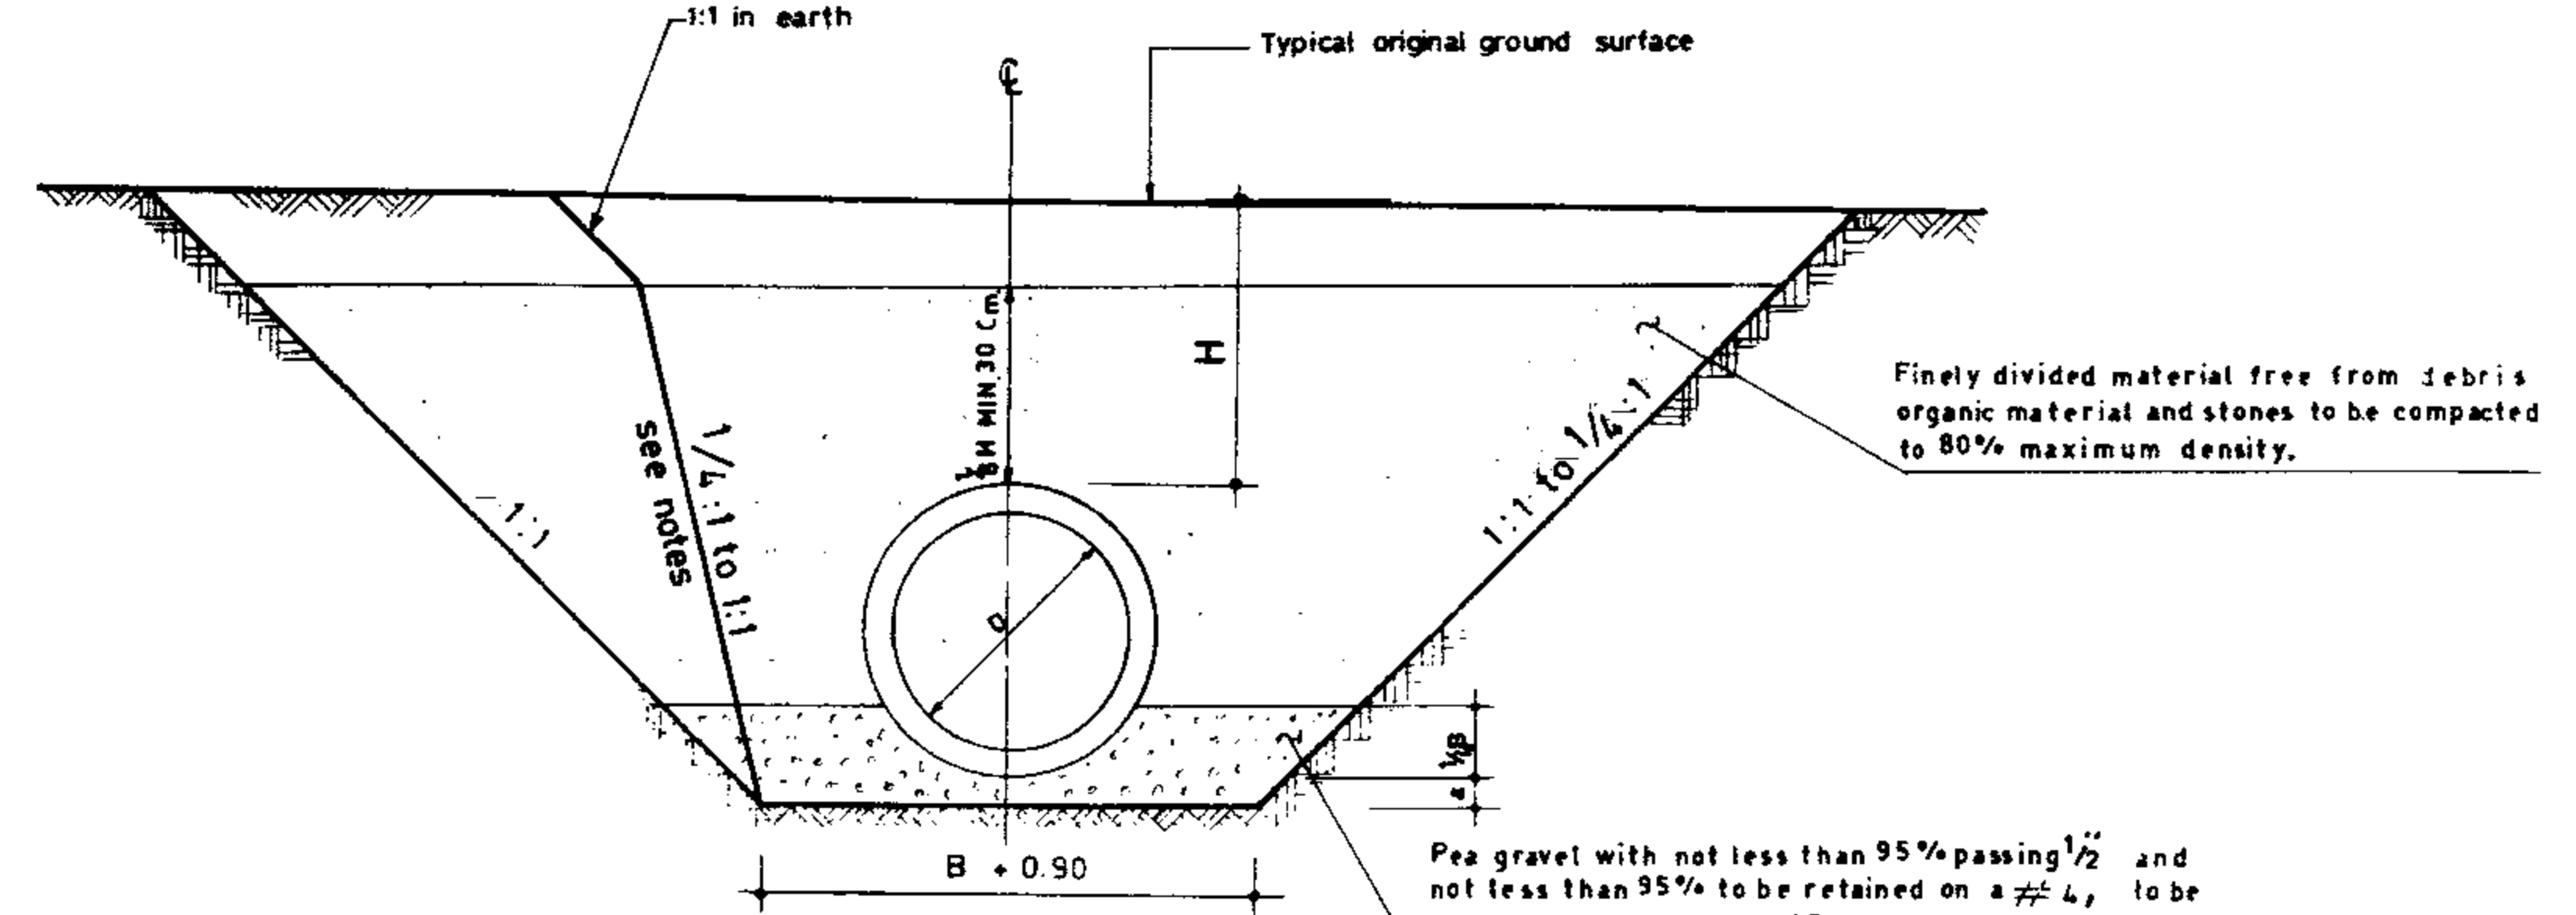


CONCRETE PIPE PLACING TYPE III

$H \leq 1.50$ for pipe group I
 $H \leq 3.00$ for pipe group III
 Minimum cover = 15 cm.


DEPTH OF BEDDING MATERIAL BELOW PIPE

D	a
60cm. and smaller	8 Cm.
70cm. to 140cm.	10 Cm.

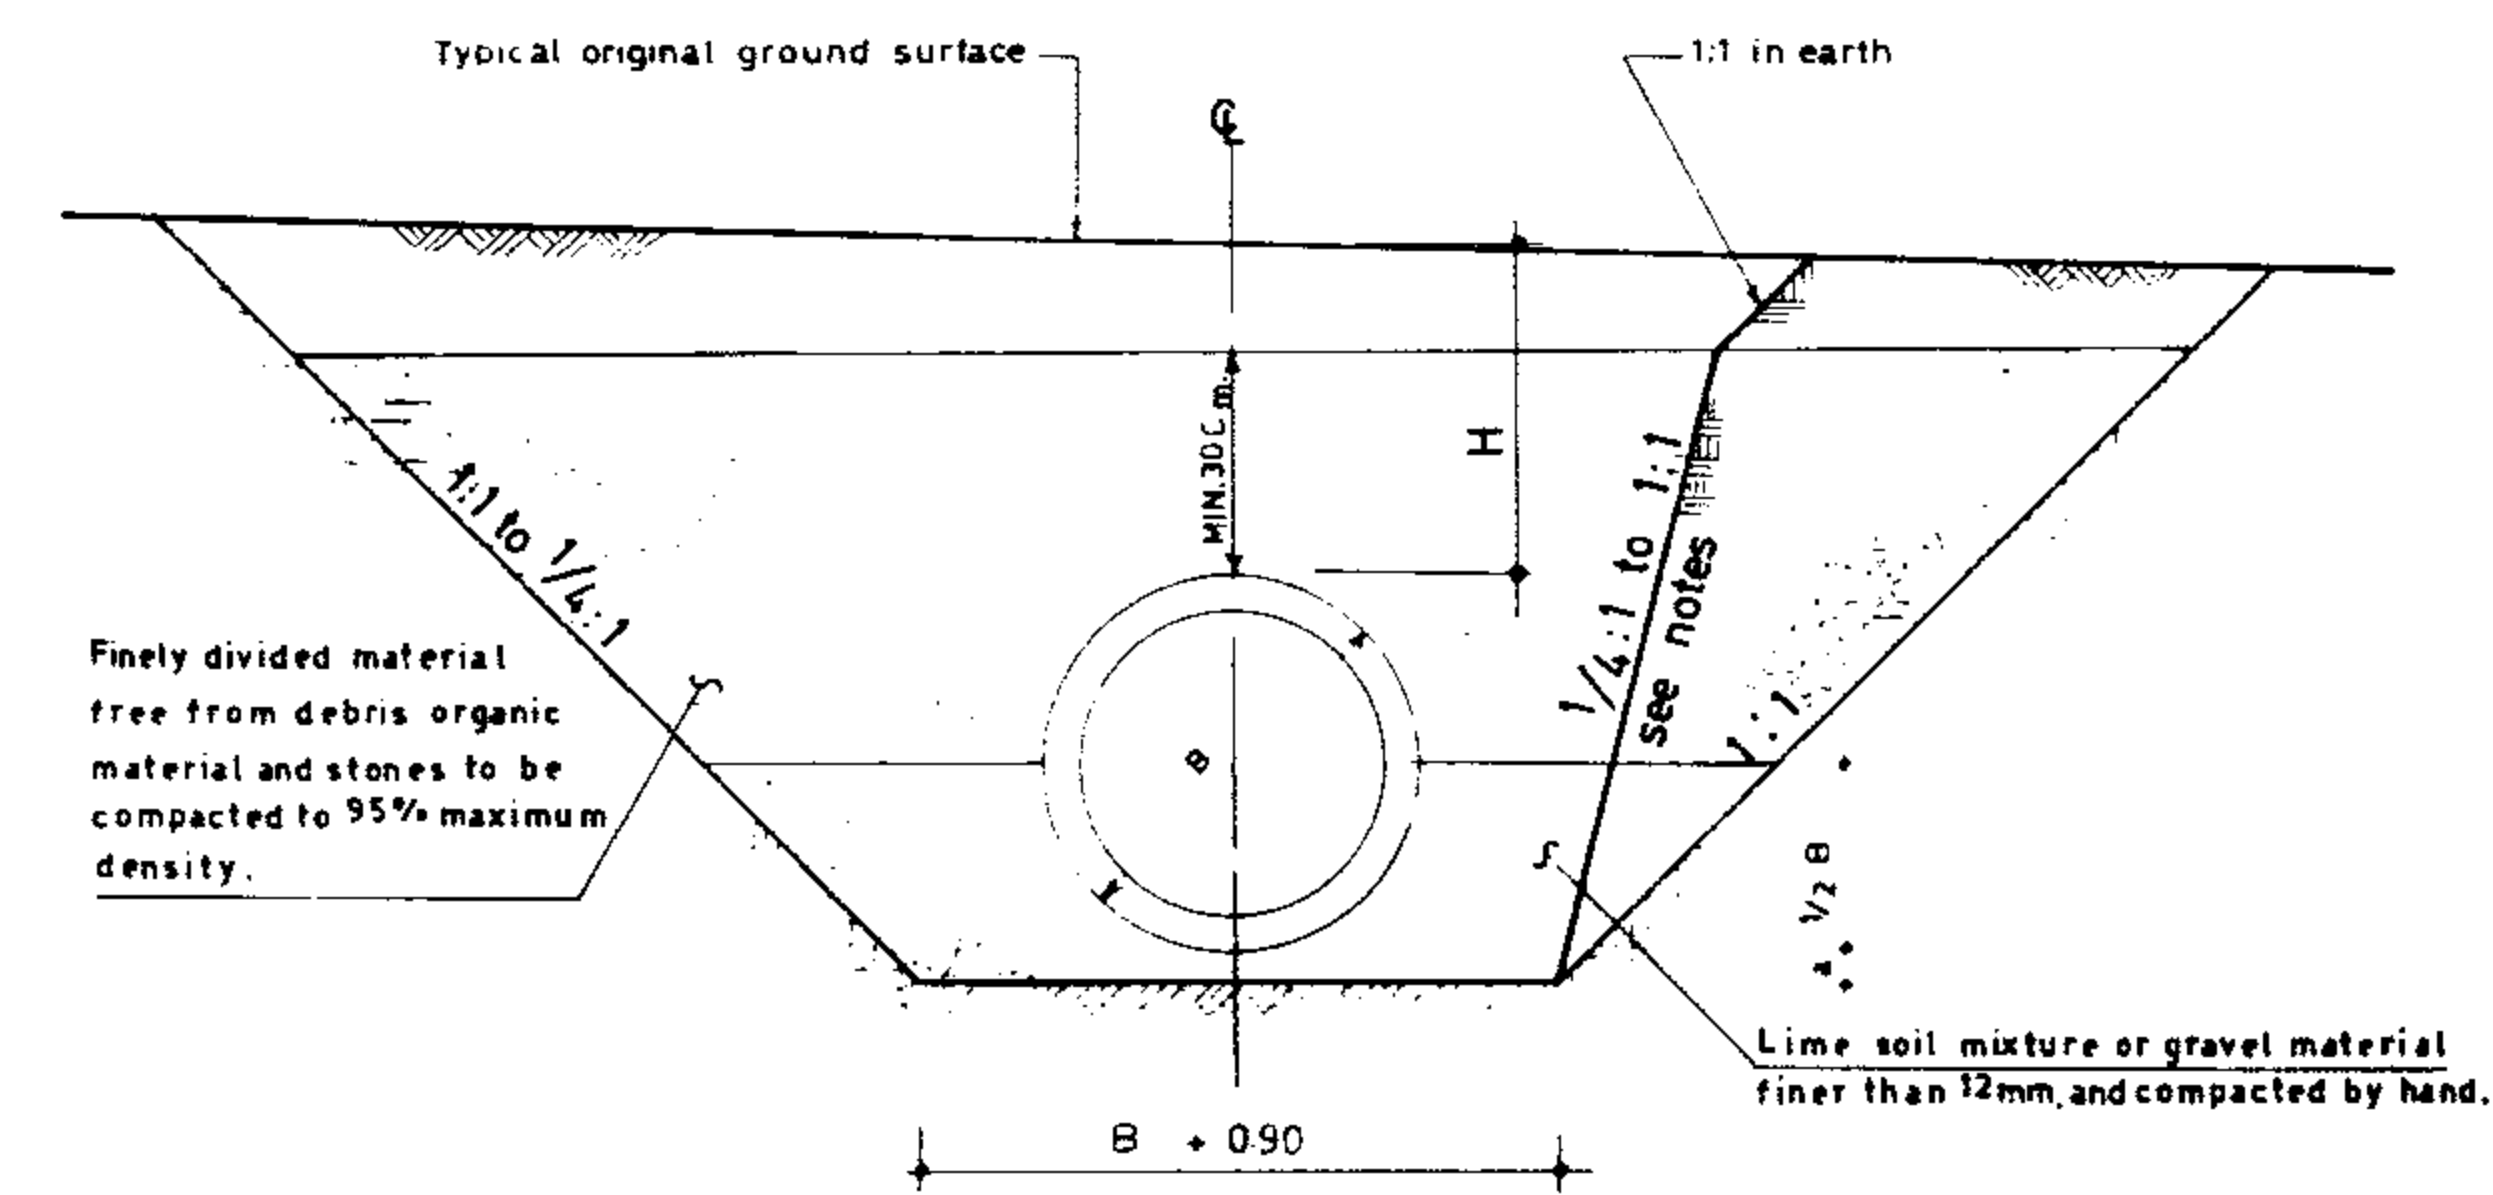

CONCRETE PIPE PLACING TYPE II

$H \leq 1.50m.$ for pipe group I
 $H \leq 3.00m.$ for pipe group II
 $H \leq 4.50m.$ for pipe group III
 Minimum cover = 30 cm.

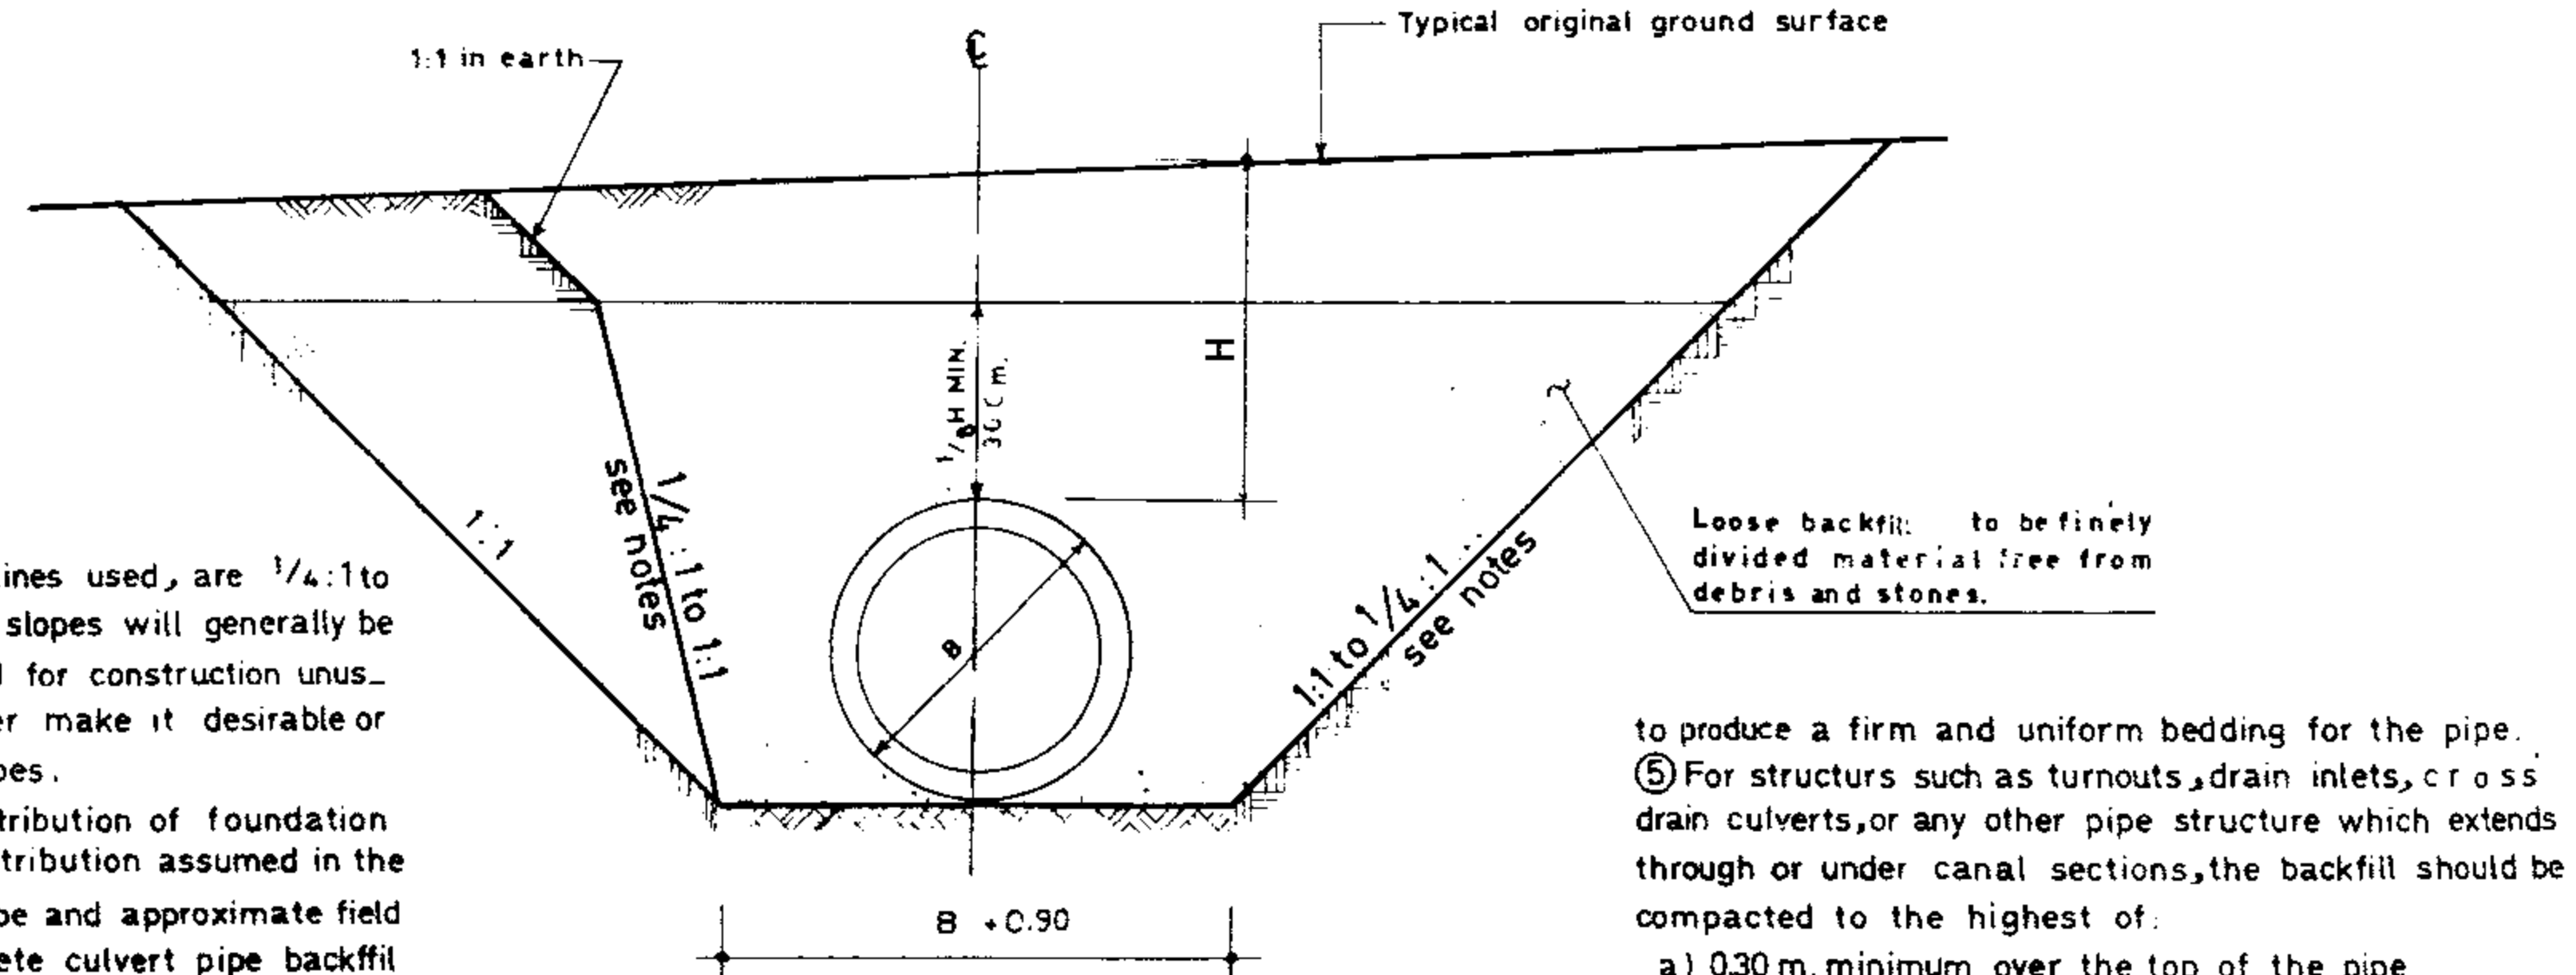

CONCRETE PIPE PLACING TYPE IV

$H \leq 1.50$ for pipe group I
 $H \leq 3.00$ for pipe group III
 Minimum cover = 15 cm.

NOTES:




- Side slope excavation pay lines used, are 1/4:1 to 1:1. These temporary excavation slopes will generally be stable during the time required for construction unless unusual soil conditions may, however make it desirable or necessary to use flatter slopes.
- To be assured that the distribution of foundation pressures approximates the distribution assumed in the design of concrete pressure pipe and approximate field strength requirements of concrete culvert pipe backfill should be compacted to a vertical distance, as shown on this dwg.
- In rock or other unsuitable foundation material the trench should be overexcavated to provide a compacted cushion of selected material to furnish a uniform bedding for the pipe.
- For pipe which is to be placed within canal or roadway embankment, it is commonly required that the embankment material be placed to an elevation approximately one-fourth the diameter of the pipe above the prescribed pipe invert and then excavated carefully

- to produce a firm and uniform bedding for the pipe.
- For structures such as turnouts, drain inlets, or cross drain culverts, or any other pipe structure which extends through or under canal sections, the backfill should be compacted to the highest of:
 - 0.30 m. minimum over the top of the pipe
 - Original ground surface, or
 - to top of compacted embankment if canal embankment has been compacted prior to construction of the pipe structure.
- For rock or other incompressible materials, the trench should be overexcavated a min of 15cm. and refilled with granular material.
- "D" and "B" are internal and external diameters respectively.
- "H" is the total fill on top of the pipe.
- Type of pipe group as shown on dwg. 17/2/1/02 to 17/2/1/04 shall be determined after "H" is determined.

REFERENCE DWGS: For general see dwgs: 20/2/1/01 TO 20/2/1/03
 For pipe group I see dwgs: 17/2/1/02
 For pipe group II see dwgs: 17/2/1/03
 For pipe group III see dwgs: 17/2/1/04

Scale:	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. No 17/2/1/01	
Approved:	Sheet No 1 of 4	Rev. No
	CONCRETE PIPES PIPE PLACING & TRENCH EXCAVATION TYPE I TO TYPE IV	

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUD
 TECHNICAL RESEARCH AND
 STANDARDS BUREAU

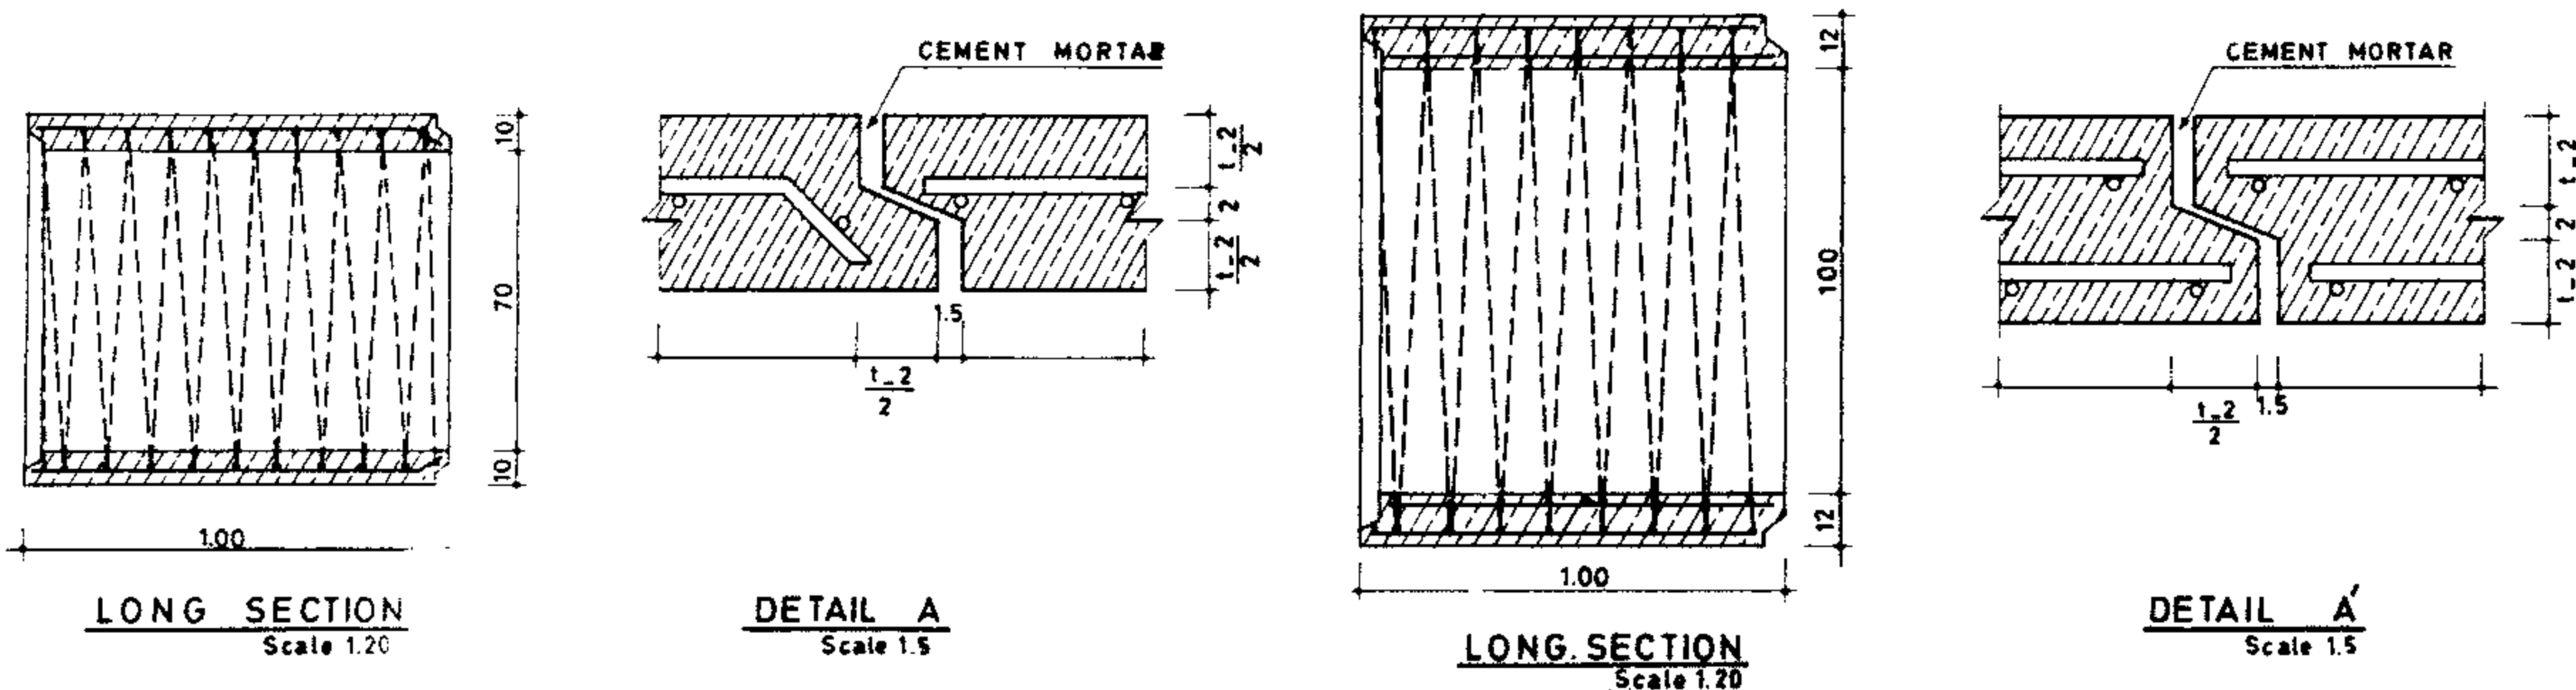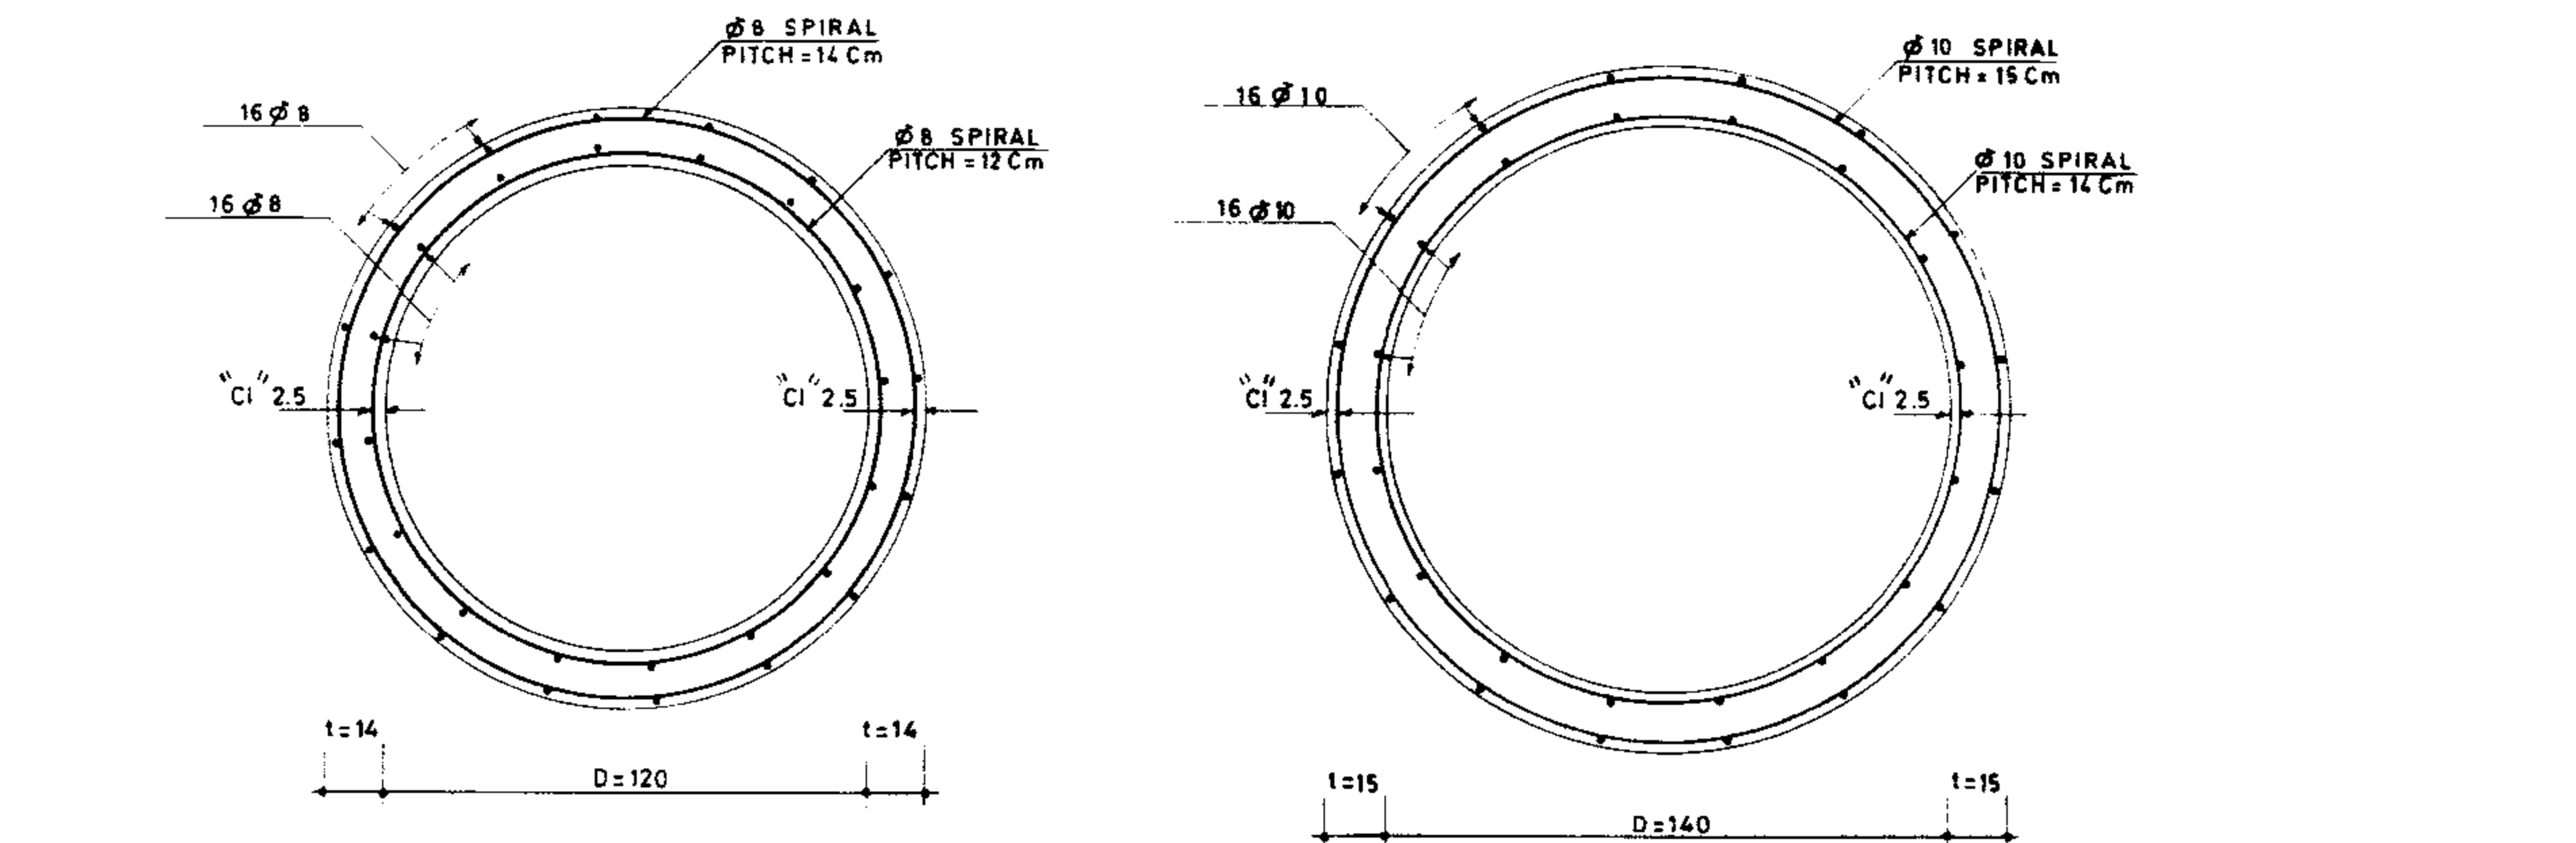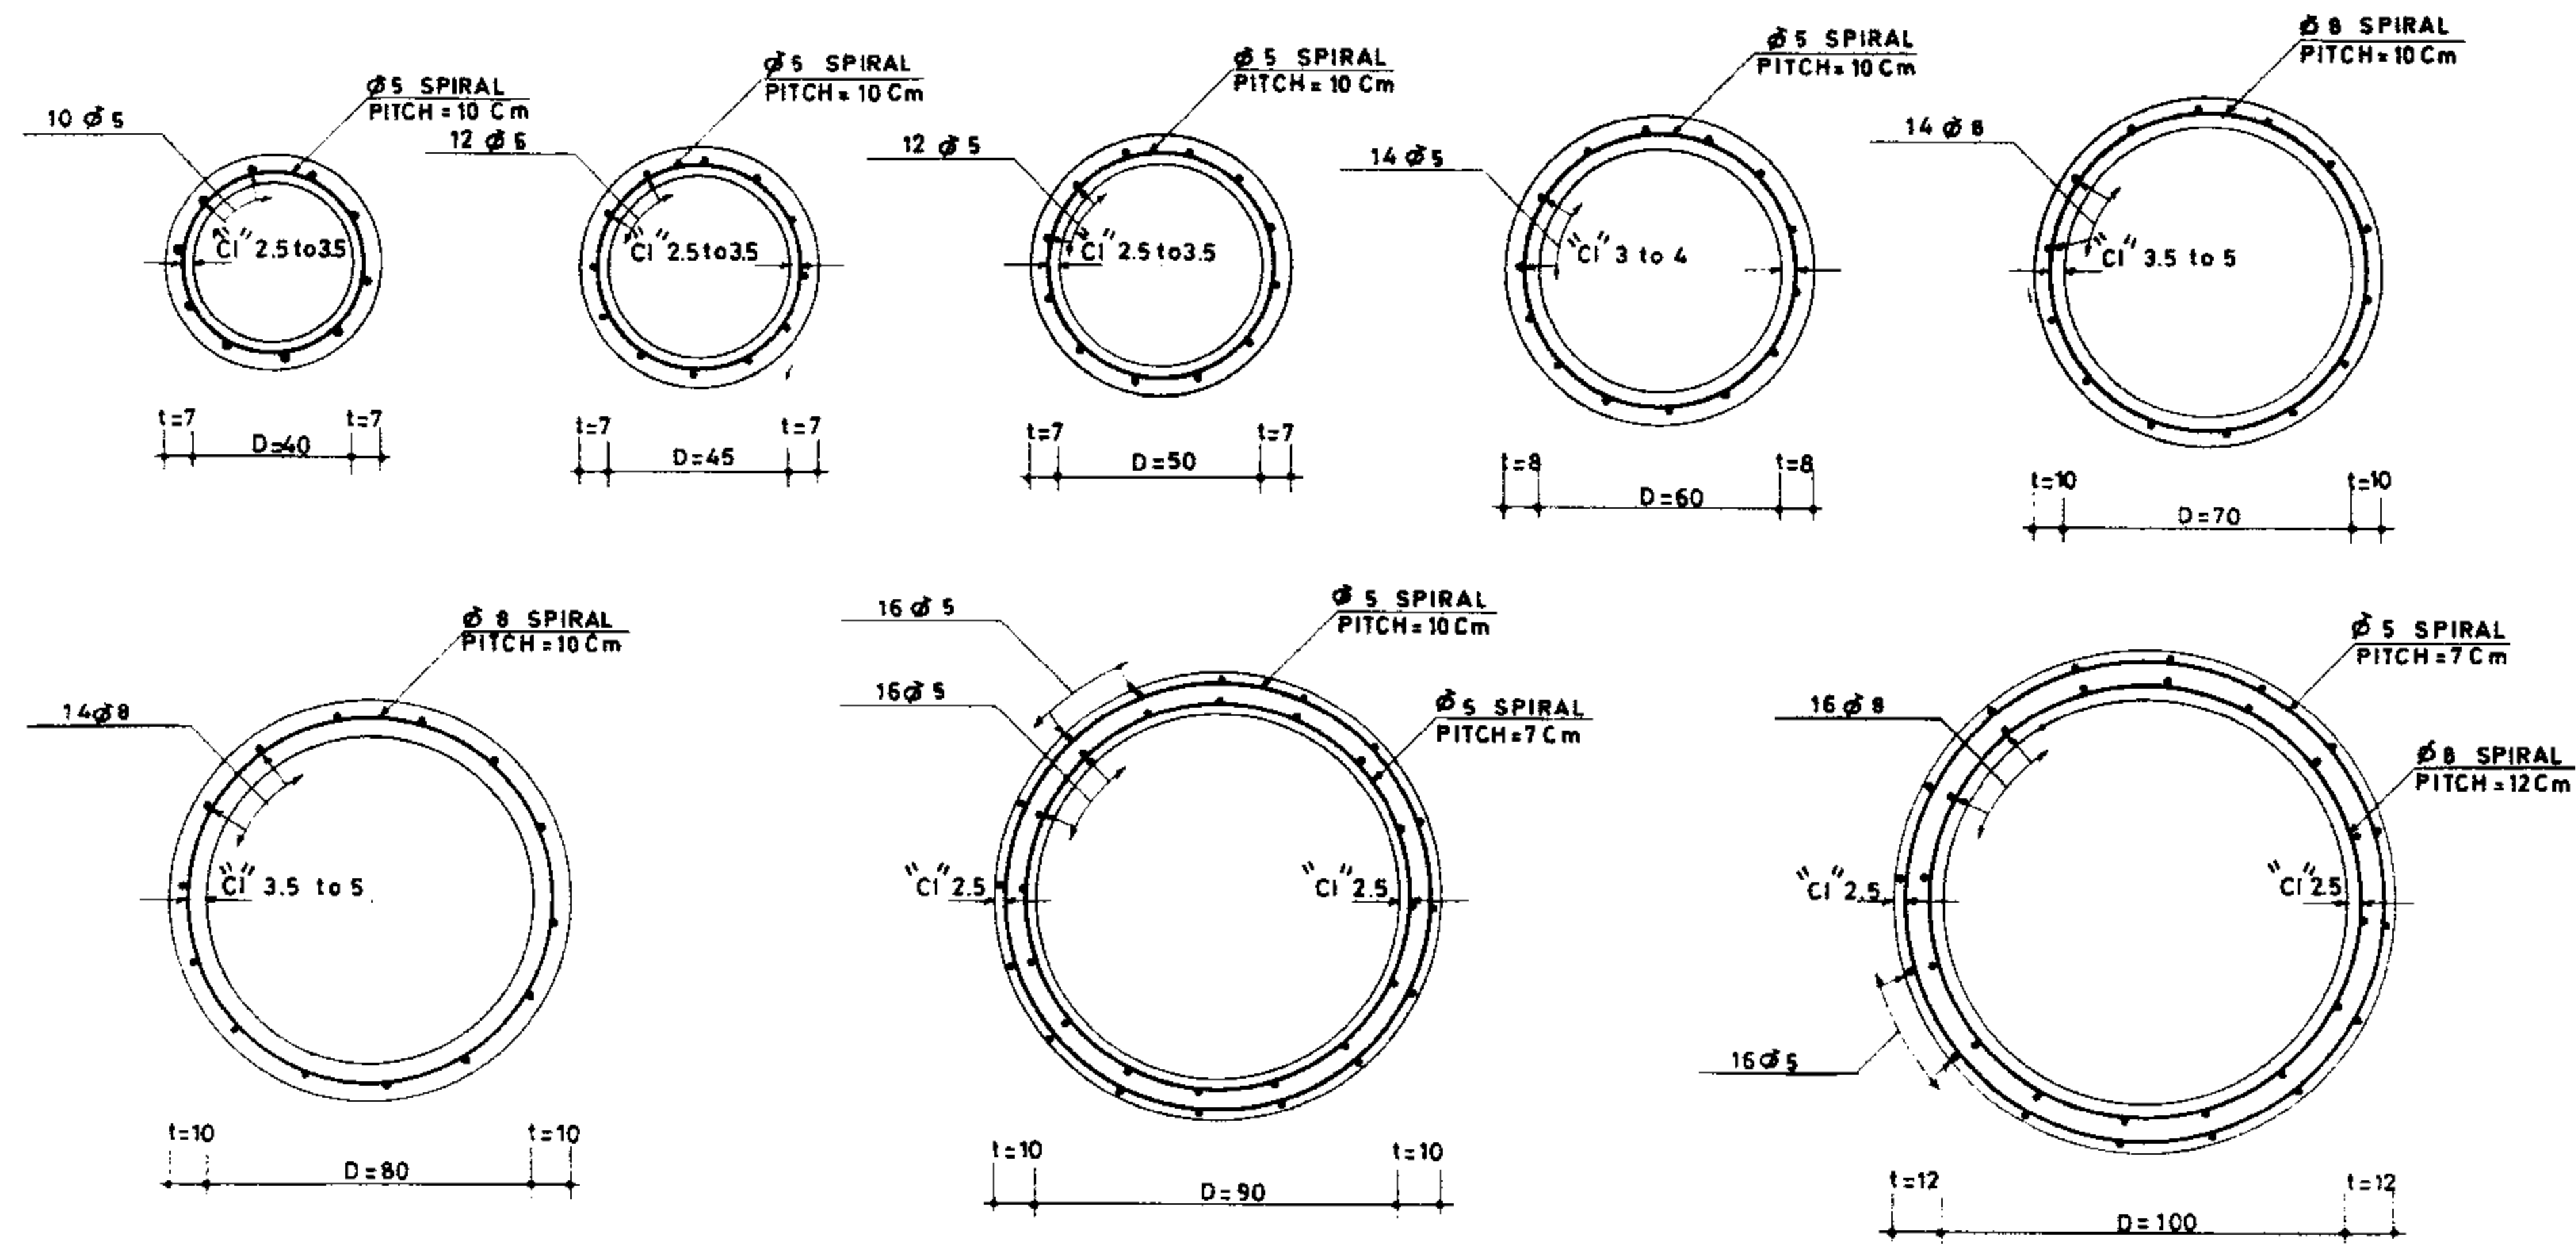

SINGLE LAYER REINFORCEMENT

Dia.	Pos.	φ	Shape	N ^o .	Unit length	Total length	Unit weight	Total weight	Conc. m ³	Form-work m ²
Dia=40	1	5	0.96	10	0.96	9.60	0.154	1.48	0.1034	3.06
	2	5	0.10	1	14.79	14.79	0.154	2.28		
Dia=45	1	5	0.96	12	0.96	11.52	0.154	1.77	0.1144	3.38
	2	5	0.10	1	16.27	16.27	0.154	2.51		
Dia=50	1	5	0.96	12	0.96	11.52	0.154	1.77	0.1253	3.71
	2	5	0.10	1	17.75	17.75	0.154	2.73		
Dia=60	1	5	0.96	14	0.96	13.44	0.154	2.07	0.1709	4.44
	2	5	0.10	1	21.03	21.03	0.154	3.24		
Dia=70	1	8	0.96	14	0.96	13.44	0.395	5.31	0.2513	5.28
	2	8	0.10	1	24.91	24.91	0.395	9.84		
Dia=80	1	8	0.96	14	0.96	13.44	0.395	5.31	0.2827	5.94
	2	8	0.10	1	27.91	27.91	0.395	11.02		

DOUBLE LAYERS REINFORCEMENT

Dia.	Pos.	φ	Shape	N ^o .	Unit length	Total length	Unit weight	Total weight	Conc. m ³	Form-work m ²
Dia=90	1	5	0.91	16	0.91	14.56	0.154	2.24	0.3142	6.60
	2	5	0.91	16	0.91	14.56	0.154	2.24		
	3	5	0.10	1	29.87	29.87	0.154	4.60		
	4	5	0.07	1	39.31	39.31	0.154	6.05		
Dia=100	1	5	0.91	16	0.91	14.56	0.154	2.24	0.4222	7.46
	2	8	0.91	16	0.91	14.56	0.395	5.75		
	3	5	0.07	1	47.93	47.93	0.154	7.38		
	4	8	0.12	1	25.65	25.65	0.395	10.13		
Dia=120	1	8	0.91	16	0.91	14.56	0.395	5.75	0.5894	9.01
	2	8	0.91	16	0.91	14.56	0.395	5.75		
	3	8	0.14	1	28.94	28.94	0.395	11.43		
	4	8	0.12	1	30.39	30.39	0.395	12.00		
Dia=140	1	10	0.91	16	0.91	14.56	0.617	8.98	0.7304	10.47
	2	10	0.91	16	0.91	14.56	0.617	8.98		
	3	10	0.15	1	31.20	31.20	0.617	19.25		
	4	10	0.14	1	30.15	30.15	0.617	18.60		

REFERENCE DWGS: For general notes see dwgs: N^o 20/2/1/01 TO 20/2/1/03

Scale: 1:5 - 1:20

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG. N^o. 17/2/1/02


Approved:

Sheet N^o. 2 of 4


Rev. N^o.

CONCRETE PIPES
REINFORCEMENT GROUP 1


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BU
TECHNICAL RESEARCH AND
STANDARD BUREAU

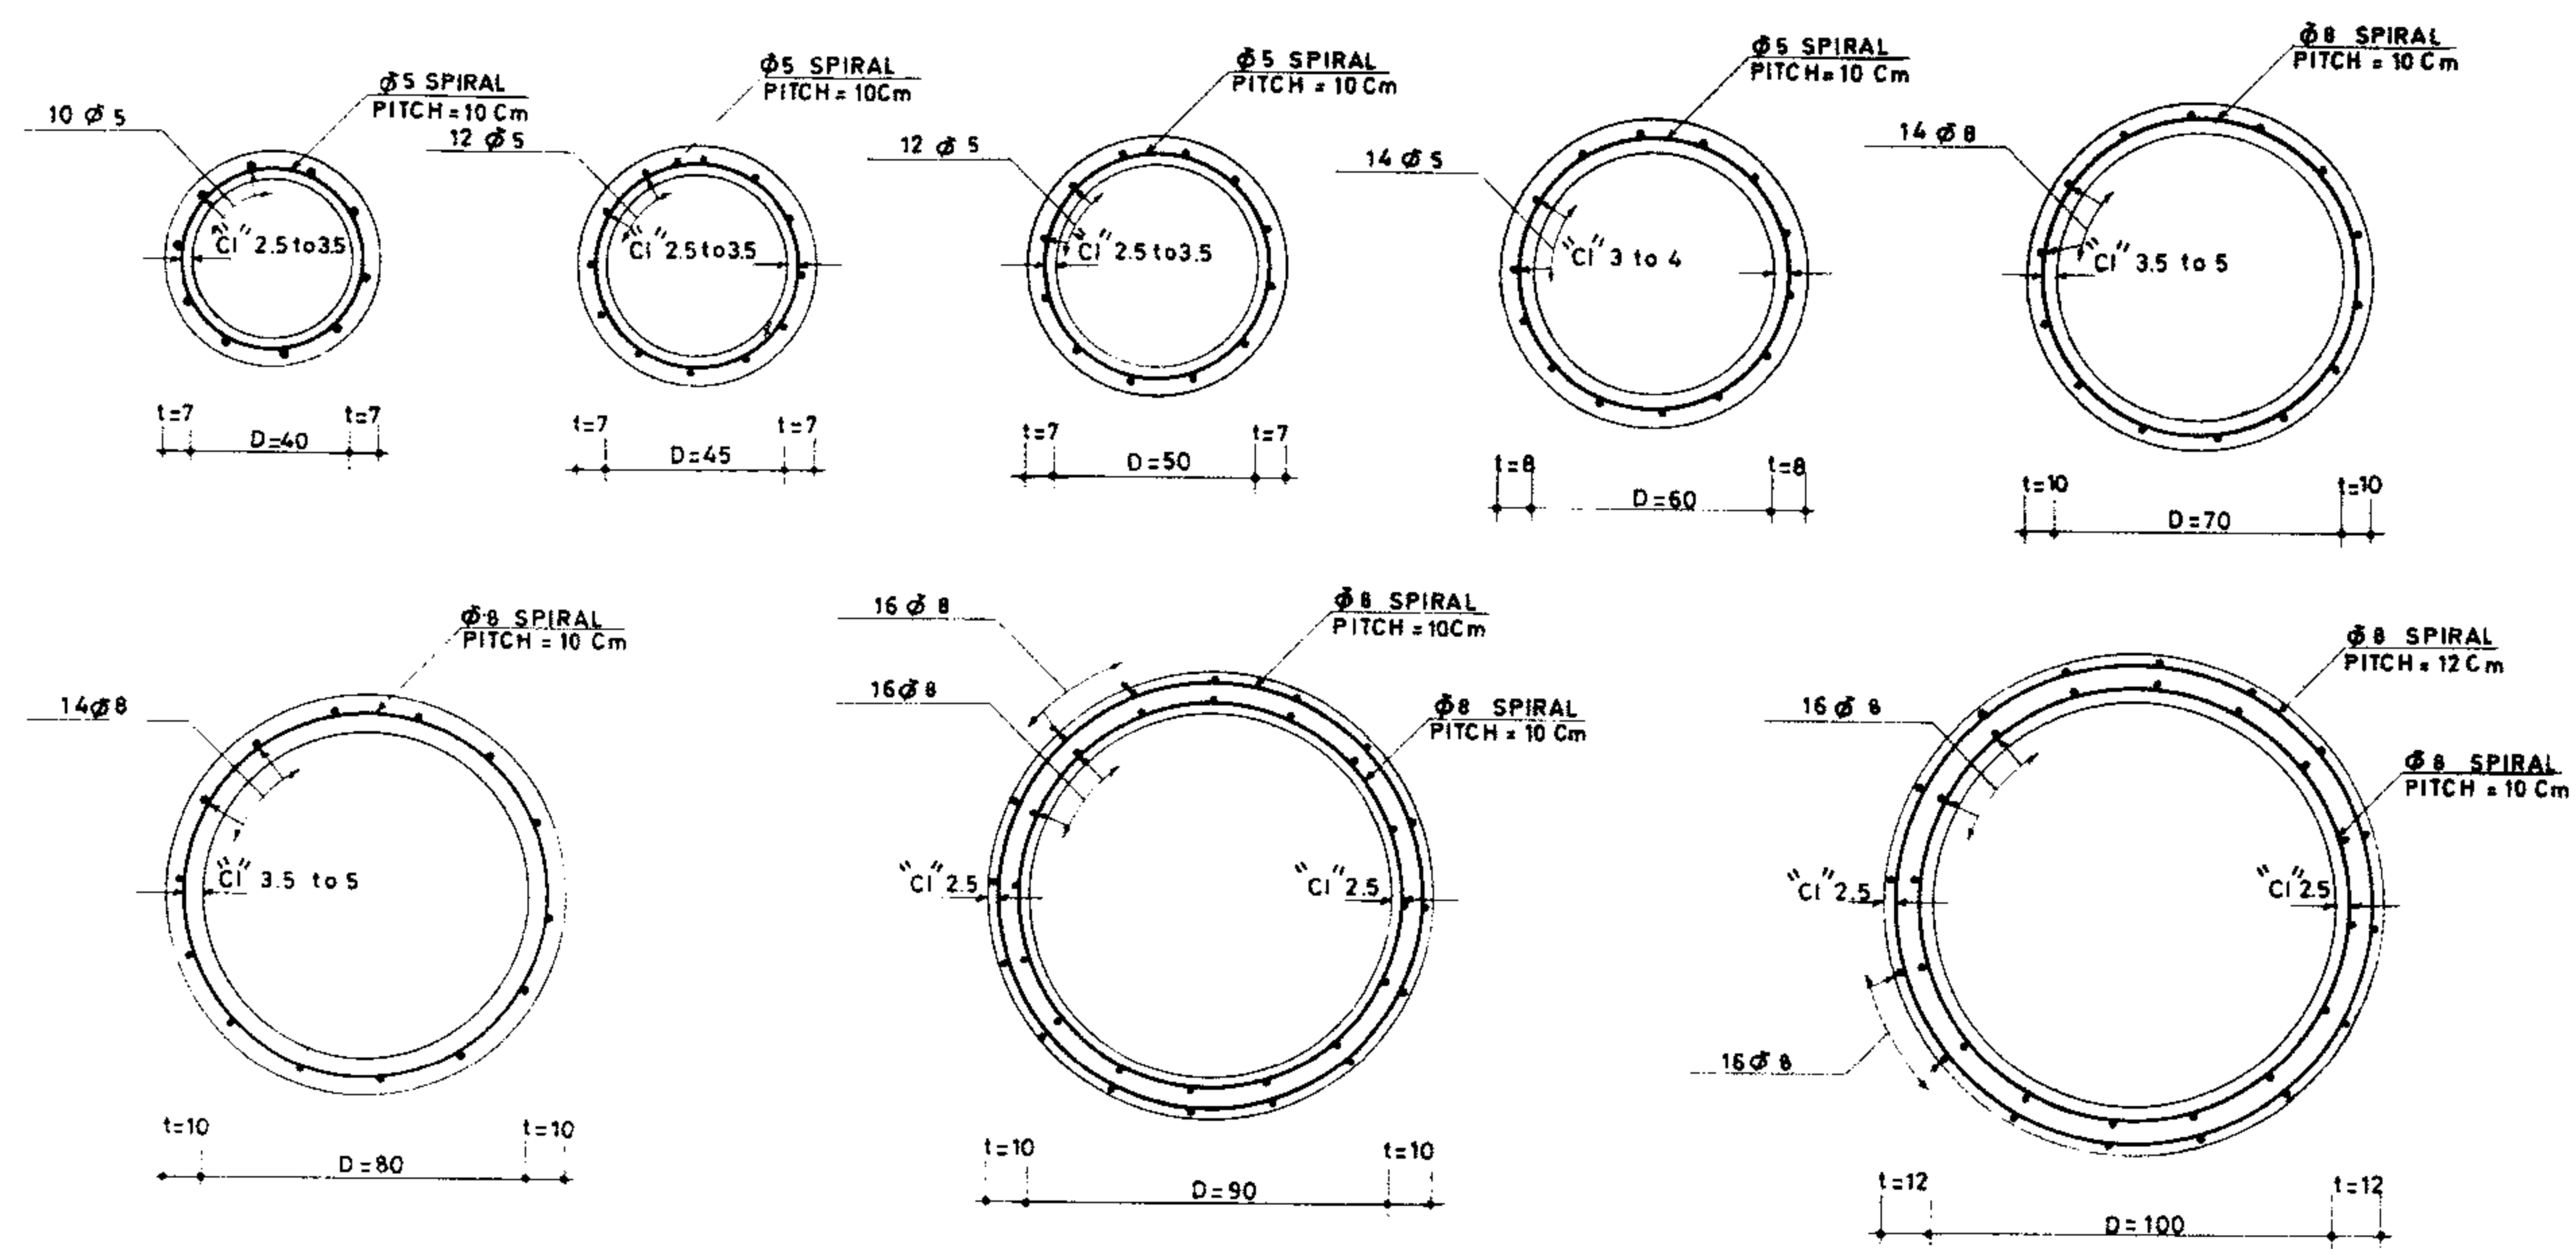

Dia.	Pos.	φ	Shape	Nº	Unit length	Total length	Unit weight	Total weight	Conc. m ³	Form. work m ²
Dia=40	1	5	0.96	10	0.96	9.60	0.154	1.48	0.1034	3.06
	2	5	0.10	1	14.79	14.79	0.154	2.28		
Dia=45	1	5	0.96	12	0.96	11.52	0.154	1.77	0.1144	3.38
	2	5	0.10	1	16.27	16.27	0.154	2.51		
Dia=50	1	5	0.96	12	0.96	11.52	0.154	1.77	0.1253	3.71
	2	5	0.10	1	17.75	17.75	0.154	2.73		
Dia=60	1	5	0.96	14	0.96	13.44	0.154	2.07	0.1709	4.44
	3	5	0.10	1	21.03	21.03	0.154	3.24		
Dia=70	1	8	0.96	14	0.96	13.44	0.395	5.31	0.2513	5.28
	2	8	0.10	1	24.91	24.91	0.395	9.84		
Dia=80	1	8	0.96	14	0.96	13.44	0.395	5.31	0.2827	5.94
	2	8	0.10	1	27.91	27.91	0.395	11.02		

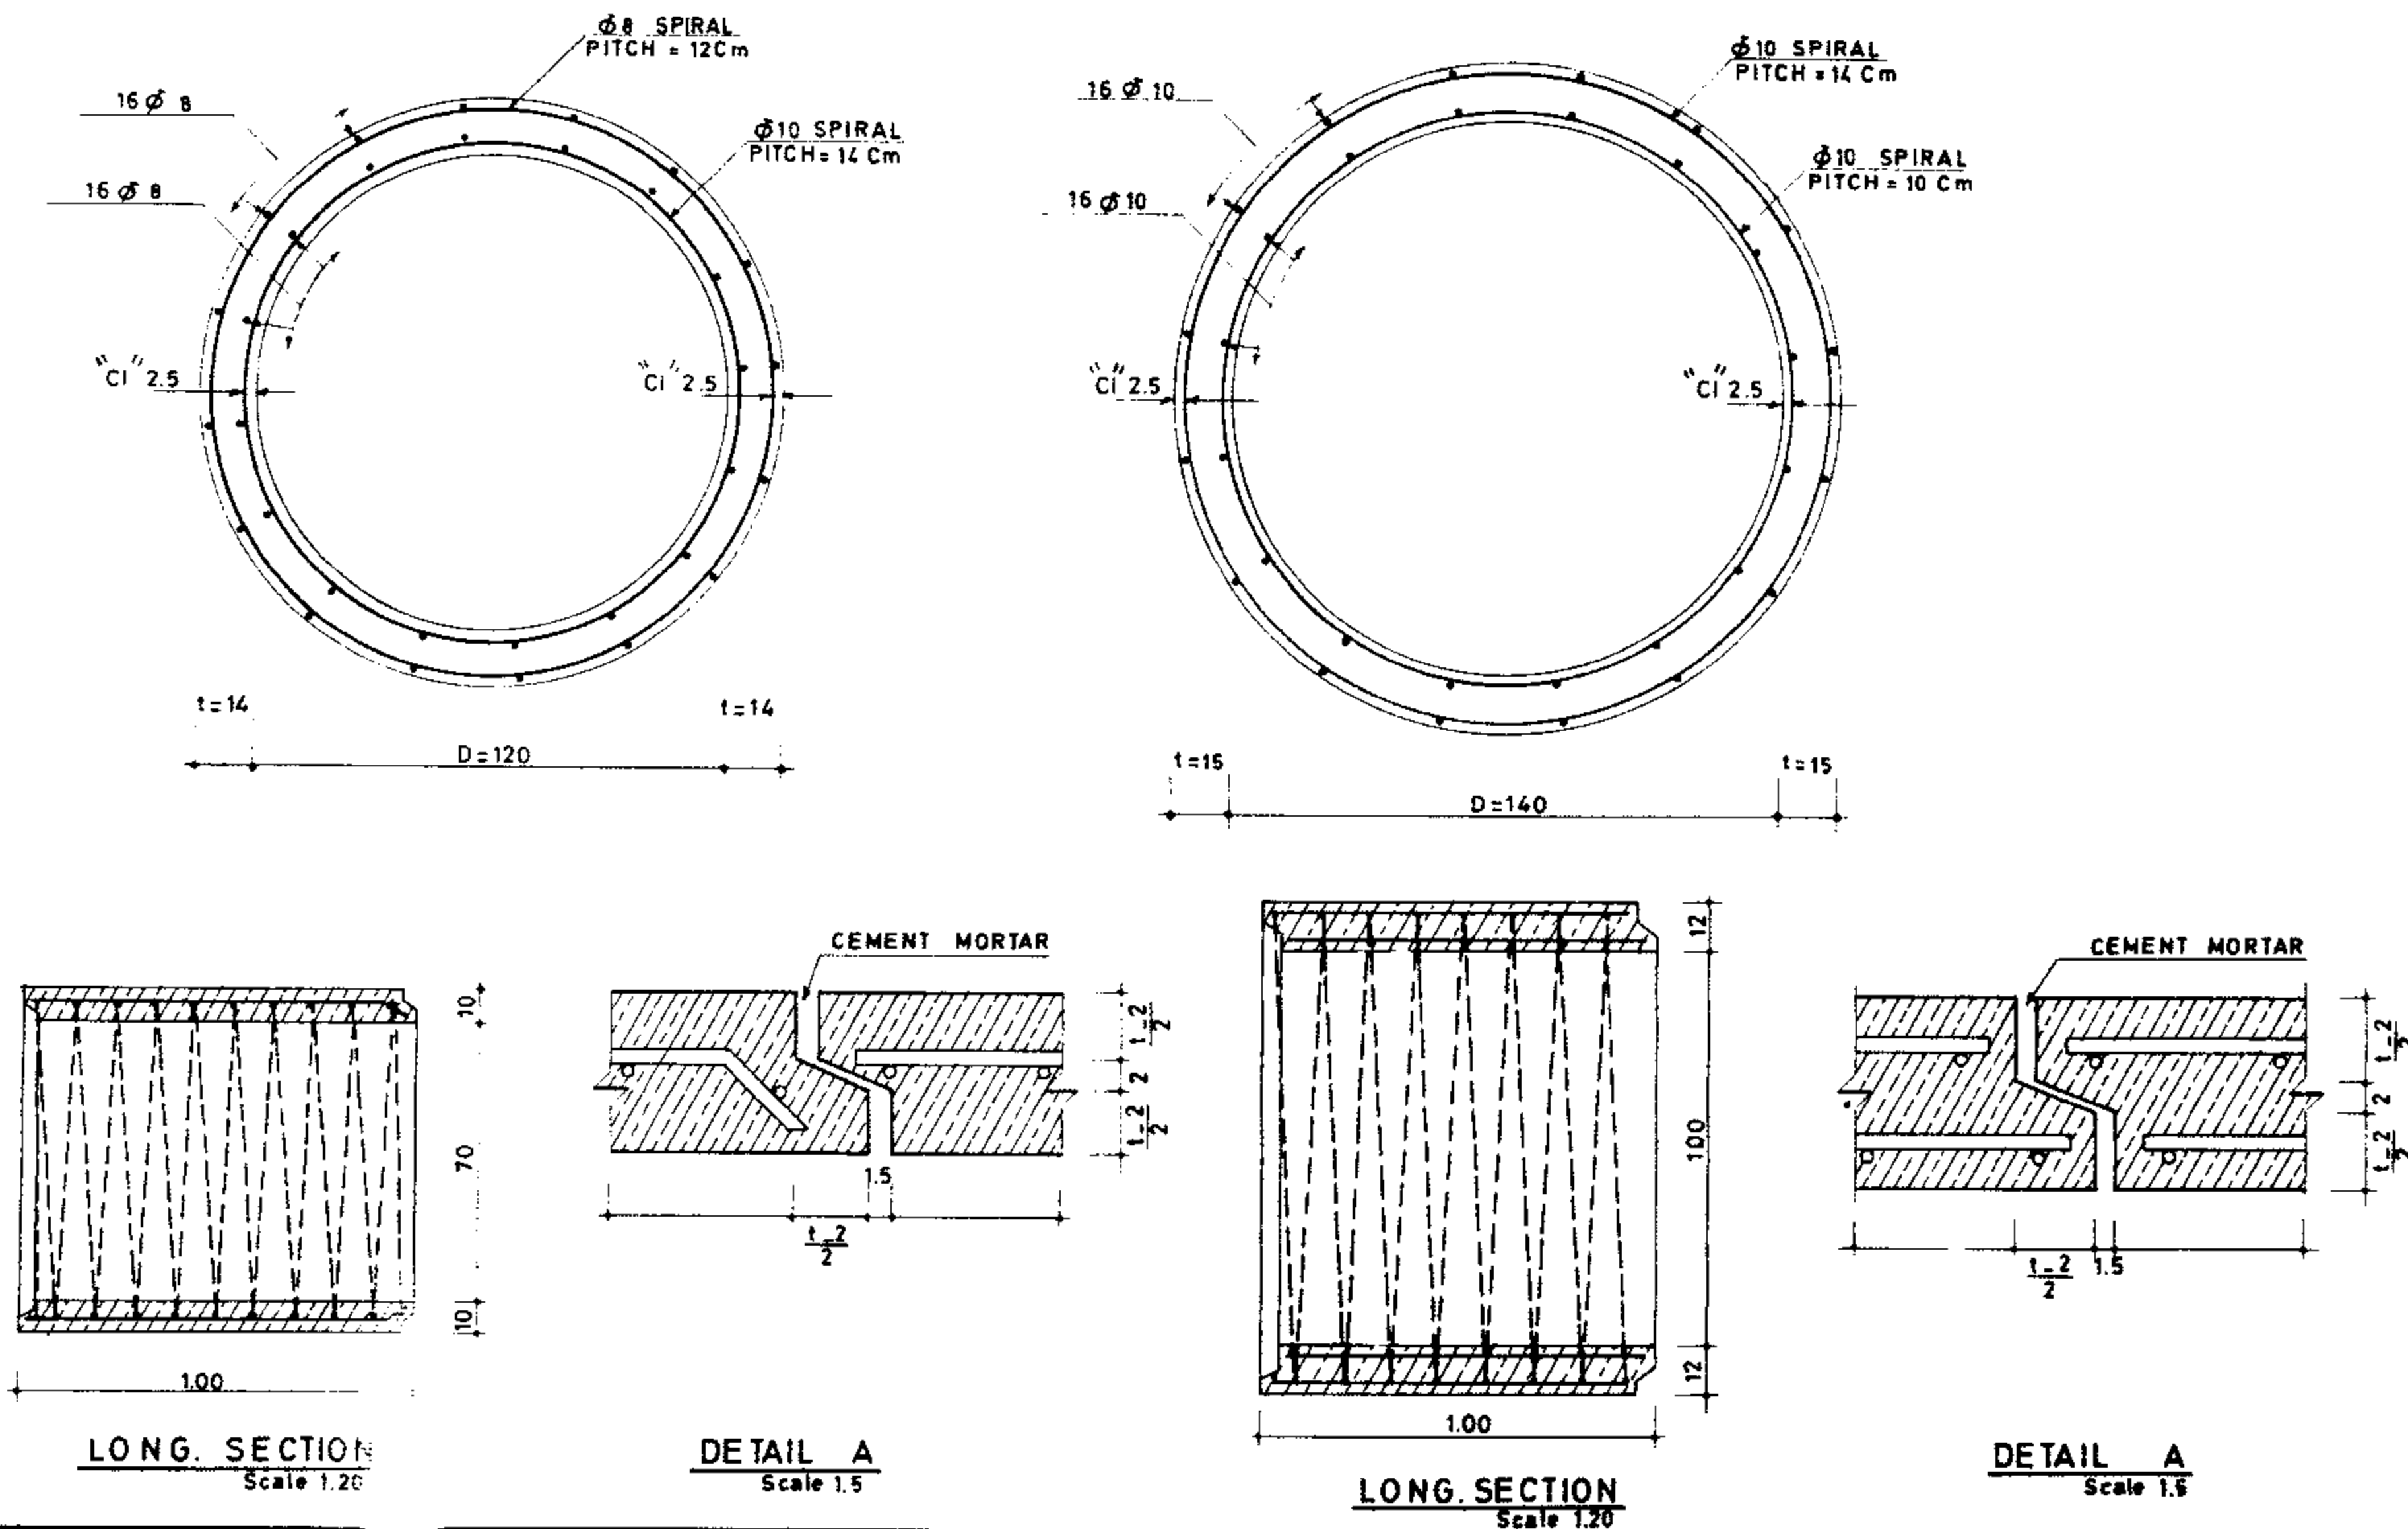

Dia.	Pos.	φ	Shape	Nº	Unit length	Total length	Unit weight	Total weight	Conc. m ³	Form. work m ²
Dia=90	1	8	0.91	16	0.91	14.56	0.395	5.75	0.3142	6.60
	2	8	0.91	16	0.91	14.5	0.395	5.75		
	3	8	0.10	1	29.58	29.58	0.395	11.69		
	4	8	0.10	1	27.88	27.88	0.395	11.01		
Dia=100	1	8	0.91	16	0.91	14.56	0.395	5.75	0.4222	7.46
	2	8	0.91	16	0.91	14.56	0.395	5.75		
	3	8	0.12	1	29.58	29.58	0.395	11.69		
	4	8	0.10	1	27.88	27.88	0.395	11.01		
Dia=120	1	8	0.91	16	0.91	14.56	0.395	5.75	0.5894	9.01
	2	8	0.91	16	0.91	14.56	0.395	5.75		
	3	8	0.12	1	33.71	33.71	0.395	13.32		
	10	10	0.14	1	36.42	36.42	0.617	22.47		
Dia=140	1	10	0.91	16	0.91	14.56	0.617	8.98	0.7304	
	2	10	0.91	16	0.91	14.56	0.617	8.98		
	3	10	0.14	1	33.41	33.41	0.617	20.61		
	4	10	0.10	1	42.12	42.12	0.617	25.99		



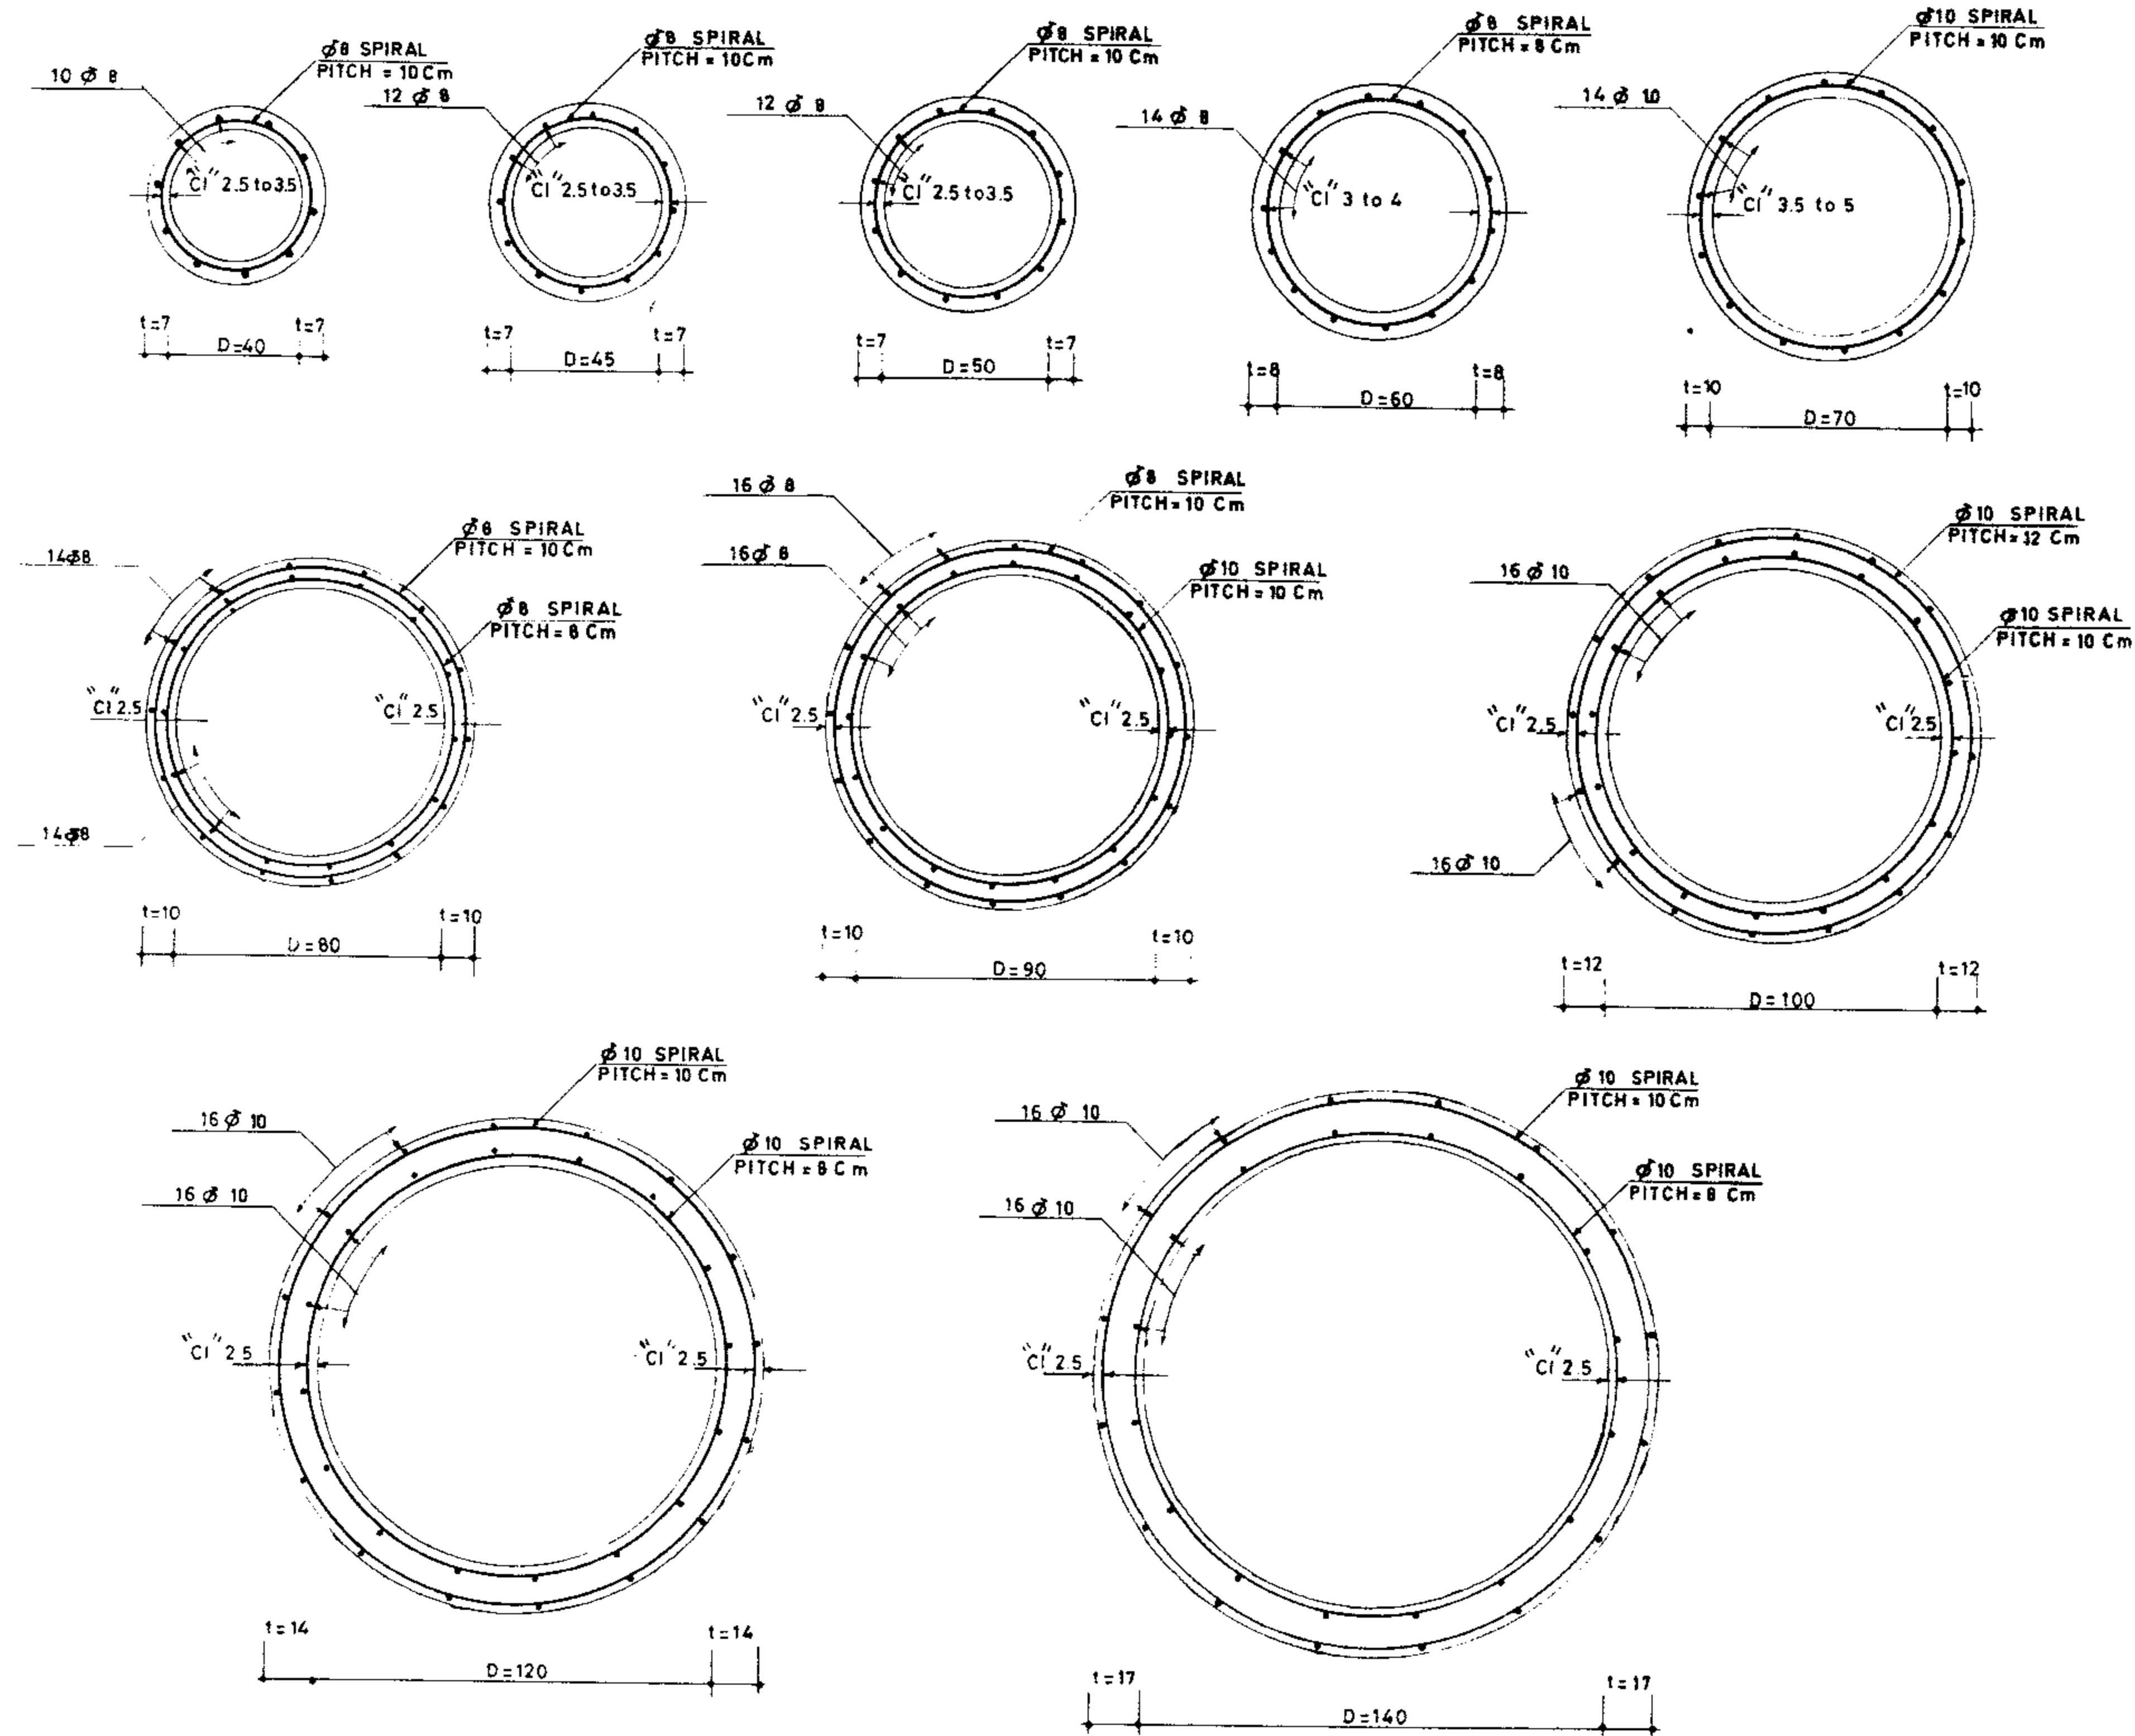


SINGLE LAYER REINFORCEMENT

Dia.	Pos.	Φ	Shape	N ^o .	Unit length	Total length	Unit weight	Total weight	Conc. m ³	Form-work m ²
Dia=40	1	8	0.96	10	0.96	9.60	0.395	3.79	0.1034	3.06
	2	8	0.10	1	15.08	15.08	0.395	5.96		
Dia=45	1	8	0.96	12	0.96	11.52	0.395	4.55	0.1144	3.38
	2	8	0.10	1	16.56	16.56	0.395	6.54		
Dia=50	1	8	0.96	12	0.96	11.52	0.395	4.55	0.1253	3.71
	2	8	0.10	1	18.05	18.05	0.395	7.13		
Dia=60	1	8	0.96	14	0.96	13.44	0.395	5.31	0.1709	4.44
	2	8	0.08	1	26.57	26.57	0.395	10.50		
Dia=70	1	10	0.96	14	0.96	13.44	0.617	8.29	0.2513	5.28
	2	10	0.10	1	24.91	24.91	0.617	15.37		

DOUBLE LAYERS REINFORCEMENT

Dia.	Pos.	Φ	Shape	N ^o .	Unit length	Total length	Unit weight	Total weight	Conc. m ³	Form-work m ²
Dia=80	1	8	0.91	14	0.91	12.74	0.395	5.03	0.2827	5.94
	2	8	0.91	14	0.91	12.74	0.395	5.03		
	3	8	0.10	1	26.73	26.73	0.395	10.56		
	4	8	0.08	1	31.22	31.22	0.395	12.33		
Dia=90	1	8	0.91	16	0.91	14.56	0.395	5.75	0.3142	6.60
	2	8	0.91	16	0.91	14.56	0.395	5.75		
	3	8	0.10	1	29.58	29.58	0.395	11.69		
	4	10	0.10	1	27.86	27.86	0.617	17.19		
Dia=100	1	10	0.91	16	0.91	14.56	0.617	8.98	0.4222	7.46
	2	10	0.91	16	0.91	14.56	0.617	8.98		
	3	10	0.12	1	28.05	28.05	0.617	17.31		
	4	10	0.10	1	30.72	30.72	0.617	18.96		
Dia=120	1	10	0.91	16	0.91	14.56	0.617	8.98	0.5894	9.01
	2	10	0.91	16	0.91	14.56	0.617	8.98		
	3	10	0.10	1	40.41	40.41	0.617	24.93		
	4	10	0.08	1	45.30	45.30	0.617	27.95		
Dia=140	1	10	0.91	16	0.91	14.56	0.617	8.98	0.8385	10.70
	2	10	0.91	16	0.91	14.56	0.617	8.98		
	3	10	0.10	1	47.86	47.86	0.617	29.53		
	4	10	0.08	1	52.63	52.63	0.617	32.47		

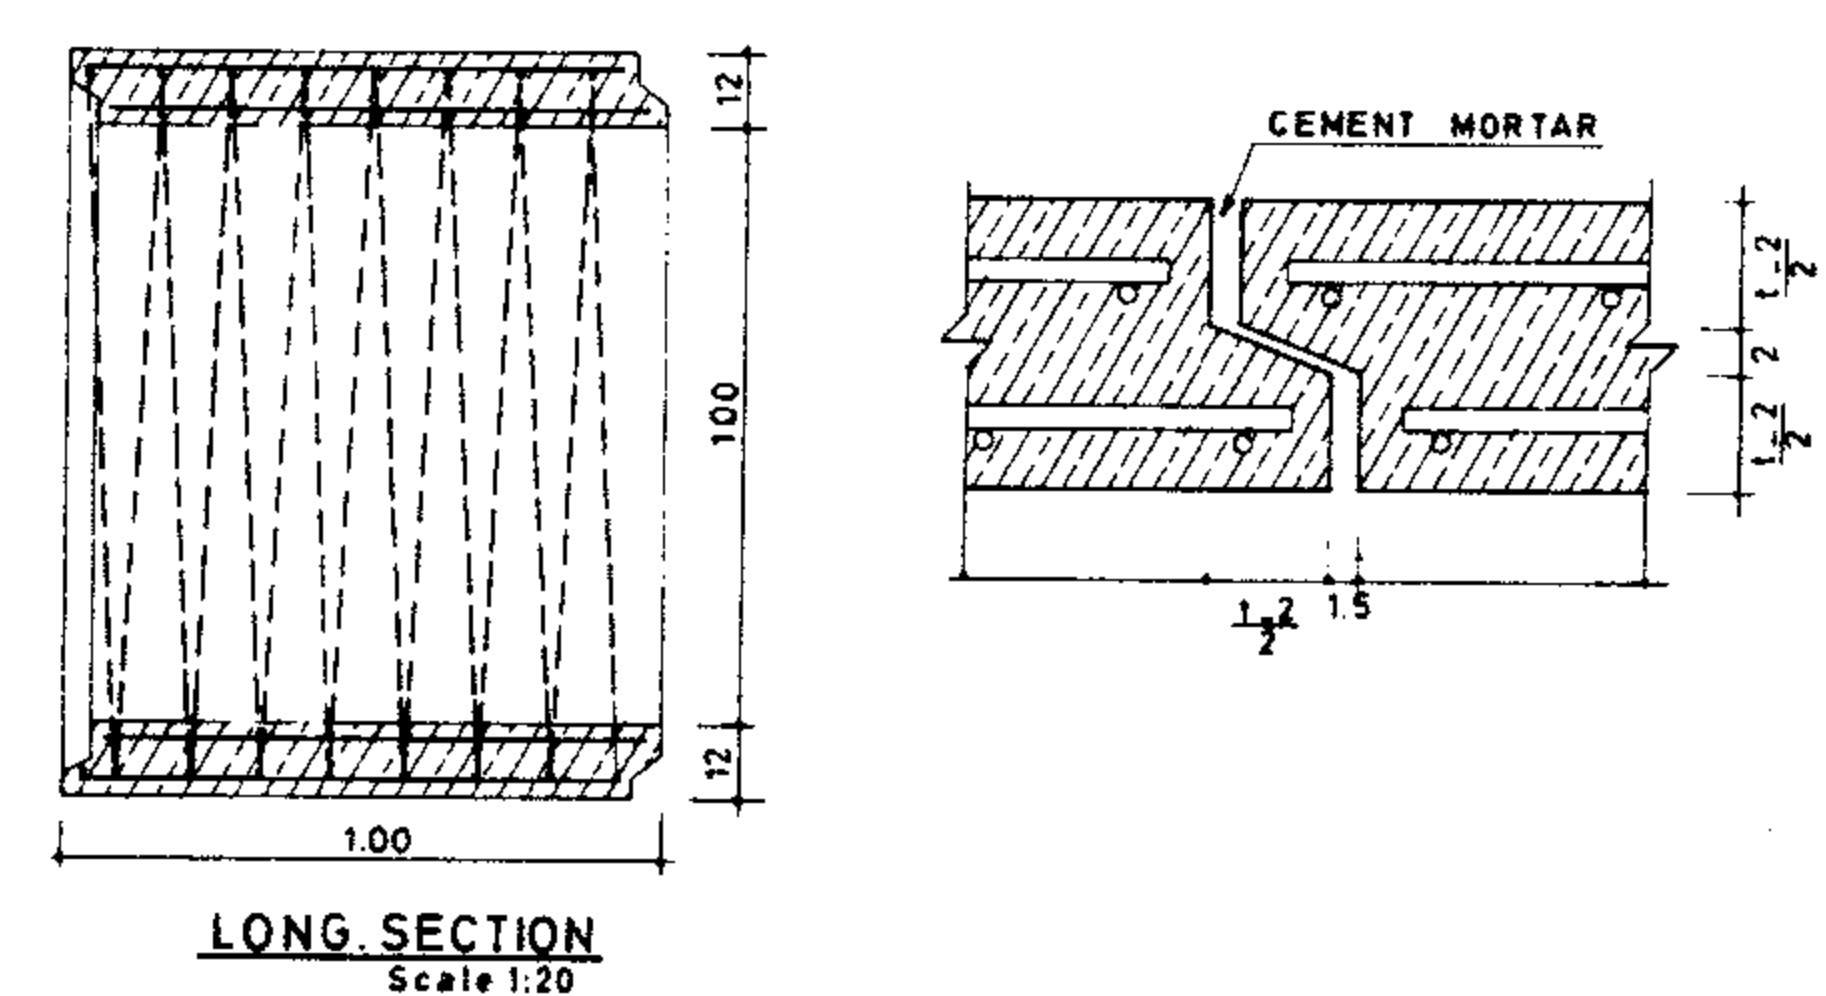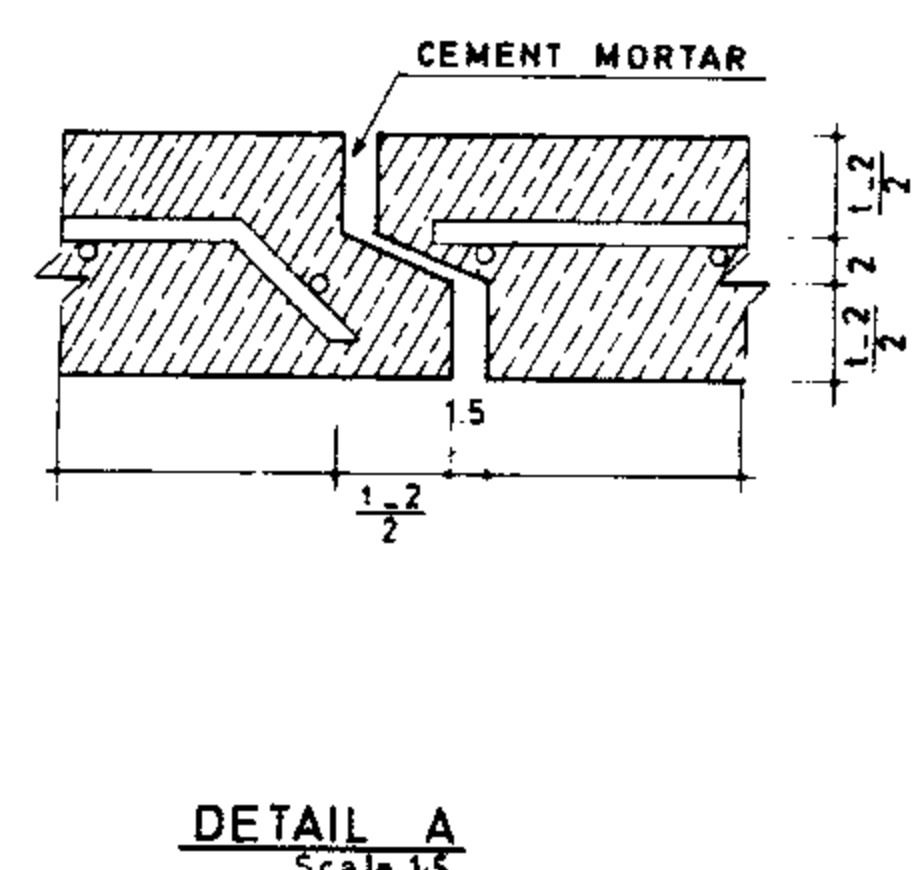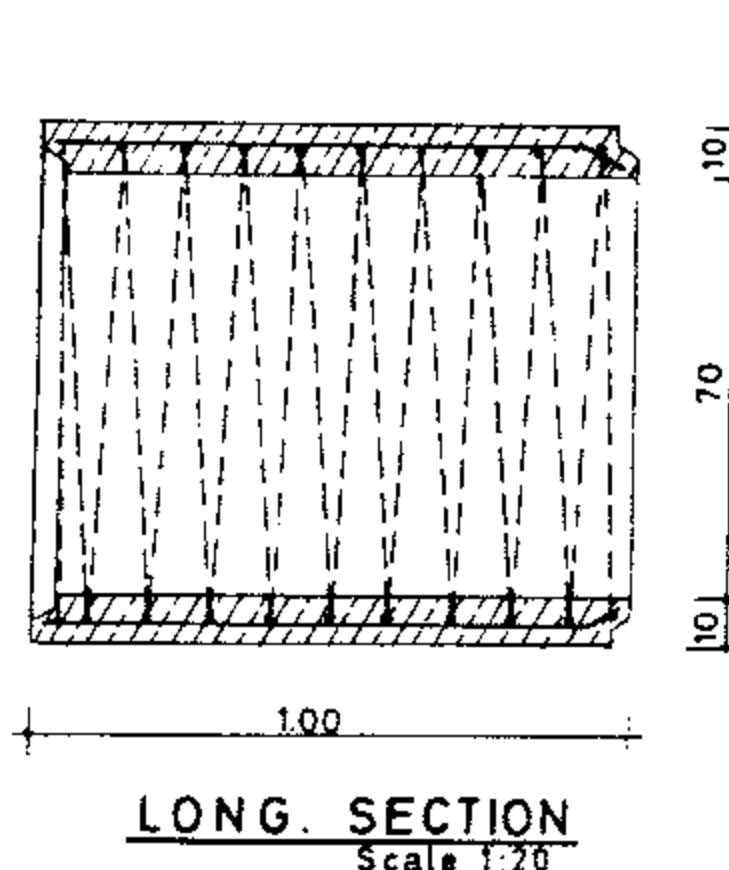

REFERENCE DWGS: For general details see dwg. N^o 20/2/1/01 TO 20/2/1/03

Scale: 1:5-1:20

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG. N^o. 17/2/1/04

Approved:

Sheet. N^o. 4 of 4

Rev. N^o.

CONCRETE PIPES
REINFORCEMENT GROUP 3

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU


STANDARD PIPE CONNECTIONS TO HEADWALL & STRUCTURES

NOTE:


Extra concrete thickness around pipe connection can be eliminated by the engineer if required

Dia. Cm.	t Cm.	α =Variable			$\alpha=2.5^\circ$				$\alpha=5^\circ$				$\alpha=7.5^\circ$				$\alpha=10^\circ$				$\alpha=12.5^\circ$				$\alpha=15^\circ$				$\alpha=17.5^\circ$				$\alpha=20^\circ$				$\alpha=22.5^\circ$			
		g	s	T	w	x	y	z	w	x	y	z	w	x	y	z	w	x	y	z	w	x	y	z	w	x	y	z	w	x	y	z	w	x	y	z				
40	7	60	10	15	47.04	2.05	2.05	13.00	47.18	4.10	4.11	15.98	47.41	6.13	6.19	18.92	47.73	8.16	8.29	21.83	48.14	10.17	10.42	24.69	48.66	12.16	12.59	26.22	49.28	14.13	14.82	30.28	50.02	16.07	17.11	32.99	50.87	17.99	19.47	35.65
45	7	60	10	15	52.05	2.22	2.27	13.22	52.20	4.53	4.55	16.41	52.45	6.79	6.85	19.58	52.80	9.03	9.17	22.70	53.26	11.25	11.53	25.77	53.83	13.46	13.93	28.81	54.52	15.64	16.40	31.79	55.34	17.79	18.93	34.71	56.28	19.90	21.54	37.56
50	7	60	10	15	57.05	2.49	2.49	13.44	57.22	4.97	4.99	16.85	57.49	7.44	7.50	20.23	57.88	9.9	10.05	23.57	58.38	12.34	12.64	26.86	59.01	14.75	15.27	30.10	59.77	17.14	17.97	33.29	60.66	19.50	20.75	36.42	61.70	21.81	23.61	39.47
60	8	60	10	15	68.06	2.97	2.97	14.01	68.26	5.93	5.95	17.90	68.59	8.88	8.95	21.80	69.05	11.81	11.99	25.65	69.65	14.72	15.08	29.46	70.40	17.60	18.22	33.21	71.30	20.45	21.44	36.90	72.36	23.26	24.75	40.52	73.60	26.02	28.17	44.06
70	10	80	15	20	80.08	3.49	3.49	19.78	80.31	6.97	7.00	24.53	80.69	10.44	10.53	29.23	81.23	13.89	14.11	33.87	81.94	17.32	17.74	38.46	82.82	20.71	21.44	42.95	83.88	24.05	25.22	47.39	85.13	27.36	29.12	51.72	86.59	30.81	33.14	55.95
80	10	80	15	20	90.09	3.93	3.93	20.22	90.34	7.84	7.87	25.40	90.79	11.75	11.85	30.54	91.39	15.63	15.87	35.61	92.19	19.48	19.95	40.62	93.17	23.29	24.12	45.54	94.37	27.06	28.38	50.39	95.78	30.78	32.76	55.14	97.42	34.44	37.28	59.78
90	10	80	20	20	100.1	4.36	4.37	25.65	100.36	8.72	8.75	31.26	100.66	13.05	13.17	36.79	101.54	17.36	17.63	42.27	102.43	21.64	22.17	47.66	103.53	25.68	26.79	52.96	104.83	30.07	31.53	58.17	105.42	34.20	36.40	63.25	108.24	38.27	41.42	68.23
100	12	80	20	20	112.11	4.89	4.89	26.27	112.43	9.76	9.80	32.47	112.97	14.62	14.75	38.63	113.73	19.45	19.75	44.70	114.72	24.24	24.83	50.69	115.95	28.99	30.01	56.59	117.44	33.68	35.31	62.34	119.19	38.31	40.76	68.05	121.23	42.86	46.39	73.58
120	14	80	20	20	134.13	5.86	5.85	27.30	134.51	11.68	11.72	34.57	135.16	17.49	17.64	41.76	136.07	23.27	23.63	48.87	137.25	29.00	29.71	55.88	138.73	34.68	35.91	62.80	140.50	40.29	42.25	69.59	142.60	45.83	48.77	76.25	145.04	51.28	55.50	82.27
140	15	80	20	20	155.15	6.76	6.77	28.27	155.59	13.51	13.56	39.46	156.34	20.23	20.41	44.63	157.39	26.92	27.33	52.69	158.76	33.55	34.36	60.65	160.47	40.12	41.53	68.50	162.52	46.61	48.87	76.21	164.95	53.01	56.42	83.77	167.77	59.32	64.20	91.19


All dimensions are in cm.

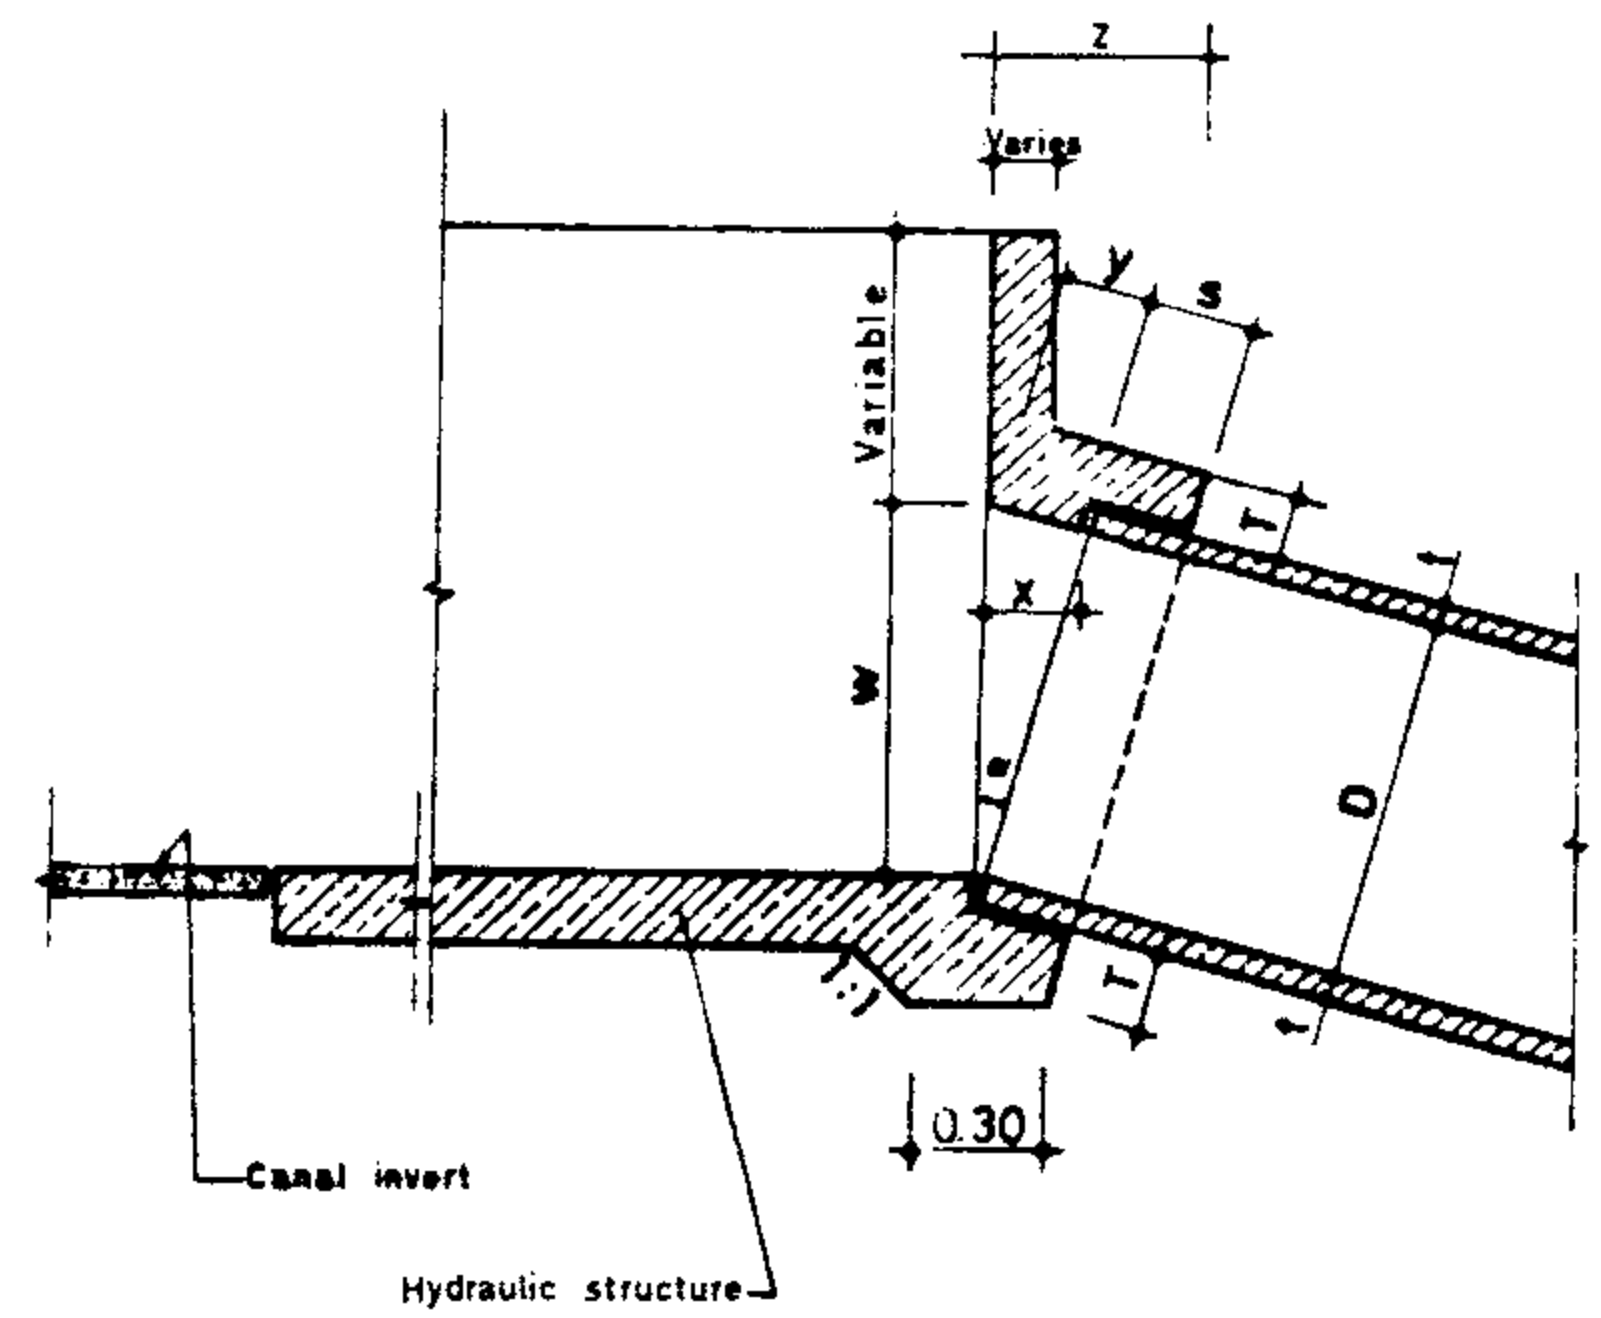


SLOPING PIPE WITHOUT GATE, AND CUT-OFF WALL

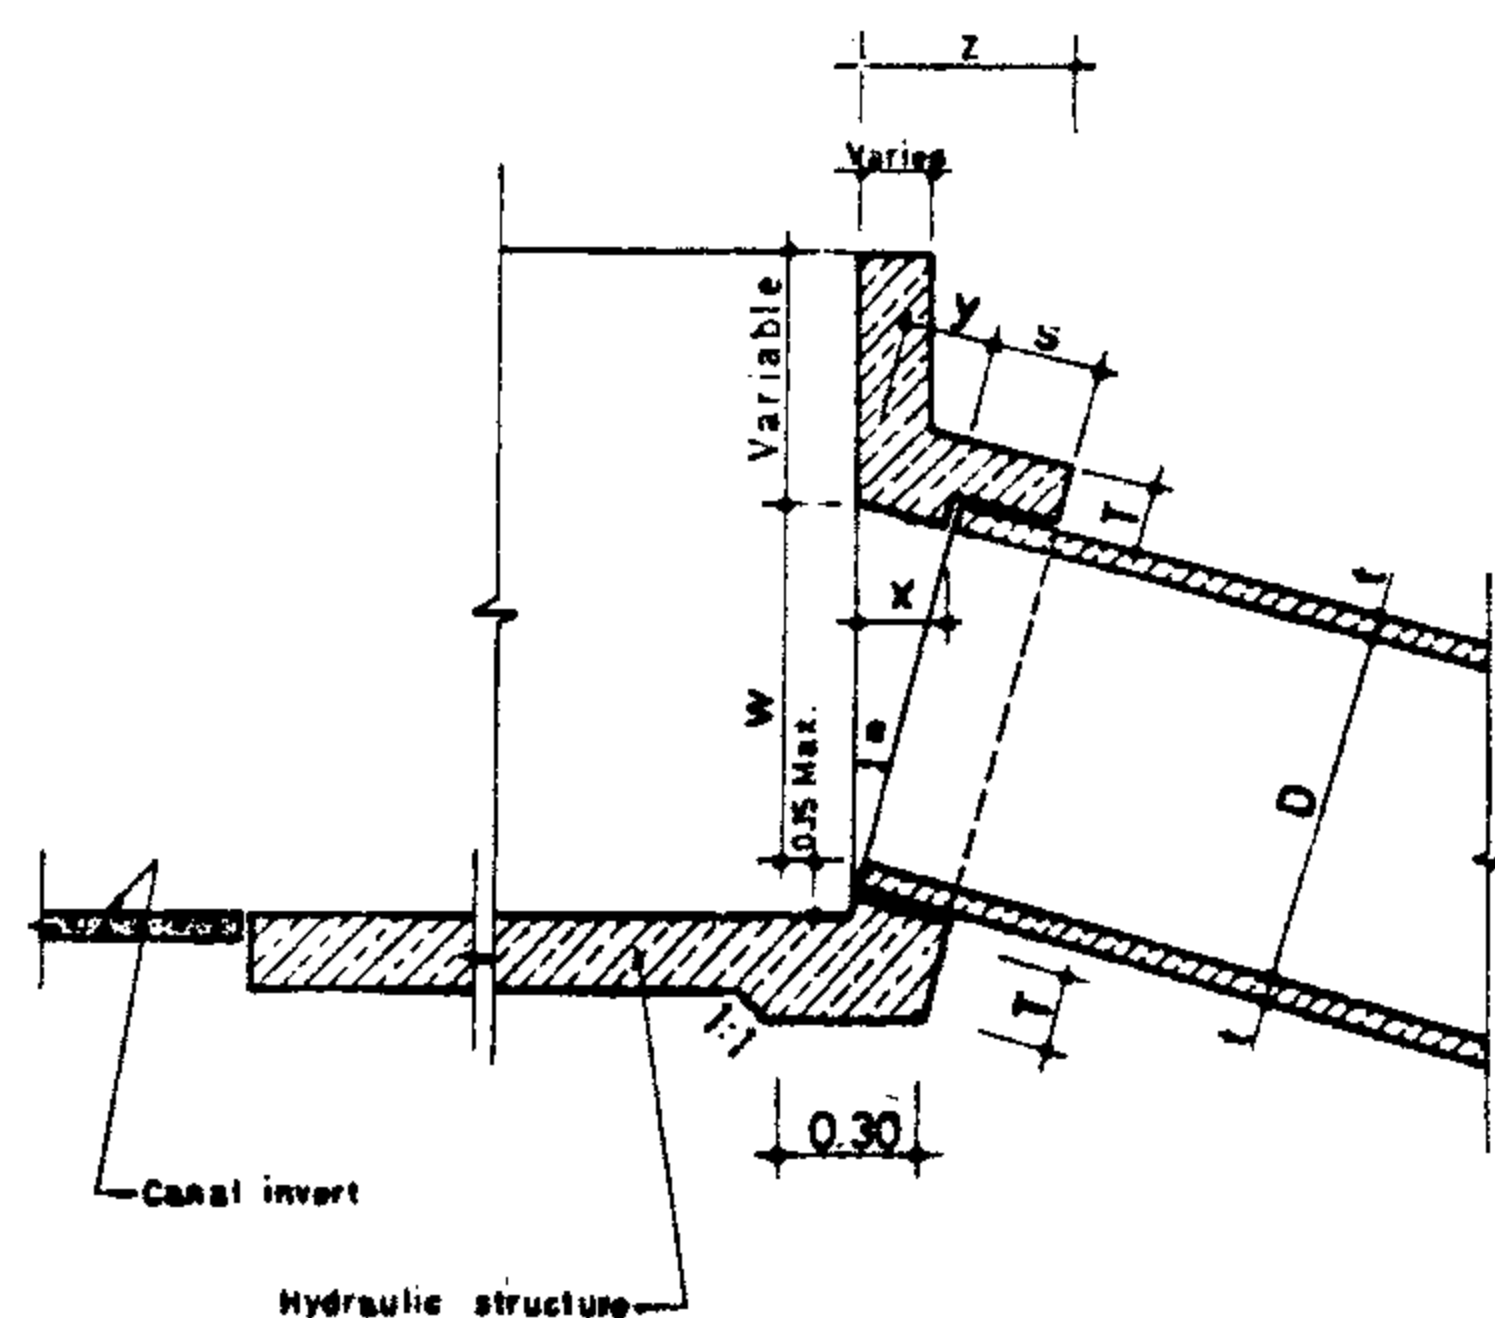

SLOPING PIPE WITH GATE, AND WITHOUT CUT-OFF WALL

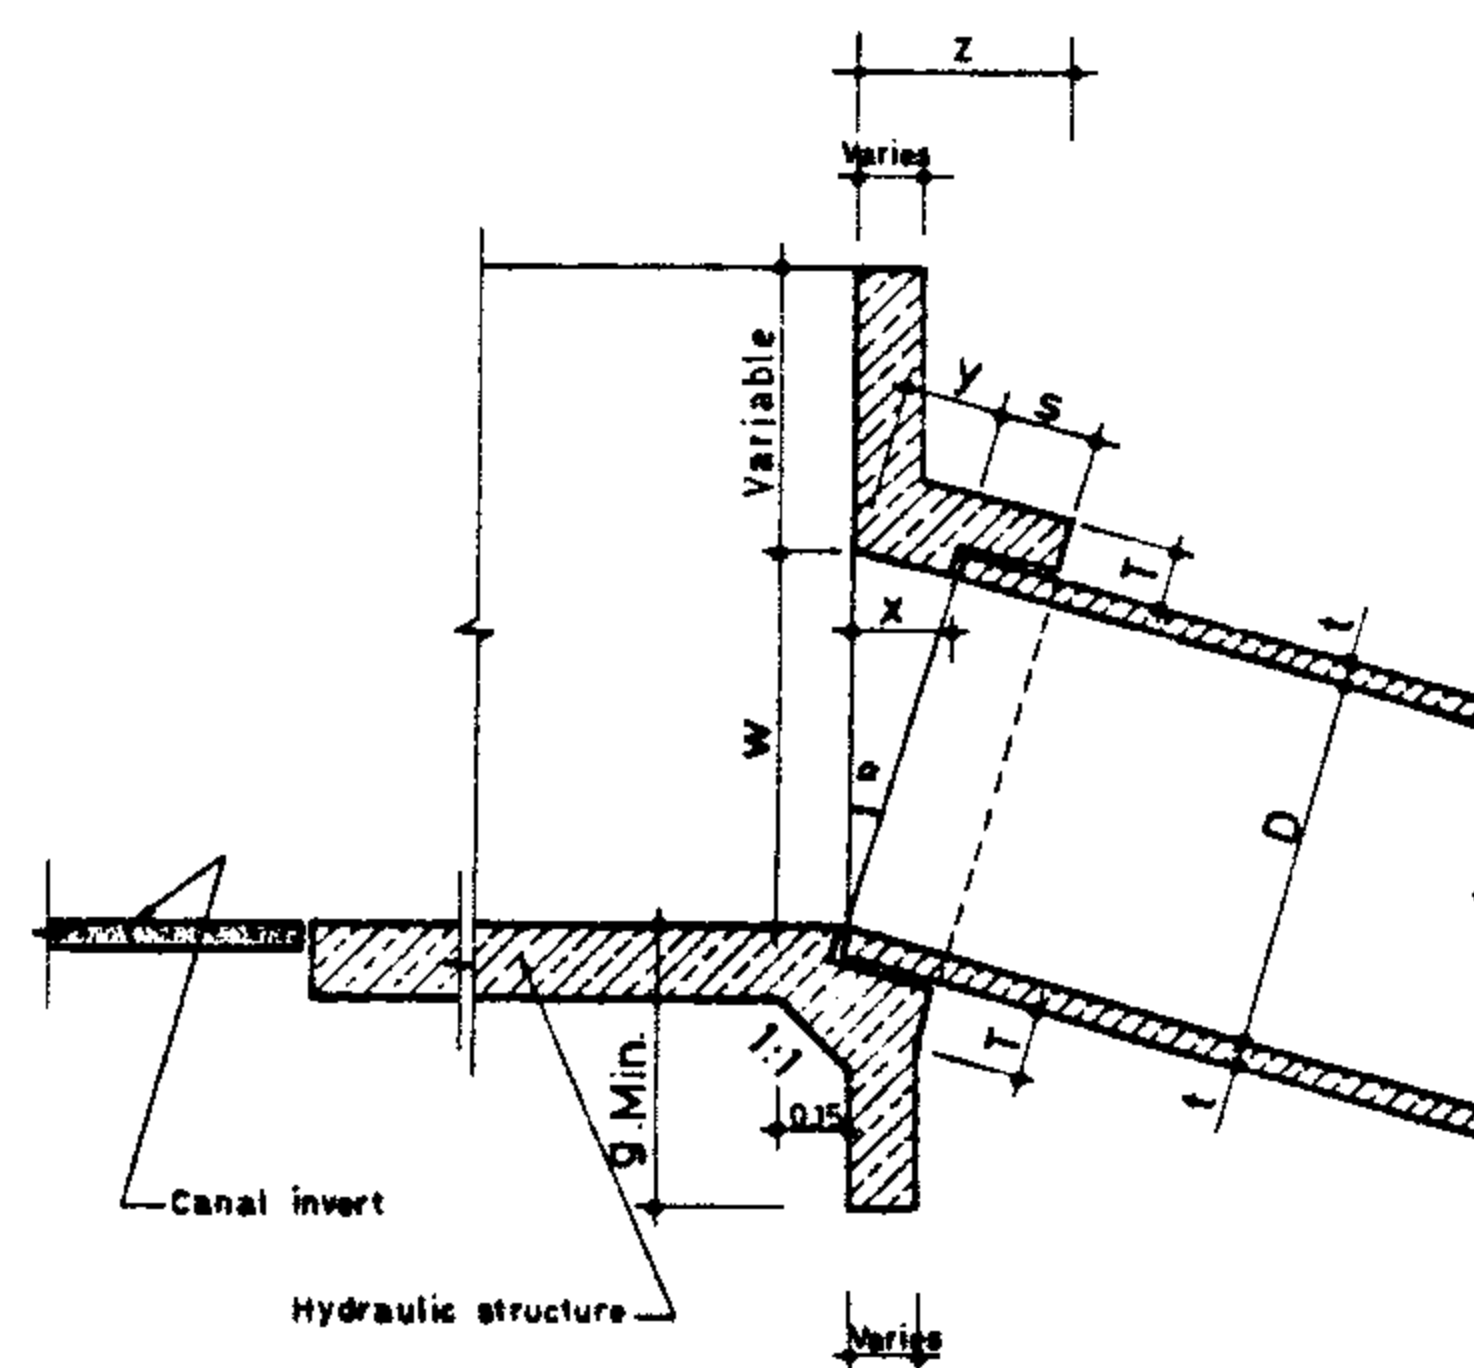

SLOPING PIPE WITHOUT GATE, AND WITH CUT-OFF WALL

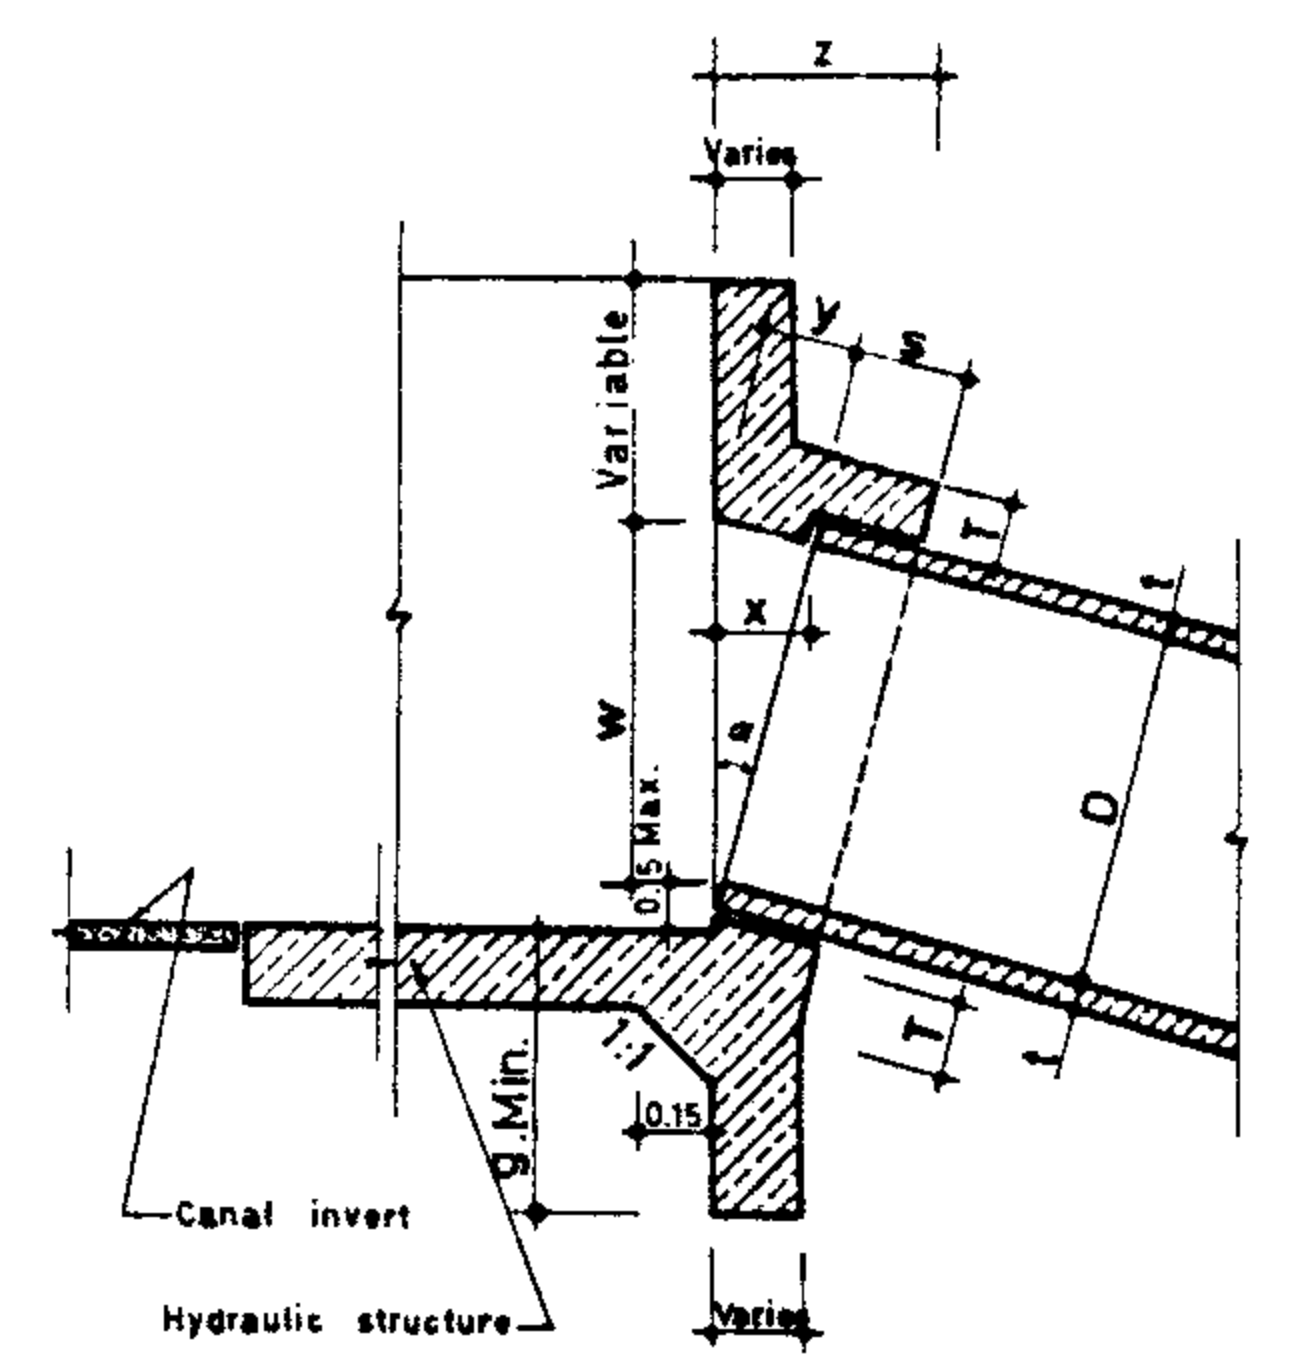

SLOPING PIPE WITH GATE, AND CUT-OFF WALL

REFERENCEDWGS: For head- dimension tables see dwgs.№ 14/1/1/01 TO 14/1/1/03
For general notes see dwgs №. 20/2/1/01 to 20/2/1/03

Scale: N.T.S

IRRIGATION & DRAINAGE STANDARDS

Date:


DWG.№ 17/1/1/01

Approved:


Sheet №.1 of 3 Rev.№.

TYPICAL PIPE CONNECTION
TO STRUCTURES
OPTION 1)


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & E
TECHNICAL RESEARCH AND
STANDARD BUREAU

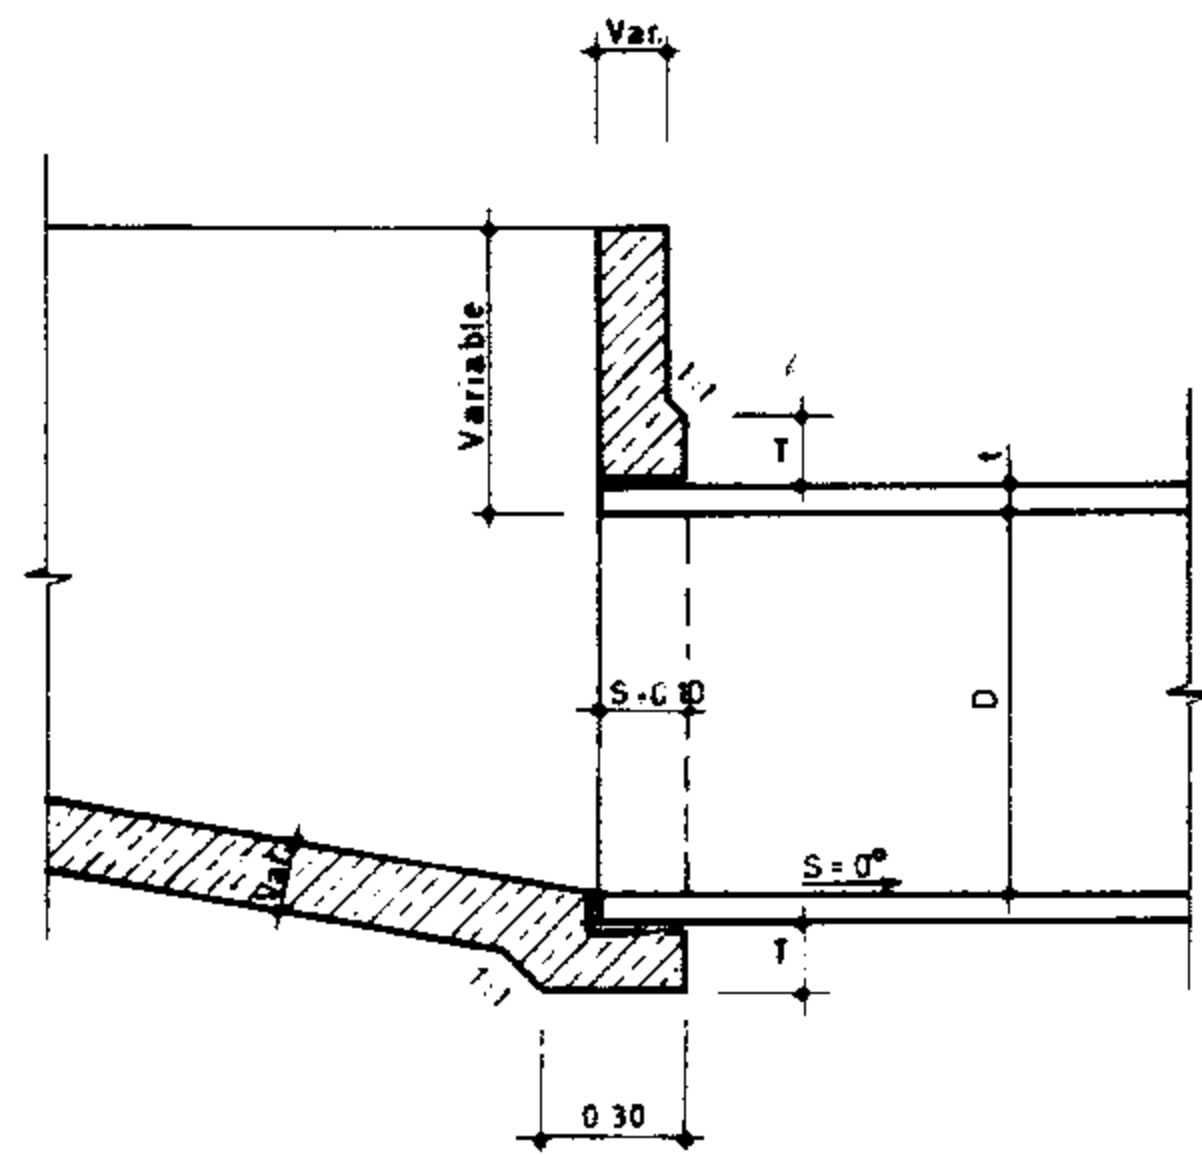


STRAIGHT PIPE WITHOUT GATE, AND CUT-OFF WALL

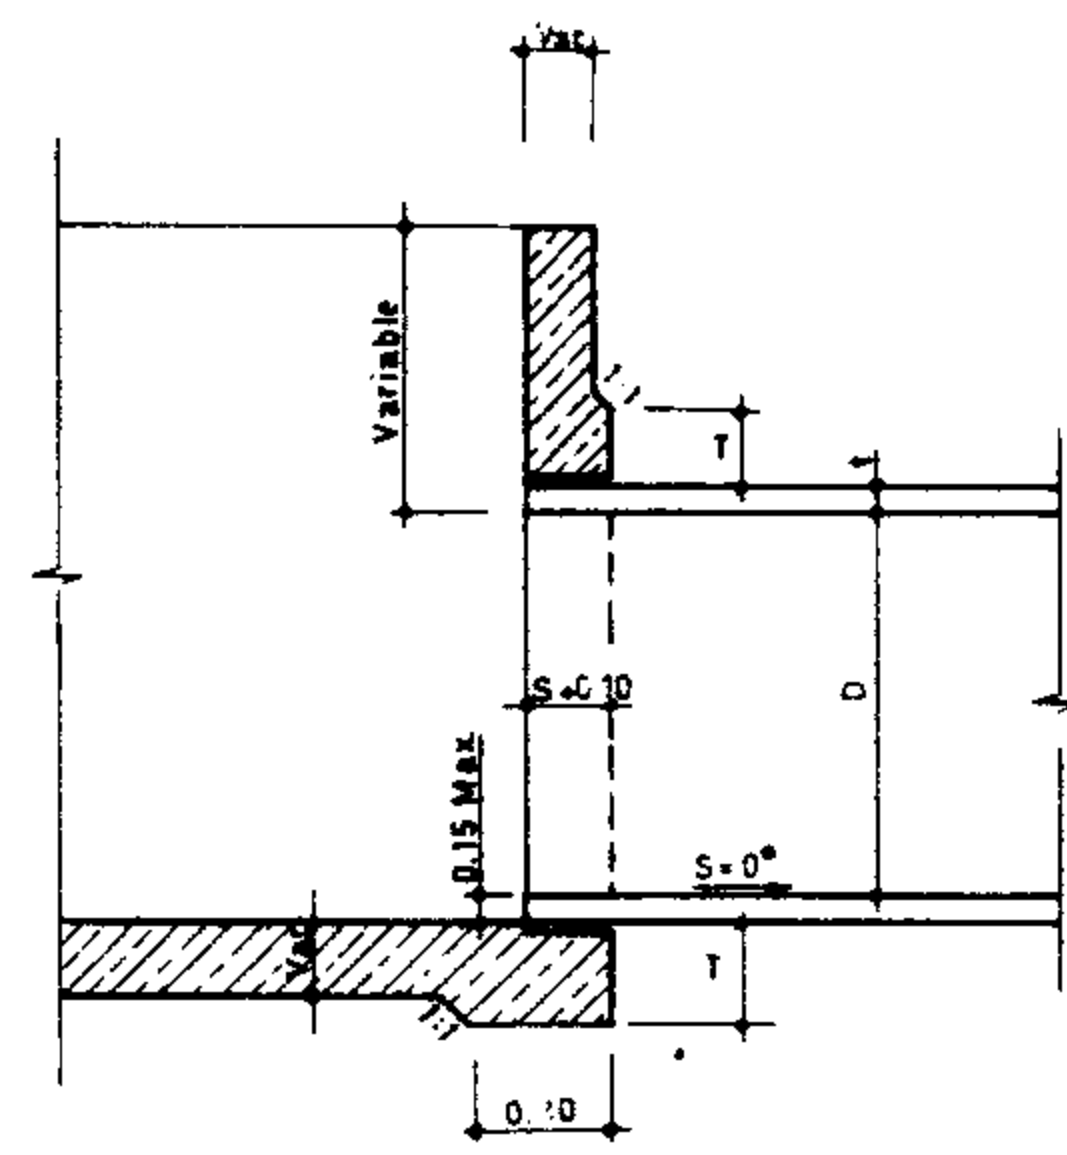

STRAIGHT PIPE WITH GATE, AND WITHOUT CUT-OFF WALL

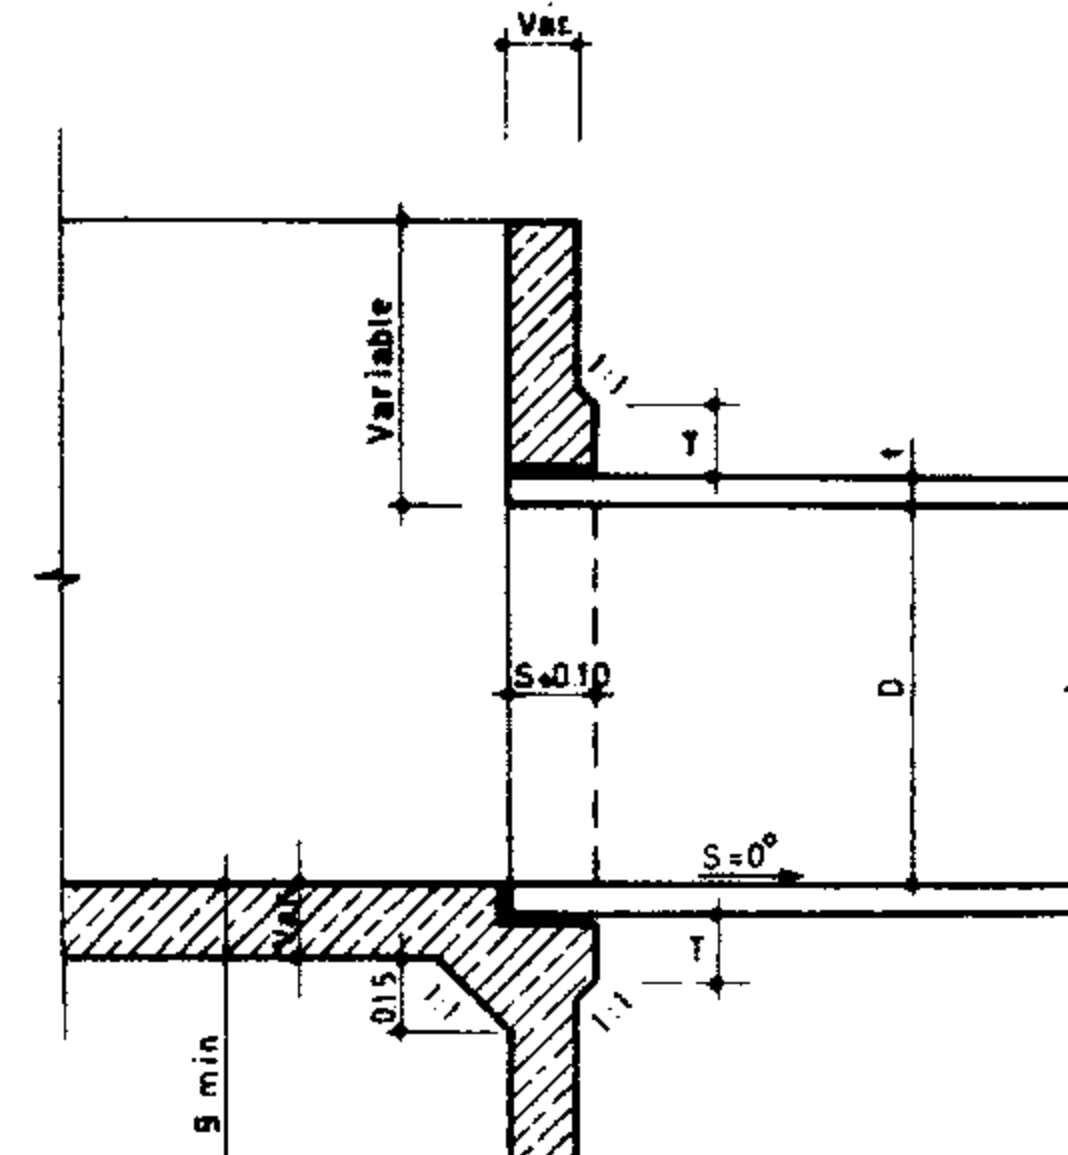

STRAIGHT PIPE WITHOUT GATE, AND WITH CUT-OFF WALL

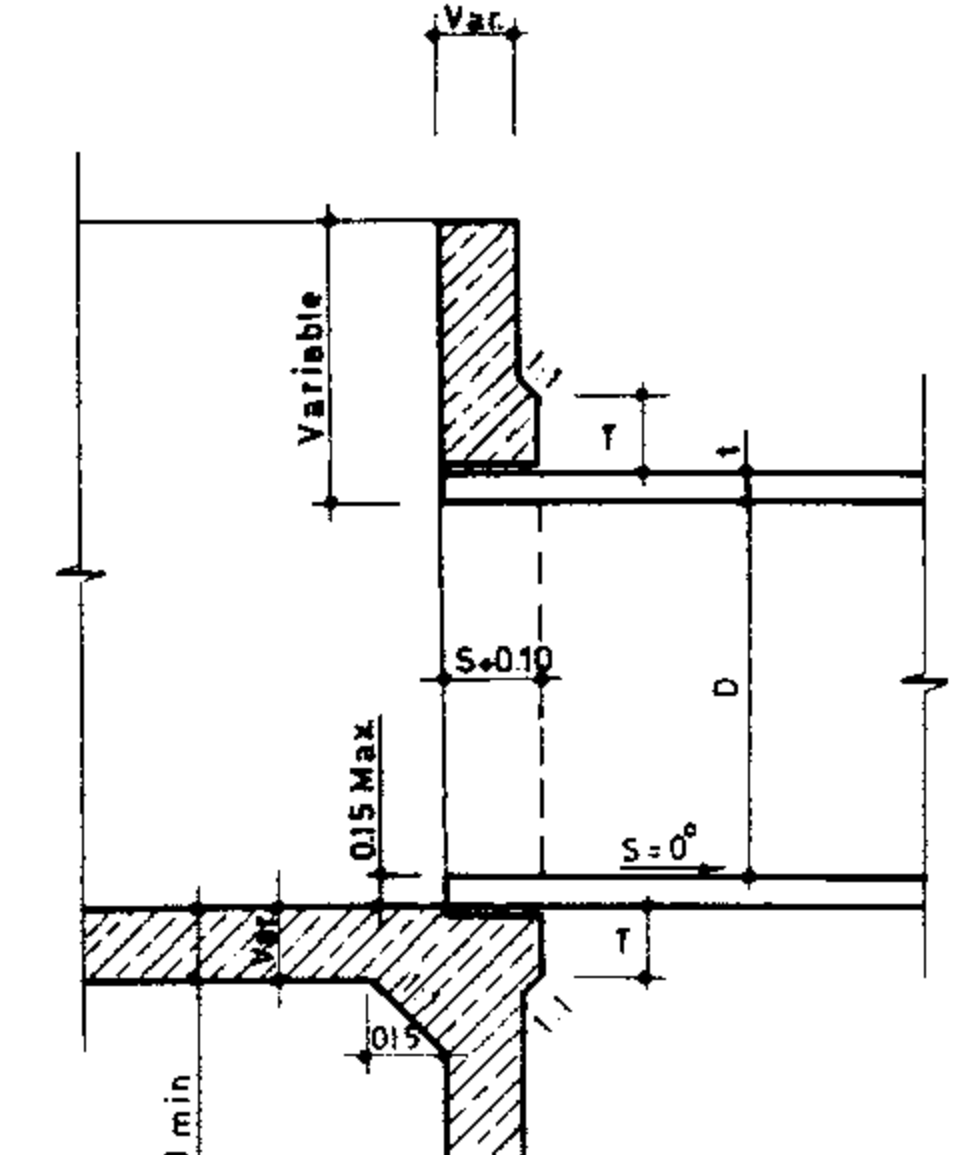


STRAIGHT PIPE WITH GATE, AND CUT-OFF WALL


DIMENSION TABLE

D	40	50	60	70	80	90	100	120	140
S	10	10	10	15	15	20	20	20	20
T	15	15	15	20	20	20	20	20	20


All dimensions are in cm.

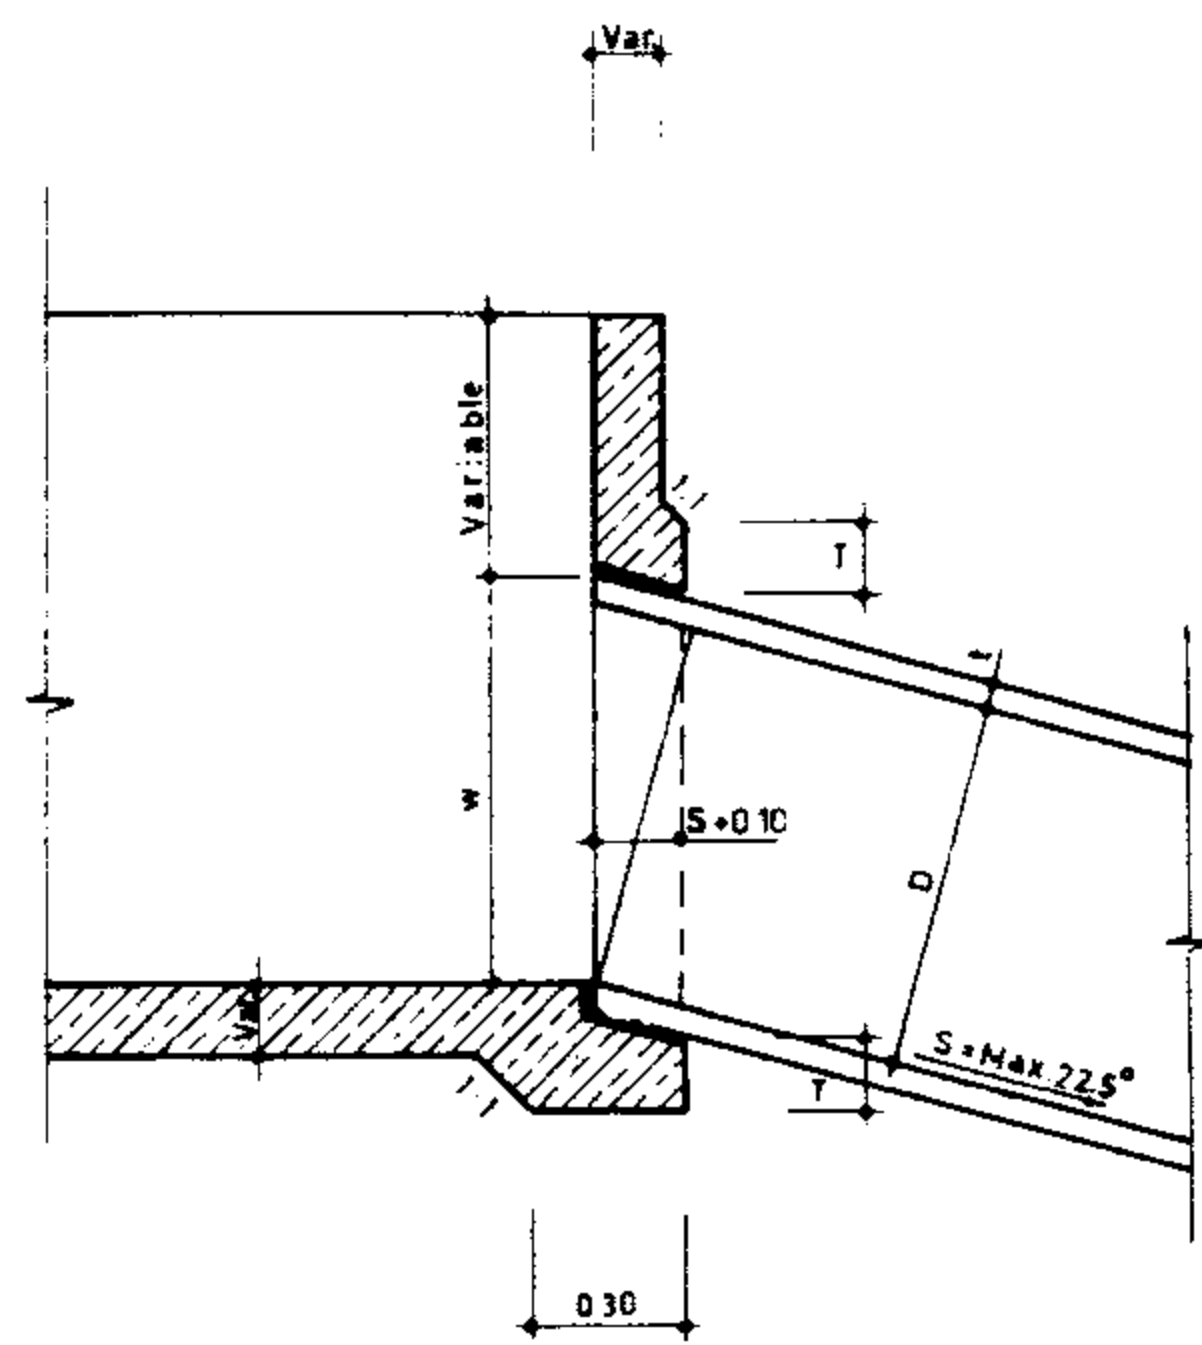


SLOPING PIPE WITHOUT GATE, AND CUT-OFF WALL

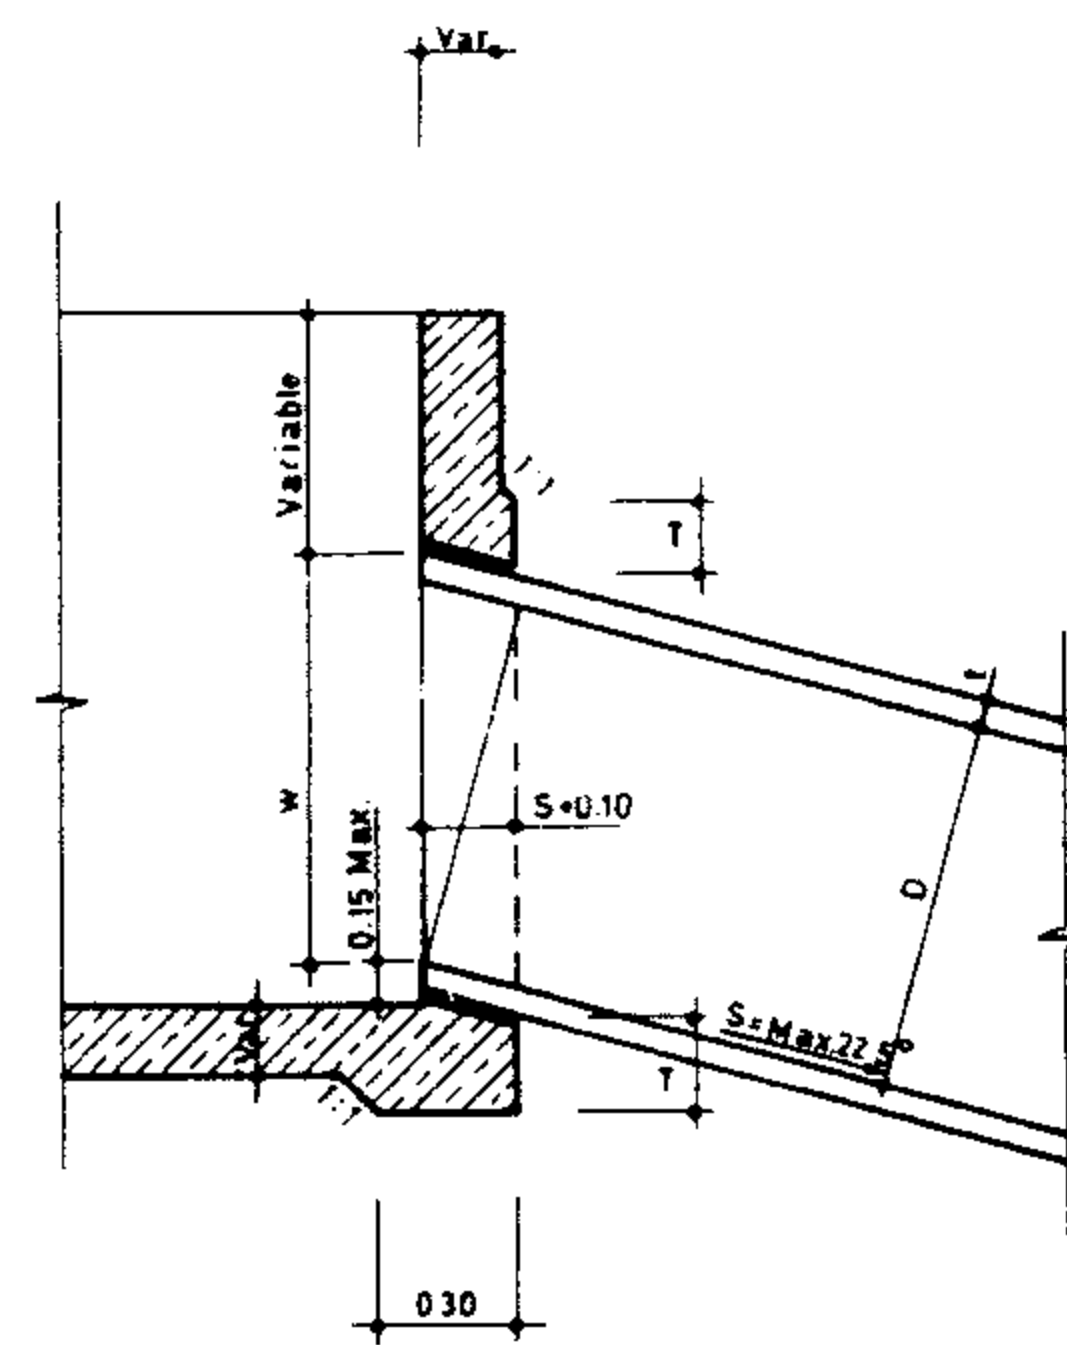

SLOPING PIPE WITH GATE, AND WITHOUT CUT-OFF WALL

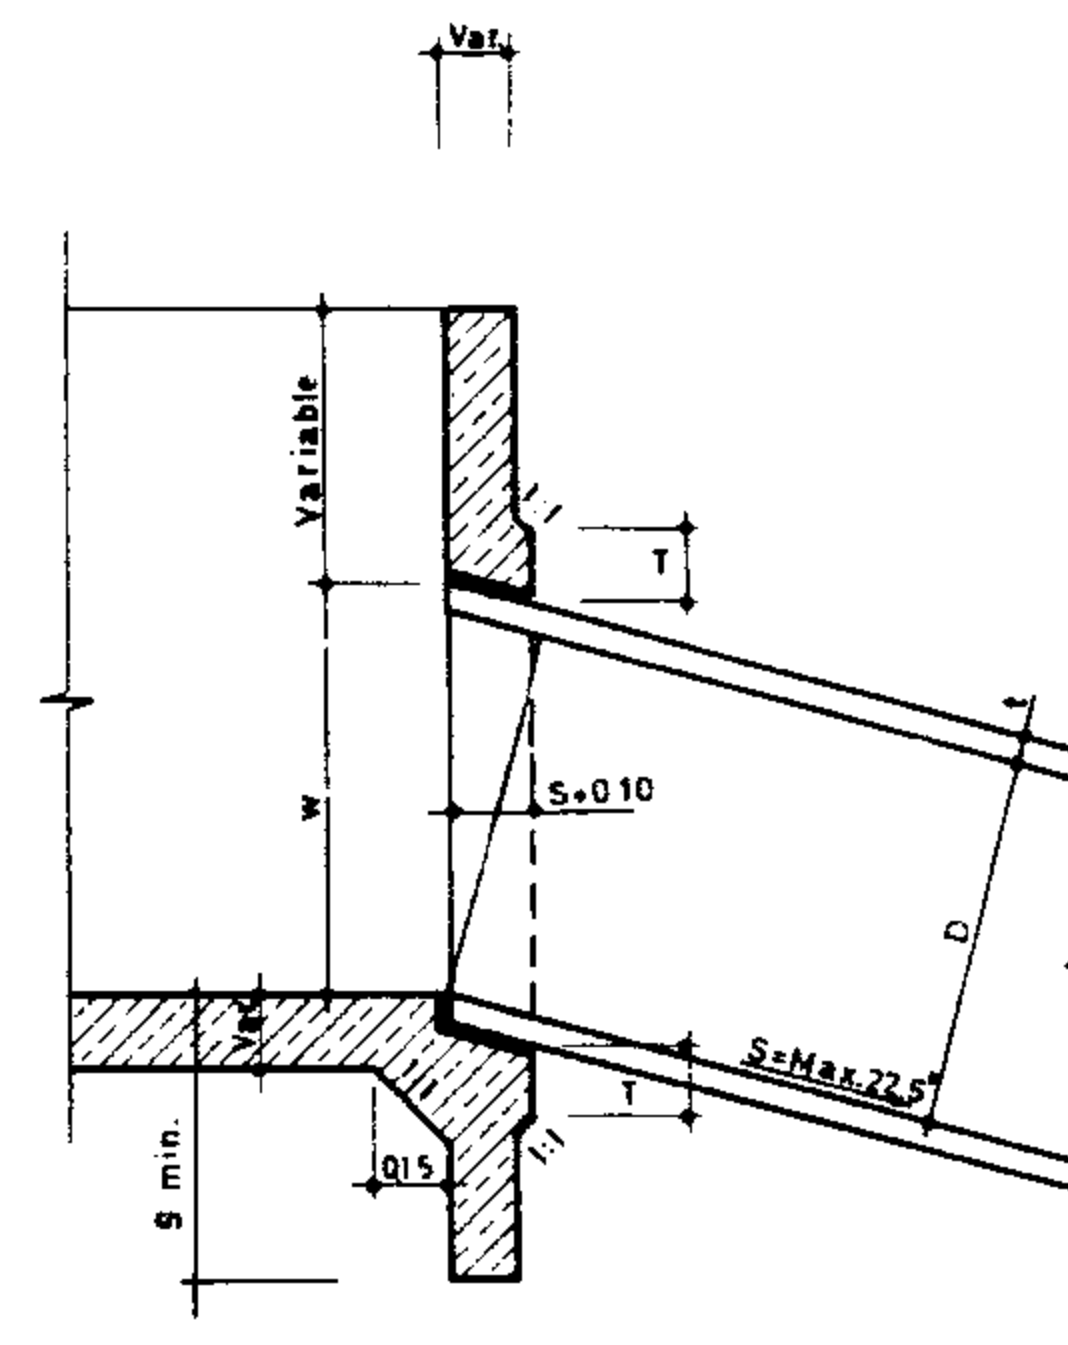

SLOPING PIPE WITHOUT GATE, AND WITH CUT-OFF WALL

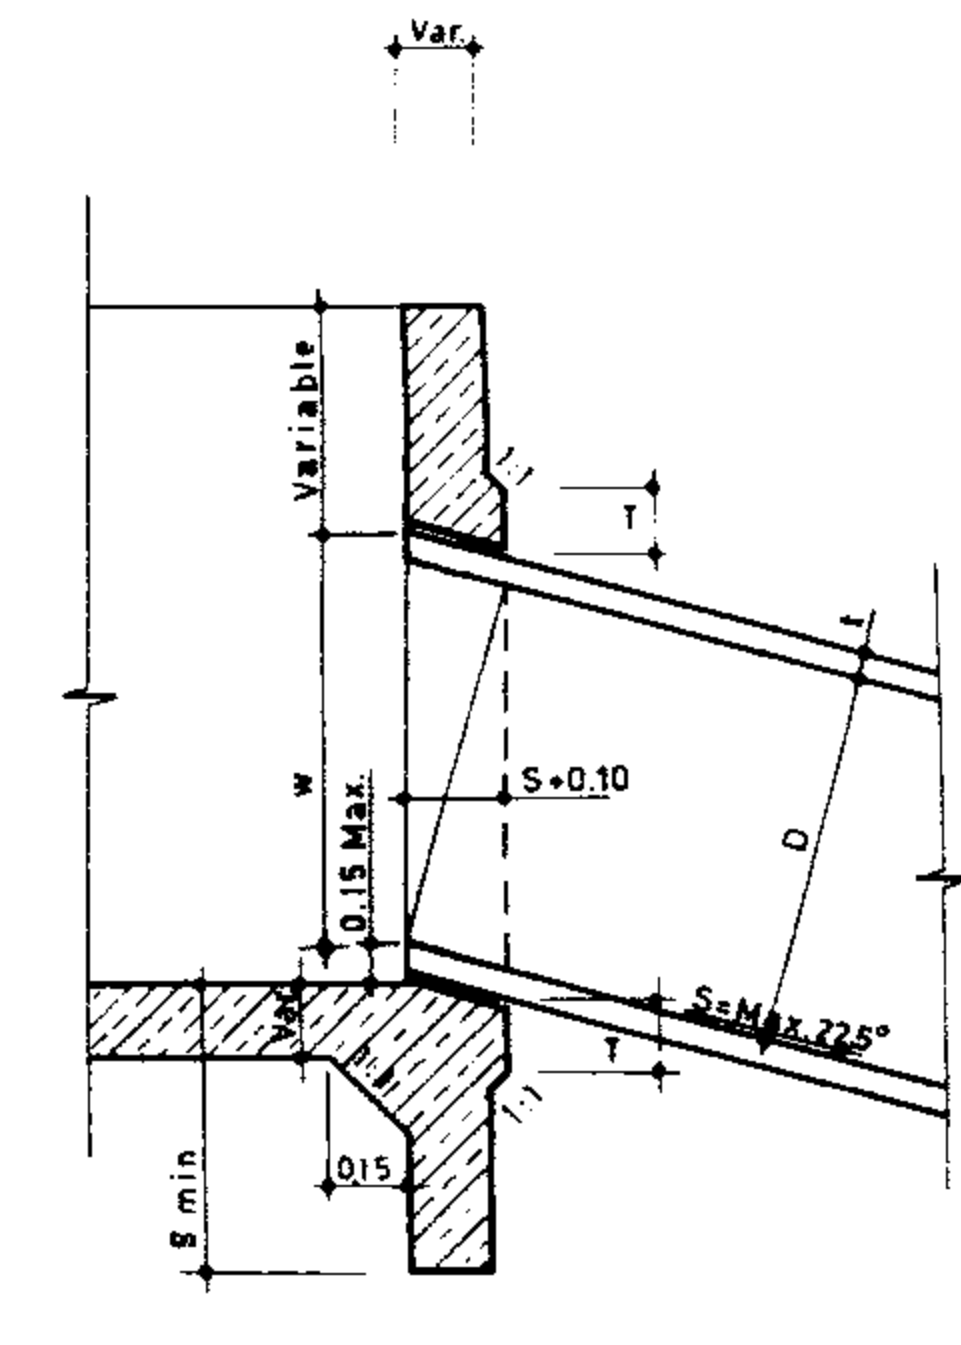

SLOPING PIPE WITH GATE, AND CUT-OFF WALL

Var = Varies or Variable

NOTE:

Extra concrete thickness around pipe connection can be eliminated by the engineer if required.

REFERENCE DWGS: For dimensions w & g see dwg. No 17/1/1/01
For general details see dwgs. No 20/2/1/01 to 20/2/1/03

Scale: N.T.S

Date:

Approved:

IRRIGATION & DRAINAGE STANDARDS


DWG. No 17/1/1/02

Sheet No 2 of 3 Rev. No


TYPICAL PIPE CONNECTION
TO STRUCTURES
(OPTION 2)

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BEUREAU




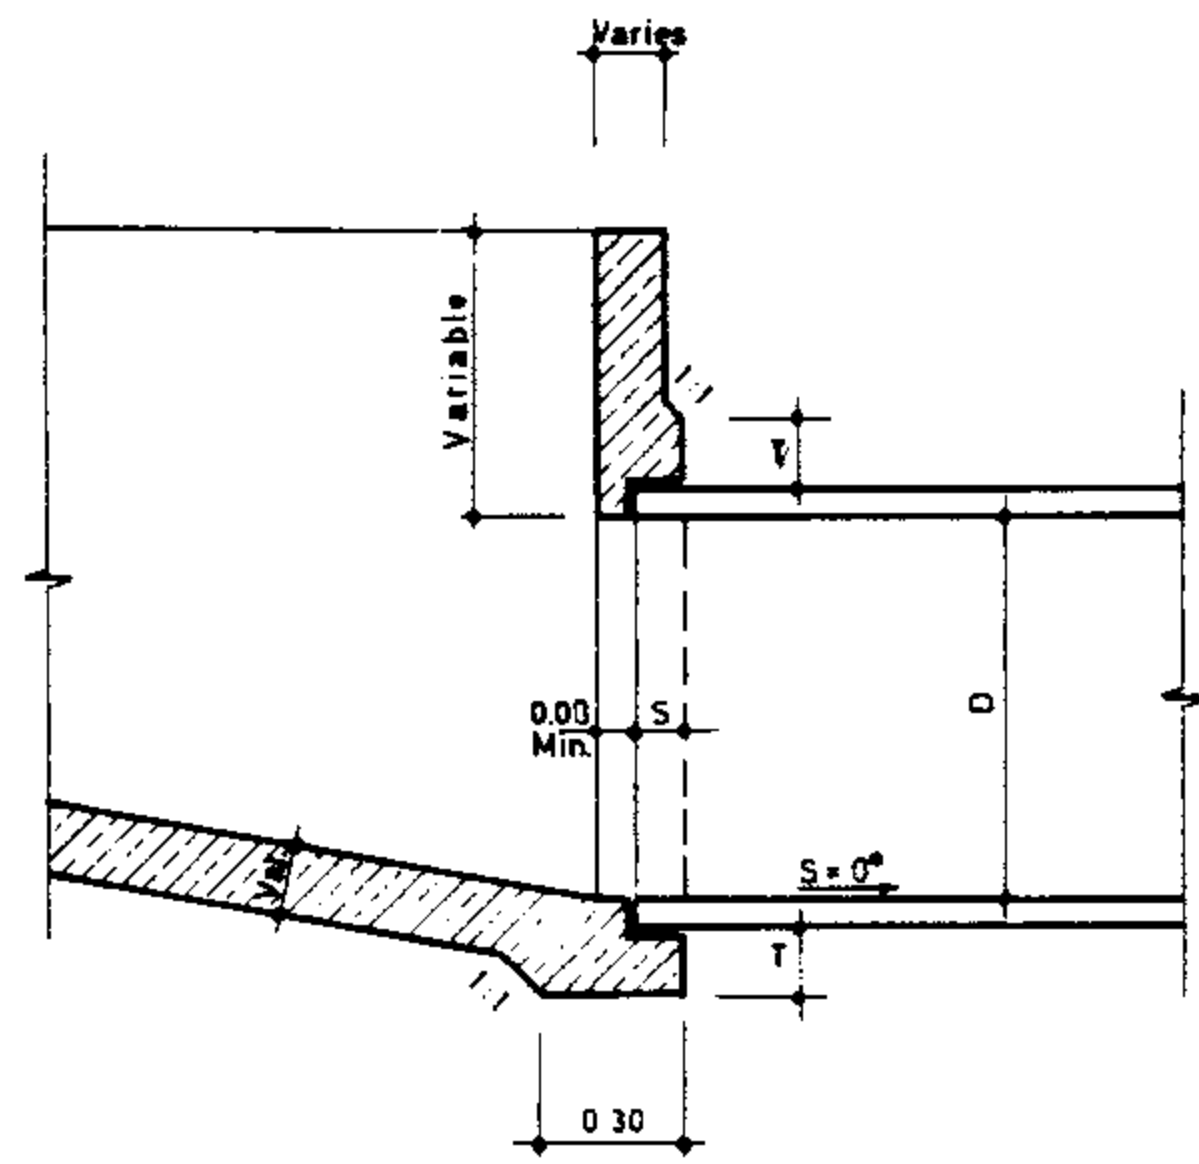


STRAIGHT PIPE WITHOUT GATE, AND CUT-OFF WALL

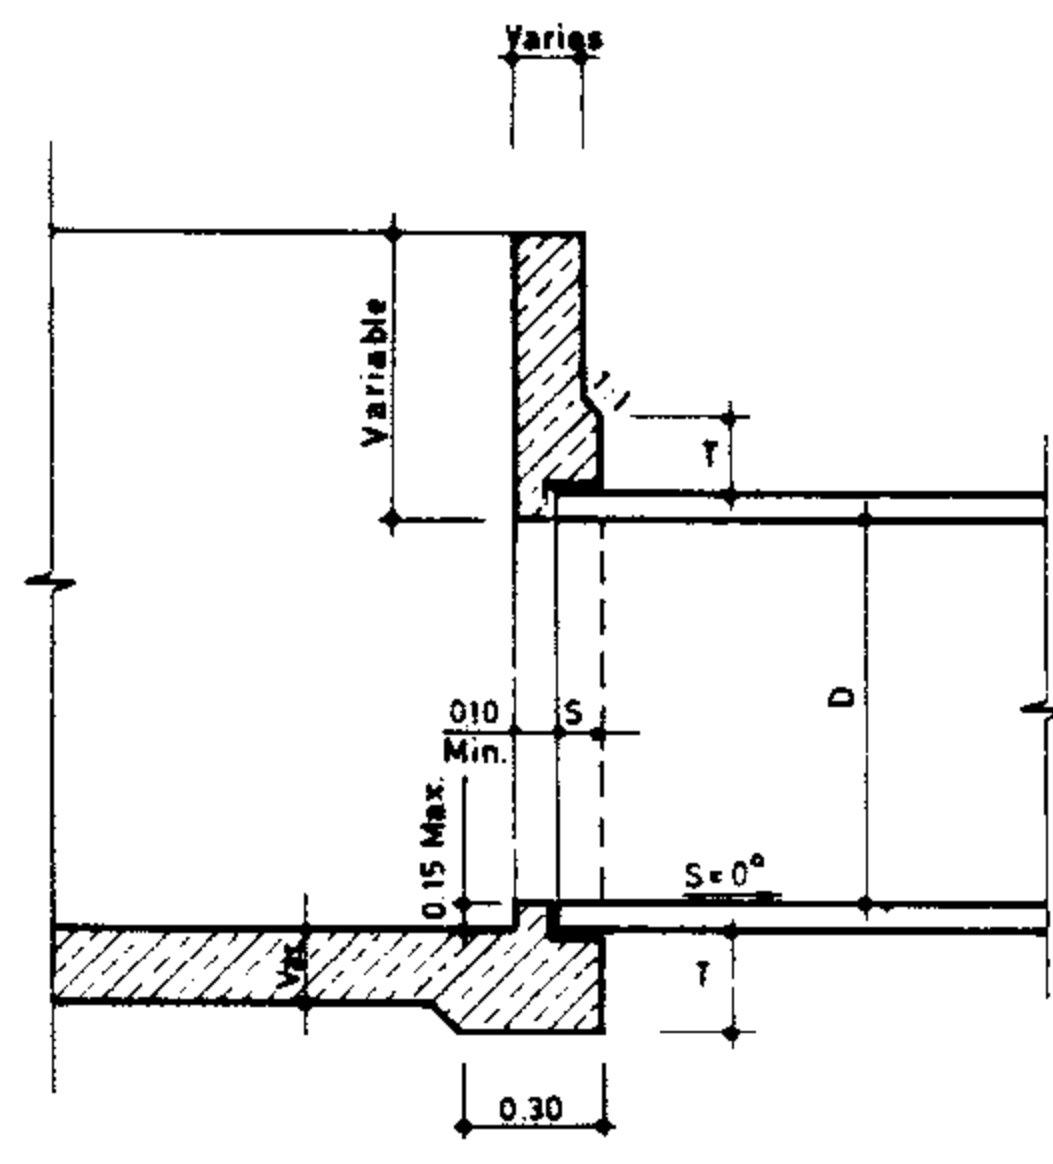

STRAIGHT PIPE WITH GATE, AND WITHOUT CUT-OFF WALL

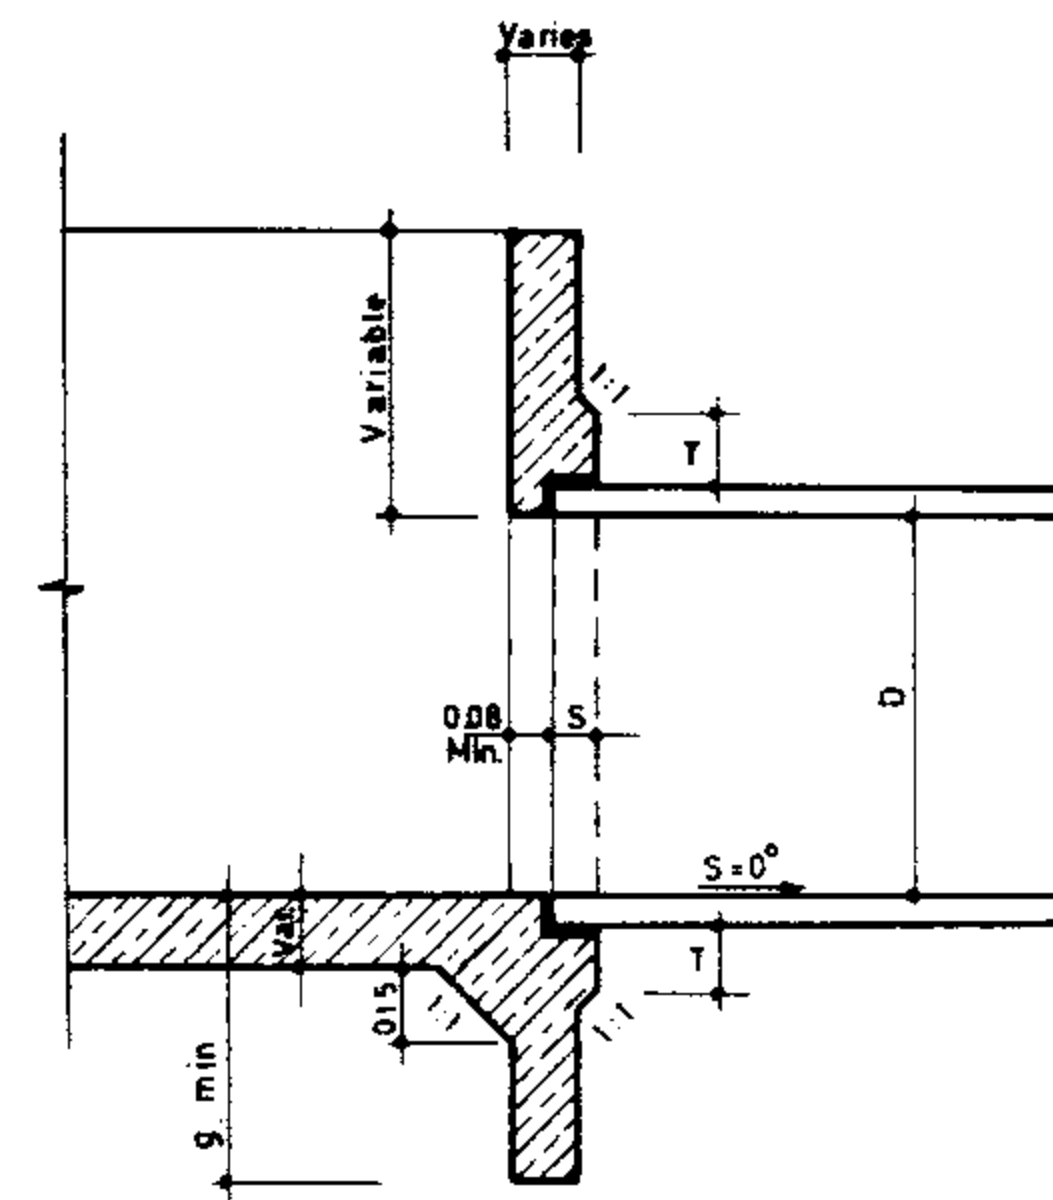

STRAIGHT PIPE WITHOUT GATE, AND WITH CUT-OFF WALL

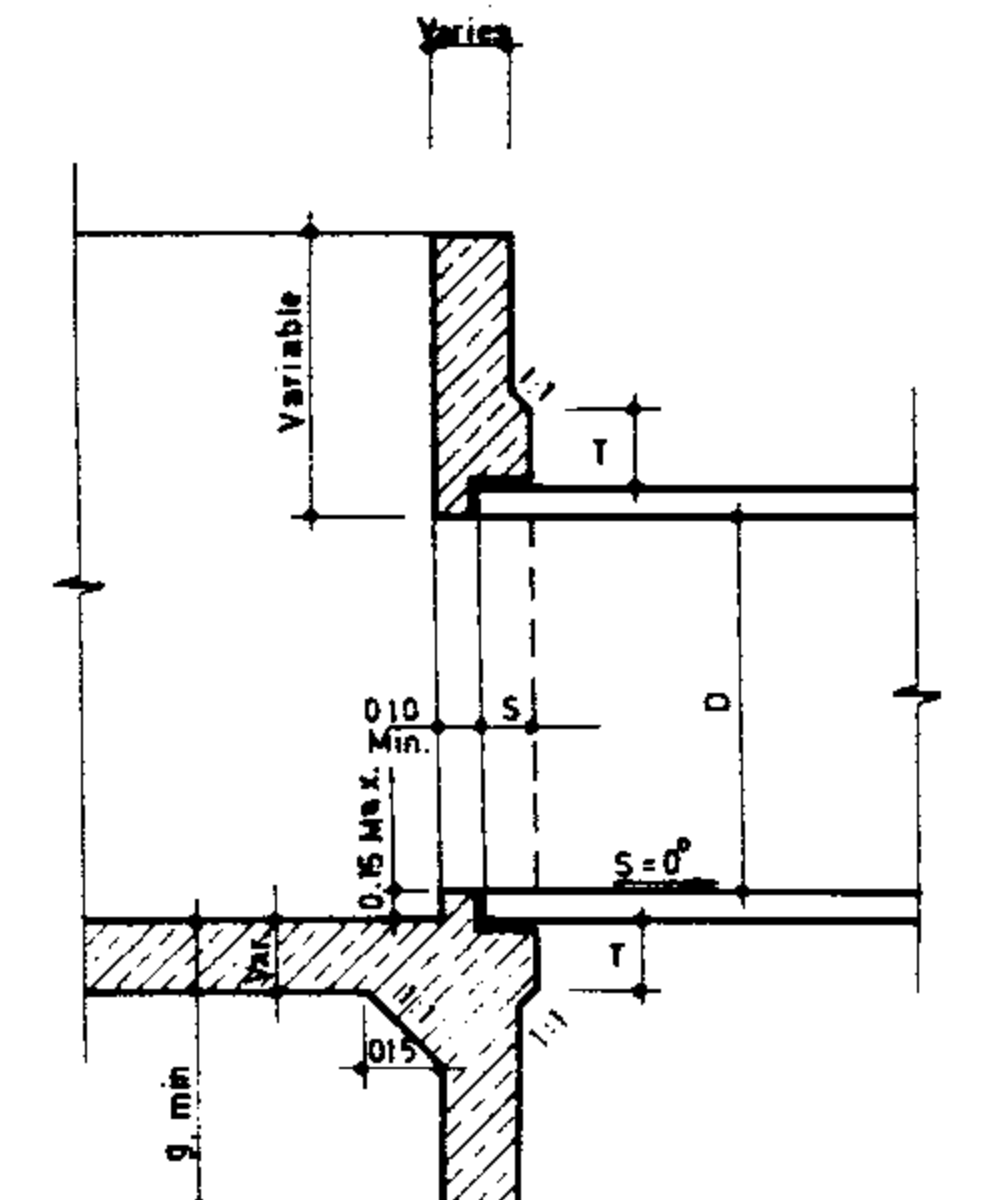


STRAIGHT PIPE WITH GATE, AND CUT-OFF WALL


DIMENSION TABLE

D	40	50	60	70	80	90	100	120	140
S	10	10	10	15	15	20	20	20	20
T	15	15	15	20	20	20	20	20	20


All dimensions are in cm.

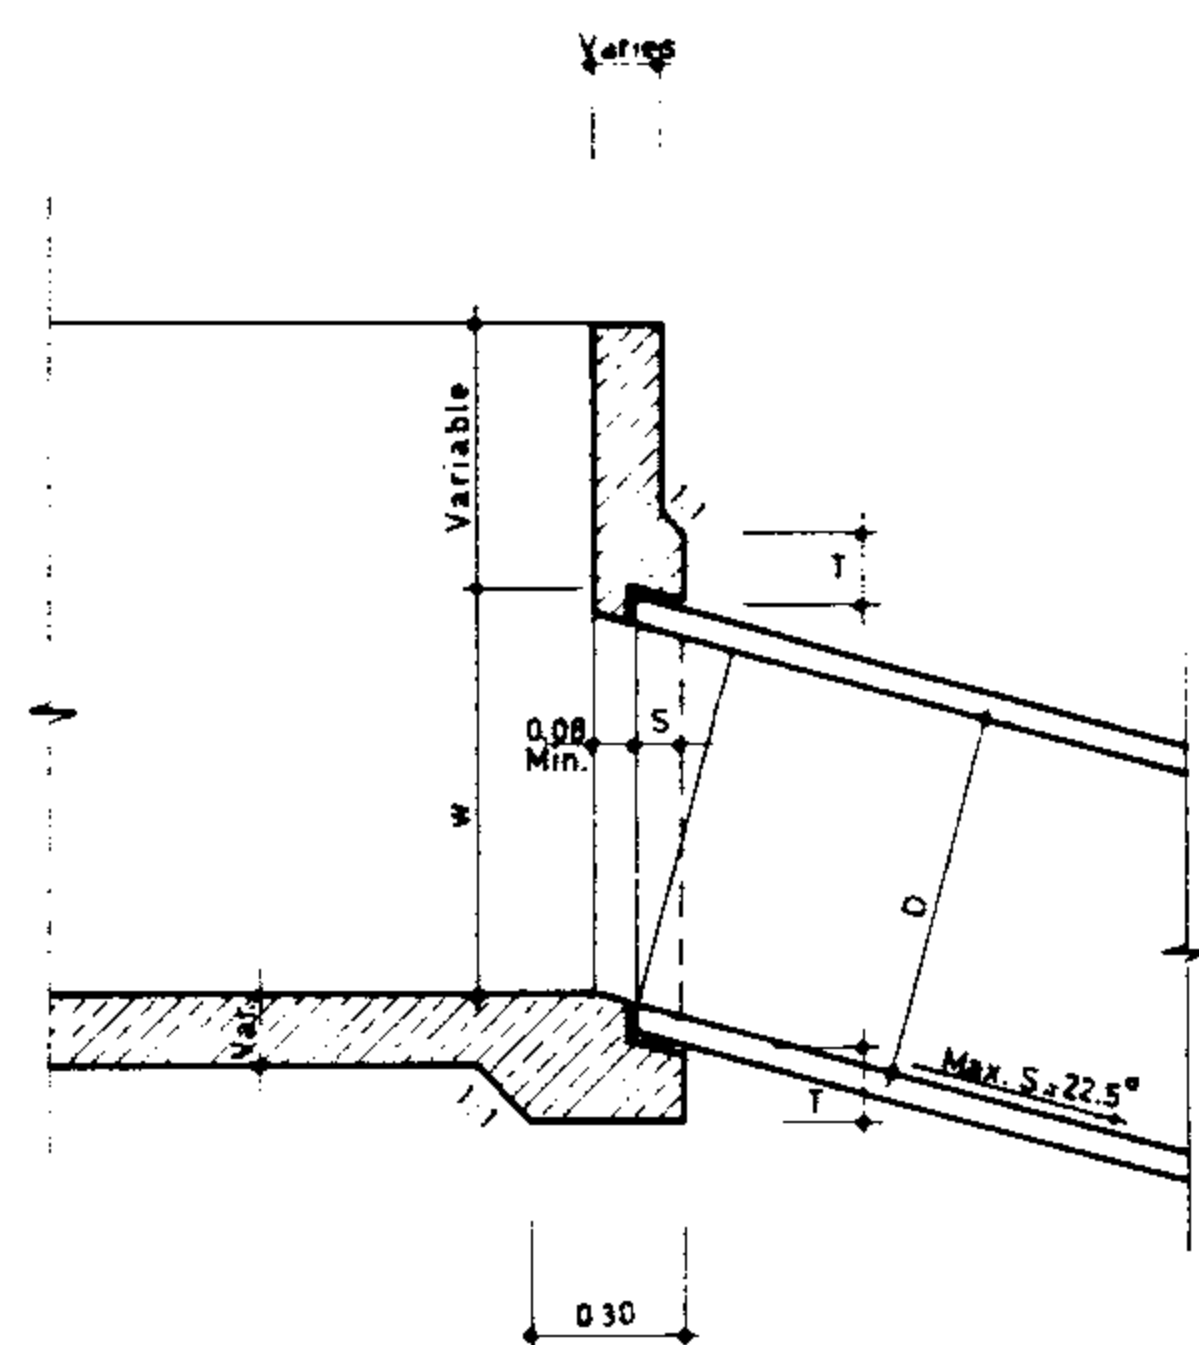


SLOPING PIPE WITHOUT GATE, AND CUT-OFF WALL

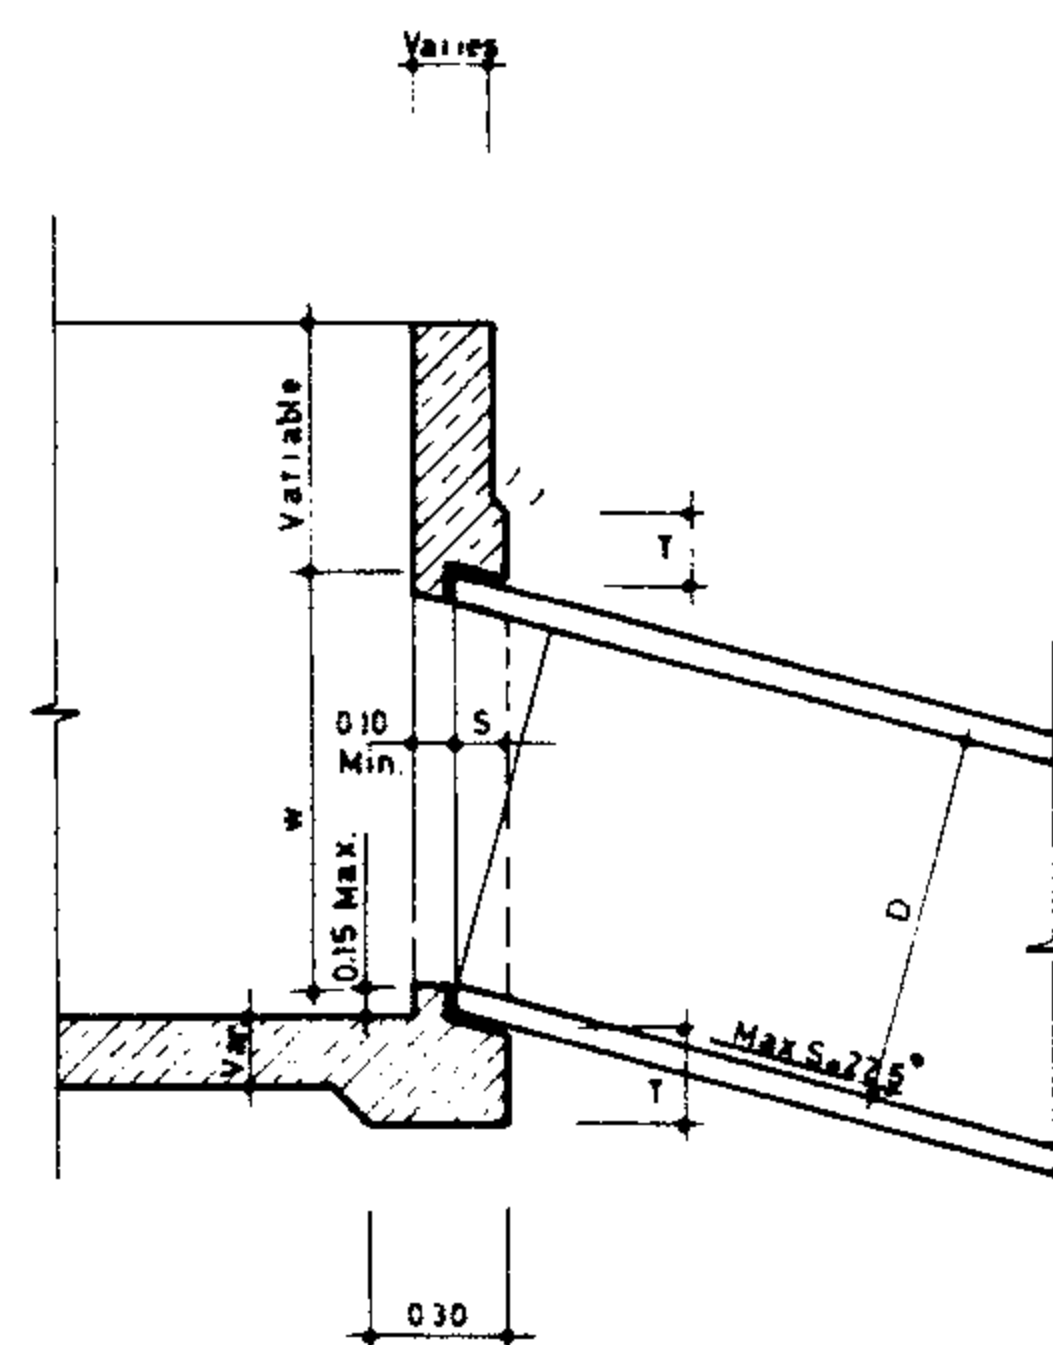

SLOPING PIPE WITH GATE, AND WITHOUT CUT-OFF WALL

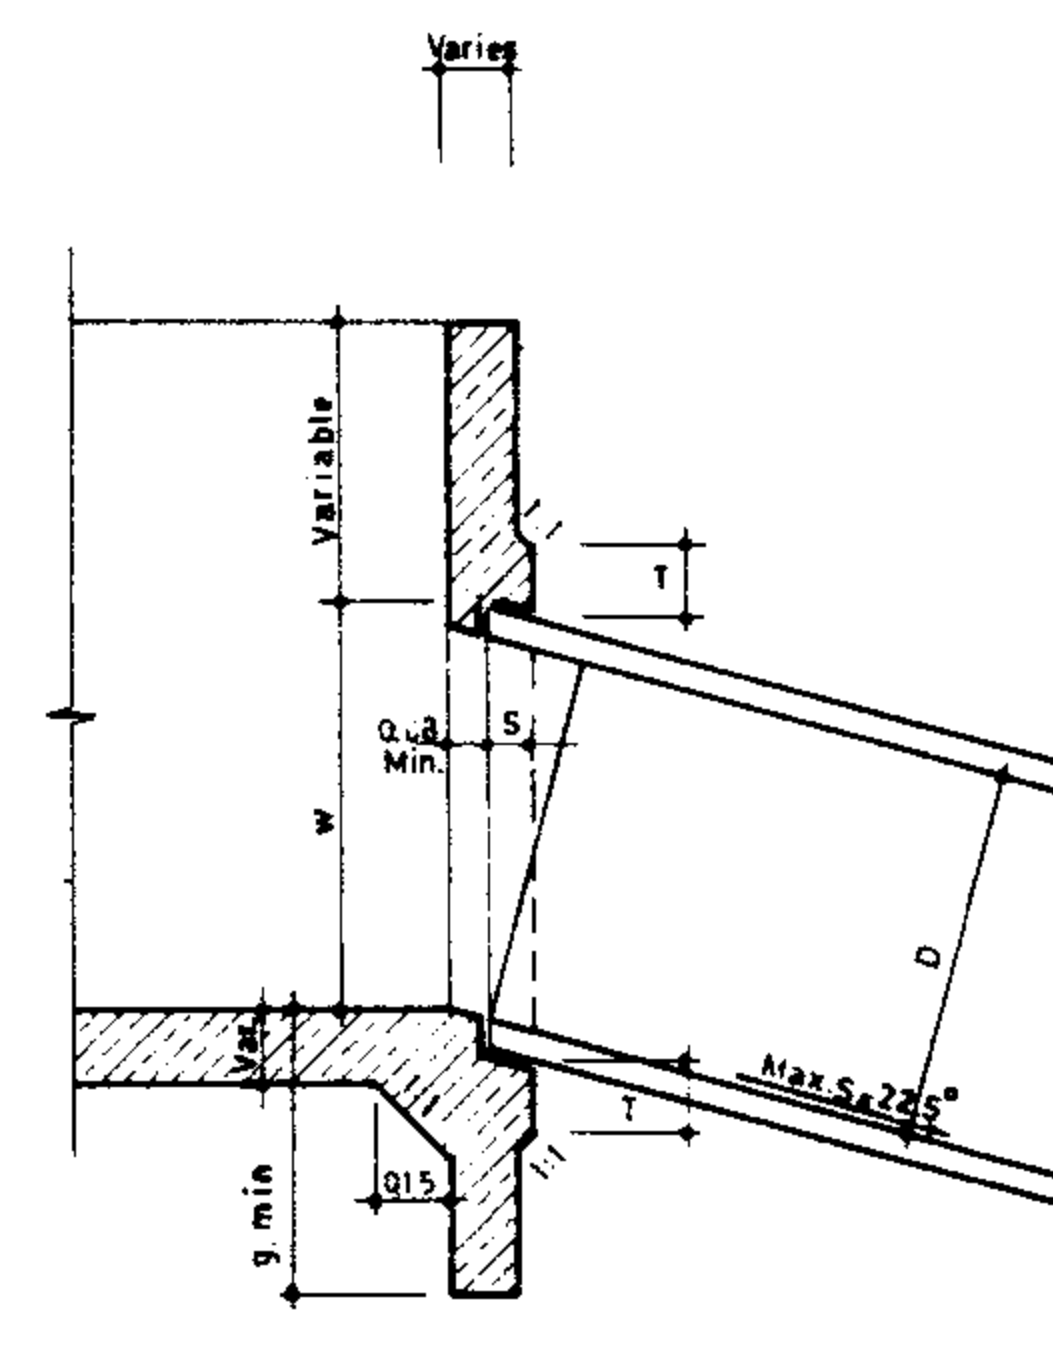

SLOPING PIPE WITHOUT GATE, AND WITH CUT-OFF WALL

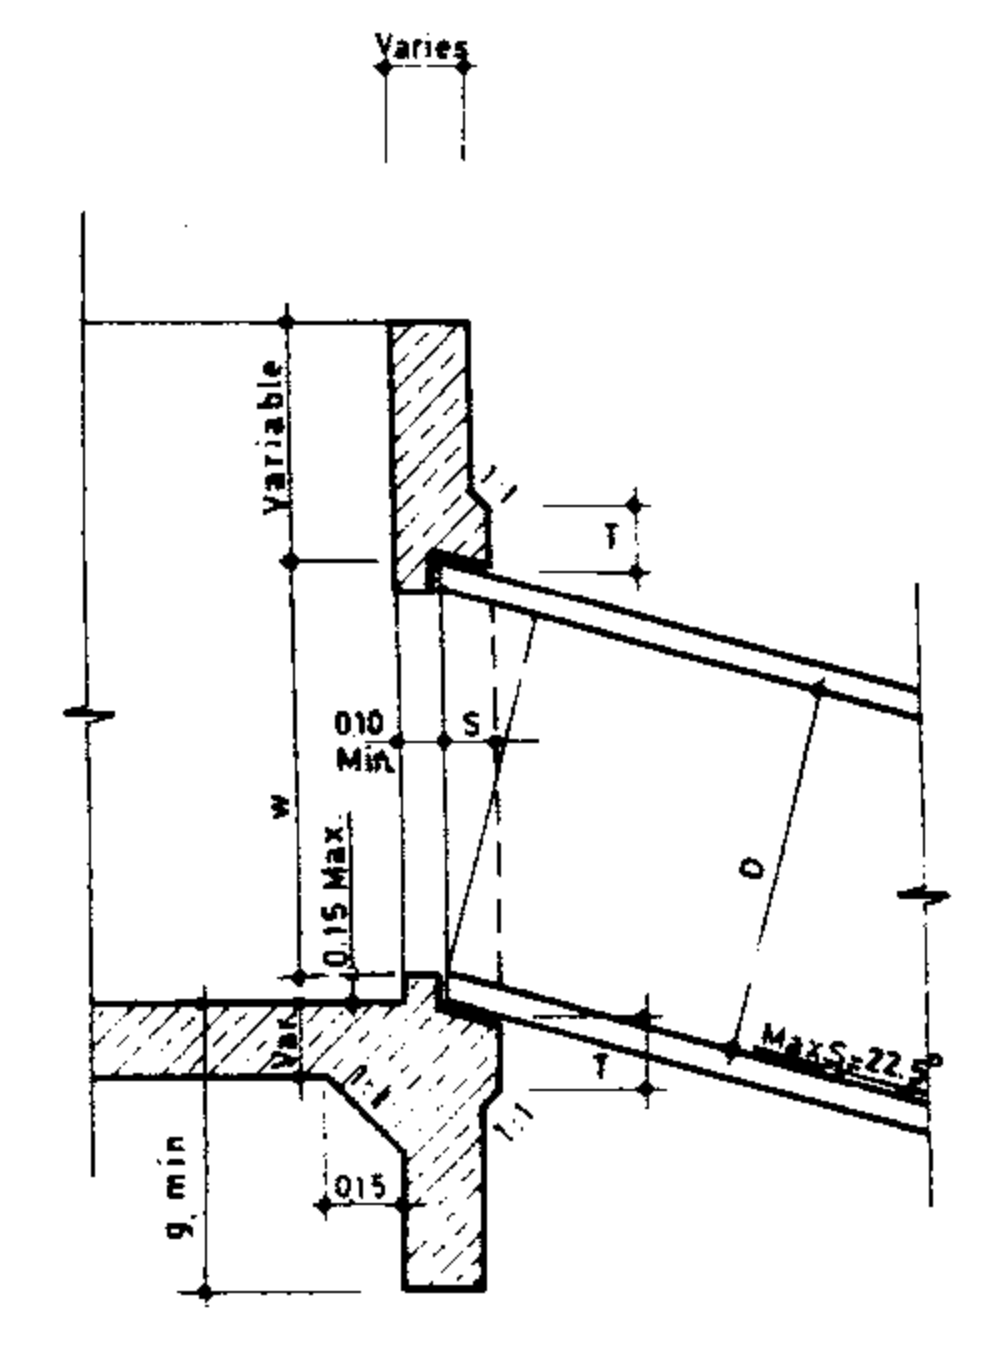

SLOPING PIPE WITH GATE, AND CUT-OFF WALL

Var. = Varies or Variable

NOTE:

Extra concrete thickness around pipe connection can be eliminated by the engineer if required.

REFERENCE DWGS: For dimension w & g see dwg. 17/1/1/01
For general notes see dwgs-Nº 20/2/1/01 TO 20/2/1/03

Scale: N.T.S	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG No. 17/1/1/03	
Approved:	Sheet No 3 of 3	Rev.No.
TYPICAL PIPE CONNECTION TO STRUCTURES (OPTION 3)		

ISLAMIC REPUBLIC OF IRAQ
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BEUREAU

DESIGN CONSIDERATIONS

1-1 General- (a) **Usage-** Baffled apron drops are used in canals or wasteway channels to provide dissipation of excess energy at drops in grade. Energy dissipation occurs as the water flows over the concrete baffle blocks which are located along the floor of the chute. The ability of the baffled apron drop to accommodate a widely fluctuating tailwater elevation makes it especially suitable as an energy dissipator at the end of a canal or wasteway that discharges into a reservoir. The length of the baffled apron does not affect the efficacy of the structure. It is effective in dissipating excess energy for drops of any magnitude, but it becomes uneconomical for large flows with great drops, due to the wide section and numerous blocks required. Where an excess of trash, trees, or tumbleweeds accompanies the flow, they may become lodged in the baffle blocks, restricting the flow. Removal of this material is sometimes difficult.

(b) **Inlet Control Features-** Various types of inlet control features are utilized to maintain an upstream water surface as required for turnouts; or to provide velocity of approach consistent with the scouring tolerance of the upstream section or to avoid the excessive splashing that would result from supercritical flow at the inlet. The more common types of inlet control features are as follows:

(b.1) **Sill control-** A sill may be provided at the inlet, as shown in figure 1.A, to reduce the velocity of approach, and minimize scour in the upstream section. The sill also provides a controlled water surface for upstream turnouts. To permit complete drainage of the upstream pool, a slot is provided through the crest, as shown in figure (2.A). The inlet should be kept free of sediment deposits, as the extensive accumulation of sediment would allow the flow to sweep over the sill at a velocity too fast for effective dissipation of energy.

(b.2) **Control notch-** A control notch may be provided at the inlet, as shown in figure 1.B, to control the upstream water depth. While the control notch is designed to maintain normal depth and velocity in the upstream section, it produces a fast velocity in

the inlet itself, causing splashing as the fast velocity flow strikes the first row of baffle blocks. Excessive splashing may require frequent maintenance of the erosion protection. The control notch should be kept free of trash.

(b.3) **Inlet without control-** The simplest type of inlet (shown in fig. 1C) is used where there is not a requirement to control the upstream water surface for turnout deliveries, and where the upstream channel is sufficiently stable to withstand (without erosion) the higher velocities associated with water surface drawdown. To minimize splashing as the flow strikes the first row of baffle blocks, an invert curve may be provided to allow the flow to strike the blocks in a direction normal to their upstream face. Where flows are infrequent, and some splashing is permissible, the curve is sometimes omitted, as shown in figure 1B.

(C) Miscellaneous Features.-

(C.1) **Bridge deck-** Where a crossing is required, a bridge deck may be incorporated in the inlet design.

(C.2) **Cutoff walls and wingwalls.-** In addition to the inlet cutoff walls, wingwalls are provided at, or near the downstream end of the structure, to decrease percolation and to retain the backfill along the slope. Where the downstream channel is subject to degradation, a cutoff wall is extended down from the invert, as shown in figure (2.B). The wingwalls may be located at the end of the structure to coincide with the cutoff, but they are often located a few meter upstream from the end. This provides a better stilling action at the outlet, and raises the top elevation of the wingwall, which should be located above the tailwater elevation to minimize erosion.

(C.3) **Protective drains.-** Protective drains are sometimes provided under the invert of the baffled apron drop to relieve the uplift pressure following the termination of flow.

1-2 Design Considerations.- (a) **Capacity.-** The capacity of the baffled apron drop is a function of the allowable discharge, q , per m. of width, as shown in table 1. They have been operated for short periods at about twice the design capacity without excessive erosion.

(b) **Inlet.-** The inlet should be the same width as the baffled apron, and should provide a velocity of approach slower than the critical velocity, V_c . Where splashing must be minimized, the entrance velocity should not exceed about $\frac{V_c}{2}$, where

$$V_c = \sqrt[3]{gq}$$

in the rectangular inlet section. Other design considerations are as follows:

(b.1) **Sill control.-** The inlet length should be at least $2d_1$, as shown in figure 1A. The required height of the sill above the inlet floor may be determined from the energy balance between the inlet and the upstream channel.

Thus,

$$E_{s1} = E_{sc} + h_i + h_s$$

or

$$h_s = E_{s1} - E_{sc} - h_i$$

where

h_s is the sill height,

$E_{s1} = d_1 + h_{v1}$ in the upstream channel,

$E_{sc} = d_c + h_{vc}$ in the control section at the sill,

and

$$h_i = 0.5 \Delta h_v = 0.5 (h_{vc} - h_{v1})$$

$$= 0.5 \left[\frac{V_c^2}{2g} - \frac{v_1^2}{2g} \right]$$


The curvature of the sill crest should terminate at its point of tangency with the slope of the downstream apron. This point should not be more than 0.30 m in elevation below the crest. This is assured by limiting the radius of curvature to a maximum of 2.7 m. A 1.80 m radius is frequently used. The sill has a 15 cm-wide slot to provide drainage of the upstream pool.

(b.2) **Control notch.-** A control notch, where used should conform to the design requirements of dwg No. 12/5/2/01. The rectangular inlet section should begin 1.5 m upstream from the control notch, and the length between the notch and the sill should be equal to three times the upstream water depth, as shown in figure 1B, to permit the flow to spread to the full width of the section.


(c) **Baffled Apron Dimensions** (see fig.2).- The following steps are suggested as a guide to be used in setting the dimensions :

(c.1) Set the longitudinal slope of the chute floor and sidewalls at 2 to 1 (tan $\phi = 0.5$).


(c.2) Approximate width of structure should be set by the relation $B = \frac{Q}{q}$

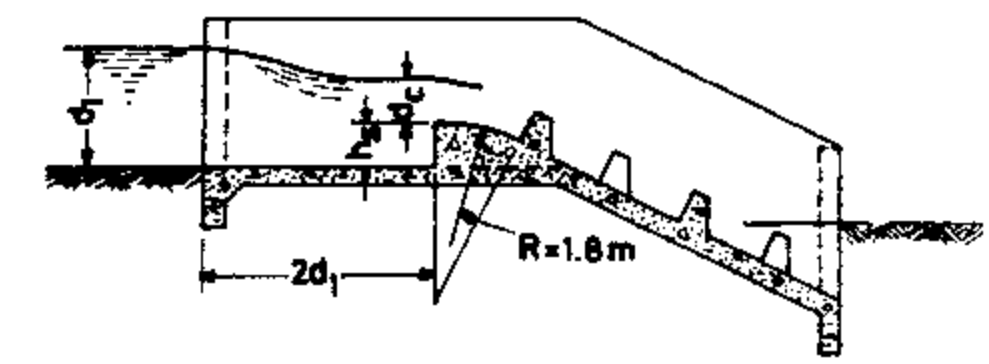

SILL CONTROL
Fig. 1-A Not to scale.

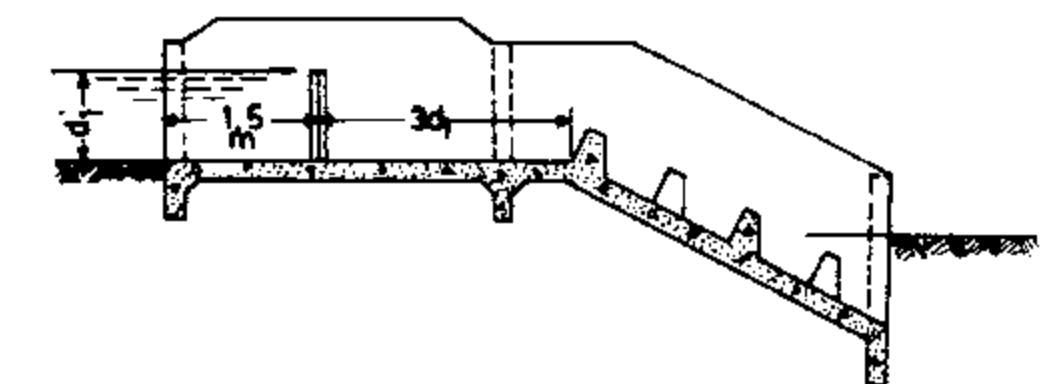

NOTCH CONTROL
Fig. 1-B Not to scale.

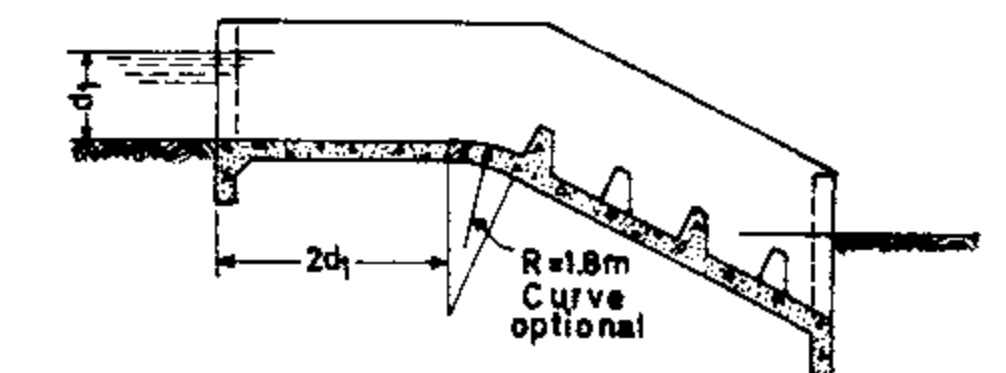

NO UPSTREAM CONTROL
Fig. 1-C Not to scale.

FIG 1: Typical inlet types

Table 1.- Recommended discharge

Q capacity, m ³ /s	q *Discharge per m. of m ³ /s
0 to 1.10	0.470 to 0.940
1.11 to 2.80	0.940 to 1.42
2.81 to 5.35	1.42 to 1.89
5.36 to 13.00	1.89 to 2.83

* Discharge per m. of width, q should be interpolated within the range indicated.

+++++

Where

B = width,
 Q = maximum total discharge, and
 q = allowable discharge per m of width (see table 1).

REFERENCE DWGS: For design example see dwgs No. 15/2/2/02 & 16/2/2/03

Scale:	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. No. 16/2/2/01	
Approved:	Sheet. No. 1 of 4	Rev. No.
	BAFFLED APRON DROPS (DESIGN CONSIDERATIONS PAGE 1)	

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARDS BUREAU

For the permissible entrance velocity, see design Consideration part "b".

(c.3) Set the first row of baffles so that the base of the upstream face is at the downstream end of the invert curve and no more than 0.30 m in elevation below the crest.

(c.4) Baffle block height, h_b , should be about 0.9 times critical depth, d_c , to nearest cm.

(c.5) Baffle block widths and spaces should be equal, and not less than h_b , but not more than $1\frac{1}{2} h_b$. Partial blocks, having a width not less than $\frac{1}{3} h_b$ and not more than $\frac{2}{3} h_b$ should be placed against the sidewalls in rows 1, 3, 5, 7, etc. Alternate rows of baffle blocks should be staggered so that each block is downstream from a space in the adjacent row. The structure width, B, determined above, should be adjusted so convenient baffle block widths can be used.

(c.6) The slope distance, s, between rows of baffle blocks, as shown in fig. 2, should be at least $2 h_b$, but no greater than 1.8 m.

A spacing of 1.80 m may be used for all blocks equal to or less than 0.90 m in height.

(c.7) A minimum of four rows of baffle blocks should be used. The baffled apron should be extended so that the top of at least one row of baffle blocks will be below the bottom grade of the outlet channel as discussed in subsection (1.2)-(c.3). The apron should be extended beyond the last row of blocks a distance equal to the clear space between block rows.

(c.8) Baffle blocks are constructed with their upstream faces normal to the chute floor. The longitudinal thickness, T, of the baffle blocks at the top should be at least 0.20 m, but not more than 0.25 m. See block detail, figure 2-C.

(c.9) Suggested height of the walls to provide adequate freeboard is three times the baffle block height measured normal to the chute floor. It is generally not feasible to set the freeboard for these structures to contain all of the spray and splash.

(d) Uplift Stability. - The net force causing flotation of the structure should be considered, assuming a sudden cessation of flow in the channel. The net flotation force is equal

to the weight of the empty structure minus the hydrostatic force remaining in the soil around the structure. The magnitude of the maximum hydrostatic force, or uplift pressure varies with the theoretical height of the percolation gradient as determined by Lane's weighted-creep method, assuming an upstream gradient at the normal water surface elevation.

(e) Sliding Stability. -

(e.1) Long baffled apron drops. - The slope stability or tendency of long baffled aprons to slide down the 2 to 1 slope should be checked. This is particularly important in channels where erosion may remove the earth material at the downstream toe of the apron.

(e.2) Short baffled apron drops. - Short baffled apron drops also should be checked for sliding. Complete removal by erosion of the earth material downstream from the downstream cutoff walls should be assumed, unless the stability of the downstream channel is assured. A horizontal sliding plane should be assumed rather than the sloping plane assumed for long baffled apron drops.


If the forces tending to induce sliding are greater than the forces resisting sliding (using suitable safety factors), additional cutoff walls should be included.

(f) Miscellaneous Considerations. -


(f.1) Gravel or riprap should be provided on each side of the structure from the top of the slope to the downstream wingwall, extending laterally a distance equal to the wall height. This protection above the maximum downstream water surface is to prevent erosion from splashing. Below this water surface the protection is required to prevent erosion by eddy current. Wingwalls hold the slope protection in place.

(f.2) The channel grade may be controlled by a downstream structure, by geologic formation, or by being on a stable slope for the design capacity. A slope of 0.0018 will usually be stable for storm waterflows, but for normal canal flows the assumed slope should be no steeper than that of a canal in the same material.


The bottom row of blocks should be set below the computed channel invert elevation. When scour has occurred, to provide for future storms, the apron and walls should be extended by exposing the reinforcement in the end of the structure and bonding a new extension to the original installation

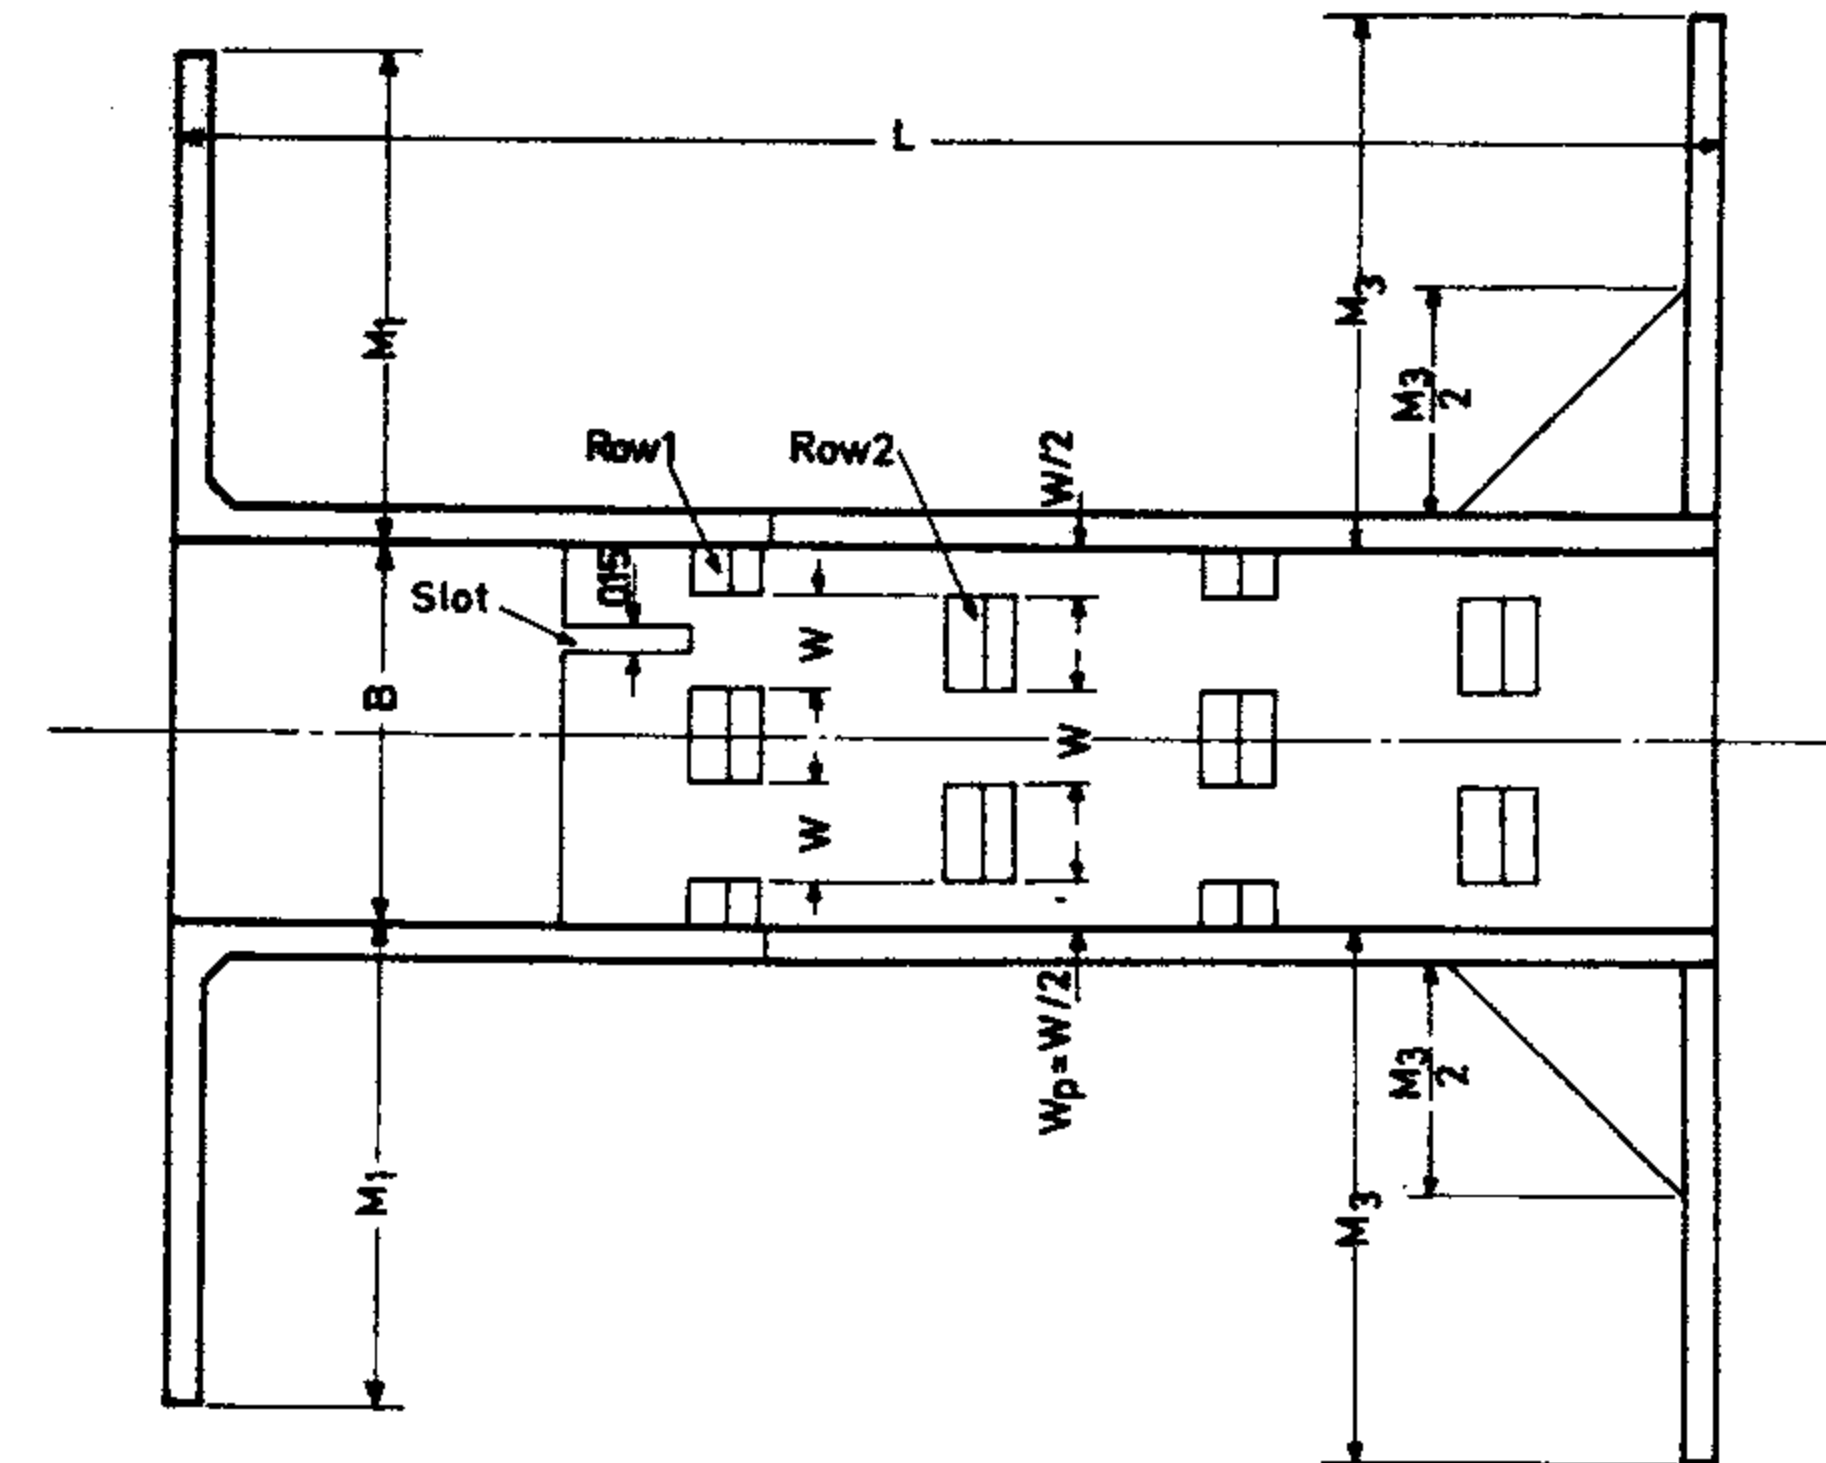

PLAN
Fig. 2-A Scale 1:75

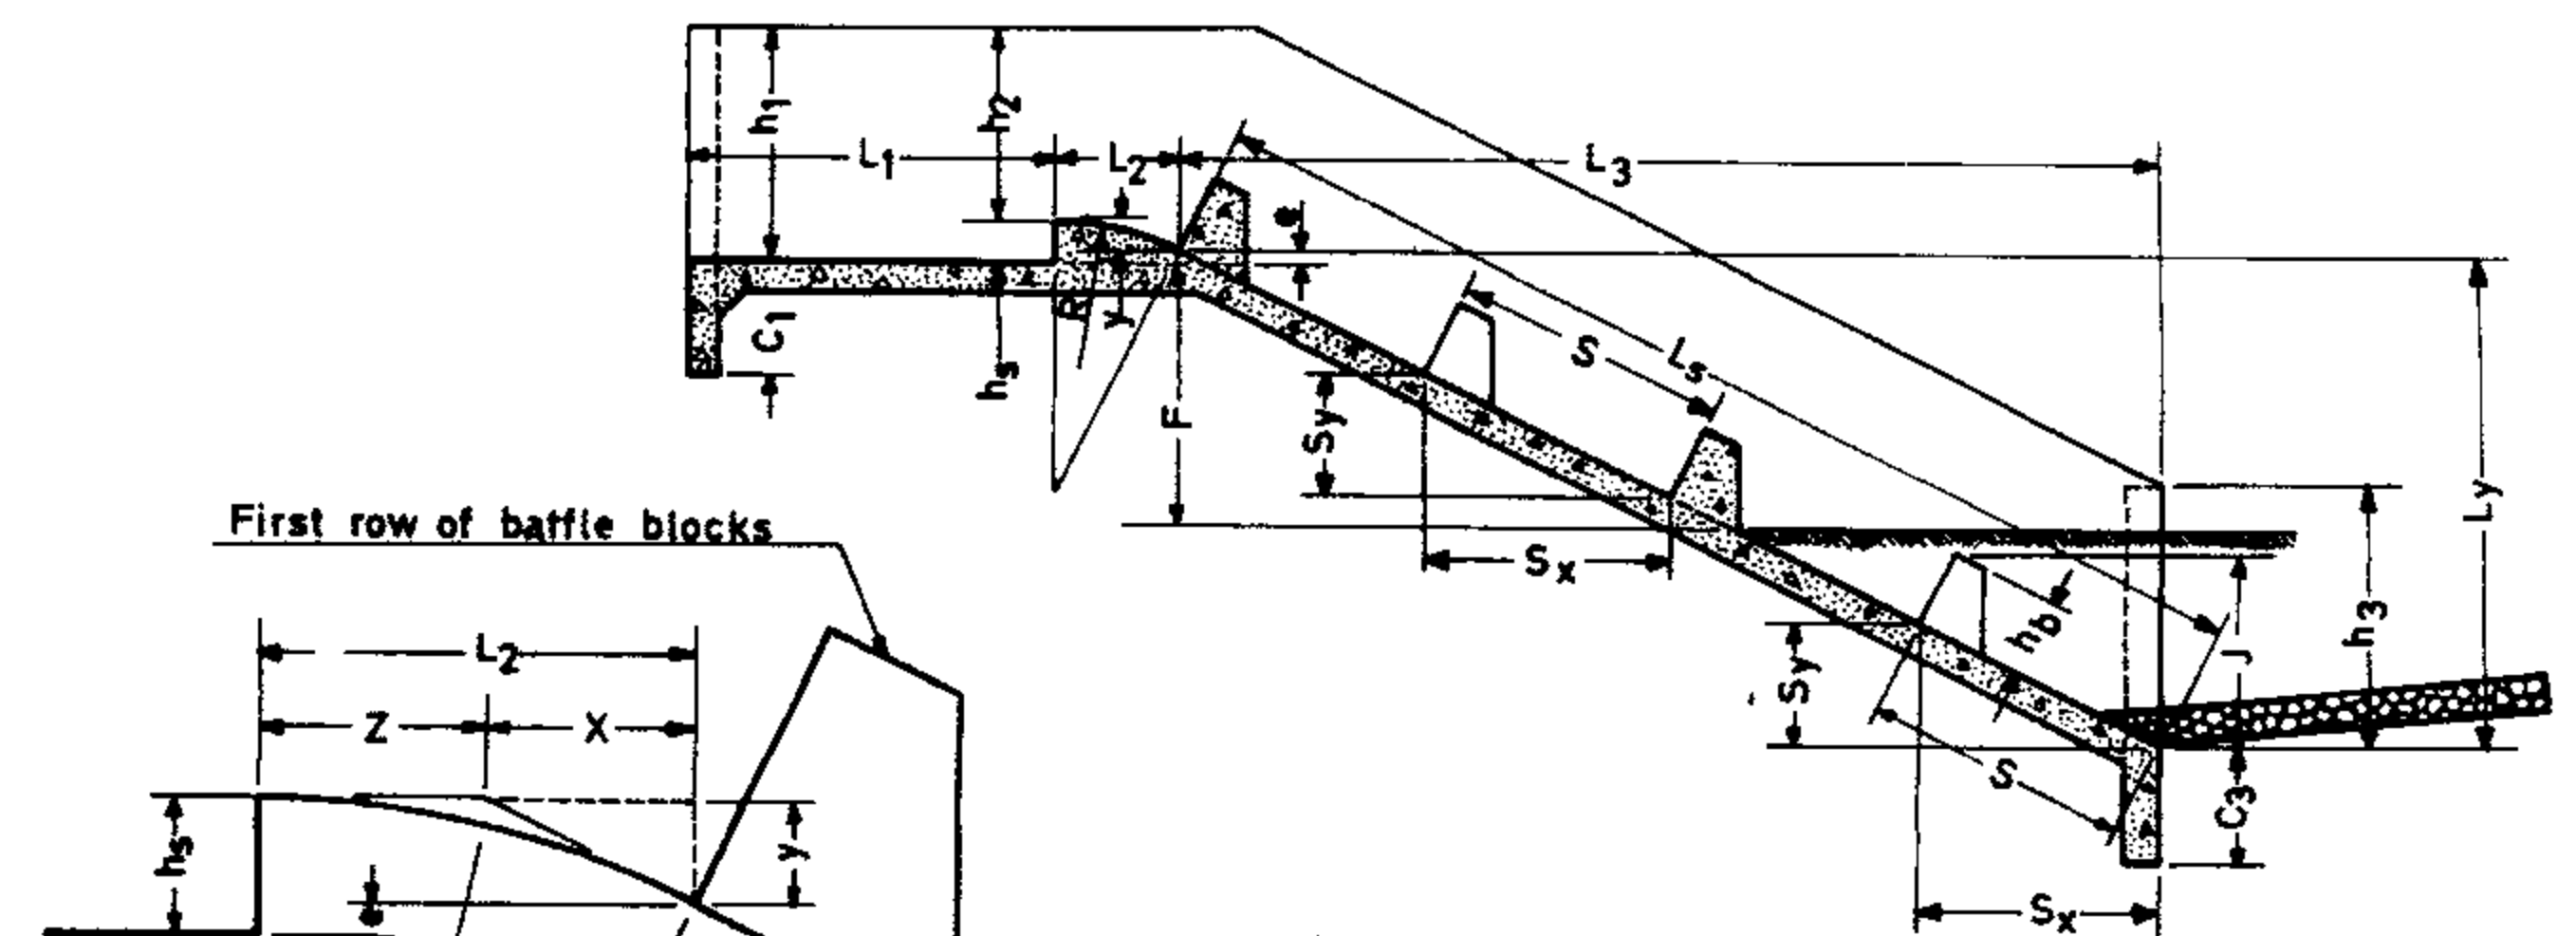

PROFILE
Fig. 2-B Scale 1:75

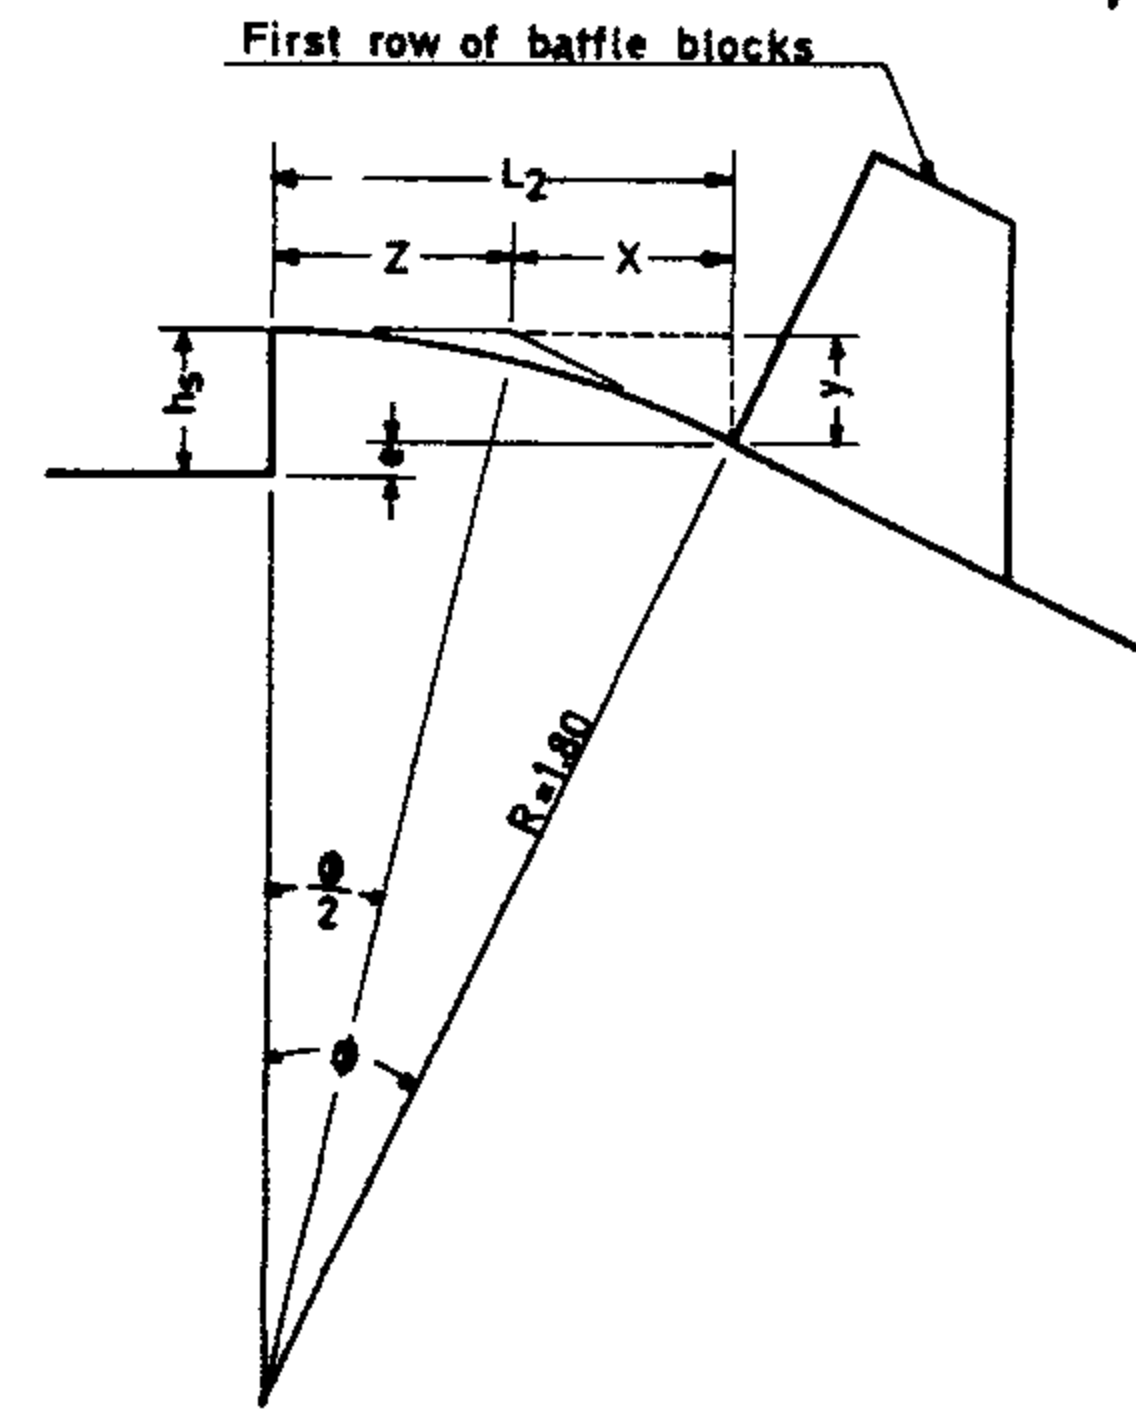

BLOCK DETAIL
Fig. 2-C Scale 1:20

Fig. 3. Sill curve dimensions
Scale 1:20

REFERENCE DWGS: For design example see dwgs. No. 16/2/2/02 & 16/2/2/01

Scale: 1:75, 1:20

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG. No. 16/2/2/02

Approved:

Sheet No. 2 of 4 Rev. No.

BAFFLED APRON DROPS
DESIGN CONSIDERATION (Page 2)

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARDS BUREAU

DESIGN EXAMPLE

A wasteway channel descends a slope that requires energy dissipation to prevent excessive erosion. As a dependable tailwater cannot be assured, it is decided that a baffled apron drop would best meet the need.

a) Assumptions.-

(a-1) On the basis of soil type and operating conditions it is decided that little splashing should be permitted, and a sill-type control is preferable (see fig. 1A).

(a-2) Hydraulic properties of the wasteway channel are as follows:

$$Q = 3.240 \text{ m}^3/\text{s}$$

$$b = 2.40 \text{ m} \quad n = 0.025$$

$$d_1 = 1.225 \text{ m} \quad s = 0.00035$$

$$A_1 = 5.192 \text{ m}^2 \quad ss = 1-1/2:1$$

$$v_1 = 0.624 \text{ m/s} \quad f_b \approx 0.60 \text{ m}$$

$$h_v = 0.02 \text{ m} \quad h_B = 1.225 + 0.60 = 1.825 \approx 1.85 \text{ m}$$

(a-3) A drop of 1.80 m in invert elevation is required.

b) Solution (see fig. 2 for dimension nomenclature).-

(b-1) From table 1, find the recommended discharge per m., q , for a total capacity of $3.24 \text{ m}^3/\text{s}$, and determine a preliminary chute width.

For

$$Q = 3.24 \text{ m}^3/\text{s}$$

find by interpolation

$$q = 1.50 \text{ m}^3/\text{s} \text{ (approximately).}$$

Then

$$B = \frac{Q}{q} = \frac{3.24}{1.50} = 2.16 \text{ m.}$$

(b-2) Determine the limits of baffle block dimensions, based upon critical depth, d_c .

Ref to publication #104

$$\text{Let } K'_c = \frac{Q}{B^{5/2}} = \frac{3.24}{(2.2)^{5/2}} = .4513$$

Read $\frac{Y_c}{D}$ Corresponding to the calculated K'_c Under column 0

From table B-2,3 of the same publication $\frac{Y_c}{D} = .275$

Y_c refers to d_c and D refers to B

Then: $d_c = 0.275 \times 2.2 = 0.605 \approx 0.61 \text{ m}$

Block height, $h_b = 0.9 \times d_c = 0.549 \approx 0.55 \text{ m}$

Block width and space, w :

Min. $w = h_b = 0.55 \text{ m}$, Max. $w = 1.5 h_b = 1.5 \times 0.55 = 0.825$

(b-3) Determine exact dimensions of baffle blocks and chute width. As the partial block width

$$w_p = \frac{1}{3} h_b \text{ min} = 0.183 \text{ min.},$$

$$\text{and } \frac{2}{3} h_b \text{ max} = 0.366 \text{ max.},$$

Try $w_p = \frac{1}{2} h_b$ for simplicity. $= 0.275 \approx 0.28 \text{ m}$

Then, use alternate rows as follows:

Rows 1 and 3:

1 full block = $1w$

2 full spaces = $2w$

2 half blocks = $1w$

$$B = 4w$$

Rows 2 and 4:

2 full blocks = $2w$

1 full space = $1w$

2 half spaces = $1w$

$$B = 4w$$

Thus, the total width, B , of any row is

$$B = 4w$$

Using the minimum block width of 0.55m.

$$B = 4 \times 0.55 = 2.20 \text{ m}$$

To simplify dimensions, use

$$w = 0.60 \text{ m} > 0.55 < 0.825$$

and

$$w_p = 0.30 \text{ m} > 0.183 < 0.366$$

Then,

$$B = 4w = 4 \times 0.60 = 2.40 \text{ m.}$$

$$q = \frac{3.24}{2.40} = 1.35 \text{ m}^3/\text{s}.$$

by use the same method using publication #104

$$d_c = 0.571 \text{ m.}$$

$$h_b = 0.9 \times 0.571 = 0.514 \text{ m.}$$

Use

$$h_b = 0.52 \text{ m}$$

Select $T = 0.22 \text{ m}$ (see block detail, fig.(2-c)

in order $0.20 \text{ m} < T < 0.25 \text{ m}$

(b-4) Determine inlet length, L_1 :

$$L_1 = 2d_1 = 2 \times 1.225 = 2.45 \text{ m.}$$

(b-5) Determine inlet sill height h_s ,

using $B = 2.40 \text{ m}$, $q = 1.35 \text{ m}^3/\text{s}$,

$$d_c = 0.571 \text{ m},$$

$$h_{v_c} = 0.285 \text{ m}, \text{ and } V_c = 2.364 \text{ m/s}$$

Then

$$h_s = E_{s1} - E_{s_c} - h_i \text{ (where } h_i = \text{inlet loss)}$$

$$h_s = (d_1 + h_{v_1}) - (d_c + h_{v_c}) - 0.5(h_{v_c} - h_{v_1})$$

$$= (1.225 + 0.02) - (0.571 + 0.285) - 0.5(0.285 - 0.02)$$

$$= 0.255 \text{ m.}$$

(b-6) Check inlet velocity to minimize splashing:

Determine depth, d_1 , at inlet cutoff:

$$d_1 = h_s + d_c + h_{v_c}$$

$$= h_s + d_c + \frac{d_c}{2}$$

$$= 0.255 + 0.571 + 0.285$$

$$= 1.111$$

The entrance velocity is then,

$$V_1 = \frac{Q}{A_1} = \frac{Q}{d_1 B} = \frac{3.24}{1.111 \times 2.40} = 1.215 \text{ m/s}$$

Determine critical velocity, V_c over crest:

$$V_c = \frac{Q}{A} = \frac{3.24}{d_c B} = \frac{3.24}{0.572 \times 2.4} = 2.364 \text{ m/s}$$

Thus, the inlet velocity is approximately equal to half the critical velocity, and splashing will be minimized.

(b-7) Determine sill length, L_2 , and dimension e , as shown in fig. 3.

Using a radius, $R = 1.80 \text{ m}$, and an invert slope of 2 to 1,

$$\phi = 26^\circ 34'$$

$$\sin \phi = 0.4472 = y/z$$

$$\tan \phi = 0.5 = y/x$$

$$\phi/2 = 13^\circ 17'$$

$$\tan \phi/2 = 0.2361 = z/R$$

Substituting,

$$z = 0.2361R = 0.425 \text{ m.}$$

$$y = 0.4472z = 0.190 \text{ m.}$$

$$x = \frac{y}{0.5} = 0.380 \text{ m.}$$

Then,

$$L_2 = x + z = 0.380 + 0.425 = 0.805 \text{ m.}$$

and

$$e = h_s - y = 0.225 - 0.190 = 0.065 \text{ m.}$$

(b-8) Determine the slope distance, S , between rows of baffle blocks, as shown in fig.(2-B)

$$S = 2 h_b \text{ min.}$$

$$= 2(0.52) = 1.04 \text{ m.}$$

Use

$$S = 1.80 \text{ m (see subsec. (1-2)-(c-6))}$$

(b-9) Determine minimum depth of cover, j , at outlet to insure that the last row of baffle blocks will be covered by the back-fill, placed in the structure to the elevation of the downstream grade.

$$S_y = S \sin \phi = 1.80(0.4472) = 0.805 \text{ m.}$$

$$h_y = h_b \cos \phi = 0.52(0.8944) = 0.465 \text{ m.}$$

$$j = S_y + h_y = 1.270 \text{ m.}$$

(b-10) Determine apron lengths, L_3 and L_s for a drop, $F = 1.80 \text{ m}$.

Minimum distance,

$$L_y = e + F + j$$

$$= 0.065 + 1.80 + 1.270 = 3.135 \text{ m.}$$

Minimum rows of blocks:

$$\text{Rows} = \frac{L_y}{S_y} = \frac{3.135}{0.805} = 3.89$$

Use 4 rows.

Where the ratio, $\frac{L_y}{S_y}$ indicates that fewer rows would be adequate the minimum number of four rows should be used by extending two or more rows below the downstream grade.

Finally,

$$L_s = 4 S$$

$$= 4(1.80) = 7.20 \text{ m.}$$

$$L_y = 4 S_y$$

$$= 4(0.805) = 3.22 \text{ m.}$$

$$L_3 = 4 S_x$$

$$= 4(1.80 \cos \phi) = 6.440 \text{ m.}$$

(b-11) Determine overall length of structure.

$$L = L_1 + L_2 + L_3$$

$$= 2.45 + 0.805 + 6.440$$

$$= 9.70 \text{ m.}$$

(b-12) Determine the following wall heights (see fig(2-b))

$$h_1 = d_1 + 0.30 \text{ m} = 1.225 + 0.30 = 1.525 \text{ m}$$

With a level invert, and with the top of the walls level from h_1 to h_2 ,

$$h_2 = h_1 - h_s$$

$$= 1.525 - 0.255$$

$$= 1.270 \text{ m.}$$

REFERENCE DWGS: For design considerations see dwgs. No. 16/2/2/01 & 16/2/2/02

Scale:

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG No. 16/2/2/03

Approved:

Sheet No. 3 of 4 Rev. No.

BAFFLED APRON DROPS
DESIGN EXAMPLE (Page 1)

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARDS BUREAU

The height of the chute walls,

$$h_3 = 3h_b = 3(0.52) = 1.56 \text{ m.}$$

(b.13) Determine length, M_1 , of the upstream wingwalls, as shown in fig. 4.

$$M_1 = 1.5h_1 + C_1,$$

Where the cutoff depth, $C_1 = 0.75$ for a water depth,

$$d_1 = 1.225 \text{ m. (see dwg No.13/6/1/01)}$$

Then,

$$M_1 = 1.5(1.225) + 0.75$$

$$= 3.04 \text{ m.}$$

(b.14) Determine length, M_3 , of downstream wingwalls, as shown in fig. 5.

$$M_3 = 1.5h'_3 + C_3,$$

Where the cutoff depth, $C_3 = 0.75$ m. for an assumed channel water depth of 1.22 m.

$$h'_3 = \frac{h_3}{\cos \phi} \text{ (with } \phi = 26^\circ 34' \text{)}$$

$$= \frac{1.56}{0.8944}$$

$$= 1.74 \text{ m.}$$

Then

$$M_3 = 1.5(1.74) + 0.75$$

$$= 3.36$$

(b.15) Check flotation of the structure (due to uplift forces) according to the requirements of subsection 1-2 (d).

(b.16) Check sliding stability of the structure according to the requirements of subsection 1-2 (c).

(b.17) Determine protection requirements. Select type of protection from dwg. No.13/4/1/01 for inclined drops with a water depth of 1.225 m.

Inlet Protection: Type 1, extending a distance d_1 upstream, and up the sloping sides to an elevation 0.30 m. above the normal water surface.

Slope Protection: Type 1, as described in subsection 1-2(f).

Outlet Protection: Type 3, extending downstream a distance $4d_1$, and up the sloping sides to an elevation 0.3 m. above the assumed water surface, or to top of constructed bank, whichever is greater. Note that the backfill, placed over the last row of blocks, covers the riprap to the elevation of the natural grade (see fig. 2.b)

(b.18) Check percolation, by the requirement and provide cutoff walls if needed.

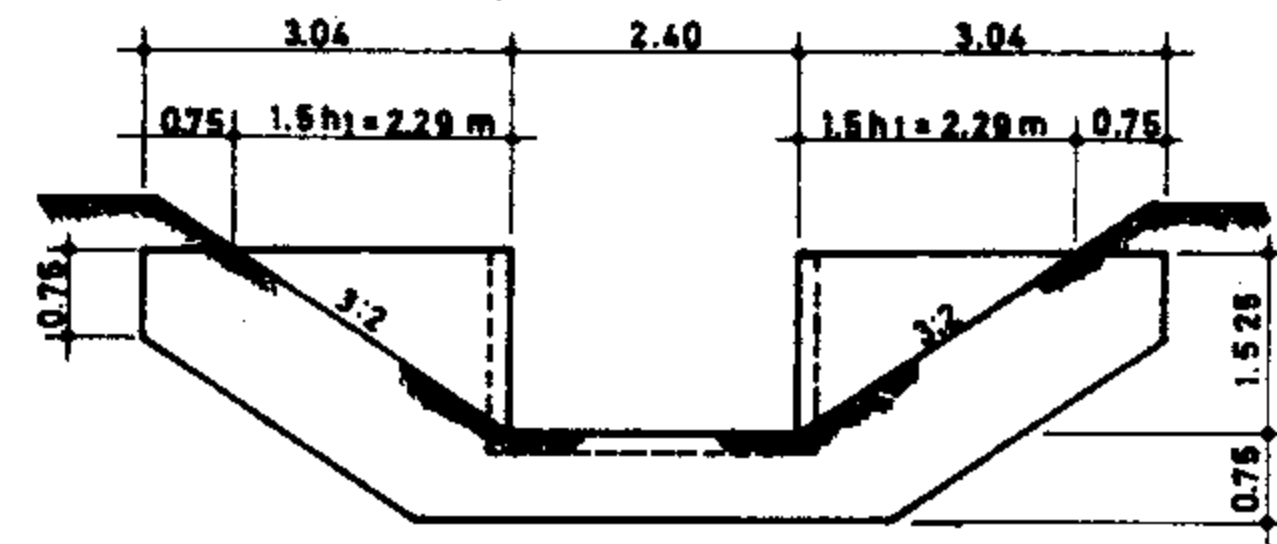


Fig 4. Upstream wingwalls
Scale 1:100


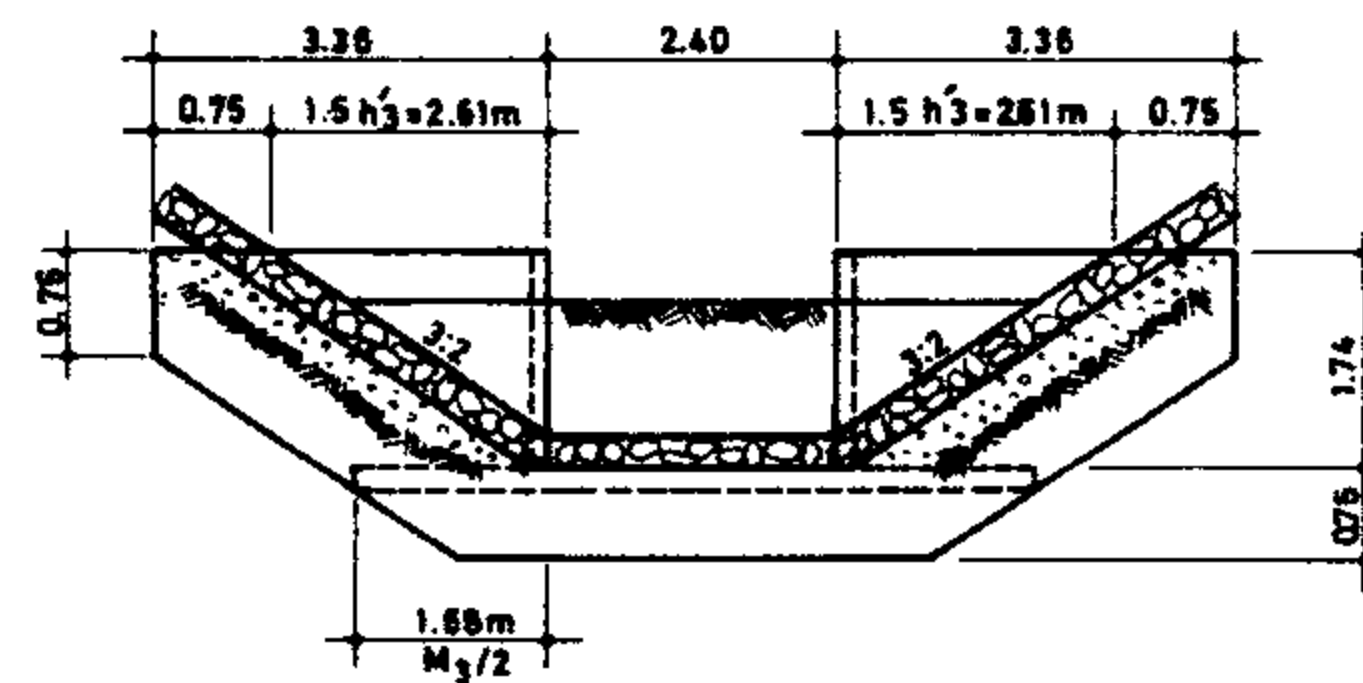


Fig 5. Downstream wingwalls
Scale 1:100

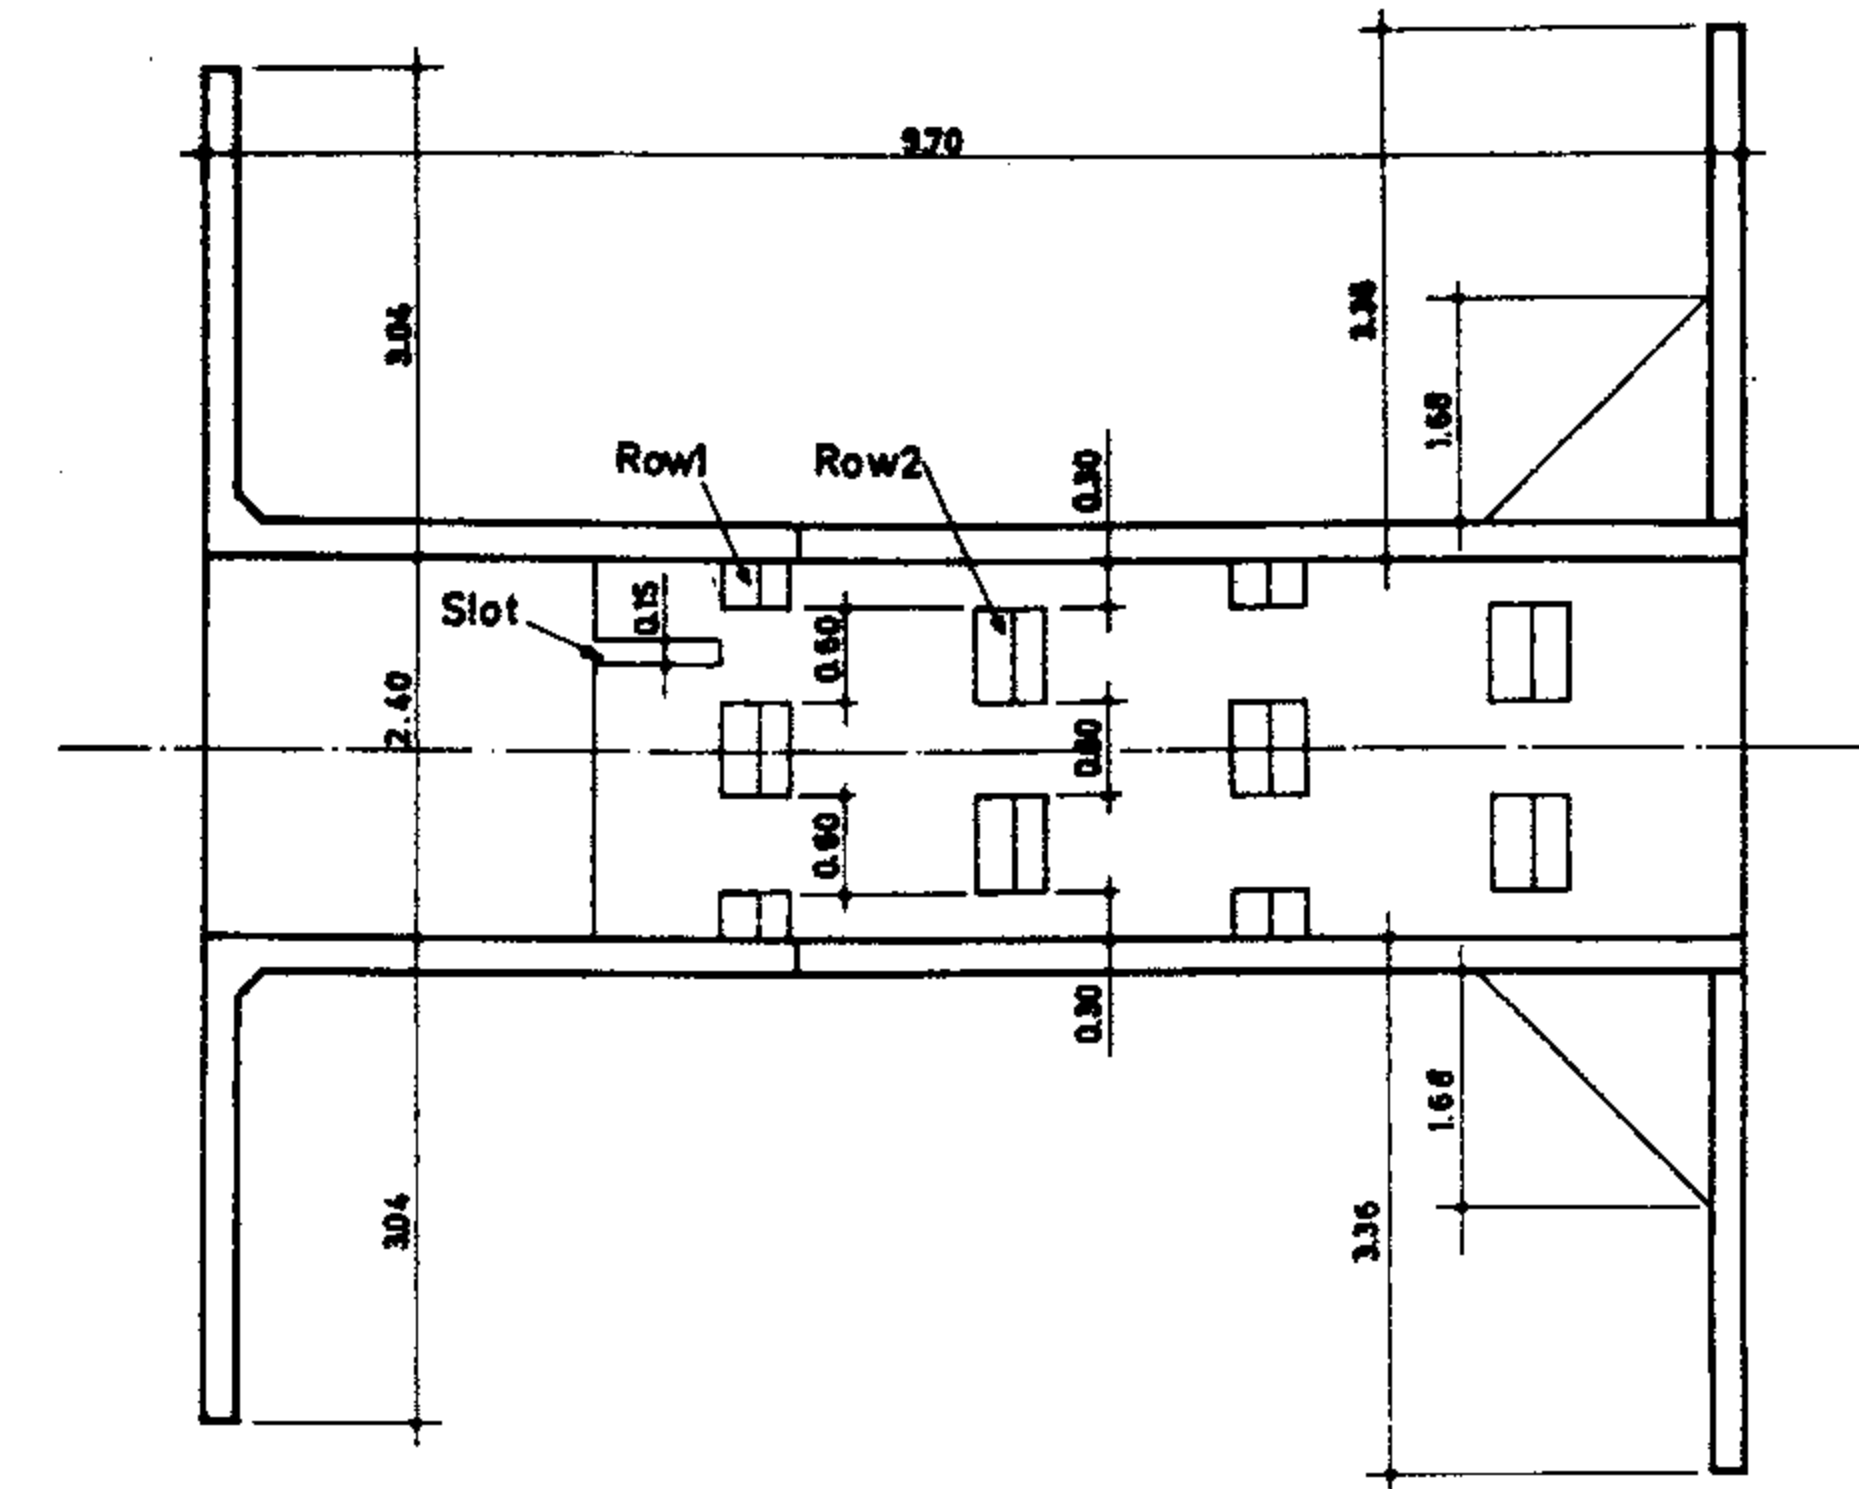

PLAN
Fig 3_a Scale 1:75

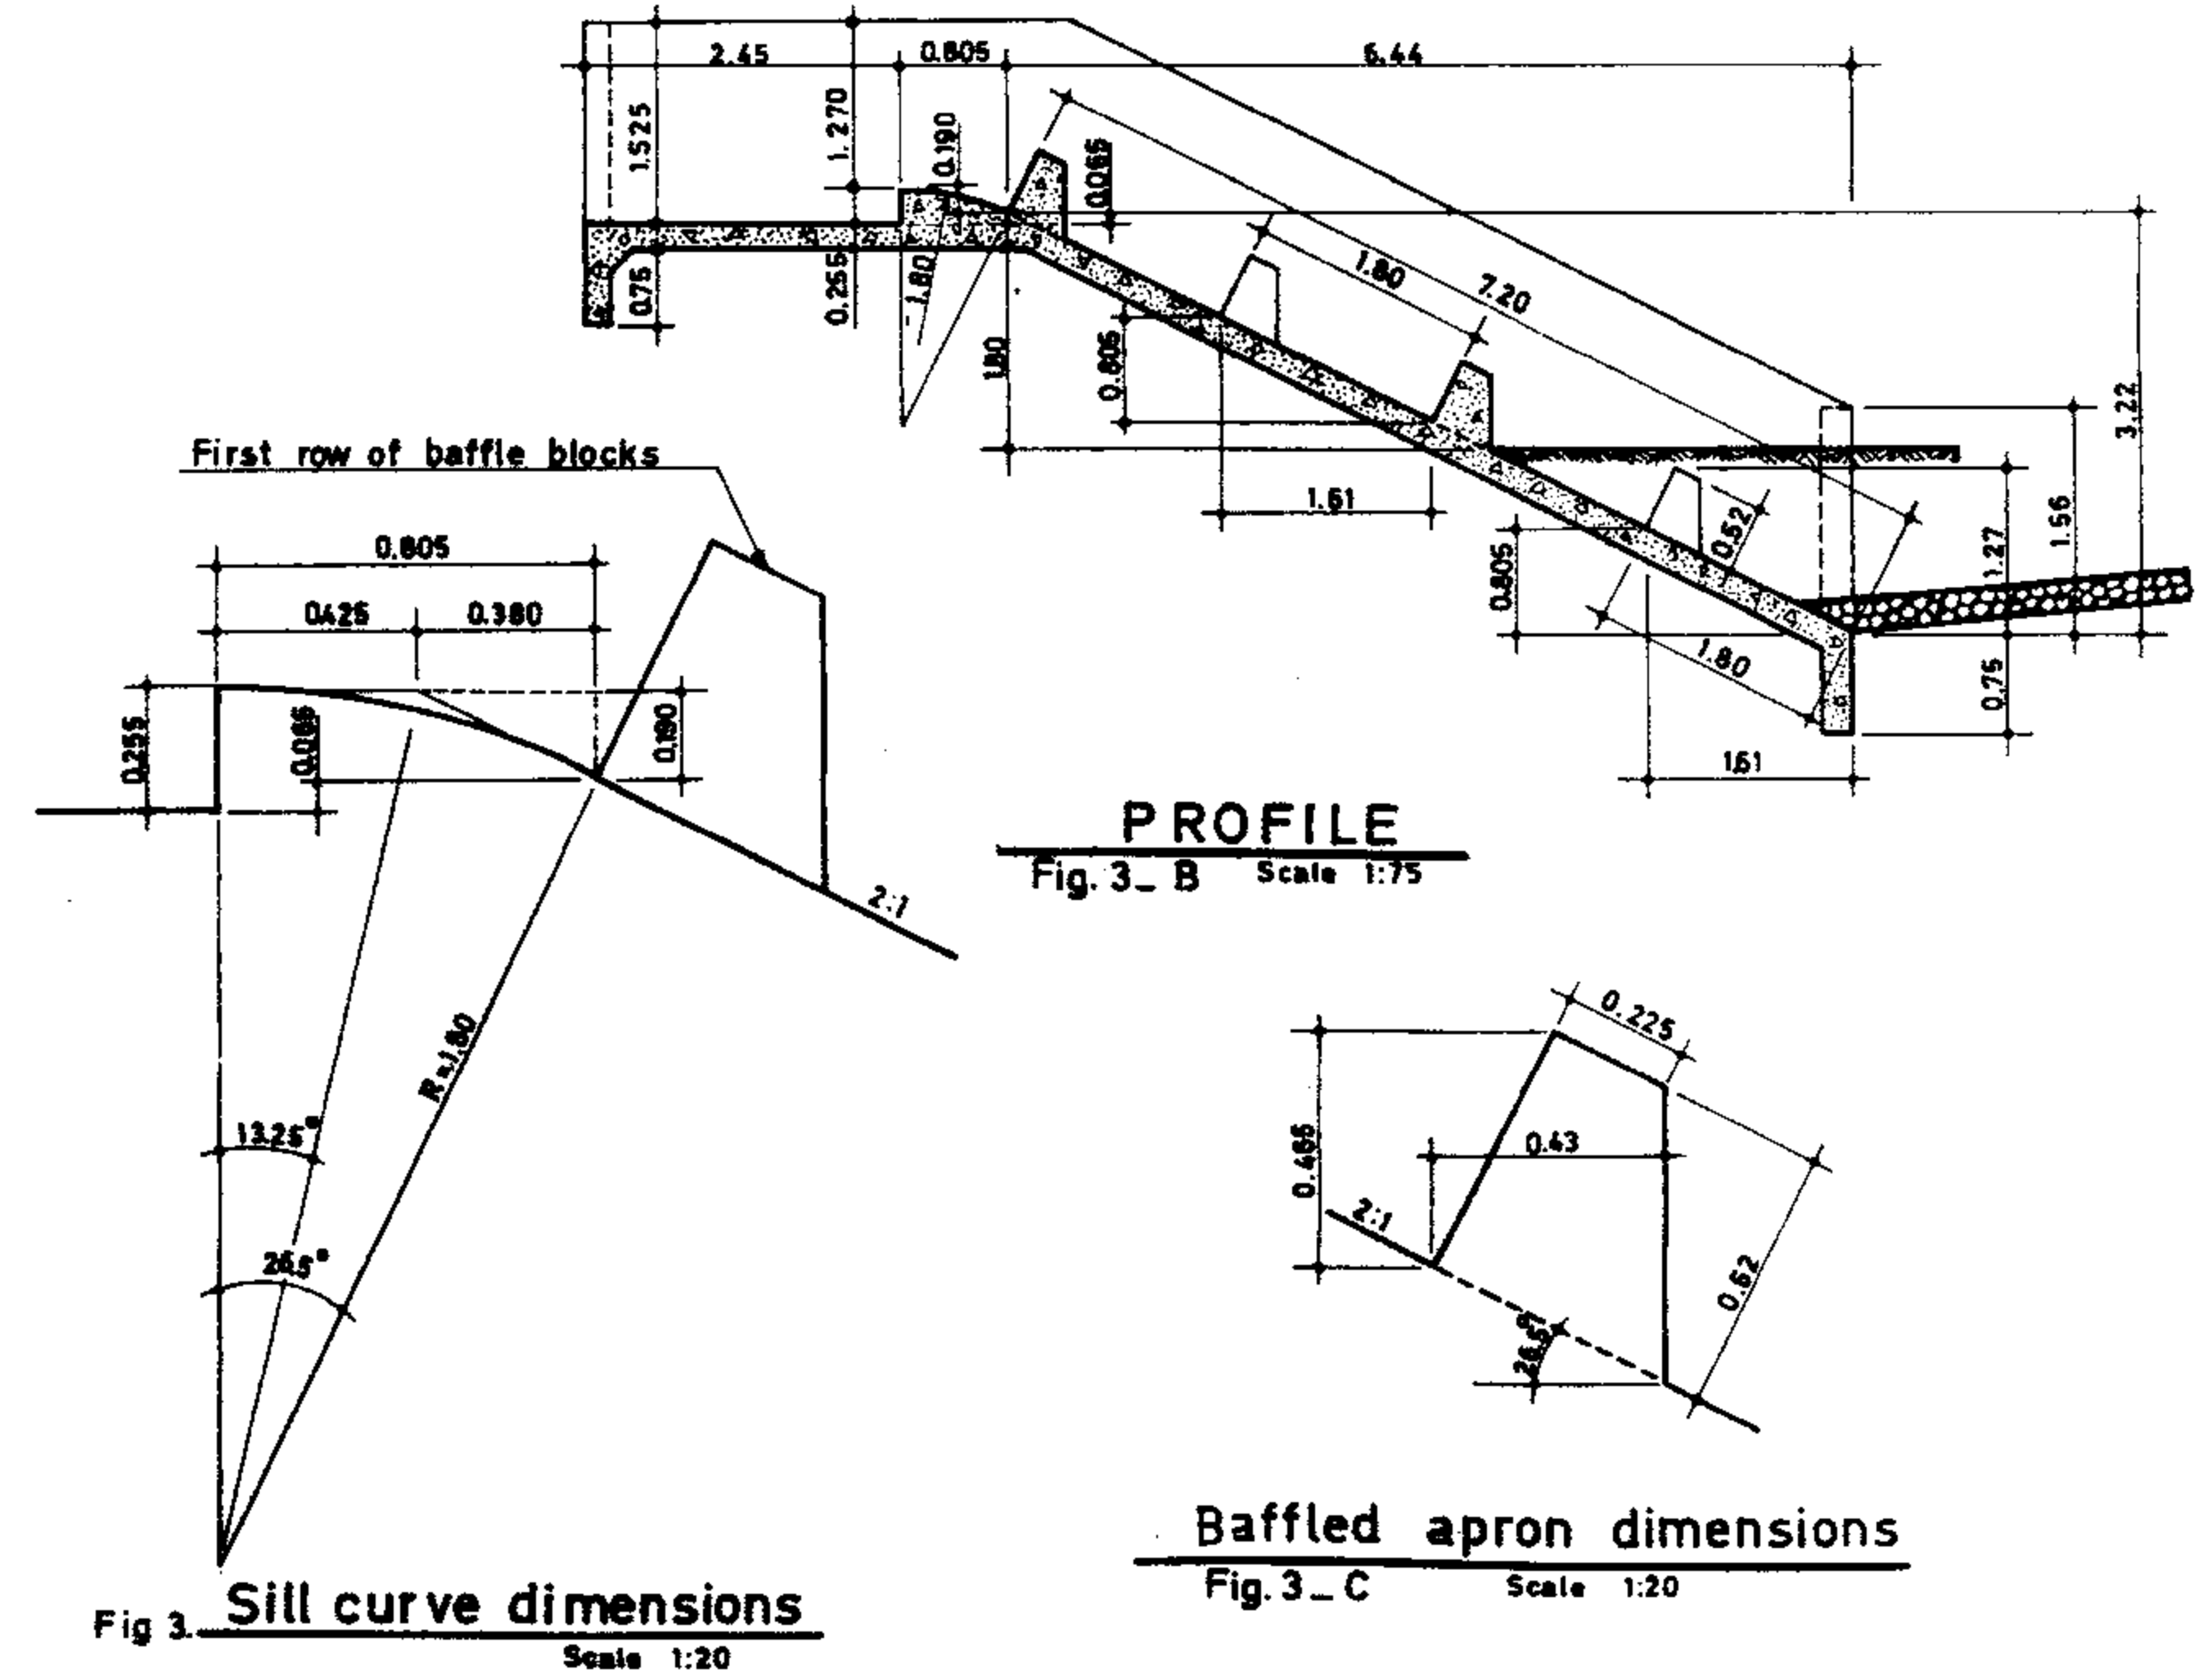


Fig 3. Sill curve dimensions
Scale 1:20

PROFILE
Fig 3_B Scale 1:75

Baffled apron dimensions
Fig 3_C Scale 1:20

REFERENCE DWGS: For design considerations see dwgs No. 16/2/2/01 & 16/2/2/02

Scale: 1:100, 1:20, 1:75

IRRIGATION & DRAINAGE STANDARDS


Date DWG. No. 16/2/2/04

BAFFLED APRON DROPS


Approved: Sheet No. 4 of 4 Rev. No.

DESIGN EXAMPLE (Page 2)


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARDS BUREAU

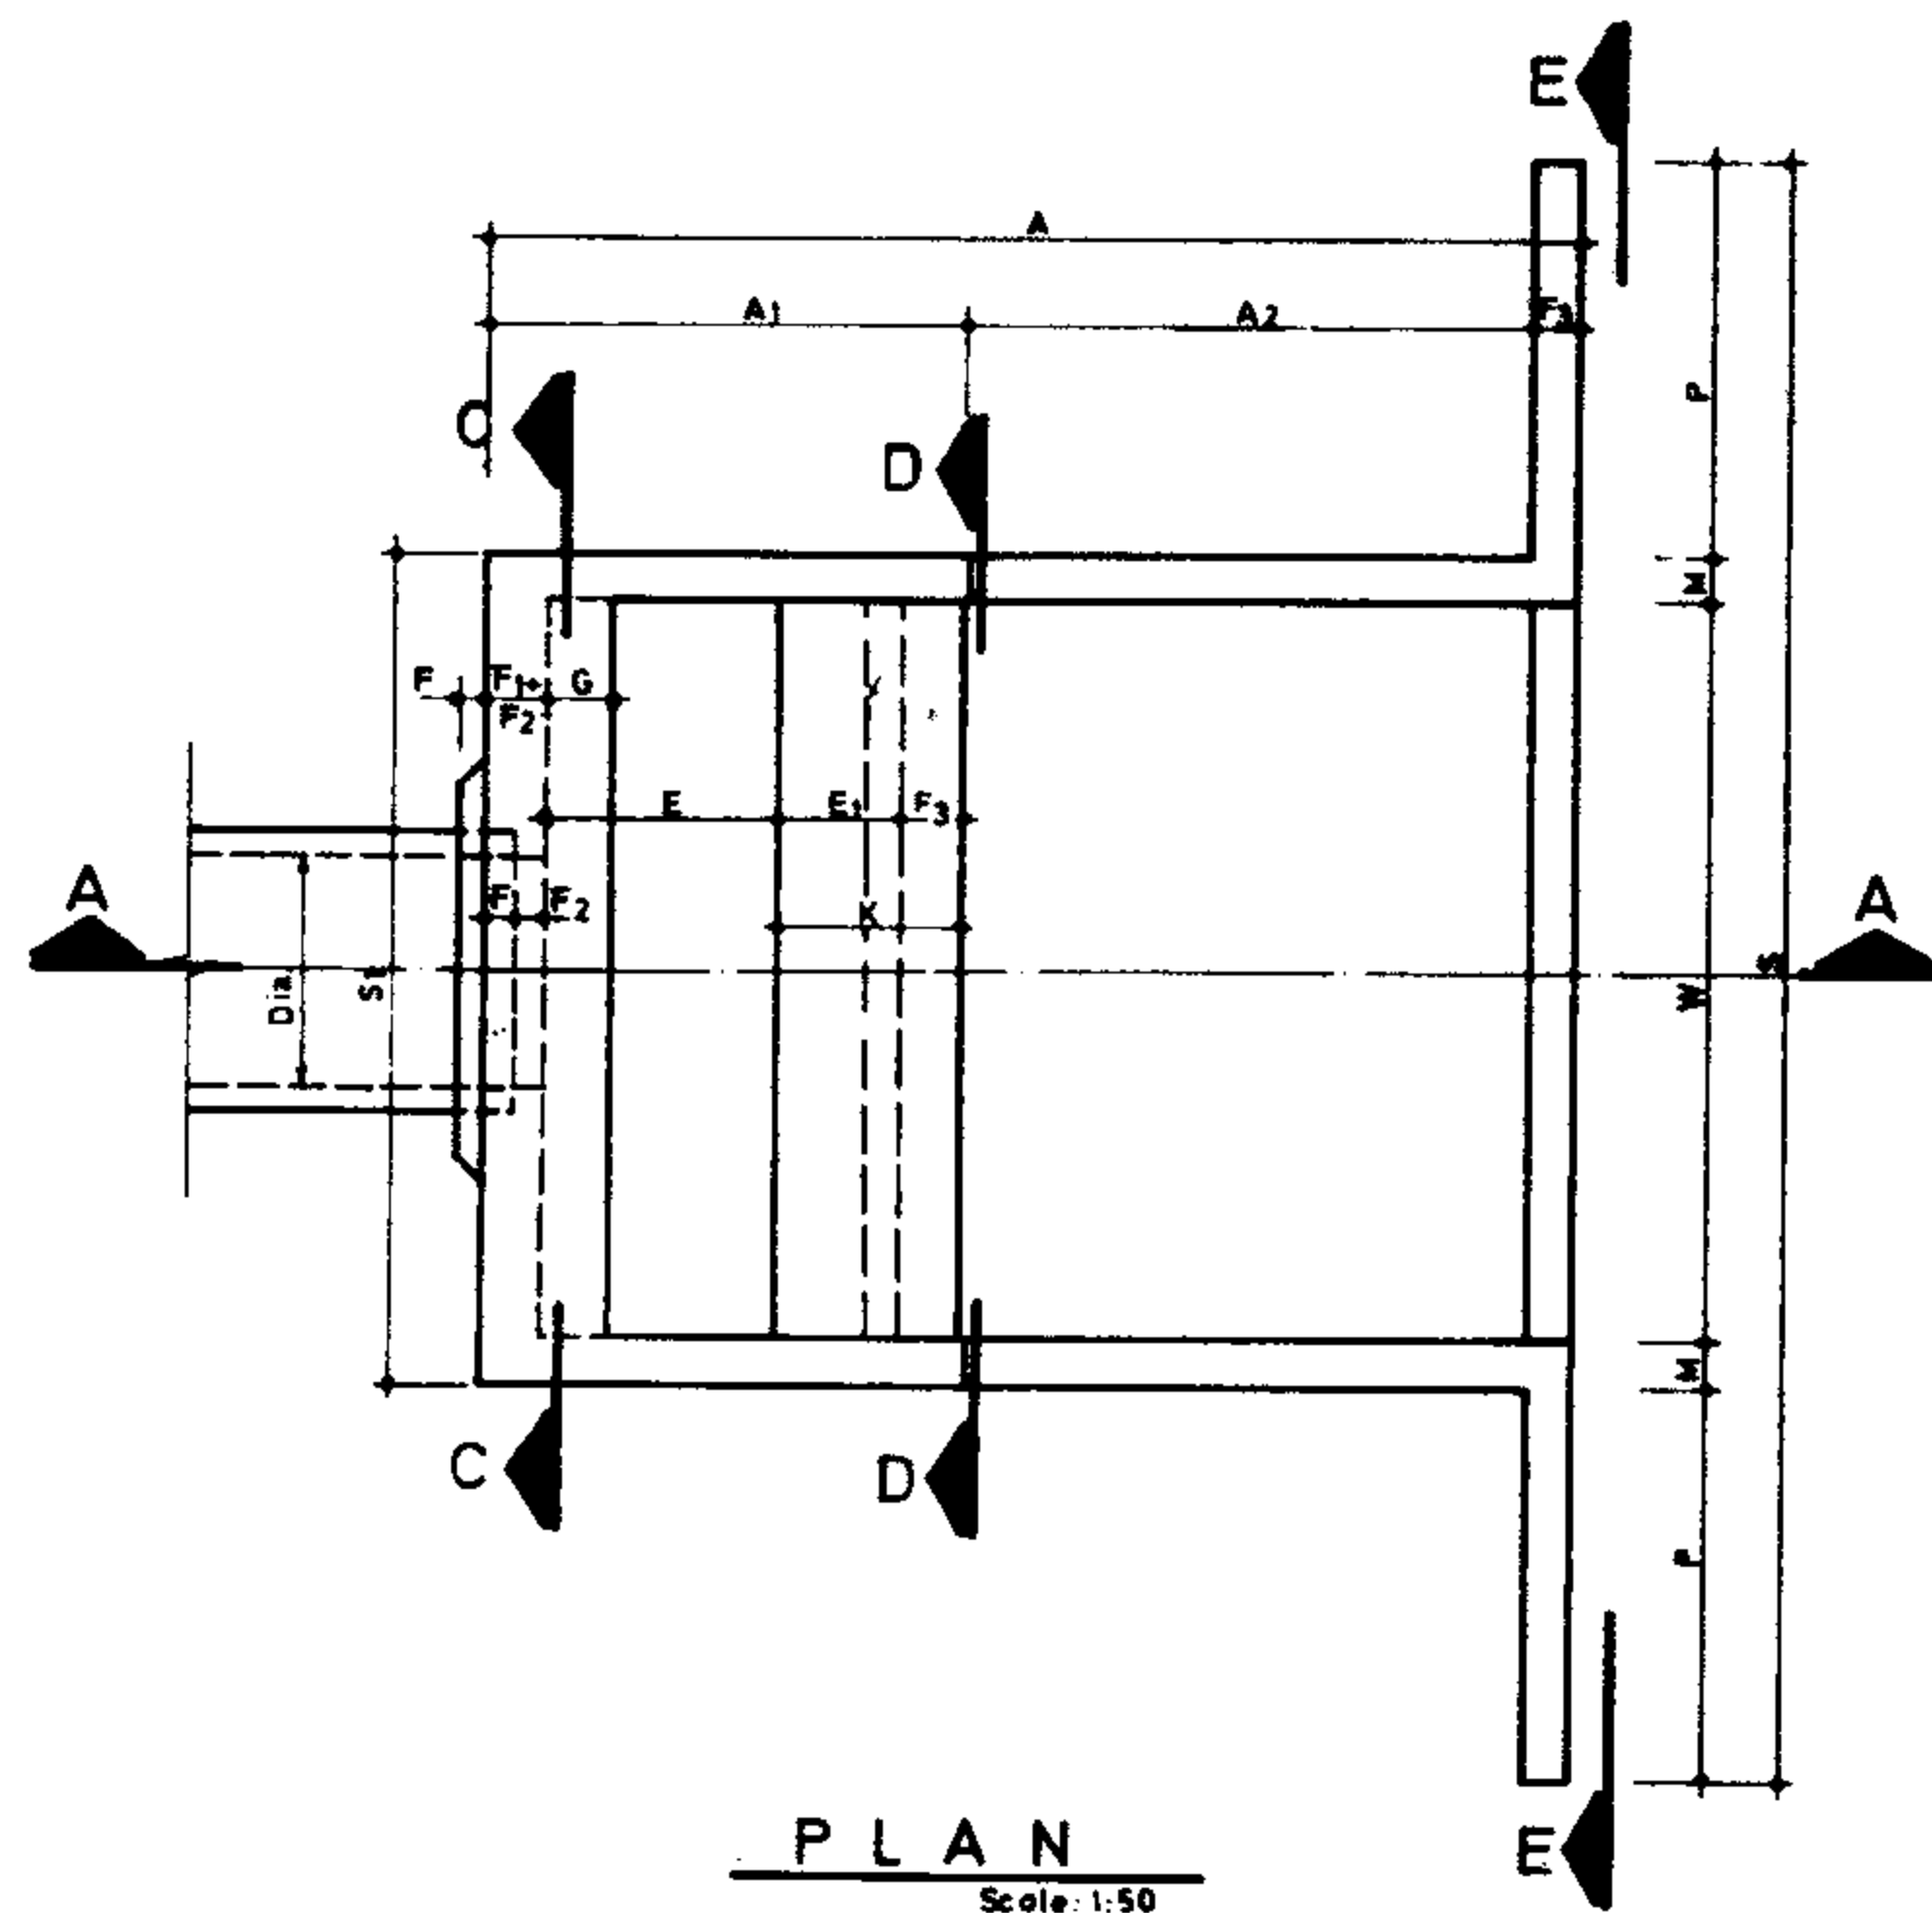


PLAN
Scale: 1:50

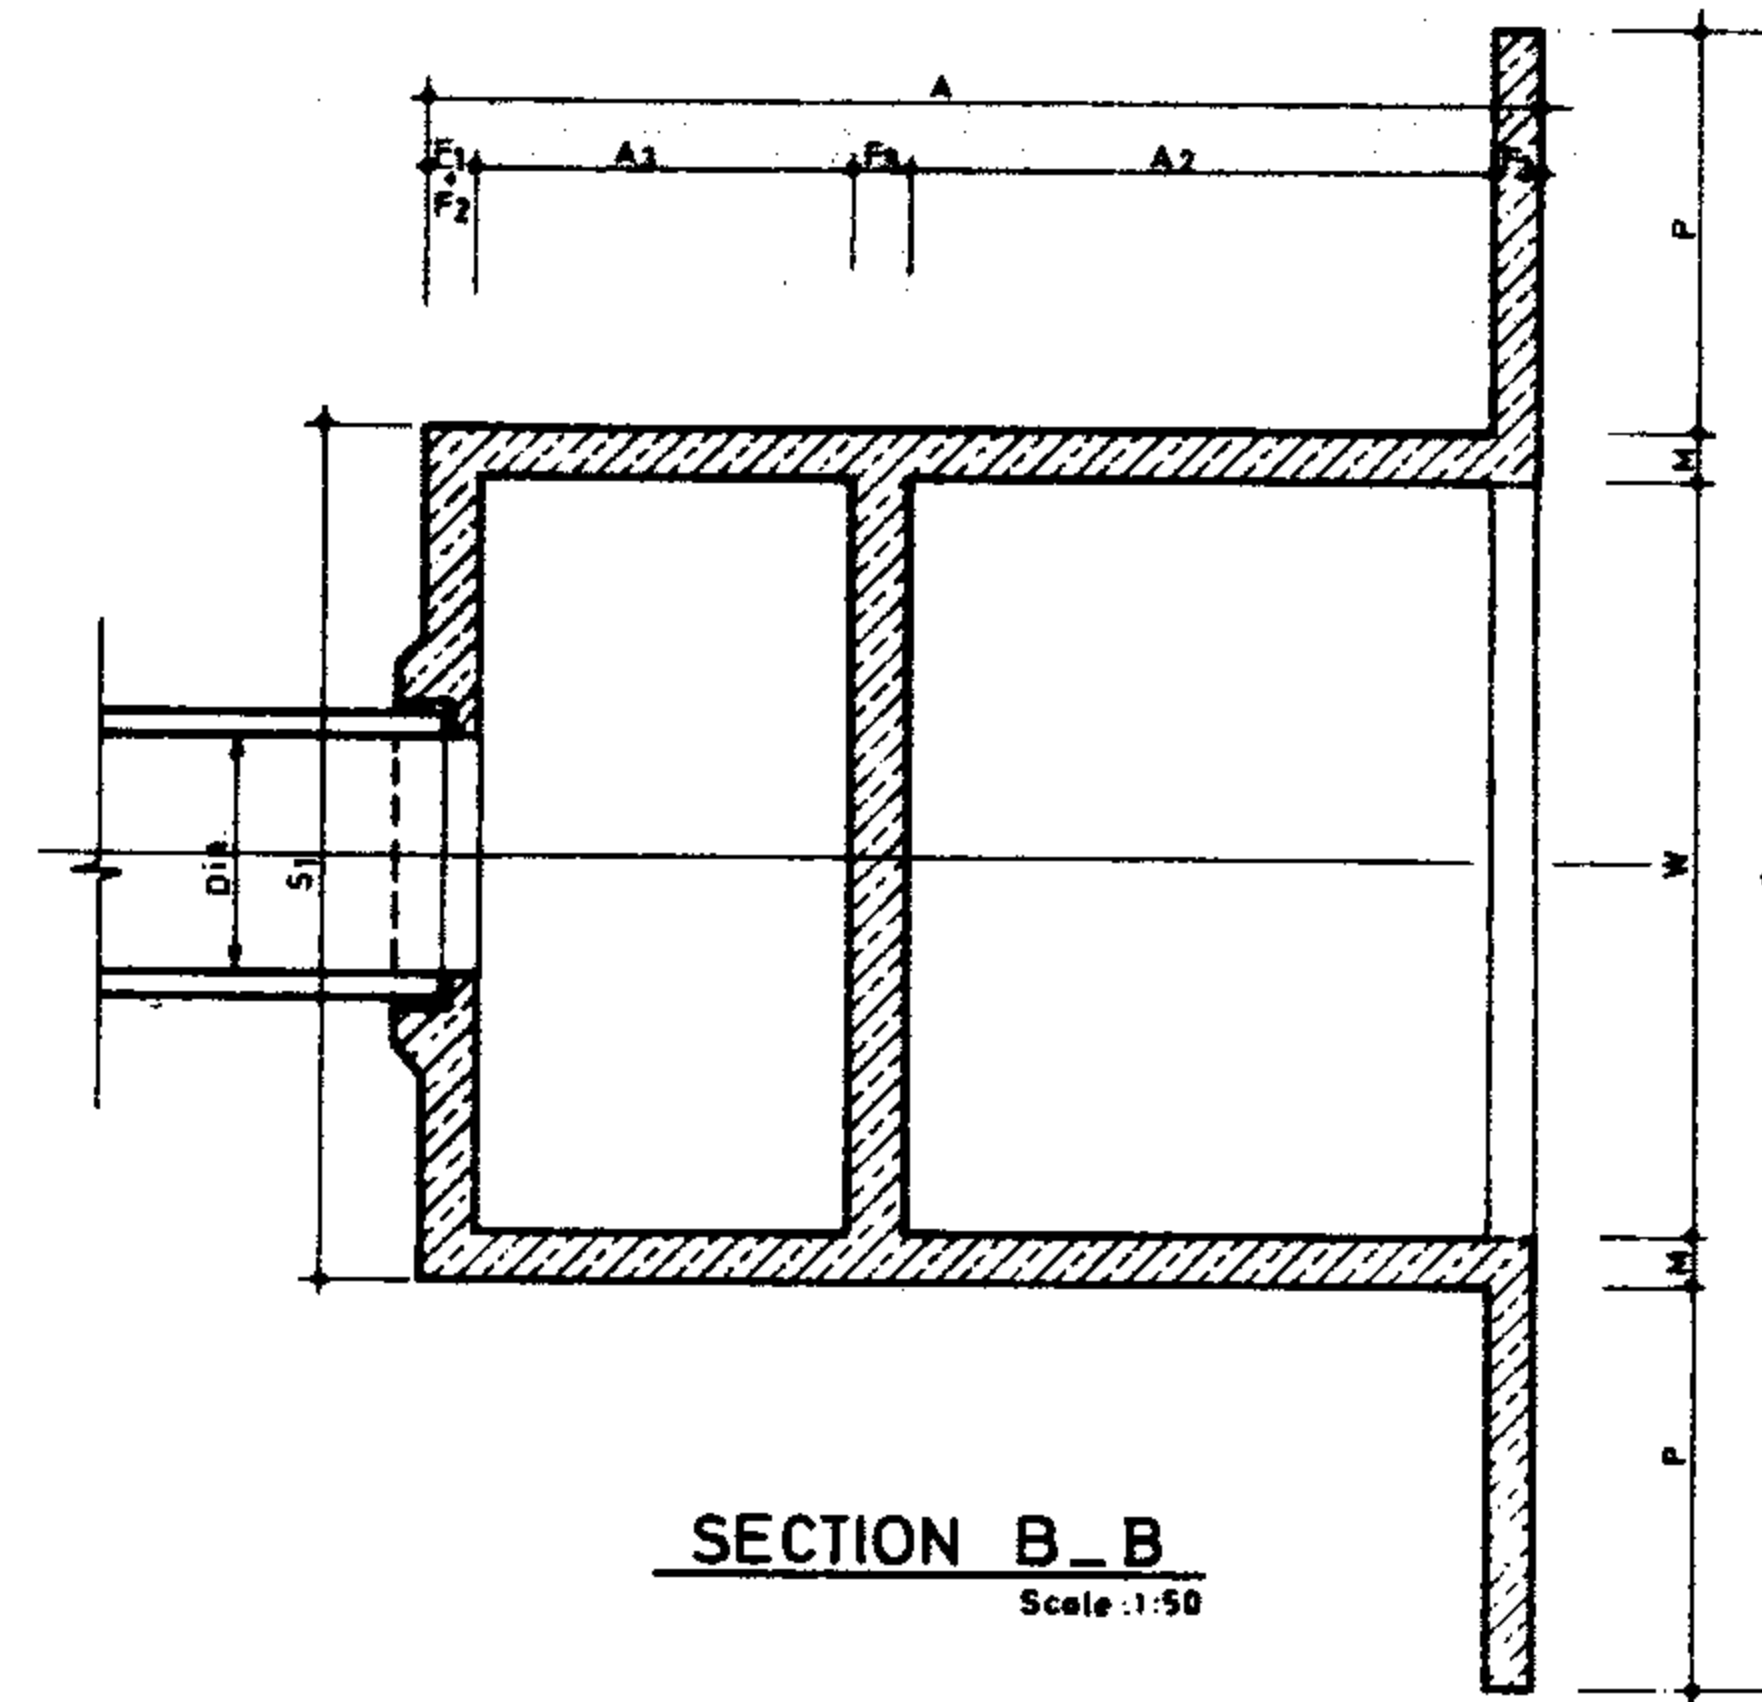


SECTION B_B
Scale: 1:50

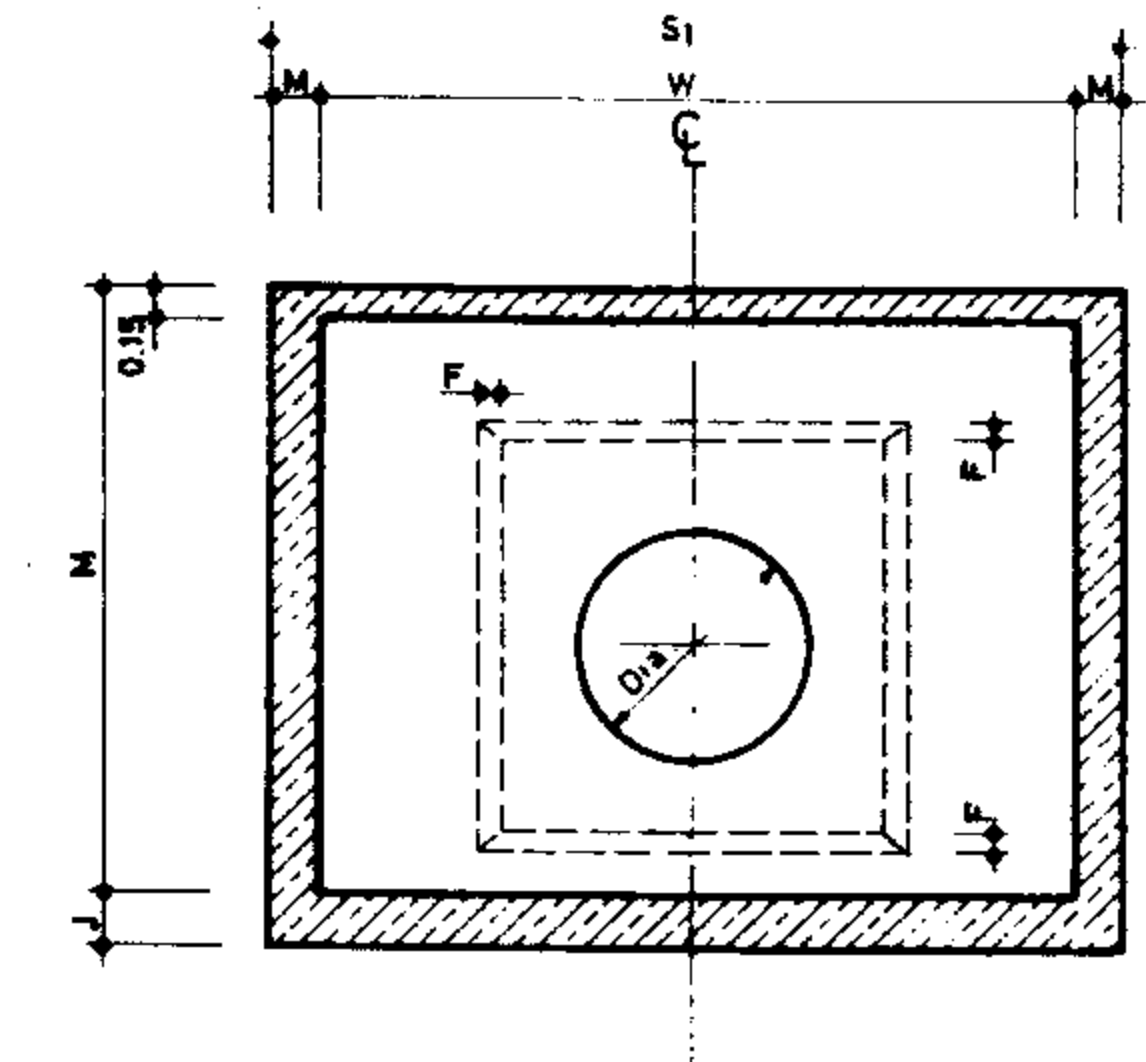


SECTION C_C
Scale: 1:50

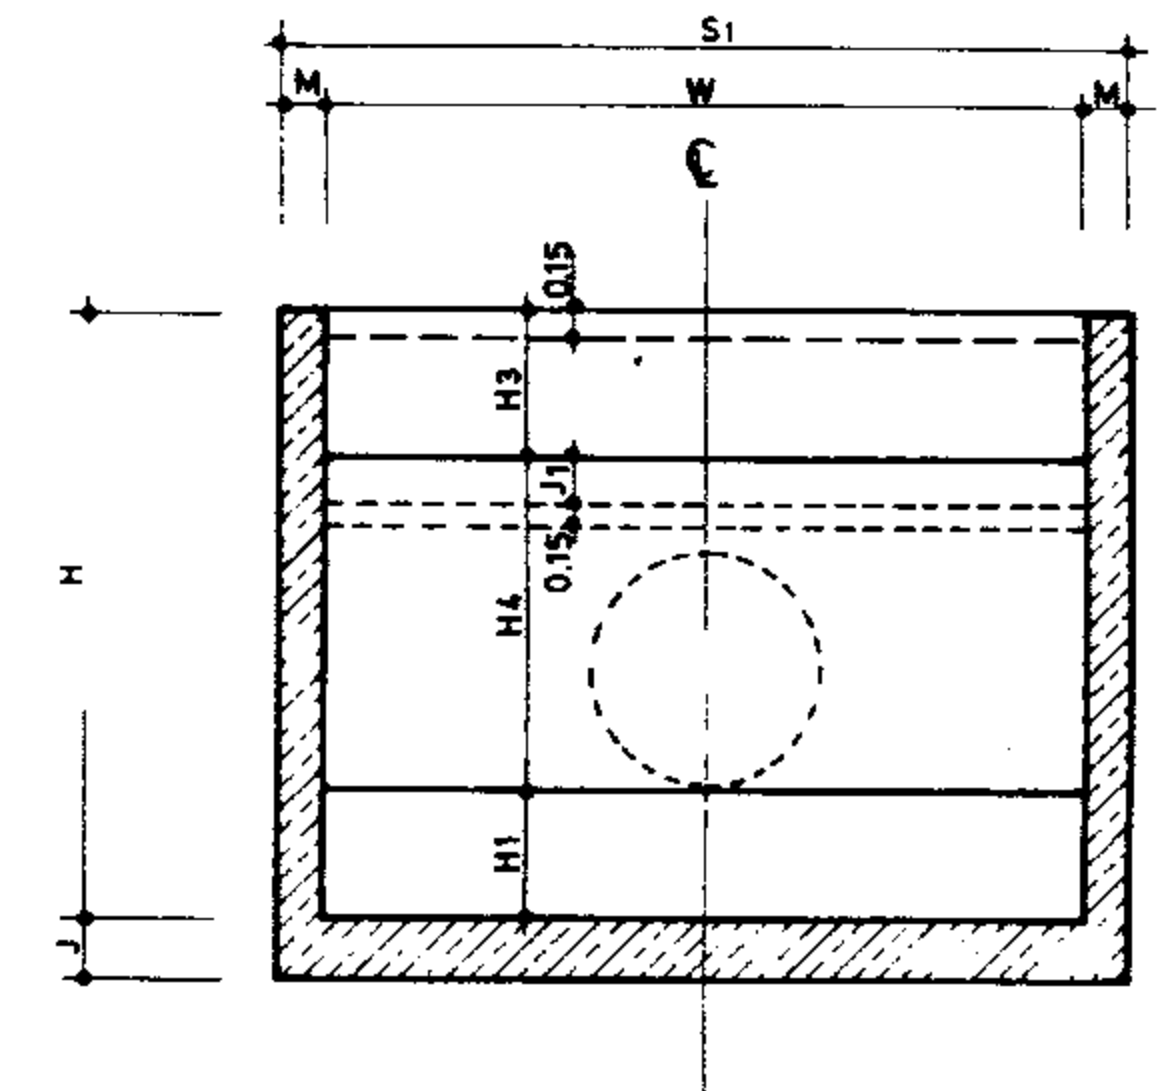

SECTION D_D
Scale: 1:50

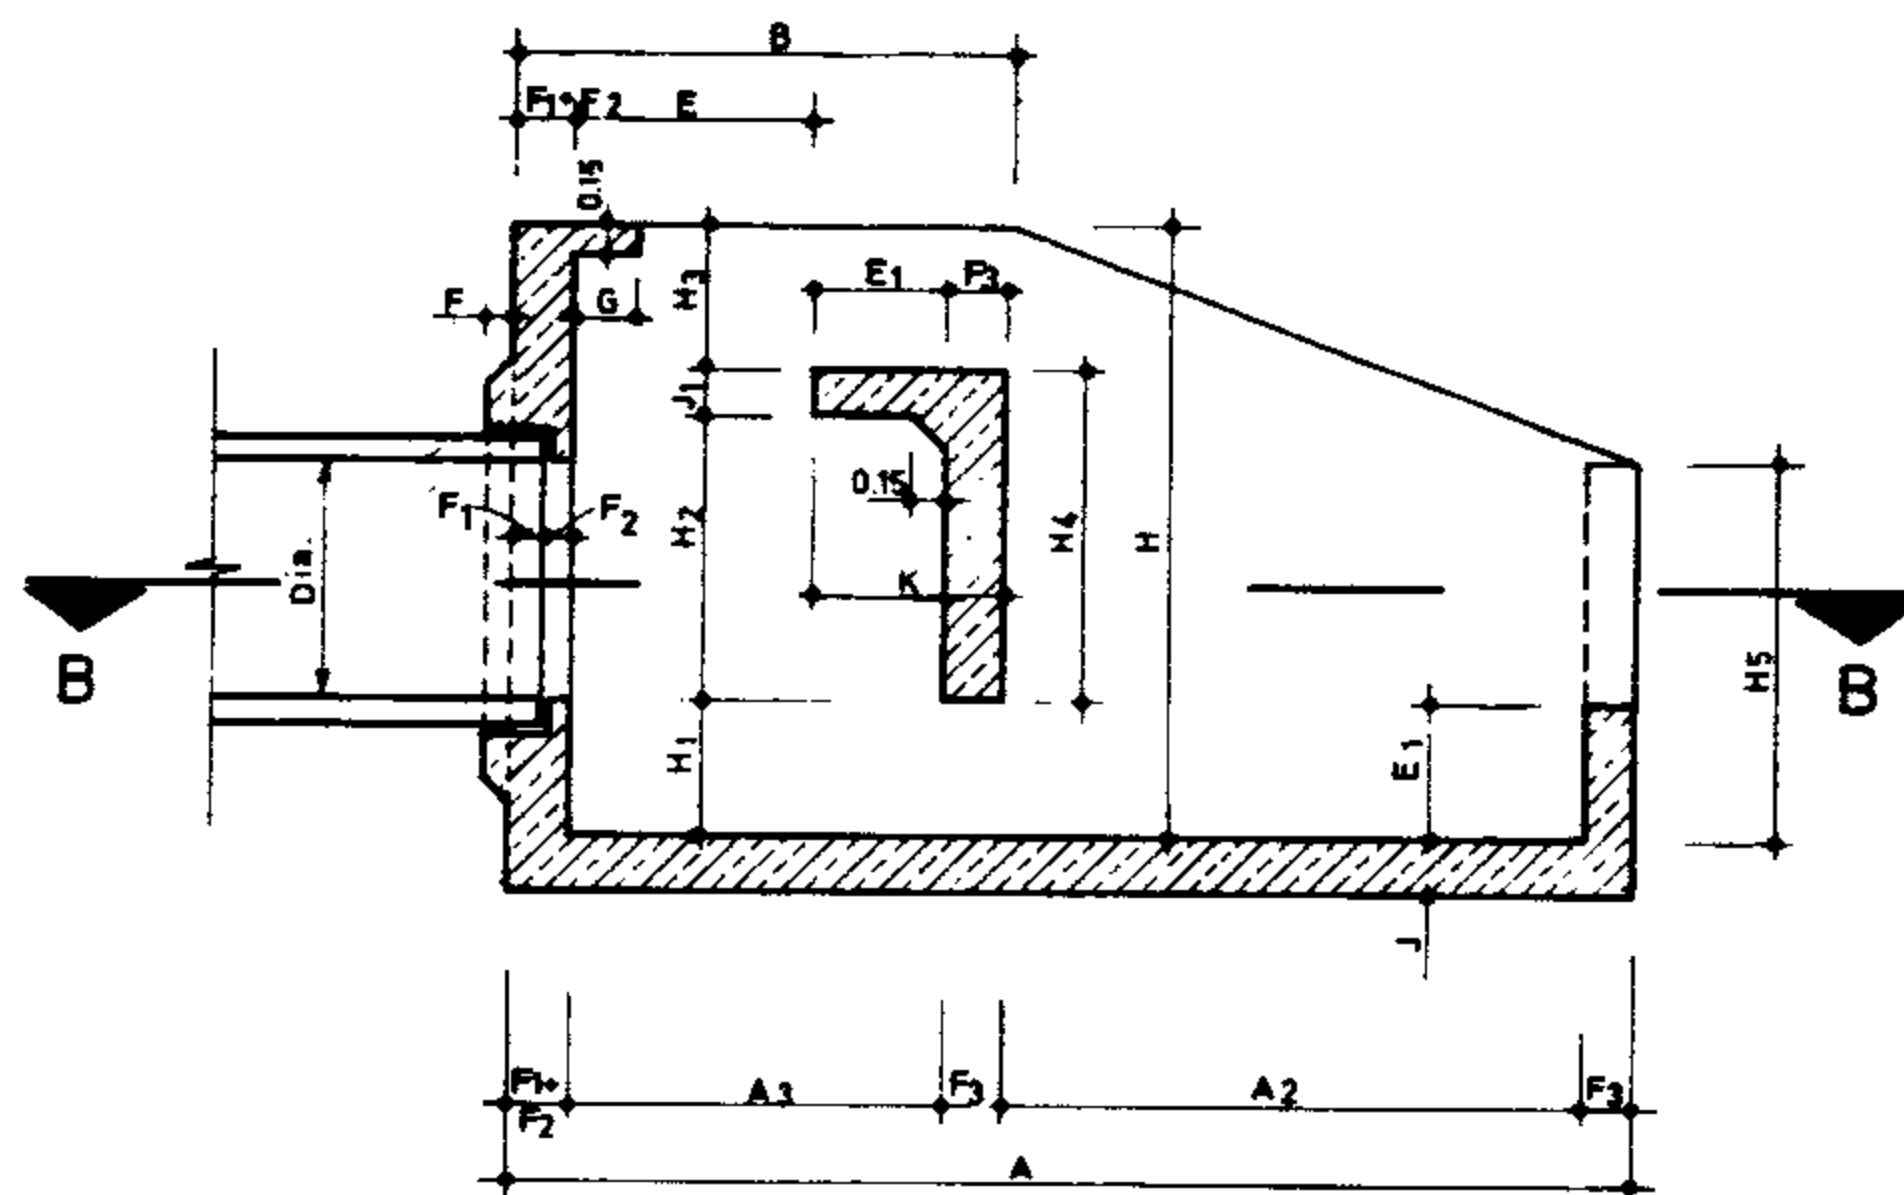

SECTION A_A
Scale: 1:50

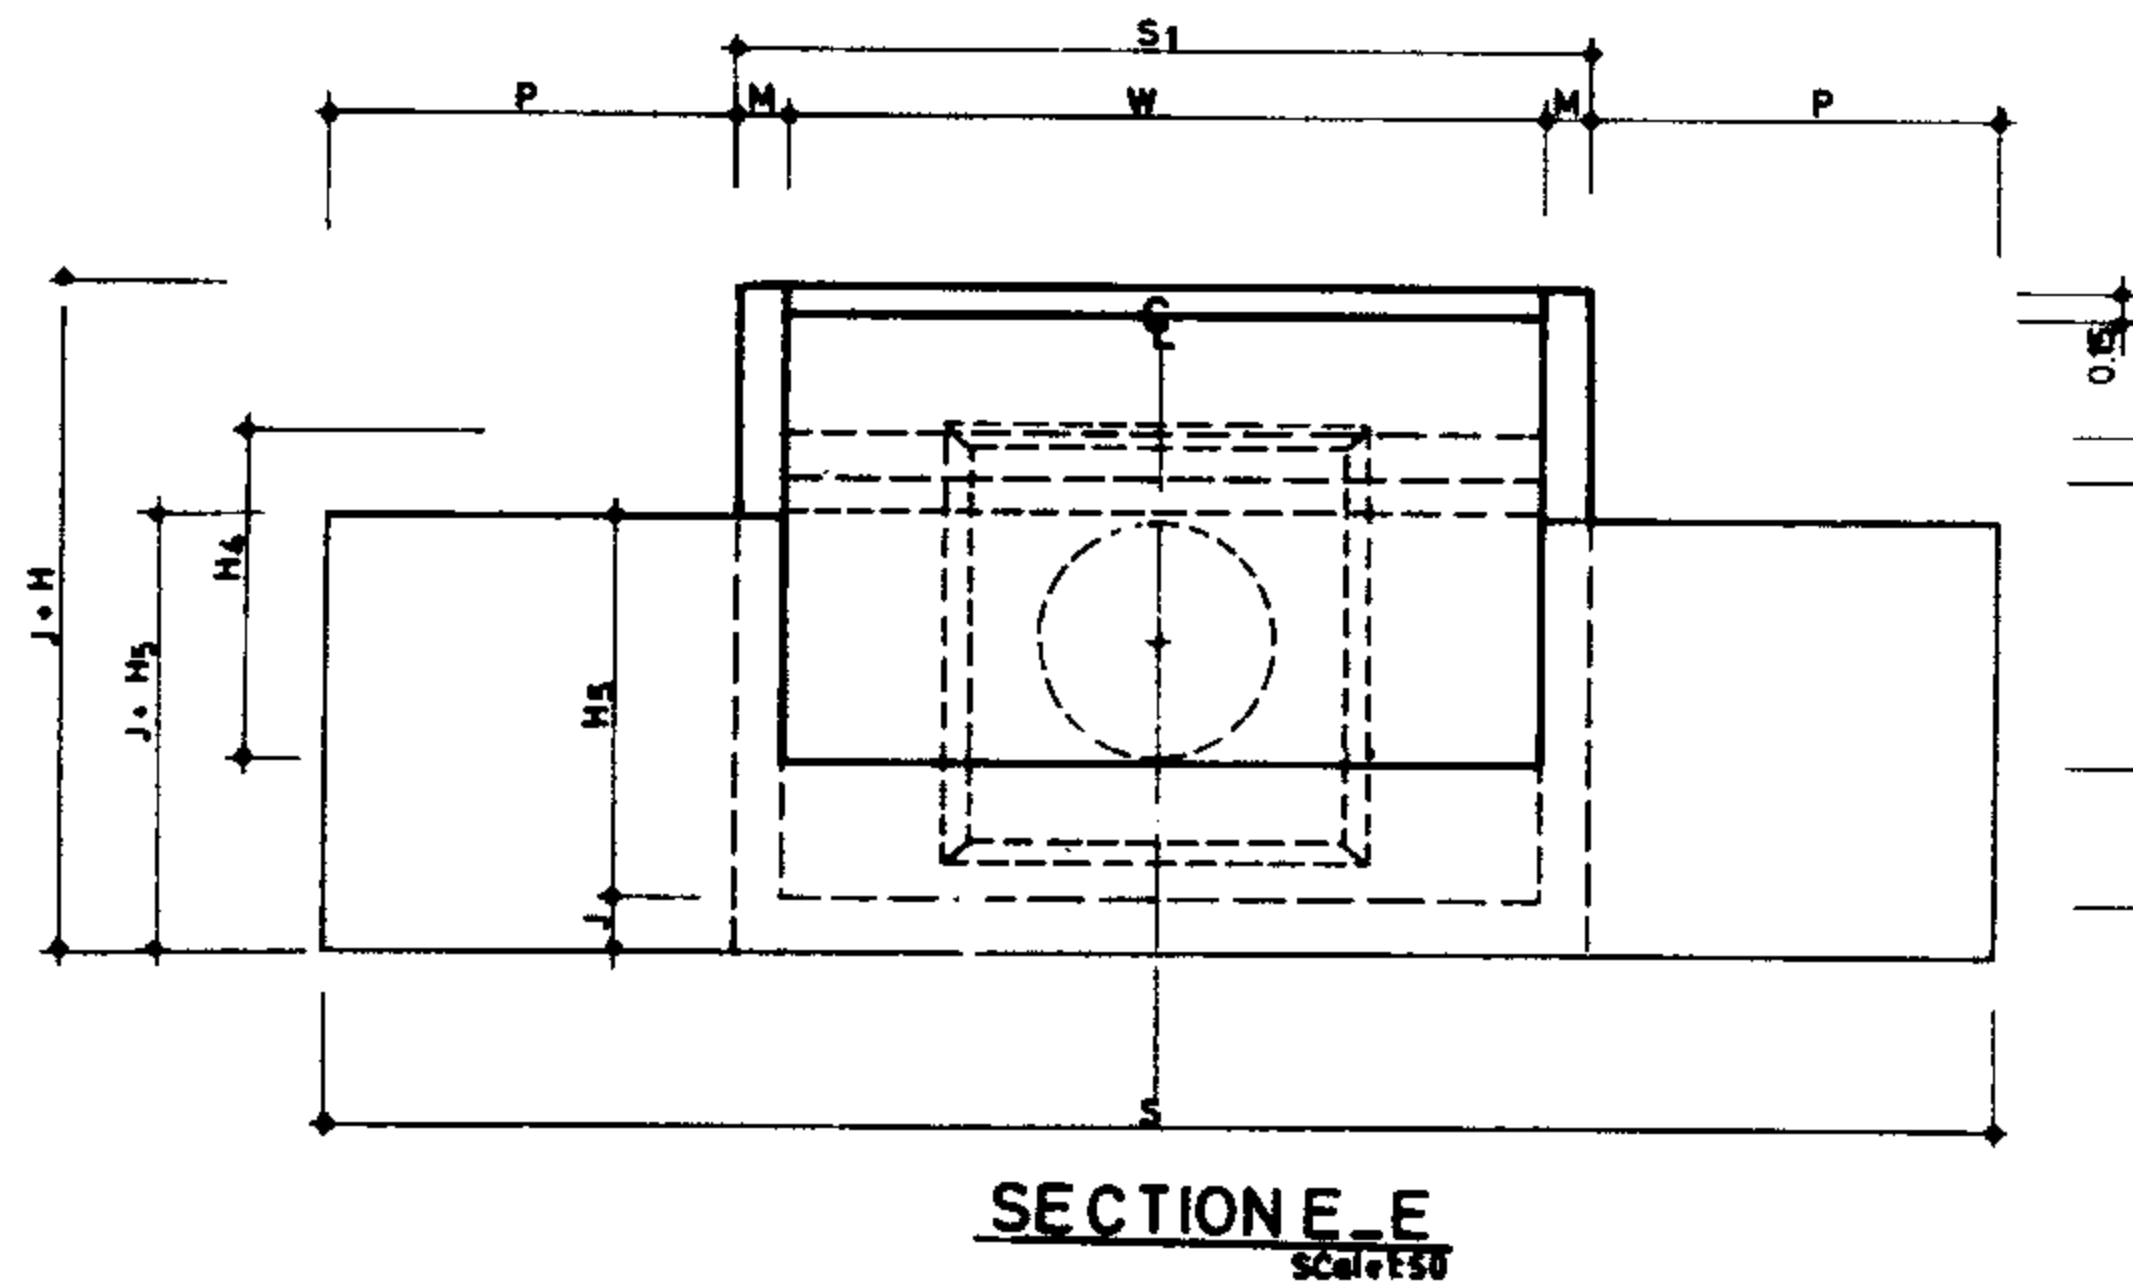

SECTION E_E
Scale: 1:50

NOTES:

- ① Baffled outlet are used at the end of the pipe drops, pipe chutes, and pipe cross drainage culverts or anywhere that the excess energy of the incoming water jet must be dissipated.
- ② A tail water depth is not required for satisfactory hydraulic performance as is the case for a hydraulic jump basin.
- ③ For the best operation, the tailwater should be about $(H_4 + E_1)$ above the invert of the baffled outlet. The height of tailwater above the baffled outlet invert should never exceed $(H_4 + E_1)$.
- ④ If the tailwater depth is uncontrolled, the baffled outlet invert is usually a distance (E_1) below the downstream channel invert.
- ⑤ Because the baffled outlet does not require tailwater, this outlet is therefore particularly useful where tailwater depth is uncontrolled or where the rate of discharge increase is sudden and the tailwater buildup is slow.
- ⑥ If the entrance pipe slopes downward, the outlet end of the pipe should be turned horizontal for a length of at least 3 pipe diameters.
- ⑦ Because there is no practical method of making the basin self-cleaning of debris, where debris is a problem, other types of energy dissipators should be used.
- ⑧ Protection with a well-graded mixture of rocks most having diameters equal to one-twentieth of the basin width should be placed to a depth equal to the height of the end sill for distance equal to one basin width downstream from the end sill.

REFERENCE DWGS: For dimensions tables see dwg N^o 16/1/2/01
 For reinforcement see dwg N^o 16/1/3/01 TO 16/1/3/06
 For general notes see dwg N^o 20/2/1/01 TO 20/2/1/03

Scale: 1:50

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG N^o 16/1/1/01

BAFFLED OUTLET

Approved:

Sheet N^o 1 of 12

Rev. N^o

PLAN & SECTIONS

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET

TECHNICAL RESEARCH AND
 STANDARD BUREAU


STANDARD DIMENSION TABLE, STRUCTURE SELECTING PROCEDURE, REINFORCEMENT DWGS, REFERENCE TABLE AND DESIGN EXAMPLE.

STANDARD DIMENSION TABLE

Struc.	W	A	A ₁	A ₂	A ₃	B	E	E ₁	F	F ₁	F ₂	F ₃	G	H	H ₁	H ₂	H ₃	H ₄	H ₅	J	J ₁	K	M	P	S	S ₁	R/Bar. Kg.	Conc. m ³	FROM m ²
100	1.00	1.70	0.85	0.70	0.50	0.85	0.35	0.15	0.10	0.10	0.10	0.15	0.25	0.90	0.15	0.40	0.20	0.55	0.50	0.18	0.15	0.30	0.15	0.70	2.70	1.30	133.43	1.18	12.69
120	1.20	1.95	0.95	0.85	0.60	0.95	0.40	0.20	0.10	0.10	0.10	0.15	0.25	1.05	0.20	0.45	0.25	0.60	0.60	0.18	0.15	0.35	0.15	0.85	3.20	1.50	165.35	1.60	16.23
140	1.40	2.25	1.05	1.05	0.70	1.20	0.45	0.25	0.10	0.10	0.10	0.15	0.25	1.20	0.25	0.55	0.25	0.70	0.70	0.18	0.15	0.40	0.15	1.00	3.70	1.70	210.78	2.11	21.64
160	1.60	2.50	1.15	1.20	0.80	1.20	0.55	0.25	0.10	0.10	0.10	0.15	0.25	1.35	0.25	0.60	0.35	0.75	0.80	0.18	0.15	0.40	0.15	1.00	3.90	1.90	246.51	2.59	26.21
180	1.80	2.75	1.25	1.35	0.90	1.40	0.60	0.30	0.10	0.10	0.10	0.15	0.25	1.50	0.30	0.70	0.35	0.85	0.90	0.18	0.15	0.45	0.15	1.25	4.60	2.10	296.67	3.22	33.42
200	2.00	3.05	1.35	1.55	1.00	1.50	0.65	0.35	0.10	0.10	0.10	0.15	0.25	1.65	0.35	0.75	0.40	0.90	1.00	0.18	0.15	0.50	0.15	1.25	4.80	2.30	358.98	3.86	39.51
220	2.20	3.30	1.45	1.70	1.10	1.60	0.75	0.35	0.10	0.10	0.10	0.15	0.25	1.80	0.35	0.85	0.45	1.00	1.10	0.18	0.15	0.50	0.15	1.40	5.30	2.50	422.74	4.58	45.68
240	2.40	3.60	1.60	1.80	1.20	1.60	0.80	0.40	0.10	0.10	0.10	0.20	0.25	1.95	0.40	0.90	0.45	1.10	1.20	0.18	0.20	0.60	0.18	1.40	5.56	2.76	542.12	5.94	53.53
260	2.60	3.90	1.70	2.00	1.30	1.85	0.85	0.45	0.10	0.10	0.10	0.20	0.25	2.10	0.45	1.00	0.45	1.20	1.30	0.22	0.20	0.65	0.20	1.50	6.00	3.00	998.55	7.79	64.06
280	2.80	4.15	1.80	2.15	1.40	1.85	0.95	0.45	0.10	0.10	0.10	0.20	0.25	2.25	0.45	1.05	0.55	1.25	1.40	0.22	0.20	0.65	0.20	1.50	6.20	3.20	1113.09	8.76	70.70
300	3.00	4.40	1.95	2.20	1.50	2.00	1.00	0.50	0.10	0.10	0.10	0.25	0.25	2.40	0.50	1.15	0.55	1.35	1.50	0.22	0.20	0.75	0.20	1.70	6.80	3.40	1323.36	10.40	81.85
320	3.20	4.75	2.10	2.40	1.60	2.15	1.05	0.55	0.10	0.13	0.12	0.25	0.30	2.55	0.55	1.20	0.60	1.40	1.60	0.25	0.20	0.80	0.25	1.70	7.10	3.70	1541.07	13.62	91.96
340	3.40	5.00	2.20	2.55	1.70	2.30	1.15	0.55	0.10	0.13	0.12	0.25	0.30	2.70	0.55	1.30	0.65	1.50	1.70	0.25	0.20	0.80	0.25	1.90	7.70	3.90	1557.78	15.41	106.08
360	3.60	5.35	2.35	2.75	1.80	2.50	1.20	0.60	0.10	0.18	0.12	0.25	0.30	2.85	0.60	1.35	0.70	1.55	1.80	0.30	0.20	0.85	0.30	2.00	8.20	4.20	1995.41	20.11	117.50
380	3.80	5.60	2.45	2.90	1.90	2.60	1.25	0.65	0.10	0.18	0.12	0.25	0.30	3.00	0.65	1.45	0.70	1.65	1.90	0.30	0.20	0.90	0.30	2.00	8.40	4.40	2159.56	22.10	128.18
400	4.00	5.90	2.55	3.10	2.00	2.60	1.35	0.65	0.10	0.18	0.12	0.25	0.30	3.15	0.65	1.50	0.80	1.70	2.00	0.30	0.20	0.90	0.30	2.00	8.60	4.60	2354.85	24.17	138.42

PROCEDURE FOR SELECTING THE STRUCTURE

- 1 - Define discharge (Q in m³/s) & head (h in meter).
- 2 - Compute theoretical velocity $V = \sqrt{2gh}$ in m/s if $V > 15$ m/s Baffled outlet is not Recommended.
- 3 - Select pipe Dia. $D = 0.6 \sqrt{Q}$ assume max velocity. 3.5 m/s when pipe flowing full.
- 4 - Determine basin dimensions:
 - 4-1 calculate depth of flow entering the basin $d = \frac{Q}{V}$
 - 4-2 calculate Froude number $F = \frac{V}{\sqrt{gd}}$
 - 4-3 read ratio $\frac{W}{d}$ against the calculated F from the graph:
 - 4-4 $W = d \times (\frac{W}{d})$
- 5 - Select the structure which its W is close enough to calculated W.

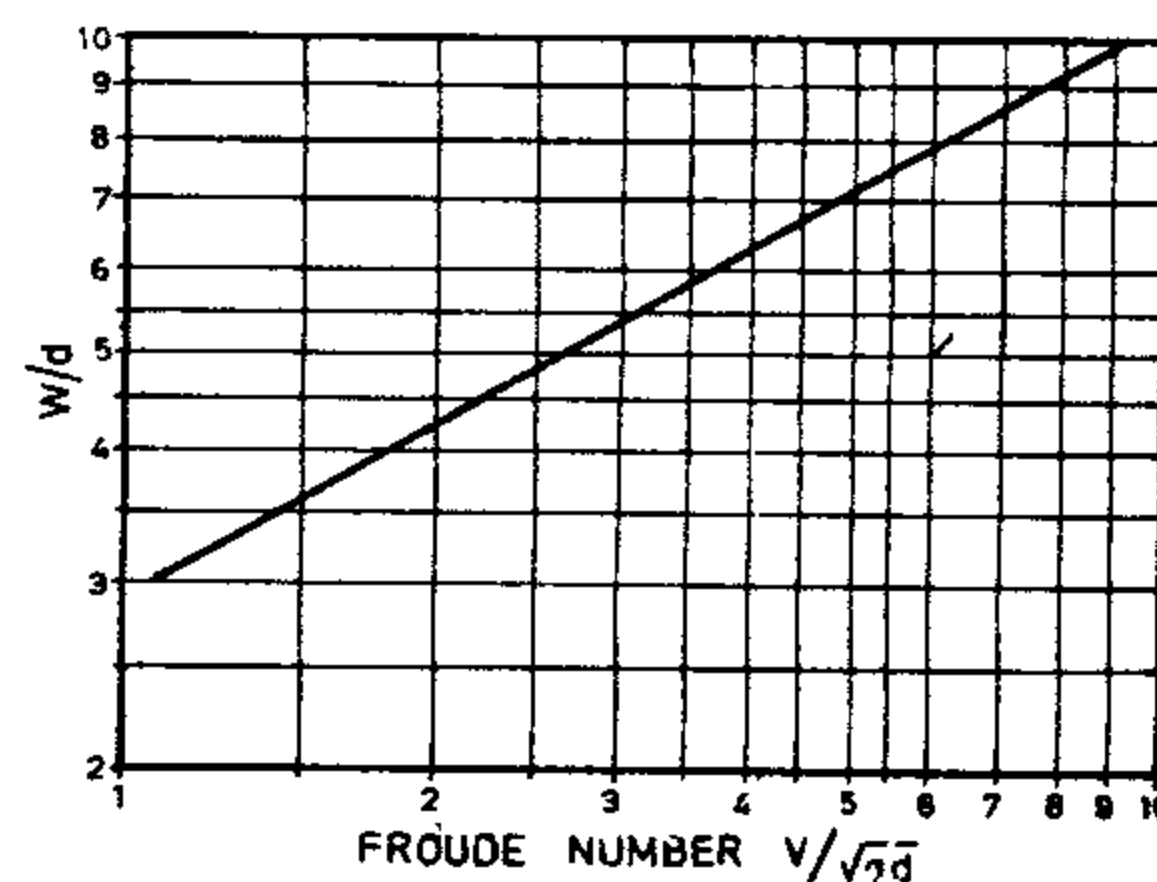

SELECTING REINFORCEMENT DWG.

GROUP No	STR. No	DWG. No
1	100 to 220	16/1/3/01
2	240	16/1/3/02
3	260 to 280	16/1/3/03
4	300	16/1/3/04
5	320 to 340	16/1/3/05
6	360 to 400	16/1/3/06

EXAMPLE:










- 1 - $Q = 1.2$ m³/s & $h = 8.3$ m.
- 2 - $V = \sqrt{2 \times 9.81 \times 8.3} = 12.76$ m/s.
- 3 - $D = 0.6 \sqrt{1.2} = 0.657$ m.
Selected: $D = 700$ m.m.
- 4-1 $d = \frac{1.2}{12.76} = 0.094$ m.
- 4-2 $F = \frac{12.76}{\sqrt{9.81 \times 0.094}} = 7.35$
- 4-3 From the graph $\frac{W}{d} = 8.9$
- 4-4 $W = 0.094 \times 8.9 = 0.837$ m.
- 5 - Structure No. 280 which its $W = 2.80$ m. is selected.
- 6 - Use dwg. No 16/1/3/03 for reinforcement.

REFERENCE DWGS. For plan sections see dwg. No 16/1/1/01
For reinforcement see dwgs. No 16/1/3/01 TO 16/1/3/06

Scale: IRRIGATION & DRAINAGE STANDARDS
Date: DWG. NO. 16/1/2/01
Approved: Sheet No 2 of 12 Rev. No

BAFFLED OUTLET
DIMENSION TABLE

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUD
TECHNICAL RESEARCH AND
STANDARD BUREAU

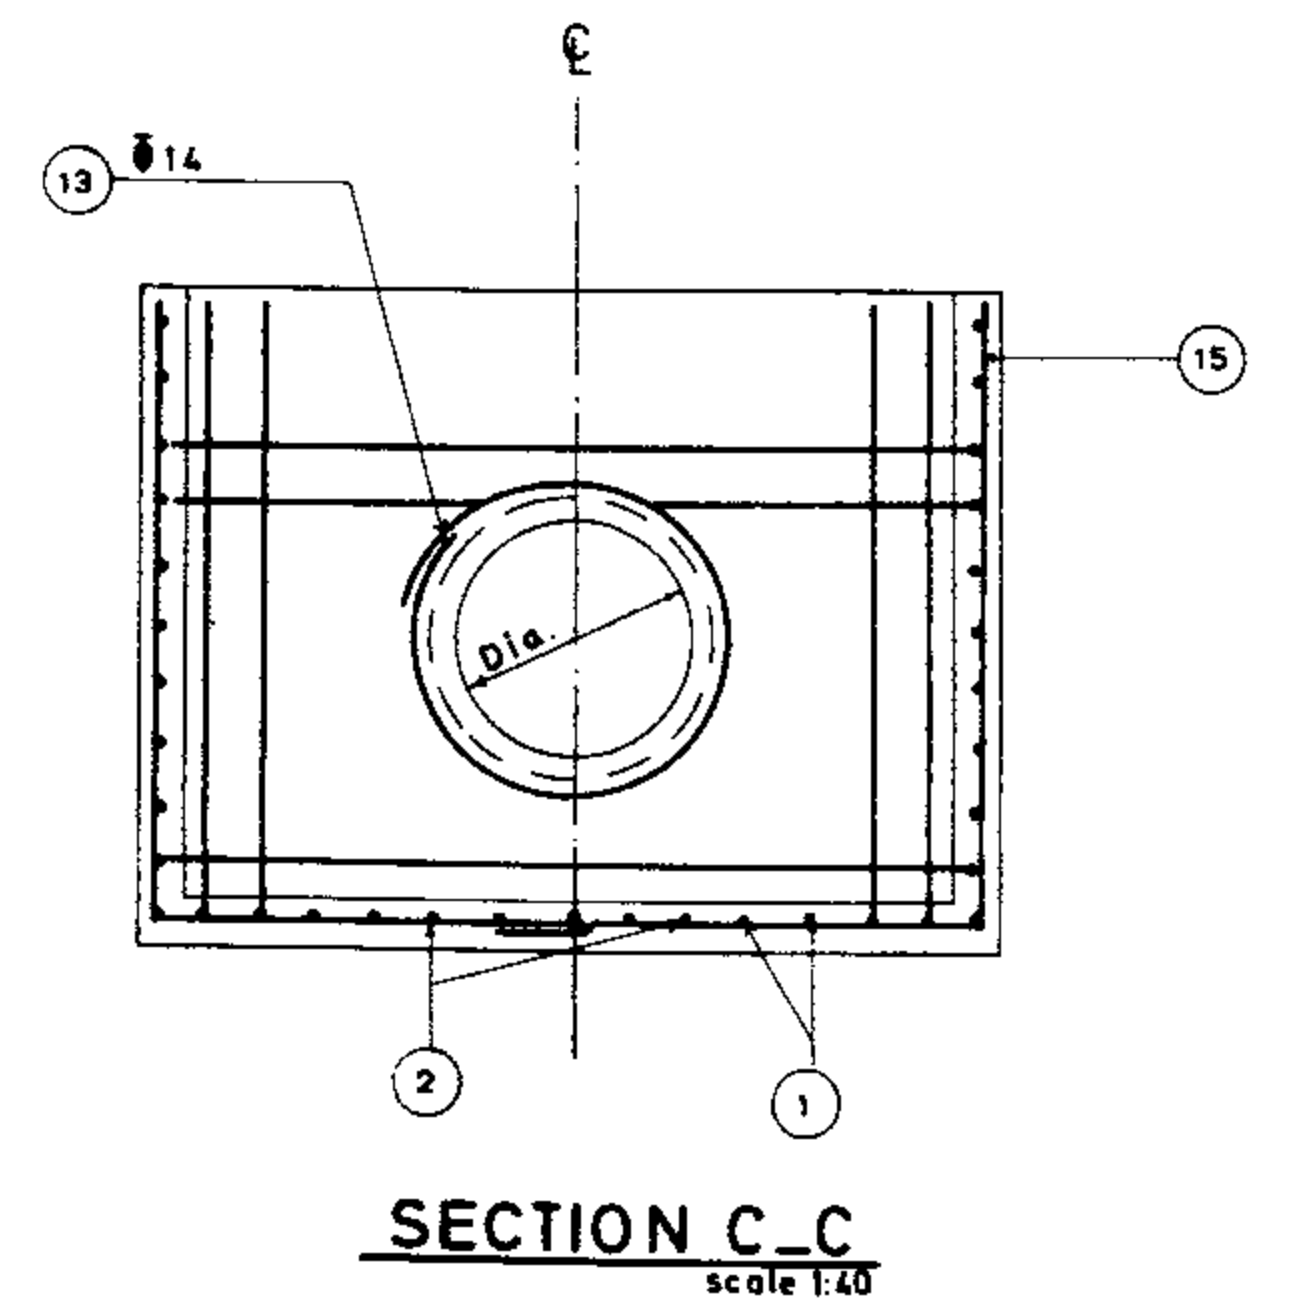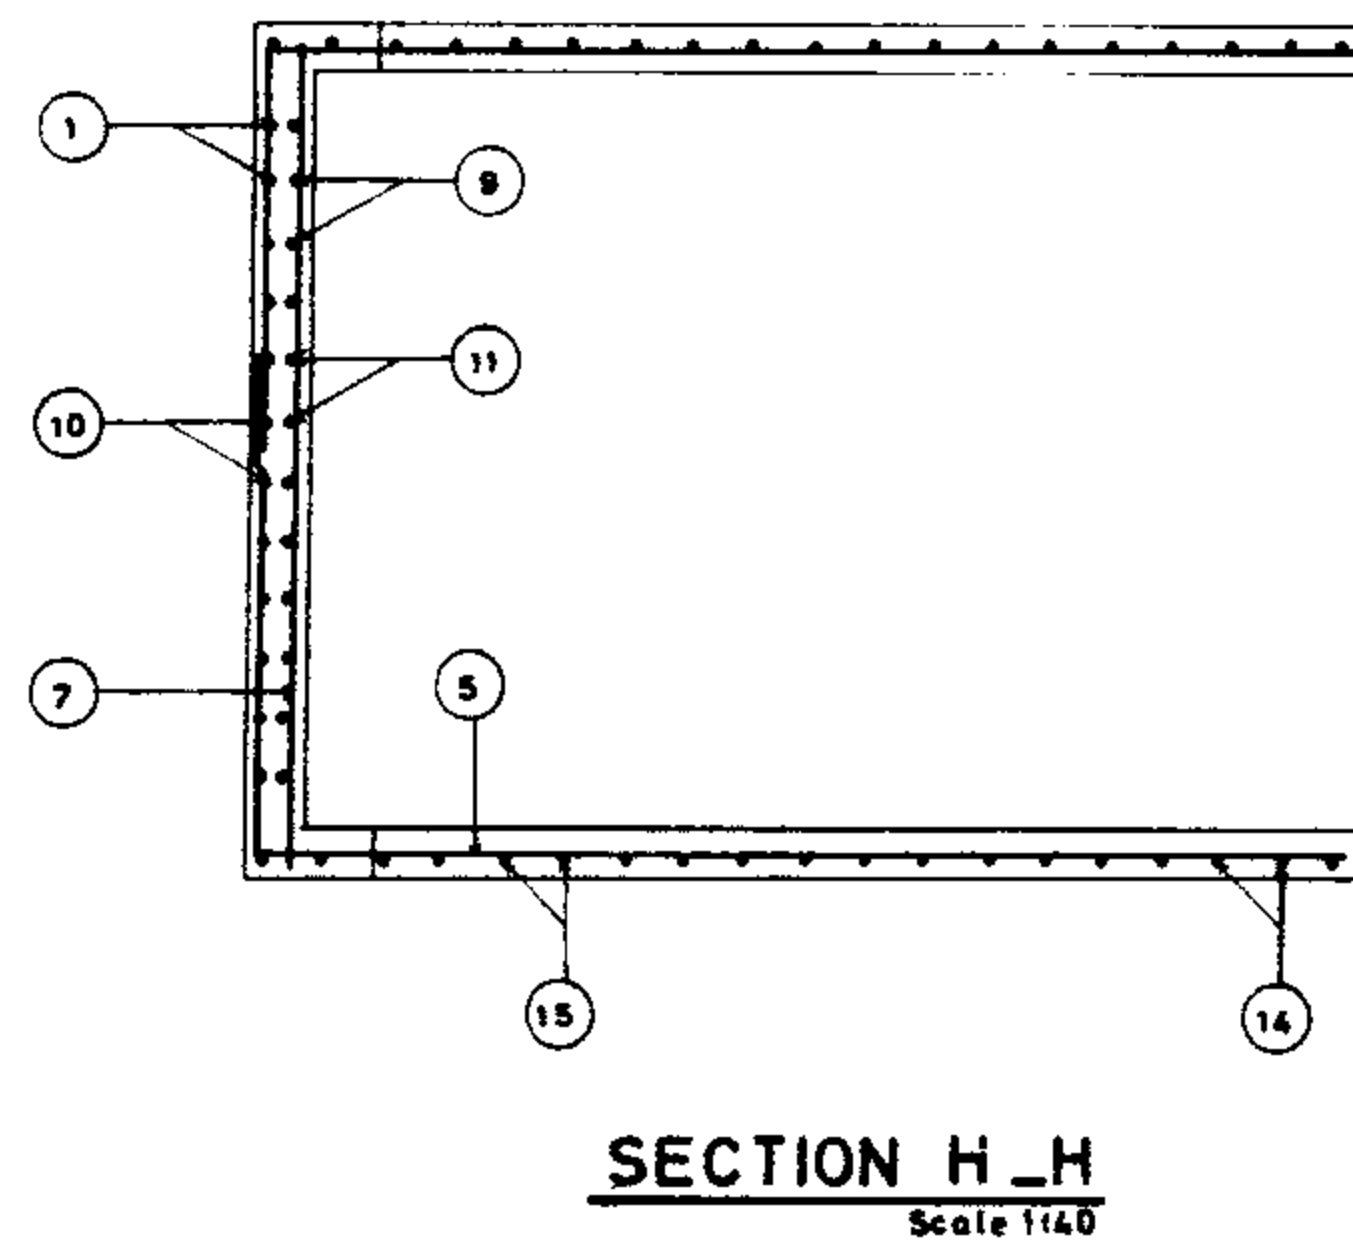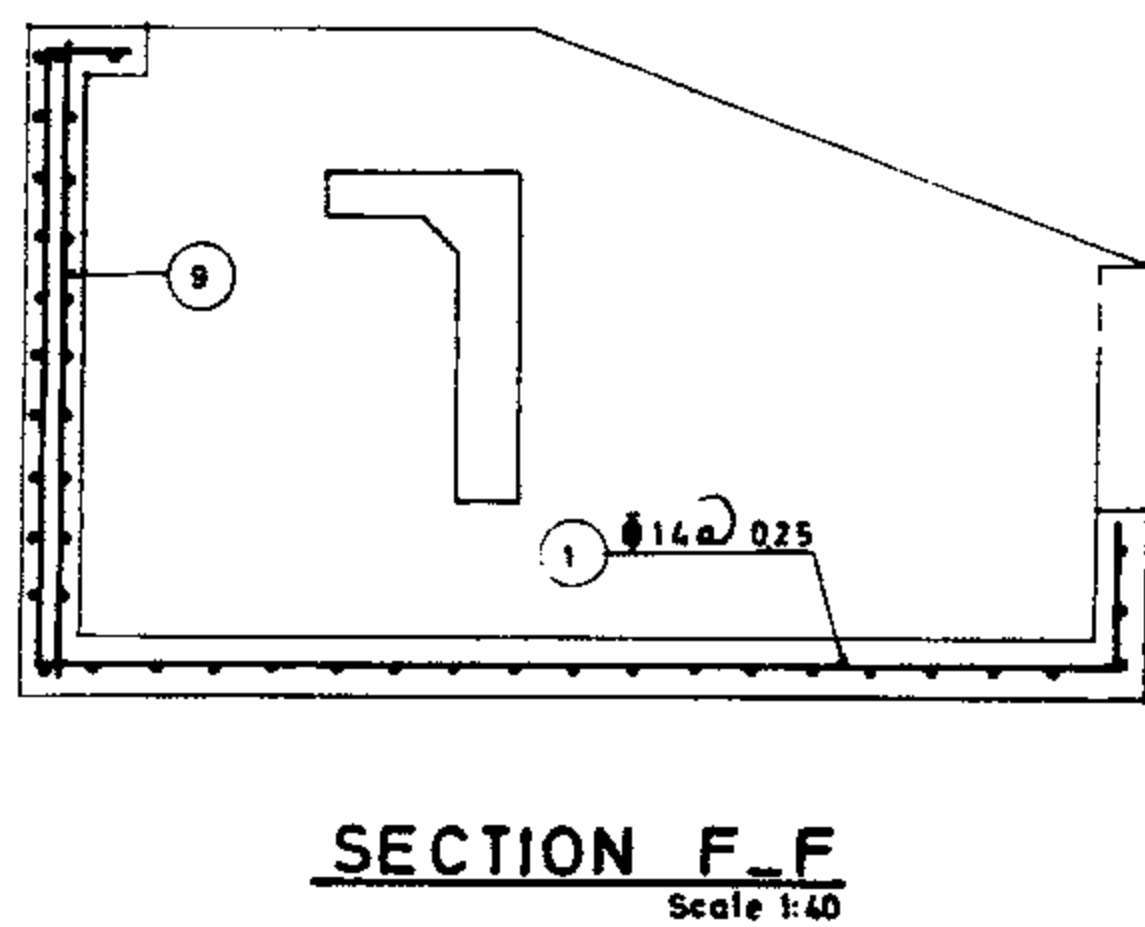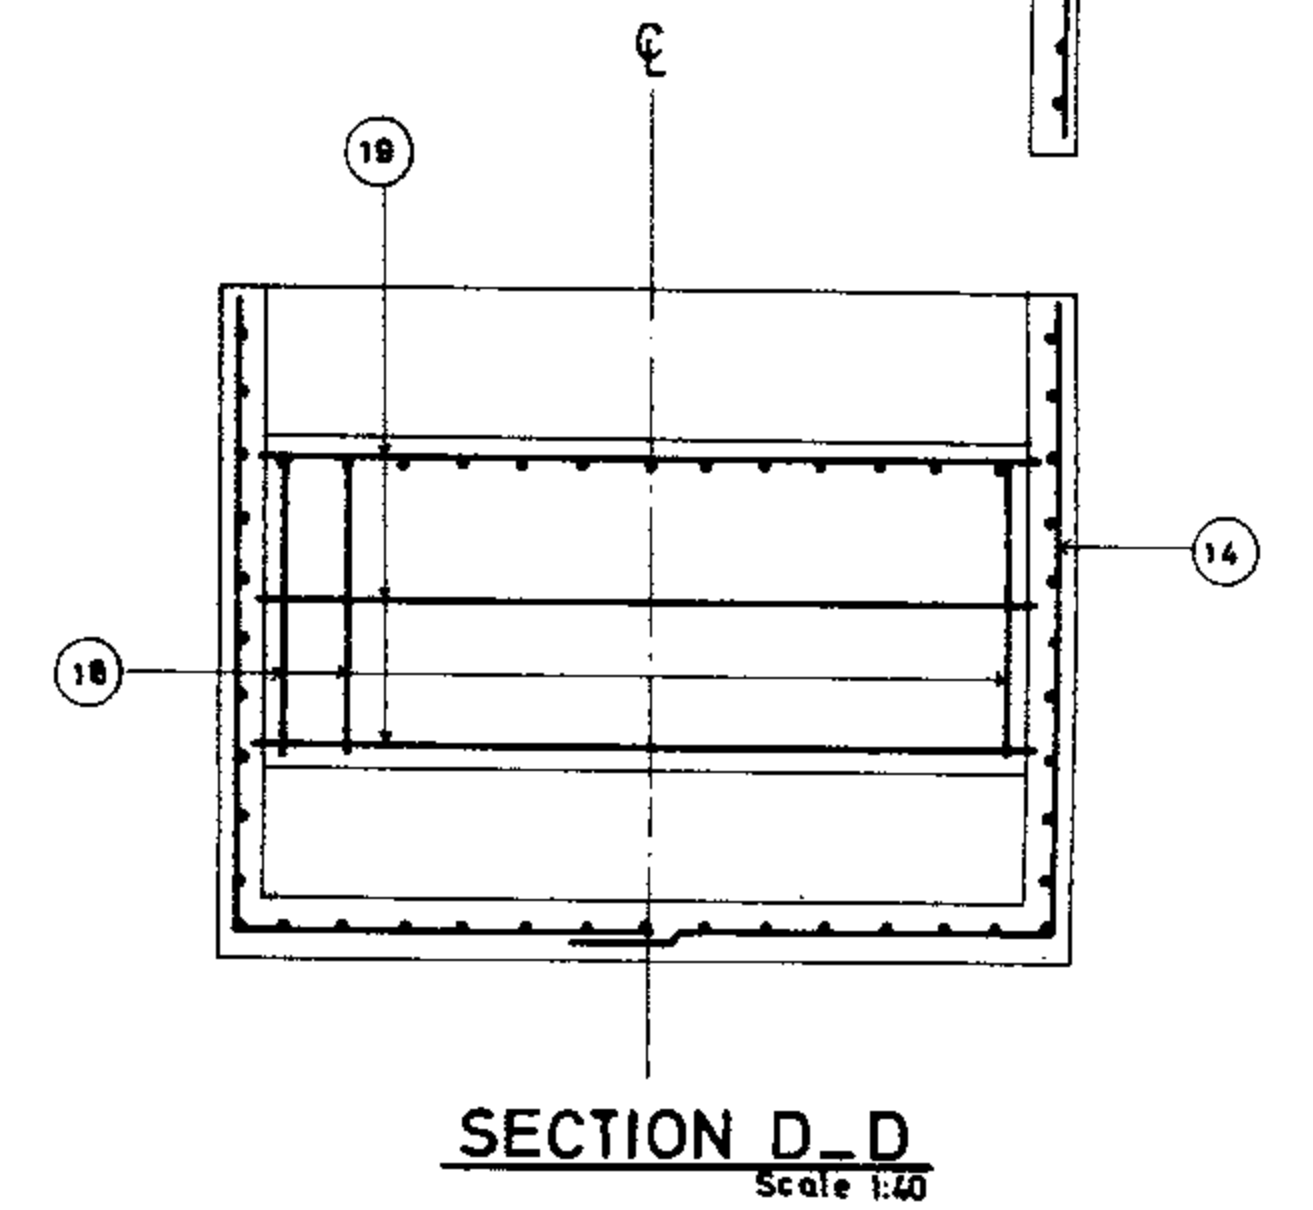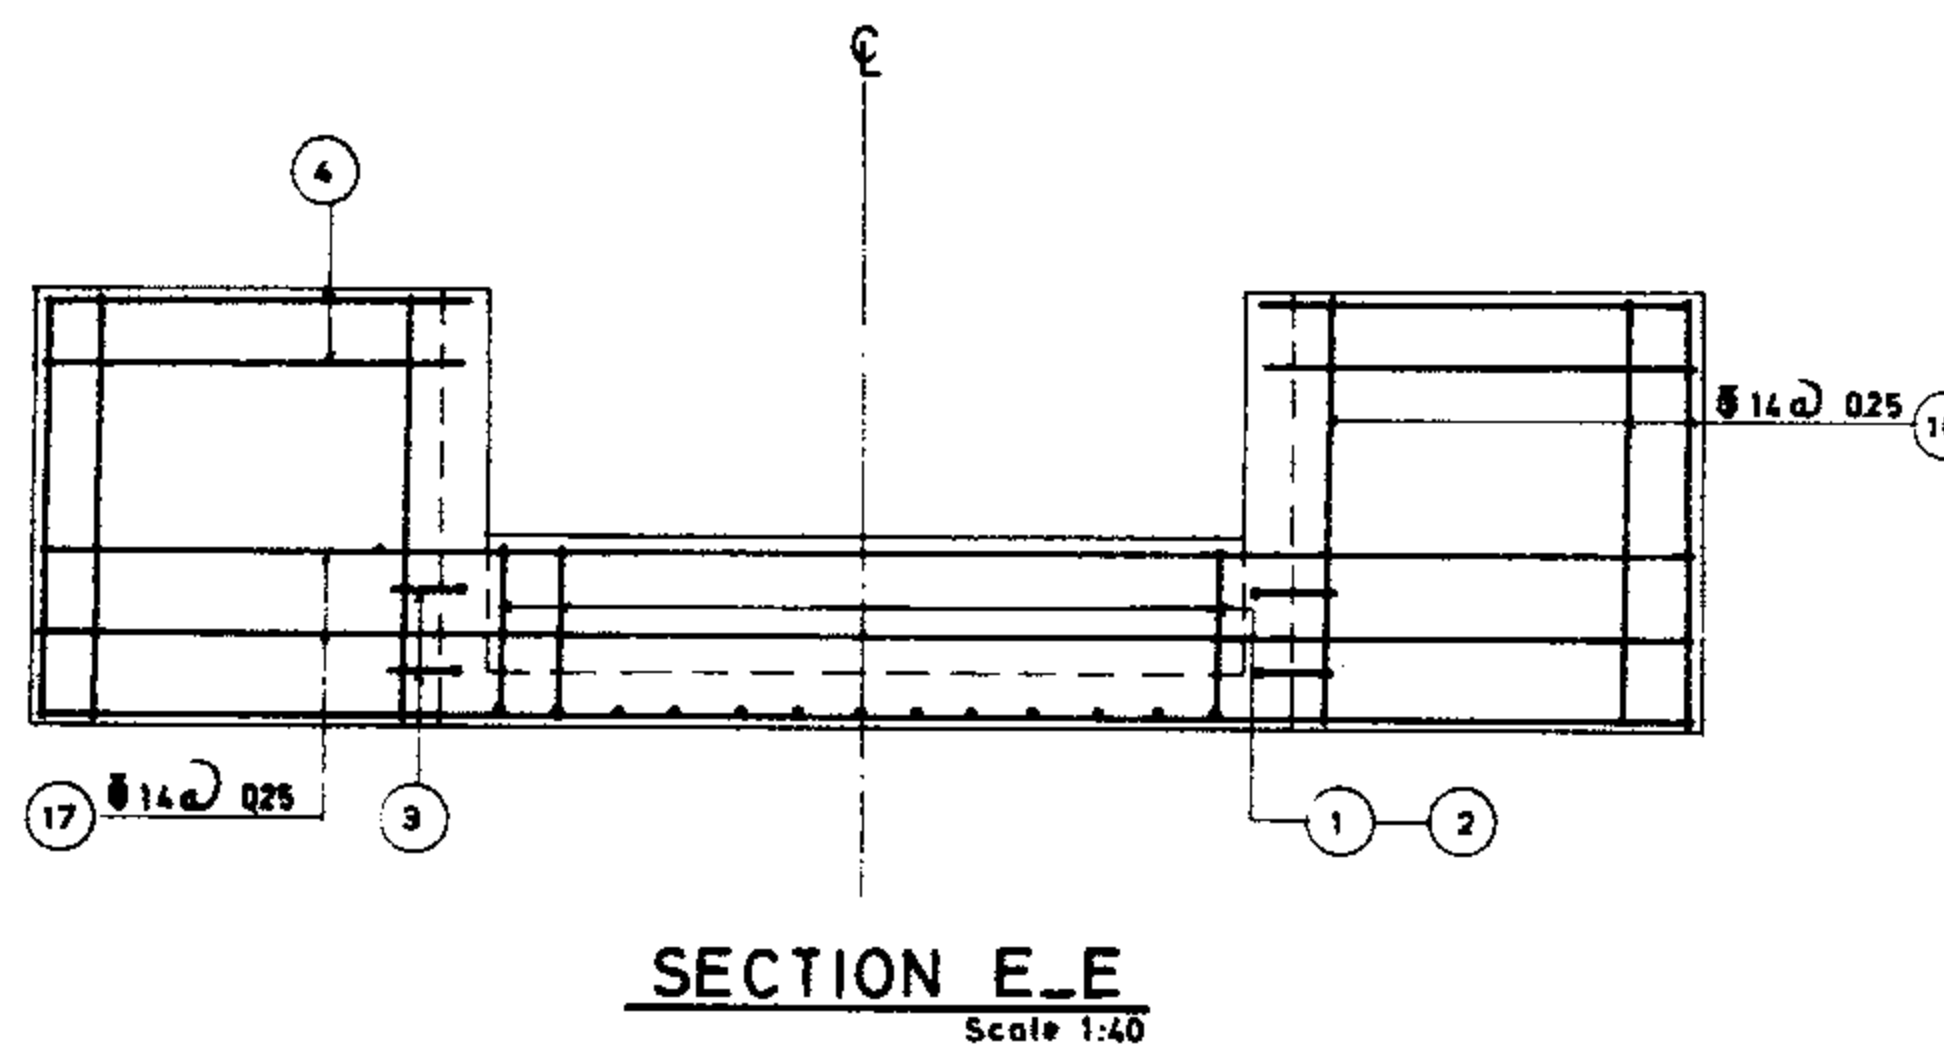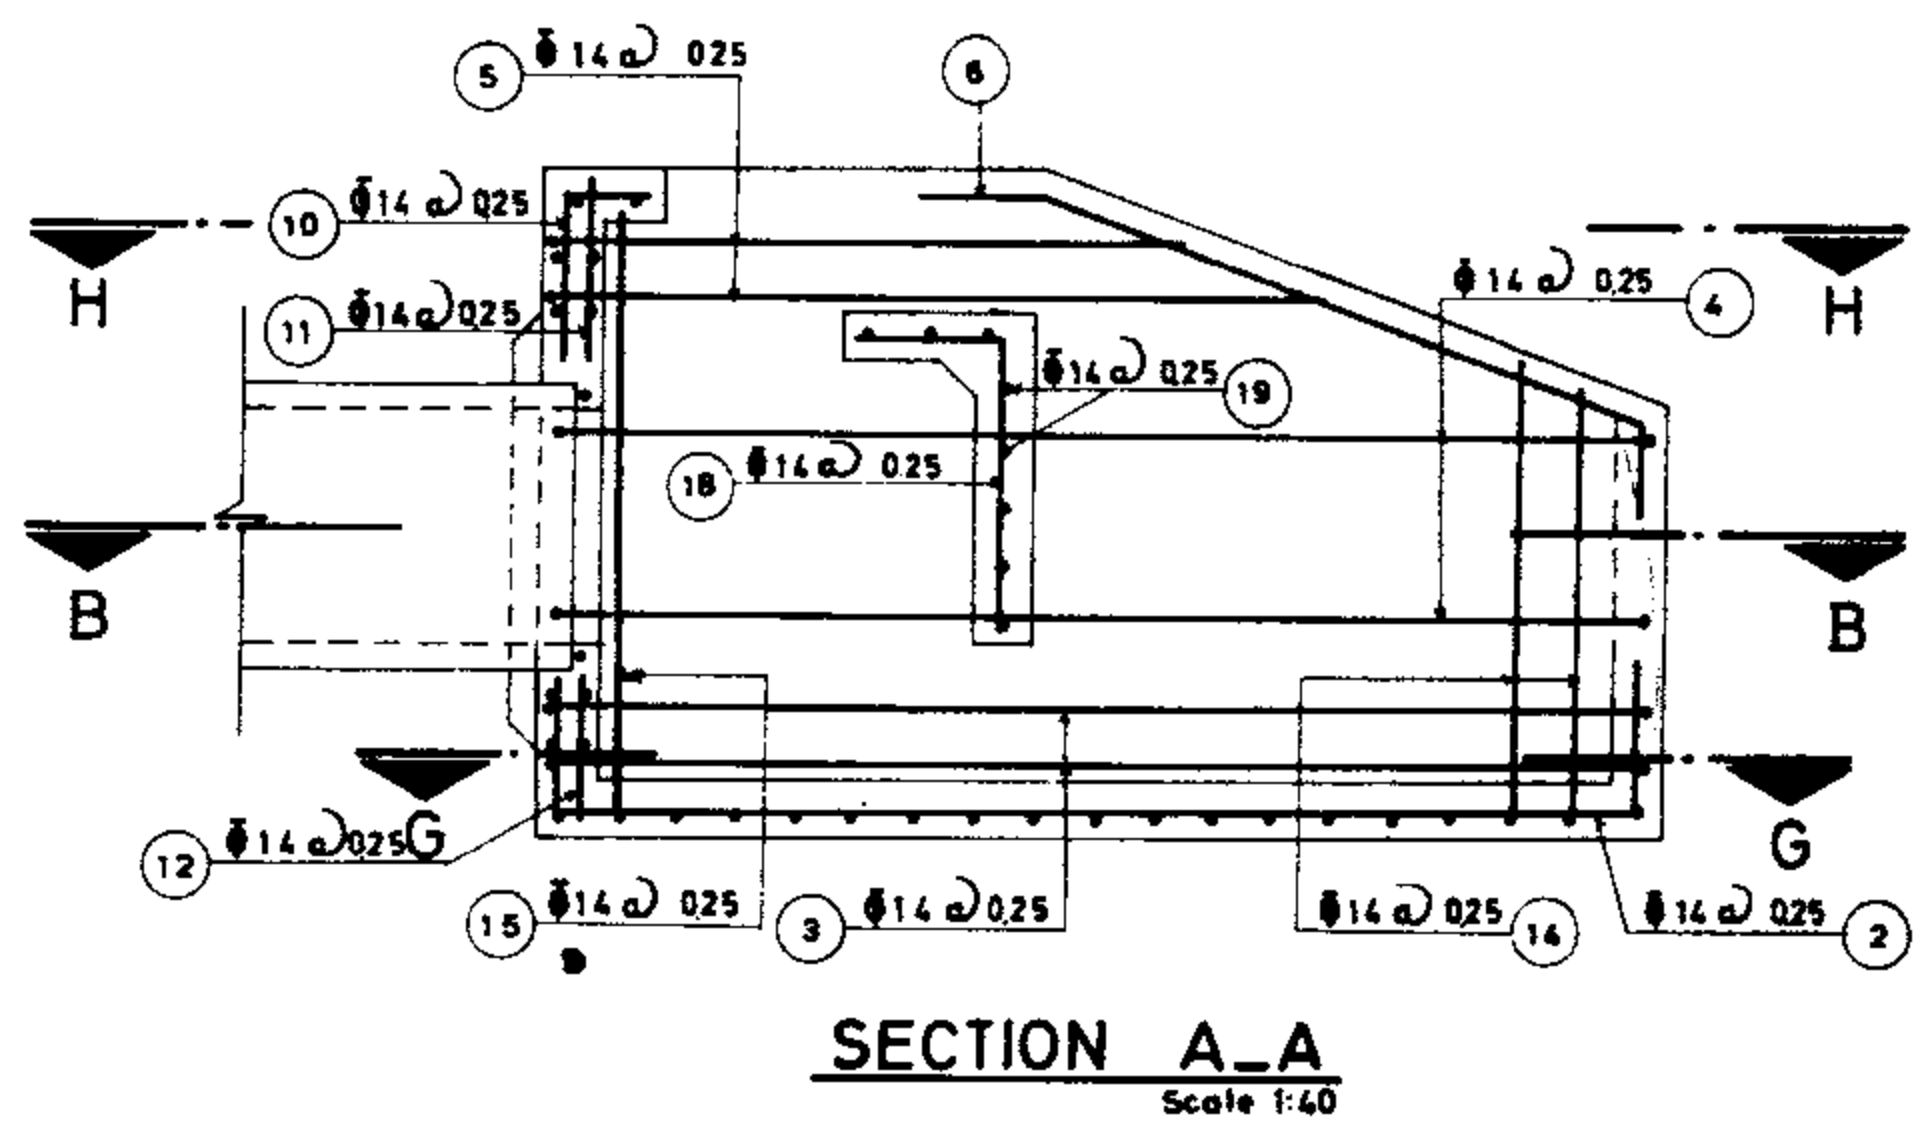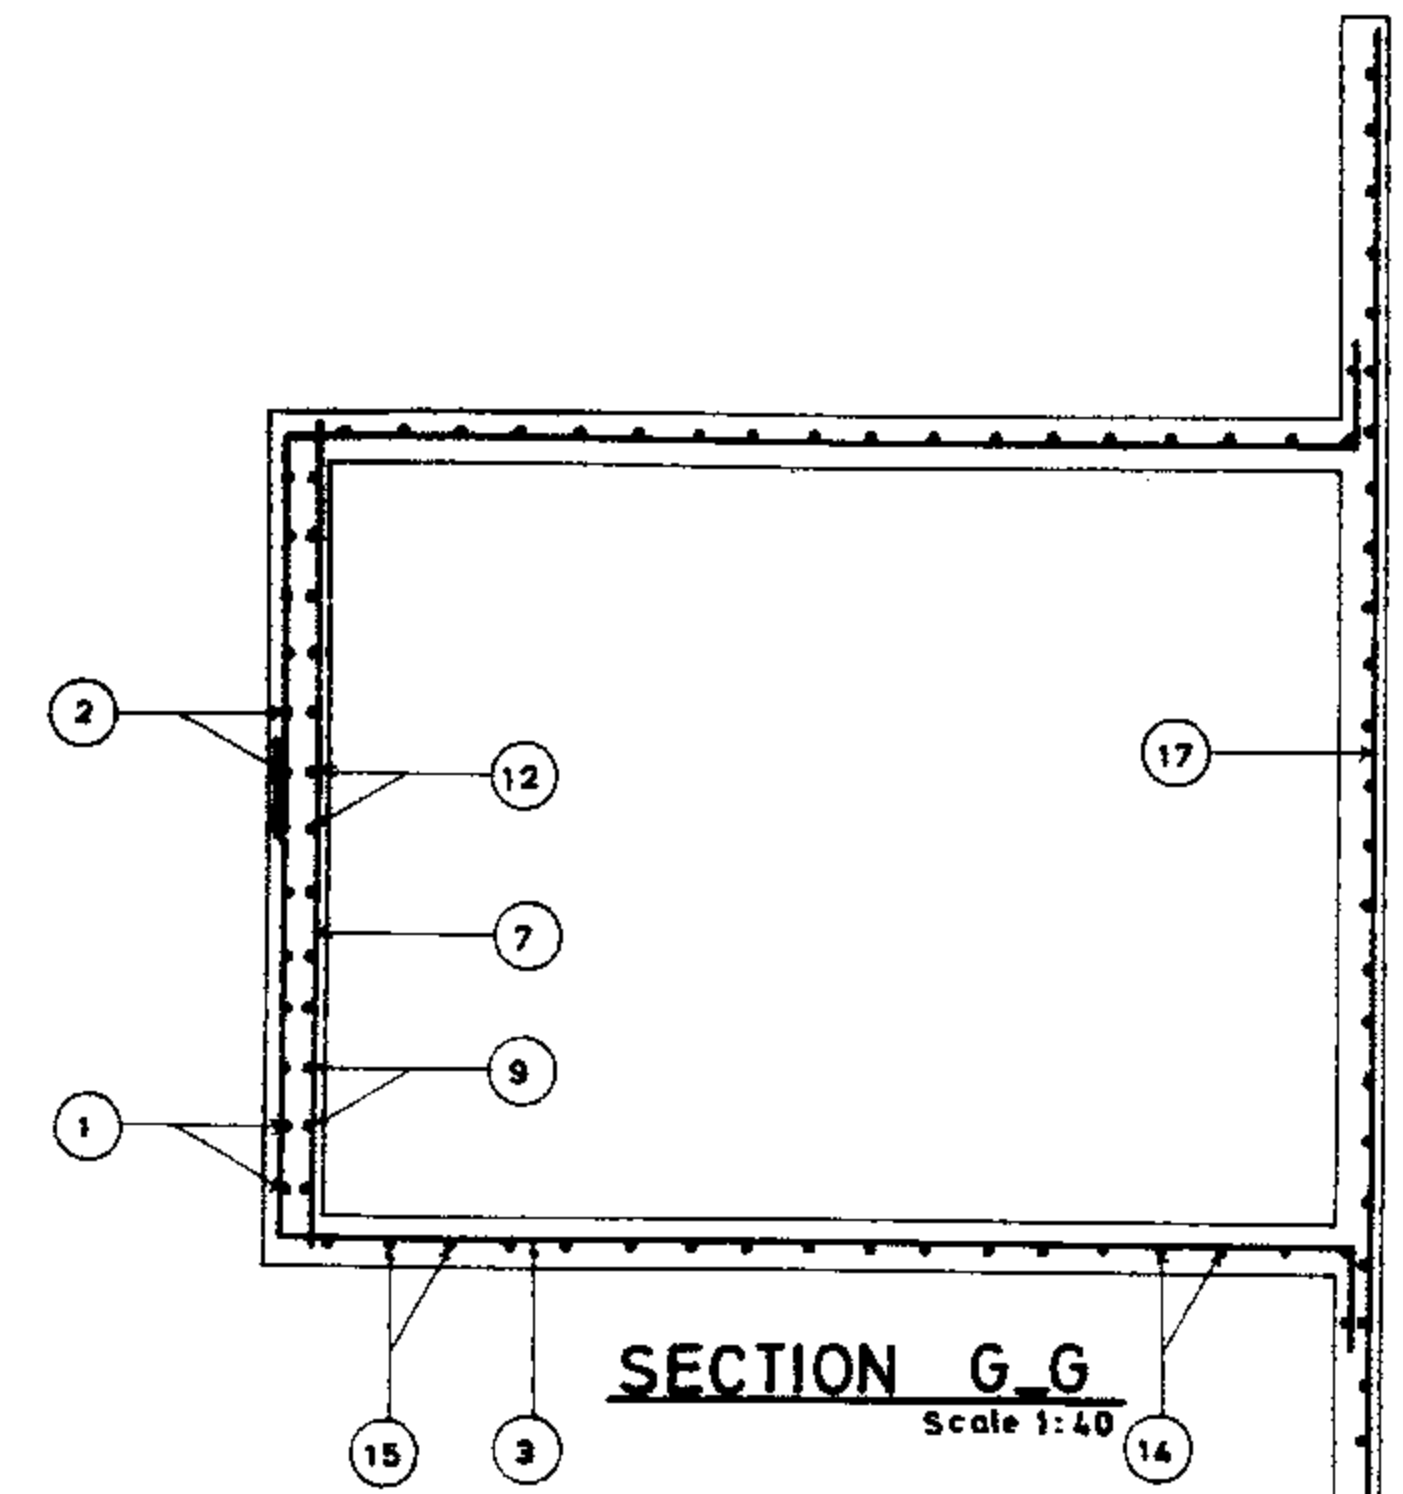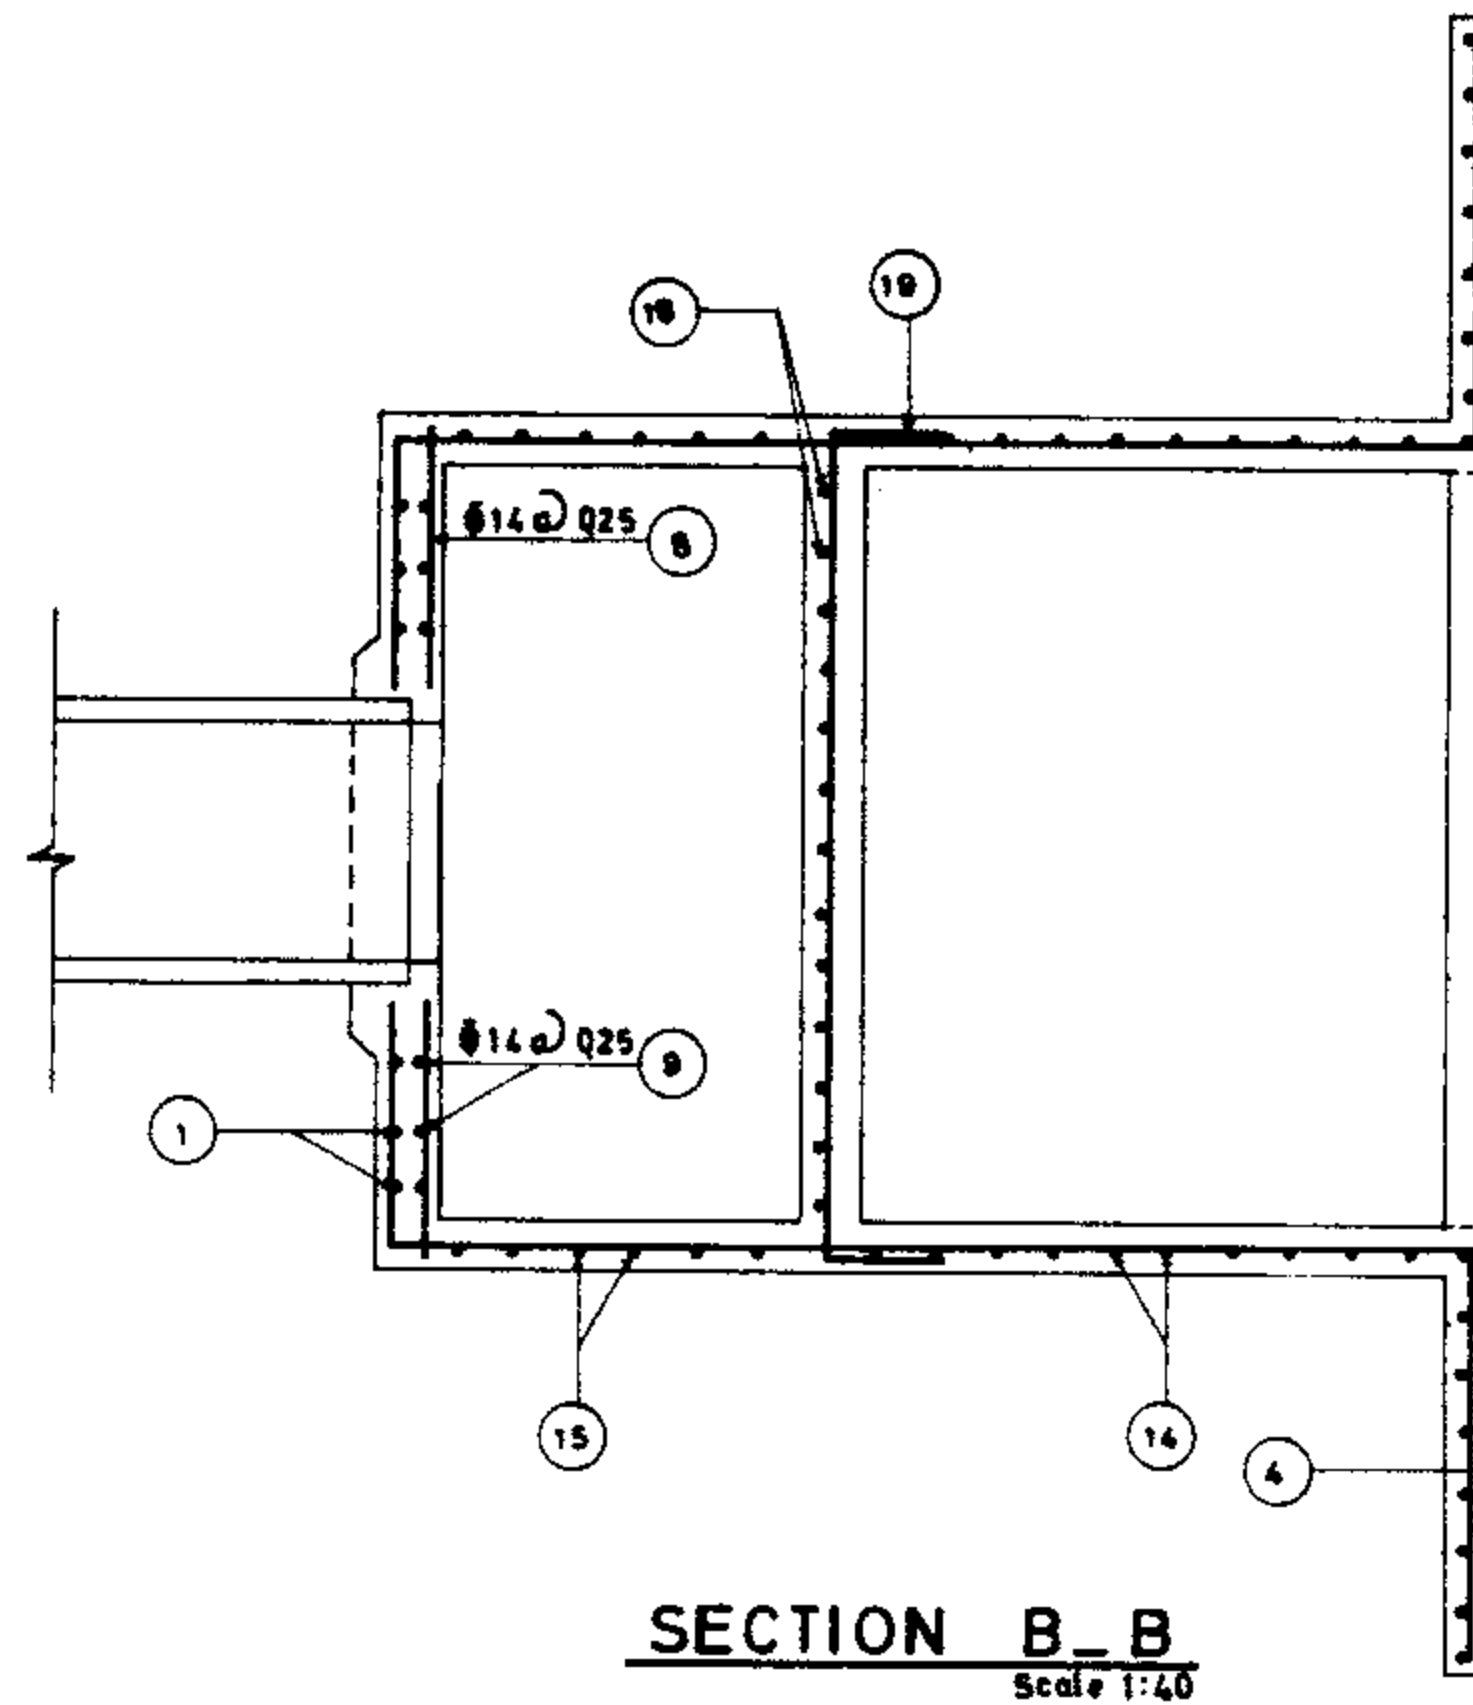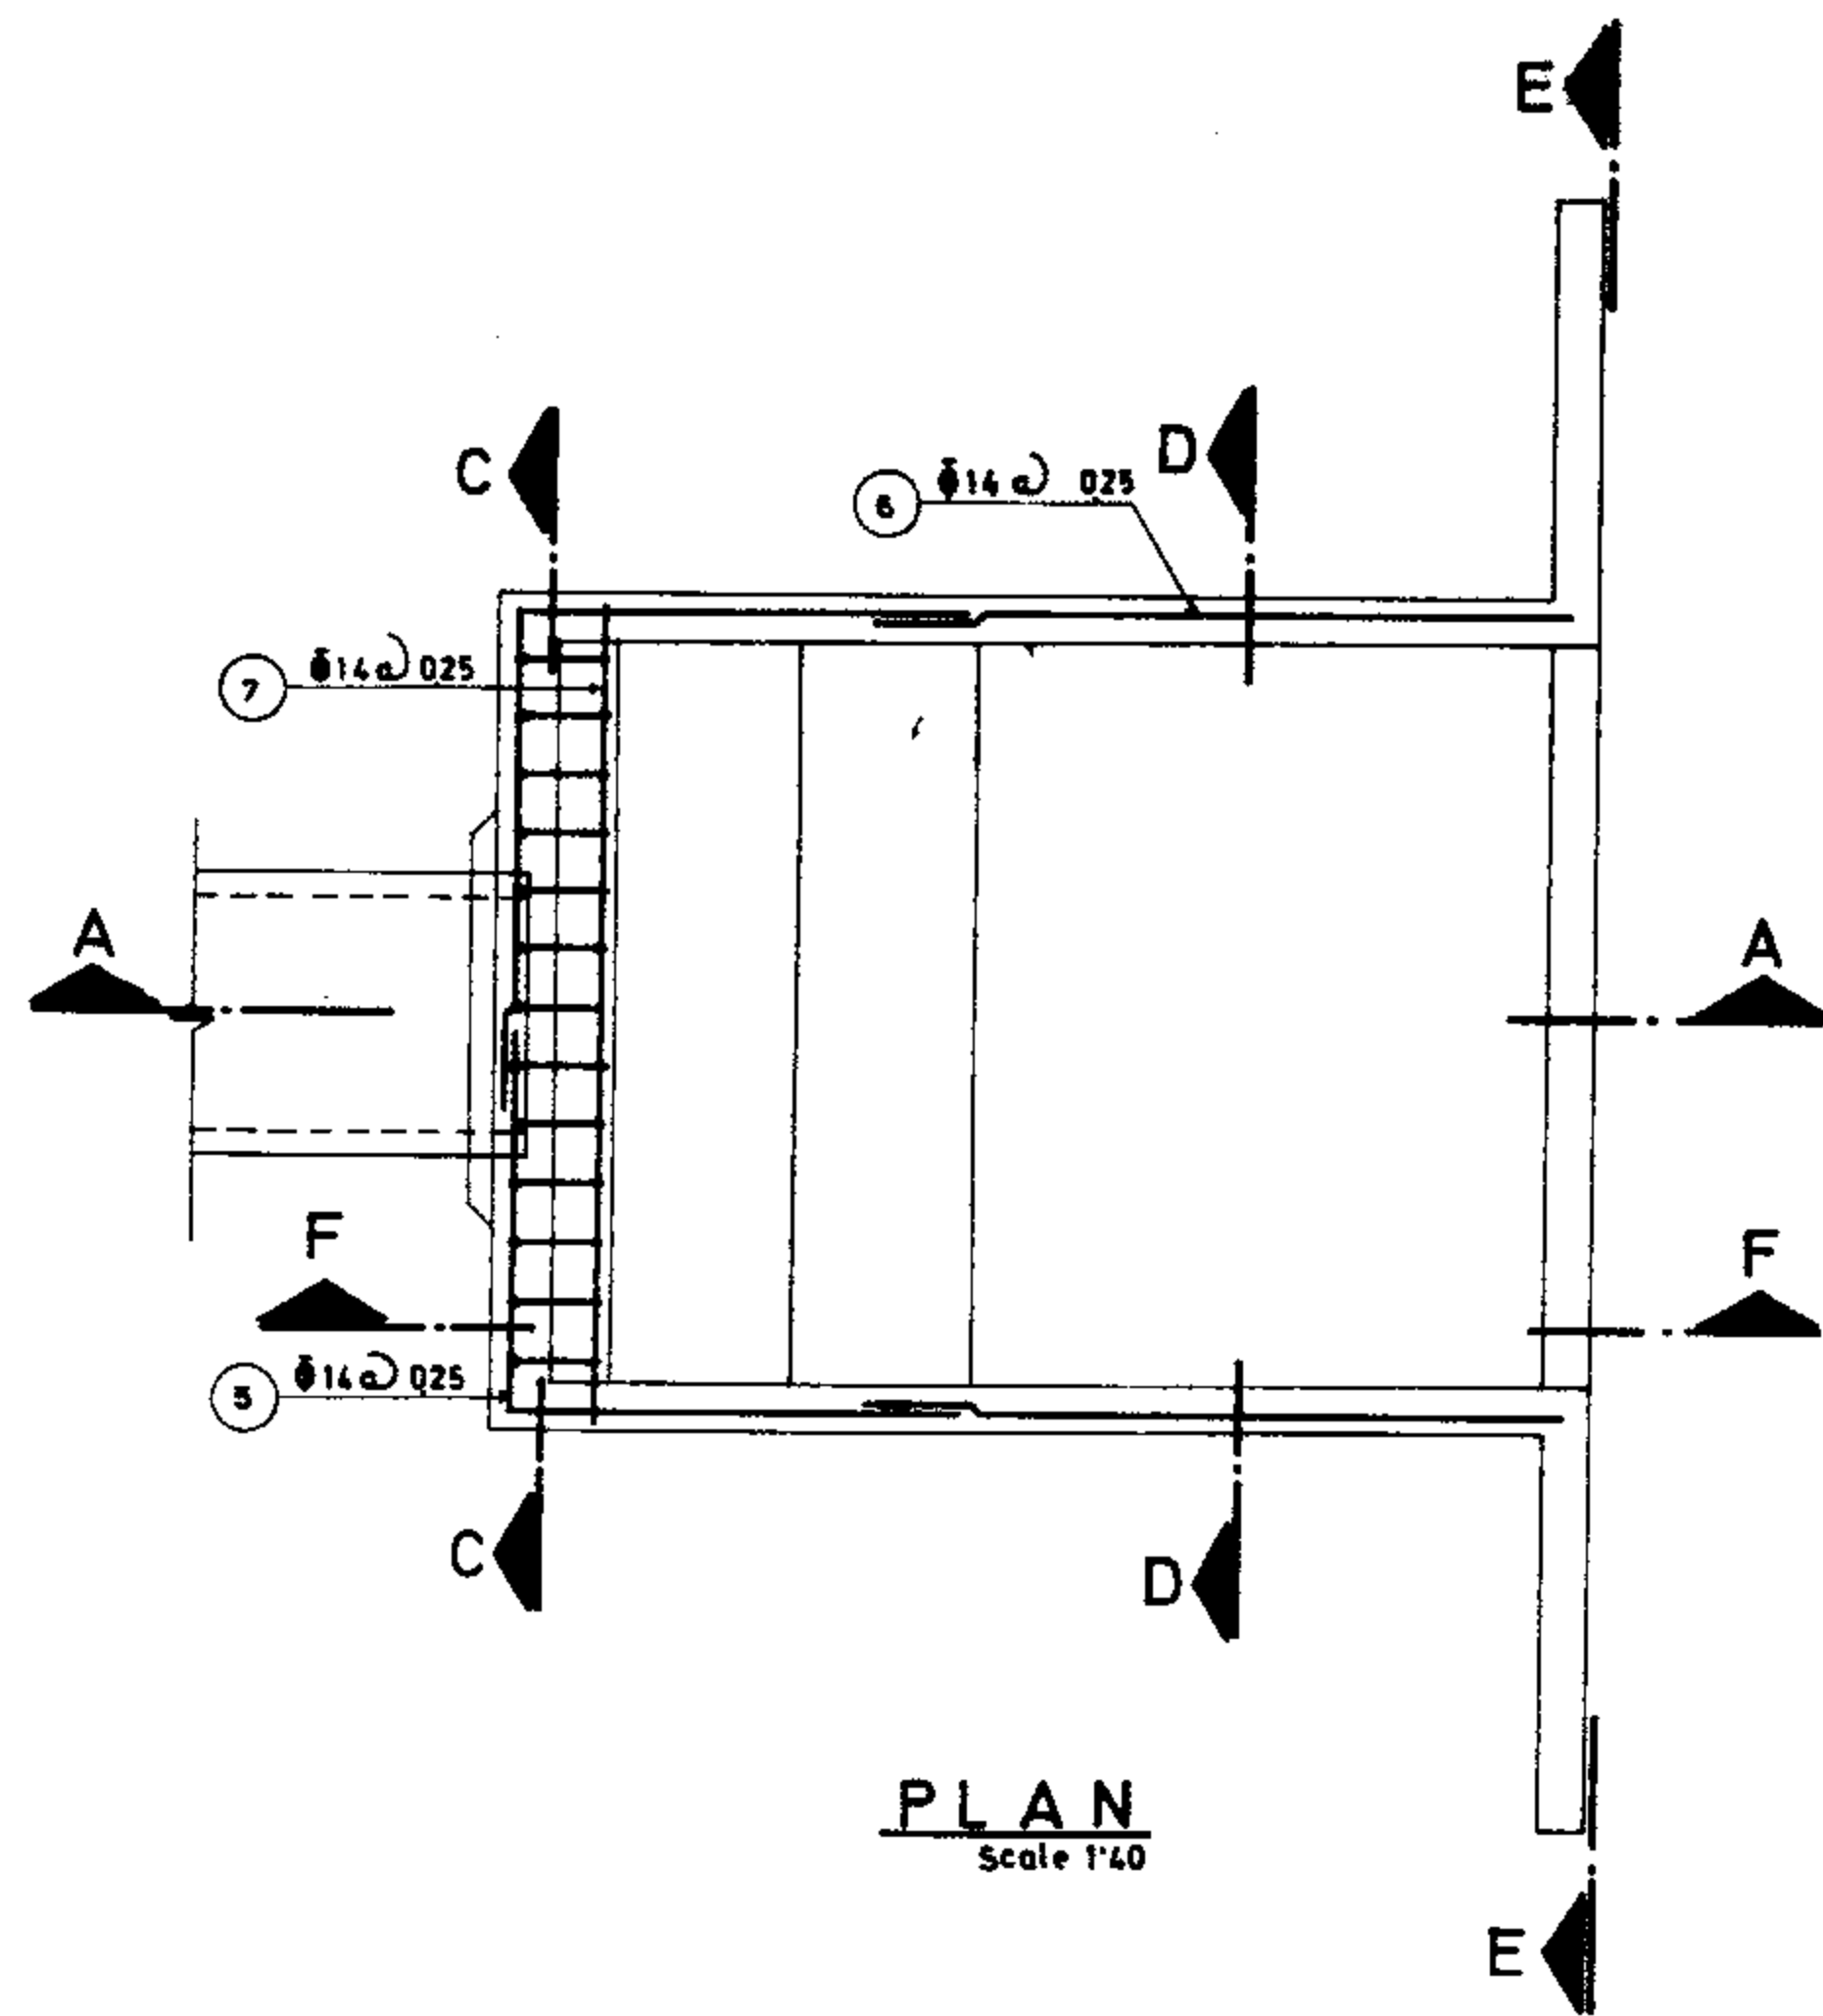

REFERENCE DWGS: For dimensionables see dwg. 16/1/2/01
 For list of reinforcement see dwgs. 16/1/3/07 & 16/1/3/08
 For plan & sections see dwg. No. 16/1/1/01

Scale: 1:40

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG No. 16/1/3/01


Approved:

Sheet No. 3 of 12


Rev. No.

BAFFLED OUTLET
 REINFORCEMENT
 PLAN & SECTIONS GROUP 1


ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

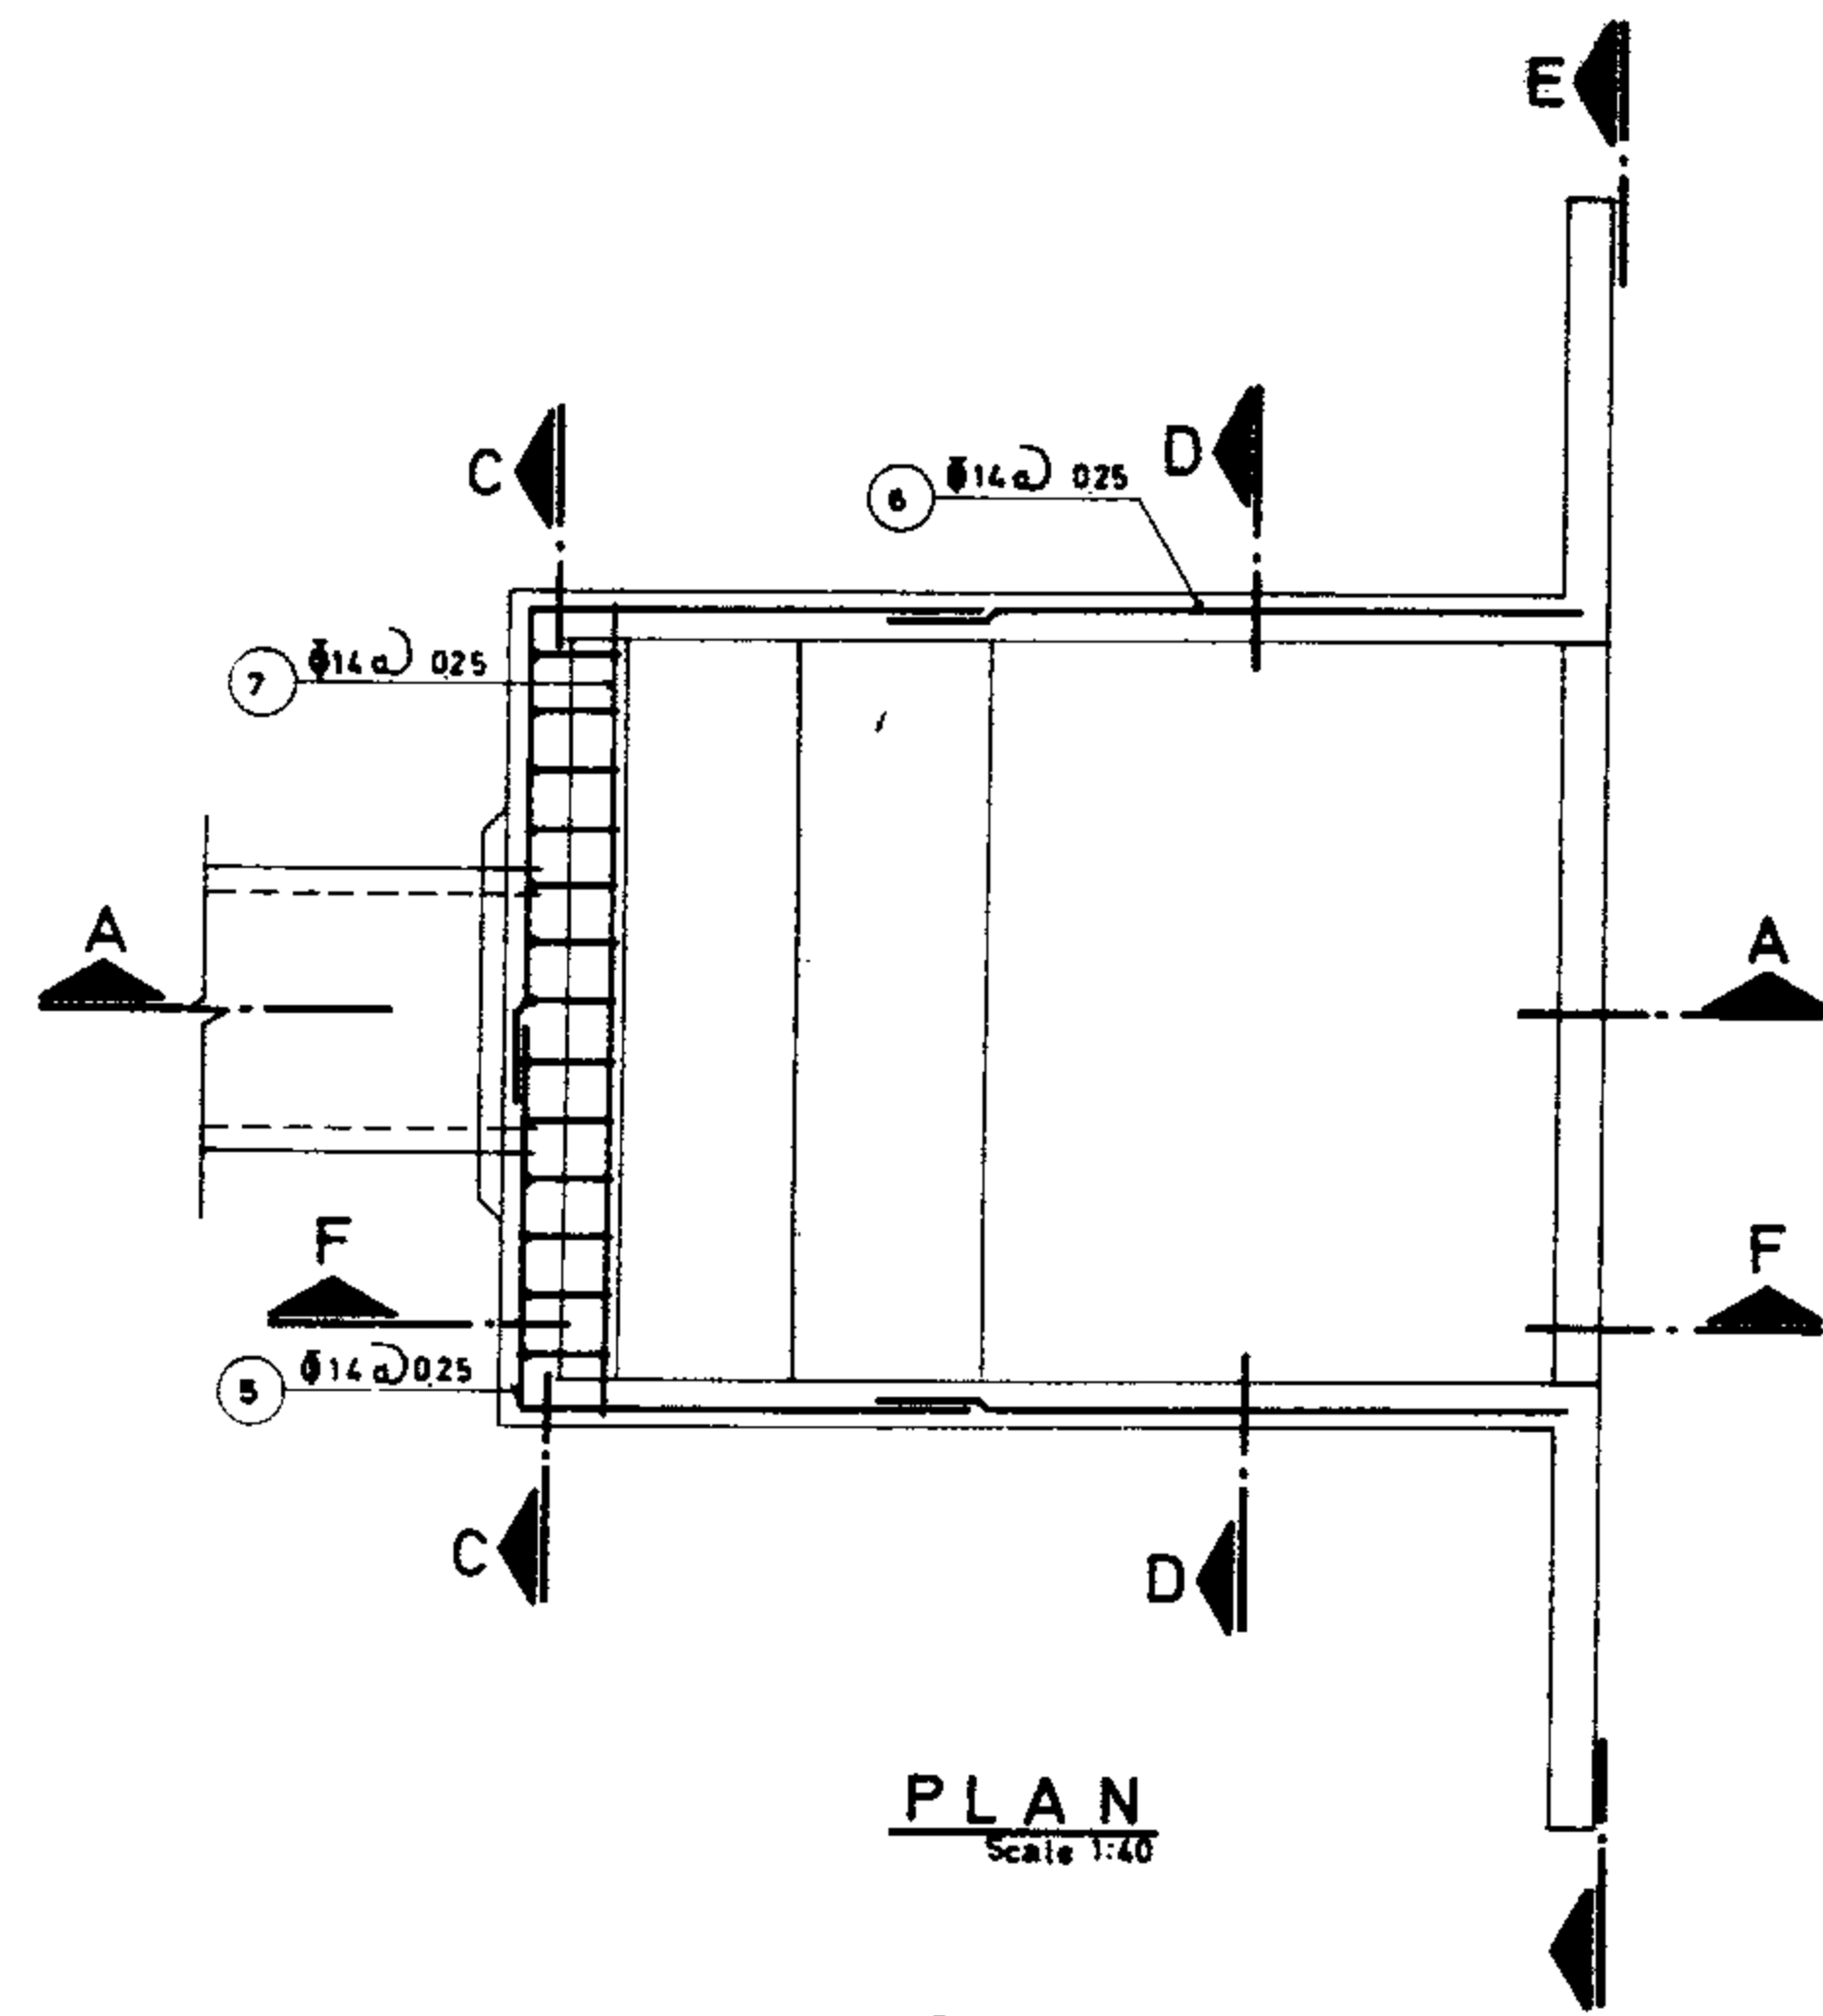


PLAN
Scale 1:40

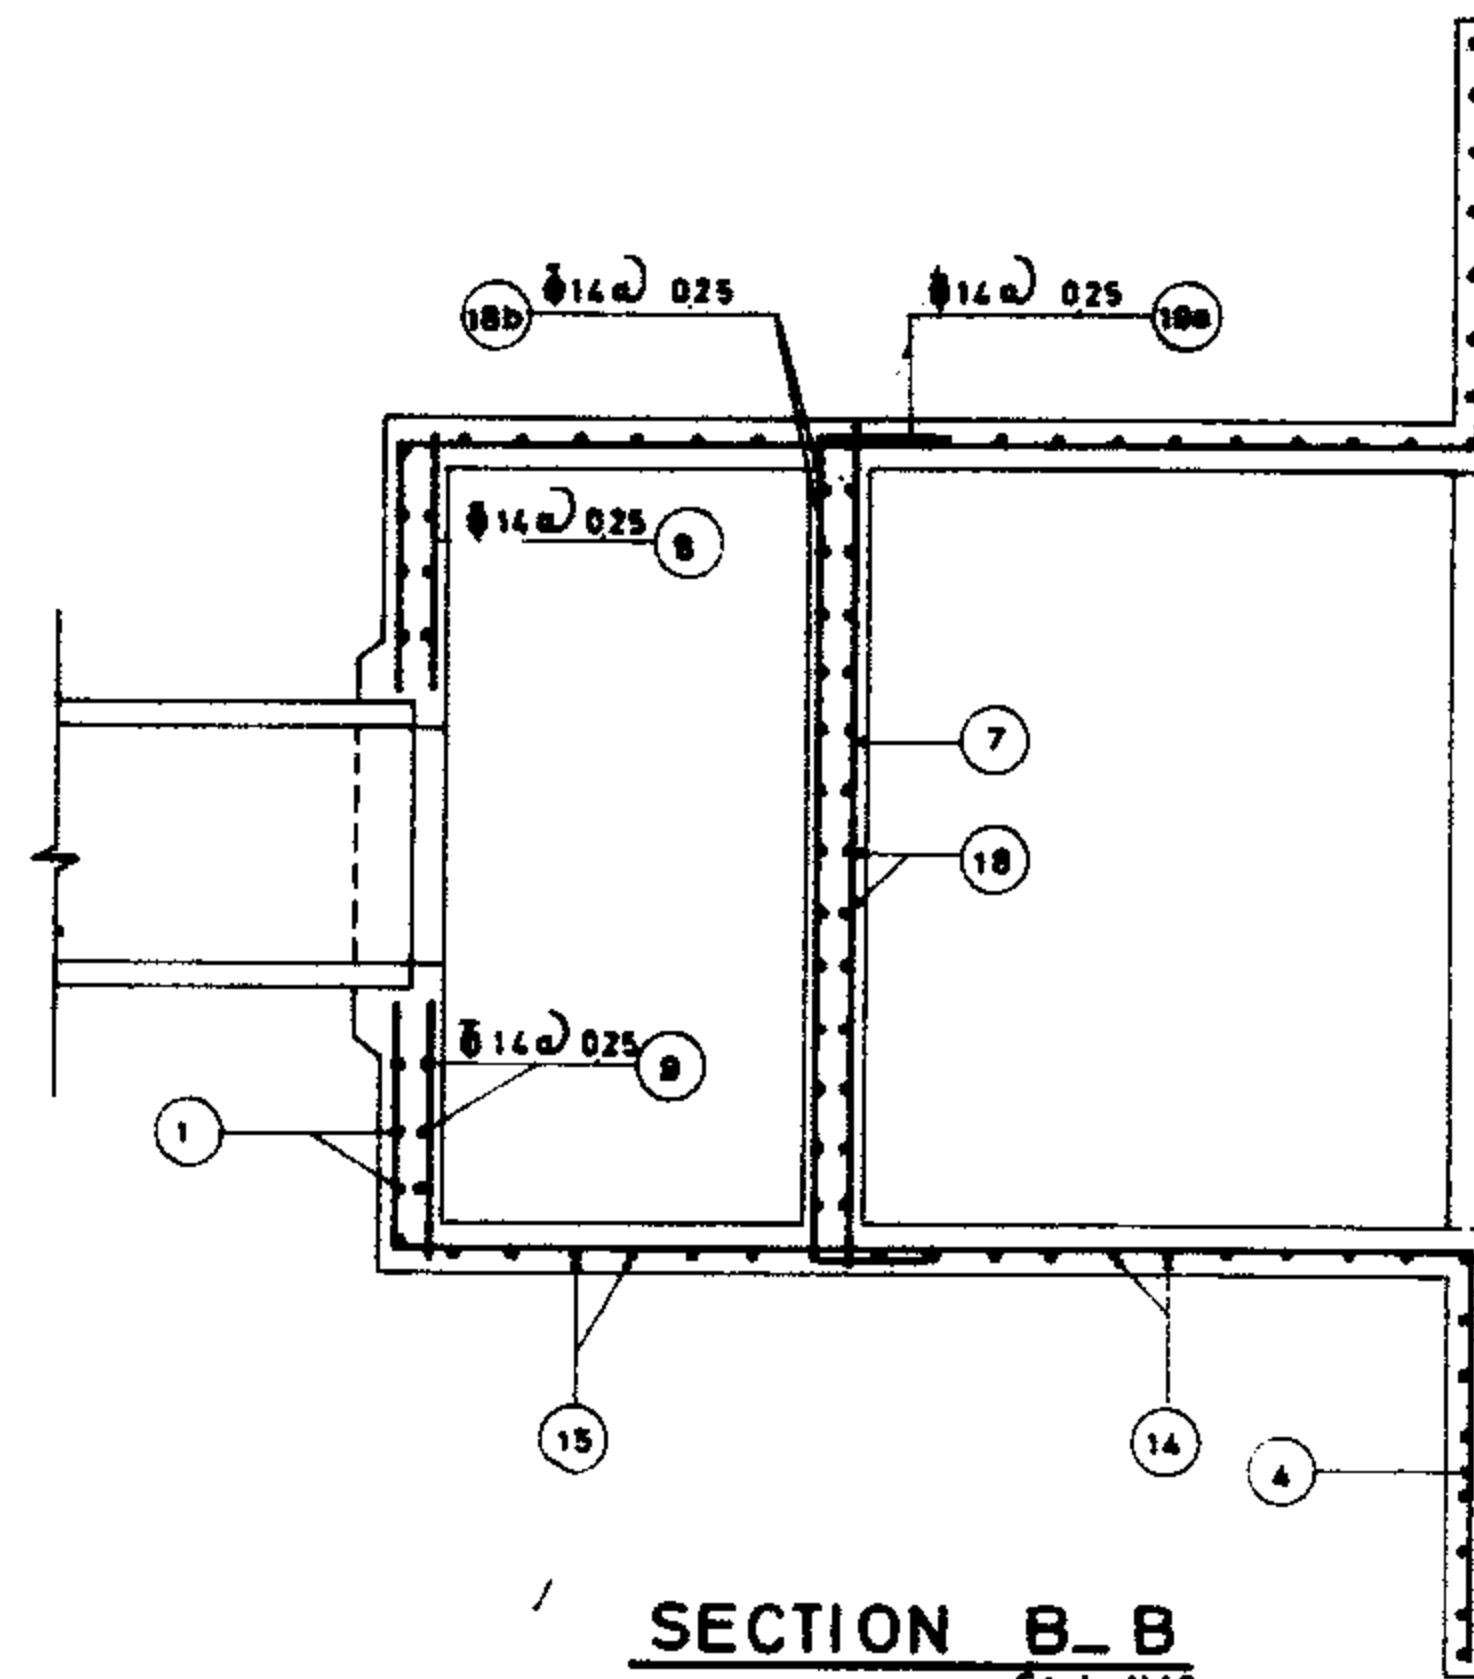


SECTION B-B
Scale 1:40

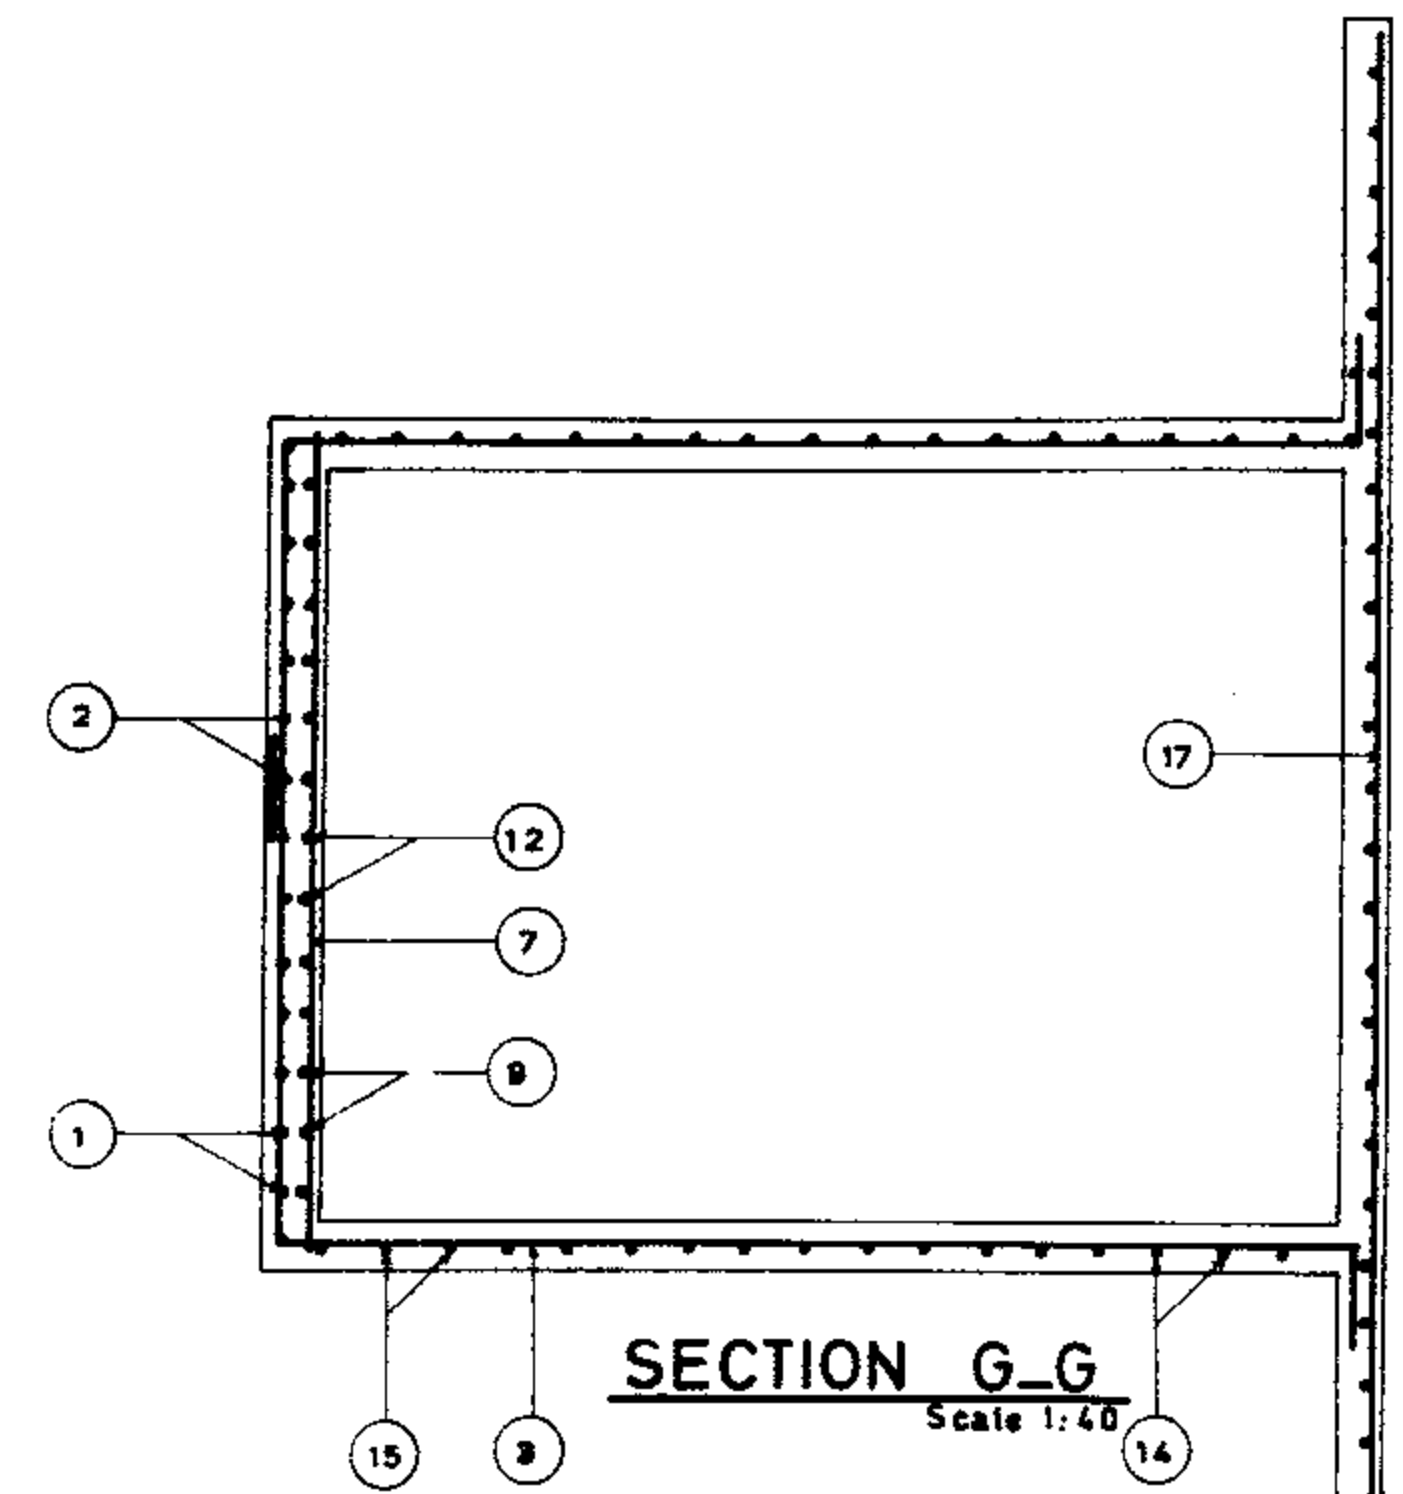


SECTION G-G
Scale 1:40

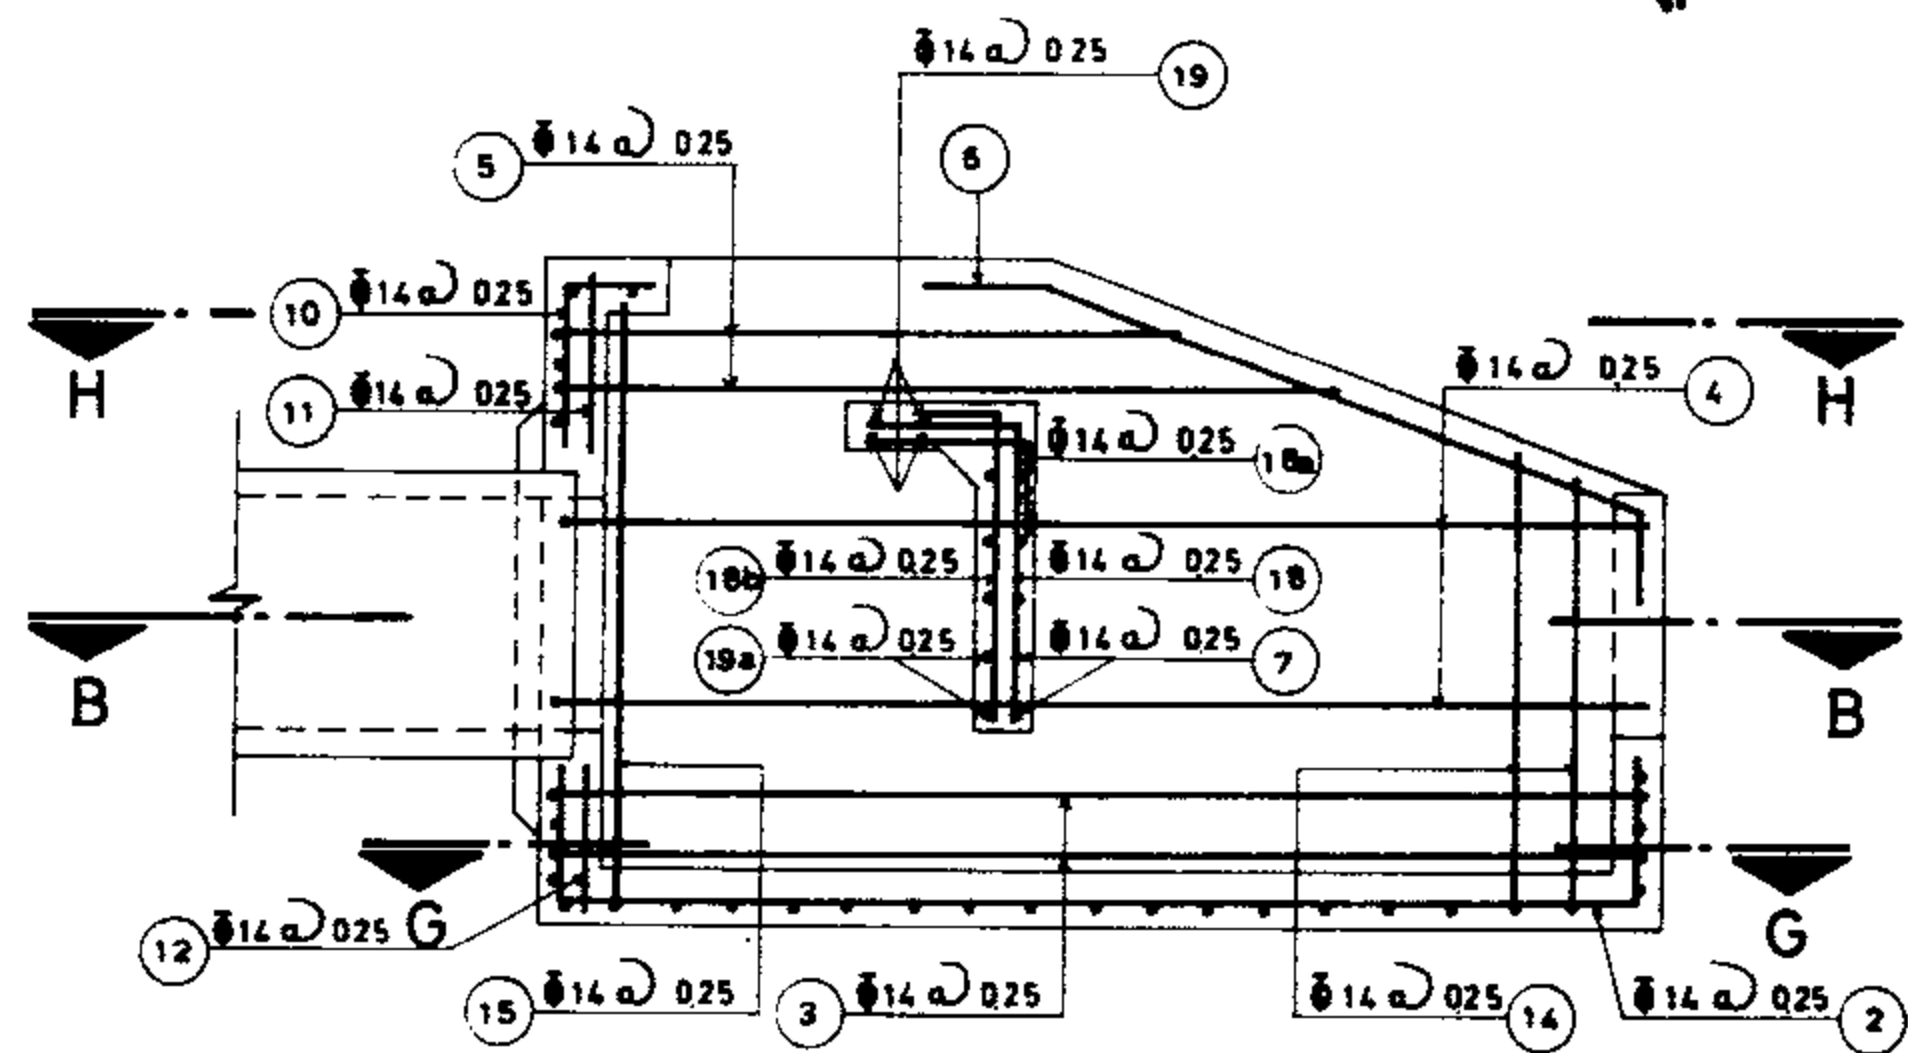


SECTION A-A
Scale 1:40

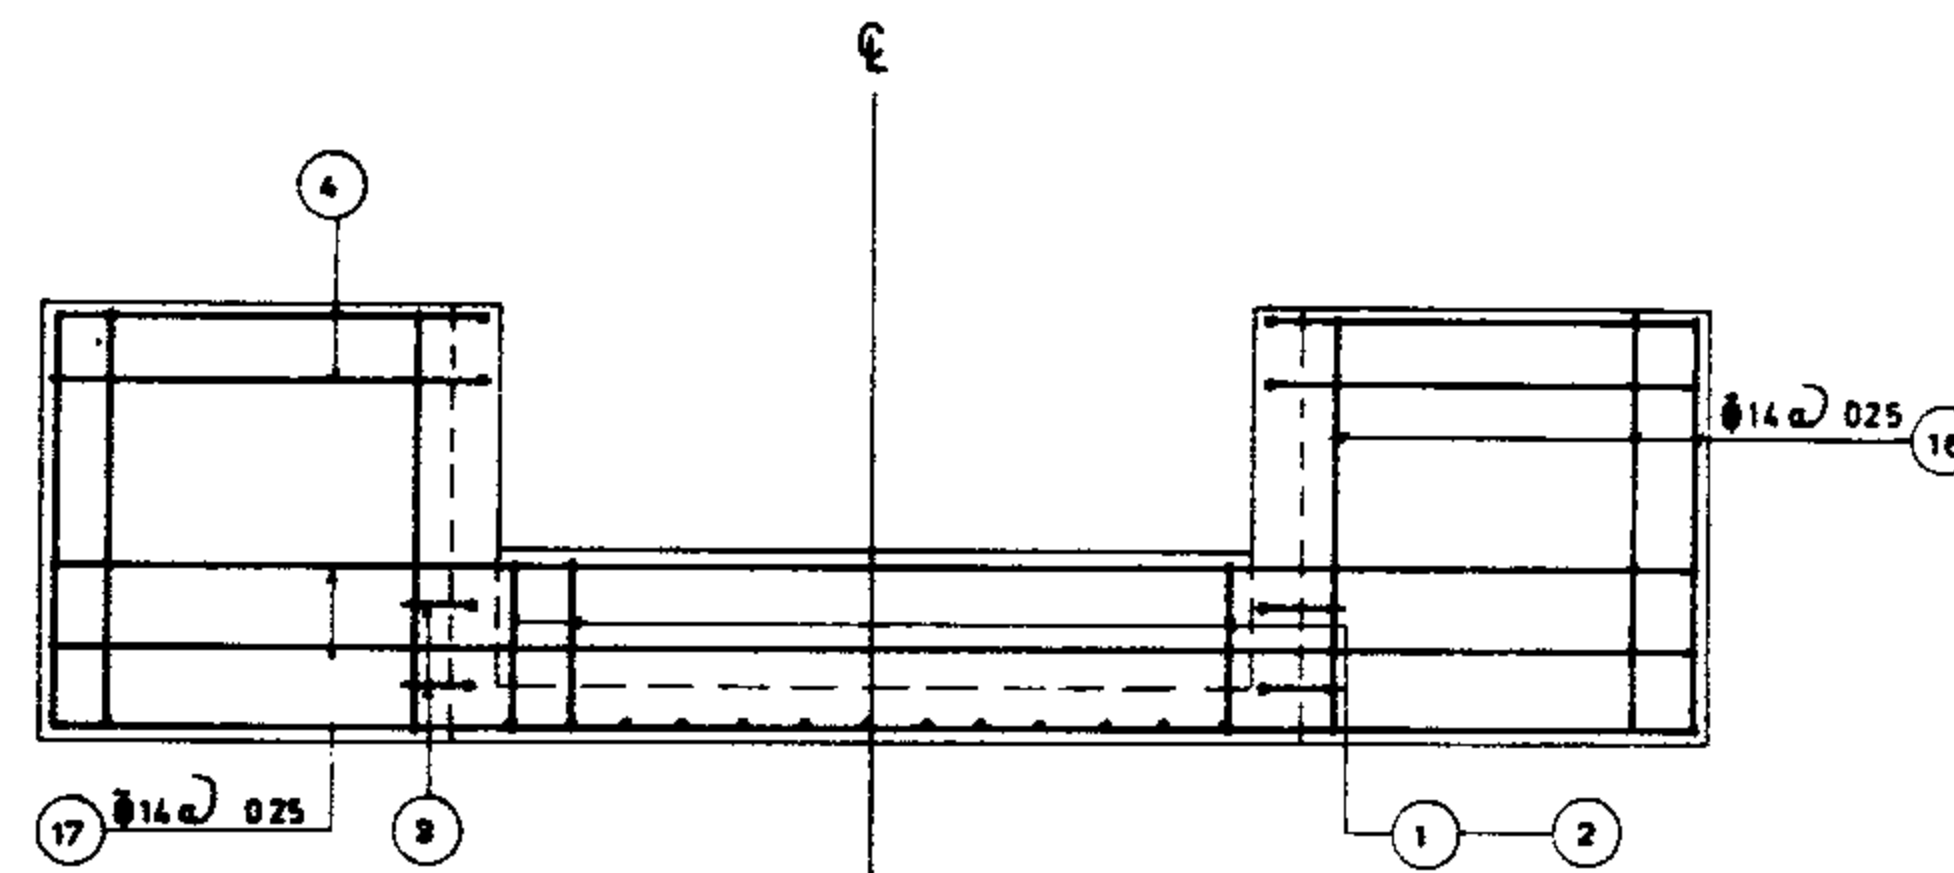


SECTION E-E
Scale 1:40

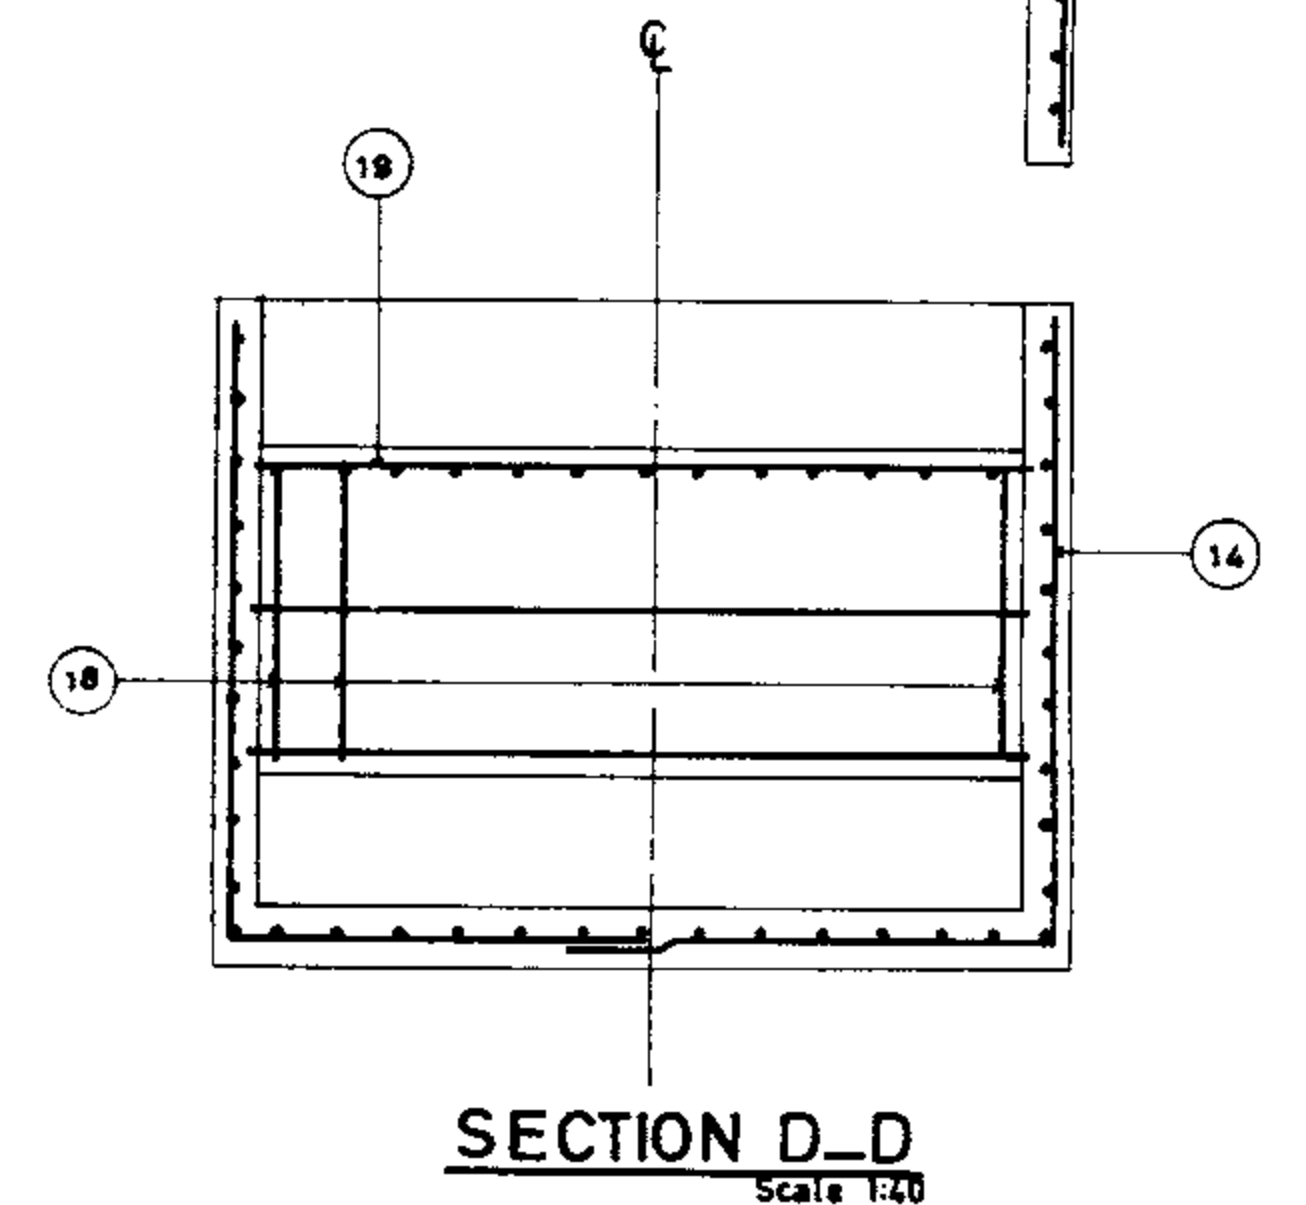


SECTION D-D
Scale 1:40

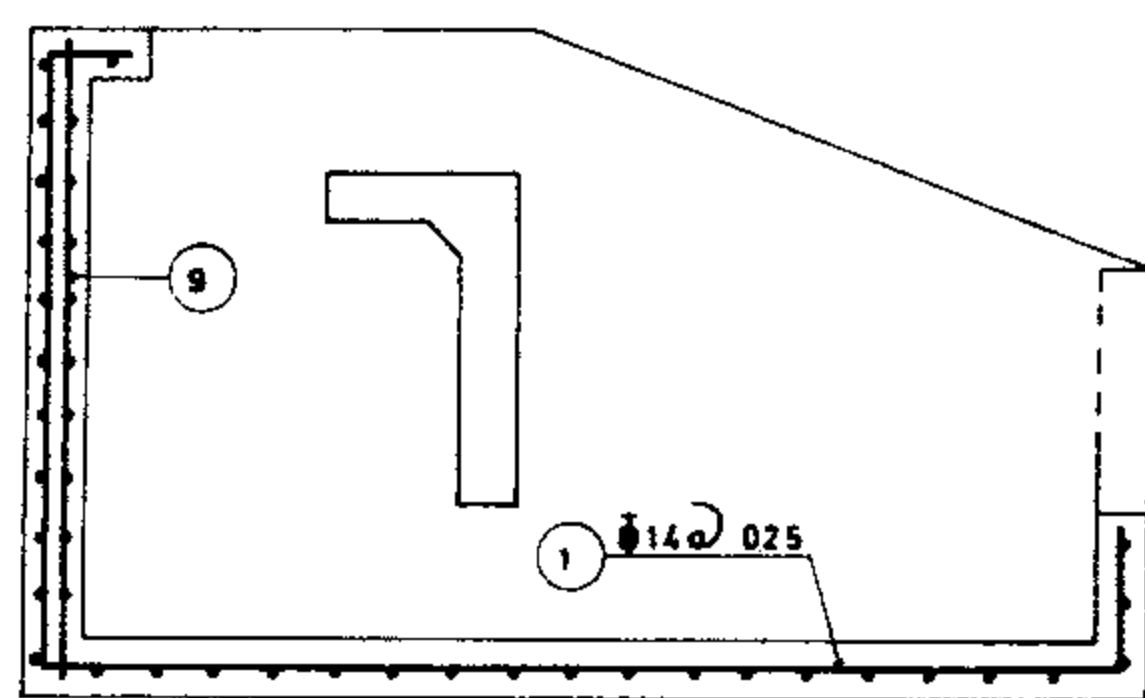

SECTION F-F
Scale 1:40

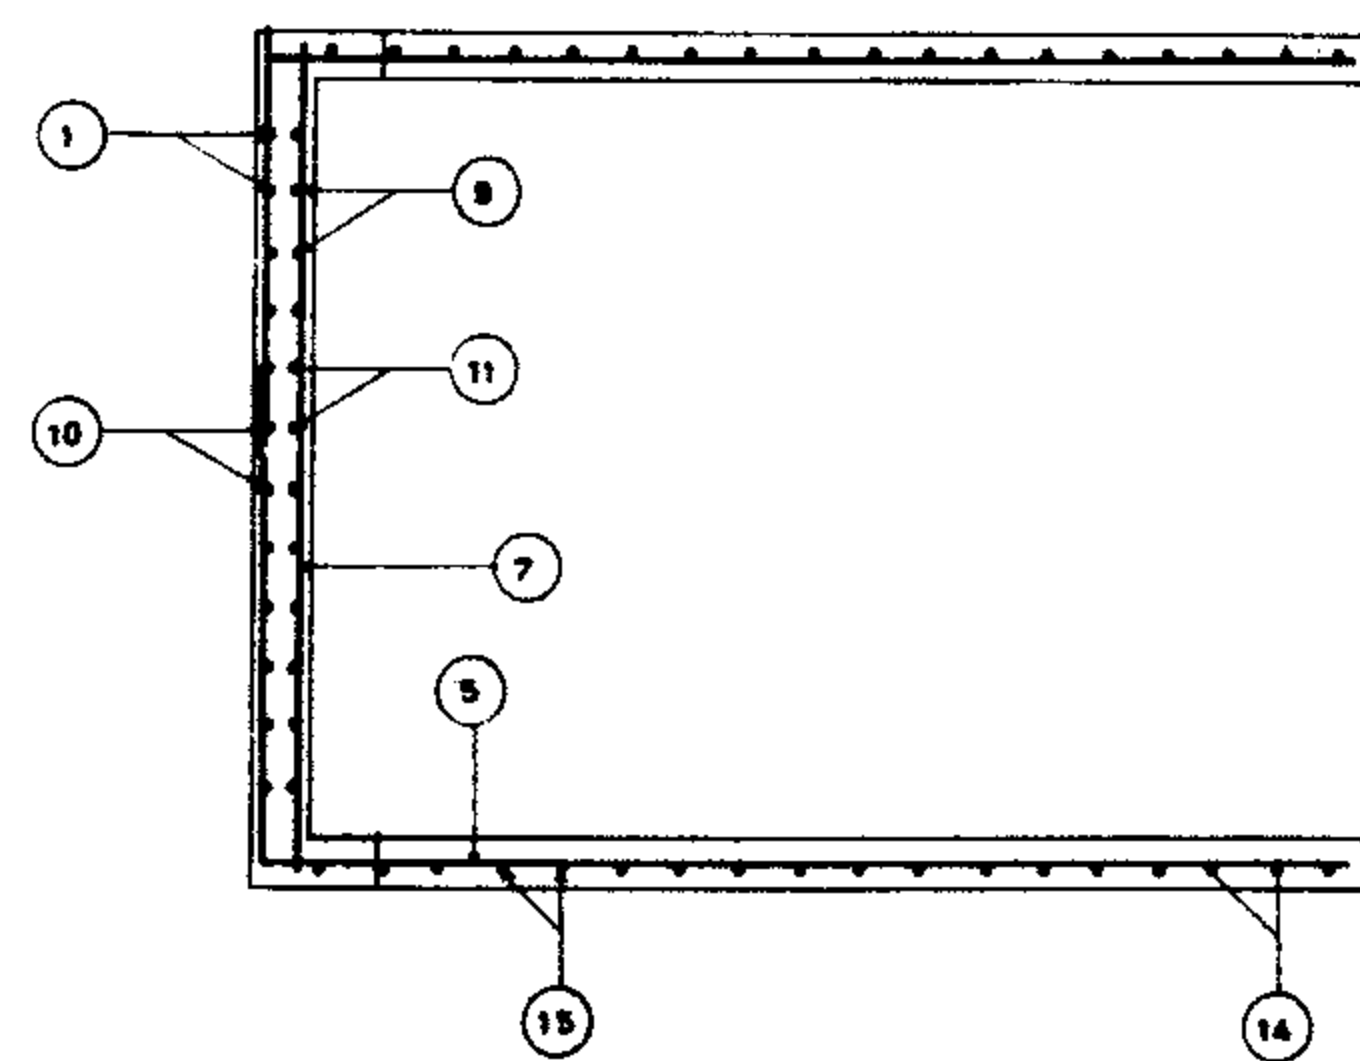

SECTION H-H
Scale 1:40

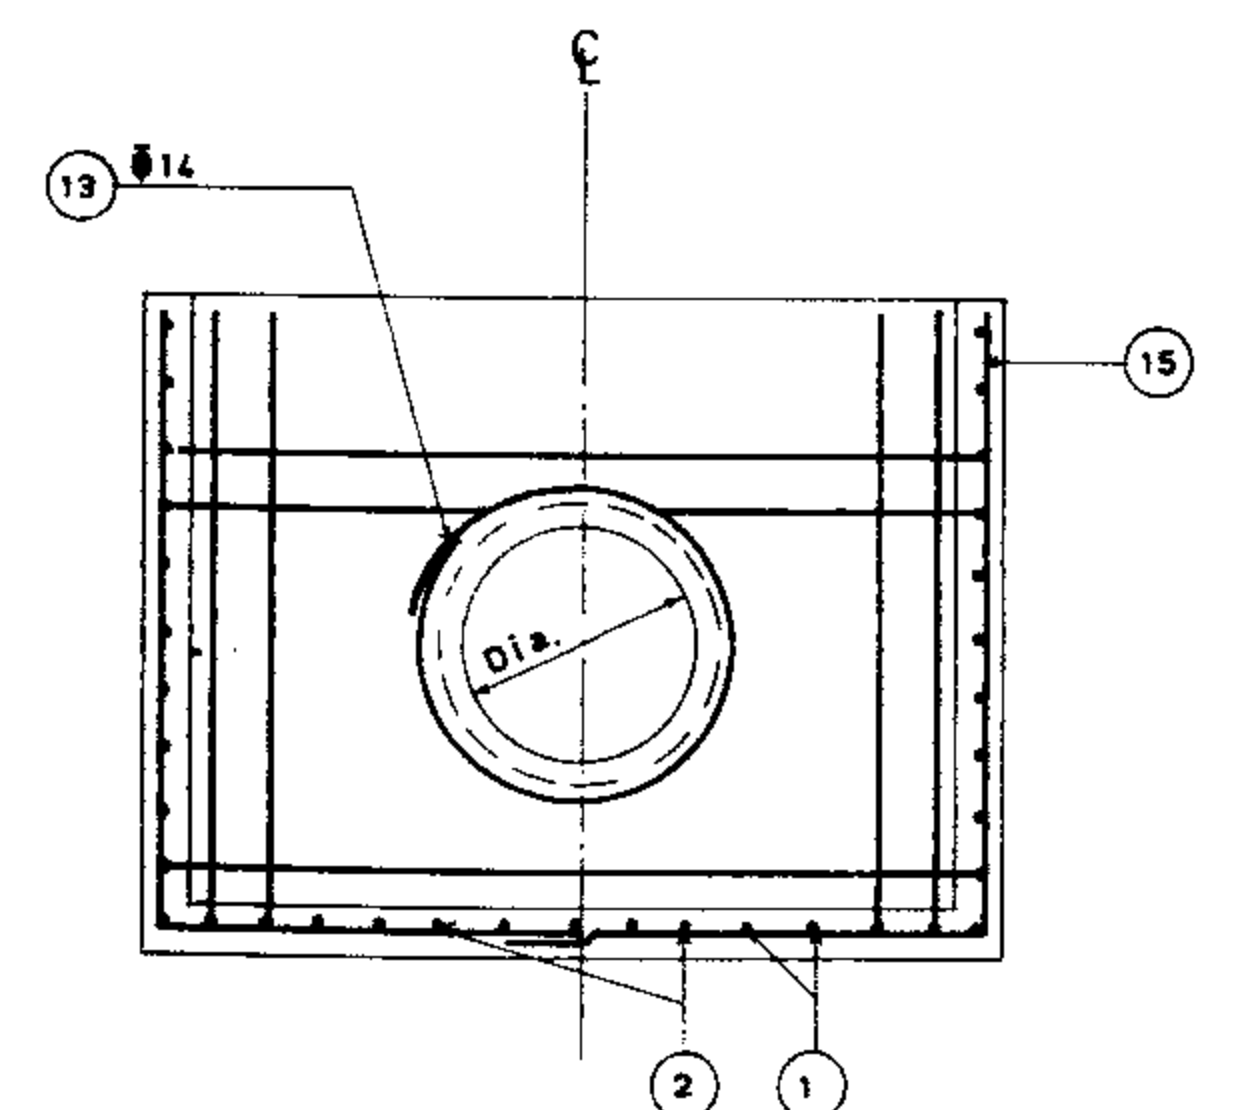

SECTION C-C
Scale 1:40

REFERENCE DWGS: For dimension tables see dwg. 16/1/2/01
For list of reinforcement see dwg. 16/1/3/08
For plan & sections see dwg. No. 16/1/1/01

Scale: 1:40

IRRIGATION & DRAINAGE STANDARDS

Date:


DWG. NO. 16/1/3/02

Approved:


Sheet No. 4 of 12 Rev. No.

BAFFLED OUTLET
REINFORCEMENT
PLAN & SECTIONS GROUP 2


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

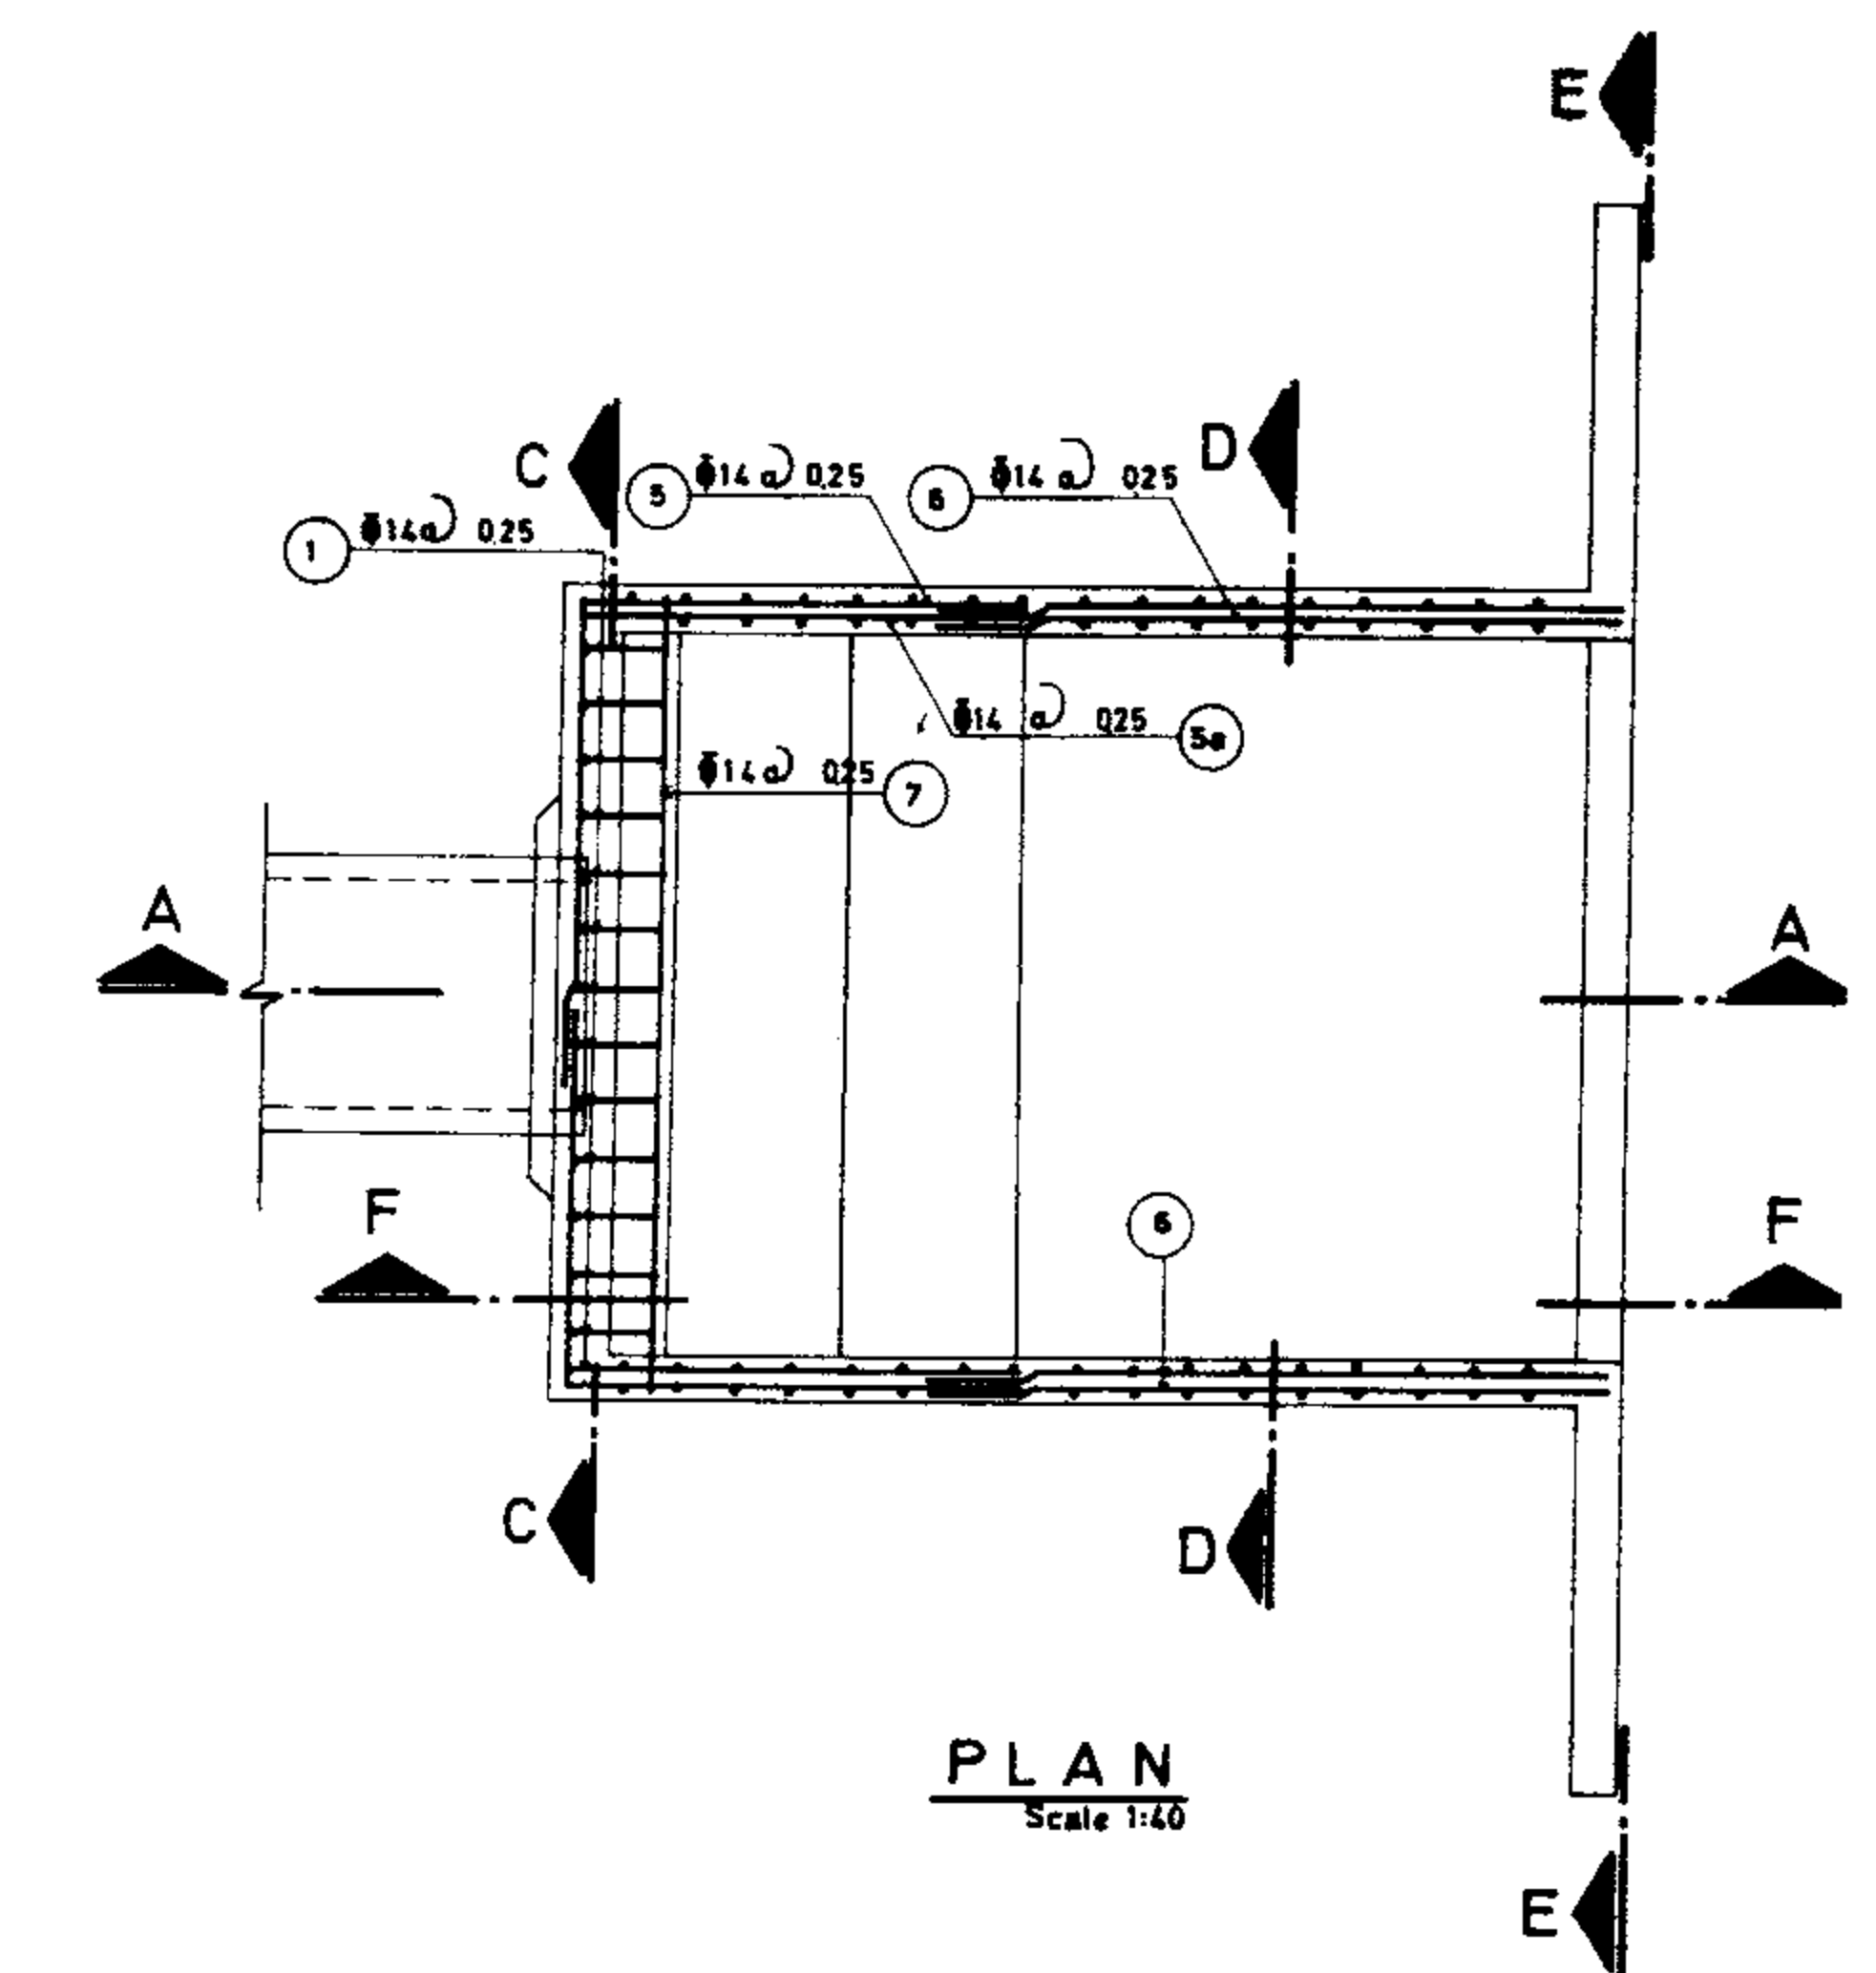


PLAN
Scale 1:40

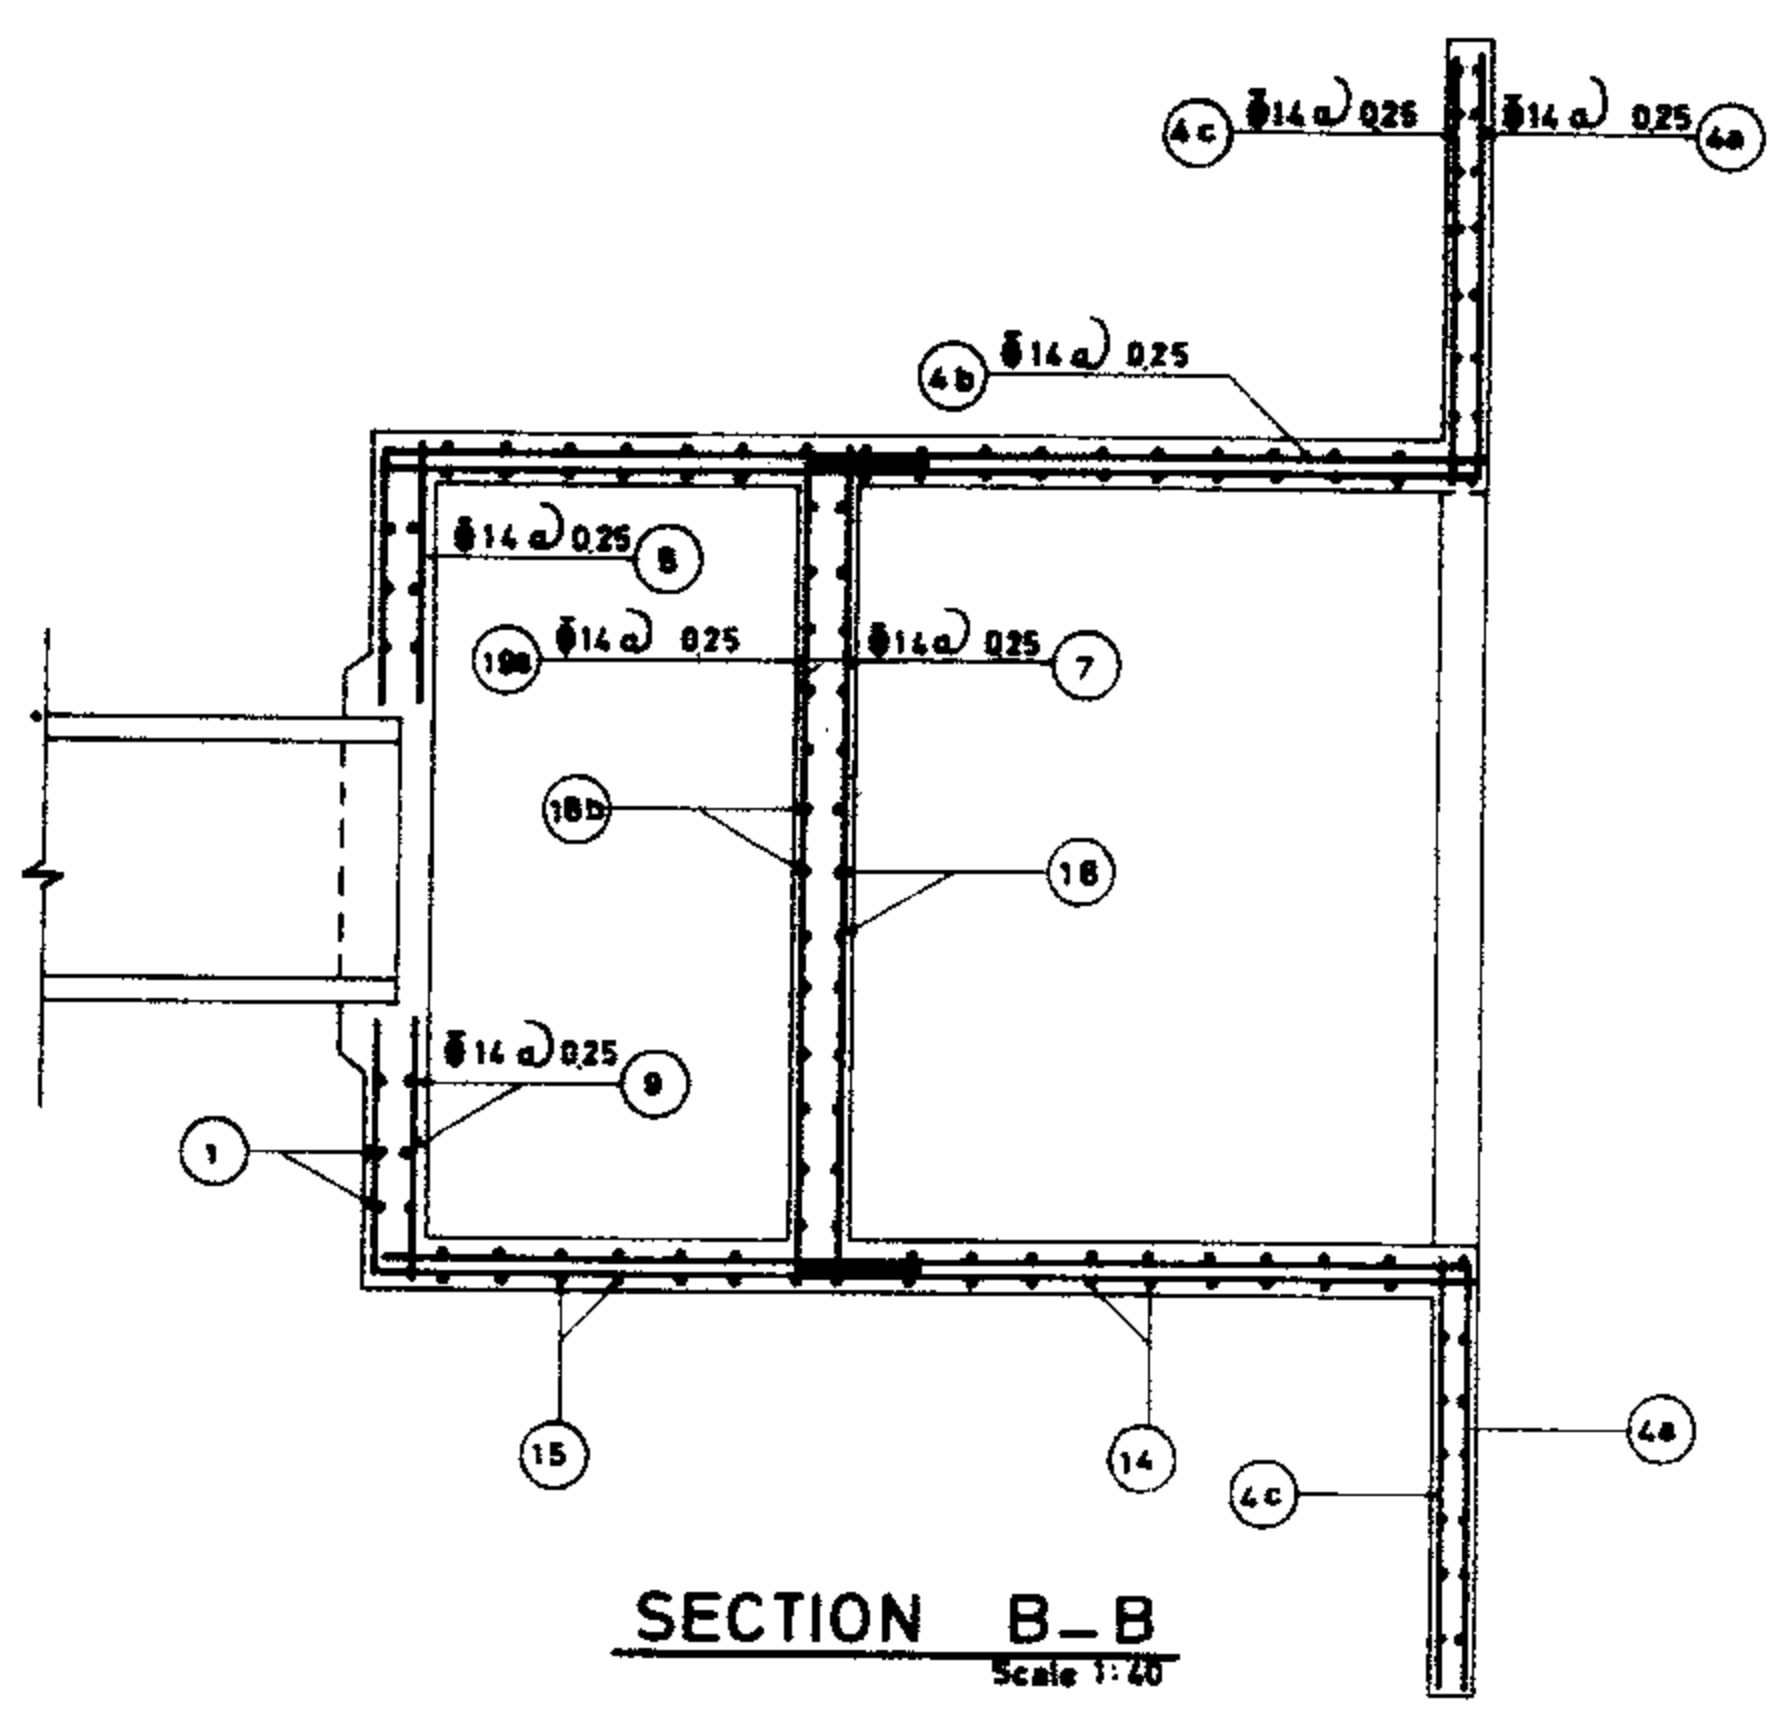


SECTION B-B
Scale 1:40

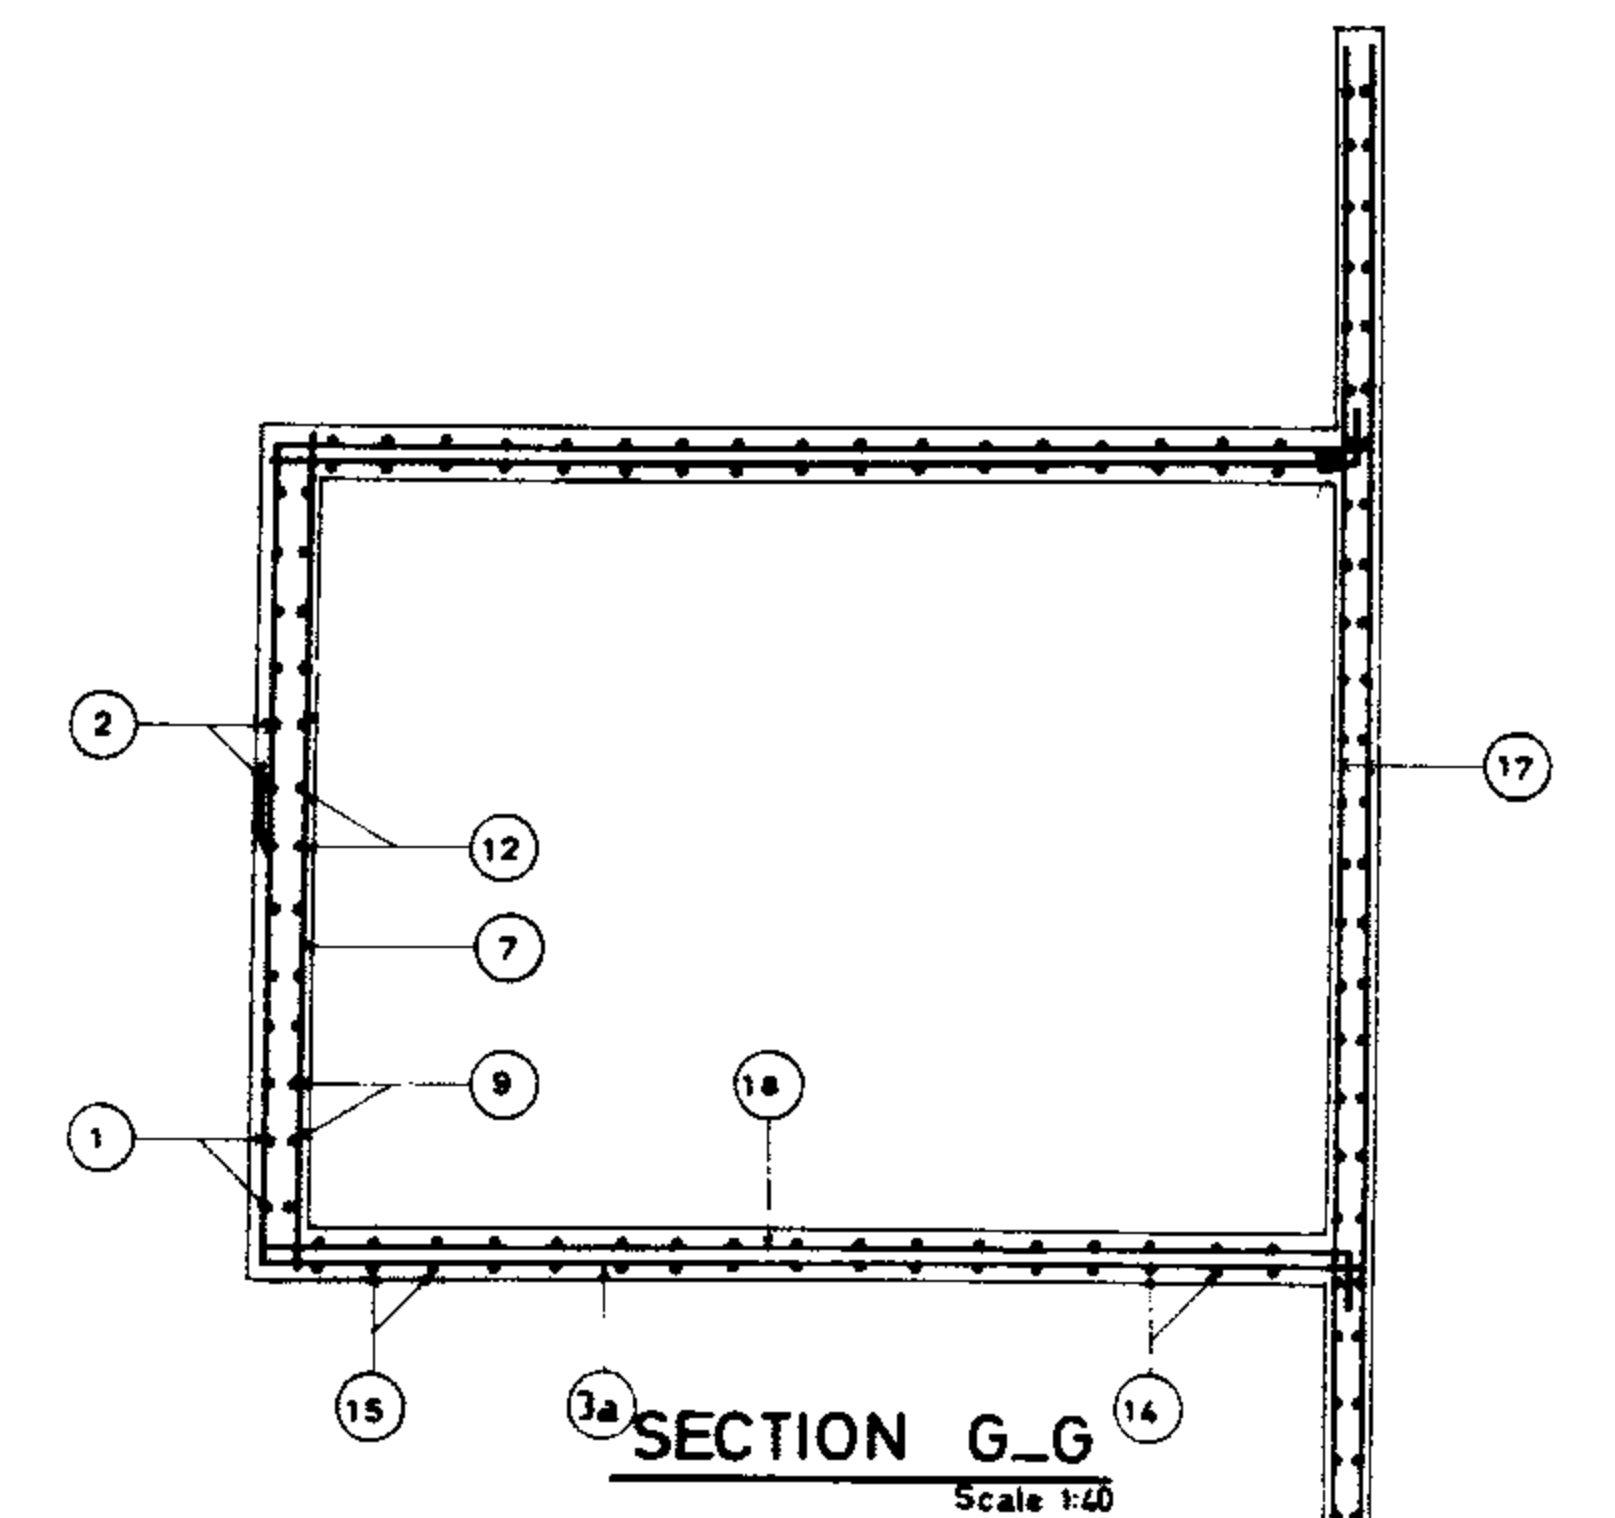


SECTION G-G
Scale 1:40

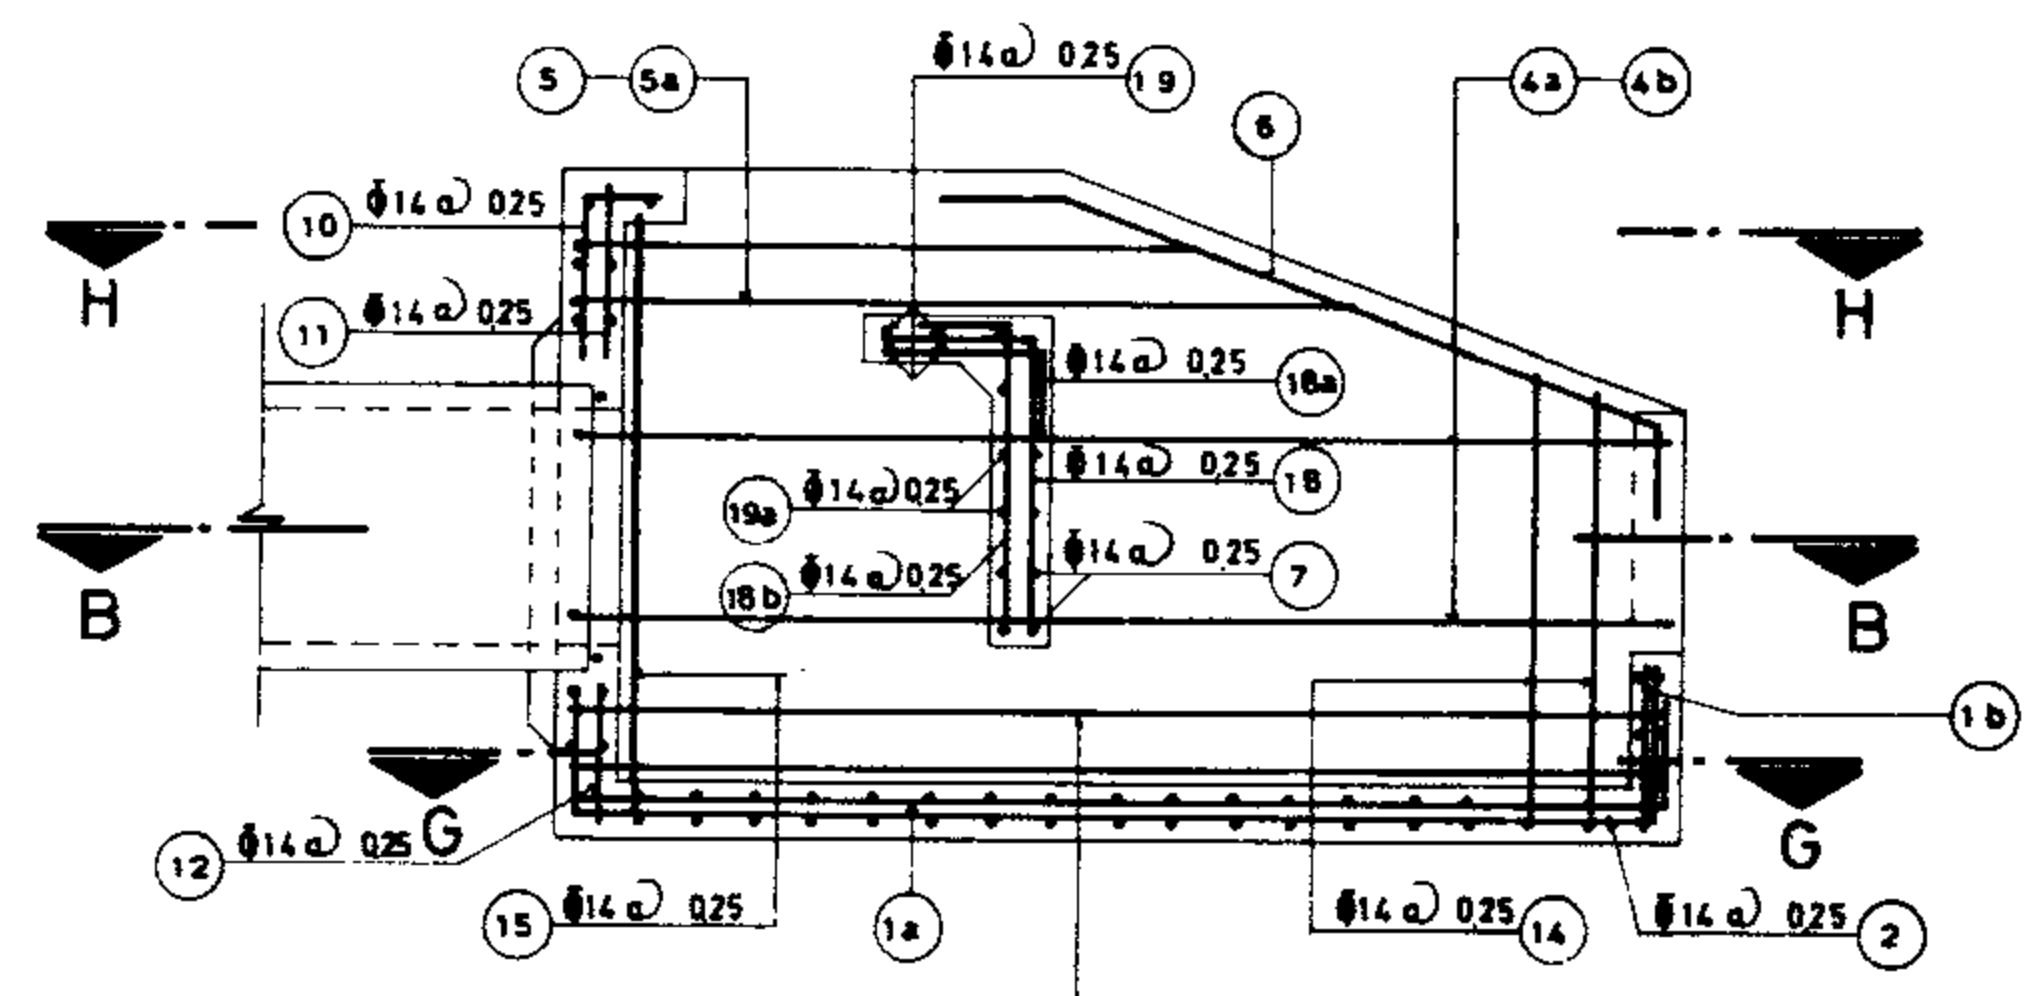


SECTION A-A
Scale 1:40

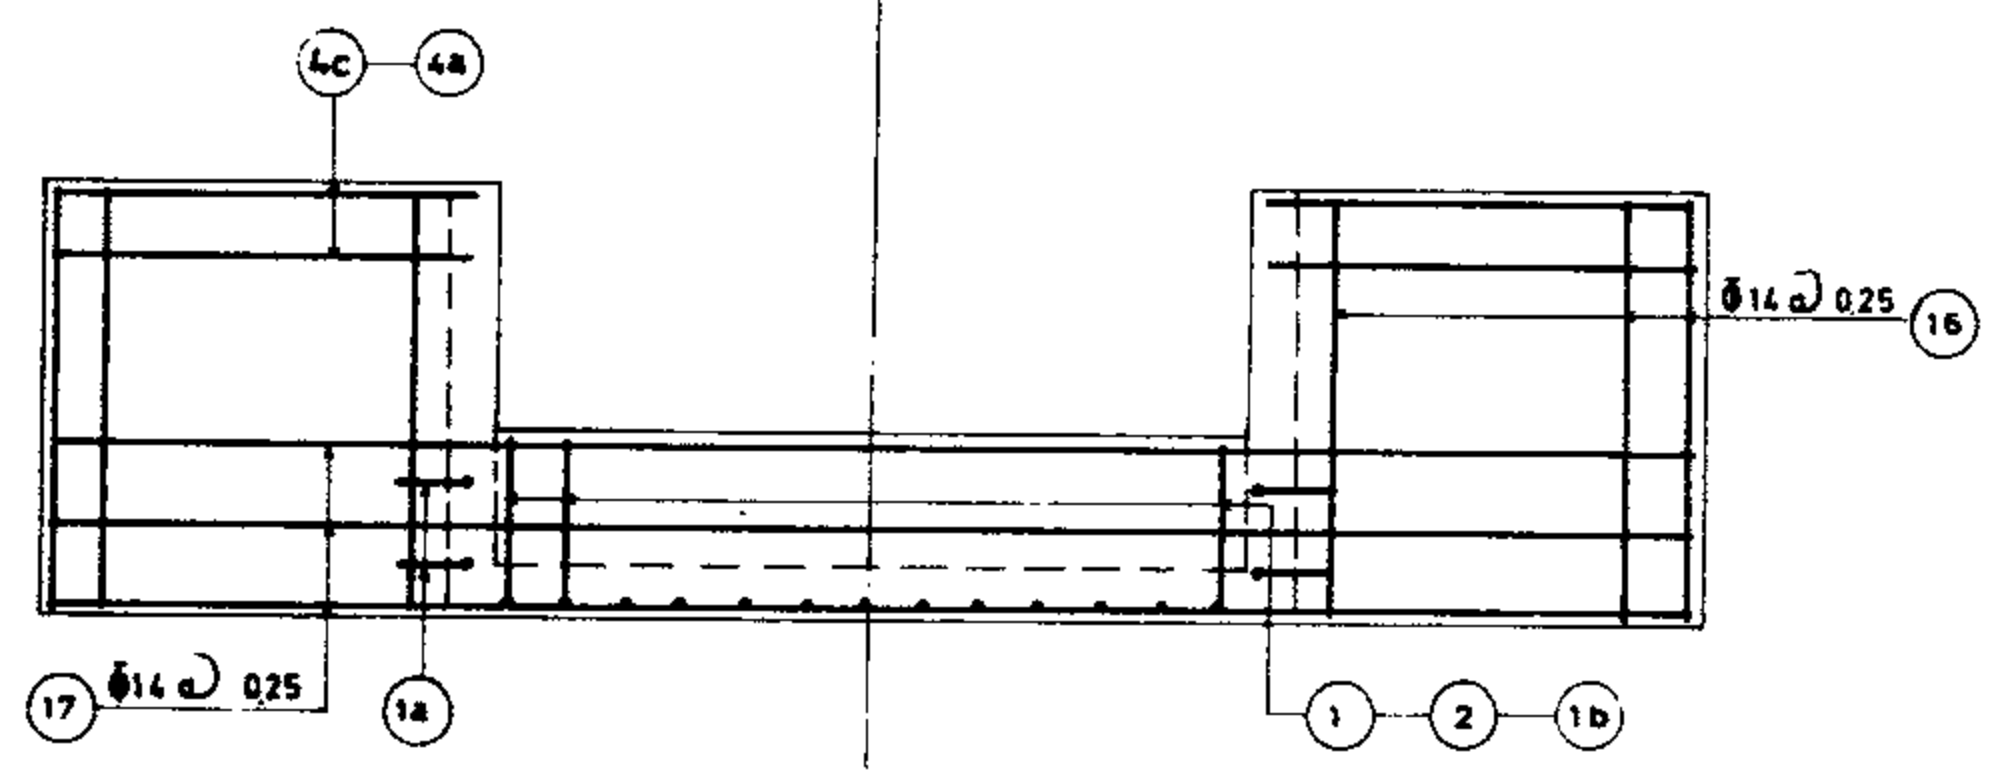


SECTION E-E
Scale 1:40

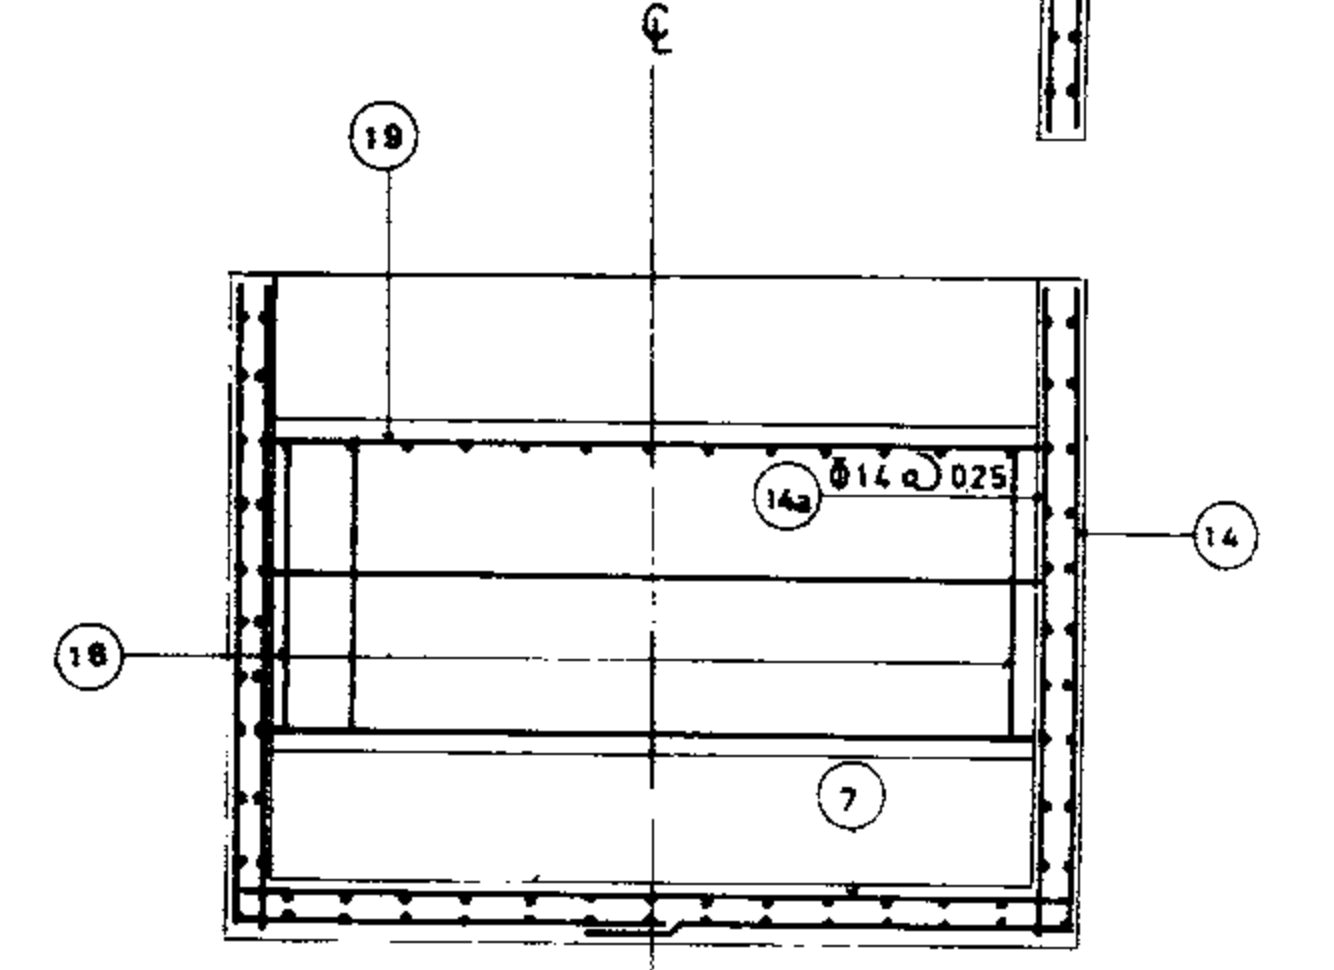


SECTION D-D
Scale 1:40

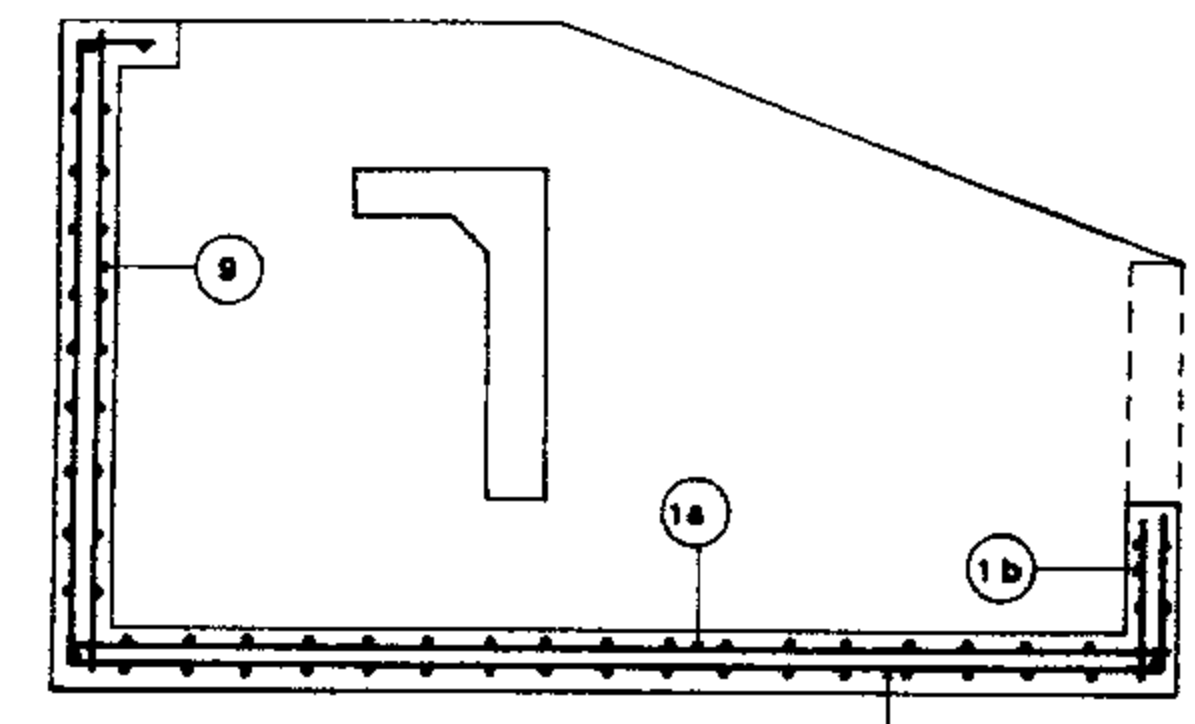

SECTION E-F
Scale 1:40

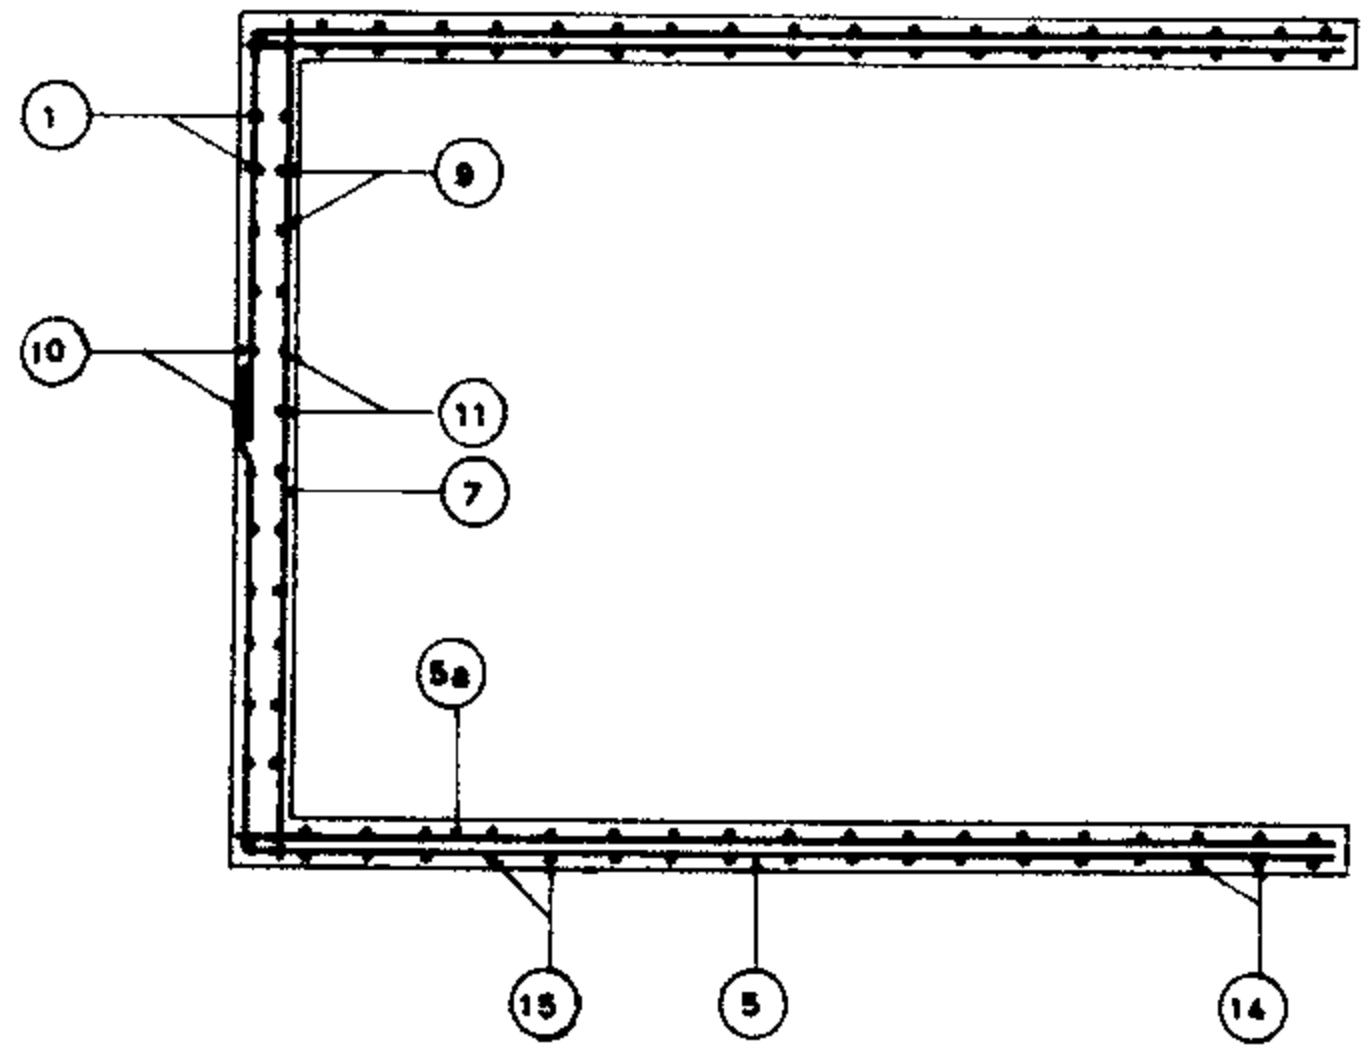

SECTION H-H
Scale 1:40

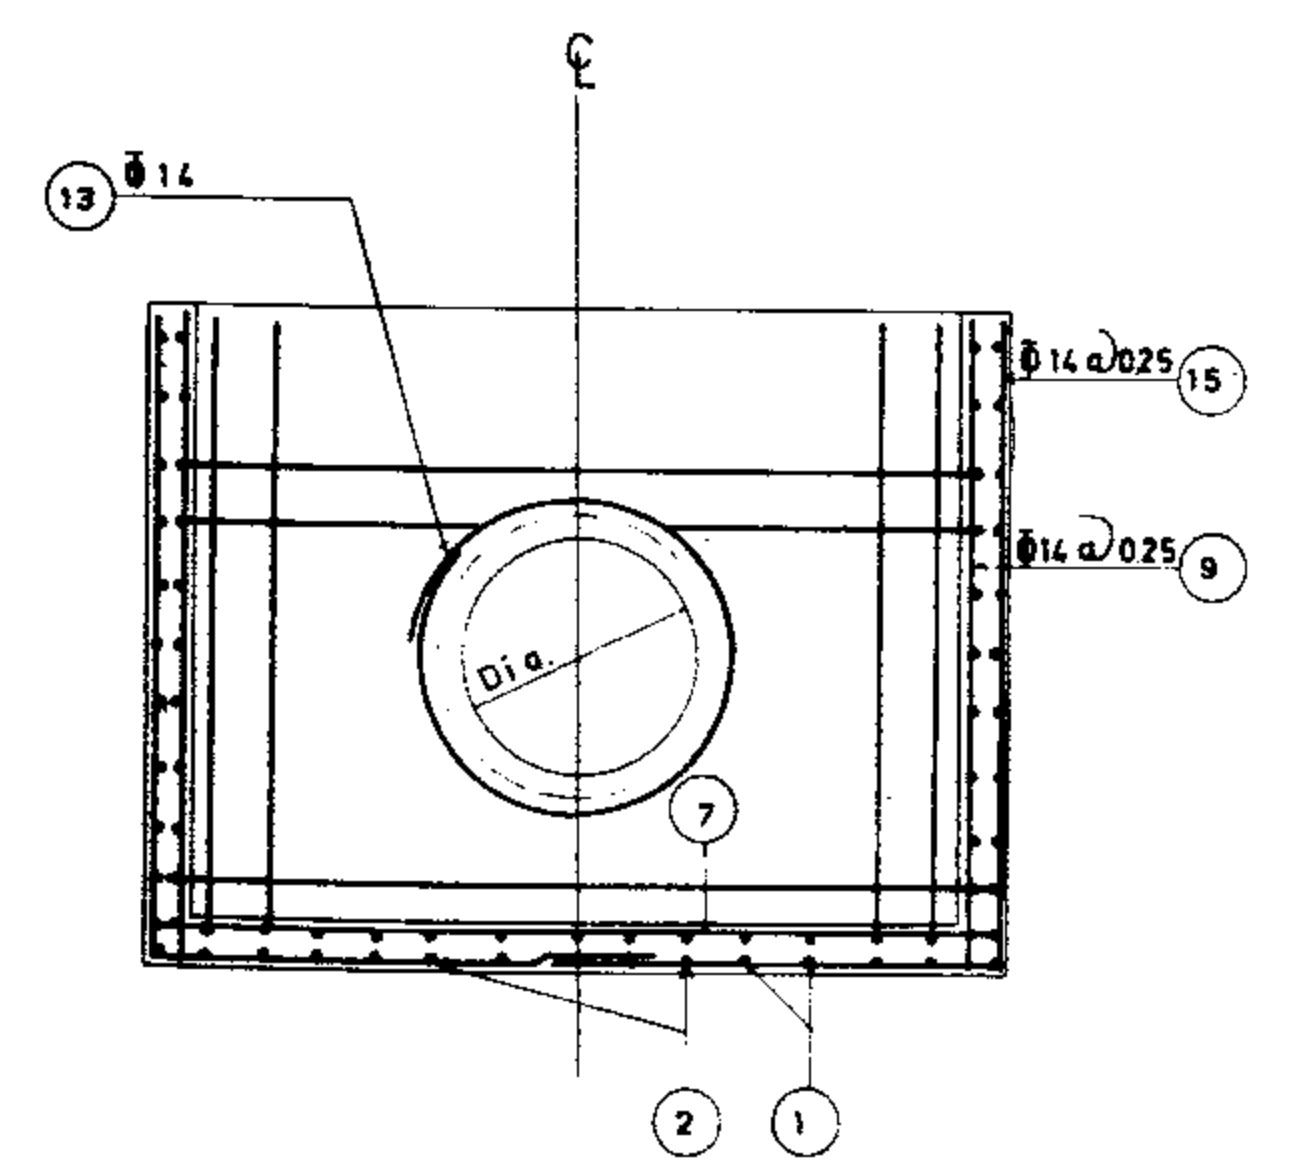


SECTION C-C
Scale 1:40


REFERENCE DWGS: For dimension tables see dwg 16/1/2/01
 For list of reinforcement see dwg 16/1/3/09
 For plan & sections see dwg No 16/1/1/01

Scale: 1:40	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG No. 16/1/3/03	BAFFLED OUTLET REINFORCEMENT PLAN & SECTIONS GROUP 3
Approved:	Sheet No. 5 of 12 Rev. No.	


ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

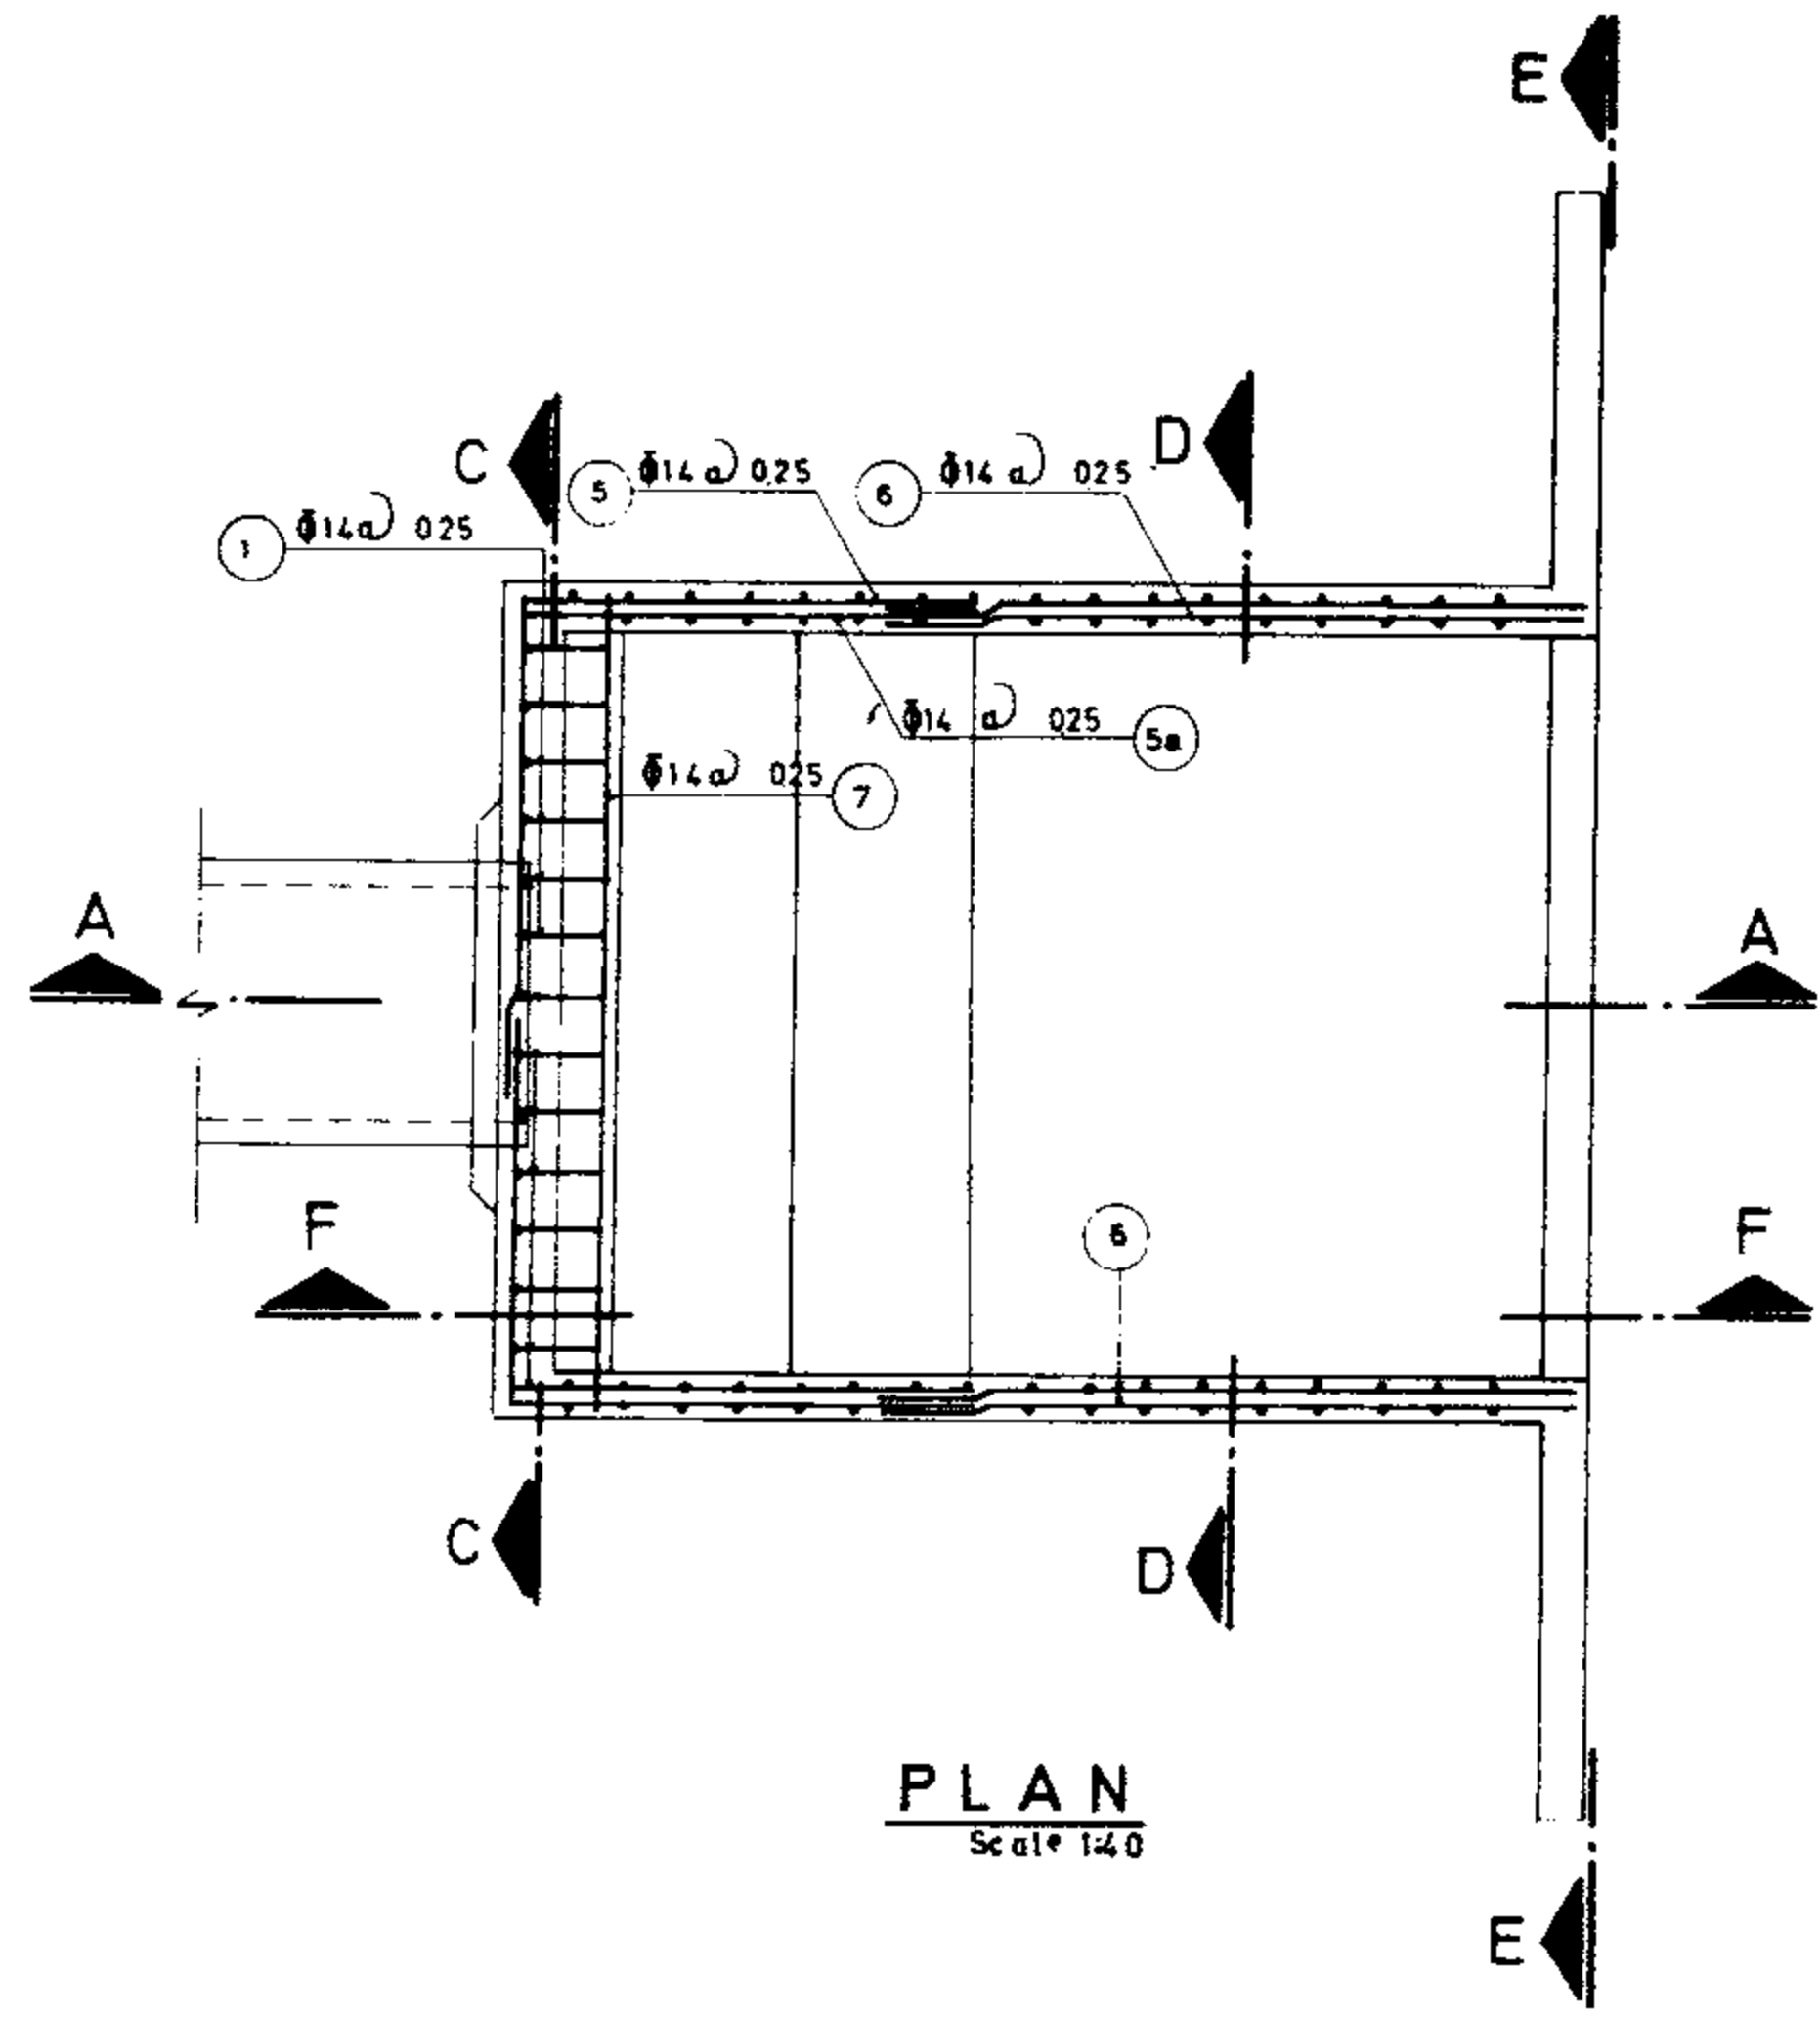


PLAN
Scale 1:40

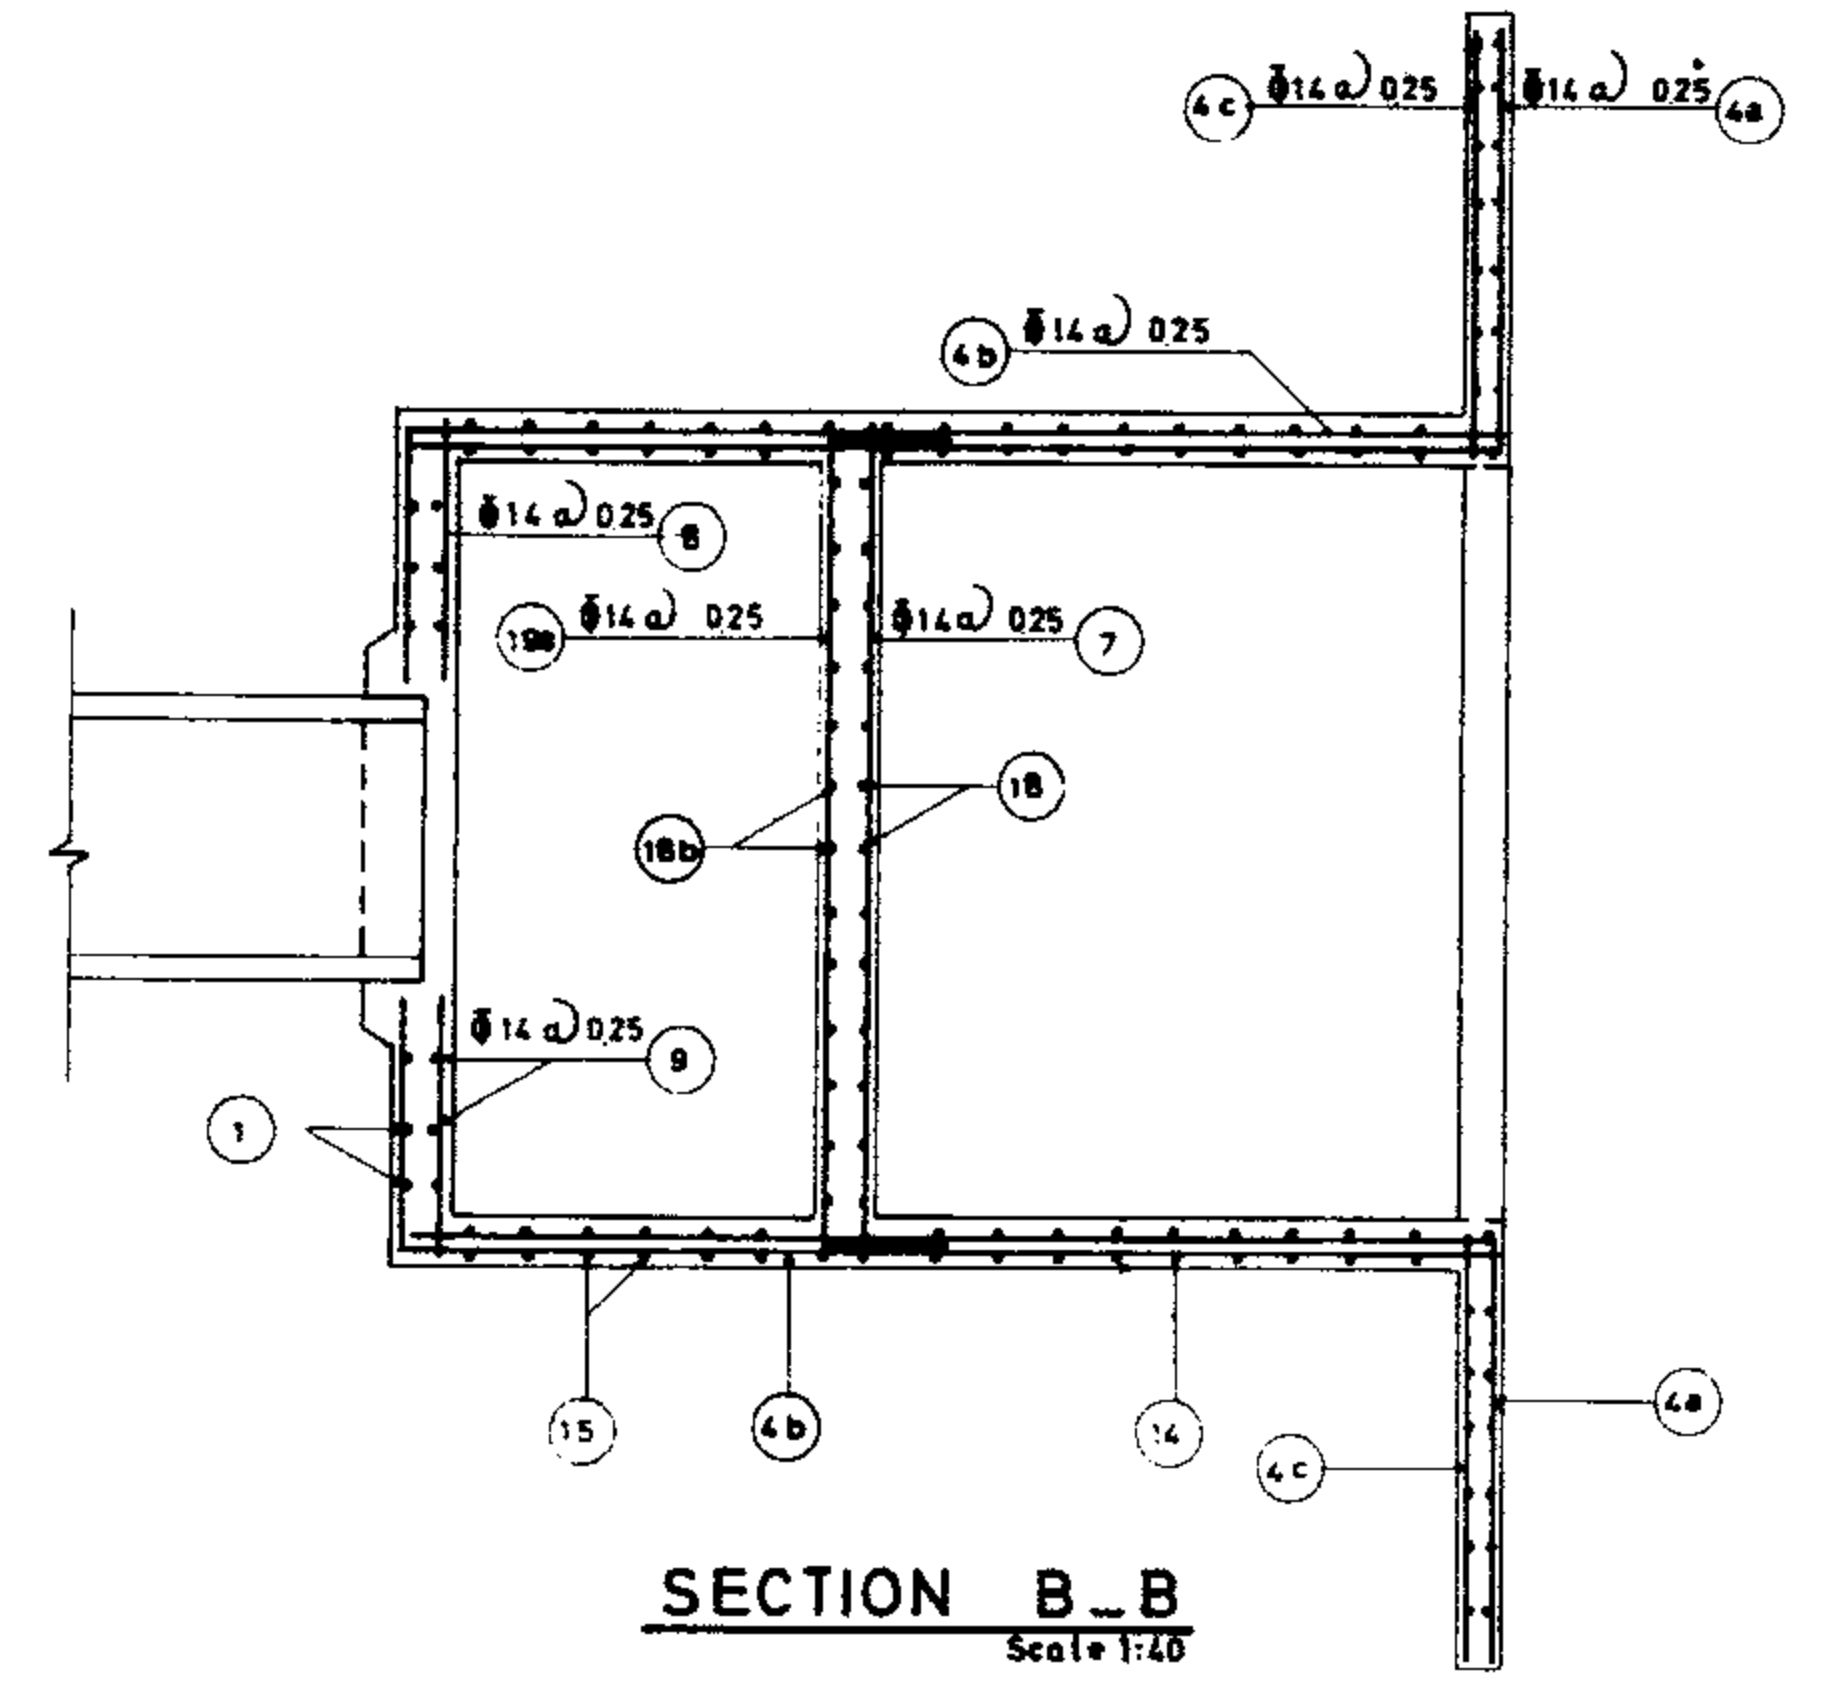


SECTION B_B
Scale 1:40

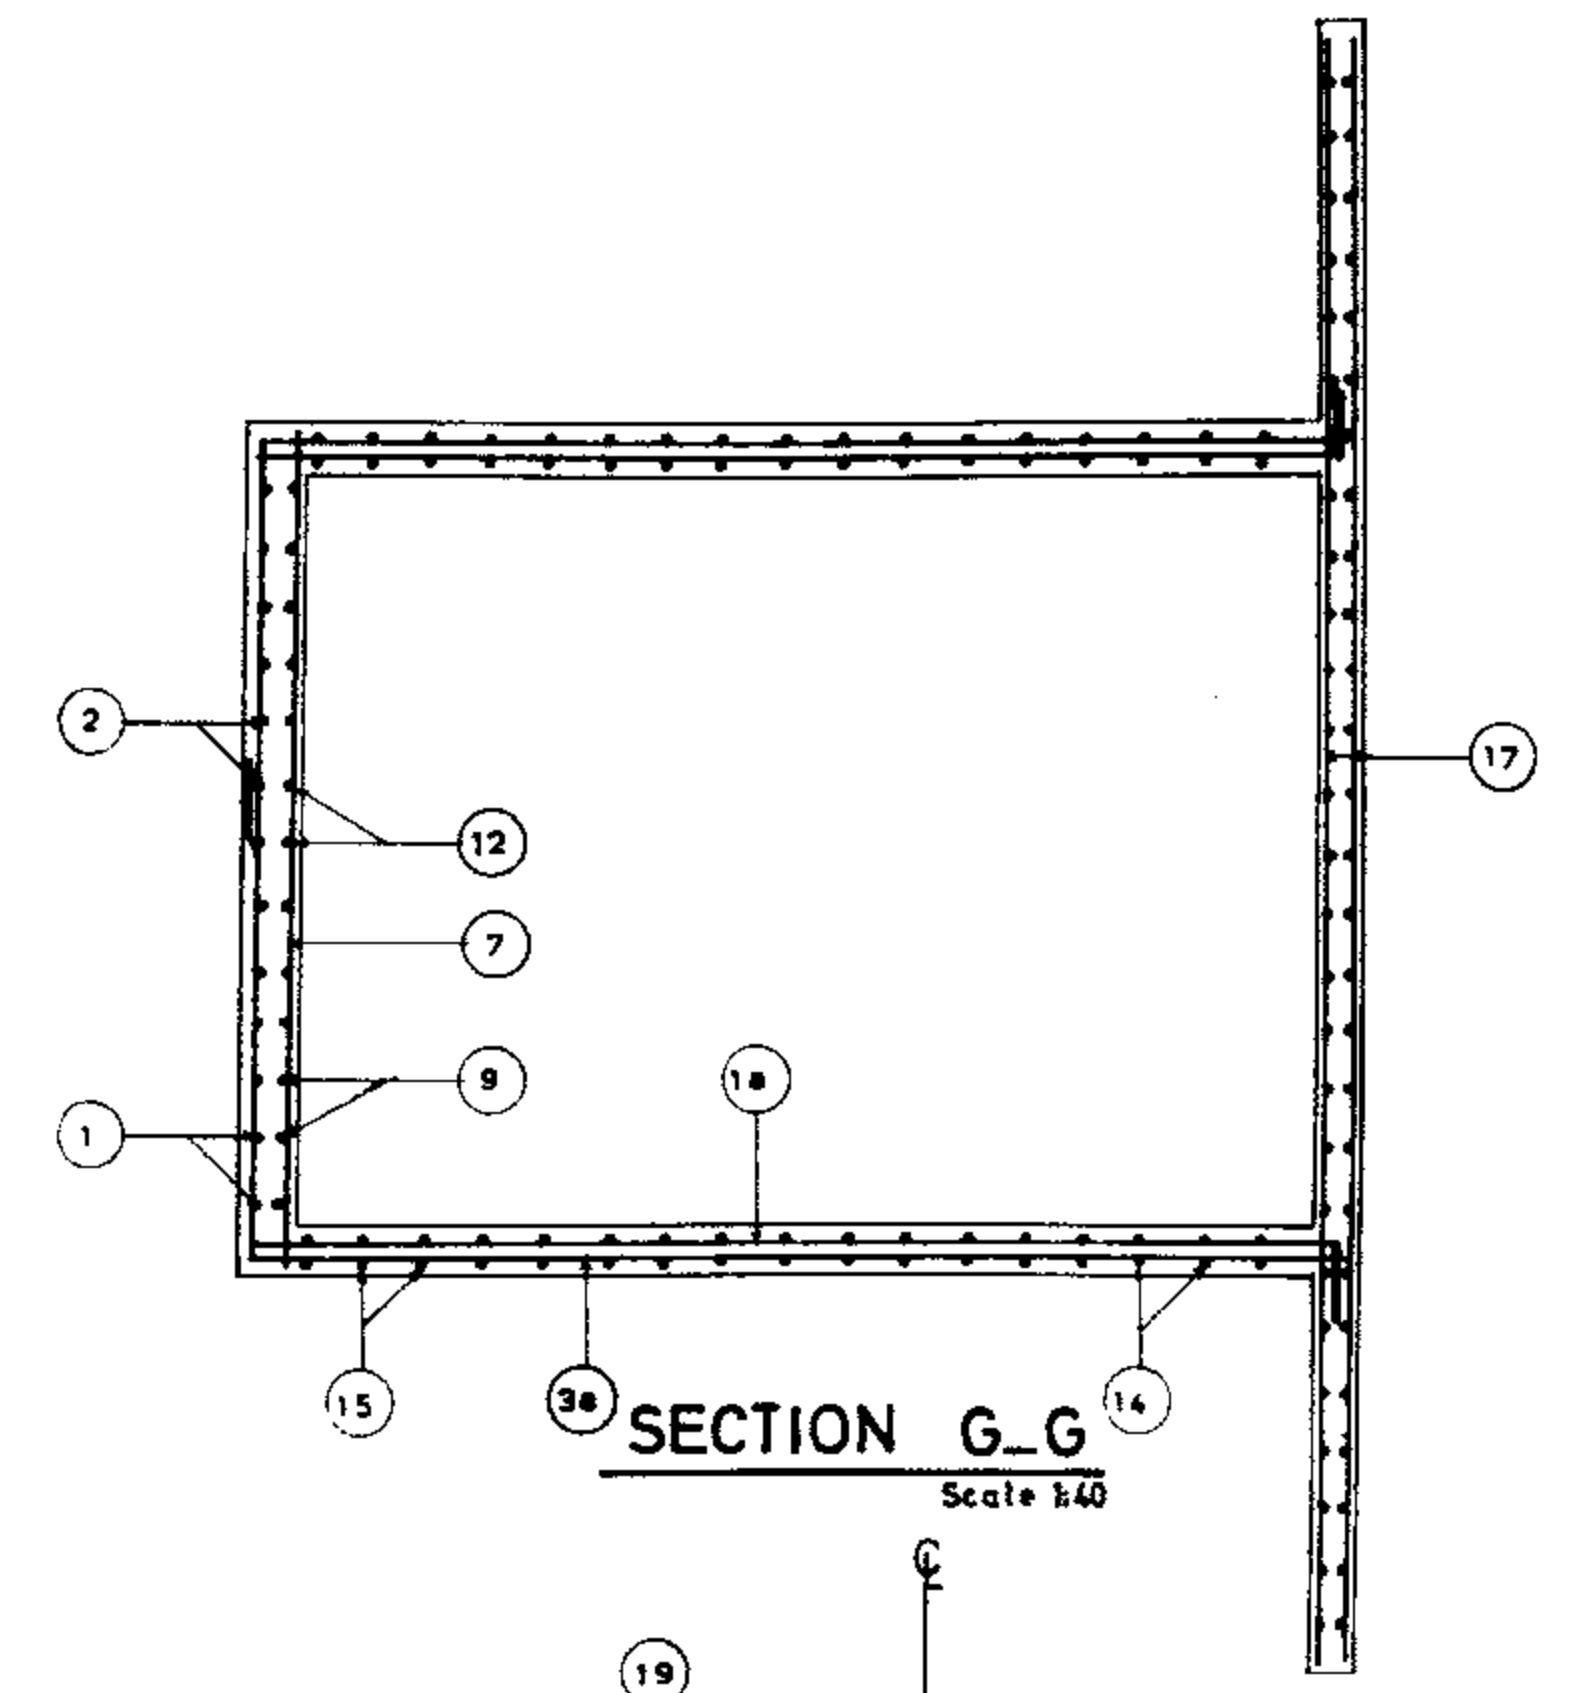


SECTION G_G
Scale 1:40

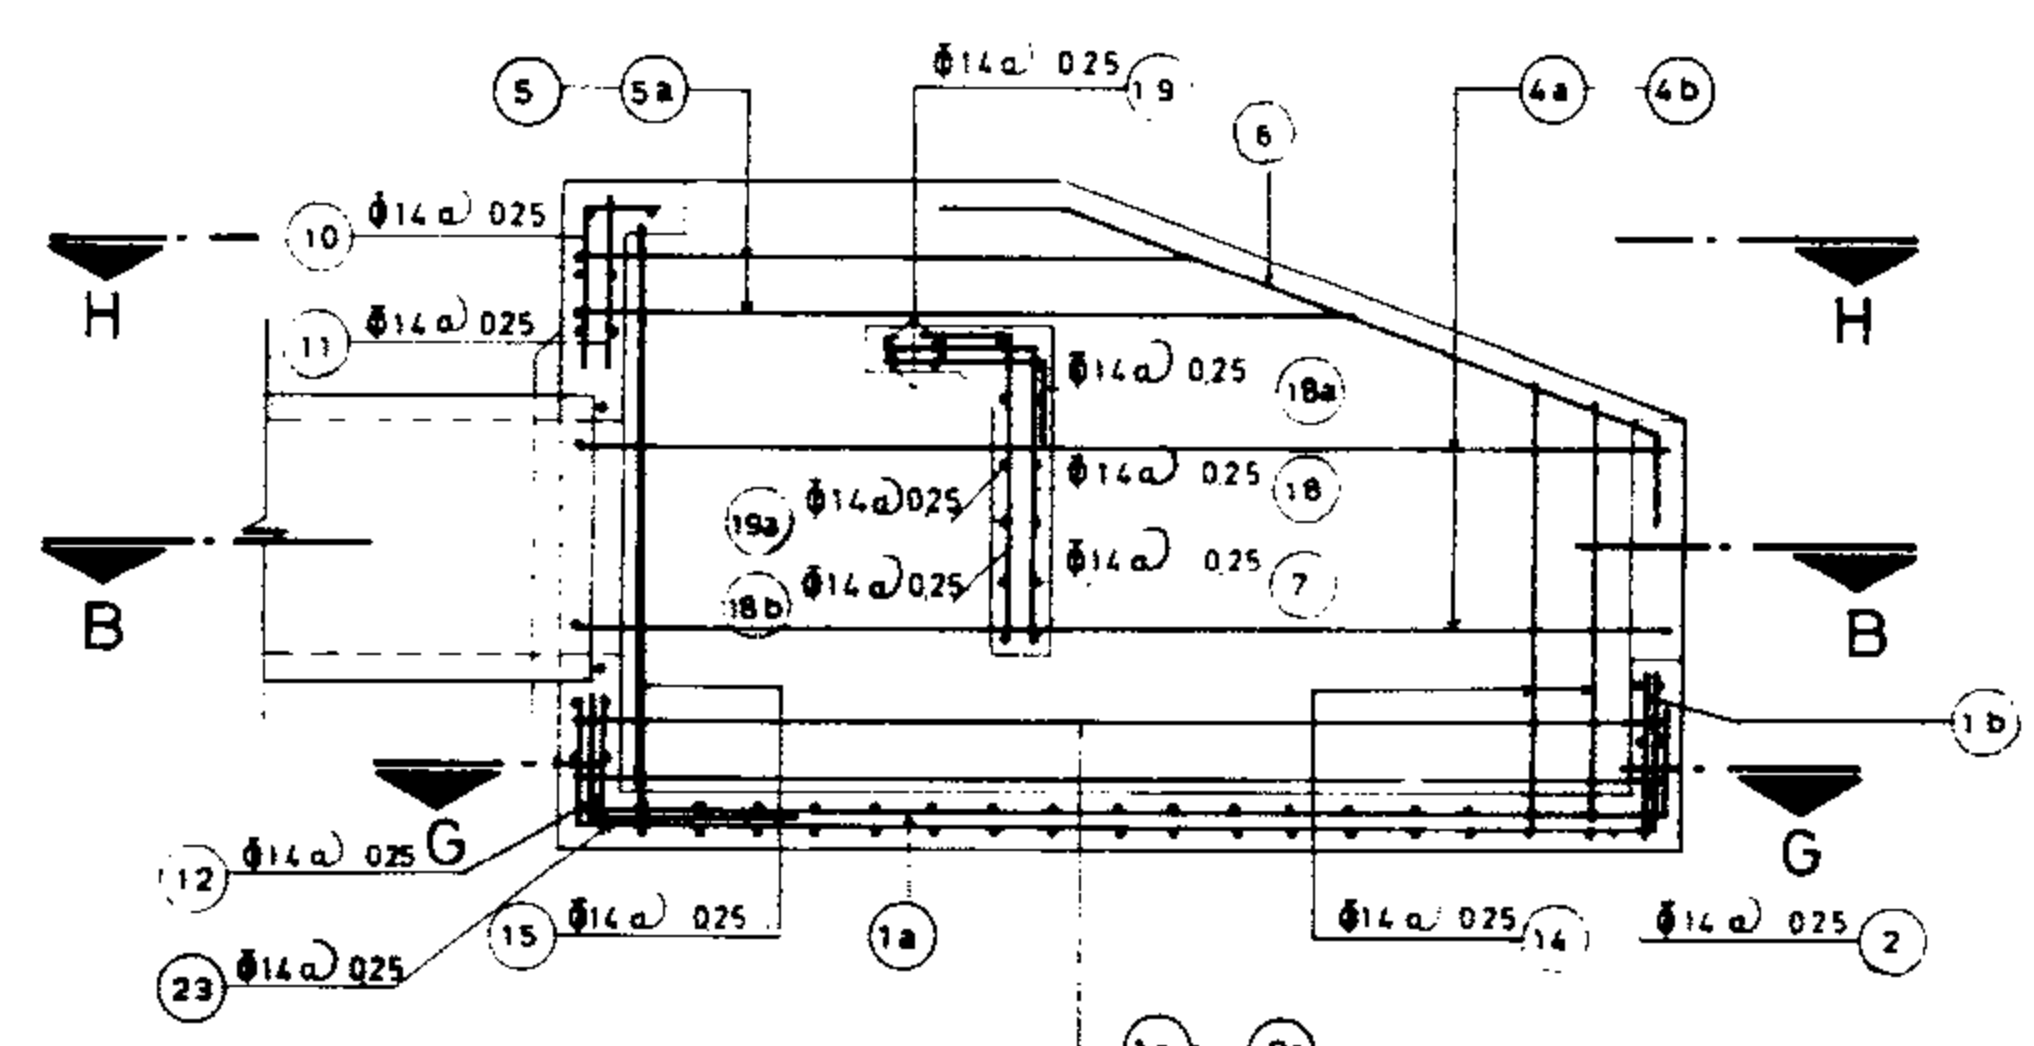


SECTION A_A
Scale 1:40

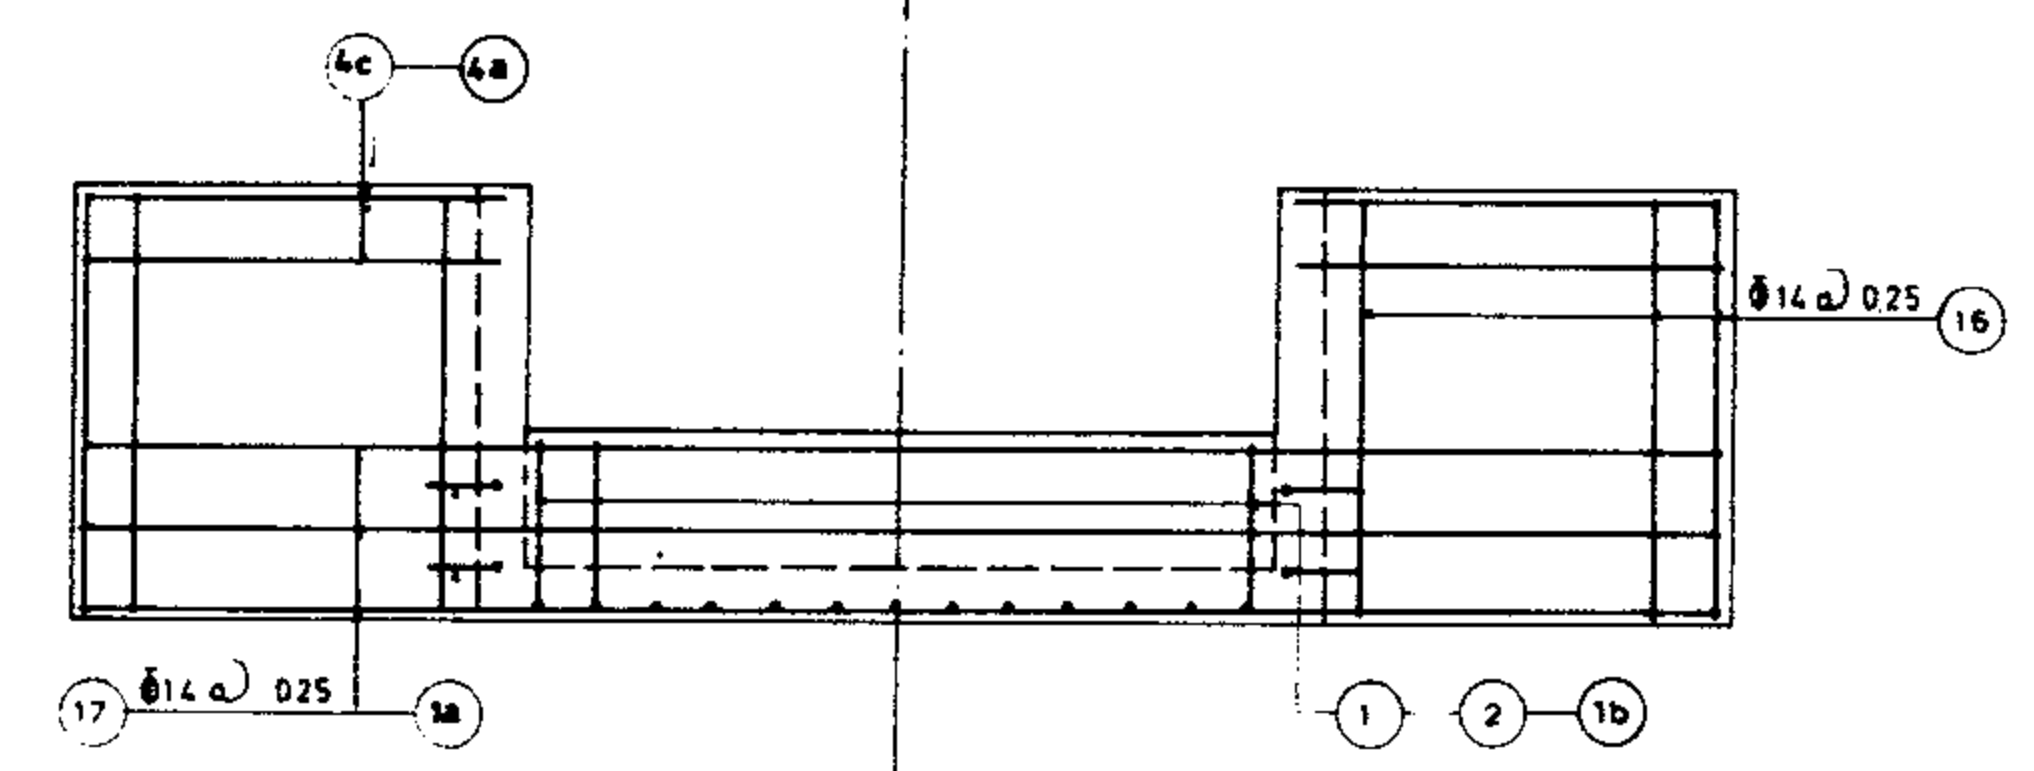


SECTION E_E
Scale 1:40

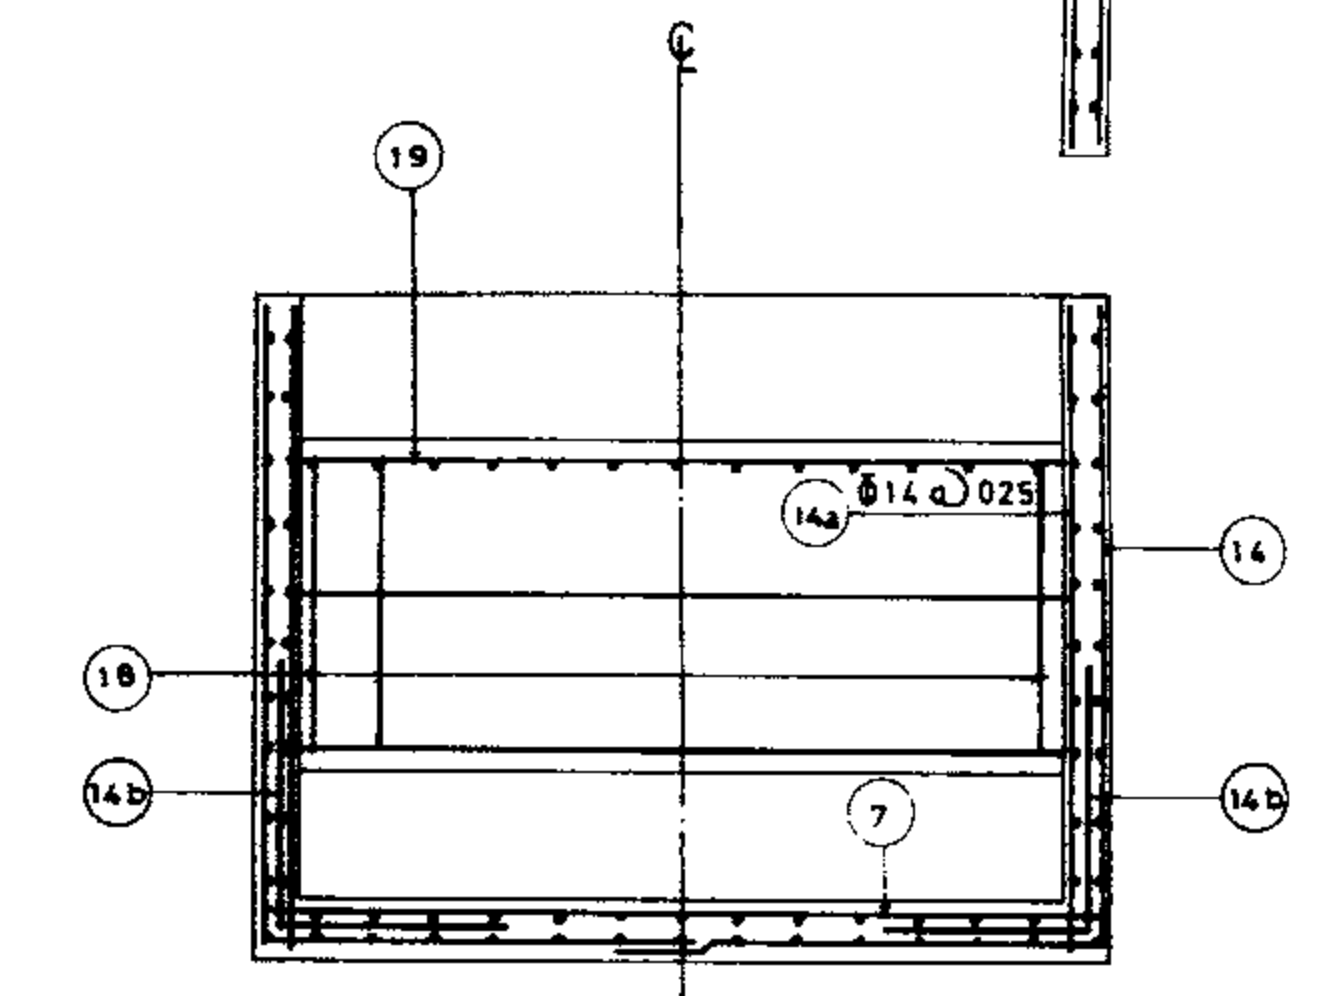


SECTION D_D
Scale 1:40

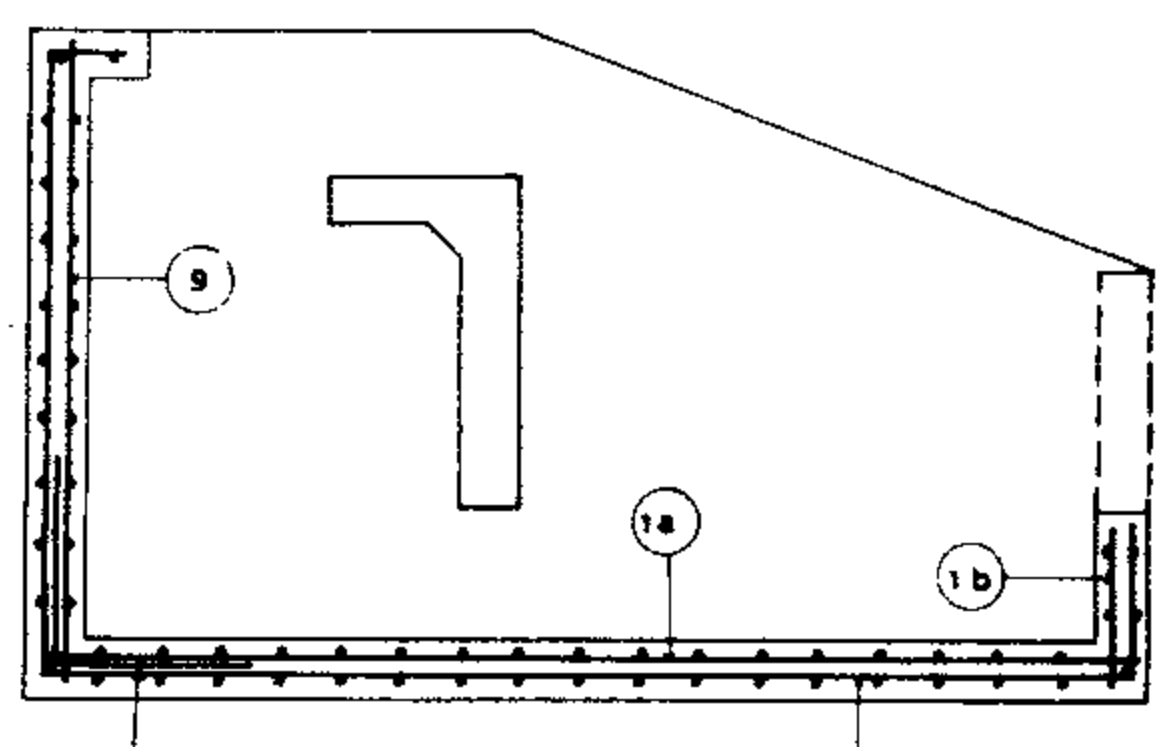

SECTION F_F
Scale 1:40

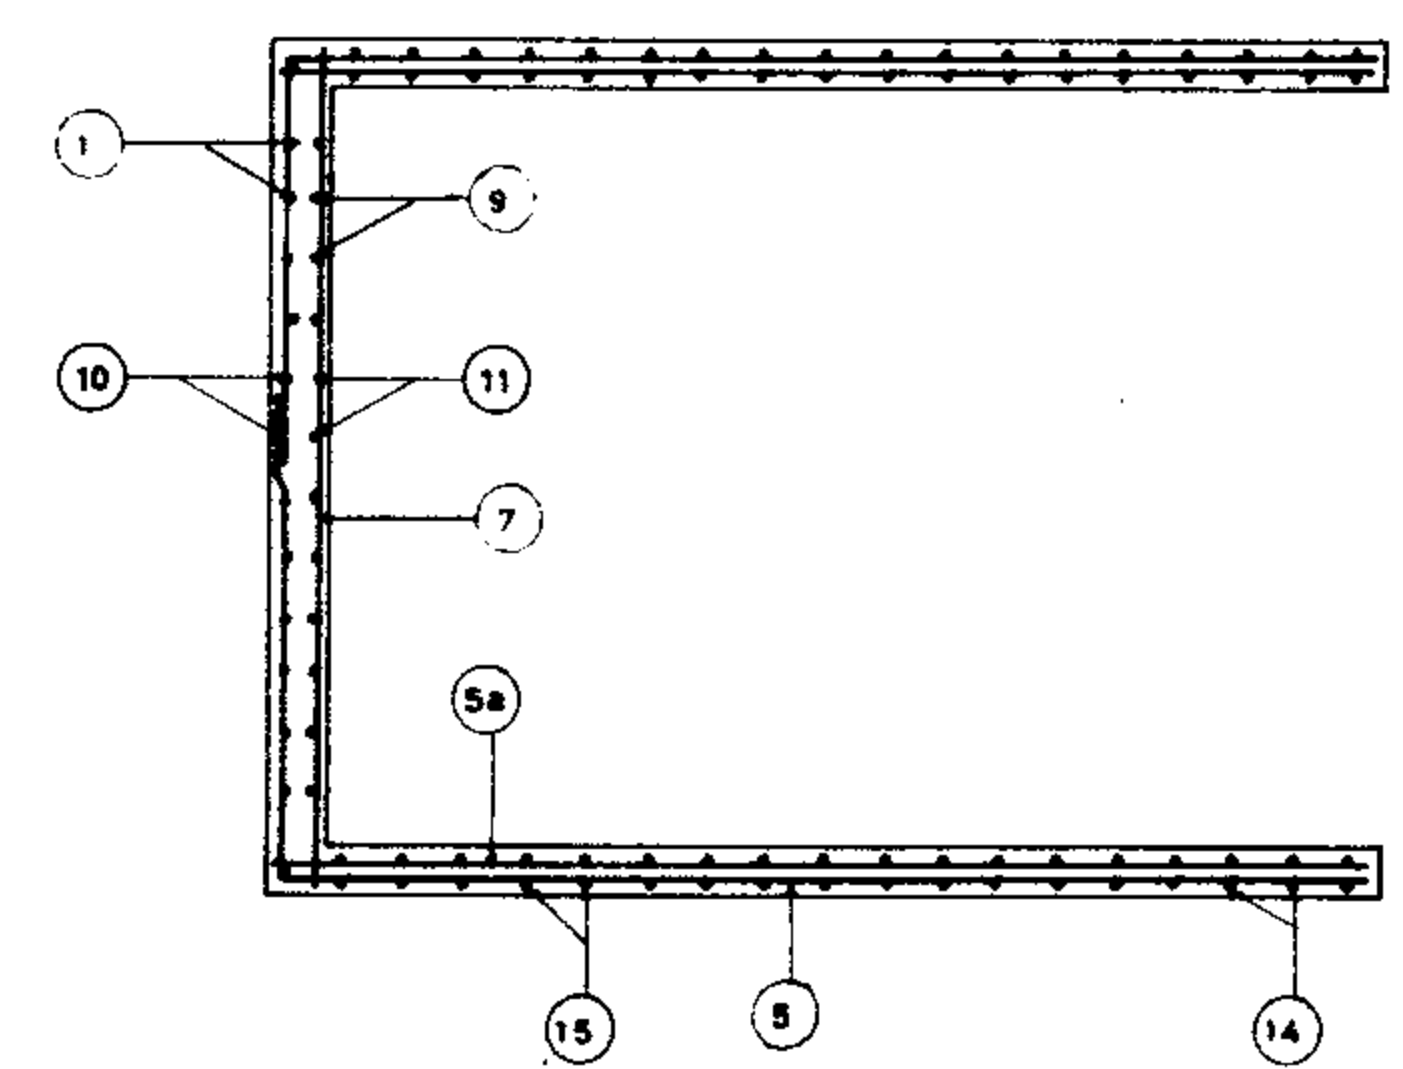

SECTION H_H
Scale 1:40









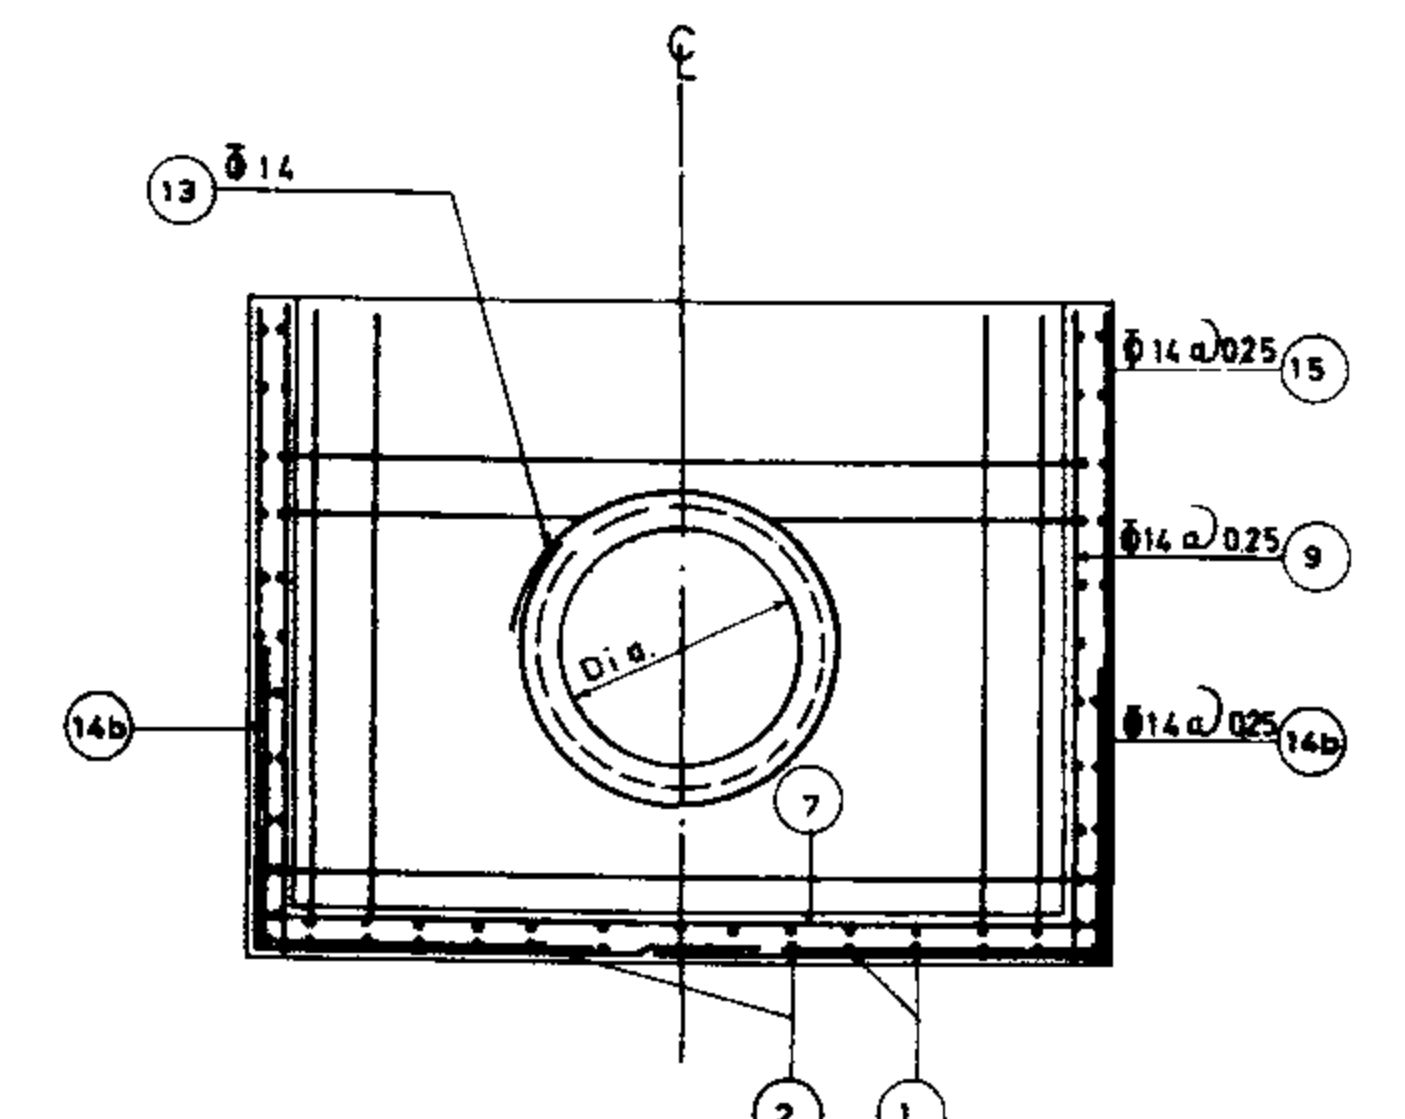


SECTION C_C
Scale 1:40

REFERENCE DWGS: For dimension tables see dwg. 16/1/2/01
 For list of reinforcement see dwg. 16/1/3/09
 For plan & sections see dwg. 16/1/1/01

Scale: 1:40	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. No. 16/1/3/04	BAFFLED OUTLET REINFORCEMENT PLAN & SECTIONS GROUP 4
Approved:	Sheet No. 5 of 12 Rev. No.	











ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

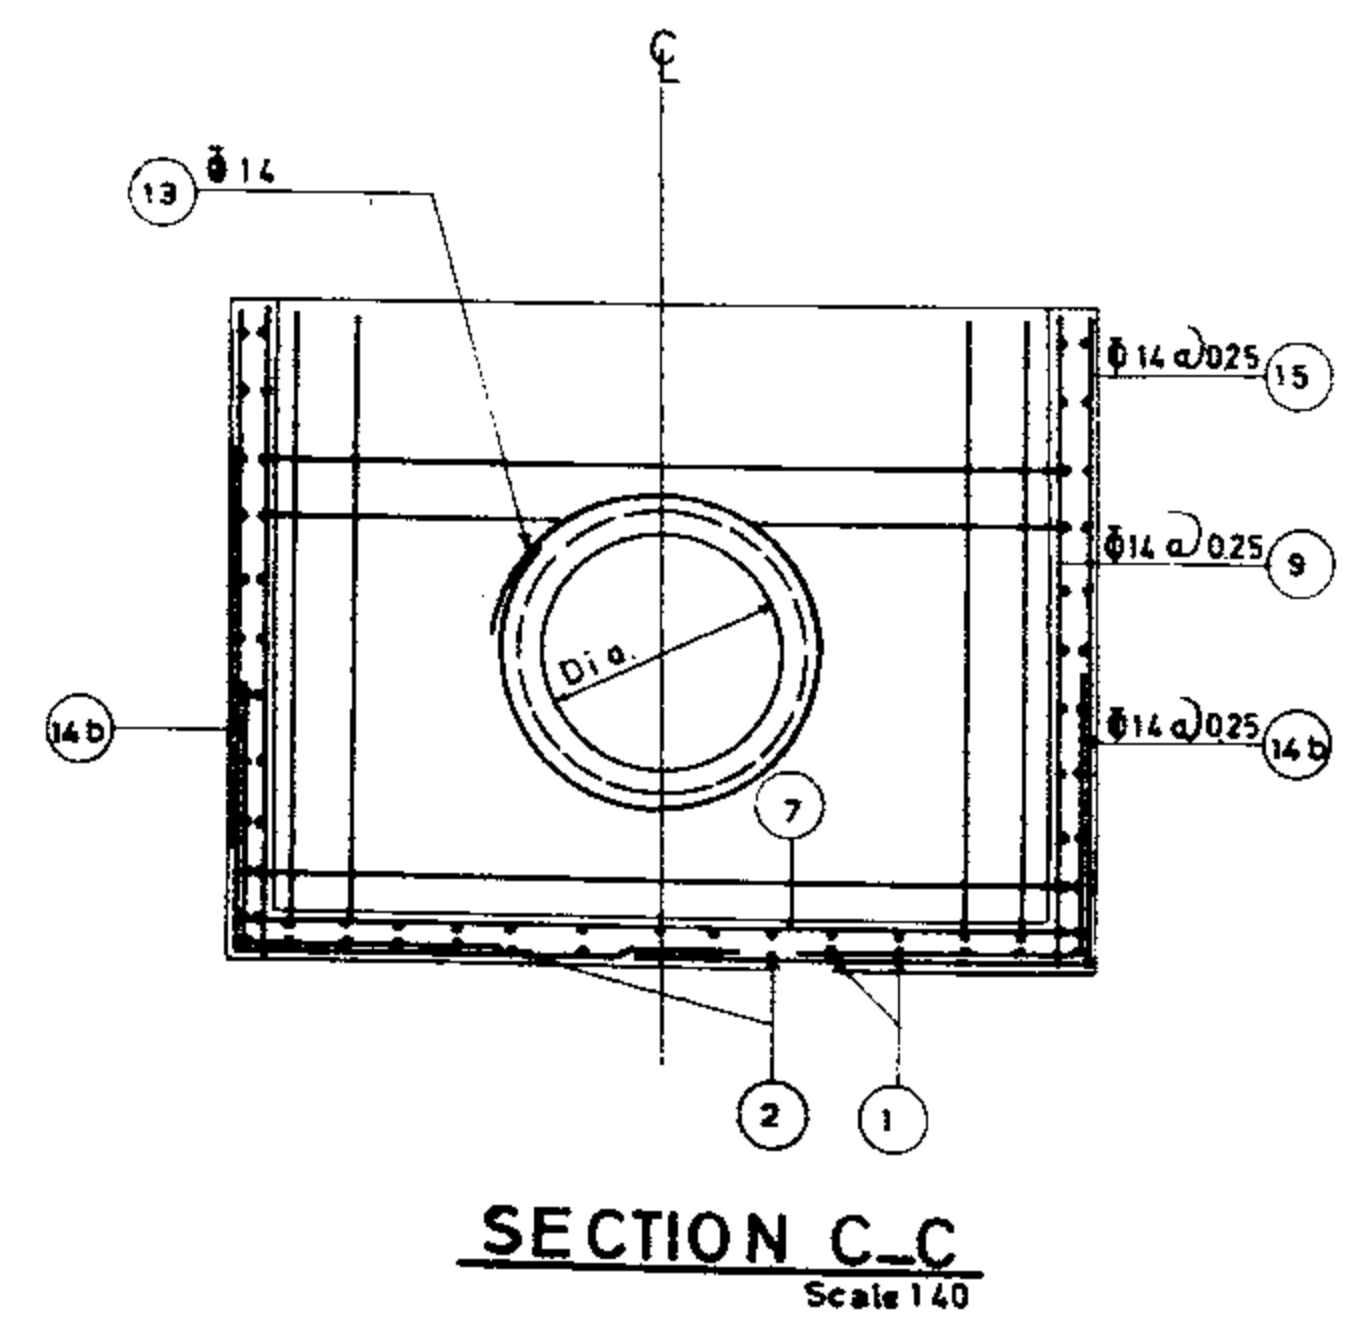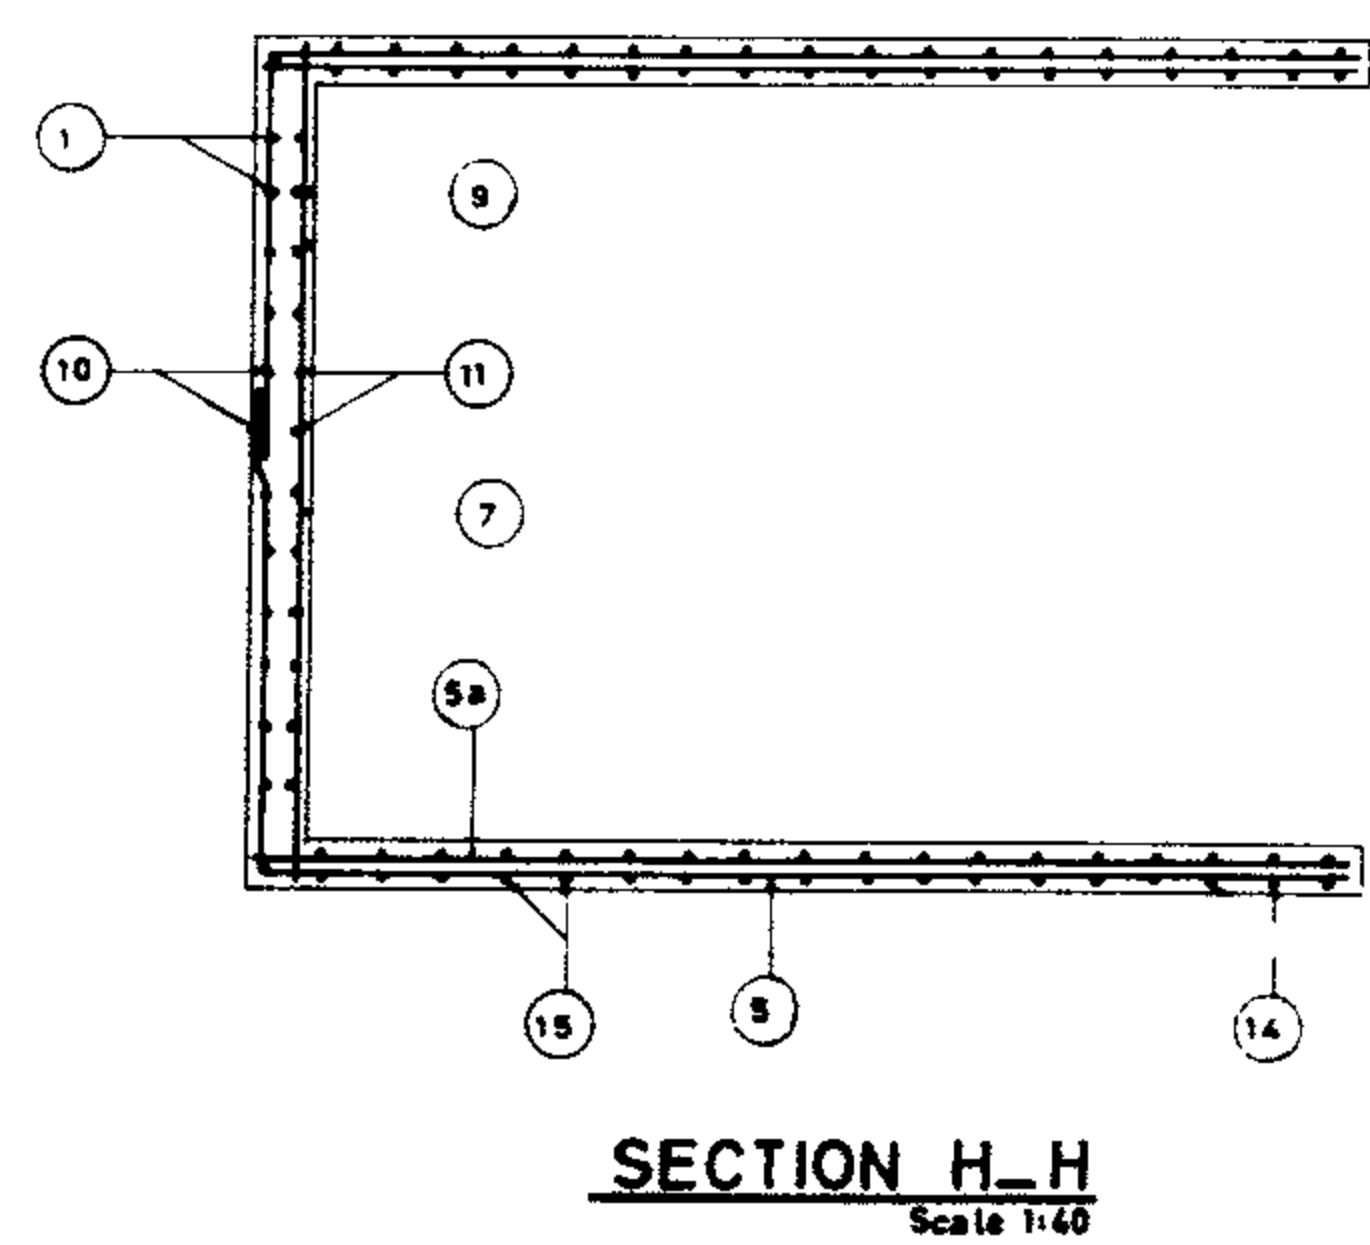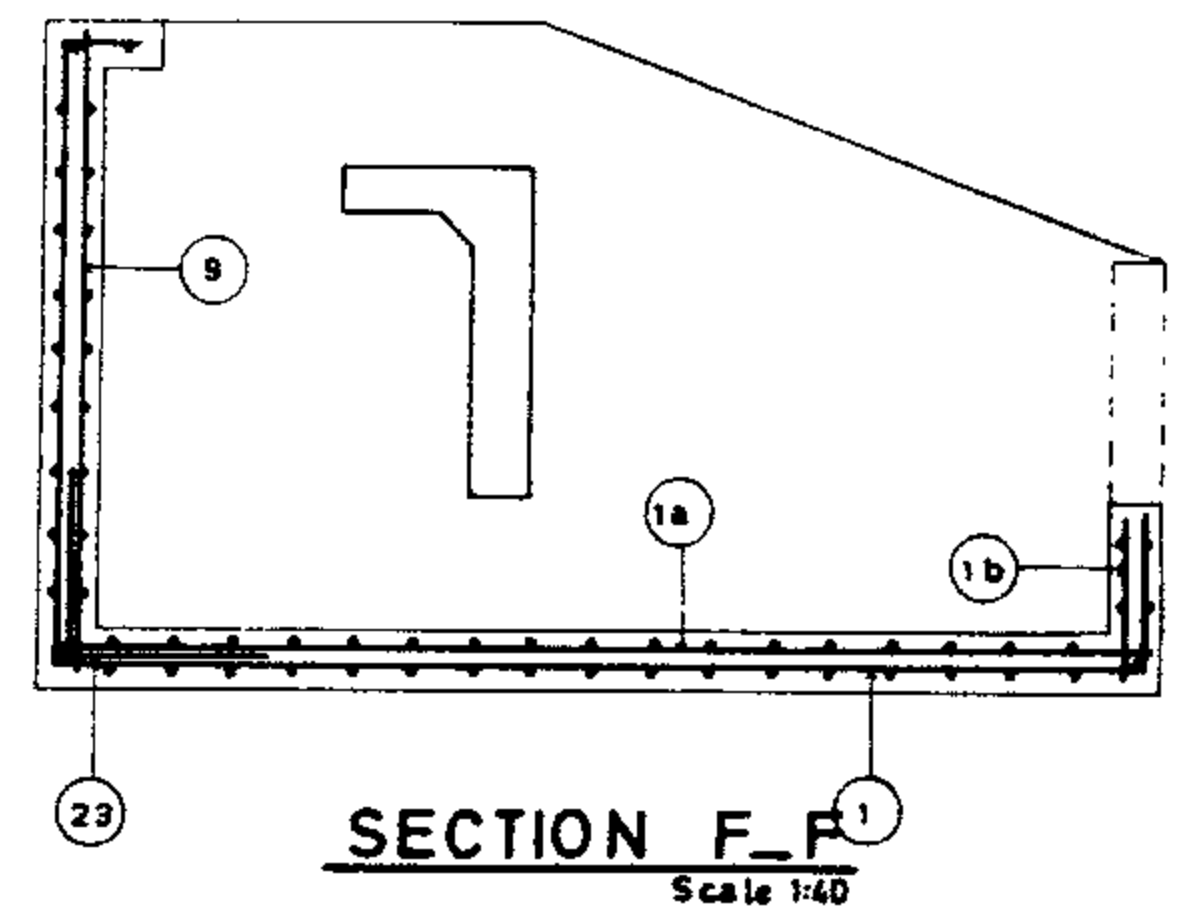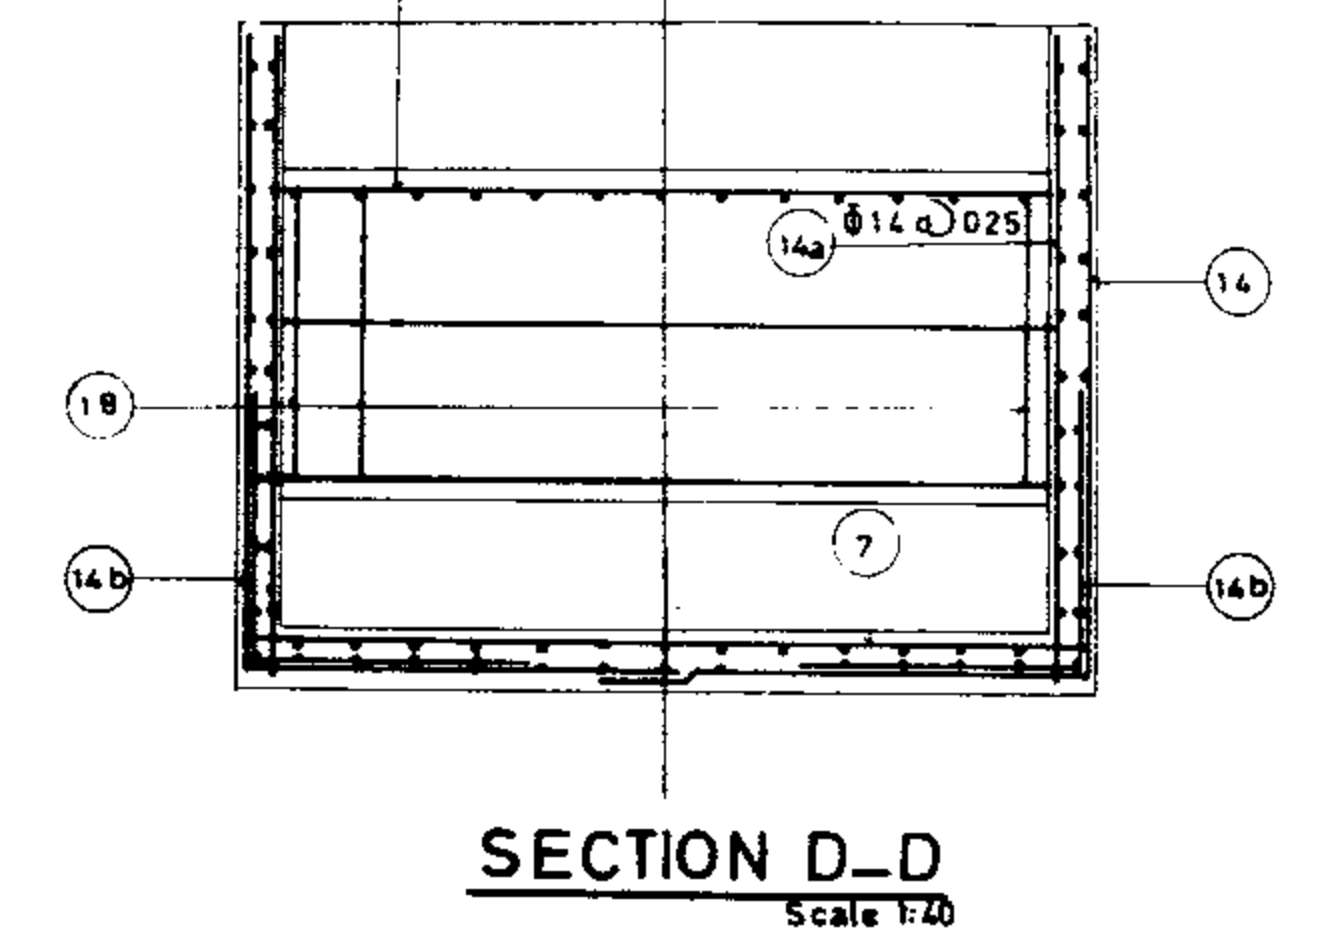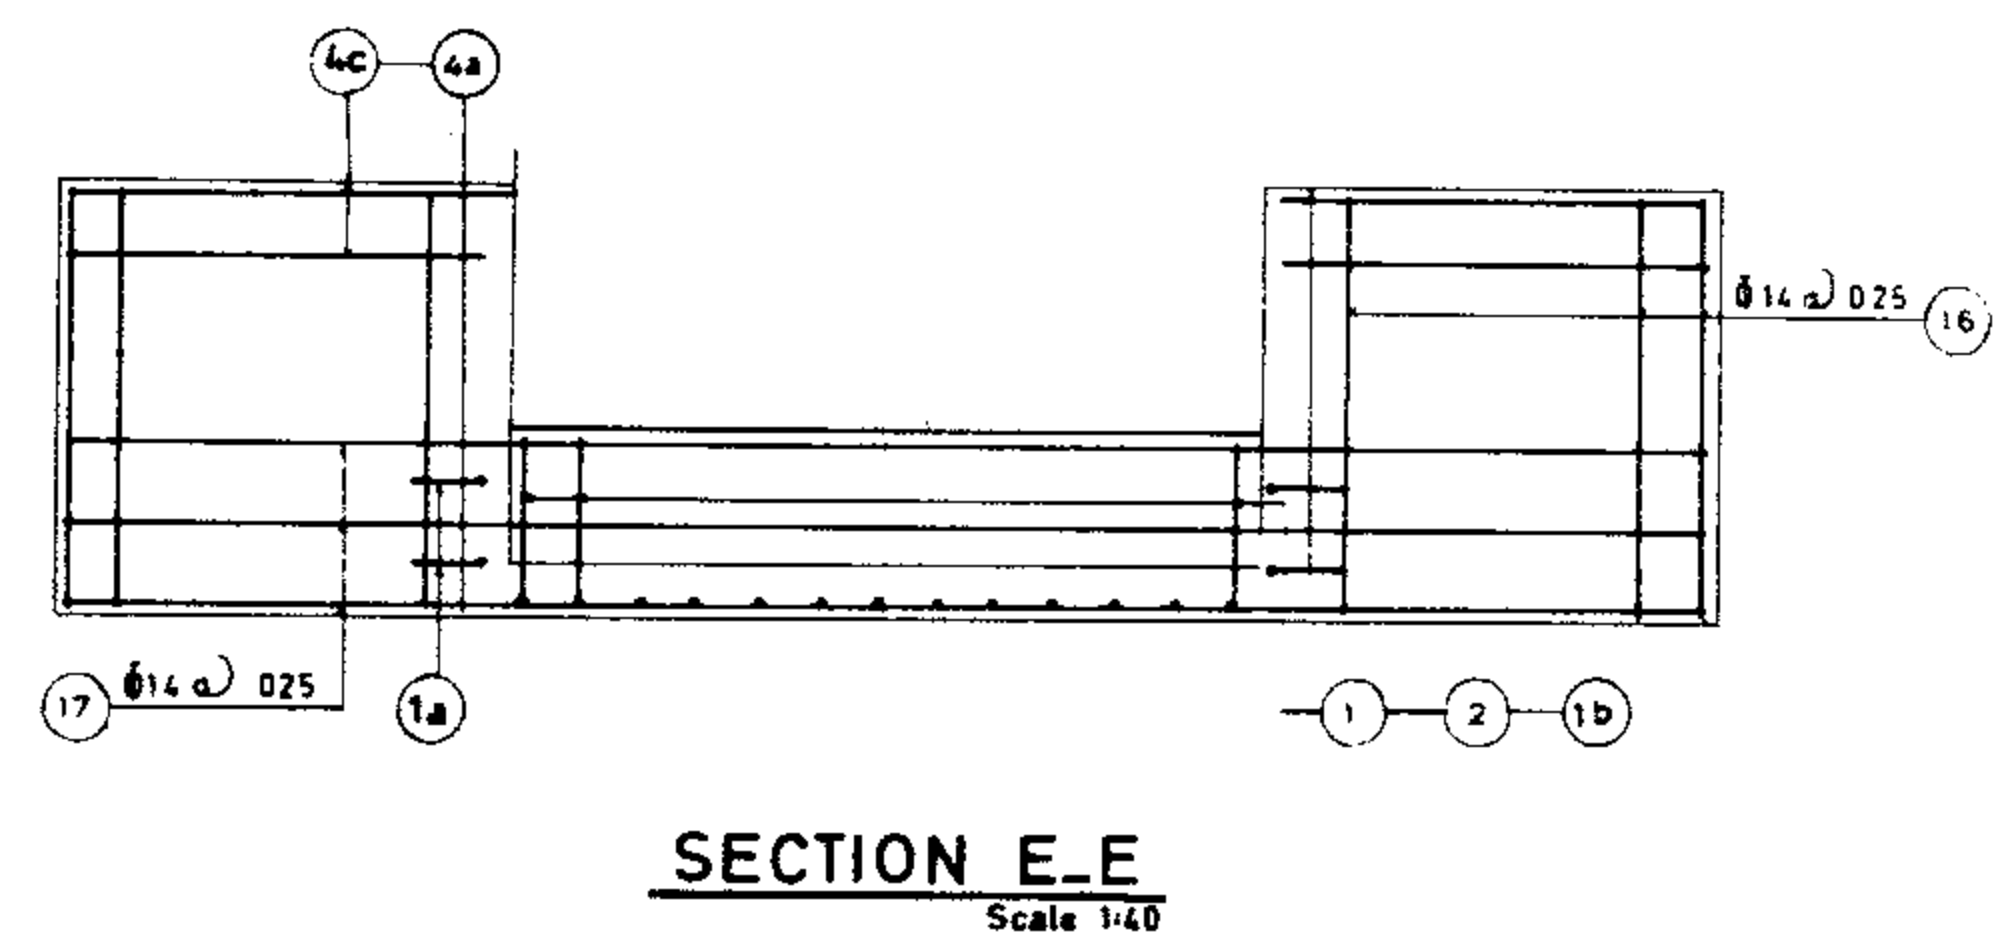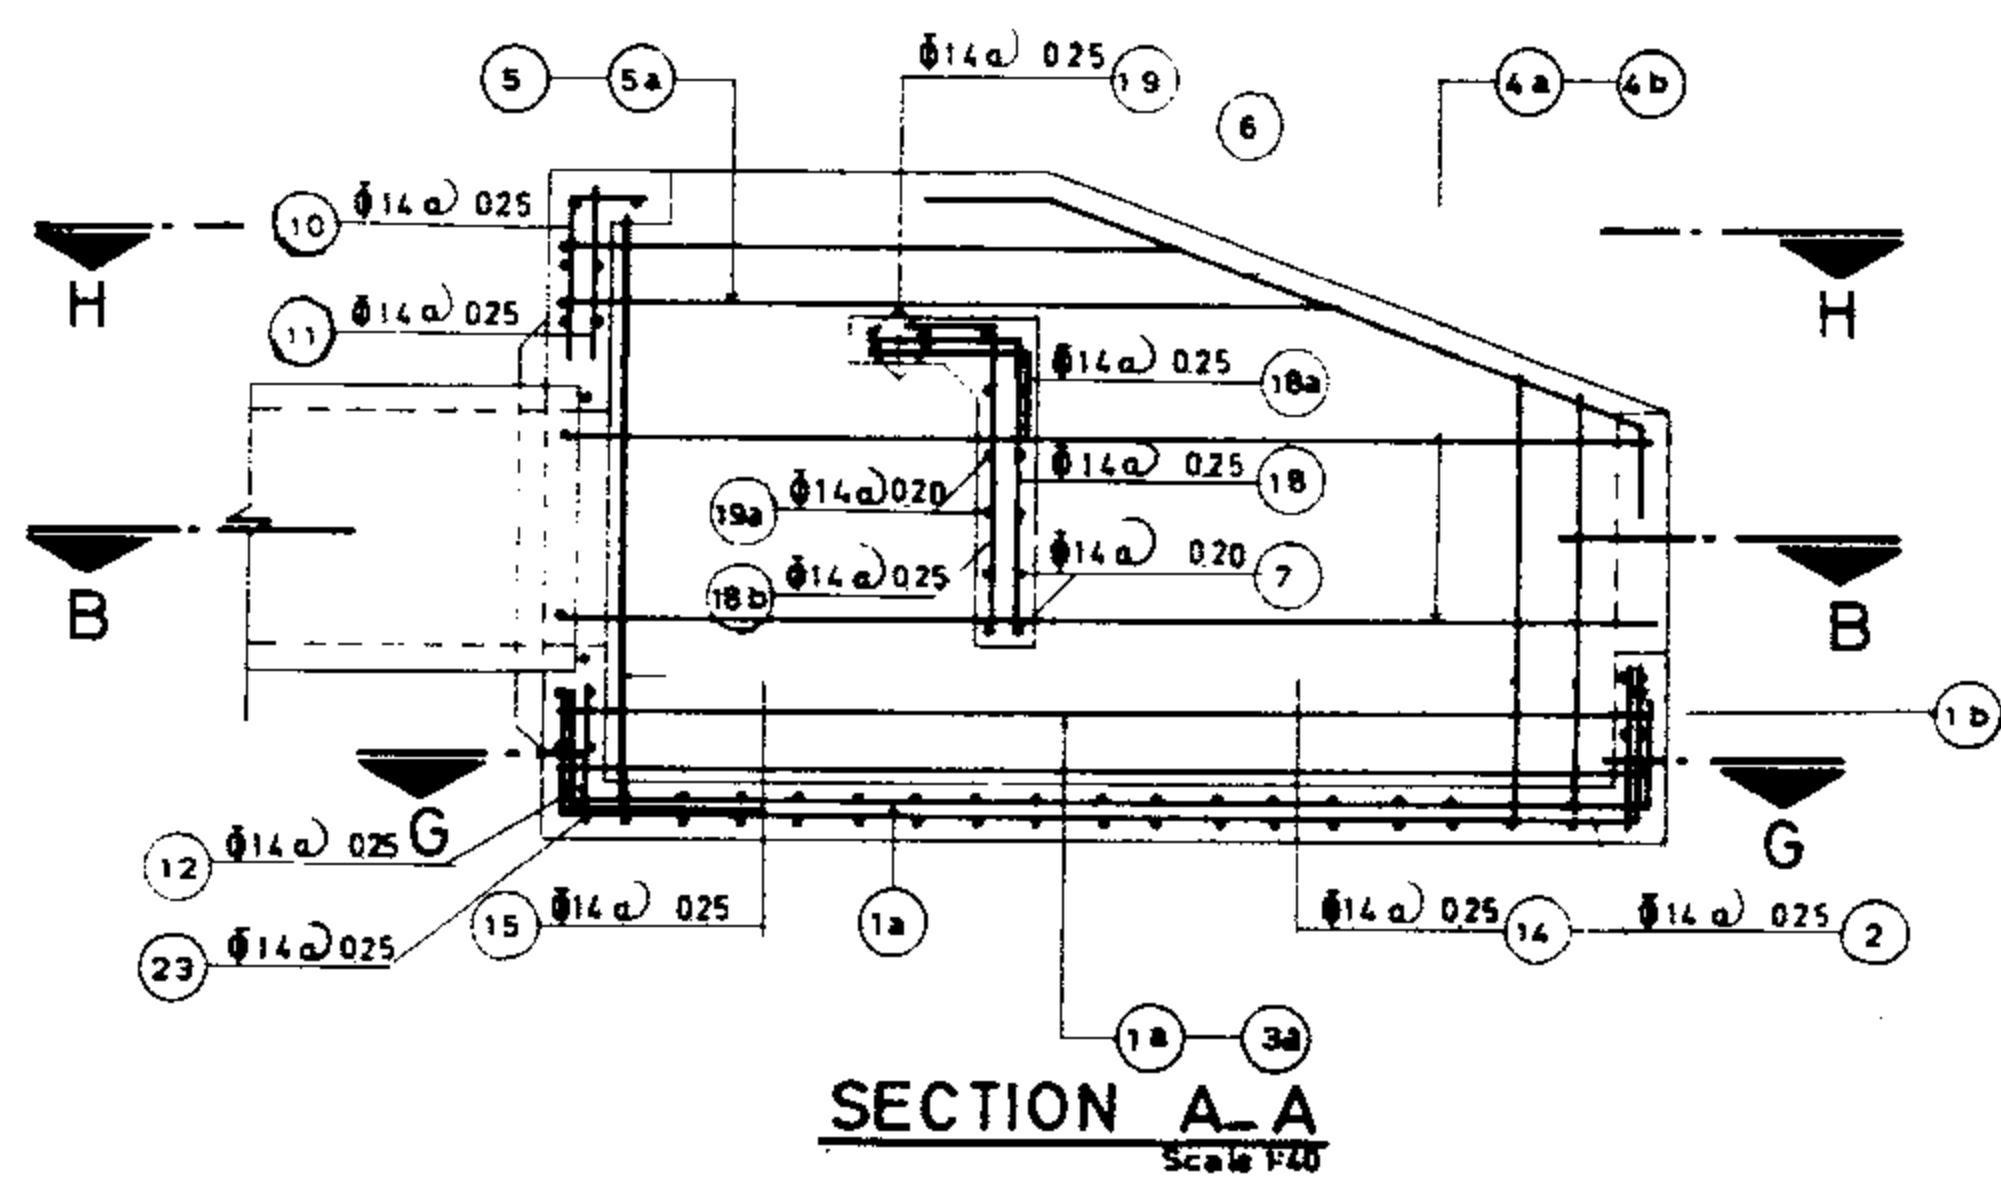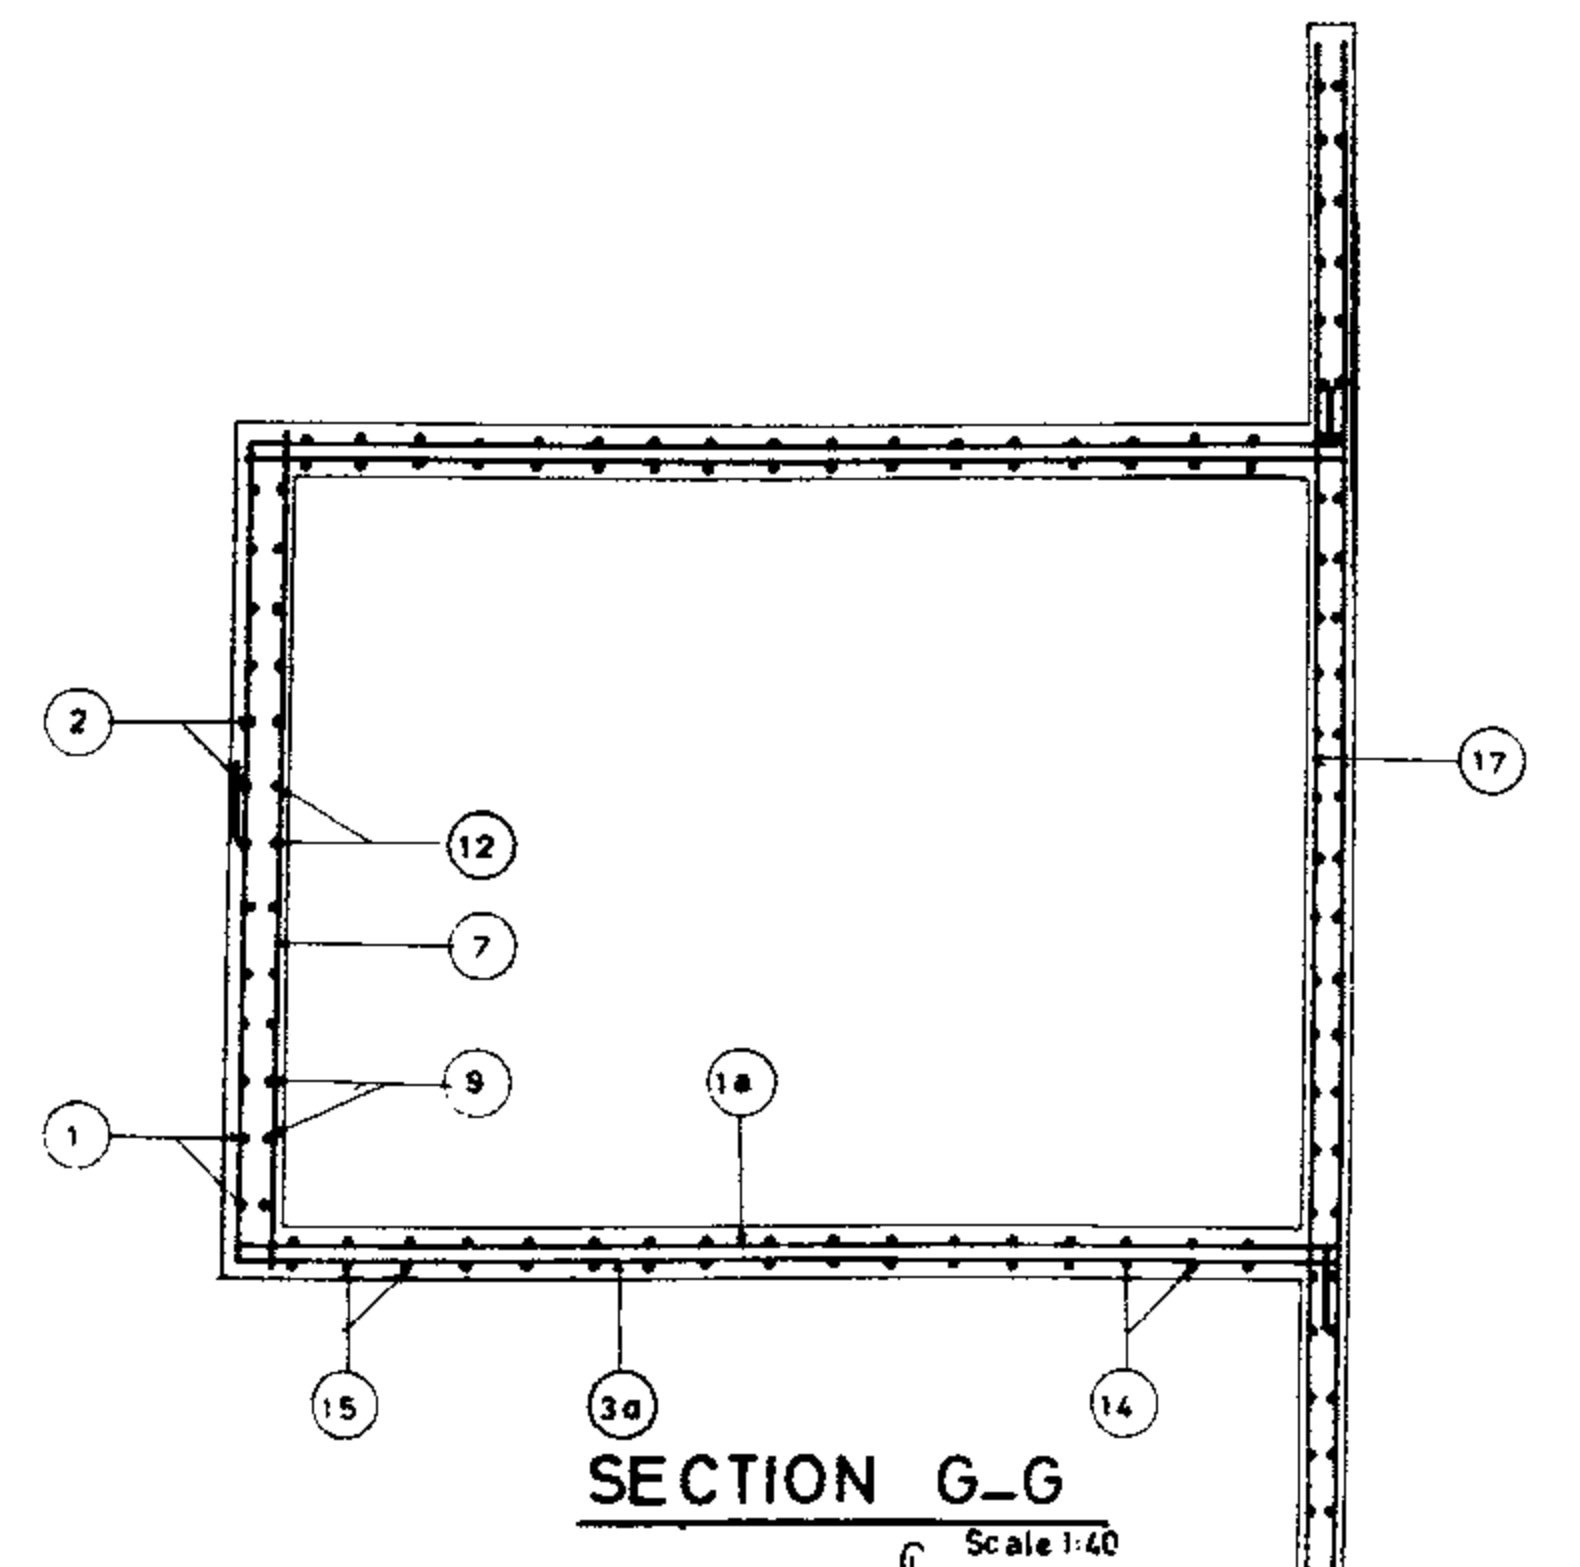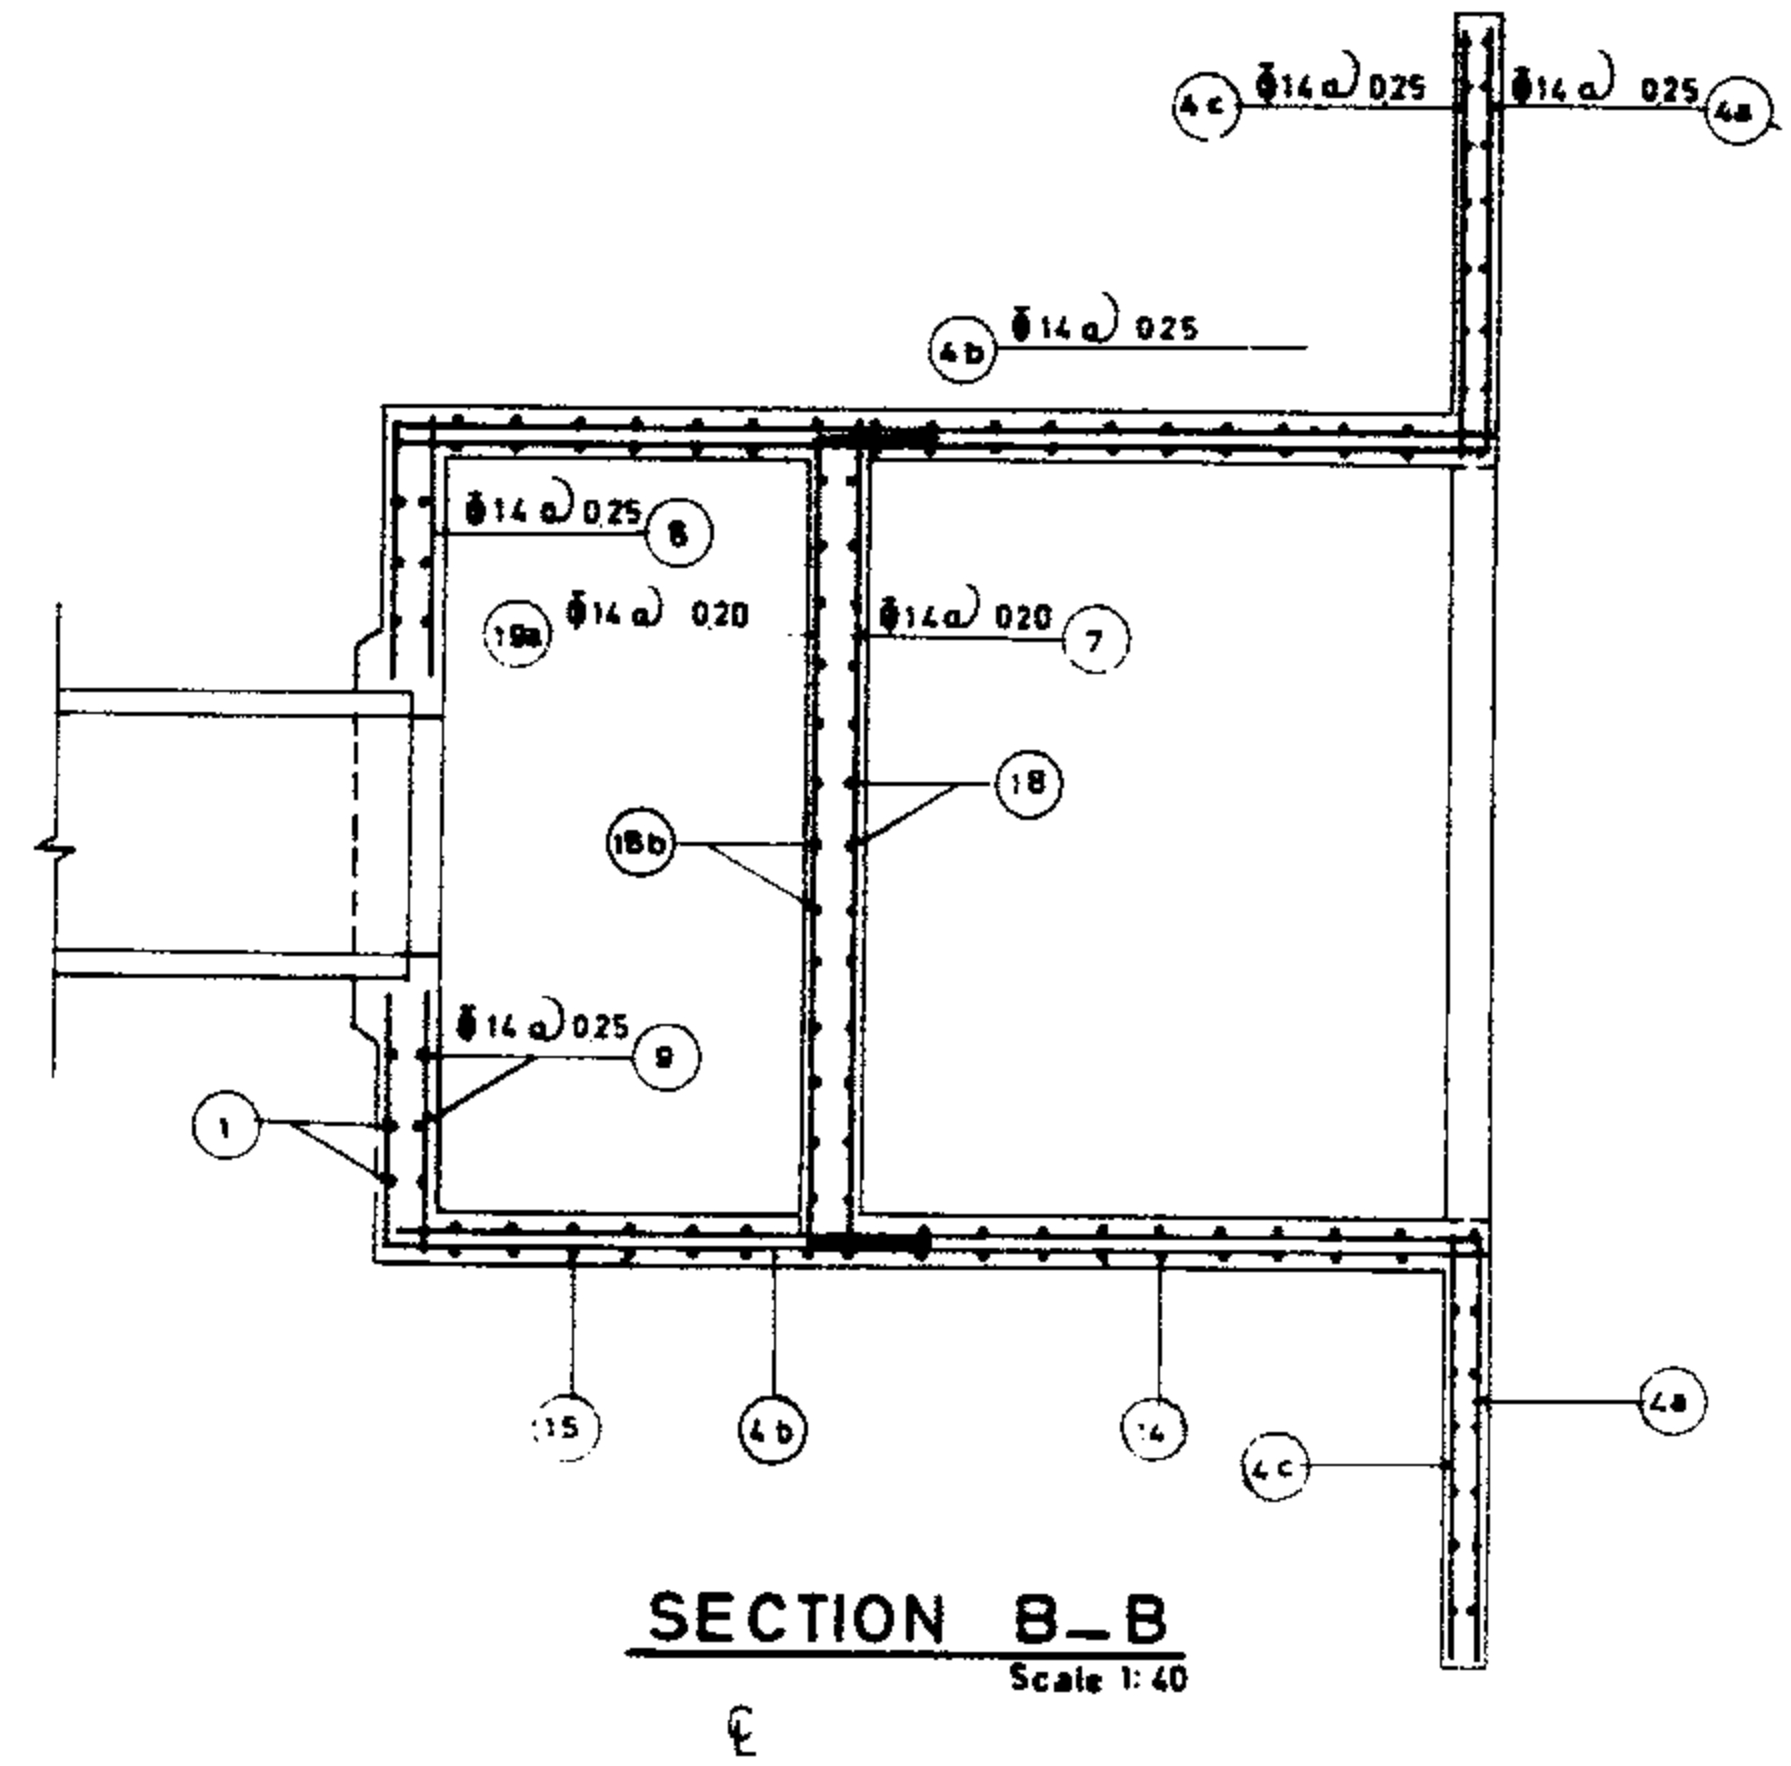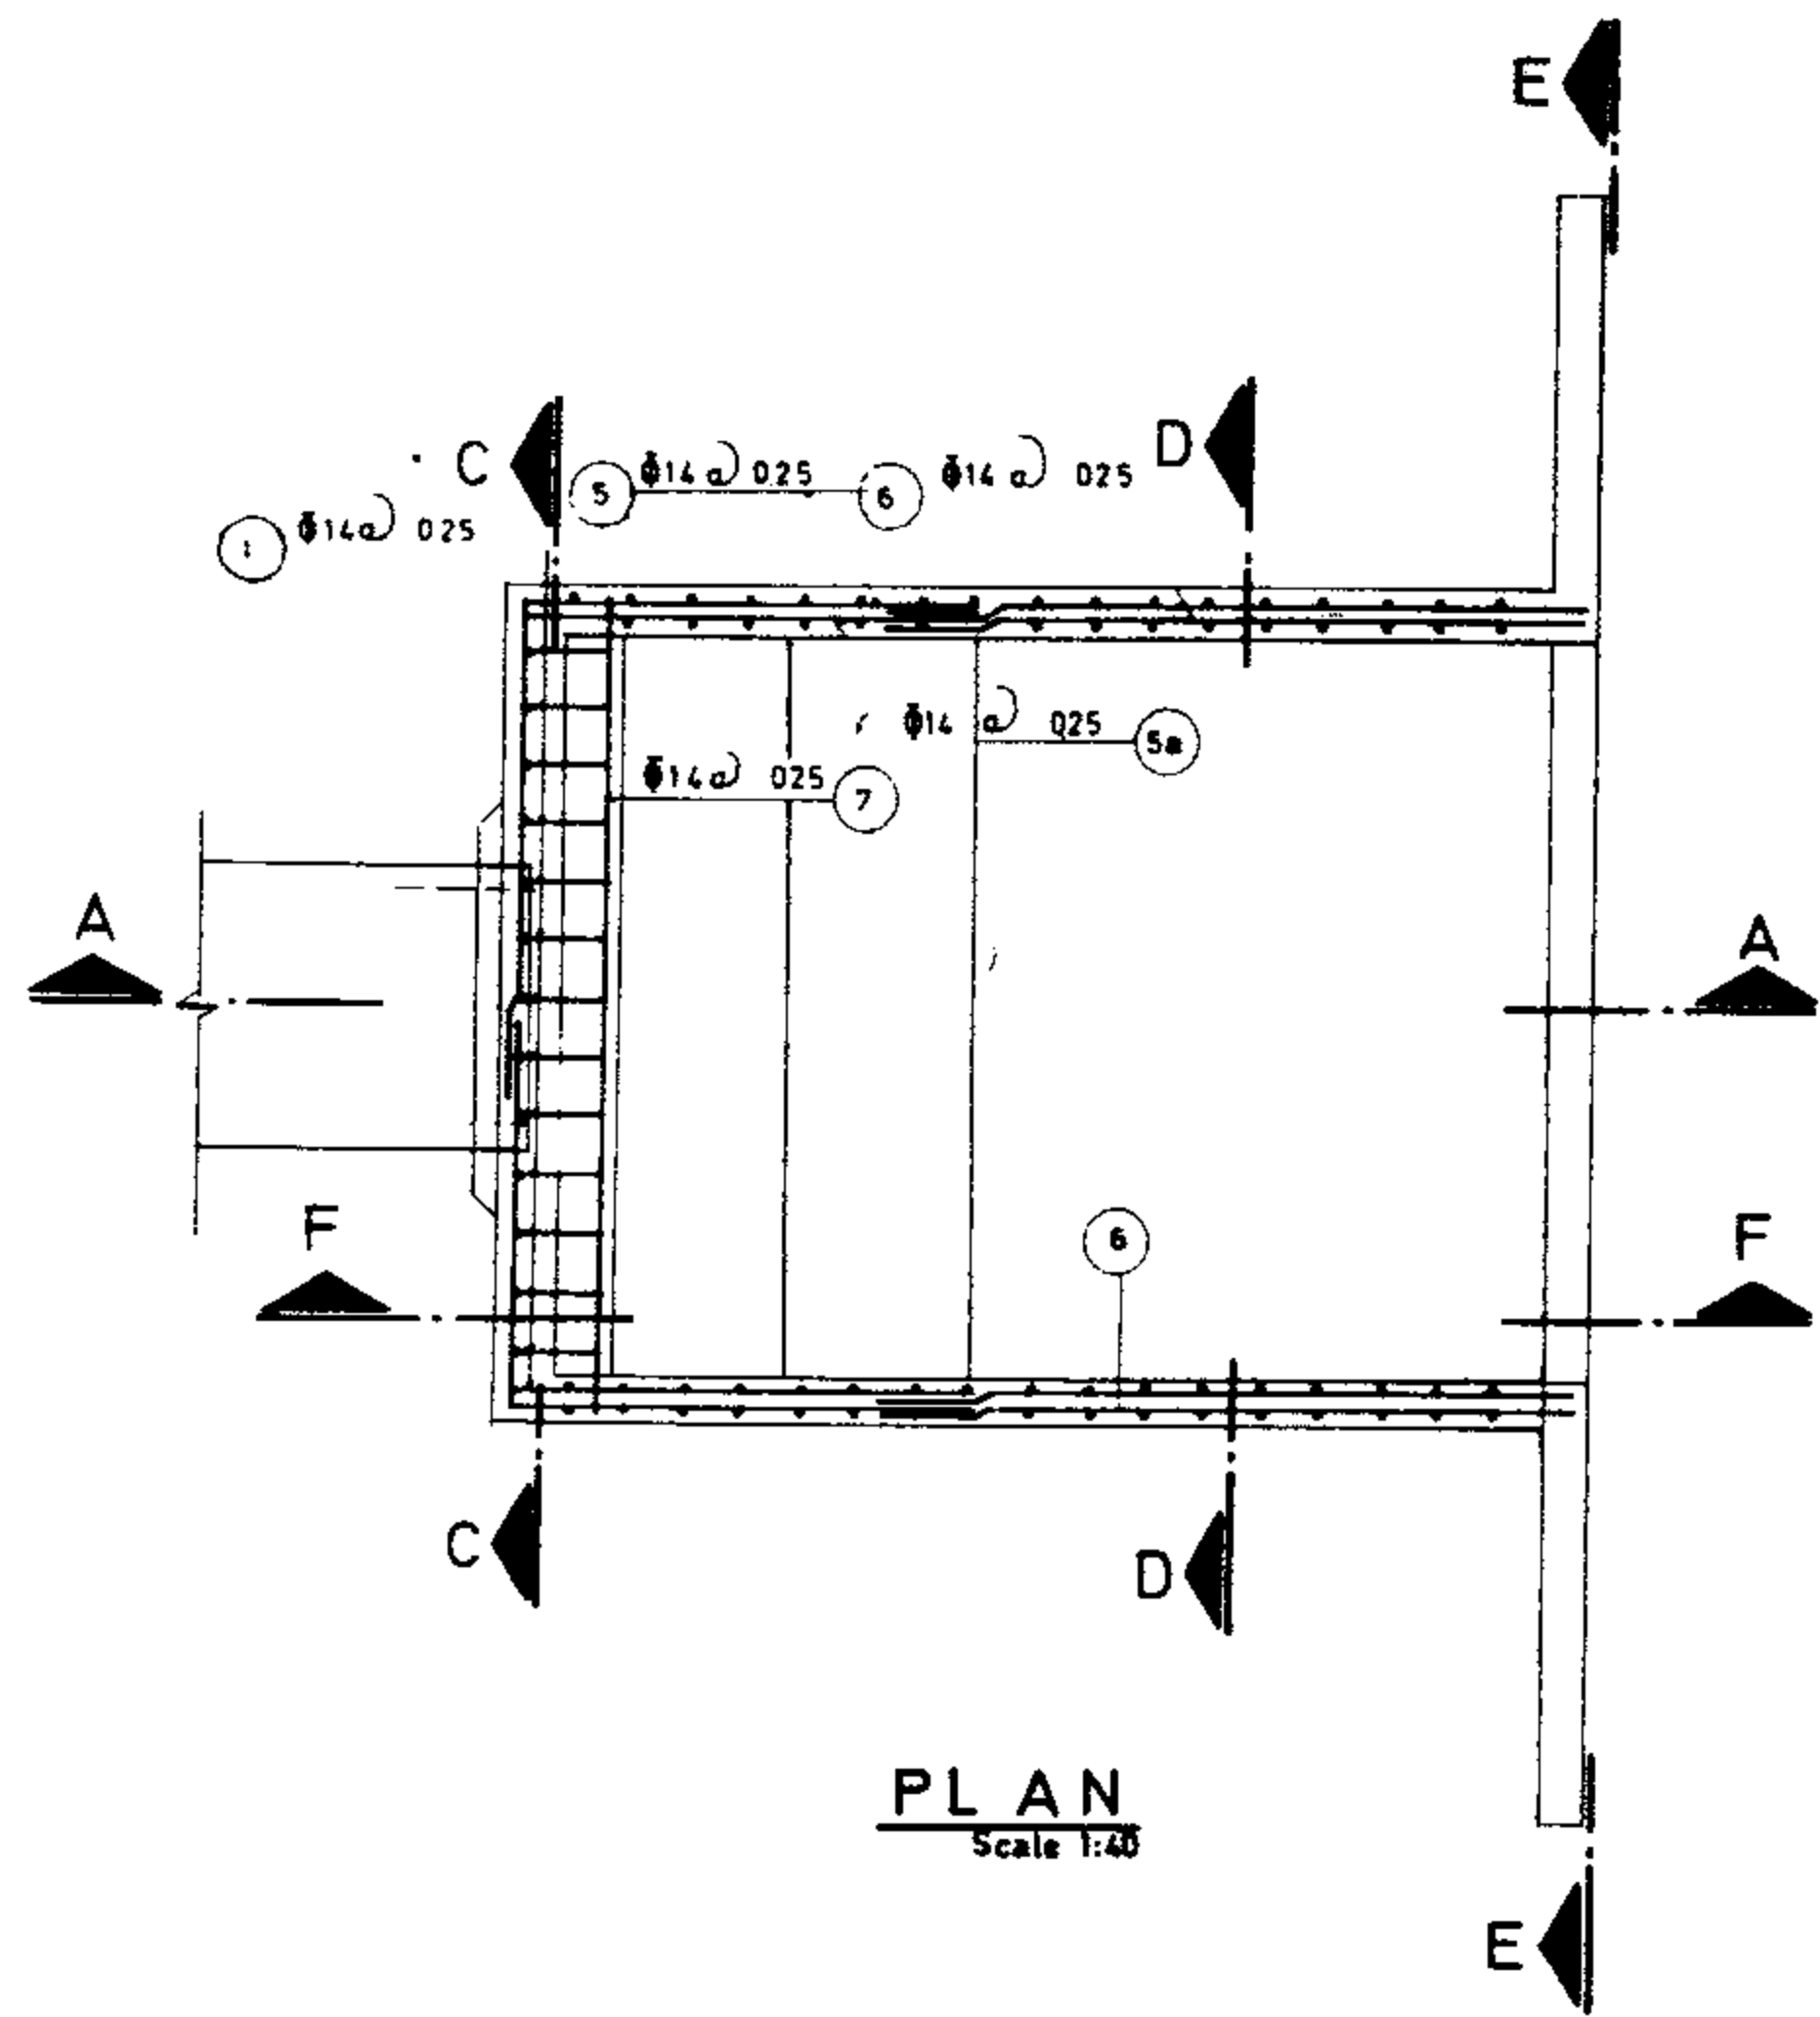

REFERENCE DWGS: For dimension tables see dwg. 16/1/2/01
 For list of reinforcement see dwgs. 16/1/3/09 & 16/1/3/10
 For plan & sections see dwg. 16/1/1/01

Scale: 1:40	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG NR. 16/1/3/05	BAFFLED OUTLET
Approved:	Sheet NR. 7 of 12	Rev NR.
		REINFORCEMENT
		PLAN & SECTIONS GROUP 5

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & CONSTRUCTION
 TECHNICAL RESEARCH AND STANDARD BUREAU

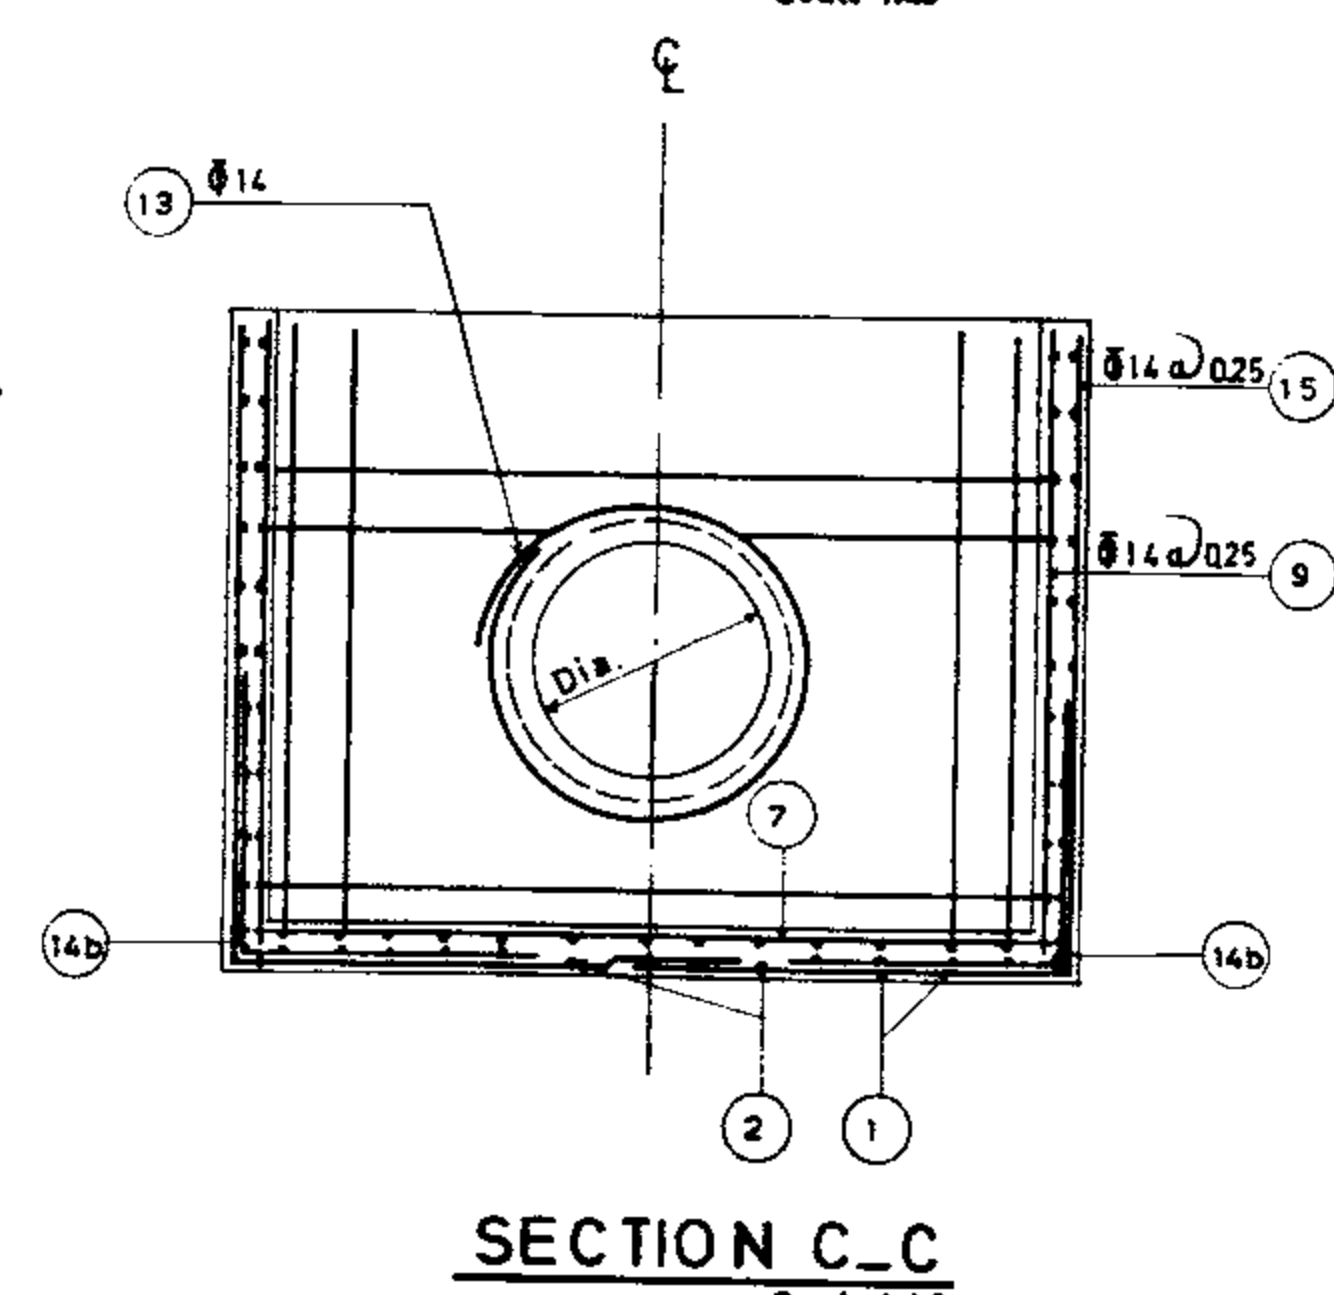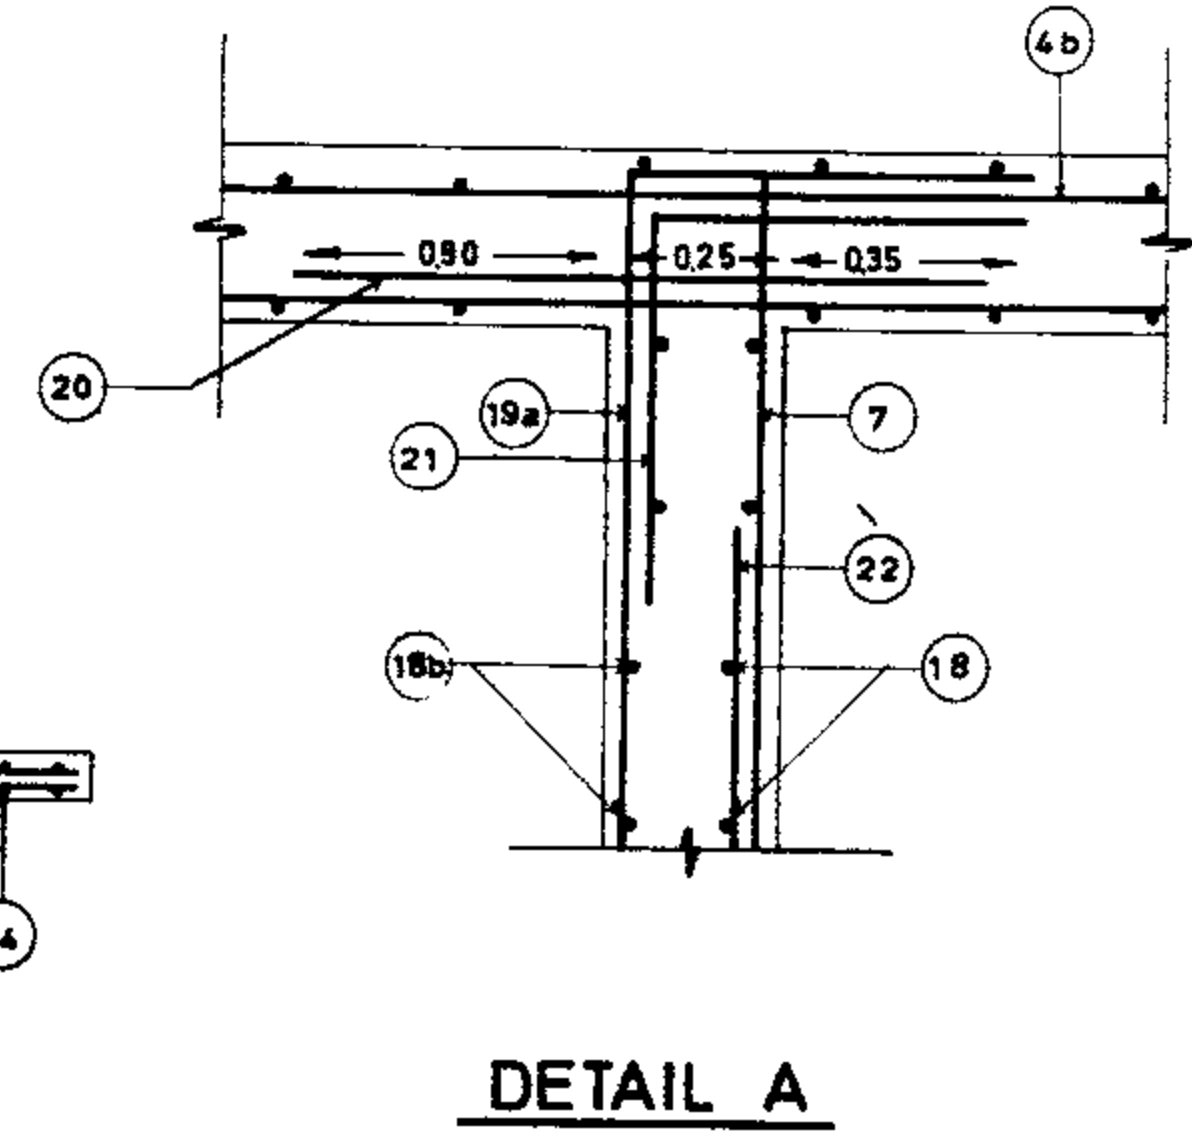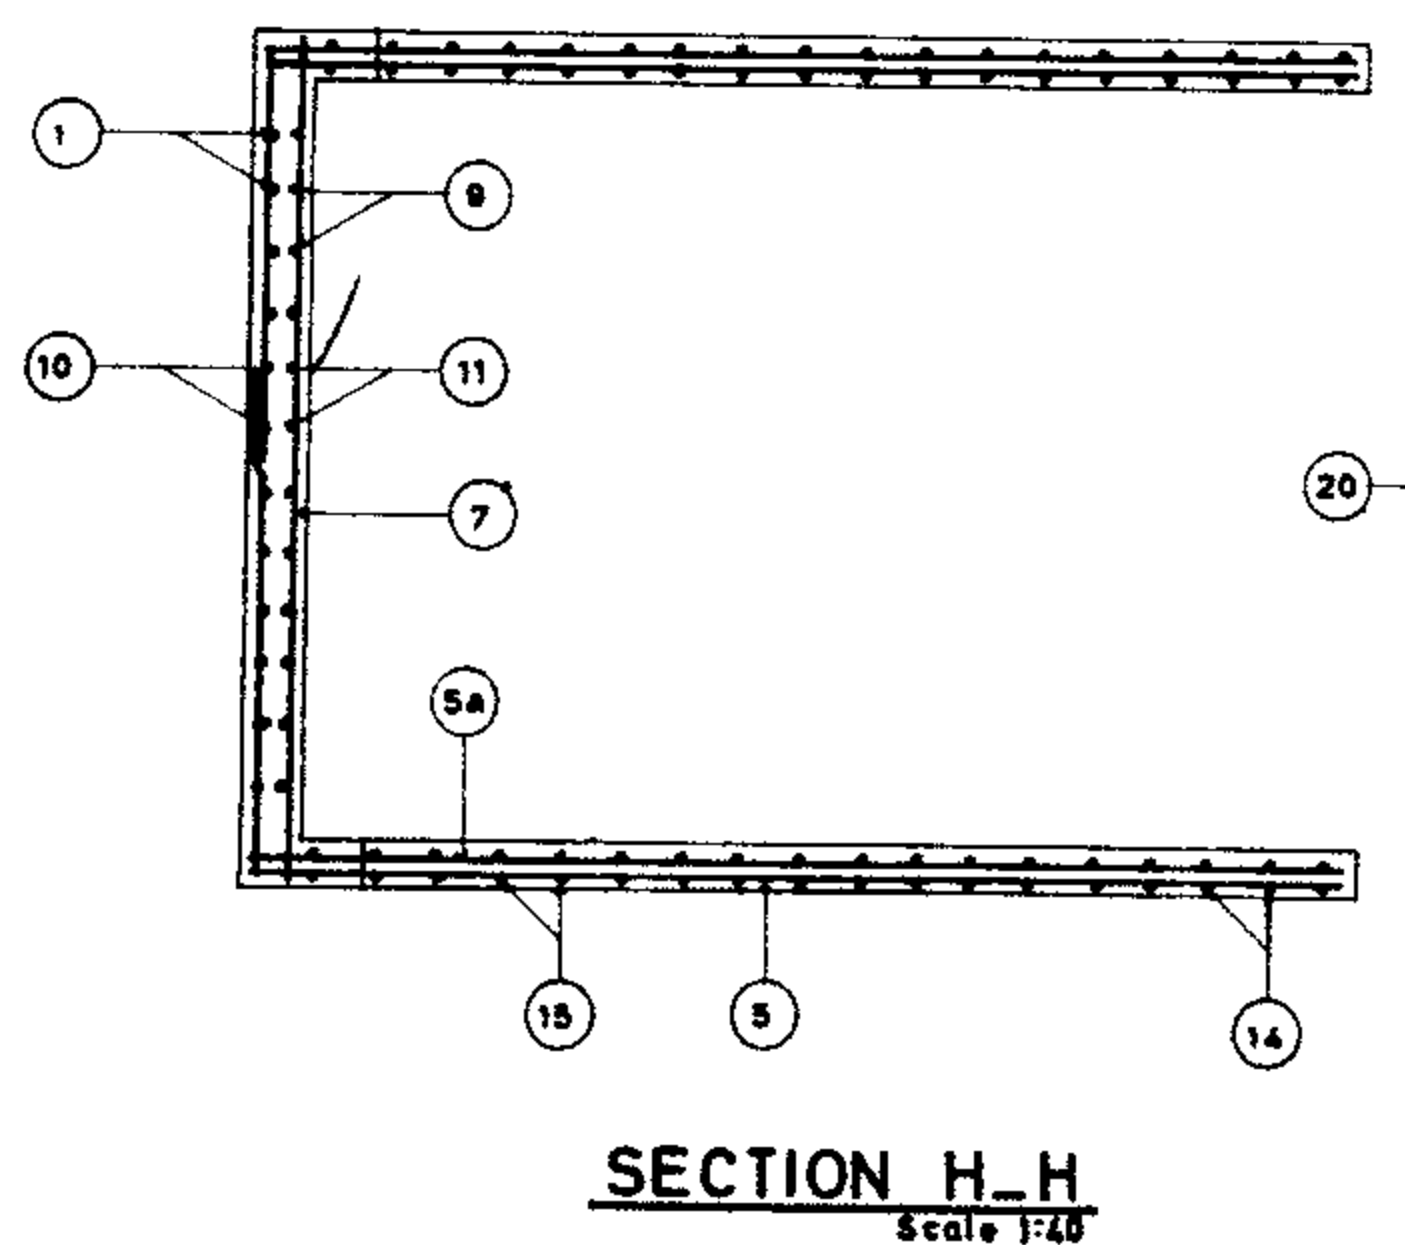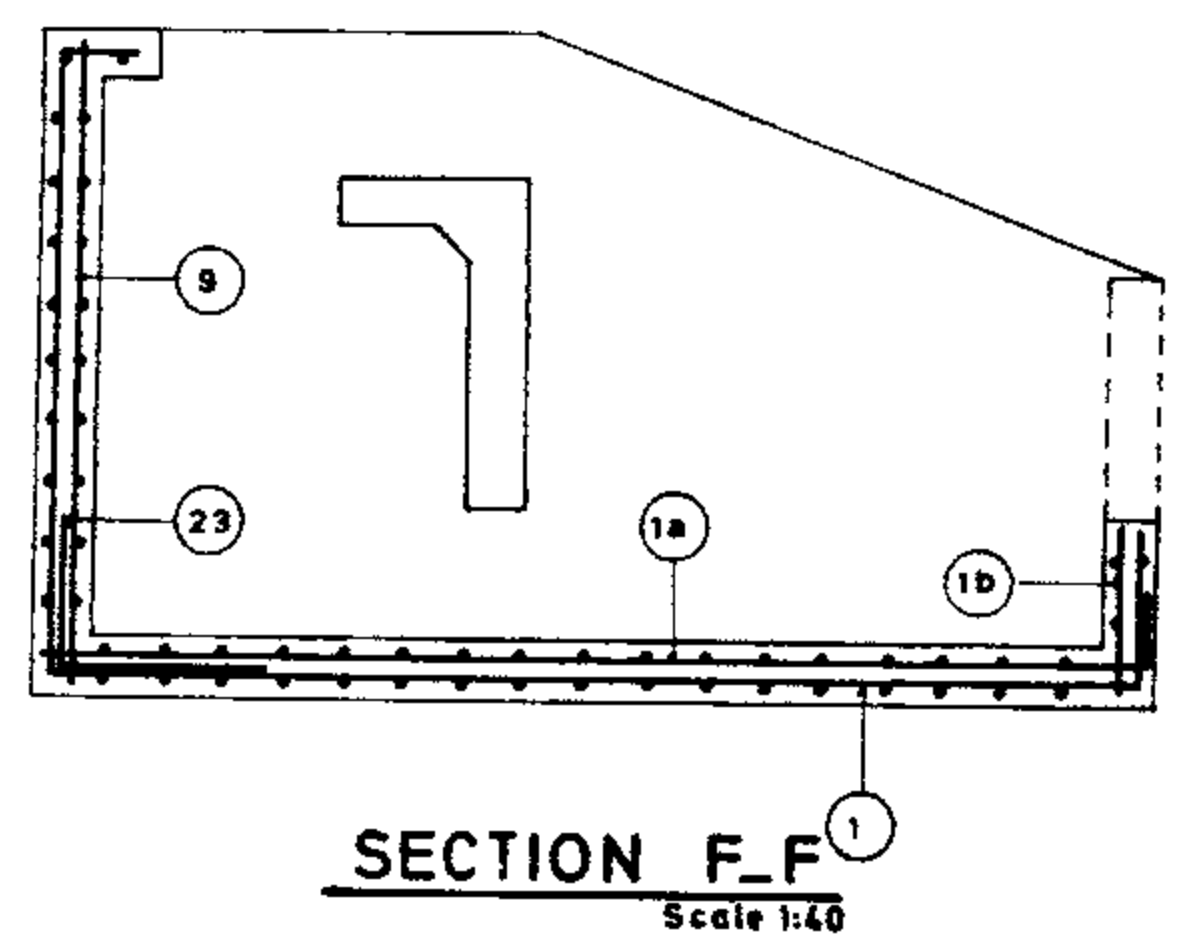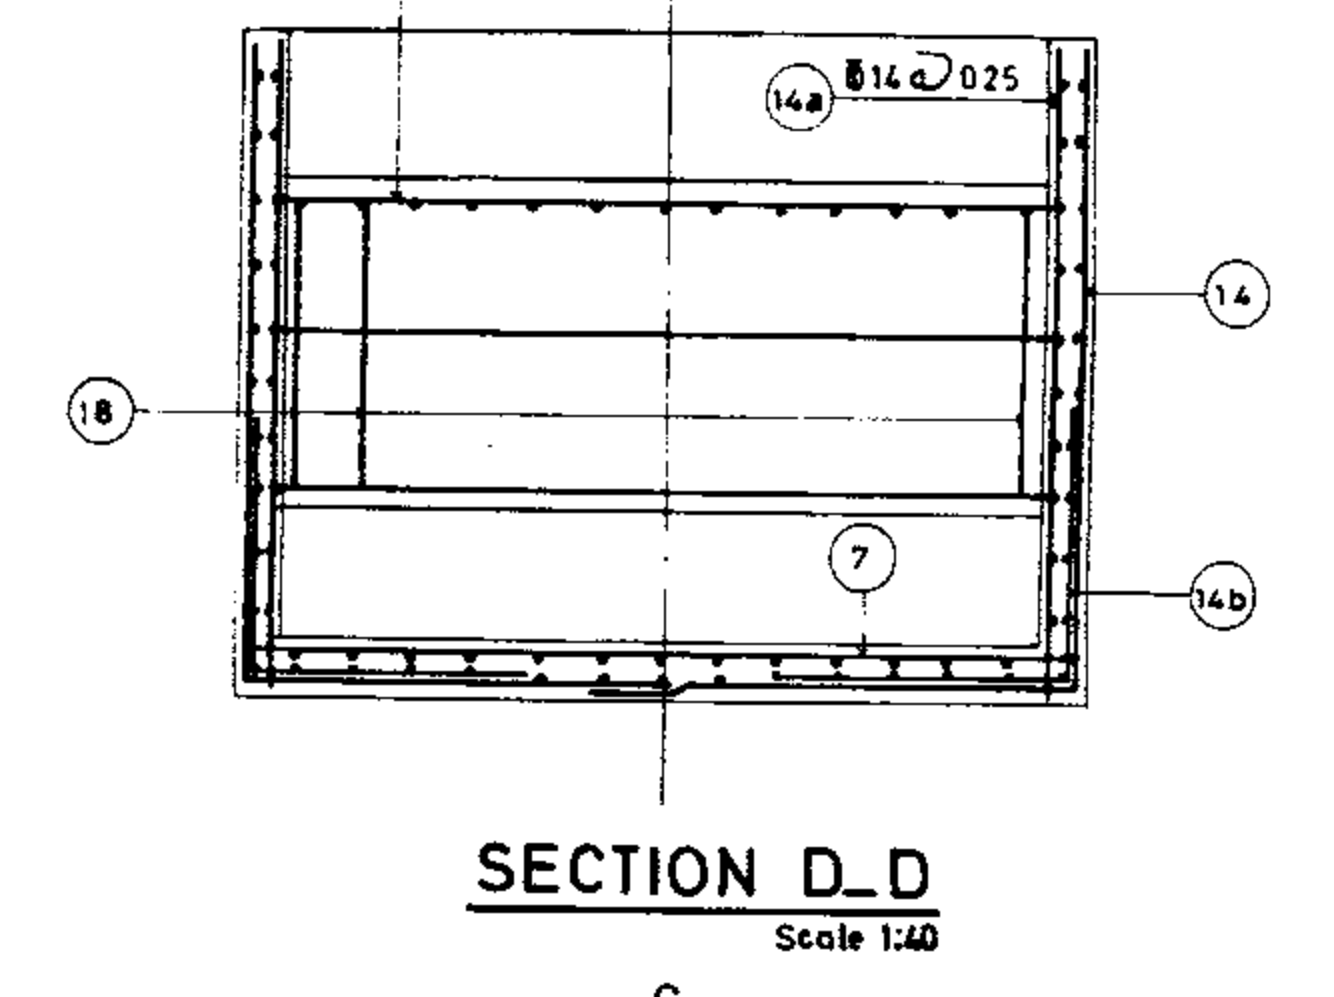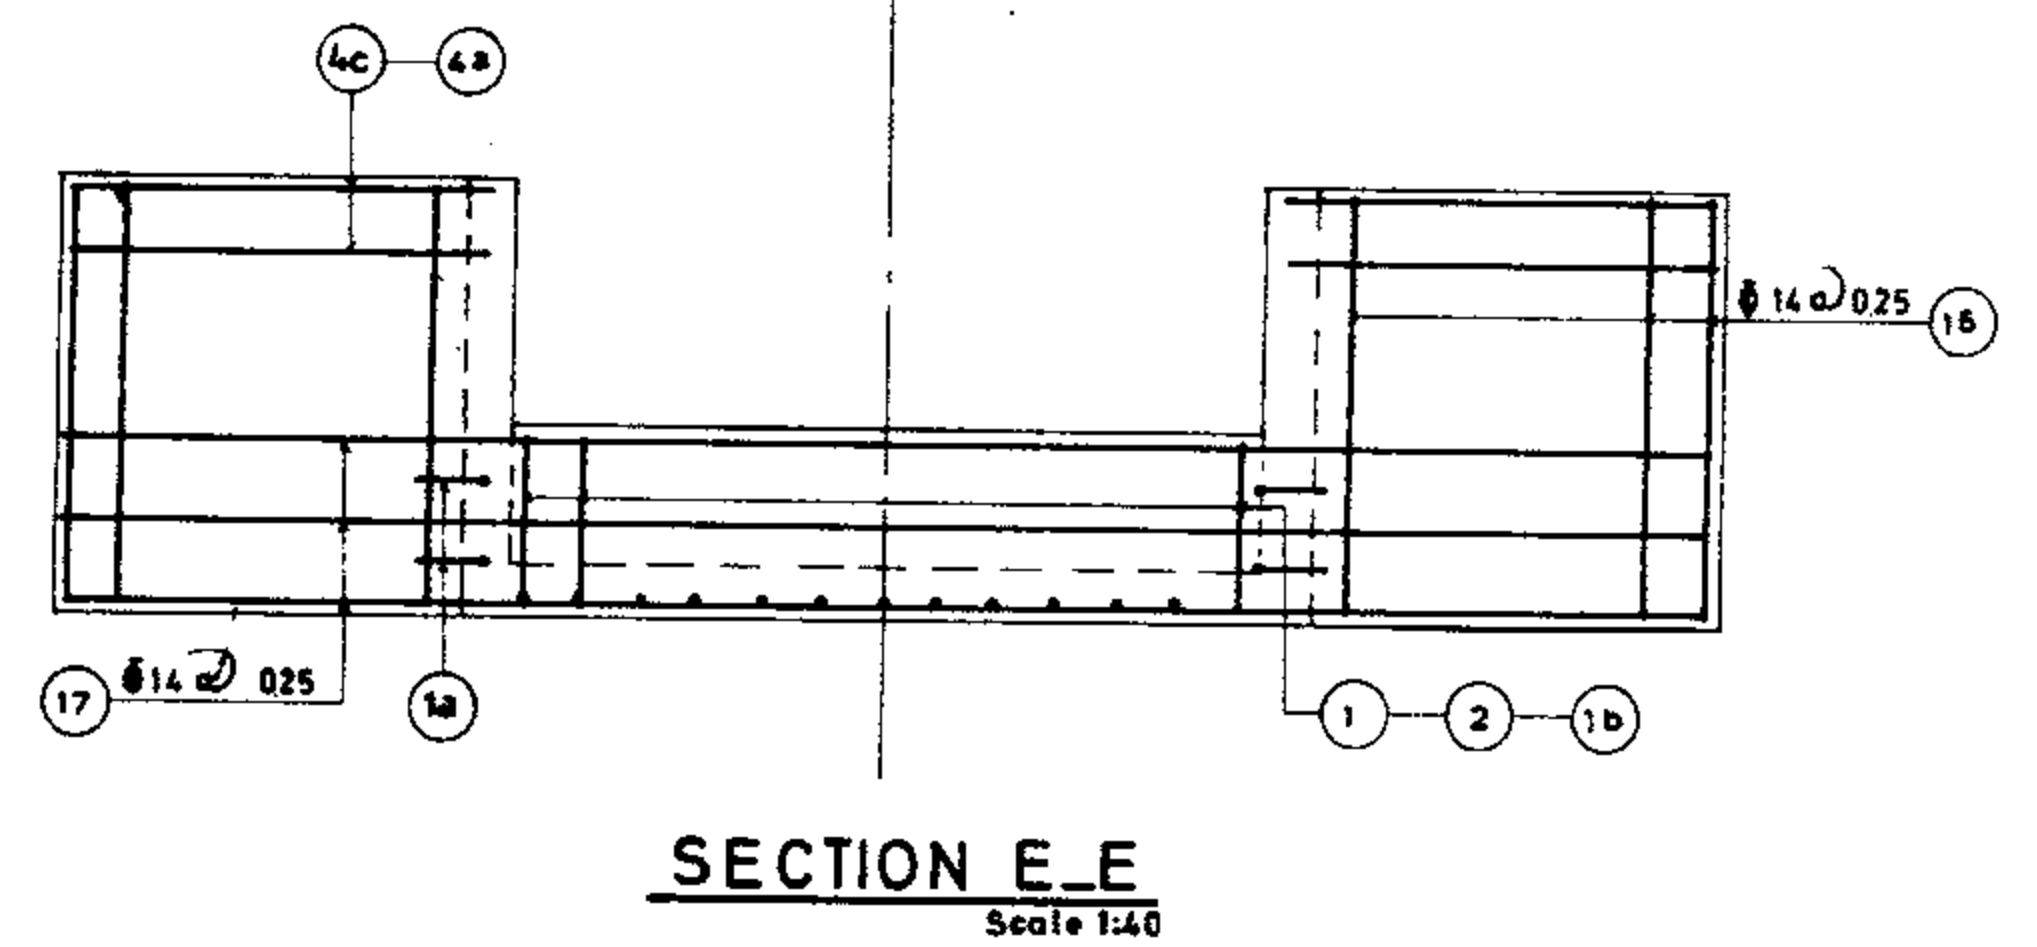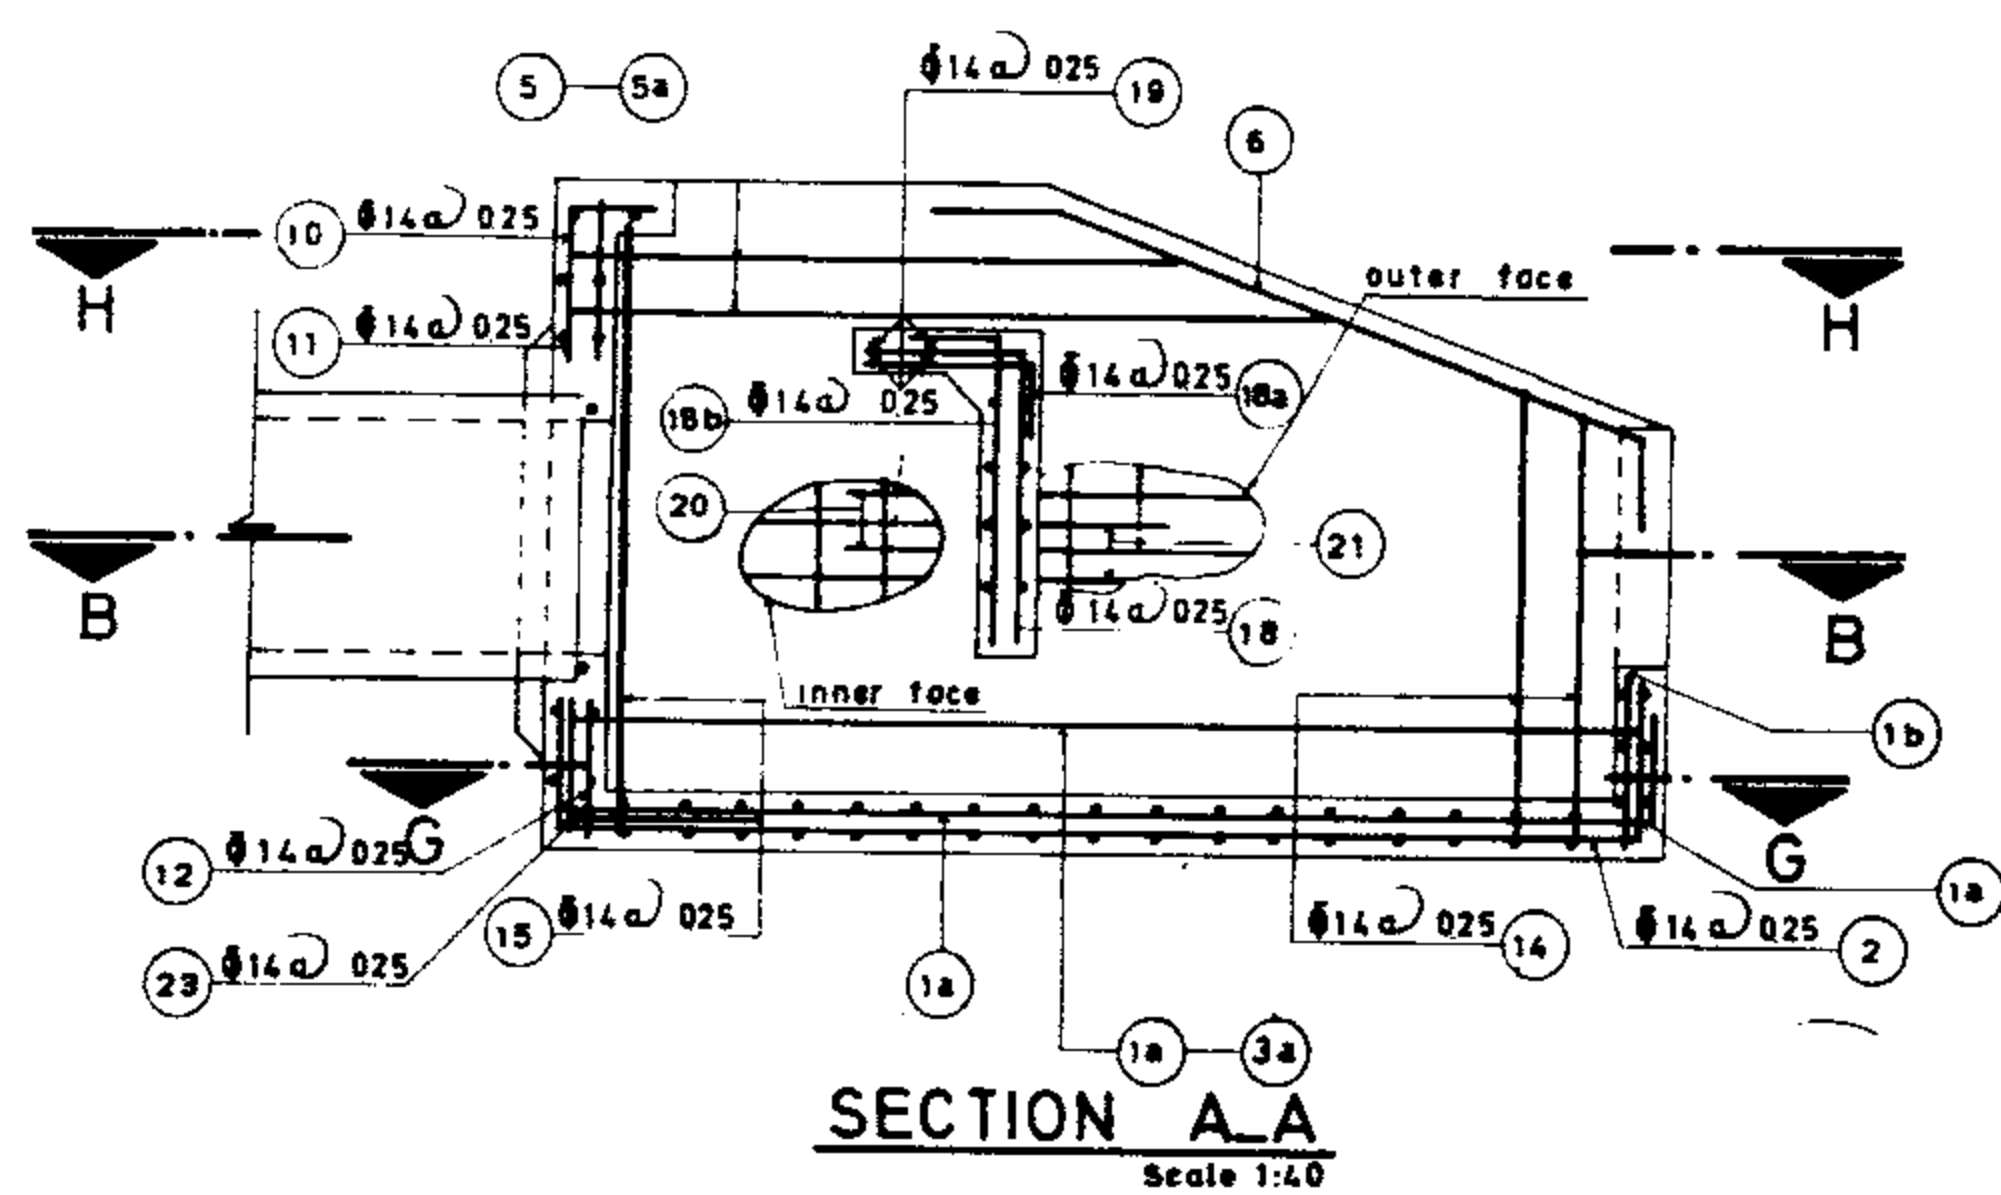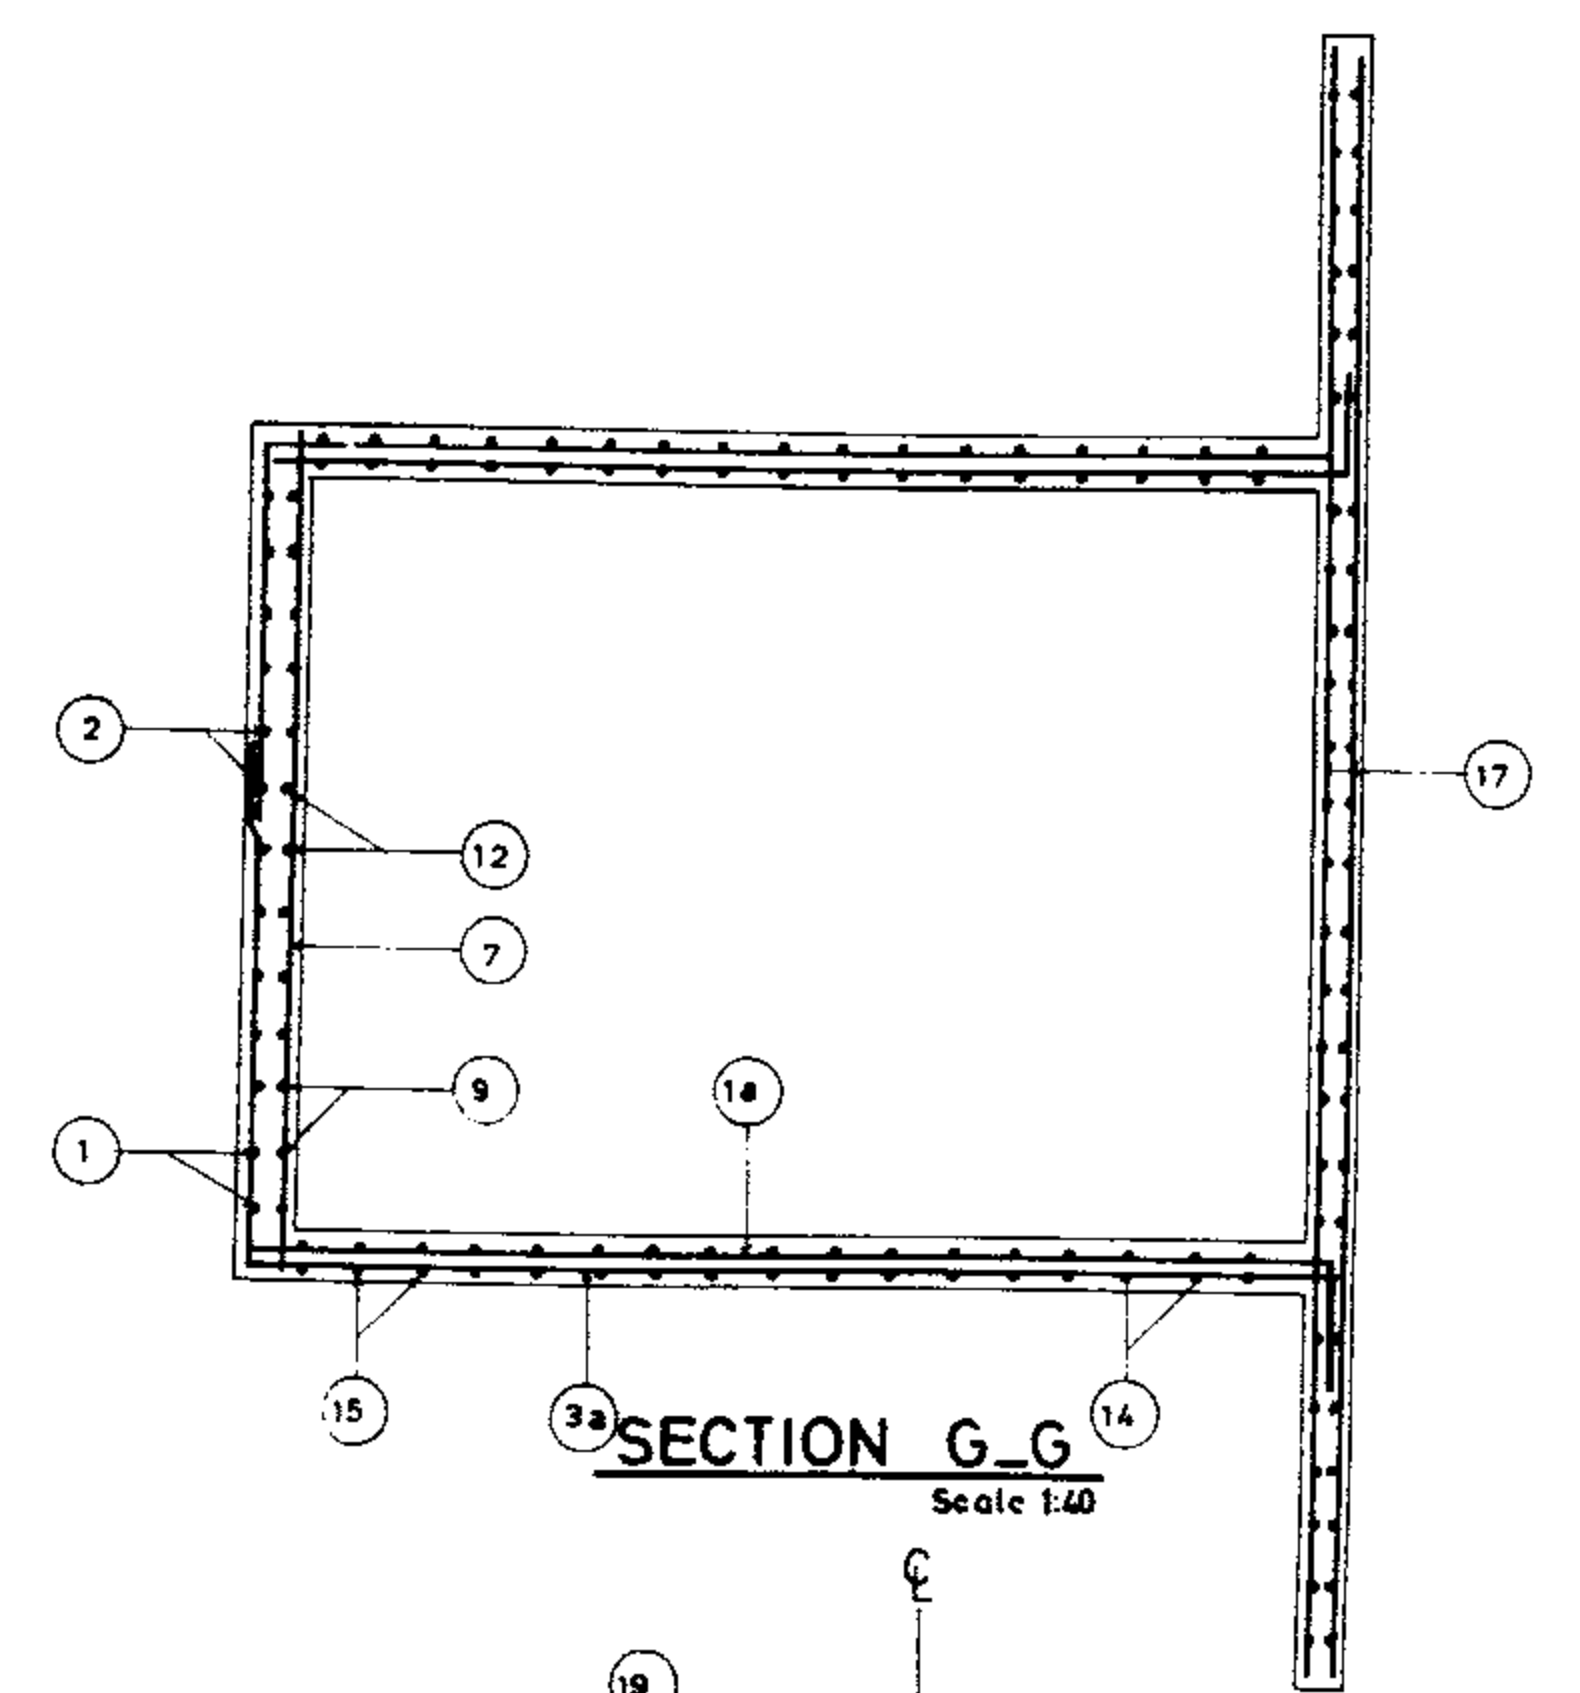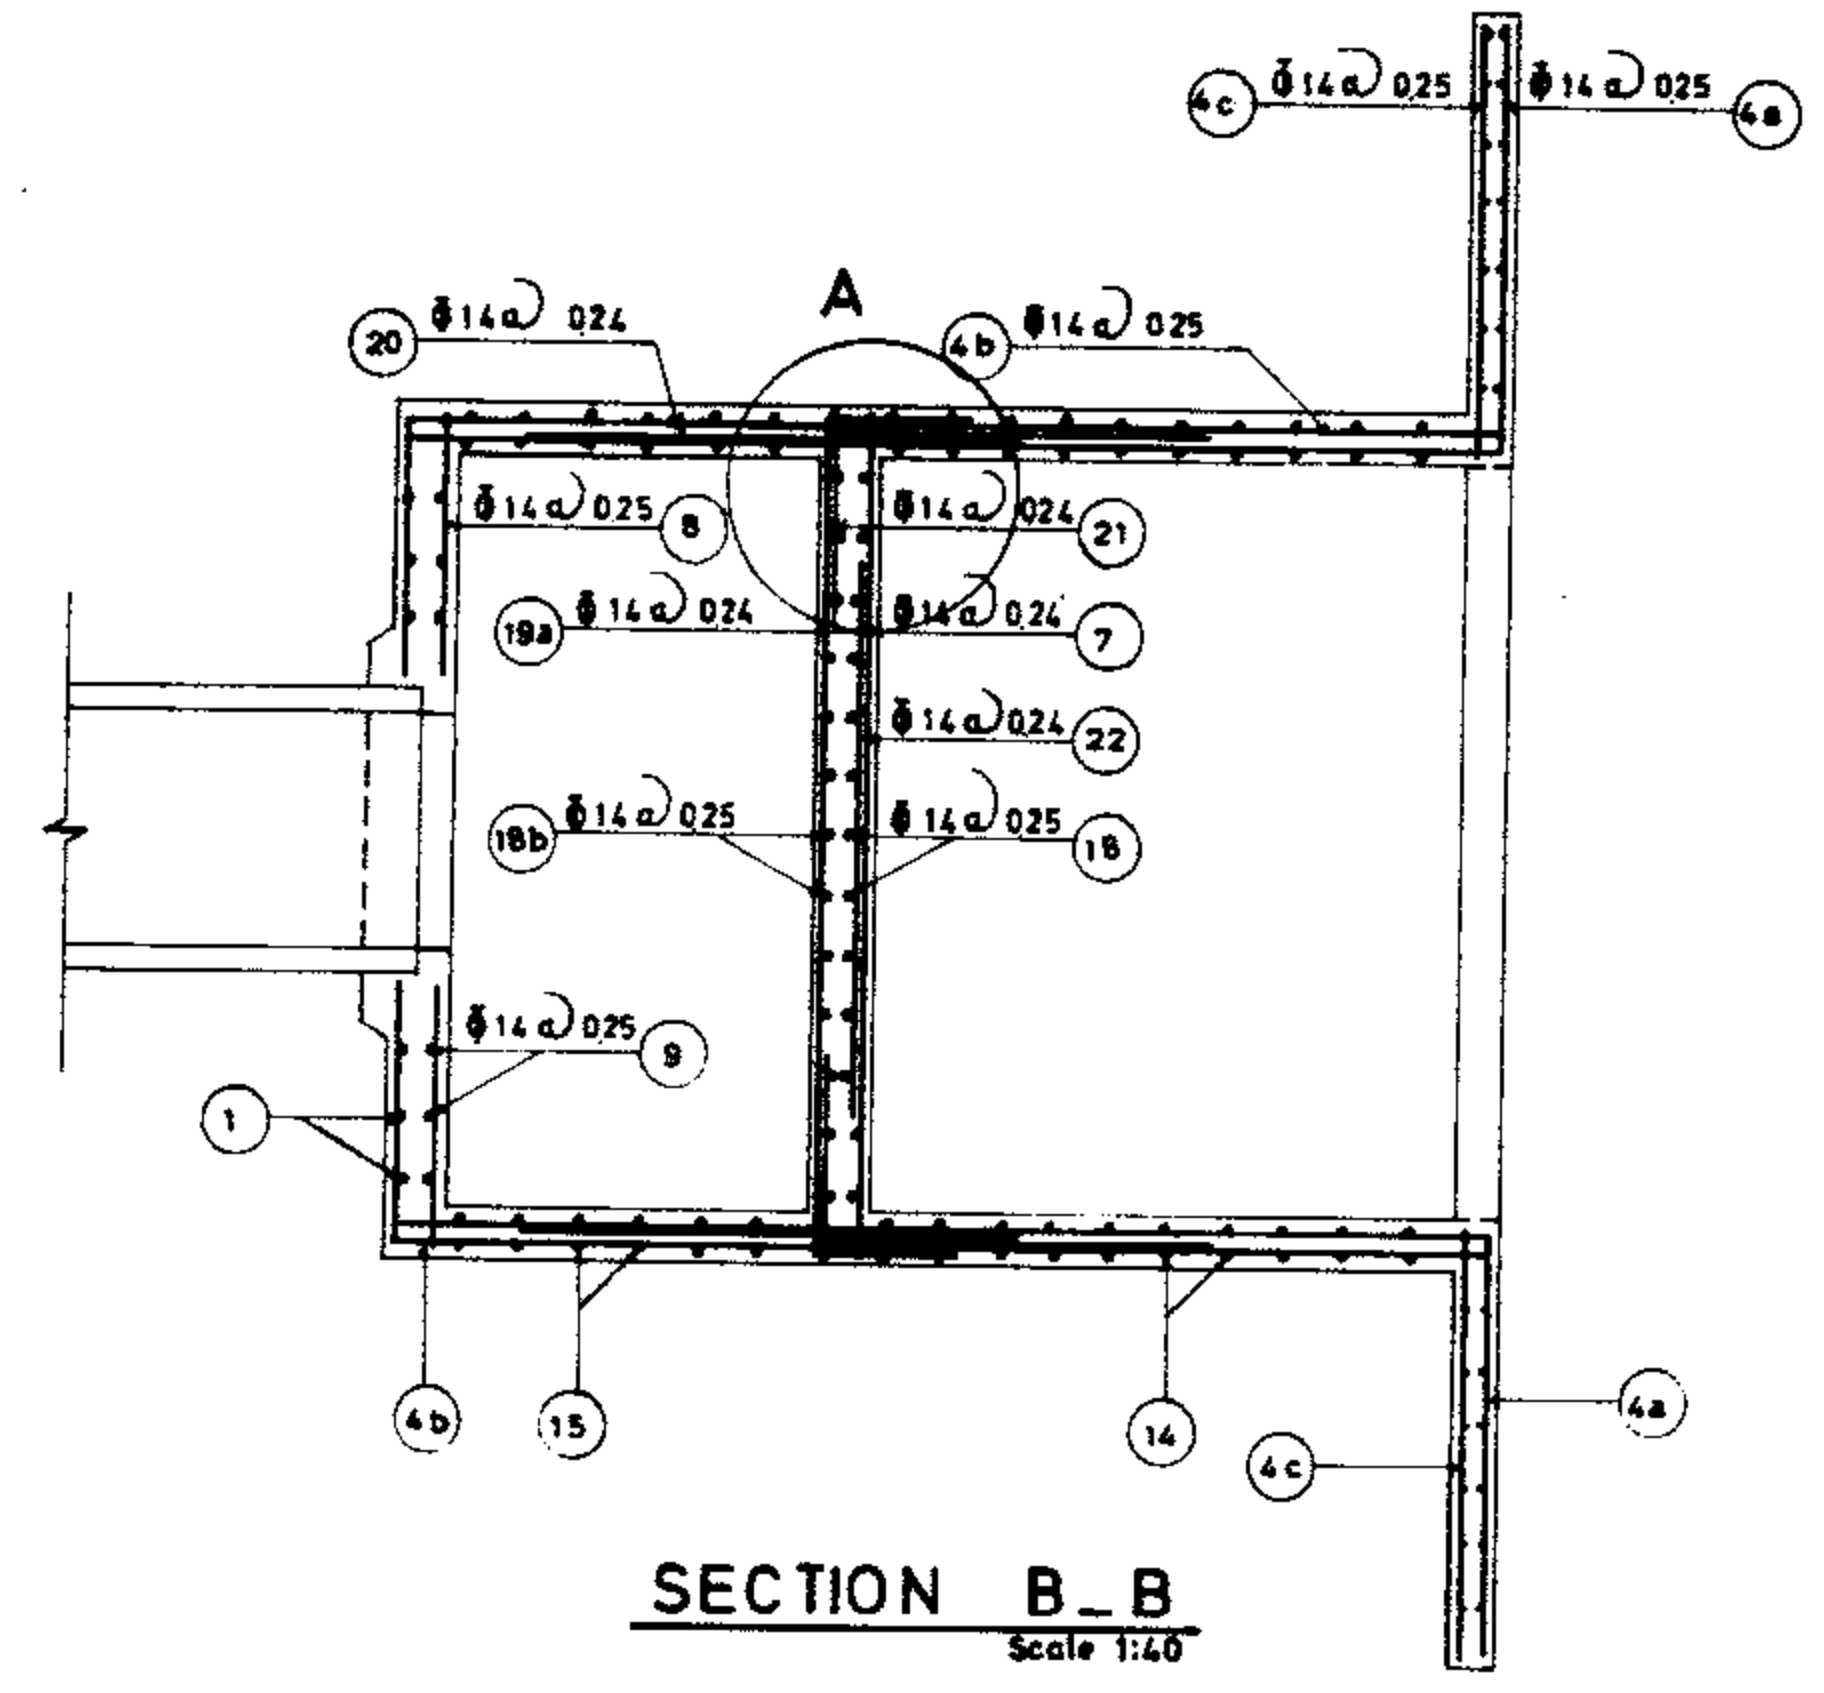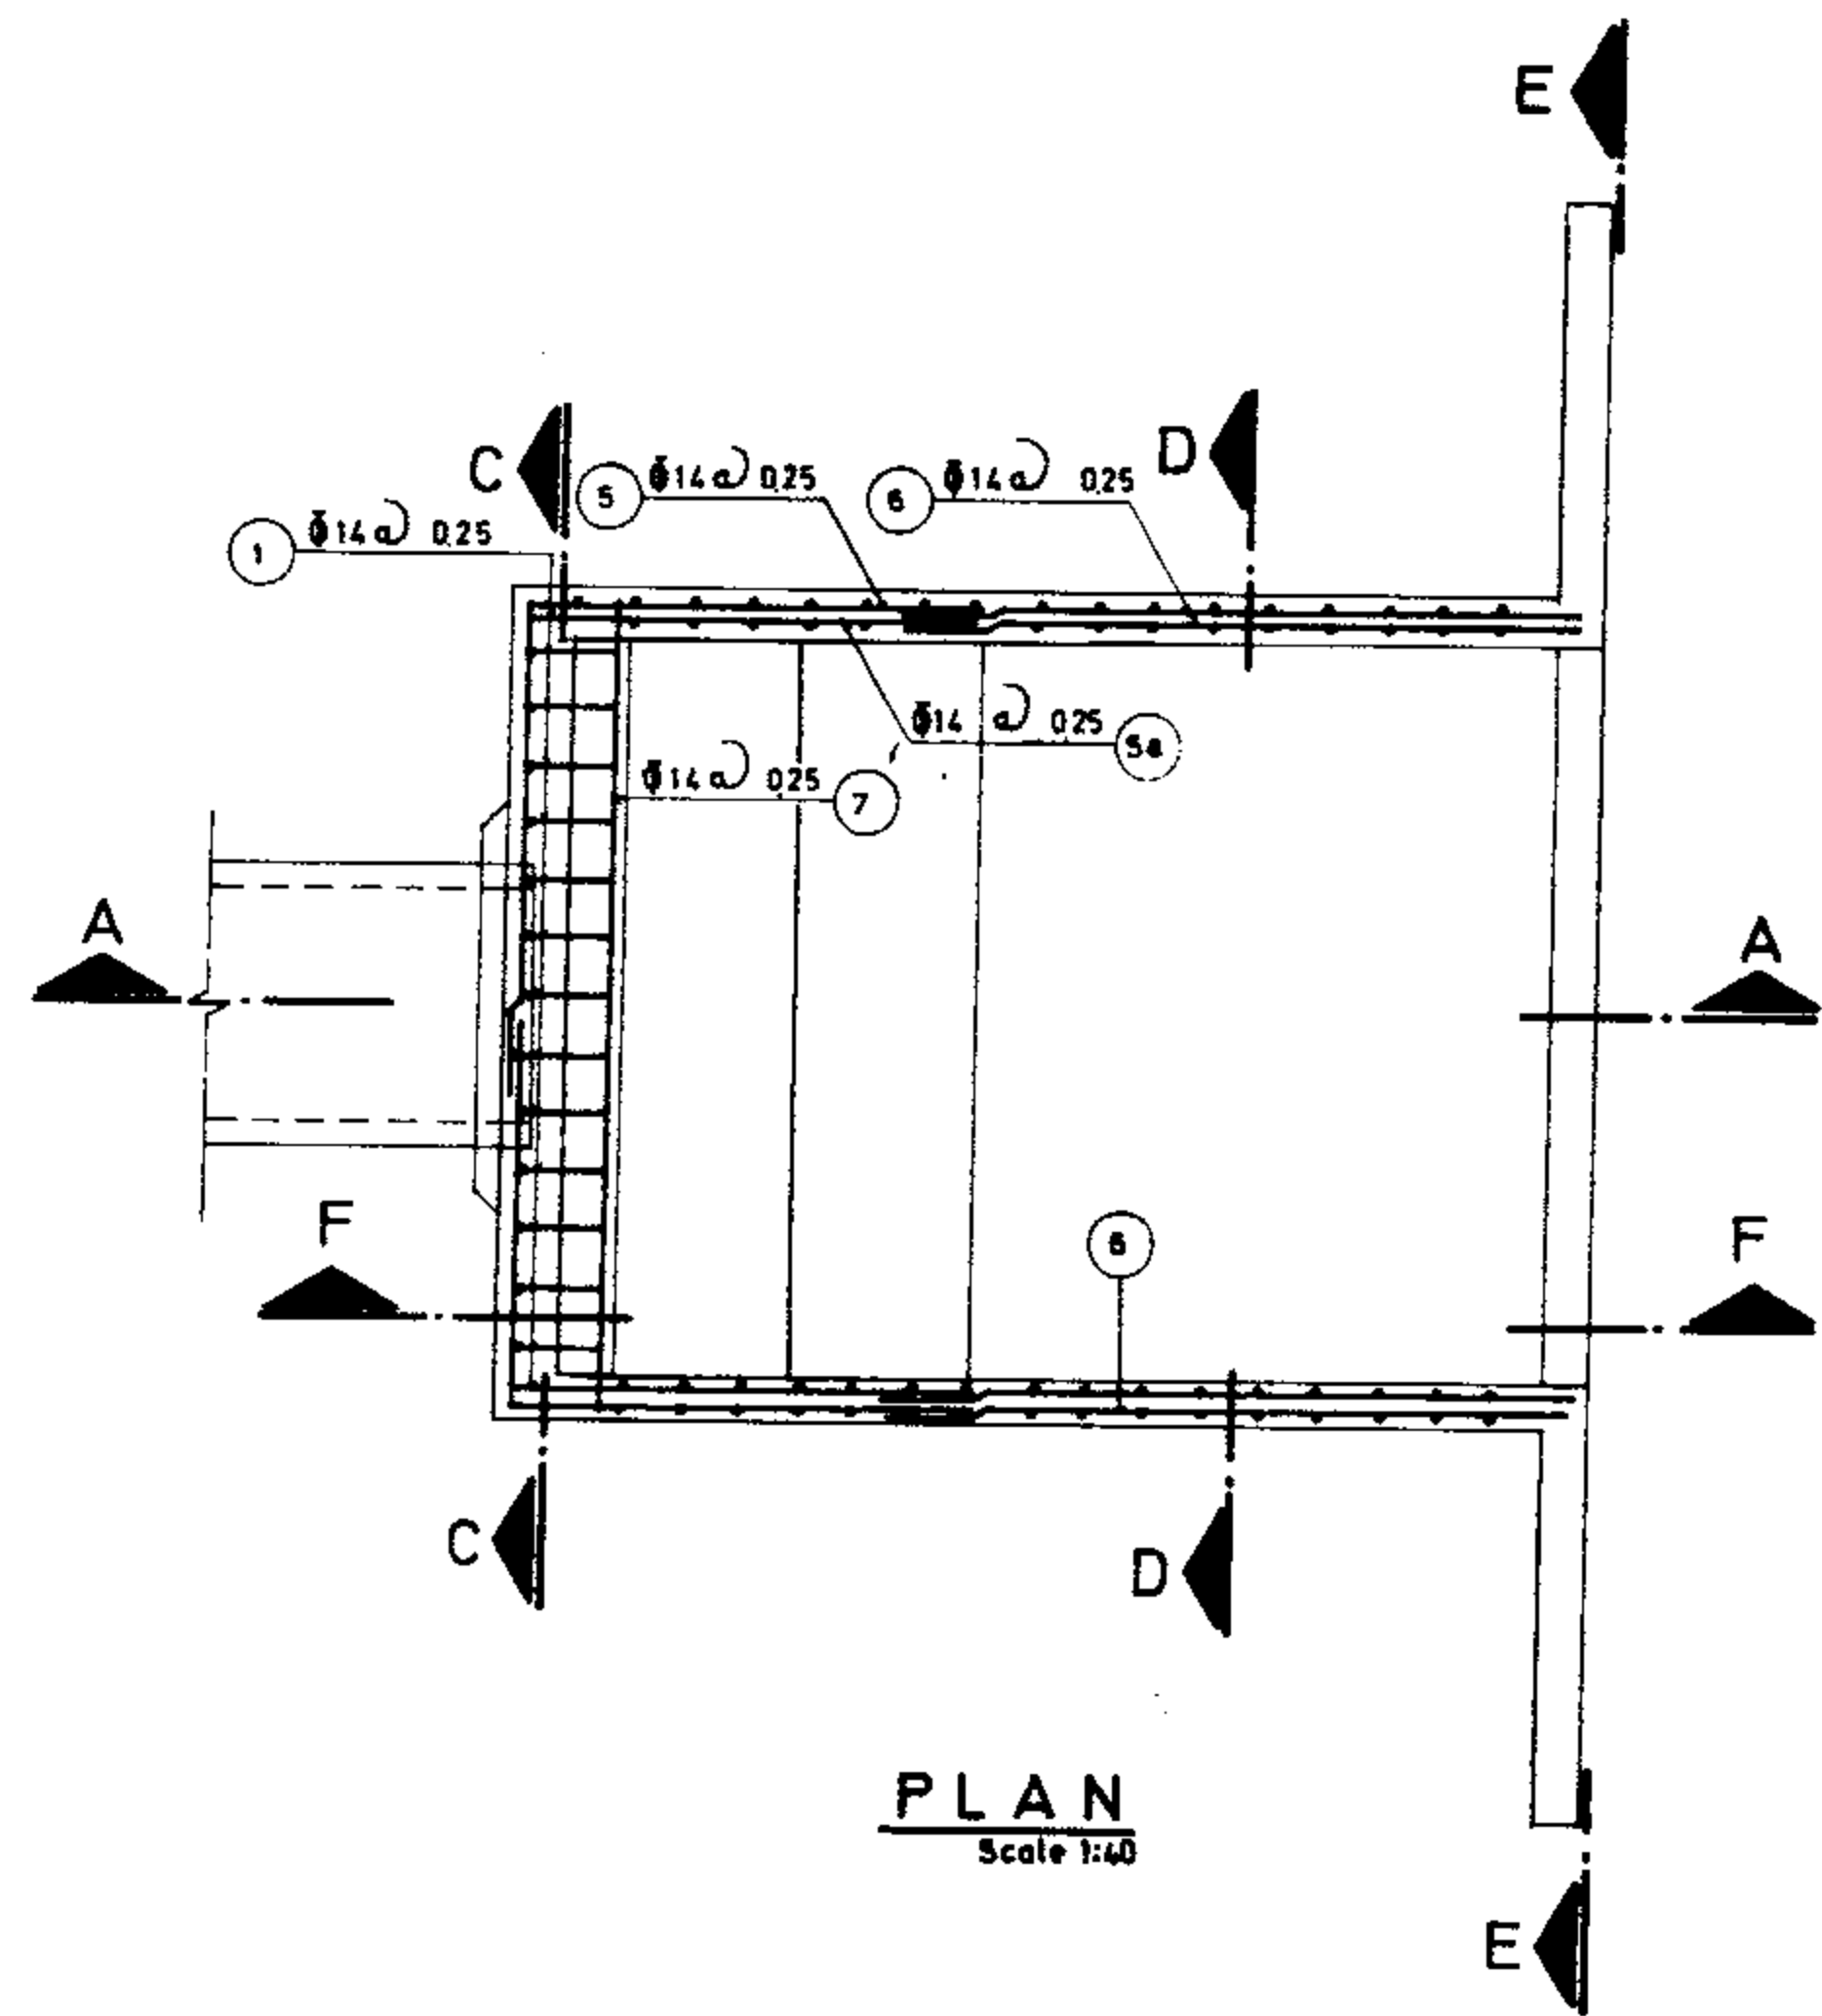

REFERENCE DWGS For dimension lines see dwg. 16/1/2/01
 For list of reinforcement see dwg. 16/1/3/10
 For plan & sections see dwg. 16/1/1/01

Scale: 1:40	IRRIGATION & DRAINAGE STANDARDS	
Date:		
Approved:	Sheet No. 8 of 12	Rev. No.
		BAFFLED OUTLET REINFORCEMENT PLAN & SECTIONS GROUP 6

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

ALL BARS ARE $\Phi 14 (1.21 \text{ kg/m})$

STR. 100					
Pos	No.	FORM	UNIT LENG.	TOTAL LENG.	
1	6	92 ³⁵ 1.58 .19	3.04	18.24	
1a					
1b					
2	2	23 ²⁴ 1.58 .19	2.11	4.22	
3					
3a					
4	4	25 ⁵⁸ 1.58 .73	2.73	10.92	
4a					
4b					
4c					
5	2	78 ⁴⁰ 80~158 80~158	3.94	7.88	
5a					
6	2	40 ⁹⁰ .30	1.60	3.20	
7	3	1.20	1.20	3.60	
8	4	27~60	0.44	1.76	
9	6	96	0.96	5.76	
10	2	.35 ^{12~46}	0.64	1.28	
11	2	12~46	0.29	0.58	
12	2	13~44	0.29	0.58	
13	3	40 \bigcirc 2.50	2.50	7.50	
14	3	54 ⁹⁴ 78 .40 78 ⁵⁴ 94	3.04	9.12	
14a					
14b					
15	4	94 ⁷⁸ 40 78 ⁹⁴	3.44	13.76	
16	8	54	0.54	4.32	
17	2	2.60	2.60	5.20	
18	5	43 ²⁴	0.67	3.35	
18a					
18b					
19	5	30 ^{1.20} 30	1.80	9.00	
19a					
20					
21					
22					
23					
			110.27		
			110.27	$\times 1.21$	= 133.43 Kg.

STR. 120					
Pos	No.	FORM	UNIT LENG.	TOTAL LENG.	
1	6	1.07 ³⁵ 1.83 .24	3.49	20.94	
1a					
1b					
2	2	18 ²⁹ 1.83 .24	2.41	4.82	
3					
3a					
4	4	35 ⁶⁸ 1.83 .88	3.23	12.92	
4a					
4b					
4c					
5	3	88 ⁴⁰ 90~1.83 90~1.83	4.49	13.47	
5a					
6	2	40 ^{1.05} .30	1.75	3.50	
7	3	1.60	1.60	4.80	
8	4	37~70	0.54	2.16	
9	6	1.11	1.11	6.66	
10	2	.35 ^{22~56}	0.74	1.48	
11	2	22~56	0.39	0.78	
12	2	18~49	0.34	0.68	
13	3	40 \bigcirc 2.50	2.50	7.50	
14	4	54 ¹⁰⁹ 88 .40 88 ⁵⁴ 109	3.49	13.96	
14a					
14b					
15	4	1.09 ⁸⁸ 40 88 ^{1.09}	3.94	15.76	
16	10	0.64	0.64	6.40	
17	2	3.10	3.10	6.20	
18	6	48 ^{.29}	0.77	4.62	
18a					
18b					
19	5	.30 ^{1.40} 30	2.00	10.00	
19a					
20					
21					
22					
23					
			136.65		
			136.65	$\times 1.21$	= 165.35 Kg.

STR. 140					
Pos	No.	FORM	UNIT LENG.	TOTAL LENG.	
1	8	1.22 ³⁵ 2.13 .29	3.99	31.92	
1a					
1b					
2	2	23 ⁵⁴ 2.13 .29	2.81	5.62	
3					
3a					
4	4	45 ⁷⁶ 2.13 1.03	3.78	15.12	
4a					
4b					
4c					
5	3	98 ⁴⁰ 1.15~2.13 1.15~2.13	5.24	15.72	
5a					
6	2	40 ^{1.12} .30	1.82	3.64	
7	4	1.60	1.60	6.40	
8	4	47~80	0.64	2.56	
9	8	1.26	1.26	10.08	
10	2	.35 ^{32~66}	0.84	1.68	
11	2	32~66	0.49	0.98	
12	2	23~54	0.39	0.78	
13	3	40 \bigcirc 2.50	2.50	7.50	
14	4	74 ¹²⁴ 88 .40 88 ⁷⁴ 124	3.94	15.76	
14a					
14b					
15	5	1.24 ⁹⁸ 40 98 ^{1.24}	4.44	22.20	
16	10	.74	0.74	7.40	
17	2	3.60	3.60	7.20	
18	7	58 ^{.34}	0.92	6.44	
18a					
18b					
19	6	.30 ^{1.60} 30	2.20	13.20	
19a					
20					
21					
22					
23					
			174.20		
			174.20	$\times 1.21$	= 210.78 Kg.

STR. 160					
Pos	No.	FORM	UNIT LENG.	TOTAL LENG.	
1	8	1.37 ³⁵ 2.38 .29	4.39	35.12	
1a					
1b					
2	2	23 ⁵⁴ 2.38 .29	3.06	6.12	
3					
3a					
4	4	55 ⁸⁸ 2.38 1.03	4.13	16.52	
4a					
4b					
4c					
5	4	1.08 ⁴⁰ 1.15~2.38 1.15~2.38	5.69	22.76	
5a					
6	2	40 ^{1.37} .30	2.07	4.14	
7	5	1.80	1.80	9.00	
8	4	50~90	0.70	2.80	
9	8	1.41	1.41	11.28	
10	2	.35 ^{47~81}	0.99	1.98	
11	2	47~81	0.64	1.28	
12	2	23~54	0.39	0.78	
13	3	40 \bigcirc 2.50	2.50	7.50	
14	5	84 ¹³⁹ 1.08 .40 1.08 ⁸⁴ 139	4.39	21.95	
14a					
14b					
15	5	1.39 ^{1.08} 40 1.08 ^{1.39}	4.94	24.70	
16	10	.84	0.84	8.40	
17	2	3.80	3.80	7.60	
18	8	63 ^{.34}	0.97	7.76	
18a					
18b					
19	6	.30 ^{1.80} 30	2.40	14.40	
19a					
20					
21					
22					
23					
			203.73		
			203.73	$\times 1.21$	= 246.51 Kg.

REFERENCE DWGS: For reinforcement see dwg. NO. 16/1/3/01
For bars with variable unit length see note under the same title at dwg NO.20/2/1/01

Scale	IRRIGATION & DRAINAGE STANDARDS		ISLAMIC REPUBLIC OF IRAN MINISTRY OF PLAN & E TECHNICAL RESEARCH A STANDARD BUREAU
Date:	DWG NO	16/1/3/07	
Approved	Sheet NO	9 of 12	
	Rev. NO		BAFFLED OUTLET LIST OF REINFORCEMENT STR 100 TO 160

STR. 180					
Pos	Nº	FORM	UNIT LENG	TOTAL LENG	
1	8	1.52 $\overline{.35}$ 2.63 .34	4.84	38.72	
1a					
1b					
2	2	.28 $\overline{.61}$ 2.63 .34	3.42	6.84	
3	1	1.18 $\overline{.40}$ 2.63 .30	8.22	8.22	
3a					
4	4	.82 $\overline{.98}$ 2.63 1.28	4.71	18.84	
4a					
4b					
4c					
*5	4	1.18 $\overline{.40}$ 1.35~2.63 1.35~2.63	6.34	25.36	
5a					
6	2	.40 $\overline{1.43}$.30	2.13	4.26	
7	5	2.0	2.00	10.00	
8	4	64~1.00	0.82	3.28	
9	8	1.56	1.56	12.48	
10	2	.35 $\overline{.52}$.88	1.05	2.10	
11	2	.52 ~.88	0.70	1.40	
12	2	.28 ~.61	0.45	0.90	
13	3	.40 \bigcirc 2.66	2.66	7.98	
14	5	.82 $\overline{1.54}$ 1.18 .40 1.18 $\overline{1.54}$	4.84	24.20	
14a					
14b					
15	6	1.54 $\overline{1.18}$.40 1.18 $\overline{1.54}$	5.44	32.64	
16	12	.89	0.89	10.68	
17	2	4.50	4.50	9.00	
18	9	.73 $\overline{.39}$	1.12	10.08	
18a					
18b					
19	7	.30 $\overline{2.00}$.30	2.60	18.20	
19a					
20					
21					
22					
23					
				245.18	
				245.18	$\times 1.21 = 296.67 \text{ Kg}$

STR. 200					
Pos	Nº	FORM	UNIT LENG	TOTAL LENG	
1	10	1.87 $\overline{.35}$ 2.93 .39	5.34	53.40	
1a					
1b					
2	2	.31 $\overline{.73}$ 2.93 .39	3.84	7.68	
3	1	1.28 $\overline{.40}$ 2.93 .30	9.02	9.02	
3a					
4	4	.65 $\overline{1.08}$ 2.93 1.28	5.08	20.32	
4a					
4b					
4c					
5	4	1.28 $\overline{.40}$ 1.45~1.93 1.45~1.93	5.94	23.76	
5a					
6	2	.40 $\overline{1.63}$.30	2.33	4.66	
7	5	2.20	2.20	11.00	
8	6	.87~1.10	0.89	5.34	
9	10	1.71	1.71	17.10	
10	2	.35 $\overline{.50}$.93	1.07	2.14	
11	2	.50 ~.93	0.72	1.44	
12	2	.31 ~.73	0.52	1.04	
13	3	.40 \bigcirc 3.10	3.10	9.30	
14	6	1.04 $\overline{1.69}$ 1.28 .40 1.28 $\overline{1.69}$	5.29	31.74	
14a					
14b					
15	7	1.69 $\overline{1.28}$.40 1.28 $\overline{1.69}$	5.94	41.58	
16	12	1.04	1.04	12.48	
17	3	4.70	4.70	14.10	
18	9	.78 $\overline{.44}$	1.22	10.98	
18a					
18b					
19	7	.30 $\overline{2.20}$.30	2.80	19.60	
19a					
20					
21					
22					
23					
				296.68	
				296.68	$\times 1.21 = 358.98 \text{ Kg}$

STR. 220					
Pos	Nº	FORM	UNIT LENG	TOTAL LENG	
1	10	1.82 $\overline{.35}$ 3.18 .39	5.74	57.40	
1a					
1b					
2	3	.31 $\overline{.78}$ 3.18 .39	4.12	12.36	
3	1	1.38 $\overline{.40}$ 3.18 .30	9.72	9.72	
3a					
4	6	.70 $\overline{1.18}$ 3.18 1.43	5.55	33.30	
4a					
4b					
4c					
5	4	1.38 $\overline{.40}$ 1.55~3.18 1.55~3.18	7.49	29.96	
5a					
6	2	.40 $\overline{1.79}$.30	2.49	4.98	
7	5	2.40	2.40	12.00	
8	6	.72~1.20	0.96	5.76	
9	10	1.86	1.86	18.60	
10	3	.35 $\overline{.55}$ 1.03	1.14	3.42	
11	3	.55 ~1.03	0.79	2.37	
12	3	.31 ~.78	0.55	1.65	
13	3	.40 \bigcirc 3.41	3.41	10.23	
14	7	1.14 $\overline{1.84}$ 1.38 .40 1.38 $\overline{1.84}$	5.74	40.18	
14a					
14b					
15	7	1.84 $\overline{1.38}$.40 1.38 $\overline{1.84}$	5.44	38.08	
16	14	1.14	1.14	15.96	
17	3	5.20	5.20	15.60	
18	10	.90 $\overline{.40}$	1.30	13.00	
18a					
18b					
19	8	.30 $\overline{2.40}$.30	3.10	24.80	
19a					
20					
21					
22					
23					
				349.37	
				349.37	$\times 1.21 = 422.74 \text{ Kg}$

STR. 240					
Pos	Nº	FORM	UNIT LENG	TOTAL LENG	
1	10	1.97 $\overline{.35}$ 3.43 .44	6.19	61.90	
1a					
1b					
2	3	.36 $\overline{.83}$ 3.43 .44	4.47	13.41	
3	1	1.48 $\overline{.40}$ 3.43 .30	10.44	10.44	
3a					
4	6	.87 $\overline{1.29}$ 3.48 1.44	5.97	35.82	
4a					
4b					
4c					
5	4	1.48 $\overline{.40}$ 1.55~3.43 1.55~3.43	7.96	31.84	
5a					
6	2	.40 $\overline{2.09}$.30	2.79	5.58	
7	12	2.66	2.66	319.2	
8	6	.85~1.33	1.09	6.54	
9	10	2.01	2.01	20.10	
10	3	.35 $\overline{.65}$ 1.13	1.24	3.72	
11	3	.65 ~1.13	0.89	2.67	
12	3	.36 ~.83	0.60	1.80	
13	3	.40 \bigcirc 3.41	3.41	10.23	
14	8	1.24 $\overline{1.99}$ 1.49 .40 1.49 $\overline{1.99}$	6.21	49.68	
14a					
14b					
15	7	1.99 $\overline{1.49}$.40 1.49 $\overline{1.99}$	6.96	48.72	
16	14	1.24	1.24	17.36	
17	3	5.46	5.46	16.38	
18	11	1.00 $\overline{.50}$	1.50	16.50	
18a	11	.50 $\overline{.30}$	0.80	8.80	
18b	11	1.00 $\overline{.30}$	1.30	14.30	
19	6	.30 $\overline{2.66}$.30	3.26	19.56	
19a	6	.40 $\overline{2.66}$.40	3.46	20.76	
20					
21					
22					
23					
				448.03	
				448.03	$\times 1.21 = 542.12 \text{ Kg}$

REFERENCE DWGS:
 For reinforcement see dwgs. Nº 16/1/3/01 & 16/V3/02
 For bars with variable unit length see note under the same title at dwg. Nº 20/2/1/01

Scale: IRRIGATION & DRAINAGE STANDARDS
 Date: DWG. Nº. 16/1/3/08
 Approved: Sheet Nº. 10 of 12 Rev. Nº.
 BAFFLED OUTLET
 LIST OF REINFORCEMENT
 STR. 180 TO 240

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND STANDARD BUREAU

ALL BARS ARE $\Phi 14(1.21 \text{ kg/m})$

STR. 260					
Pos.	Nº	FORM	UNIT LENG.	TOTAL LENG.	
1	10	2.19 ^{.35} 3.80 .57	6.91	69.10	
1a	16	3.80 .30	4.10	65.60	
1b	12	.57	0.57	6.84	
2	3	^{.67} _{.95} 3.80 .57	5.18	15.54	
3	—		—	—	
3a	2	1.65 ^{.40} 3.80 _{3.80}	10.90	21.80	
4	—		—	—	
4a	6	3.80 1.60	5.40	32.40	
4b	6	^{.90} _{1.45} 3.80	4.98	29.88	
4c	10	1.60	1.60	16.00	
5	4	1.65 ^{.40} 1.80~3.80 _{1.80~3.80}	8.90	35.60	
5a	8	1.80~3.80	5.60	44.80	
6	4	^{.40} 2.15 1.30	2.85	11.40	
7	27	2.90	2.90	78.30	
8	6	.90~1.45	1.18	7.08	
9	22	2.20	2.20	48.40	
10	3	^{.35} 63~1.18	1.26	3.78	
11	3	63~1.18	0.91	2.73	
12	3	47~.95	0.71	2.13	
13	3	.40 \bigcirc 3.85	3.85	11.55	
14	8	^{1.42} _{2.22} 1.65 .40 1.65 ^{1.42} _{2.22}	6.94	55.52	
14a	16	1.42~2.22	1.82	29.12	
14b	—		—	—	
15	8	2.22 ^{1.65} .40 _{1.65} 2.22	7.74	61.92	
16	28	1.42	1.42	39.76	
17	6	5.90	5.90	35.40	
18	12	1.10 .55	1.65	19.80	
18a	12	.55 .30	0.85	10.20	
18b	12	1.10 .30	1.40	16.80	
19	8	.30 2.90 .30	3.50	28.00	
19a	6	.70 2.90 .70	4.30	25.80	
20	—		—	—	
21	—		—	—	
22	—		—	—	
23	—		—	—	
				825.25	
825.25 x 1.21 =				998.55 Kg.	

STR. 280					
Pos.	Nº	FORM	UNIT LENG.	TOTAL LENG.	
1	12	2.34 ^{.35} 4.05 .57	7.31	87.72	
1a	17	4.05 .30	4.35	73.95	
1b	13	.57	0.57	7.41	
2	4	^{.87} _{1.00} 4.05 .57	5.46	21.84	
3	—		—	—	
3a	2	1.75 ^{.40} 4.05 _{4.05}	11.60	23.20	
4	—		—	—	
4a	6	4.05 1.60	5.65	33.90	
4b	8	^{.95} _{1.55} 4.05	5.30	42.40	
4c	10	1.60	1.60	16.00	
5	5	1.75 ^{.40} 1.80~4.05 _{1.80~4.05}	9.35	46.75	
5a	10	1.80	1.80	18.00	
6	4	^{.40} 2.41 1.30	3.11	12.44	
7	29	3.10	3.10	89.90	
8	8	.95~1.55	1.25	10.00	
9	24	2.35	2.35	56.40	
10	4	^{.35} 68~1.28	1.33	5.32	
11	4	68~1.28	0.98	3.92	
12	4	47~1.00	0.74	2.96	
13	3	.40 \bigcirc 4.17	4.17	12.51	
14	9	^{1.52} _{2.37} 1.75 .40 1.75 ^{1.52} _{2.37}	7.39	66.51	
14a	18	1.52~2.37	1.95	35.10	
14b	—		—	—	
15	8	2.37 ^{1.75} .40 _{1.75} 2.37	8.24	65.92	
16	28	1.52	1.52	42.56	
17	6	6.10	6.10	36.60	
18	13	1.15 .55	1.70	22.10	
18a	13	.55 .30	0.85	11.05	
18b	13	1.15 .30	1.45	18.85	
19	8	.30 3.10 .30	3.70	29.60	
19a	6	.70 3.10 .70	4.50	27.00	
20	—		—	—	
21	—		—	—	
22	—		—	—	
23	—		—	—	
				919.91	
919.91 x 1.21 =				1113.09 Kg.	

STR. 300					
Pos.	Nº	FORM	UNIT LENG.	TOTAL LENG.	
1	12	2.49 ^{.35} 4.30 .62	7.76	93.12	
1a	18	4.30 .30	4.60	82.80	
1b	13	.62	0.62	8.06	
2	4	^{.72} _{1.10} 4.30 .62	5.83	23.32	
3	—		—	—	
3a	2	1.85 ^{.40} 4.30 _{4.30}	12.30	24.60	
4	—		—	—	
4a	6	4.30 1.80	6.10	36.60	
4b	8	^{1.00} _{1.65} 4.30	5.63	45.04	
4c	10	1.80	1.80	18.00	
5	5	1.85 ^{.40} 1.95~4.30 _{1.95~4.30}	9.95	49.75	
5a	10	1.95~4.30	3.13	31.30	
6	4	^{.40} 2.52 1.30	3.22	12.88	
7	31	3.30	3.30	102.30	
8	8	1.00~1.65	1.33	10.64	
9	26	2.50	2.50	65.00	
10	4	^{.35} 68~1.33	1.36	5.44	
11	4	68~1.33	1.01	4.04	
12	4	52~1.10	0.81	3.24	
13	3	.40 \bigcirc 4.48	4.48	13.44	
14	9	^{1.62} _{1.52} 1.85 .40 1.85 ^{1.62} _{1.52}	6.84	61.56	
14a	18	1.62~2.52	2.07	37.26	
14b	34	.75 .75	1.50	51.00	
15	9	2.52 ^{1.85} .40 _{1.85} 2.52	8.74	78.66	
16	32	1.62	1.62	51.84	
17	6	6.70	6.70	40.20	
18	13	1.25 .65	1.90	24.70	
18a	13	.65 .30	0.95	12.35	
18b	13	1.25 .30	1.55	20.15	
19	8	.30 3.30 .30	3.90	31.20	
19a	7	.90 3.30 .90	5.10	35.70	
20	—		—	—	
21	—		—	—	
22	—		—	—	
23	13	.75 .75	1.50	19.50	
				1093.69	
1093.69 x 1.21 =				1323.36 Kg.	

STR. 320					
Pos.	Nº	FORM	UNIT LENG.	TOTAL LENG.	
1	12	2.87 ^{.45} 4.65 .70	8.47	101.64	
1a	19	4.65 .30	4.95	94.05	
1b	15	.70	0.70	10.50	
2	5	^{.87} _{1.27} 4.65 .70	6.42	32.10	
3	—		—	—	
3a	2	2.00 ^{.40} 4.65 _{4.65}	13.30	26.60	
4	—		—	—	
4a	8	4.65 1.85	6.50	52.00	
4b	10	^{1.03} _{1.80} 4.65	6.07	60.70	
4c	12	1.85	1.85	22.20	
5	4	2.00 ^{.40} 2.10~4.65 _{2.10~4.65}	10.75	43.00	
5a	8	2.10~4.65	3.38	27.04	
6	4	^{.40} 2.72 1.30	3.42	13.68	
7	33	3.60	3.60	118.80	
8	10	1.23~1.80	1.52	15.20	
9	26	2.68	2.68	69.68	
10	5	^{.45} 56~1.33	1.40	7.00	
11	5	56~1.33	0.95	4.75	
12	5	58~1.27	0.93	4.65	
13	3	.40 \bigcirc 5.24	5.24	15.72	
14	10	^{1.75} _{2.70} 2.00 .40 2.00 ^{1.75} _{2.70}	8.45	84.50	
14a	20	1.75~2.70	2.23	44.60	
14b	36	.90 .90	1.80	64.80	
15	9	2.70 ^{2.00} .40 _{2.00} 2.70	9.40	84.60	
16	32	1.75	1.75	56.00	
17	8	7.00	7.00	56.00	
18	14	1.30 .70	2.00	28.00	
18a	14	.70 .30	1.00	14.00	
18b	14	1.30 .30	1.60	22.40	
19	8	.30 3.60 .30	4.20	33.60	
19a	8	1.00 3.60 1.00	5.60	44.80	
20	—		—	—	
21	—		—	—	
22	—		—	—	
23	14	.75 .75	1.50	21.00	
				1273.61	
1273.61 x 1.21 =				1541.07 Kg.	

REFERENCE DWGS: For reinforcement see dwgs. Nº 16/1/3/03 TO 16/1/3/05
For bars with variable unit length see note under the same title at dwg. Nº 20/2/1/01

Scale:	IRRIGATION & DRAINAGE STANDARDS		ISLAMIC REPUBLIC OF IRAQ MINISTRY OF PLAN & CONSTRUCTION TECHNICAL RESEARCH AND STANDARD BUREAU
Date:	DWG Nº 16/1/3/09	BAFFLED OUTLET	
Approved:	Sheet Nº 11 of 12	Rev. Nº	

LIST OF REINFORCEMENT
STR. 260 TO 320

ALL BARS ARE $\Phi 14$ (1.21 kg/m)

STR. 340				
Pos.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	12	2.82 $\overline{.45 \quad 4.90}$.70	8.87	106.44
1a	20	$\overline{4.80}$	5.20	104.00
1b	15	$\overline{.70}$	0.70	10.50
2	5	$\overline{.97 \quad 4.90}$.70	6.67	33.35
3	—	—	—	—
3a	2	2.10 $\overline{1.40 \quad 4.90 \quad 4.80}$	14.00	28.00
4	—	—	—	—
4a	8	$\overline{4.90}$ 2D5	6.95	55.60
4b	10	$\overline{.13 \quad 4.80}$ 1.90	6.42	64.20
4c	12	$\overline{2.05}$	2.05	24.60
5	5	2.10 $\overline{1.40 \quad 2.25 \sim 4.90}$ 2.25 \sim 4.90	11.35	56.75
5a	10	$\overline{2.25 \sim 4.90}$	3.58	35.80
6	4	$\overline{.40}$ 2.83 \sim .30	3.53	14.12
7	35	$\overline{3.80}$	3.80	13.30
8	10	$\overline{.13 \sim 1.90}$	1.52	15.20
9	28	$\overline{2.83}$	2.83	79.24
10	5	$\overline{.45}$.71 \sim 1.48	1.55	7.75
11	5	$\overline{.71 \sim 1.48}$	1.10	5.50
12	5	$\overline{.58 \sim 1.27}$	0.93	4.65
13	3	$\overline{.40}$ \bigcirc 5.24	5.24	15.72
14	10	$\overline{1.85 \quad 2.10 \quad .40 \quad 2.10 \quad 1.85}$ 2.85	8.90	89.00
14a	20	$\overline{1.85 \sim 2.85}$	2.35	47.00
14b	38	$\overline{.90 \quad .90}$	1.80	68.40
15	10	2.85 $\overline{2.10 \quad .40 \quad 2.10}$ 2.85	9.90	99.00
16	36	$\overline{1.85}$	1.85	66.60
17	8	$\overline{7.60}$	7.60	60.80
18	15	$\overline{1.40}$.70	2.10	31.50
18a	15	$\overline{.70}$.30	1.00	15.00
18b	15	$\overline{1.40}$.30	1.70	25.50
19	8	.30 $\overline{3.80}$.30	4.40	35.20
19a	9	1.00 $\overline{3.80}$ 1.00	5.80	52.20
20	—	—	—	—
21	—	—	—	—
22	—	—	—	—
23	15	.75 $\overline{.75}$	1.50	22.50
			1287.42	
1287.42 x 1.21 =			1557.78 Kg.	

STR. 360				
Pos.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	14	3.02 $\overline{.80 \quad 8.20}$.80	9.52	133.28
1a	22	$\overline{5.20}$.30	5.50	121.00
1b	15	$\overline{.80}$	0.80	12.00
2	5	$\overline{.92 \quad 5.20}$.90	7.12	35.60
3	—	—	—	—
3a	2	2.25 $\overline{1.40 \quad 5.20 \quad 5.30}$	14.90	29.80
4	—	—	—	—
4a	8	$\overline{5.25}$ 2.20	7.45	59.60
4b	12	$\overline{1.28 \quad 5.25}$ 2.05	6.92	83.04
4c	12	$\overline{2.20}$	2.20	26.40
5	5	2.25 $\overline{1.40 \quad 2.45 \sim 5.20}$ 2.45 \sim 5.20	12.15	60.75
5a	10	$\overline{2.45 \sim 5.20}$	3.83	38.30
6	4	$\overline{.40}$ 3.00 \sim .30	3.70	14.80
7	36	$\overline{4.10}$	4.10	147.60
8	10	$\overline{1.28 \sim 2.05}$	1.67	16.70
9	30	$\overline{3.03}$	3.03	90.90
10	5	.50 $\overline{.81 \sim 1.58}$	1.70	8.50
11	5	$\overline{.81 \sim 1.58}$	1.20	6.00
12	5	$\overline{.68 \sim 1.32}$	1.00	5.00
13	3	$\overline{.40}$ \bigcirc 5.24	5.24	15.72
14	11	$\overline{2.00 \quad 2.25 \quad .40 \quad 2.25 \quad 2.00}$ 3.05	9.55	105.05
14a	22	$\overline{2.00 \sim 3.05}$	2.53	55.66
14b	42	$\overline{1.20}$.90	2.10	88.20
15	10	3.05 $\overline{2.25 \quad .40 \quad 2.25}$ 3.05	10.60	106.00
16	36	$\overline{2.00}$	2.00	72.00
17	8	$\overline{8.10}$	8.10	64.80
18	15	$\overline{1.45}$.75	2.20	33.00
18a	15	$\overline{.75}$.30	1.05	15.75
18b	15	$\overline{1.45}$.30	1.75	26.25
19	8	.30 $\overline{4.10}$.30	4.70	37.60
19a	8	.60 $\overline{4.10}$.60	5.30	42.40
20	7	$\overline{.90 \quad .25 \quad .35}$	1.50	10.50
21	14	1.20 $\overline{1.40}$	2.60	36.40
22	7	$\overline{2.50}$	2.50	17.50
23	15	.80 $\overline{1.30}$	2.20	33.00
			1649.10	
1649.10 x 1.21 =			1995.41 Kg.	

STR. 380				
Pos.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	14	3.17 $\overline{.80 \quad 5.50}$.85	10.02	140.28
1a	23	$\overline{5.50}$.30	5.80	133.40
1b	17	$\overline{.85}$	0.85	14.45
2	6	$\overline{.97 \quad 5.50}$.85	7.57	45.42
3	—	—	—	—
3a	3	2.38 $\overline{1.40 \quad 5.50 \quad 5.50}$	15.70	47.10
4	—	—	—	—
4a	8	$\overline{5.50}$ 2.20	7.70	61.60
4b	12	$\overline{1.28 \quad 5.50}$ 2.15	7.22	86.64
4c	12	$\overline{2.20}$	2.20	26.40
5	5	2.38 $\overline{1.40 \quad 2.55 \sim 5.50}$ 2.55 \sim 5.50	12.75	63.75
5a	10	$\overline{2.55 \sim 5.50}$	4.03	40.30
6	4	$\overline{.40}$ 3.15 \sim .30	3.85	15.40
7	37	$\overline{4.30}$	4.30	159.10
8	12	$\overline{1.28 \sim 2.15}$	1.72	20.64
9	30	$\overline{3.18}$	3.18	95.40
10	6	.50 $\overline{.71 \sim 1.58}$	1.65	9.90
11	6	$\overline{.71 \sim 1.58}$	1.15	6.90
12	6	$\overline{.73 \sim 1.47}$	1.10	6.60
13	3	$\overline{.40}$ \bigcirc 5.86	5.86	17.58
14	24	$\overline{2.10 \quad 2.35 \quad .40 \quad 2.35 \quad 2.10}$ 3.20	10.00	120.00
14a	24	$\overline{2.10 \sim 3.20}$	2.65	63.60
14b	42	$\overline{1.20}$.90	2.10	88.20
15	11	3.20 $\overline{2.35 \quad .40 \quad 2.35}$ 3.20	11.10	122.10
16	36	$\overline{2.10}$	2.10	75.60
17	8	$\overline{8.30}$	8.30	66.40
18	16	$\overline{1.55}$.80	2.35	37.60
18a	16	$\overline{.80}$.30	1.10	17.60
18b	16	$\overline{1.55}$.30	1.85	29.60
19	8	.30 $\overline{4.30}$.30	4.90	39.20
19a	8	.60 $\overline{4.30}$.60	5.50	44.00
20	7	$\overline{.90 \quad .25 \quad .35}$	1.50	10.50
21	14	1.20 $\overline{1.40}$	2.60	36.40
22	7	$\overline{2.50}$	2.50	17.50
23	16	.90 $\overline{1.30}$	2.20	35.20
			1784.76	
1784.76 x 1.21 =			2159.56 Kg.	








STR. 400				
Pos.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	14	3.32 $\overline{.50 \quad 5.75}$.85	10.42	145.88
1a	24	$\overline{5.75}$.30	6.05	145.20
1b	18	$\overline{.85}$	0.85	15.30
2	6	$\overline{.87 \quad 5.75}$.85	7.82	46.72
3	—	—	—	—
3a	3	2.45 $\overline{1.40 \quad 5.75 \quad 5.75}$	16.40	49.20
4	—	—	—	—
4a	8	$\overline{5.80}$ 2.20	8.00	64.00
4b	12	$\overline{1.38 \quad 5.80}$ 2.25	7.62	91.44
4c	14	$\overline{2.20}$	2.20	30.80
5	5	2.45 $\overline{1.40 \quad 2.55 \sim 5.75}$ 2.55 \sim 5.75	13.20	66.00
5a	10	$\overline{2.55 \sim 5.75}$	8.30	83.00
6	4	$\overline{.40}$ 3.45 \sim .30	4.15	16.60
7	39	$\overline{4.50}$	4.50	175.50
8	12	$\overline{1.38 \sim 2.15}$	1.82	21.84
9	32	$\overline{3.33}$	3.33	106.56
10	6	.50 $\overline{.86 \sim 1.73}$	1.80	10.80
11	6	$\overline{.86 \sim 1.73}$	1.30	7.80
12	6	$\overline{.73 \sim 1.47}$	1.10	6.60
13	3	$\overline{.40}$ \bigcirc 5.86	5.86	17.58
14	13	$\overline{2.20 \quad 2.45 \quad .40 \quad 2.45 \quad 2.20}$ 3.35	10.45	135.85
14a	26	$\overline{2.20 \sim 3.35}$	2.78	72.28
14b	44	$\overline{1.20}$.90	2.10	92.40
15	11	3.35 $\overline{2.45 \quad .40 \quad 2.45}$ 3.35	11.60	127.60
16	36	$\overline{2.20}$	2.20	79.20
17	8	$\overline{8.50}$	8.50	68.00
18	17	$\overline{1.60}$.80	2.40	40.80
18a	17	$\overline{.80}$.30	1.10	18.70
18b	17	$\overline{1.60}$.30	1.90	32.30
19	8	.30 $\overline{4.50}$.30	5.10	40.80
19a	8	.60 $\overline{4.50}$.60	5.70	45.60
20	7	$\overline{.90 \quad .25 \quad .35}$	1.50	10.50
21	14	1.20 $\overline{1.40}$	2.60	36.40
22	7	$\overline{2.50}$	2.50	17.50
23	17	.90 $\overline{1.30}$	2.20	37.40
			1946.16	
1946.16 x 1.21 =			2354.85 Kg.	

REFERENCE DWGS For reinforcement see dwgs. No. 16/1/3/05 & 16/1/3/06
For bars with variable unit length see note under the same title at dwg. No. 20/2/1/05

Scale:
Date:
Approved:

IRRIGATION & DRAINAGE STANDARDS
DWG. No. 16/1/3/10
Sheet No. 12 of 12 Rev. No.
BAFFLED OUTLET
LIST OF REINFORCEMENT
STR. 340 TO 400

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH
STANDARD BUREAU

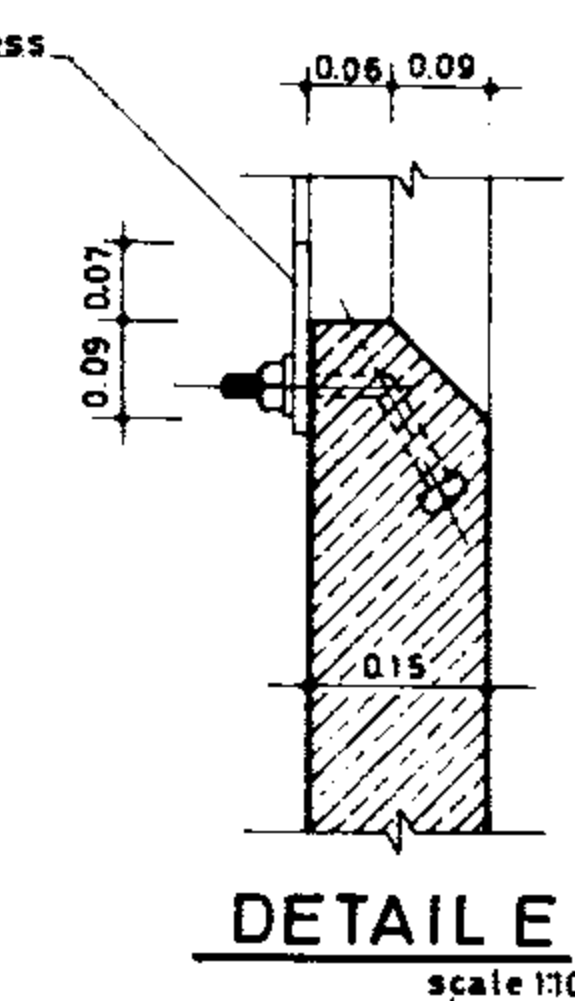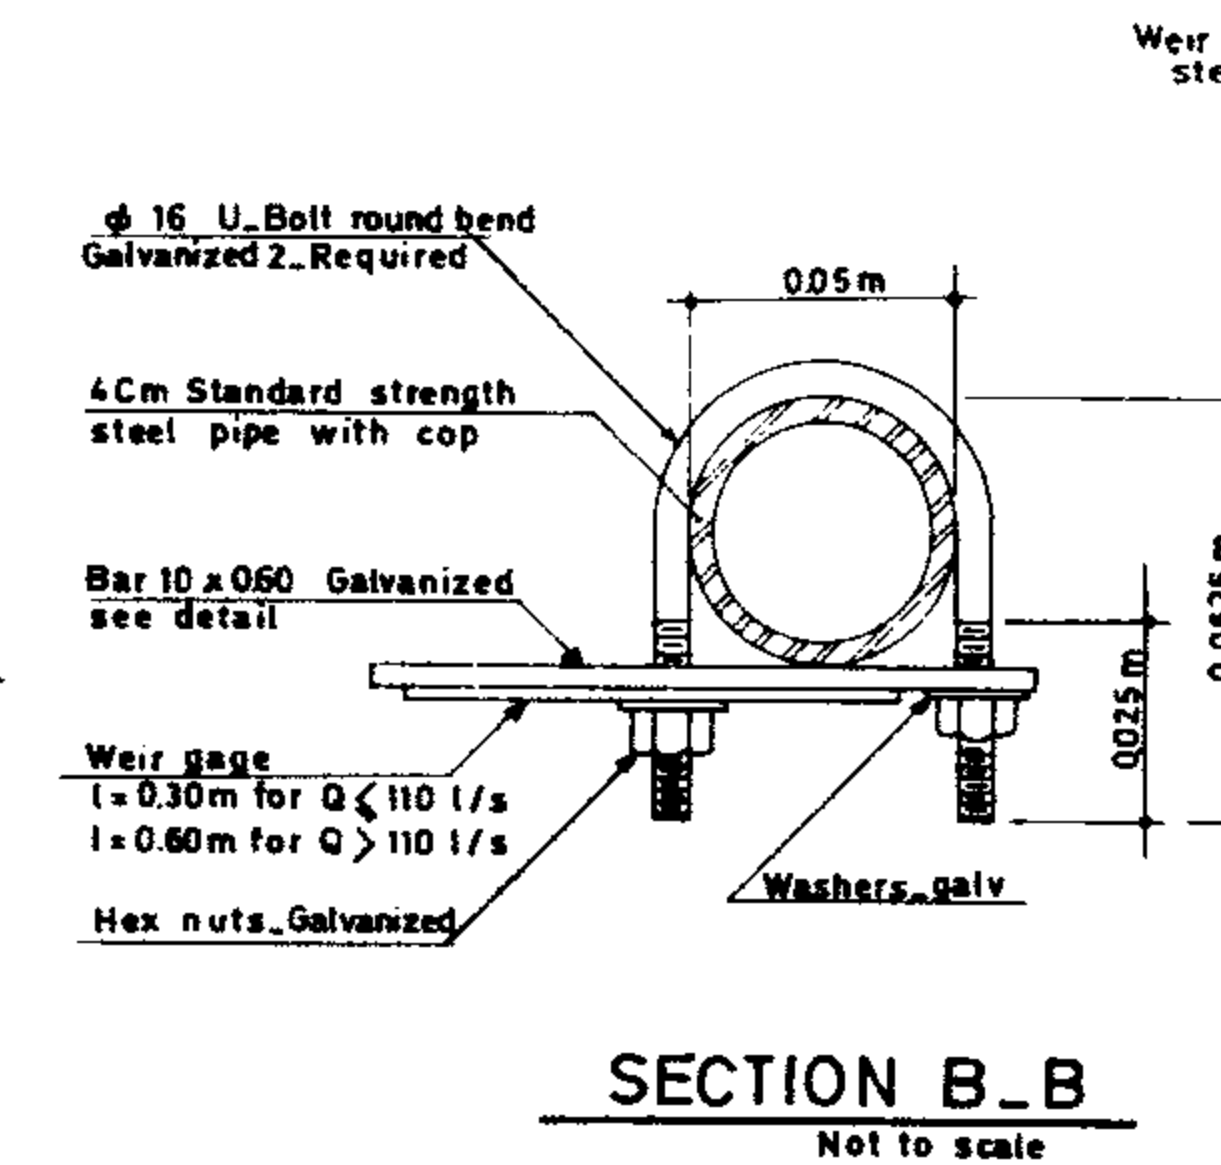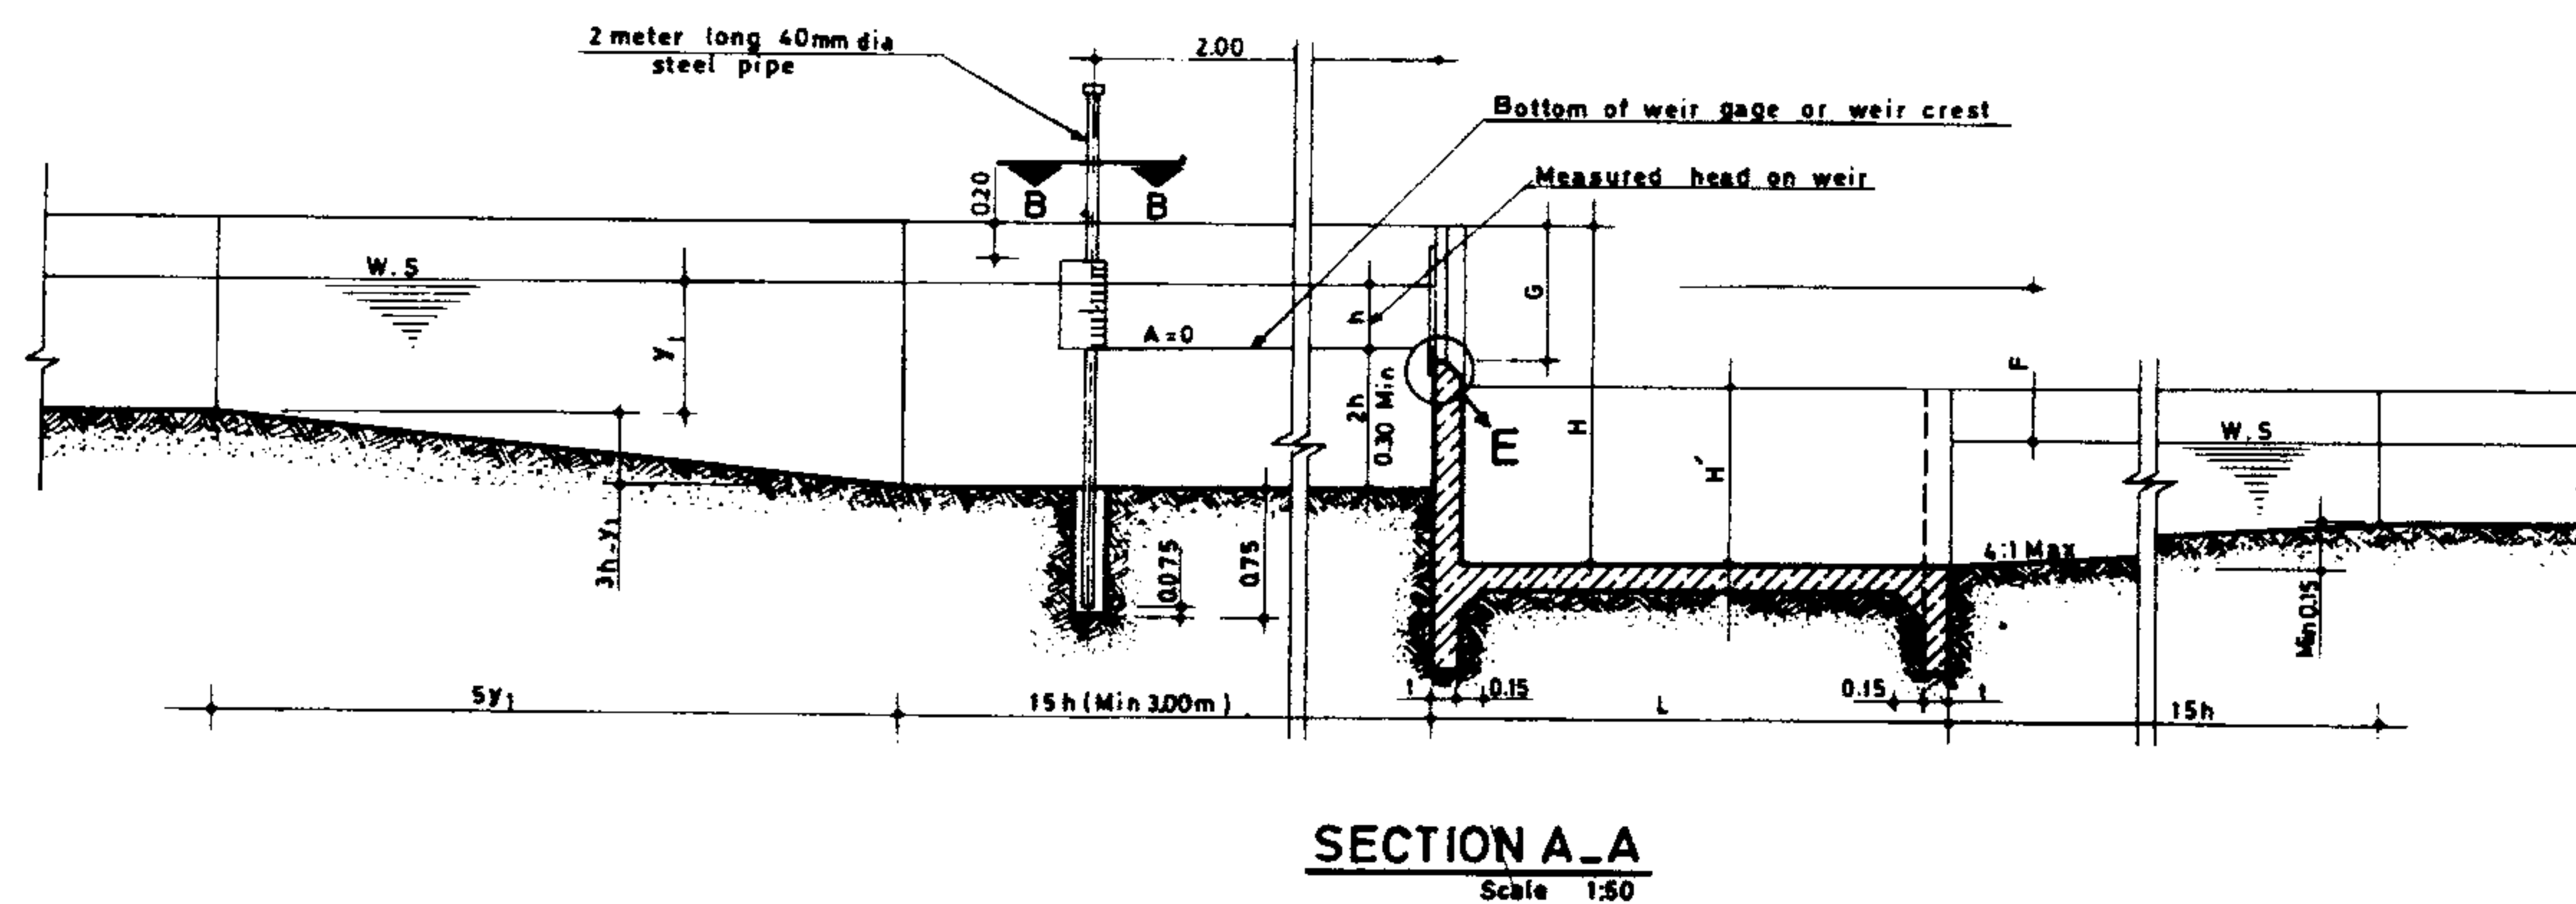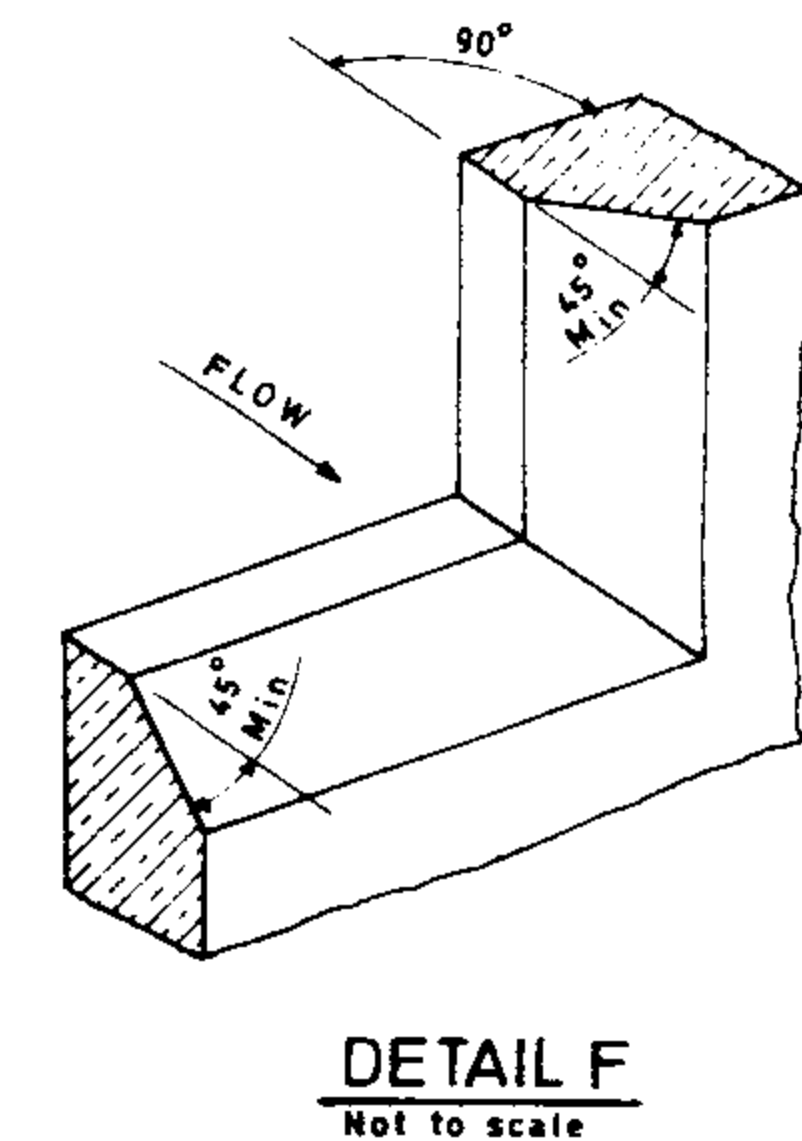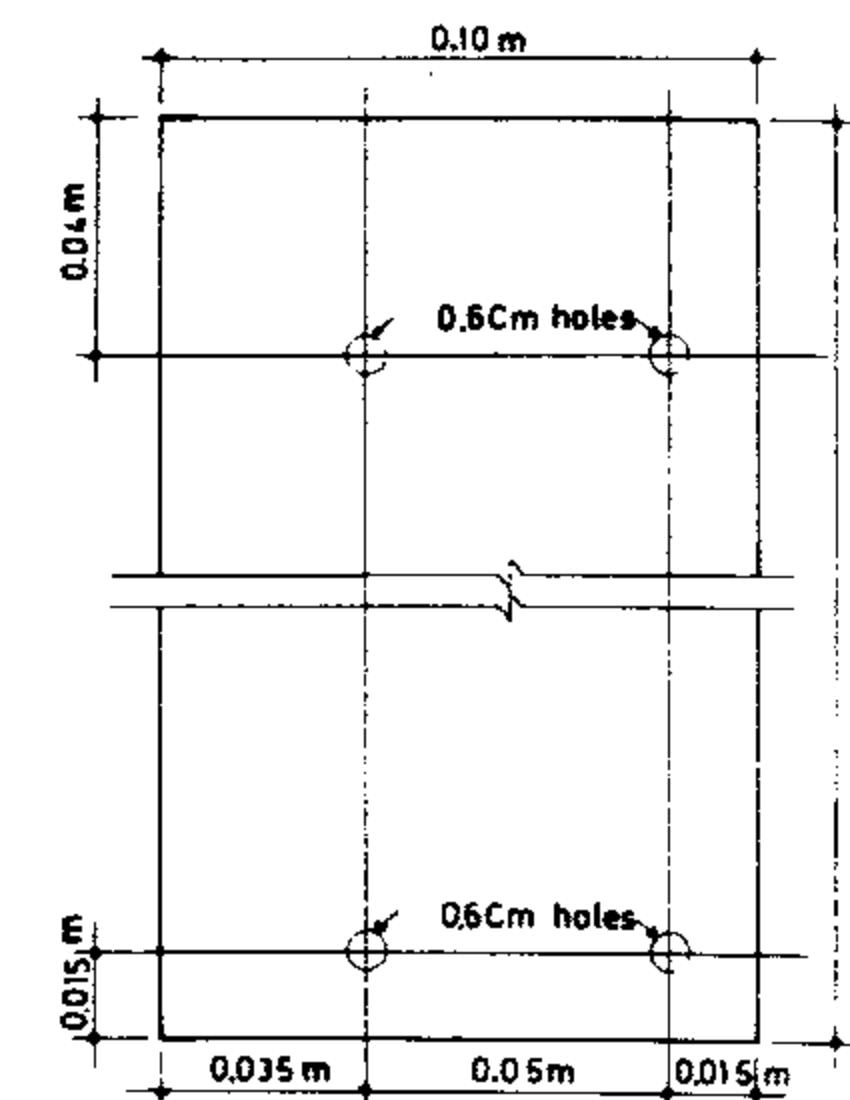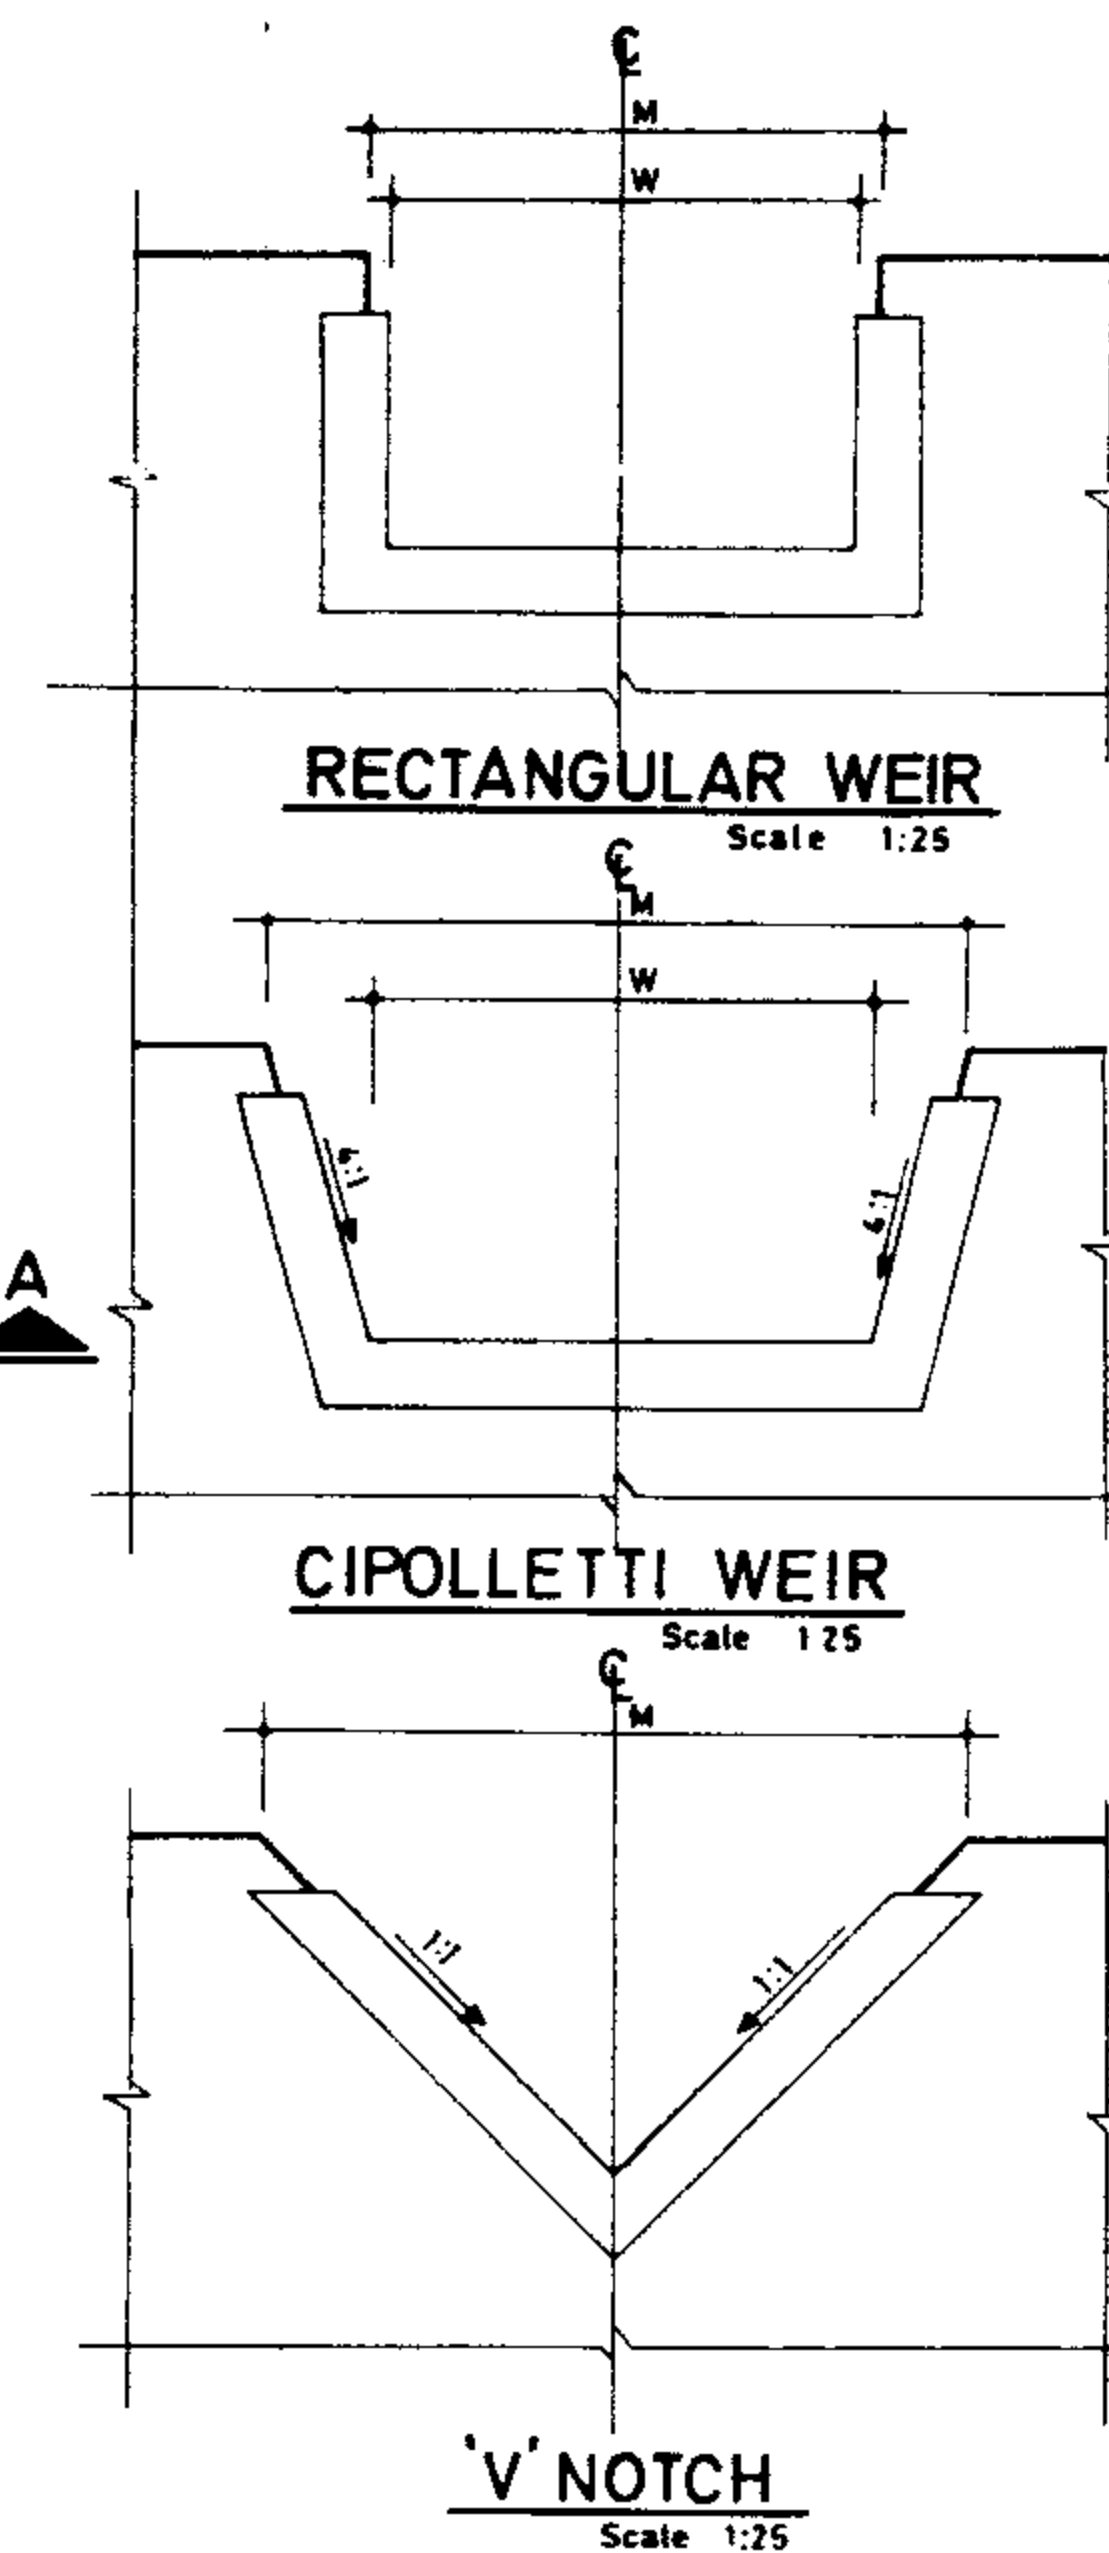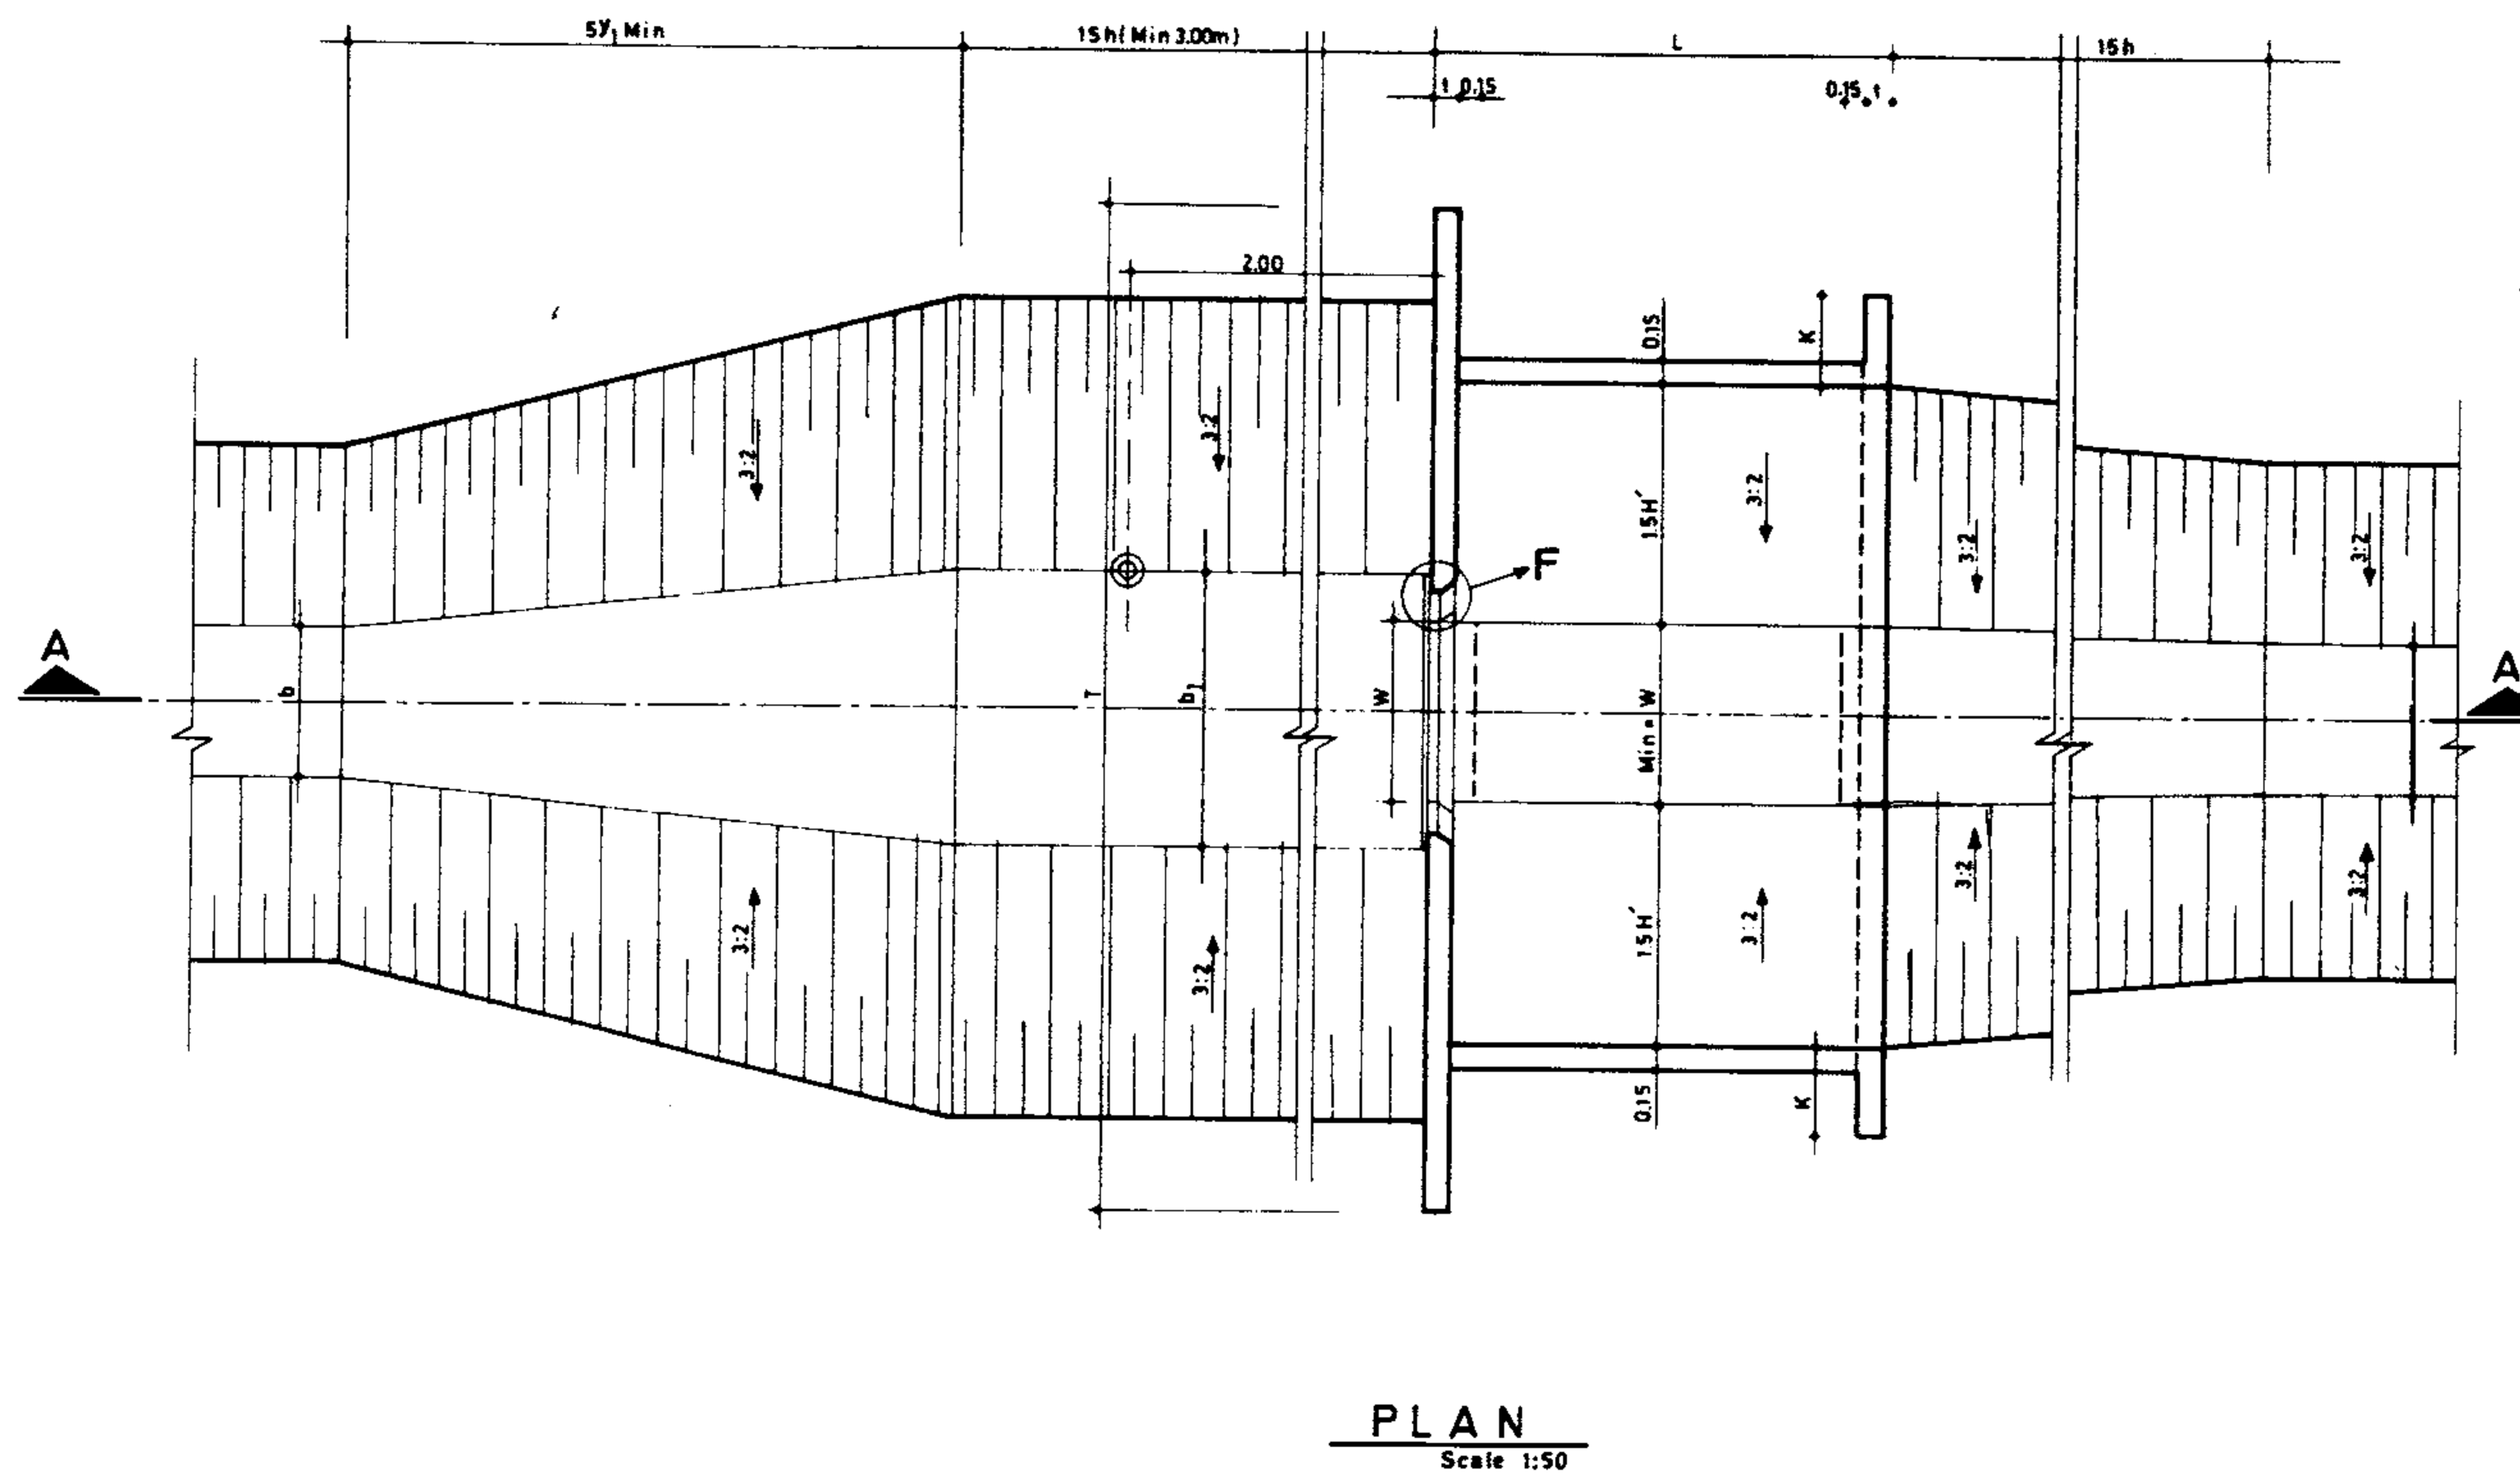


REFERENCE DWGS : For construction detail of weir see dwg No 15/2/1/01


Scale: 1:50	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. No	15/3/1/01
Approved:	Sheet No	1 of 1
	Rev No	

WEIR GAGE INSTALLATION
PLAN & SECTIONS


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL OF RESEARCH AND
STANDARD BUREAU

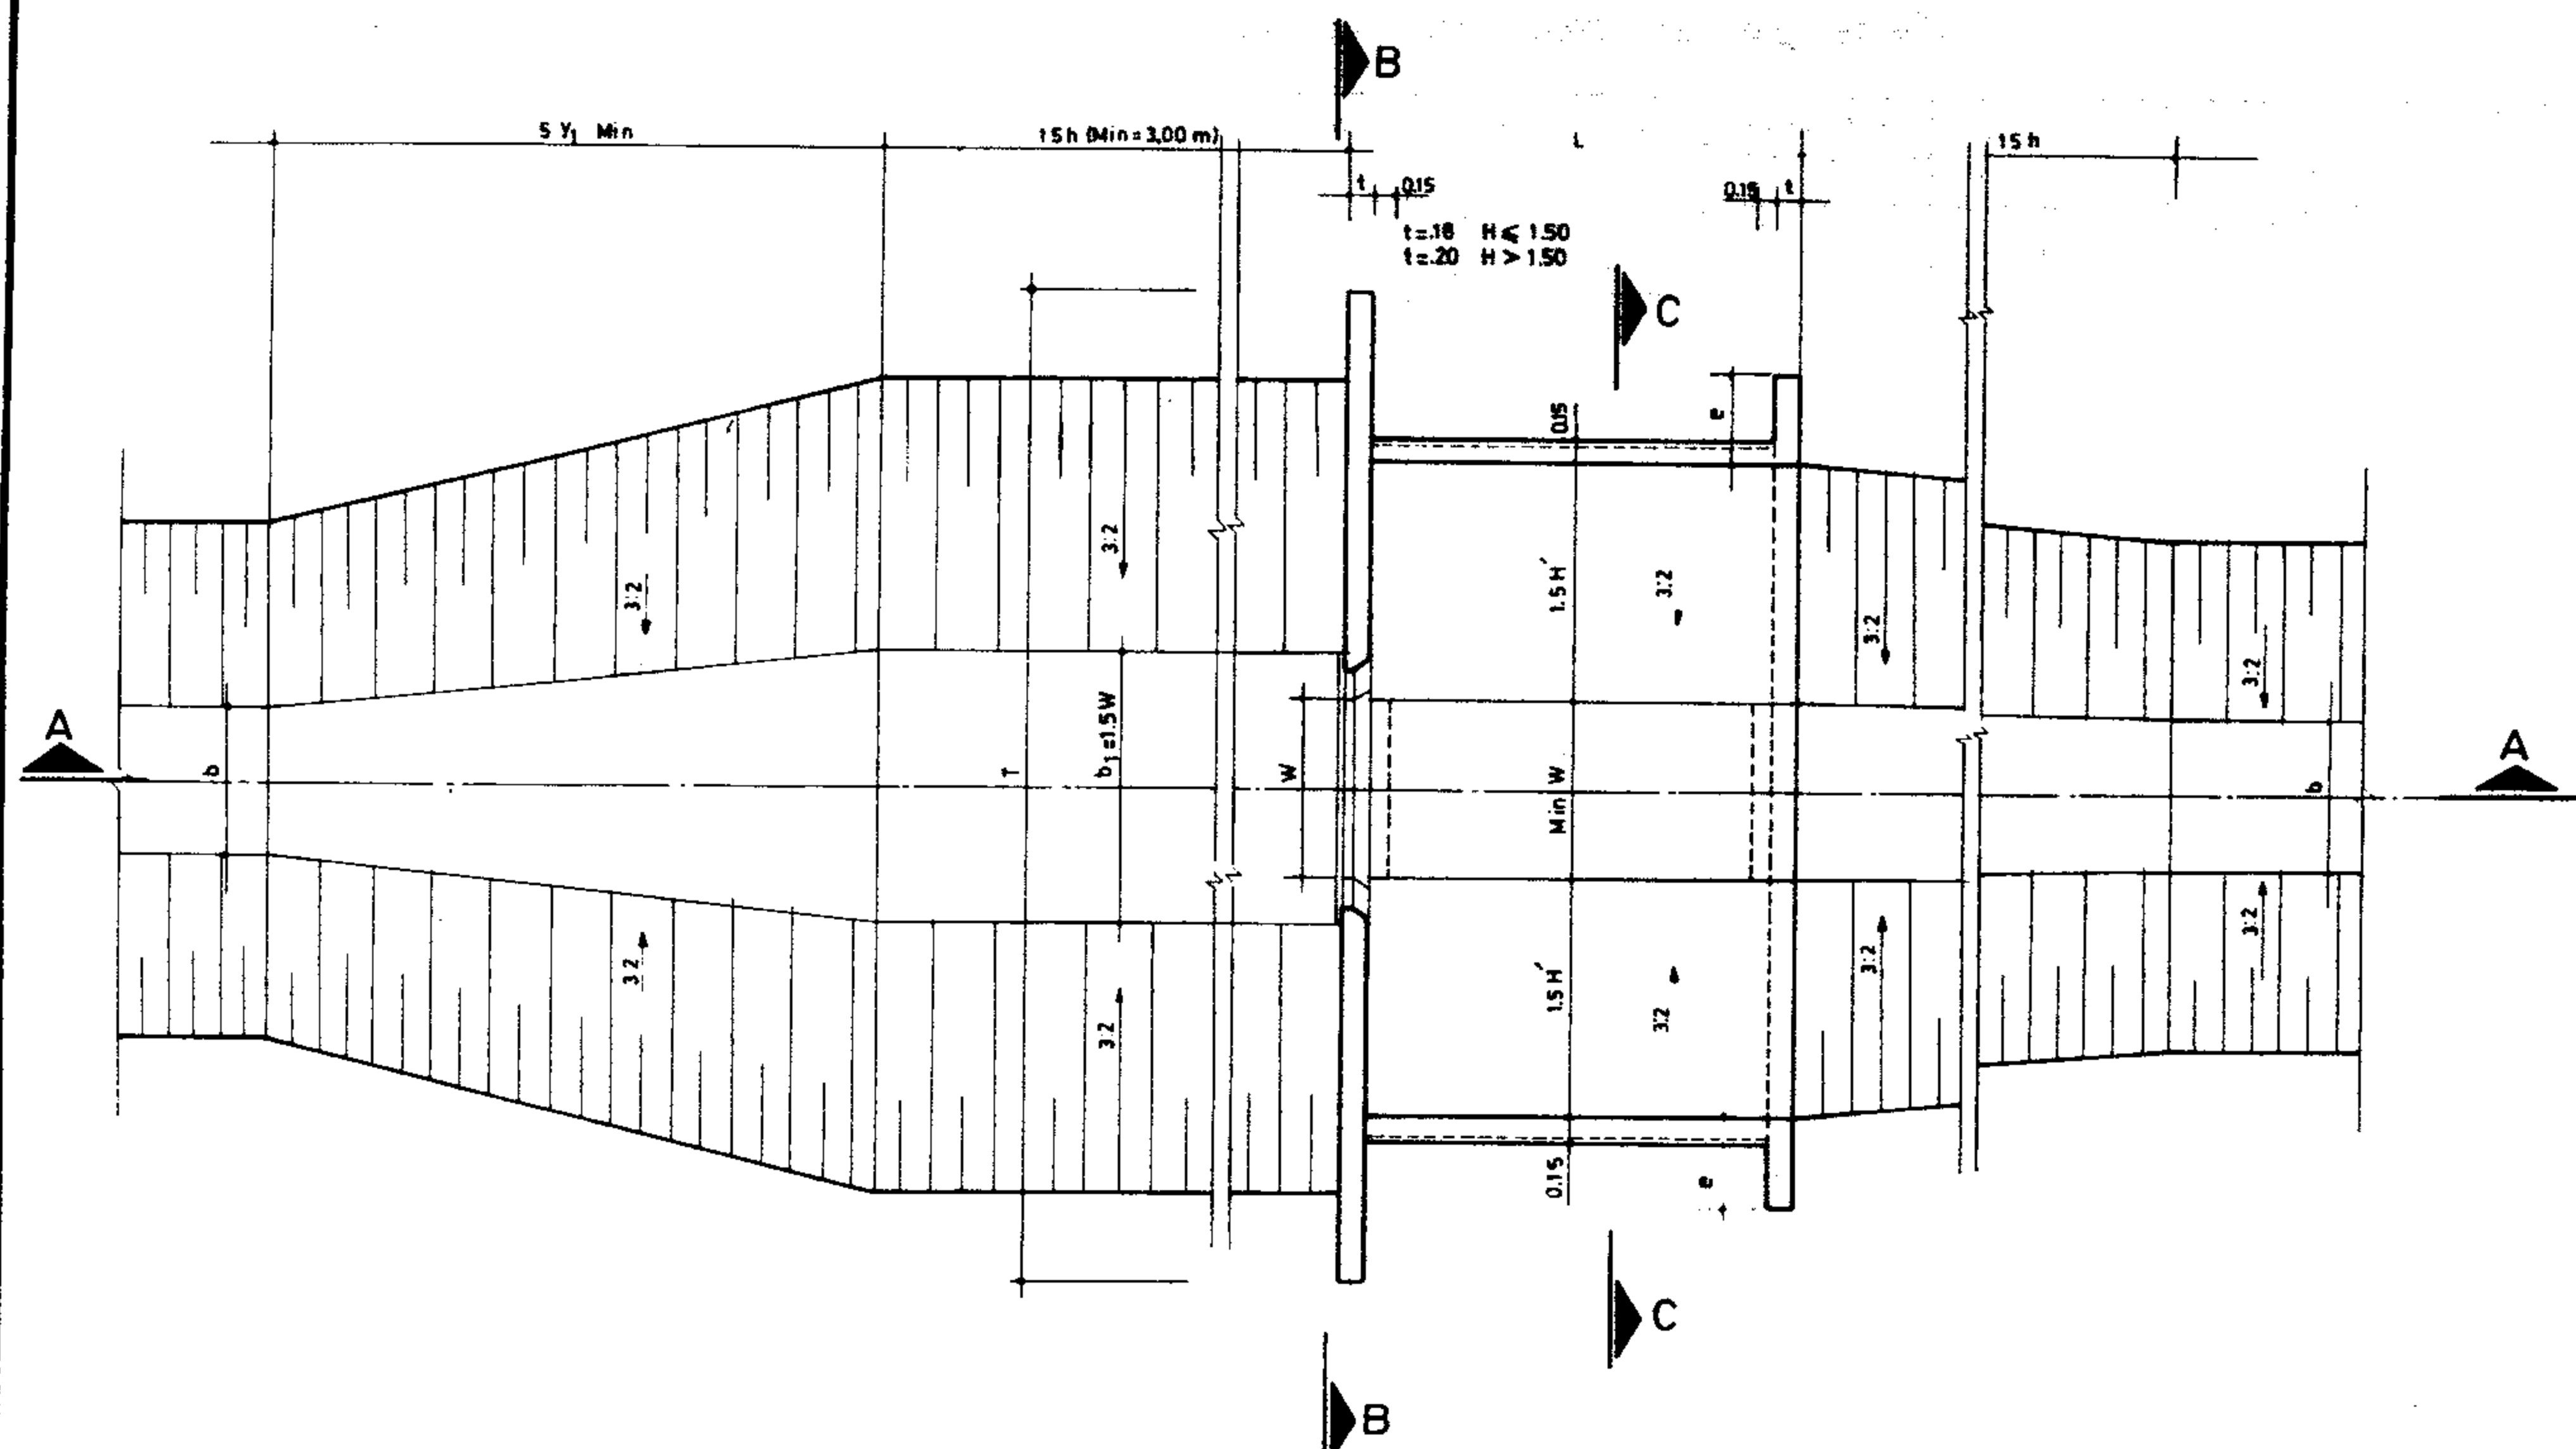


PLAN
Scale 1:50

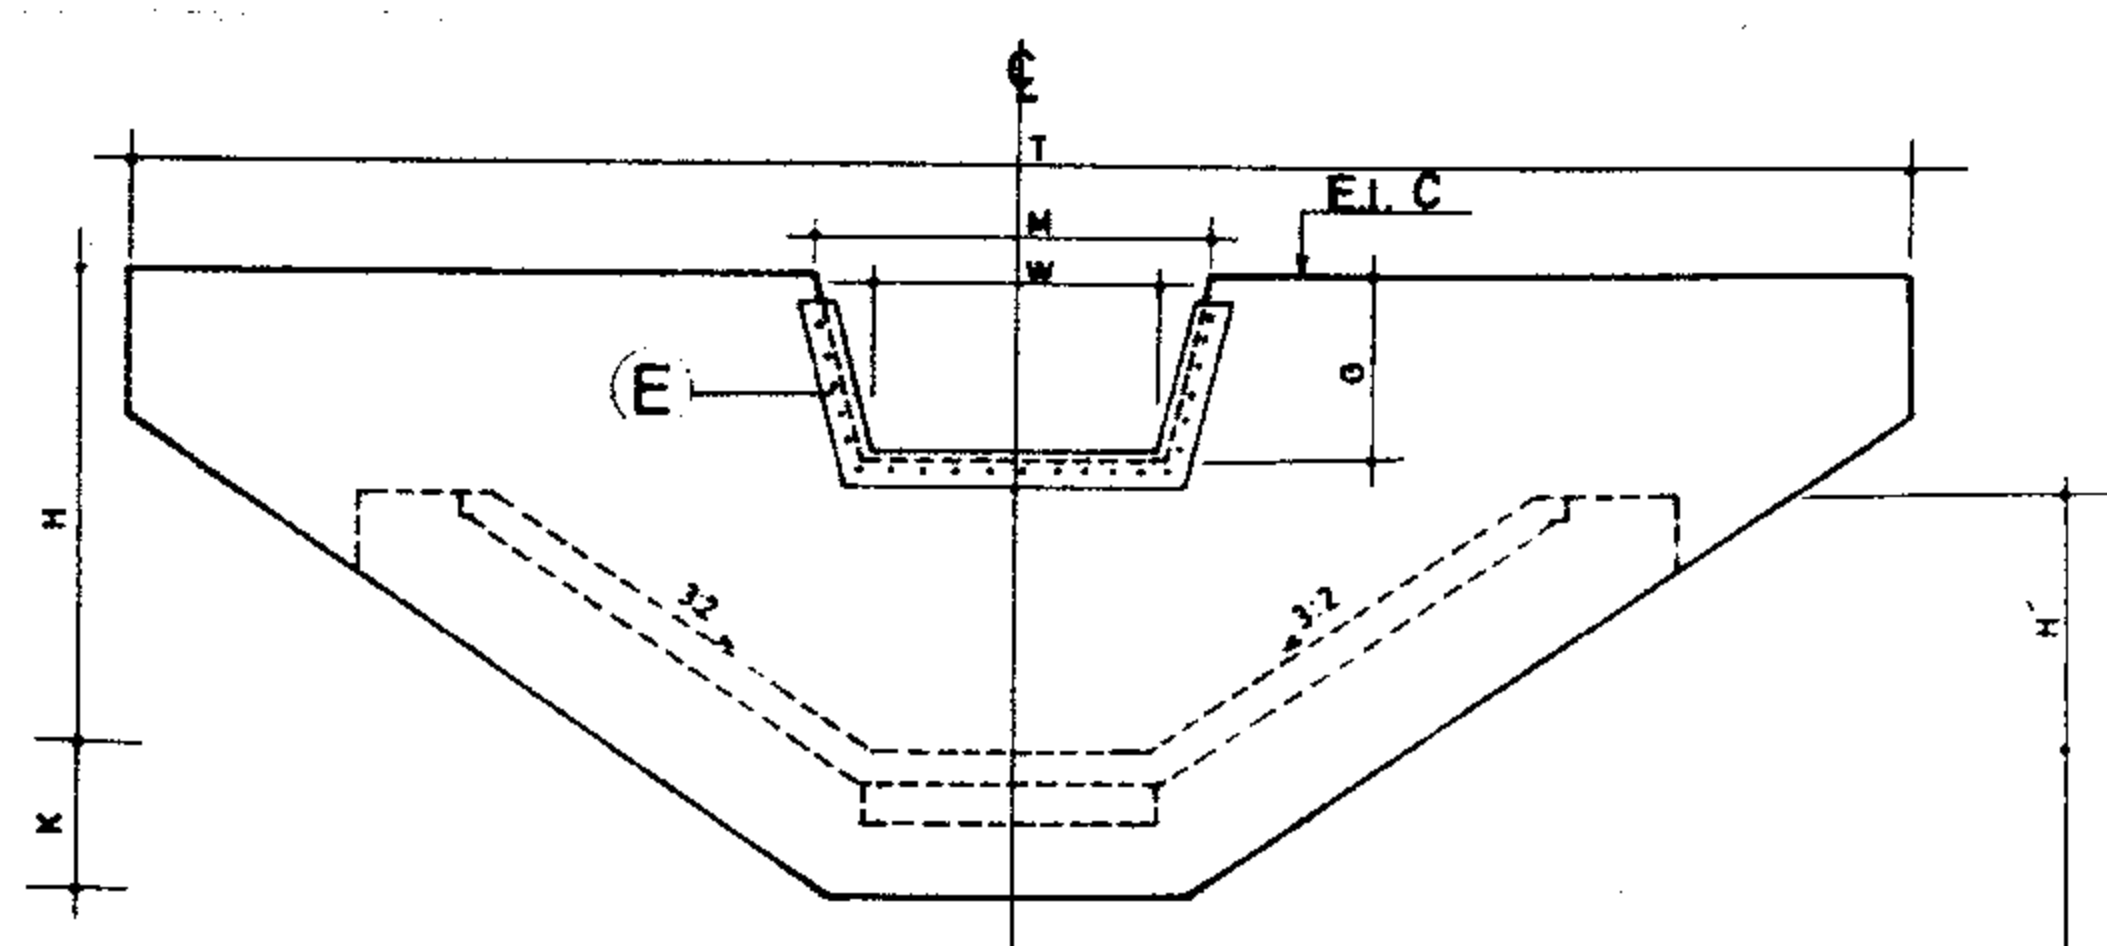


SECTION B_B
CIPOLLETTI WEIR Scale 1:50

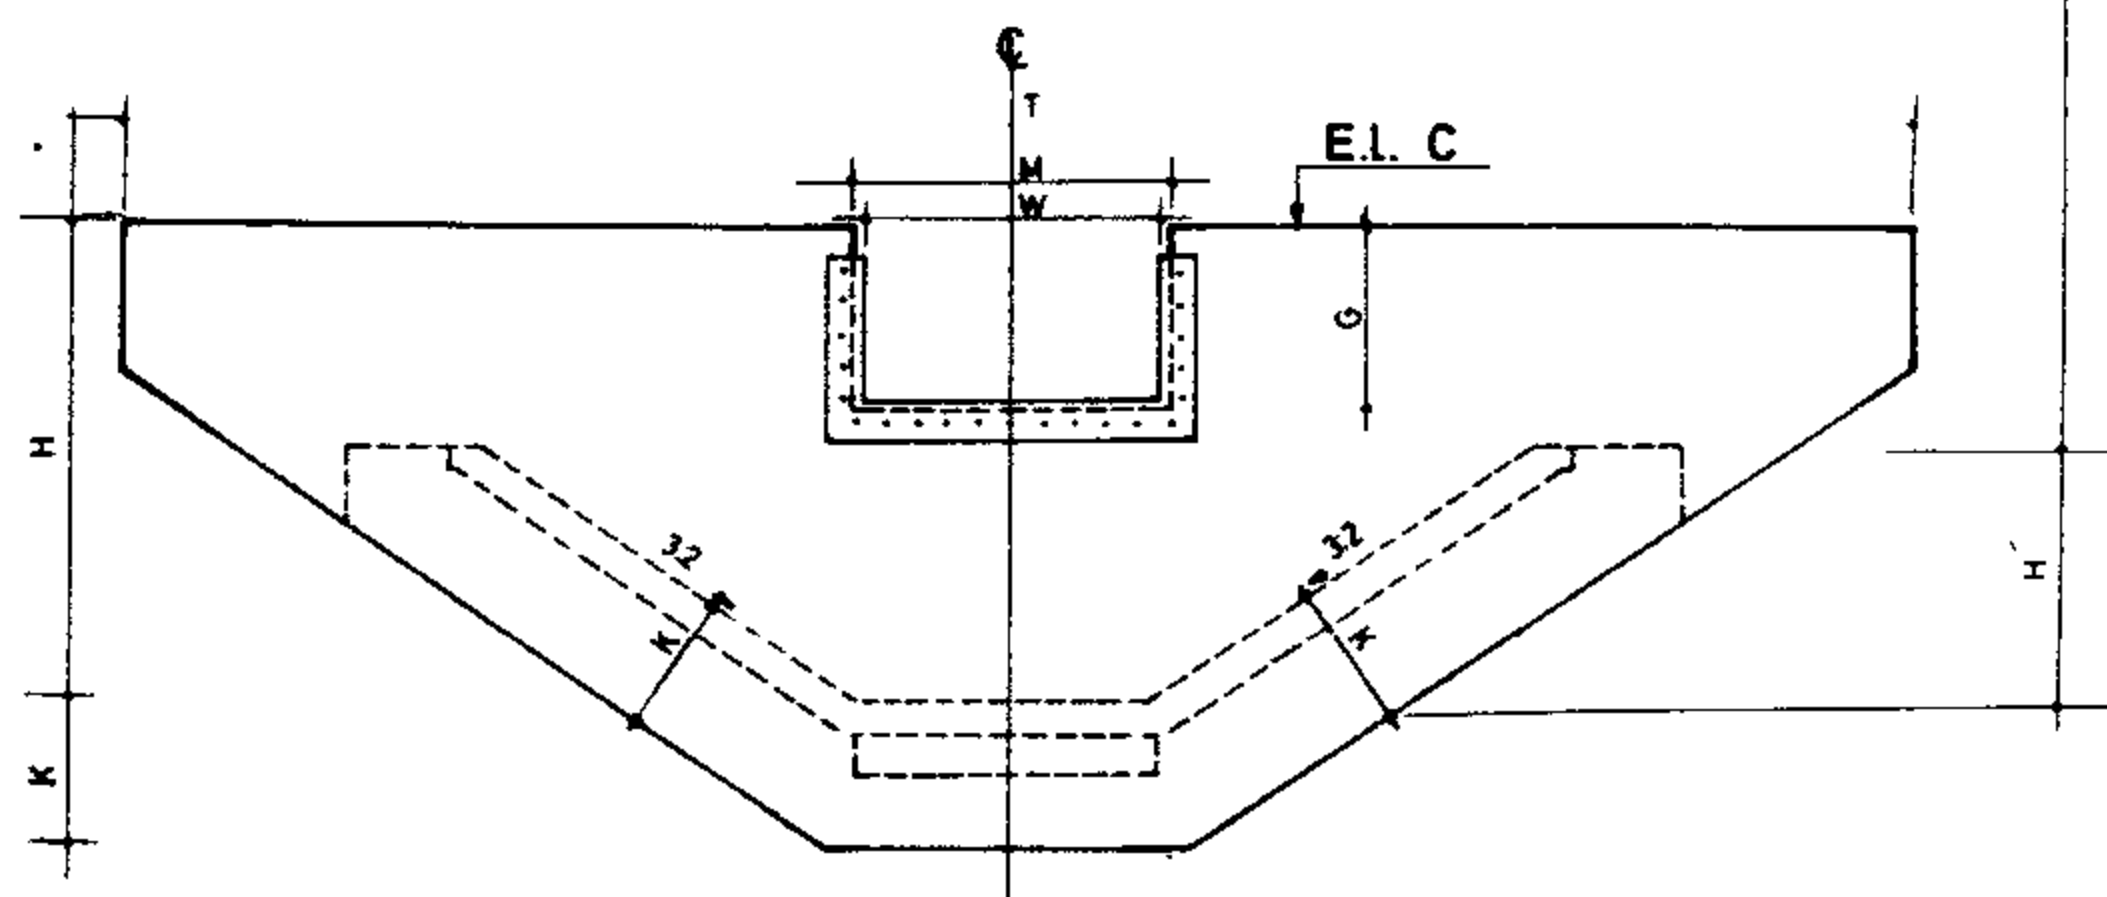

SECTION B_B
RECTANGULAR WEIR Scale 1:50

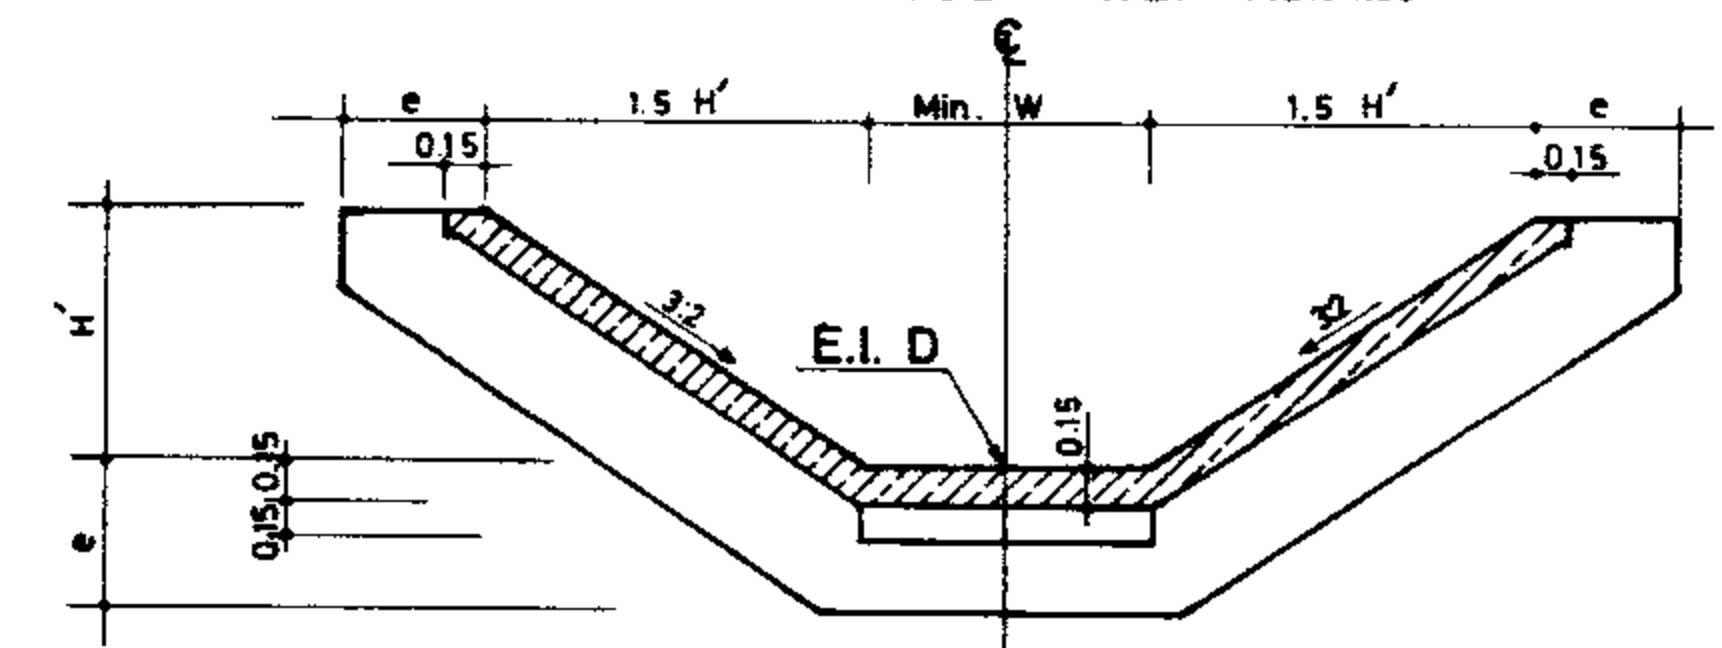

SECTION C_C
Scale 1:50

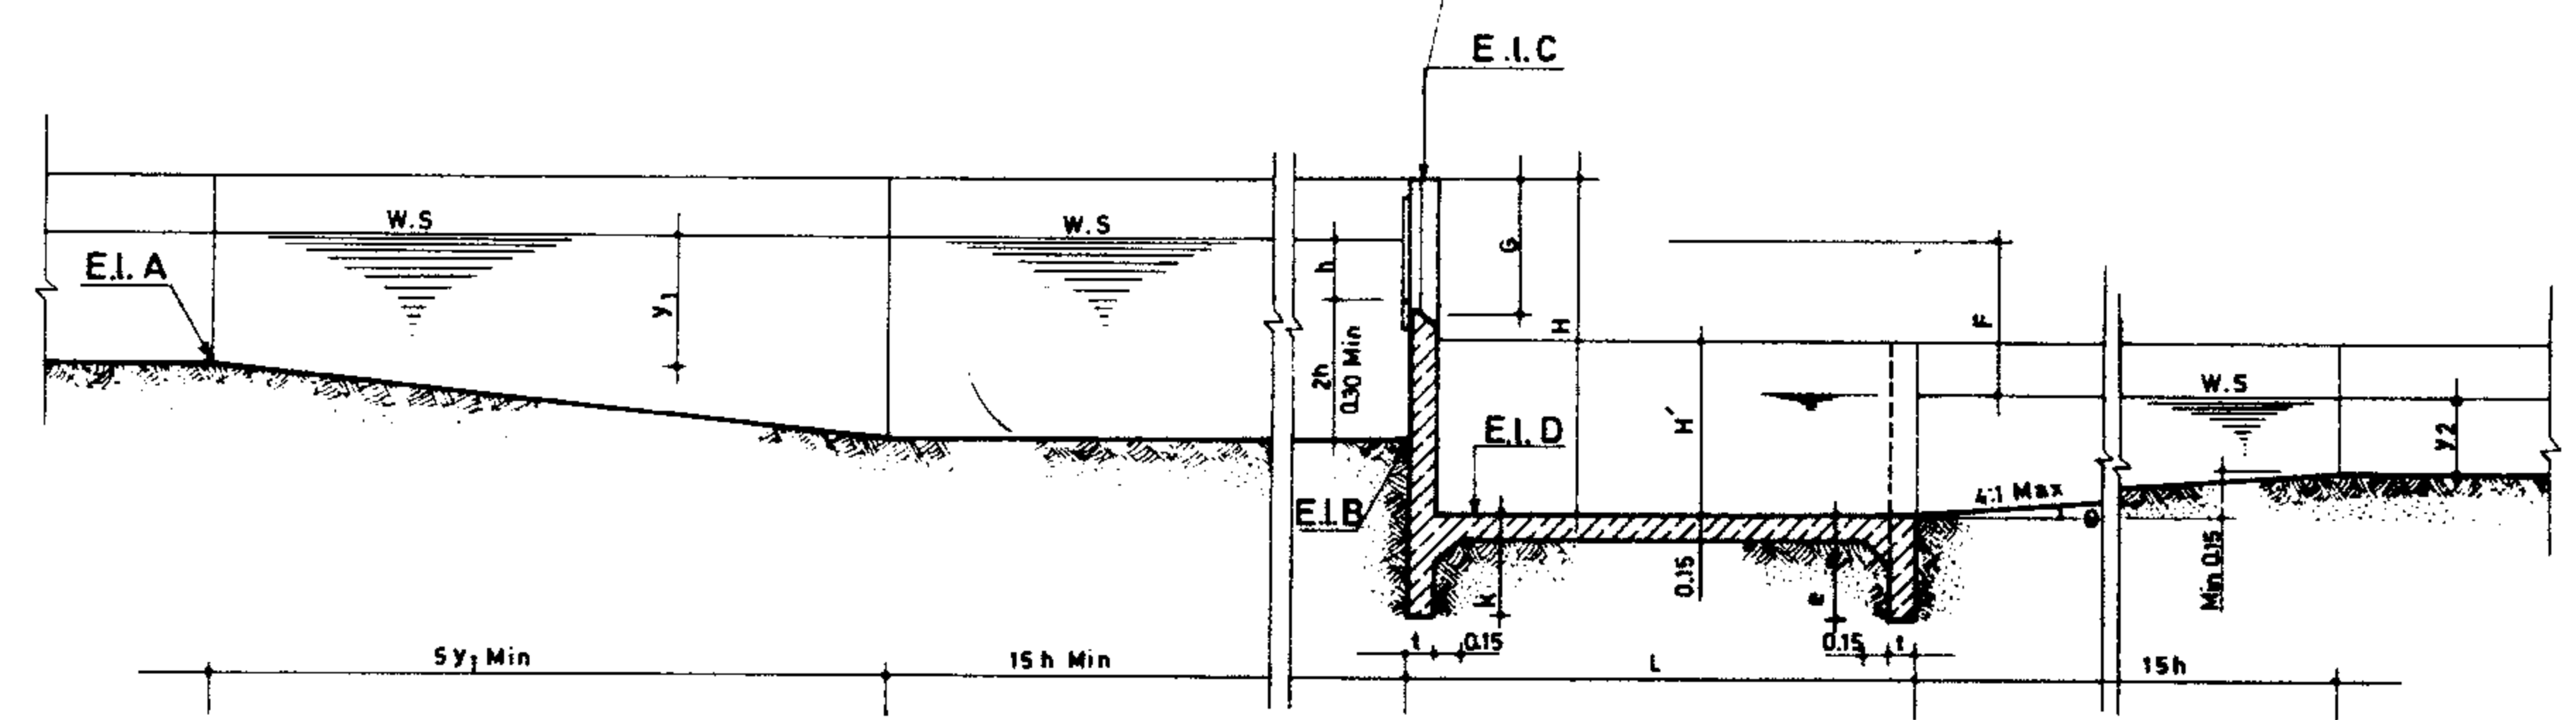

SECTION A_A
Scale 1:50

REFERENCE DWGS: - For reinforcement see dwg N^o. 15/2/3/01
 - For dimension tables see dwg N^o. 15/2/2/01
 - For general notes see dwgs N^o. 20/2/1/01 To 20/2/1/03

Scale: 1:50	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. N ^o 15/2/1/01	CONTRACTED CIPOLLETTI AND RECTANGULAR WEIR PLAN & SECTIONS
Approved:	Sheet N ^o . 1 of 6 Rev. N ^o	

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL OF RESEARCH AND
 STANDARD BUREAU

**SELECTING RECTANGULAR WEIR STRUCTURE
& CALCULATING REQUIRED DIMENSIONS
AND WEIR SETTING.**

STEP 1: Collect the following data:

- Q in m³/s
- Canal wide (b)
- Normal water depth at upstream Y₁
- Normal water depth at downstream Y₂
- Available drop between upstream & downstream of water surfaces ΔH
- Upstream canal invert elevation EL.A
- Downstream canal invert elevation EL.E

STEP 2: If Q ≤ 0.52 then select the structure having the least weir length for Q_{max} which can be adopted to available drop from standard Dimension table, then read dimensions W, L, H, H', b₁, k, e & T; GOTO step 3 otherwise; From general data table select the structure having the least weir length for Q_{max} which can be adopted to available drop, then read W

STEP 3: From Rectangular weir table at appendix A of publication No. 106 read the value of head (h) corresponding to the given Q

- From the Anchor Bolt & weir blade Data, read the value of G

STEP 4: b₁ = 1.5 W

- EL.B = EL.A + y₁ - 2h - h

- EL.C = EL.B + 2h + G - .05

Not: if 2h < 0.30m Then use 2h = 0.30m

IF Q < 0.52 m/s then goto Step 7, otherwise:

EL.D = EL.A + y₁ - (ΔH) - y₂ + 0.15

H = EL.C - EL.D

H' = 0.15 + y₂ + Structure freeboard

L = 3h + 2F

STEP 5: From the following table select the cutoff depth and then calculate K_{min}.

3h (m)	cut off depth (m)	cut off thickness (m)
0-0.90	0.60	0.15
90-1.80	0.75	0.20
> 1.80	0.90	0.20

K = Cut off depth - (EL.B - EL.D)

STEP 6: Calculate weighted creep length (W.C.L) by lane method.

W.C.L = (EL.B - EL.D) + K + 2(K - 0.15) + (K - Protection thickness)

Calculate (ΔWS) for upstream water ponded to weir crest and downstream water at canal invert ΔWS = (EL.B + 2h) -

(EL.D + .15) percolation factor = W.C.L / ΔWS

IF calculated percolation > recommended percolation factor

GOTO Step 8, otherwise increase K and goto Step 6

STEP 7: EL.D = EL.C - H

t = 0.15 m

STEP 8: T = b₁ + 3(2h + G - 0.05) + 2K

STEP 9: Use Anchor Bolt and weir blade Data from the corresponding tables.

Quantities:

Q < 0.52 m³/s


STR No	30	30A	40	40A	50	50A	60	60A	70	70A	80	80A	90	90A	100	100A	120	120A
R/Bar kg	99.72	179.16	136.28	313.79	120.21	322.85	150.42	413.34	158.20	427.64	177.94	469.03	212.48	484.88	222.41	449.76	278.32	607.35
Conc.	0.97	1.68	1.15	2.23	1.26	2.32	1.51	3.04	1.93	3.29	1.96	3.71	2.28	4.08	2.75	4.52	3.46	5.31
Form	8.70	13.44	10.12	15.86	11.02	16.90	12.98	22.32	17.54	23.92	17.50	25.60	19.78	27.24	21.34	29.30	25.90	28.86

STANDARD DIMENSIONS for Q < 0.52 m³/s

STR No	W (m)	Q _{max} (m ³ /s)	h _{max} (m)	ΔH for Q _{max}		L (m)	H (m)	H' (m)	b ₁ (m)	k (m)	e (m)	T (m)
				min	max							
R 30	.30	.063	.10	.10		1.20	.75	.60	.45	.45	.45	3.10
R 30A	.30	.063	.10		.90	2.10	1.90	.60	.45	.45	.45	3.10
R 40	.40	.0322	.13	.13		1.20	.85	.65	.60	.45	.45	3.60
R 40A	.40	.0322	.13		.90	2.20	1.60	.65	.60	.45	.45	3.60
R 50	.50	.0551	.16	.16		1.20	.90	.70	.75	.45	.45	4.10
R 50A	.50	.0551	.16		.90	2.30	1.65	.70	.75	.45	.45	4.10
R 60	.60	.0921	.20	.20		1.20	1.00	.75	.90	.45	.45	4.60
R 60A	.60	.0921	.20		.90	2.40	1.70	.75	.90	.45	.60	4.60
R 70	.70	.1326	.23	.23		1.30	1.10	.80	1.05	.45	.60	5.00
R 70A	.70	.1326	.23		.90	2.50	1.75	.80	1.05	.45	.60	5.00
R 80	.80	.1823	.26	.26		1.45	1.15	.85	1.20	.45	.60	5.50
R 80A	.80	.1823	.26		.90	2.60	1.80	.85	1.20	.45	.60	5.50
R 90	.90	.2537	.30	.30		1.60	1.25	.90	1.35	.45	.60	6.00
R 90A	.90	.2537	.30		.90	2.70	1.85	.90	1.35	.45	.60	6.00
R 100	1.00	.3254	.33	.33		1.75	1.35	.95	1.50	.60	.60	6.60
R 100A	1.00	.3254	.33		.90	2.80	1.90	.95	1.50	.60	.60	6.60
R 120	1.20	.5208	.40	.40		2.00	1.50	1.05	1.80	.60	.60	7.50
R 120A	1.20	.5208	.40		.90	3.00	2.00	1.05	1.80	.60	.60	7.50

ANCHOR BOLT AND WEIR BLADE DATA for Q < 0.52 m³/s


STR No	W (m)	M (m)	G (m)	A (m)	B (m)	C (m)	D No @ (m)	E (m)	F (m)	Total No of holes
R 30 & R 30A	.30	.40	.45	.60	.20	.25	—	.10	—	7
R 40 & R 40A	.40	.50	.50	.70	.25	.30	—	.15	—	7
R 50 & R 50A	.50	.60	.55	.80	.25	.35	—	.15	—	7
R 60 & R 60A	.60	.70	.60	.90	.30	.20	2 @ .20	.20	—	9
R 70 & R 70A	.70	.80	.60	1.00	.35	.25	2 @ .20	.25	—	9
R 80 & R 80A	.80	.90	.65	1.10	.35	.25	2 @ .25	.25	—	9
R 90 & R 90A	.90	1.00	.70	1.20	.40	.30	2 @ .25	.30	—	9
R 100 & R 100A	1.00	1.10	.70	1.30	.45	.30	2 @ .30	.35	—	9
R 120 & R 120A	1.20	1.30	.80	1.50	.50	.20	4 @ .25	.20	.20	13

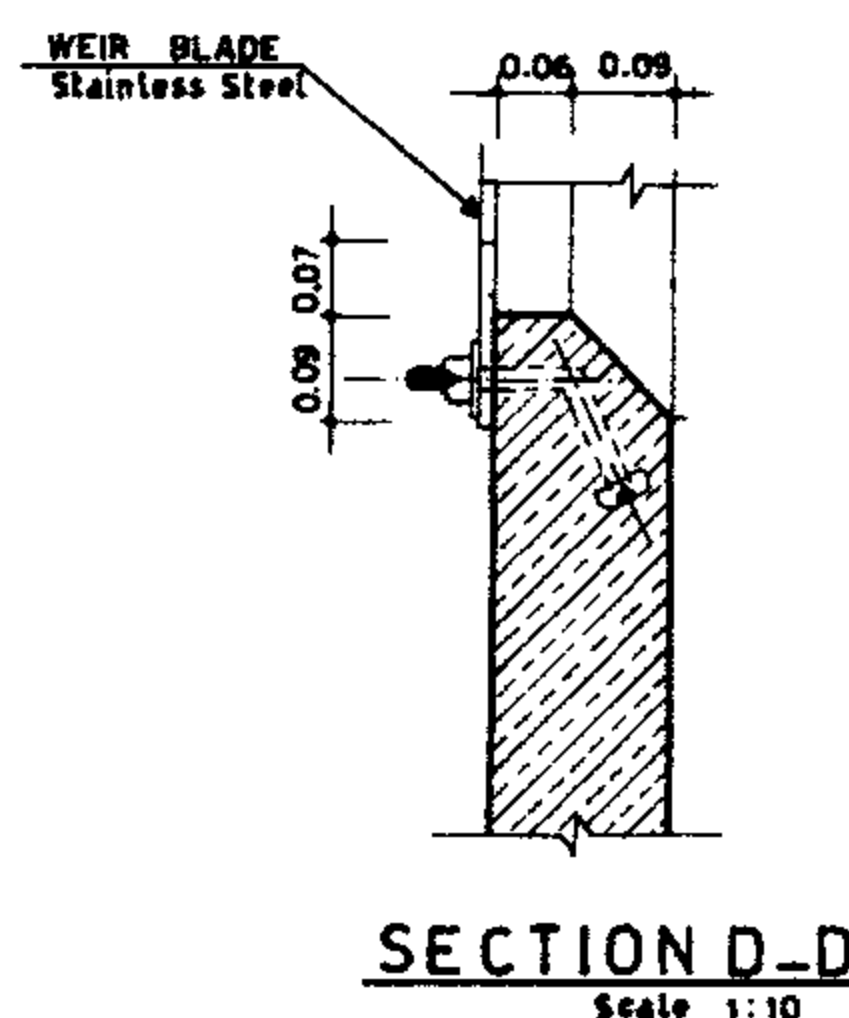

SECTION D-D
Scale 1:10

ANCHOR BOLT AND WEIR BLADE DATA for Q > 0.52 m³/s

STR No	W (m)	M (m)	G (m)	A (m)	B (m)	C (m)	D No @ (m)	E (m)	F (m)	Total No of holes
R140 & R140A	1.40	1.50	.85	1.70	.55	.30	4 @ .25	.20	.25	13
R160 & R160A	1.60	1.70	.90	1.90	.65	.30	4 @ .30	.25	.30	13
R180 & R180A	1.80	1.90	1.00	2.10	.70	.40	4 @ .30	.30	.30	13
R200 & R200A	2.00	2.10	1.00	2.30	.70	.35	6 @ .25	.30	.30	15
R220 & R220A	2.20	2.30	1.00	2.50	.70	.30	6 @ .30	.30	.30	15
R240 & R240A	2.40	2.50	1.00	2.70	.70	.40	6 @ .30	.30	.30	15
R260 & R260A	2.60	2.70	1.00	2.90	.70	.20	8 @ .30	.30	.30	17
R280 & R280A	2.80	2.90	1.00	3.10	.70	.30	8 @ .30	.30	.30	17
R300 & R300A	3.00	3.10	1.00	3.30	.70	.40	8 @ .30	.30	.30	17

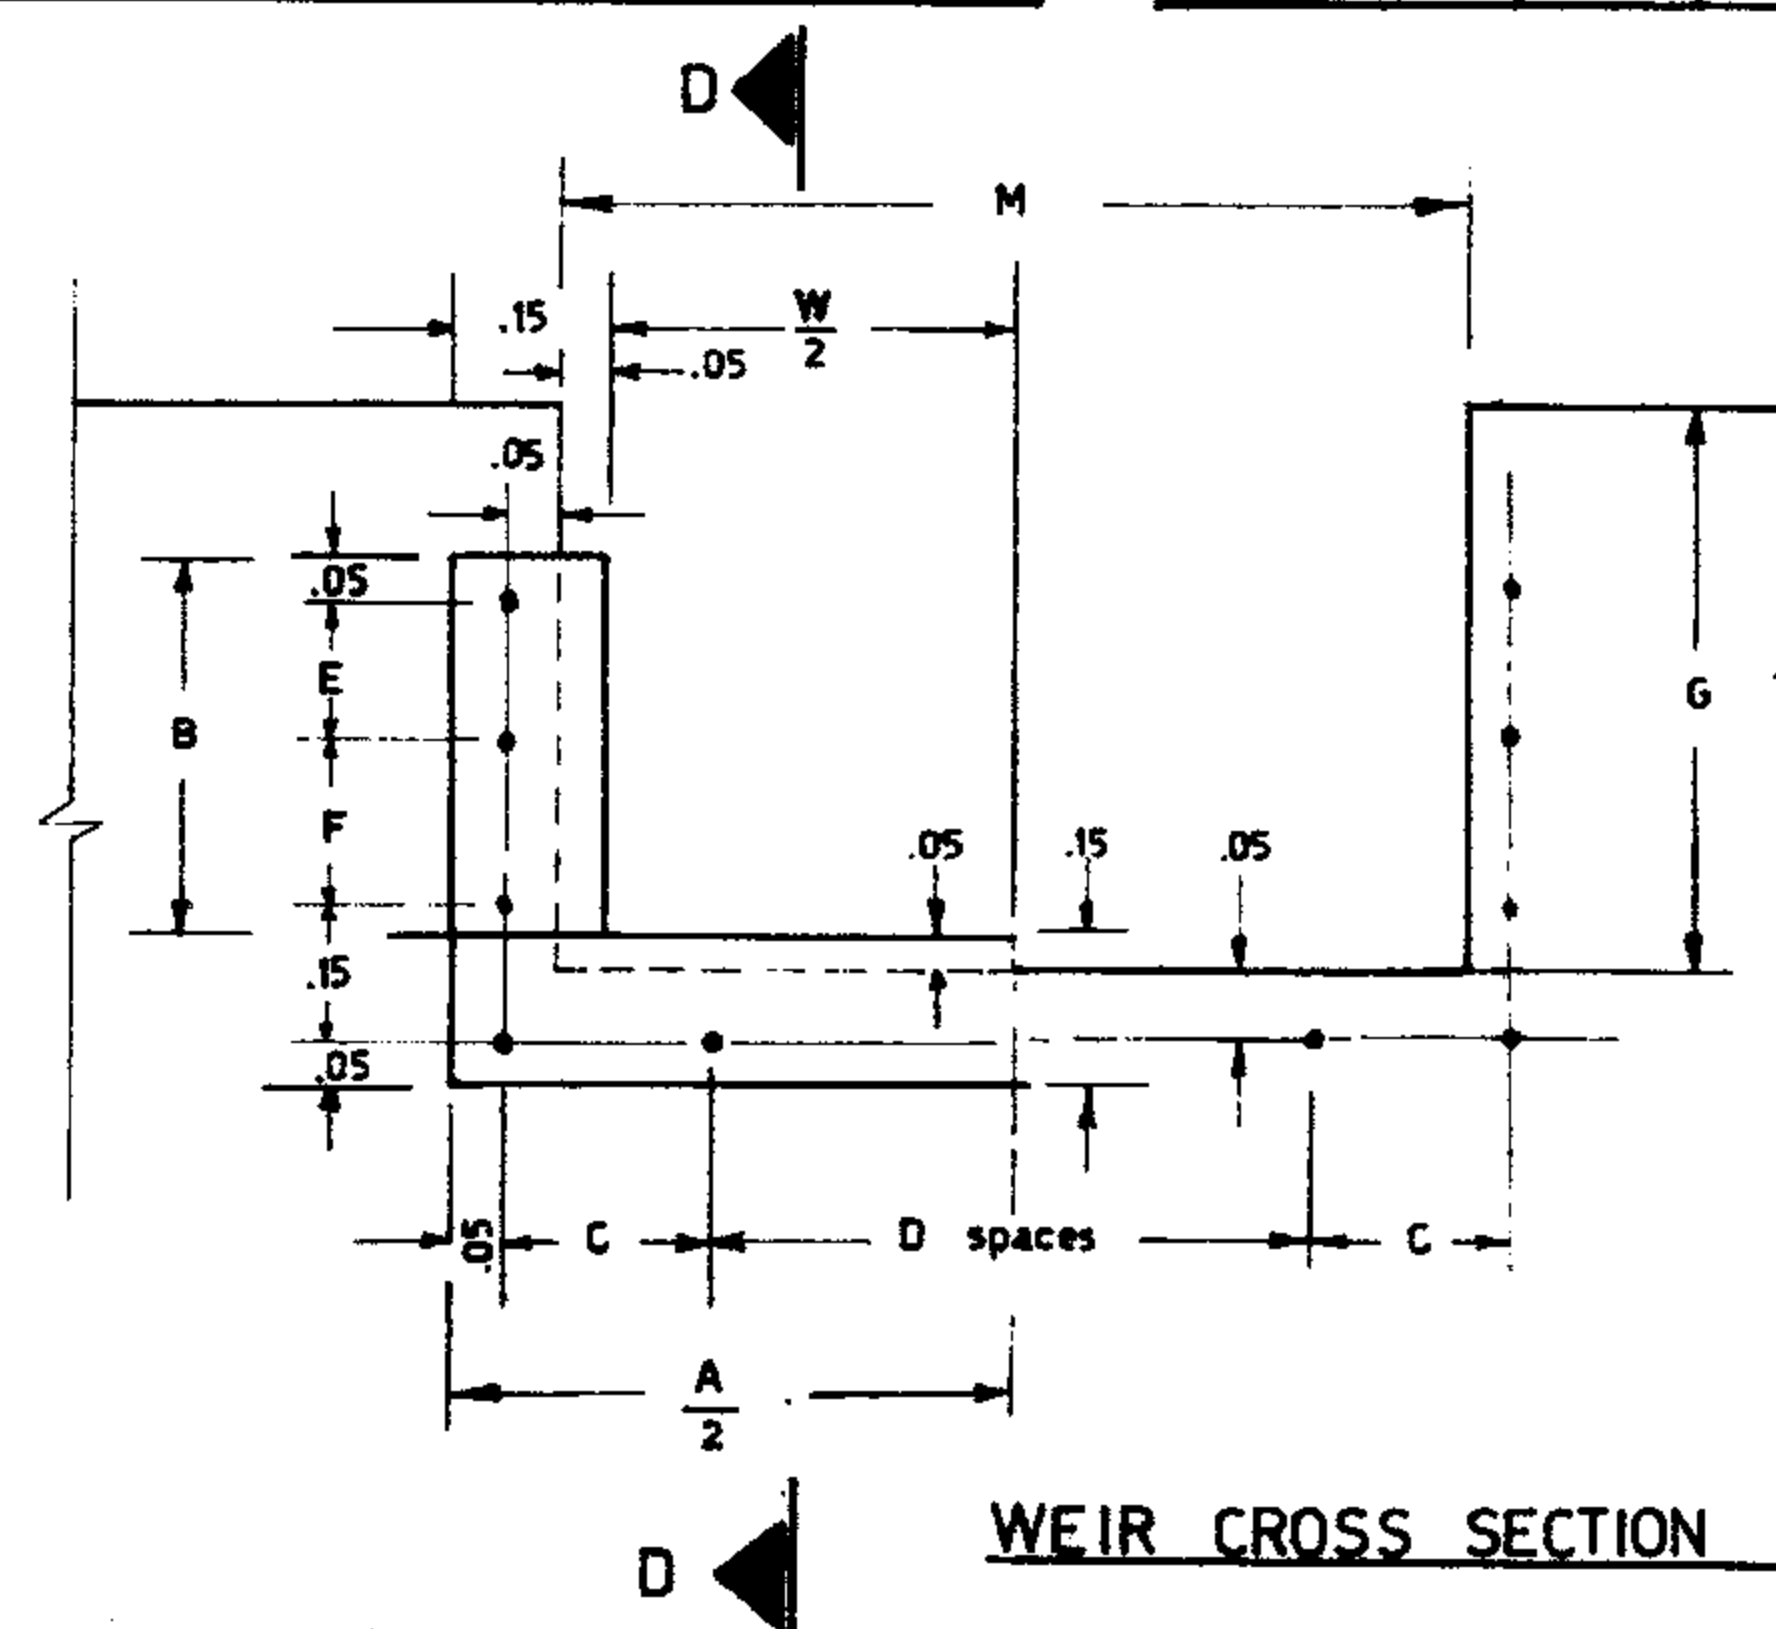

WEIR CROSS SECTION

NOTES:

- 1-Maximum allowable drop in water surface (ΔH) is 0.90 meter.
- 2-Minimum drop in water surface (ΔH) is equal to head (h), on the weir for designed discharge.
- 3-Dimension H has provided 0.30 meter freeboard over the h_{max} for Q_{max}.
- 4-Dimension H' provides min 0.30 meter freeboard for the following assumed y₂ values.

STR No	y ₂ (m)
R 30 & R 30A	0.15
R 40 & R 40A	0.20
R 50 & R 50A	0.25
R 60 & R 60A	0.30
R 70 & R 70A	0.35
R 80 & R 80A	0.40
R 90 & R 90A	0.45
R100 & R100A	0.50
R120 & R120A	0.60

REFERENCE DWGS:

Scale:

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG No 15/2/201

Approved:

Sheet No 2 of 6

Rev. No

CONTRACTED RECTANGULAR
WEIR
(DIMENSION TABLES)

ISLAMIC REPUBLIC OF EGYPT
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

SELECTING CIPOLLETTI WEIR STRUCTURE & CALCULATING REQUIRED DIMENSIONS AND WEIR SETTING.

STEP 1: Collect the following data:

- Q in m³/s
- Canal wide (b)
- Normal water depth at upstream y₁
- Normal water depth at downstream y₂
- Available drop between upstream & downstream of water surfaces ΔH
- Upstream canal invert elevation EL A₁
- Downstream canal invert elevation EL E

STEP 2: If Q ≤ 0.52 then select the structure having the least weir length for Q_{max} which can be adapted to available drop from standard Dimension table, then read dimensions W, L, H, H', b₁, k, e & T; GOTO step 3 otherwise: From general data table select the structure having the least weir length for Q_{max} which can be adapted to available drop, i.e., read W

STEP 3: From Rectangular weir table at appendix A of publication No. 106 read the value of head (h) corresponding to the given Q

- From the Anchor Bolt & weir blade Data, read the value of G

STEP 4: b₁ = 1.5 W

EL B = EL A + y₁ - 2h - h

EL C = EL B + 2h + G - 0.05

Not: if 2h < 0.30m Then use 2h = 0.30m

IF Q < 0.52 m/s then goto Step 7 otherwise

EL D = EL A + y₁ - (ΔH) - y₂ + 0.15

H = EL C - EL D

H' = 0.15 + y₂ + Structure freeboard

L = 3h + 2F

STEP 5: From the following table select the cutoff depth and then calculate K_{min}

3h (m)	cut off depth (m)	cut off thickness (m)
0-0.90	0.60	0.15
90-1.80	0.75	0.20
> 1.80	0.90	0.20

K = Cut off depth - (EL B - EL D)

STEP 6: Calculate weighted creep length (W.C.L) by lane method

W.C.L = (EL B - EL D) + K + 2(K - 0.15) + (K - Protection thickness)

Calculate (ΔWS) for upstream water ponded to weir crest and downstream water at canal invert ΔWS = (EL B + 2h) - (EL D + 0.15) percolation factor = W.C.L / ΔWS

IF calculated percolation > recommended percolation factor GOTO Step 8, otherwise increase K and goto Step 6

STEP 7: EL D = EL C - H

t = 0.15 m

STEP 8: T = b₁ + 3(2h + G - 0.05) + 2K

STEP 9: Use Anchor Bolt and weir blade Data from the corresponding tables.

Quantities:

Q < 0.56 m³/s


STR No	30	30A	40	40A	50	50A	60	60A	70	70A	80	80A	90	90A	100	100A	120	120A
R/Bar kg	99.72	179.16	136.28	313.79	120.21	322.85	150.42	413.34	158.20	427.64	177.94	469.03	212.48	484.88	222.41	449.76	278.32	607.35
Conc.	0.96	1.67	1.14	2.21	1.24	2.29	1.48	3.00	1.69	3.22	1.88	3.60	2.16	3.94	2.61	4.35	3.31	5.14
Form	8.65	13.34	10.01	15.68	10.82	16.64	12.70	21.97	17.09	23.20	16.60	24.50	18.46	25.84	19.84	27.60	24.20	27.59

STANDARD DIMENSIONS for Q < 0.56 m³/s

STR No	W (m)	Q _{max} (m ³ /s)	h _{max} (m)	ΔH for Q _{max}		L (m)	H (m)	H' (m)	b ₁ (m)	k (m)	e (m)	T (m)
				min	max							
R 30	30	.0176	10	10		1.20	.75	60	45	45	45	3.10
R 30A	30	.0176	10		90	2.10	1.50	60	45	45	45	3.10
R 40	40	.0349	13	13		1.20	.85	65	60	45	45	3.60
R 40A	40	.0349	13		90	2.20	1.60	65	60	45	45	3.60
R 50	50	.0595	16	16		1.20	.90	70	75	45	45	4.10
R 50A	50	.0595	16		90	2.30	1.65	70	75	45	45	4.10
R 60	60	.0998	20	20		1.20	1.00	75	90	45	45	4.60
R 60A	60	.0998	20		90	2.40	1.70	75	90	45	60	4.60
R 70	70	.1435	23	23		1.30	1.10	80	1.05	45	60	5.00
R 70A	70	.1435	23		90	2.50	1.75	80	1.05	45	60	5.00
R 80	80	.1972	26	26		1.45	1.15	85	1.20	45	60	5.50
R 80A	80	.1972	26		90	2.60	1.80	85	1.20	45	60	5.50
R 90	90	.2749	30	30		1.60	1.25	90	1.35	45	60	6.00
R 90A	90	.2749	30		90	2.70	1.85	90	1.35	45	60	6.00
R 100	100	.3524	33	33		1.75	1.35	95	1.50	60	60	6.60
R 100A	100	.3524	33		90	2.80	1.90	95	1.50	60	60	6.60
R 120	1.20	.5644	40	40		2.00	1.50	1.05	1.80	60	60	7.50
R 120A	1.20	.5644	40		90	3.00	2.00	1.05	1.80	60	60	7.50


ANCHOR BOLT AND WEIR BLADE DATA for Q < 0.56 m³/s

STR No	W (m)	M (m)	G (m)	A (m)	B (m)	C (m)	D No @ (m)	E (m)	F (m)	Total No of holes
R 30 & R 30A	30	.605	.45	.534	.20	.20	—	.10	—	7
R 40 & R 40A	40	.730	.50	.634	.25	.25	—	.15	—	7
R 50 & R 50A	50	.855	.55	.734	.25	.30	—	.15	—	7
R 60 & R 60A	60	.980	.60	.834	.30	.20	1 @ .30	.20	—	8
R 70 & R 70A	70	1.080	.60	.934	.35	.25	1 @ .30	.25	—	8
R 80 & R 80A	80	1.205	.65	1.034	.35	.25	2 @ .20	.25	—	9
R 90 & R 90A	90	1.330	.70	1.134	.40	.25	2 @ .25	.30	—	9
R 100 & R 100A	100	1.430	.70	1.234	.45	.30	2 @ .25	.35	—	9
R 120 & R 120A	1.20	1.640	.80	1.434	.50	.25	4 @ .20	.20	20	13

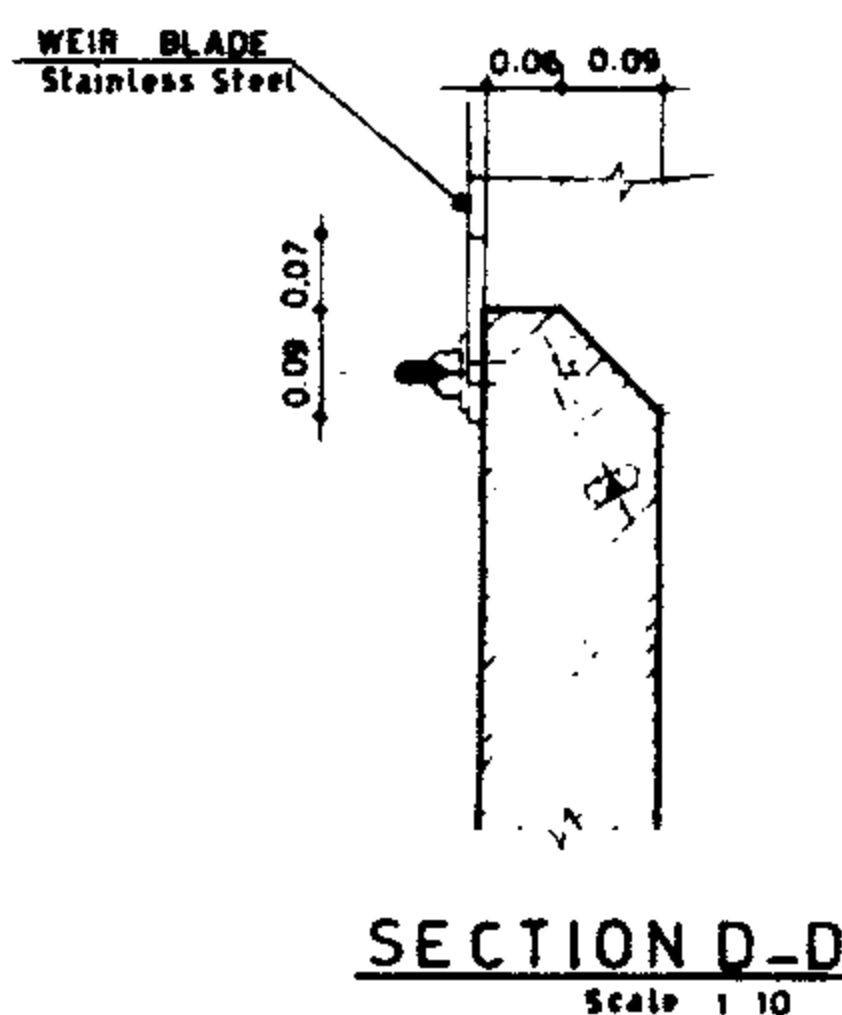

ANCHOR BOLT AND WEIR BLADE DATA for Q > 0.56 m³/s

STR No	W (m)	M (m)	G (m)	A (m)	B (m)	C (m)	D No @ (m)	E (m)	F (m)	Total No of holes
R 140 & R 140A	1.40	1.905	.85	1.634	.55	.35	4 @ .20	.20	.25	13
R 160 & R 160A	1.60	2.130	.90	1.834	.65	.35	4 @ .25	.25	.30	13
R 180 & R 180A	1.80	2.380	1.00	2.034	.70	.35	4 @ .30	.30	.30	13
R 200 & R 200A	2.00	2.580	1.00	2.234	.70	.30	6 @ .25	.30	.30	15
R 220 & R 220A	2.20	2.780	1.00	2.434	.70	.25	6 @ .30	.30	.30	15
R 240 & R 240A	2.40	2.980	1.00	2.634	.70	.35	6 @ .30	.30	.30	15
R 260 & R 260A	2.60	3.180	1.00	2.834	.70	.35	8 @ .25	.30	.30	17
R 280 & R 280A	2.80	3.380	1.00	3.034	.70	.25	8 @ .30	.30	.30	17
R 300 & R 300A	3.00	3.580	1.00	3.234	.70	.35	8 @ .30	.30	.30	17

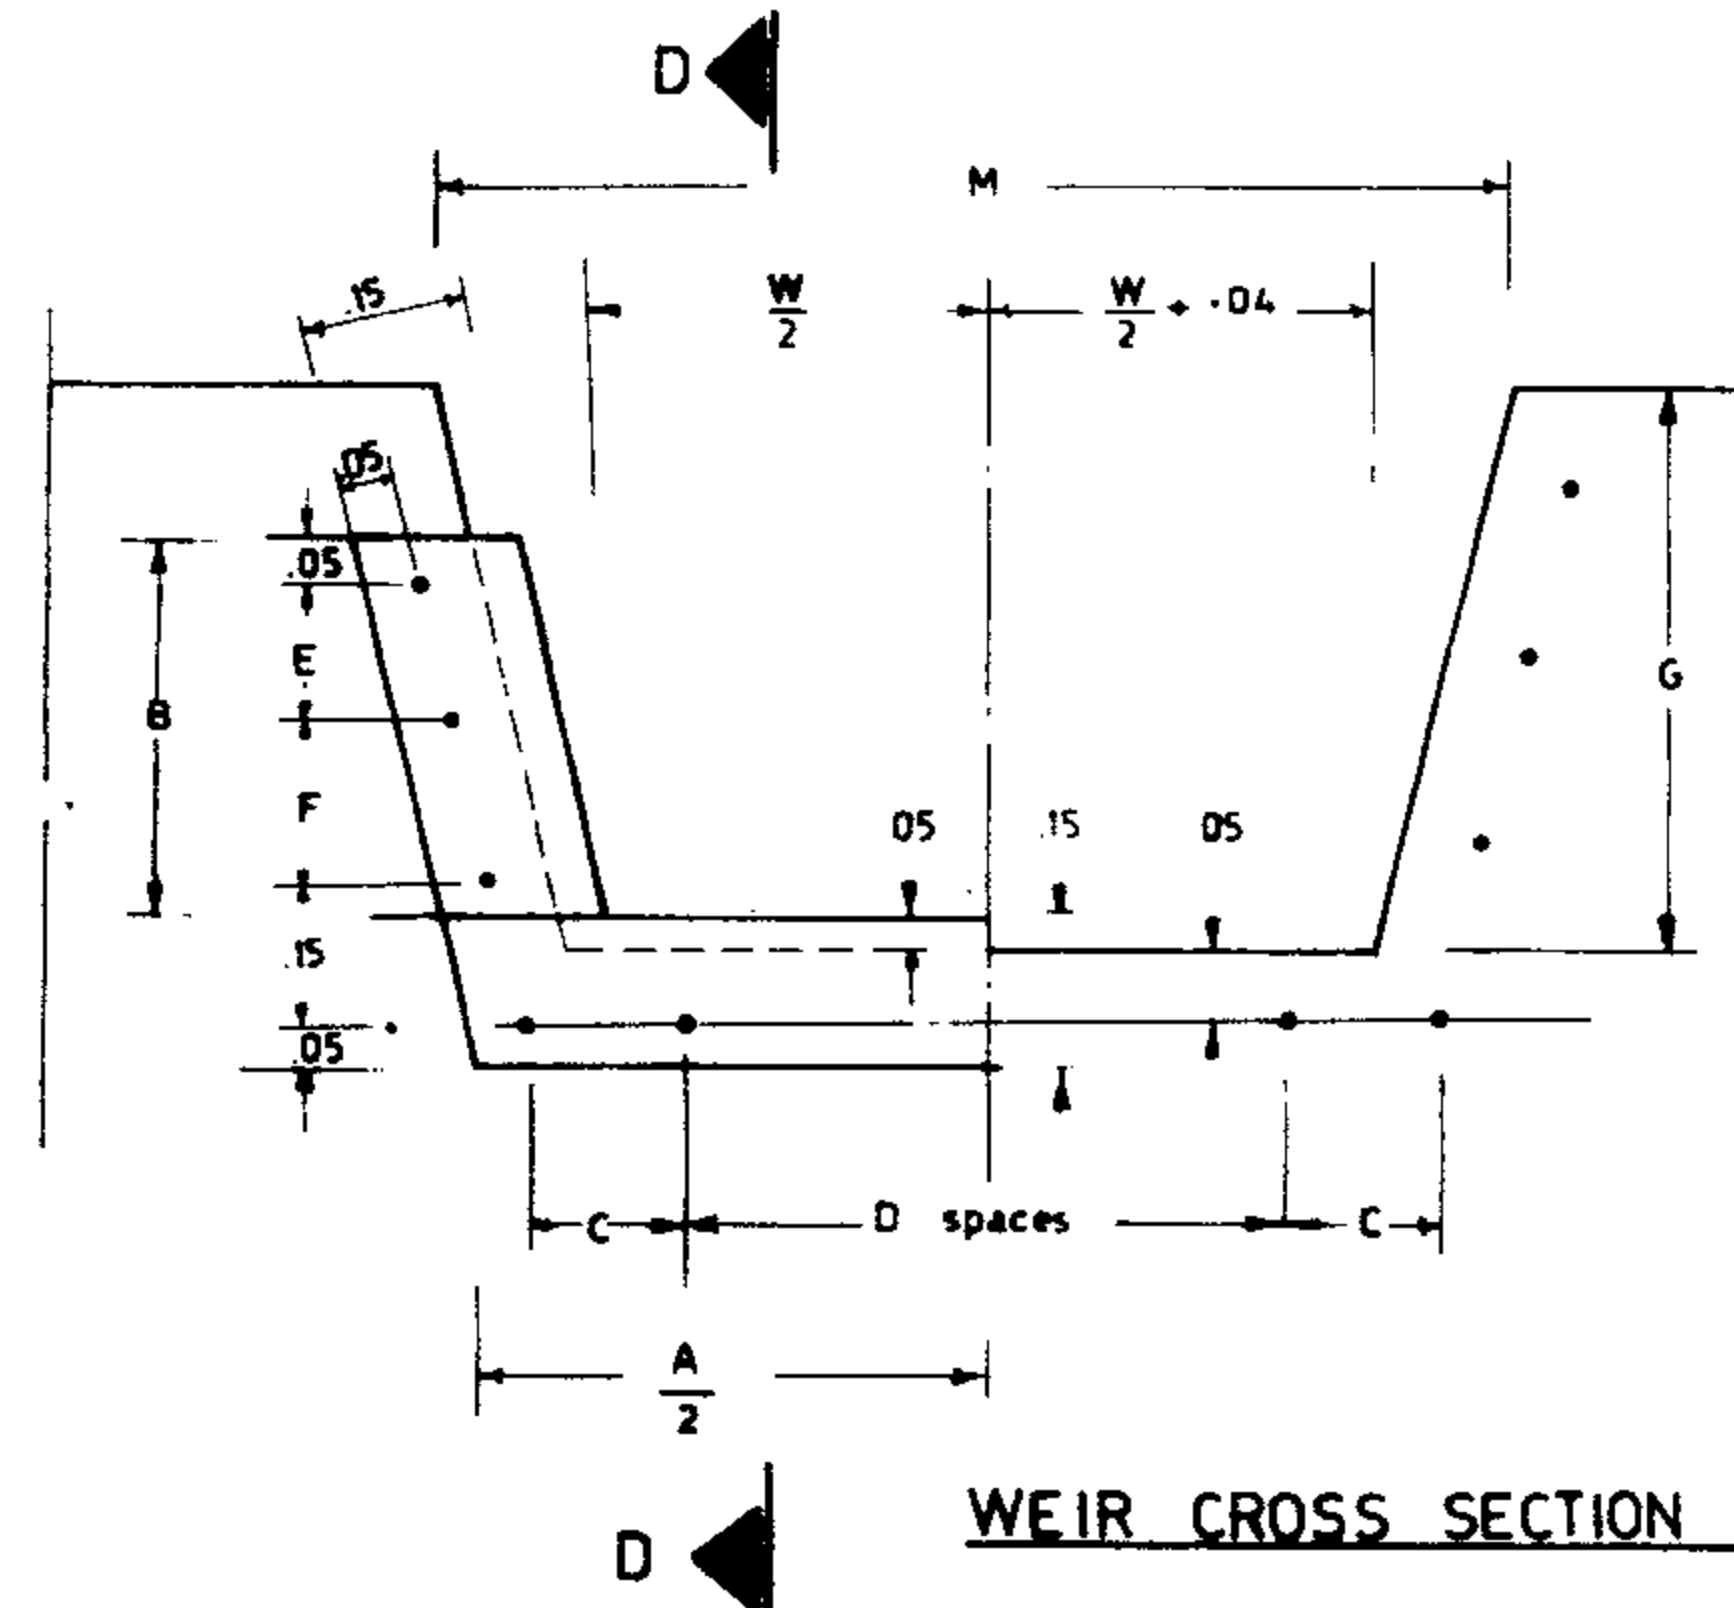

NOTES:

- 1-Maximum allowable drop in water surface (ΔH) is 0.90 meter.
- 2-Minimum drop in water surface (ΔH) is equal to head (h) on the weir for designed discharge.
- 3-Dimension H has provided 0.30 meter freeboard over the h_{max} for Q_{max}.
- 4-Dimension H' provides min 0.30 meter freeboard for the following assumed y₂ values

STR No	y ₂ (m)
R 30 & R 30A	0.15
R 40 & R 40A	0.20
R 50 & R 50A	0.25
R 60 & R 60A	0.30
R 70 & R 70A	0.35
R 80 & R 80A	0.40
R 90 & R 90A	0.45
R 100 & R 100A	0.50
R 120 & R 120A	0.60

REFERENCE DWGS:

Scale:

IRRIGATION & DRAINAGE STANDARDS

Data:

DWG No 15/2/202


Approved:

Sheet No 3 of 6


Rev. No

CONTRACTED CIPOLLETTI WEIR (DIMENSION TABLES)


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND STANDARD BUREAU

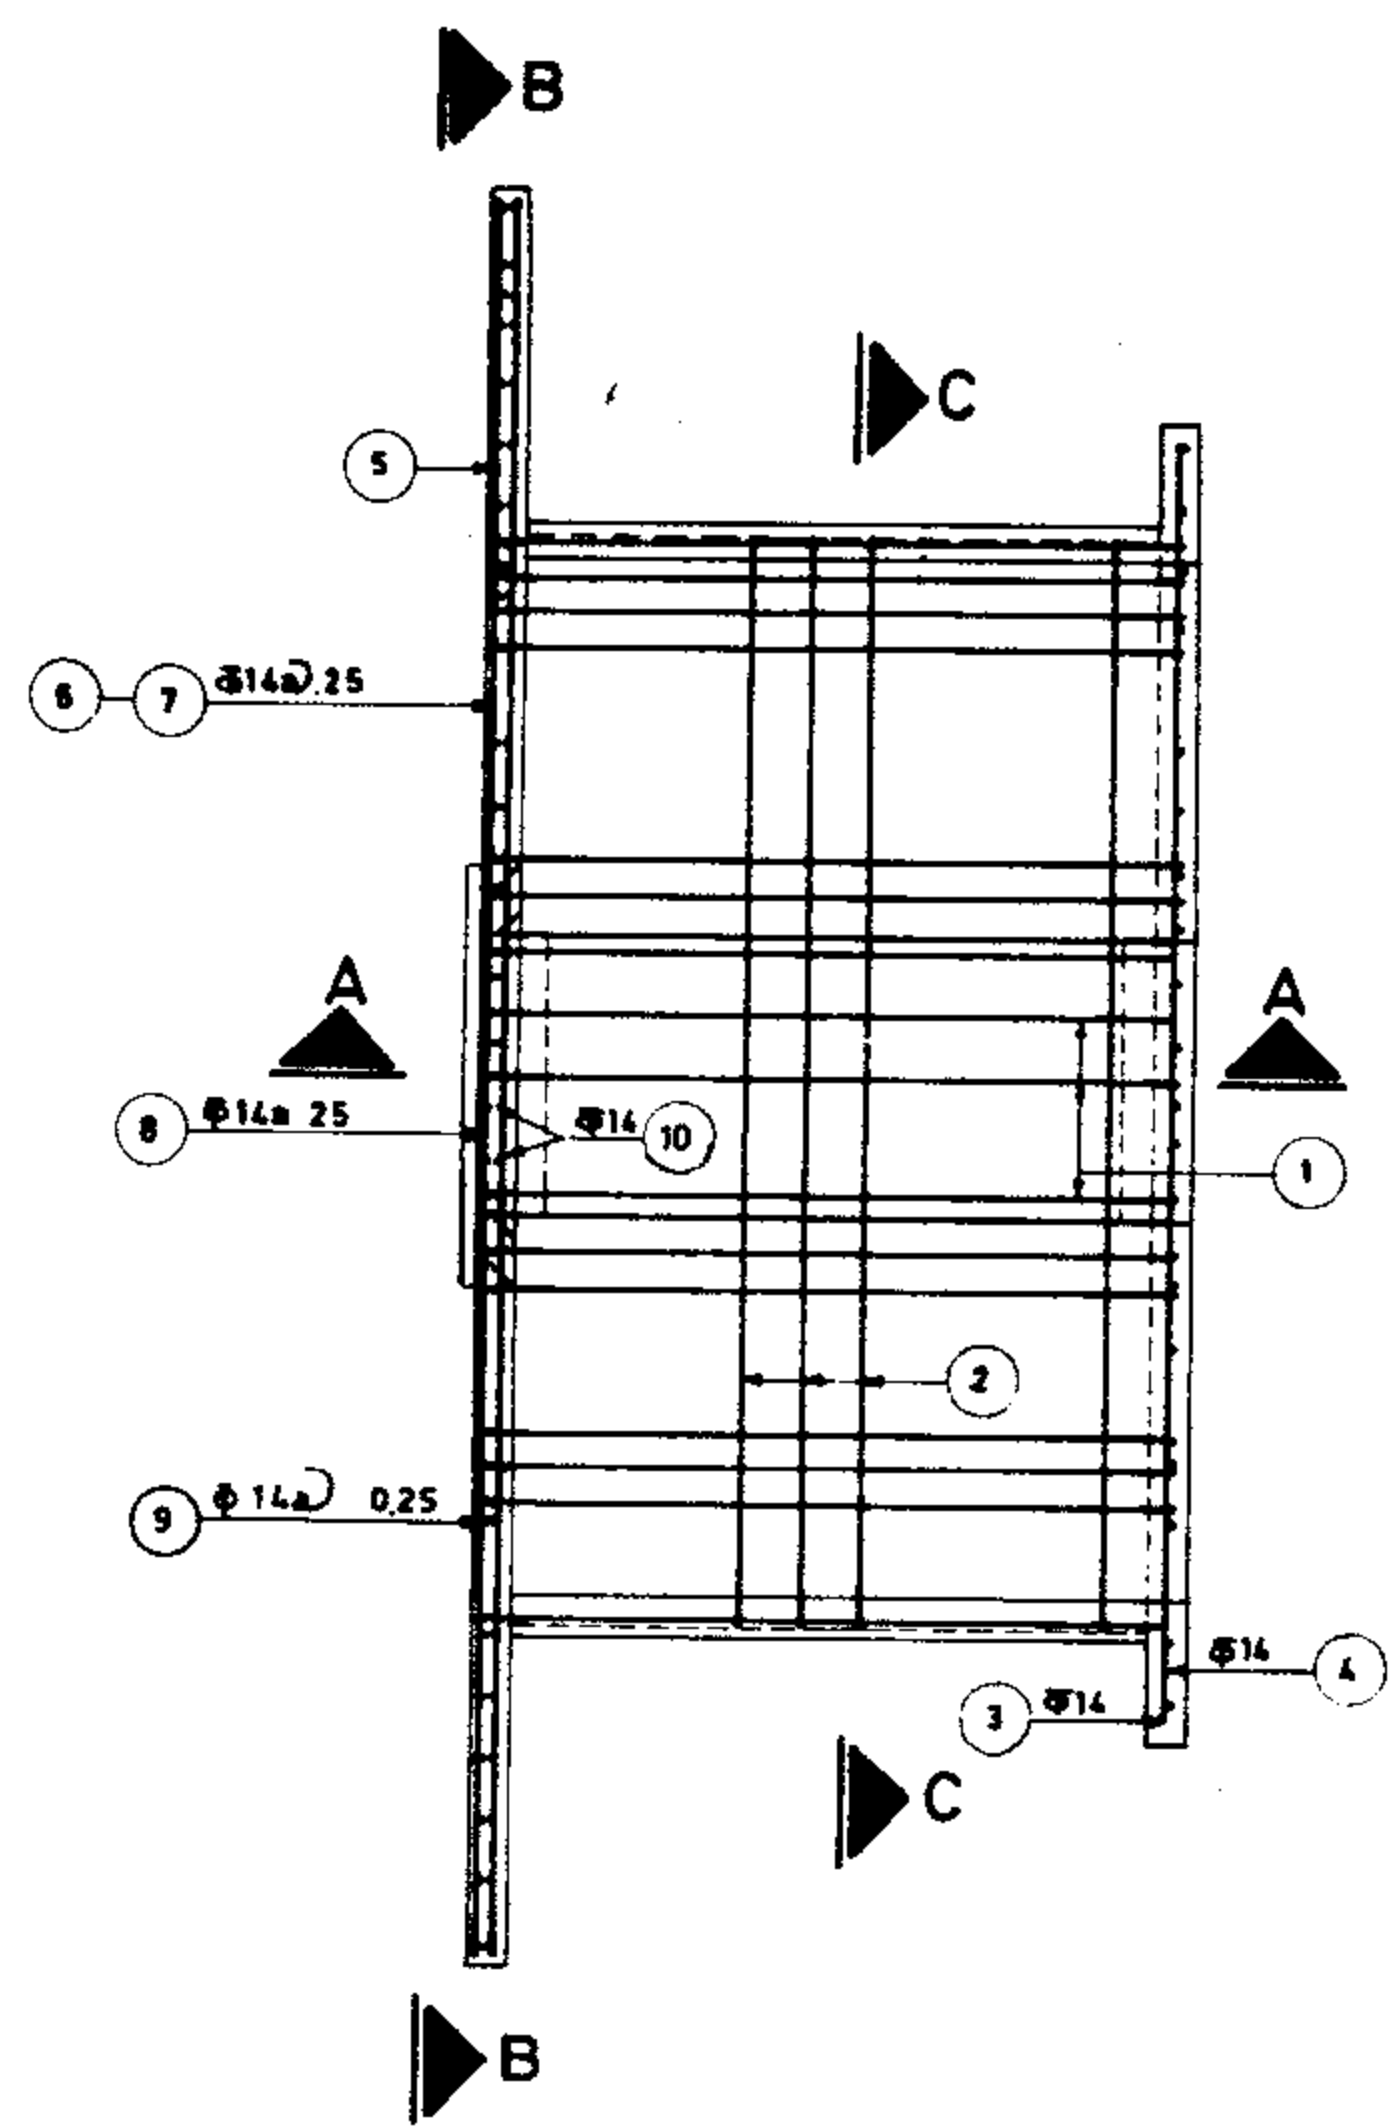


PLAN
Scale 1:50
H > 1.50

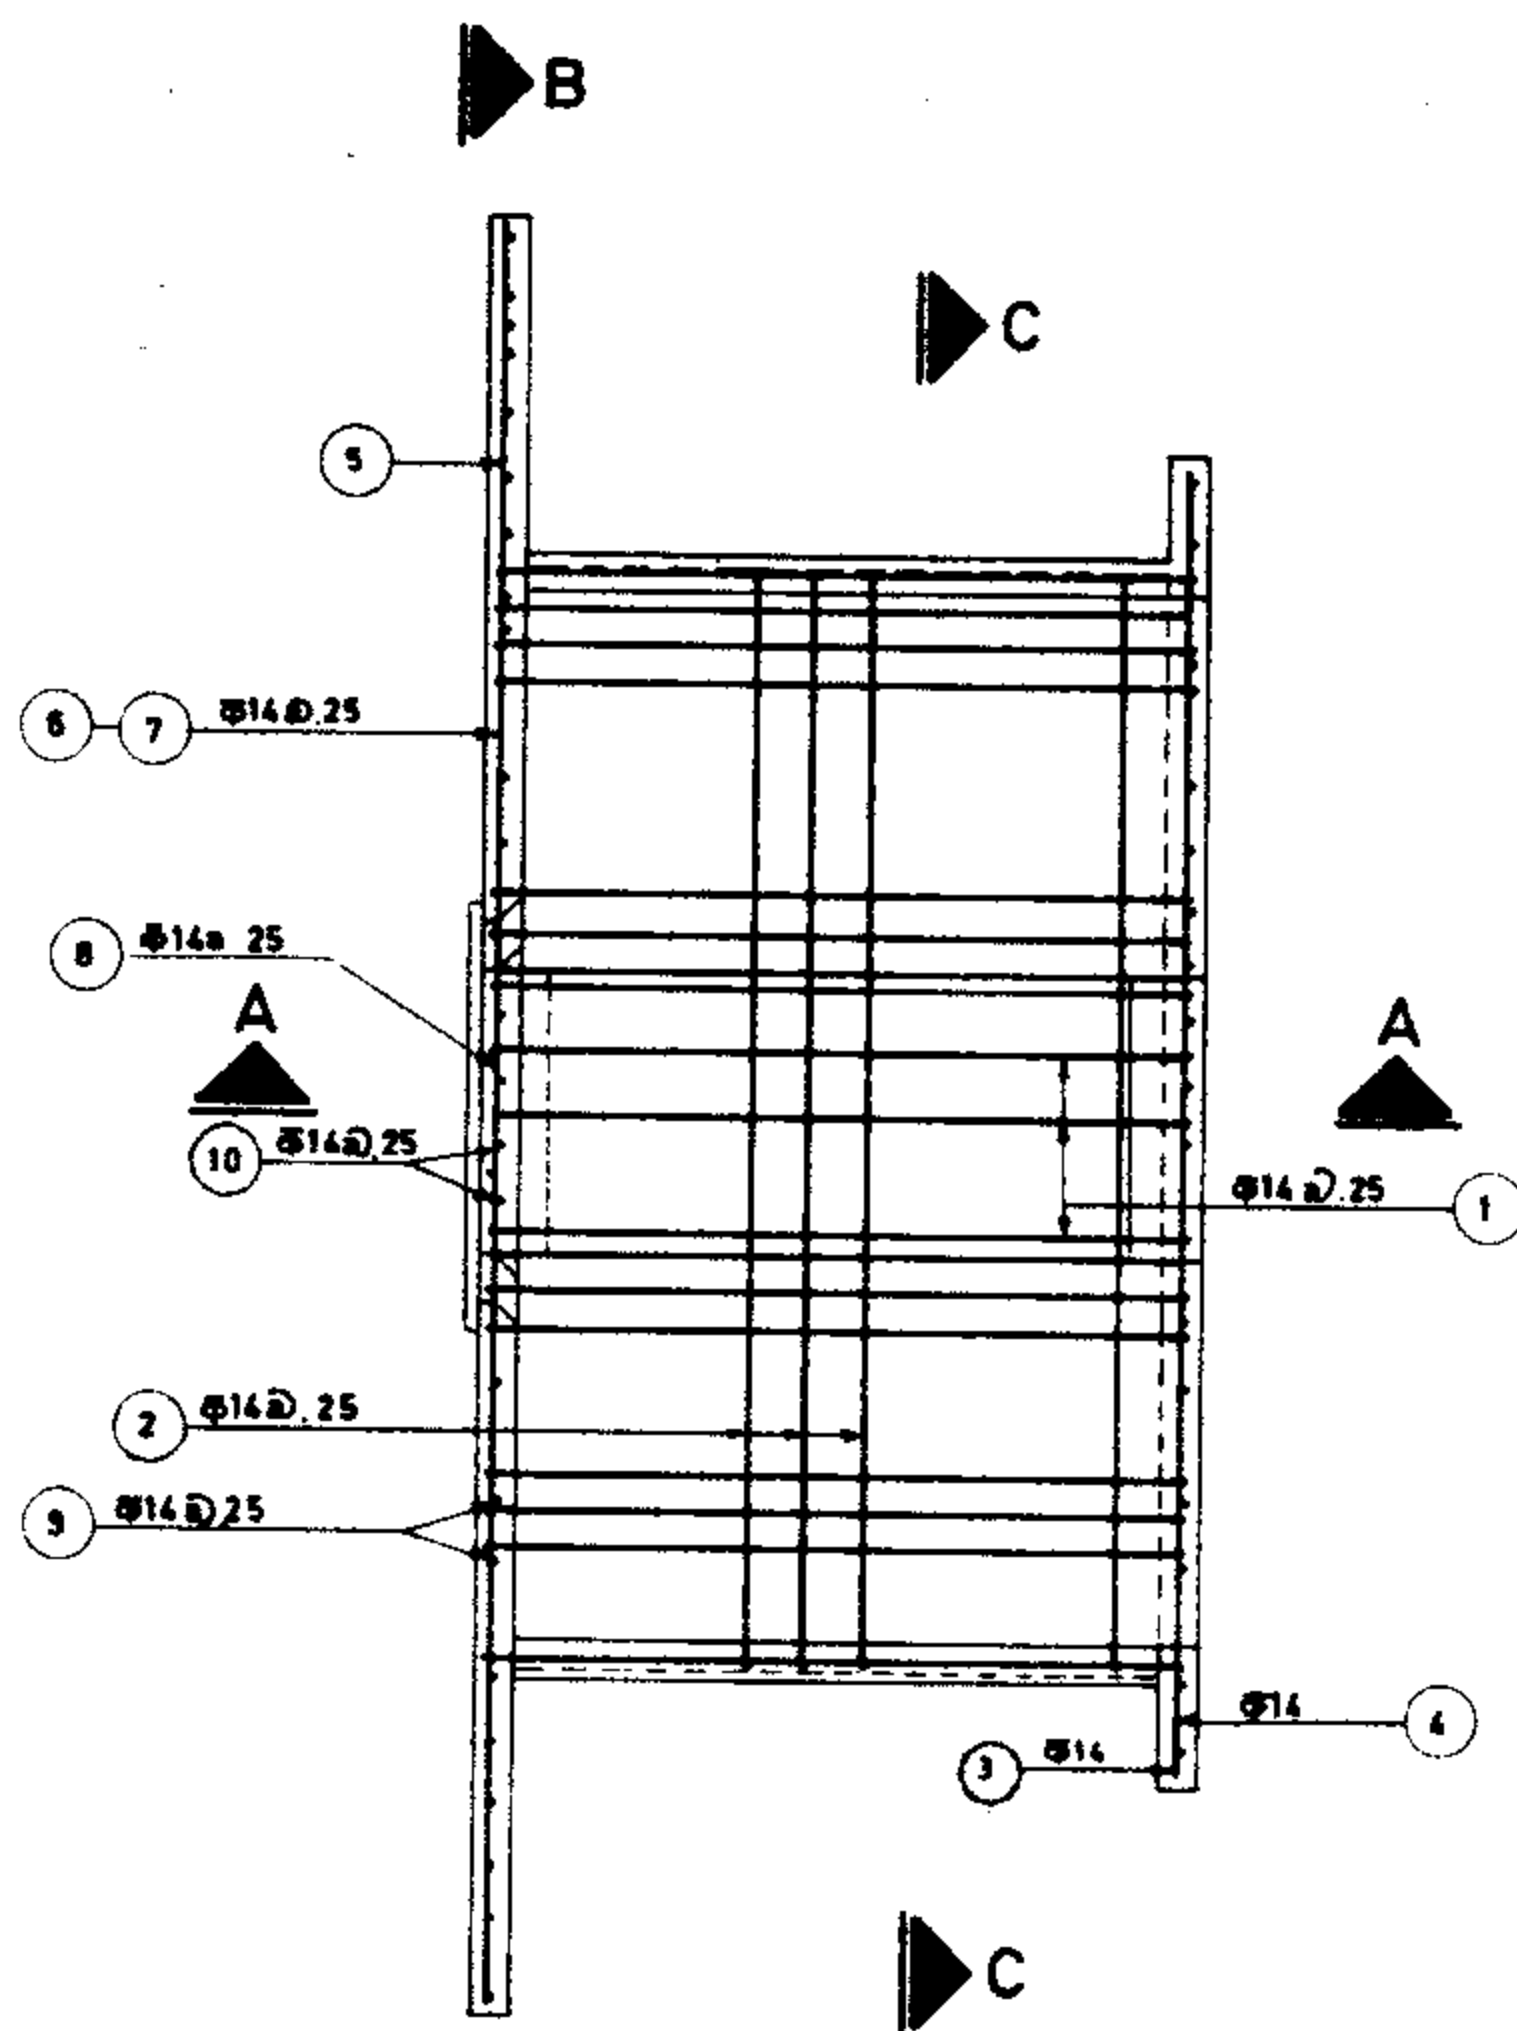


PLAN
Scale 1:50
H ≤ 1.50

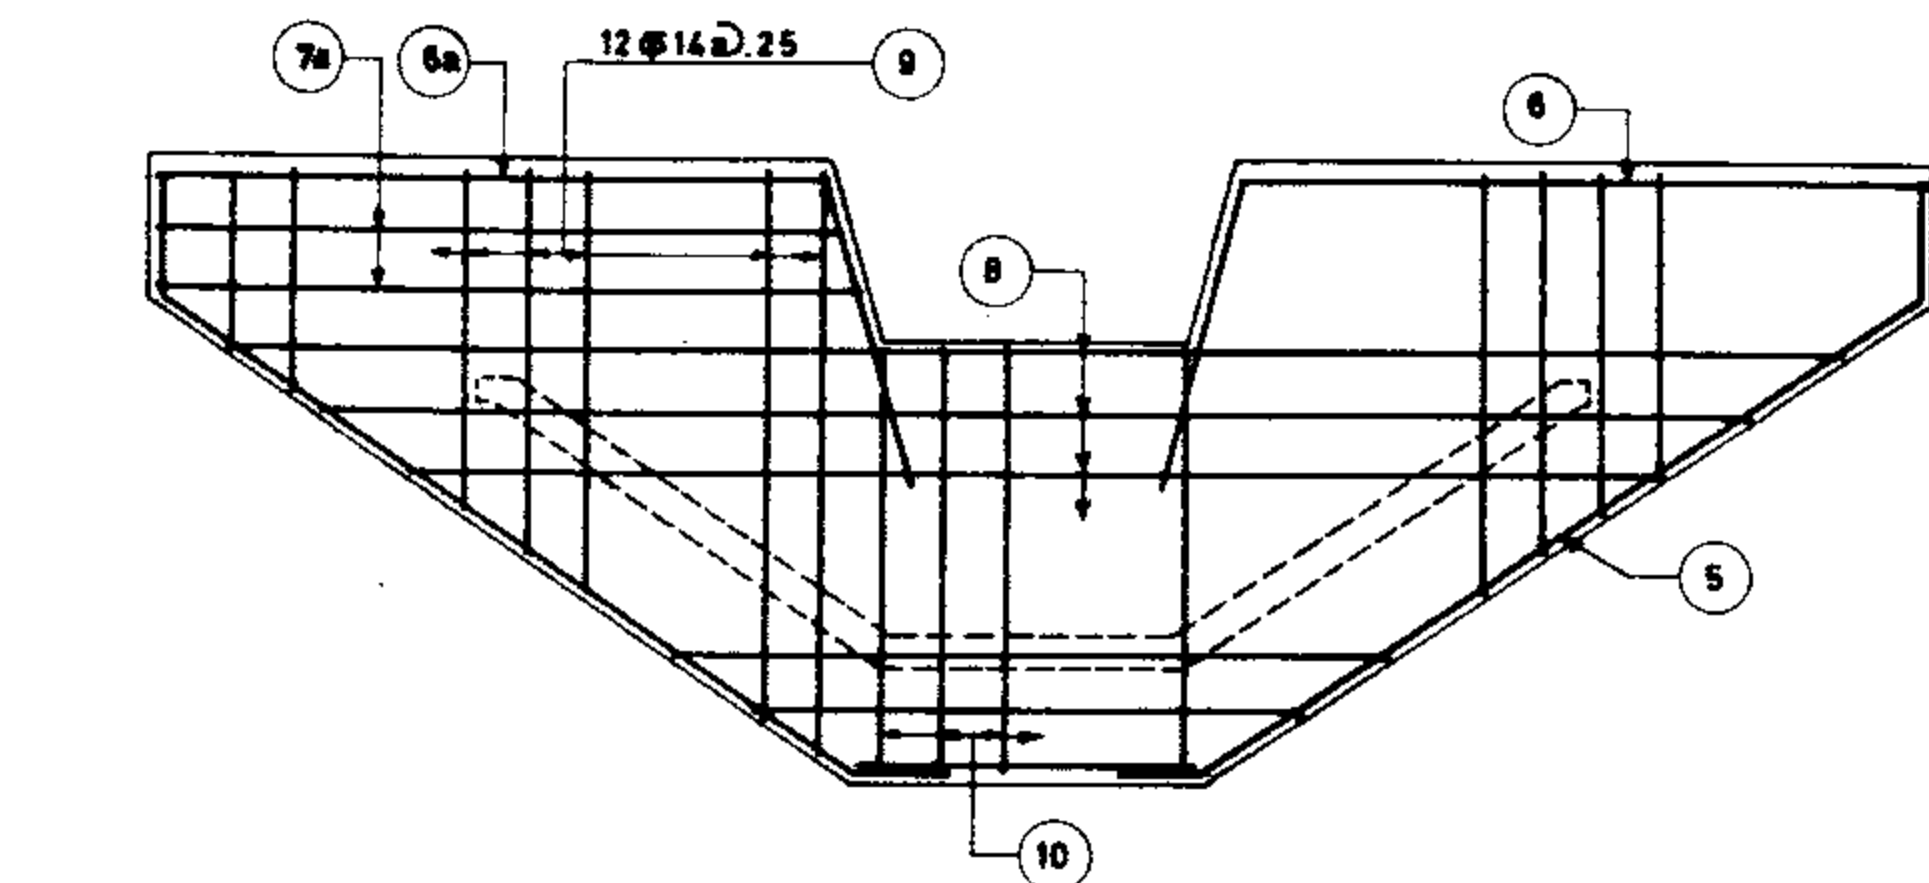


SECTION B_B
CIPOLLETTI WEIR Scale 1:50

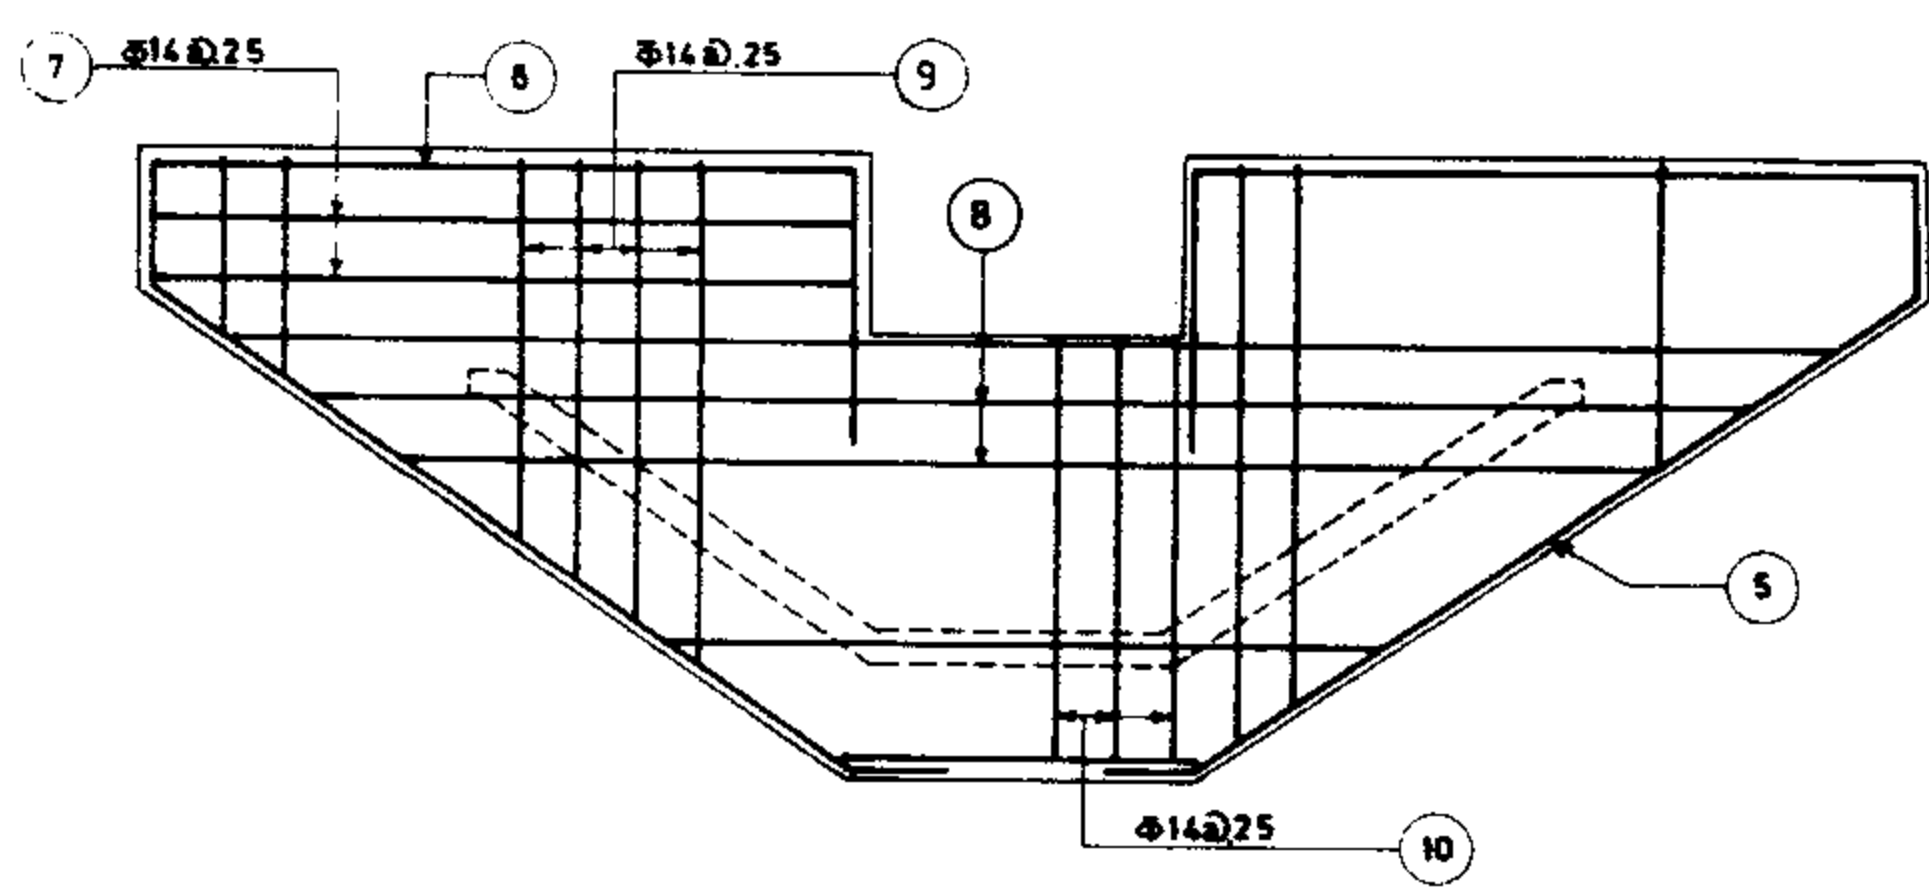


SECTION B_B
RECTANGULAR WEIR Scale 1:50

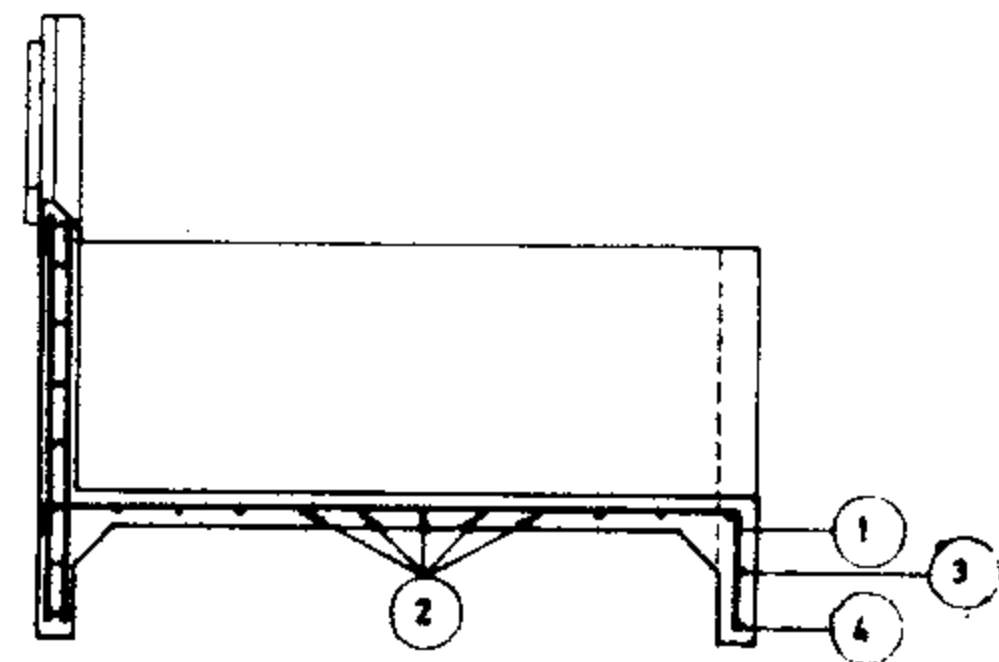

SECTION A_A
Scale 1:50
H > 1.50

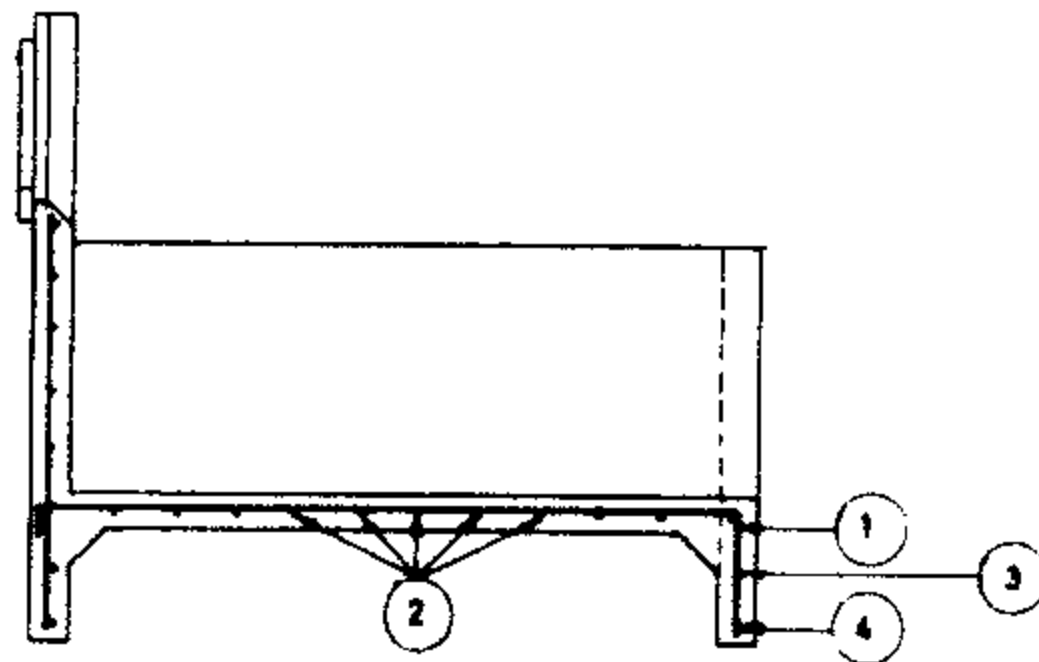

SECTION A_A
Scale 1:50
H ≤ 1.50

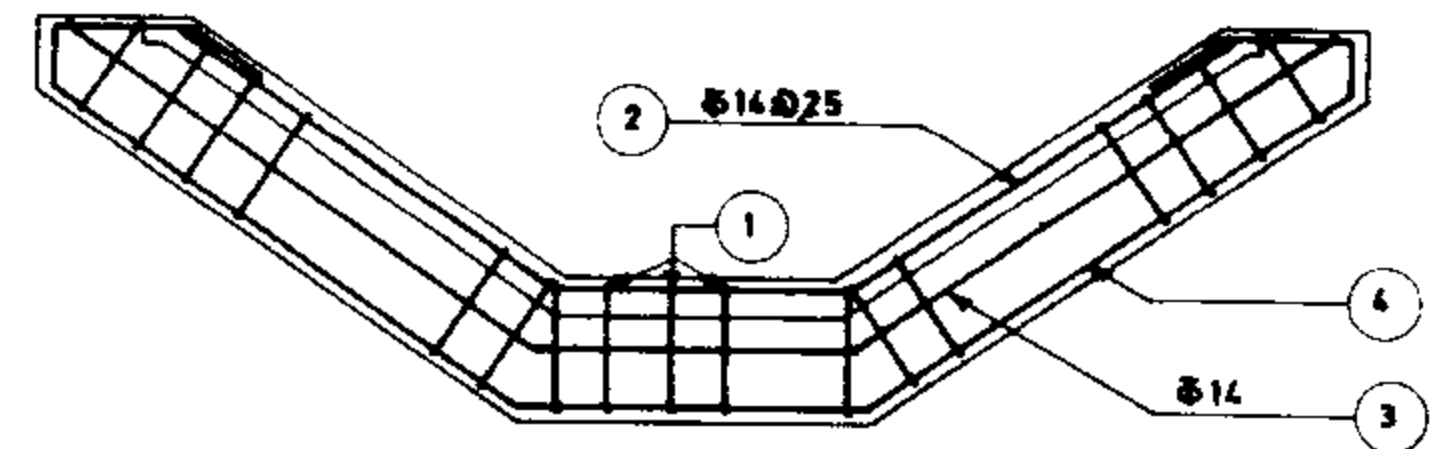

SECTION C_C
Scale 1:50

REFERENCE DWGS: For plan and section see dwg No 15/2/1/01
For list of reinforcement see dwg No 15/2/3/02 & 15/2/3/03

Scale 1:50	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. No. 15/2/3/01	
Approved:	Sheet No. 4 of 6	Rev. No
CONTRACTED CIPOLLETTI AND RECTANGULAR WEIR REINFORCEMENT PLAN & SECTION		

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND STANDARDS BUREAU

STR. 30

Pos	No	FORM	UNIT LENG	TOTAL LENG
1	11		1.67	18.37
2	6		2.51	15.06
3	1		3.39	3.39
4	1		4.89	4.89
5	2		1.85	3.70
6	2		2.23	4.46
6a	2		2.10	4.20
7	4		1.13	4.52
7a	4		1.23	4.92
8	4		1.58	6.32
9	12		0.68	8.16
10	1		0.65	0.65
				69.52
				69.52 x 1.21 = 84.12 kg

STR. 30A

Pos	No	FORM	UNIT LENG	TOTAL LENG
1	11		2.57	28.27
2	10		2.51	25.10
3	1		3.39	3.39
4	1		4.89	4.89
5	2		1.85	3.70
6	2		2.23	4.46
6a	2		2.10	4.20
7	4		1.28	5.12
7a	4		1.38	5.52
8	7		1.80	12.60
9	12		1.43	17.16
10	1		1.40	1.40
				106.09
				106.09 x 1.21 = 128.37 kg

STR. 40

Pos	No	FORM	UNIT LENG	TOTAL LENG
1	13		1.67	21.71
2	6		2.81	16.86
3	1		3.63	3.63
4	1		5.17	5.17
5	2		2.10	4.20
6	2		2.43	4.86
6a	2		2.30	4.60
7	4		1.29	5.16
7a	4		1.39	5.55
8	4		1.75	7.00
9	14		0.71	9.94
10	1		0.70	0.70
				79.23
				79.23 x 1.21 = 95.87 kg

STR. 40A

Pos	No	FORM	UNIT LENG	TOTAL LENG
1	13		2.67	34.71
2	10		2.81	28.10
3	1		3.63	3.63
4	1		5.17	5.17
5	4		2.10	8.40
6	4		2.48	9.92
6a	4		2.30	4.60
7	8		1.48	11.84
7a	8		1.58	12.64
8	2x7		2.10	29.40
9	28		1.45	40.60
10	1		1.45	1.45
				173.22
				173.22 x 1.21 = 209.60 kg

STR. 50

Pos	No	FORM	UNIT LENG	TOTAL LENG
1	13		1.67	21.71
2	6		3.07	18.42
3	1		3.95	3.95
4	1		5.45	5.45
5	2		2.33	4.66
6	2		2.73	5.46
6a	2		2.50	5.00
7	6		1.22	7.32
7a	6		1.26	7.56
8	4		1.85	7.40
9	16		0.69	11.04
10	2		0.70	1.40
				86.81
				86.81 x 1.21 = 105.04 kg

STR. 50 A

Pos	No	FORM	UNIT LENG	TOTAL LENG
1	13		2.77	36.01
2	11		3.07	33.77
3	1		3.95	3.95
4	1		5.45	5.45
5	4		2.33	9.32
6	4		2.73	10.92
6a	4		2.50	10.00
7	12		1.68	20.16
7a	12		1.81	21.72
8	2x7		2.40	33.60
9	32		1.45	46.40
10	1		1.45	1.45
				201.03
				201.03 x 1.21 = 243.25 kg

STR. 60

Pos	No	FORM	UNIT LENG	TOTAL LENG
1	15		1.42	21.30
2	6		3.35	20.10
3	1		4.53	4.53
4	1		6.15	6.15
5	2		2.60	5.20
6	2		2.98	5.96
6a	2		2.65	5.30
7	6		1.79	8.34
7a	6		1.52	9.12
8	4		2.03	8.12
9	18		0.83	14.94
10	2		0.75	1.50
				96.14
				96.14 x 1.21 = 116.33 kg

STR. 60A

Pos	No	FORM	UNIT LENG	TOTAL LENG
1	15		3.02	45.30
2	11		3.35	36.85
3	1		4.53	4.53
4	1		6.52	6.52
5	4		2.60	10.40
6	4		2.98	11.92
6a	4		2.65	10.60
7	12		1.88	22.56
7a	12		2.01	24.12
8	2x7		2.70	37.80
9	36		1.43	51.48
10	1		1.45	1.45
				228.81
				228.81 x 1.21 = 276.86 kg

STR. 70

Pos	No	FORM	UNIT LENG	TOTAL LENG
1	16		1.92	30.72
2	6		3.63	21.78
3	1		4.81	4.81
4	1		6.80	6.80
5	2		2.77	5.54
6	2		3.15	6.30
6a	2		2.80	5.60
7	6		1.50	9.00
7a	6		1.63	9.78
8	4		2.28	9.12
9	18		0.78	14.04
10	3		0.85	2.55
				110.66
				110.66 x 1.21 = 133.90 kg

NOTE:
 1. Bar bending lists for both rectangular and cipolletti weirs are identical.
 2. Total weight only for position No 6,7 has been considered, if position 6a,7a is to be used required adjustment should be made accordingly.

ALL BARS ARE Ø 14 (1.21 kg/m)

REFERENCE DWGS: For reinforcement see dwg. No. 15/2/3/01
 For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale: IRRIGATION & DRAINAGE STANDARDS
 Date: DWG No 15/2/3/02
 Approved: Sheet No 5 of 6 Rev. No

CONTRACTED WEIRS
 LIST OF REINFORCEMENT
 STR 30 TO STR 70

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & B. ET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

Pos	No	FORM	UNIT LENG	TOTAL LENG
1	16		3.12	49.92
2	11		3.63	39.93
3	1		4.81	4.81
4	1		6.80	6.80
5	4		2.77	11.08
6	4		3.15	12.60
6a	4		2.80	11.20
7	12		2.00	24.00
7a	12		2.13	25.56
8	2x7		2.95	41.30
9	40		1.43	57.20
10	2		1.50	3.00
				250.64
$250.64 \times 1.21 = 303.27 \text{ kg}$				

Pos	No	FORM	UNIT LENG	TOTAL LENG
1	16		2.07	33.12
2	7		3.91	27.37
3	1		5.15	5.15
4	1		7.10	7.10
5	2		3.00	6.00
6	2		3.43	6.86
6a	2		3.00	6.00
7	6		1.72	10.29
7a	6		1.66	9.96
8	5		2.38	11.90
9	20		0.75	15.00
10	3		0.85	2.55
				125.34
$125.34 \times 1.21 = 151.66 \text{ kg}$				

Pos	No	FORM	UNIT LENG	TOTAL LENG
1	16		3.22	51.52
2	12		3.91	46.92
3	1		5.15	5.15
4	1		7.10	7.10
5	4		3.00	12.00
6	4		3.43	13.72
6a	4		3.00	12.00
7	12		2.28	27.36
7a	12		2.41	28.92
8	2x7		3.25	45.50
9	44		1.41	62.04
10	2		1.50	3.00
				274.31
$274.31 \times 1.21 = 331.92 \text{ kg}$				

Pos	No	FORM	UNIT LENG	TOTAL LENG
1	18		2.22	39.96
2	7		4.19	29.33
3	1		5.37	5.37
4	1		7.36	7.36
5	2		3.25	6.50
6	2		3.62	7.24
6a	2		3.20	6.40
7	6		1.86	11.16
7a	6		1.80	10.80
8	5		2.55	12.75
9	22		0.80	17.60
10	4		0.90	3.60
				140.87
$140.87 \times 1.21 = 170.45 \text{ kg}$				

Pos	No	FORM	UNIT LENG	TOTAL LENG
1	18		3.32	59.76
2	12		4.19	50.28
3	1		5.37	5.37
4	1		7.36	7.36
5	4		3.25	13.00
6	4		3.62	14.48
6a	4		3.20	6.40
7	12		2.42	29.04
7a	12		2.55	30.60
8	2x7		3.45	48.30
9	44		1.40	61.60
10	3		1.50	4.50
				293.69
$293.69 \times 1.21 = 355.36 \text{ kg}$				

Pos	No	FORM	UNIT LENG	TOTAL LENG
1	19		2.37	45.03
2	8		4.47	35.76
3	1		5.65	5.65
4	1		7.64	7.64
5	2		3.48	6.96
6	2		3.88	7.76
6a	2		3.45	6.90
7	6		2.19	13.14
7a	6		2.21	13.26
8	6		3.13	18.78
9	24		0.98	23.52
10	4		1.15	4.60
				168.84
$168.84 \times 1.21 = 204.30 \text{ kg}$				

Pos	No	FORM	UNIT LENG	TOTAL LENG
1	19		3.42	64.98
2	13		4.47	58.11
3	1		5.65	5.65
4	4		7.64	30.56
5	4		3.48	13.92
6	4		3.88	15.52
6a	4		3.45	13.80
7	12		2.68	32.16
7a	12		2.91	33.72
8	2x8		3.95	63.20
9	48		1.53	73.44
10	3		1.70	5.10
				362.64
$362.64 \times 1.21 = 438.79 \text{ kg}$				

Pos	No	FORM	UNIT LENG	TOTAL LENG
1	21		2.62	55.02
2	9		5.03	45.27
3	1		6.21	6.21
4	1		8.20	8.20
5	2		3.90	7.80
6	2		4.33	8.66
6a	2		3.70	7.40
7	6		2.54	15.24
7a	6		2.48	14.88
8	6		3.40	20.40
9	26		1.00	26.00
10	5		1.20	6.00
				198.80
$198.80 \times 1.21 = 240.55 \text{ kg}$				

Pos	No	FORM	UNIT LENG	TOTAL LENG
1	21		3.62	76.02
2	13		5.03	65.39
3	1		6.21	6.21
4	1		8.20	8.20
5	4		3.90	15.60
6	4		4.33	17.32
6a	4		3.70	14.80
7	12		3.08	36.96
7a	12		3.21	38.52
8	2x8		4.15	66.40
9	56		1.50	84.00
10	4		1.70	6.80
				382.90
$382.90 \times 1.21 = 463.31 \text{ kg}$				

NOTE:


1. Bar bending lists for both rectangular and cipolletti weirs are identical
2. Total weight only for position No.6,7 has been considered, if position 6a,7a is to be used required adjustment should be made accordingly

ALL BARS ARE $\phi 14 (1.21 \text{ Kg/m})$


REFERENCE DWGS. For reinforcement see dwg. No. 15/2/3/01
For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale.	IRRIGATION & DRAINAGE STANDARDS	
Date.	DWG. No. 15/2/3/03	
Approved.	Sheet No. 6 of 5	Rev. No.
CONTRACTED WEIRS LIST OF REINFORCEMENT STR 70A TO STR. 120A		


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

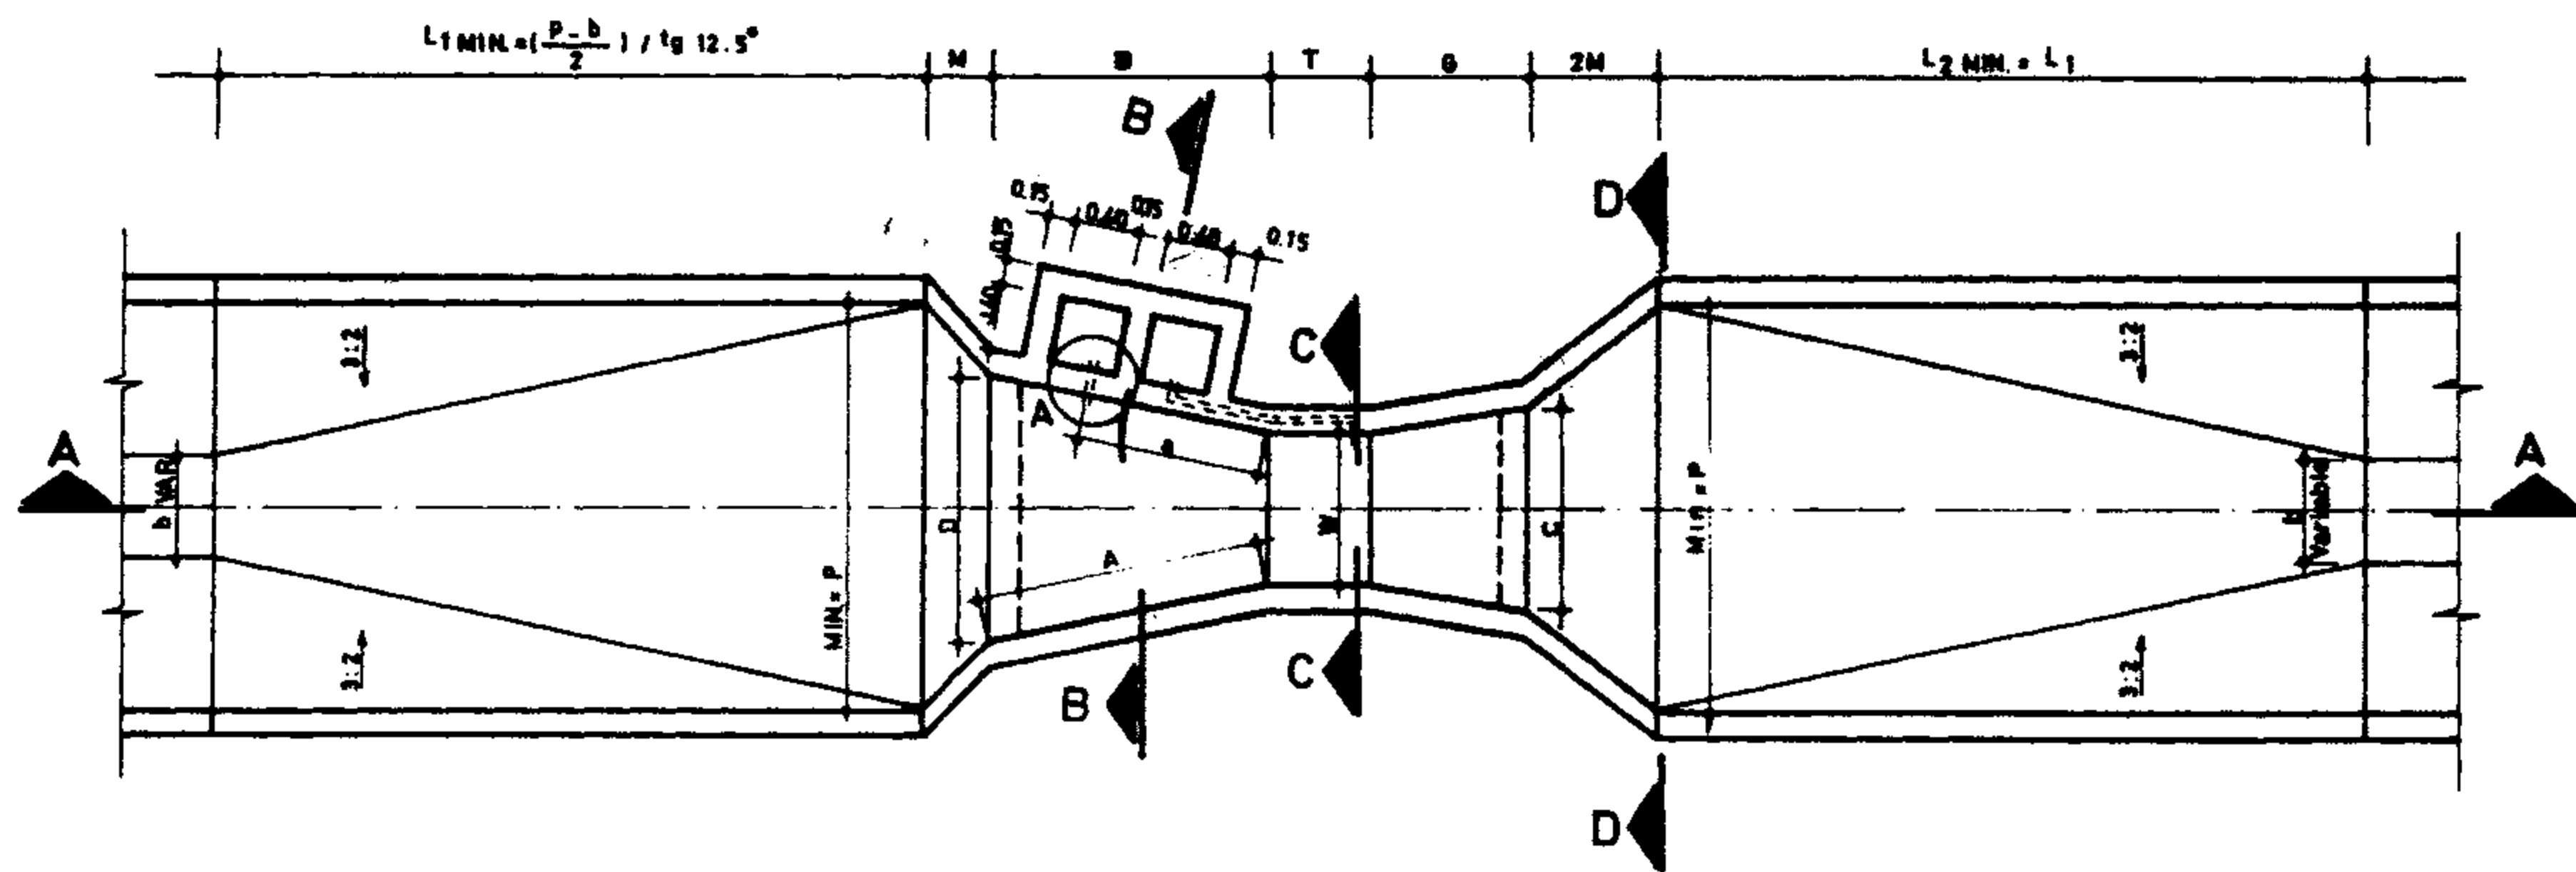


PLAN
Scale 1:50

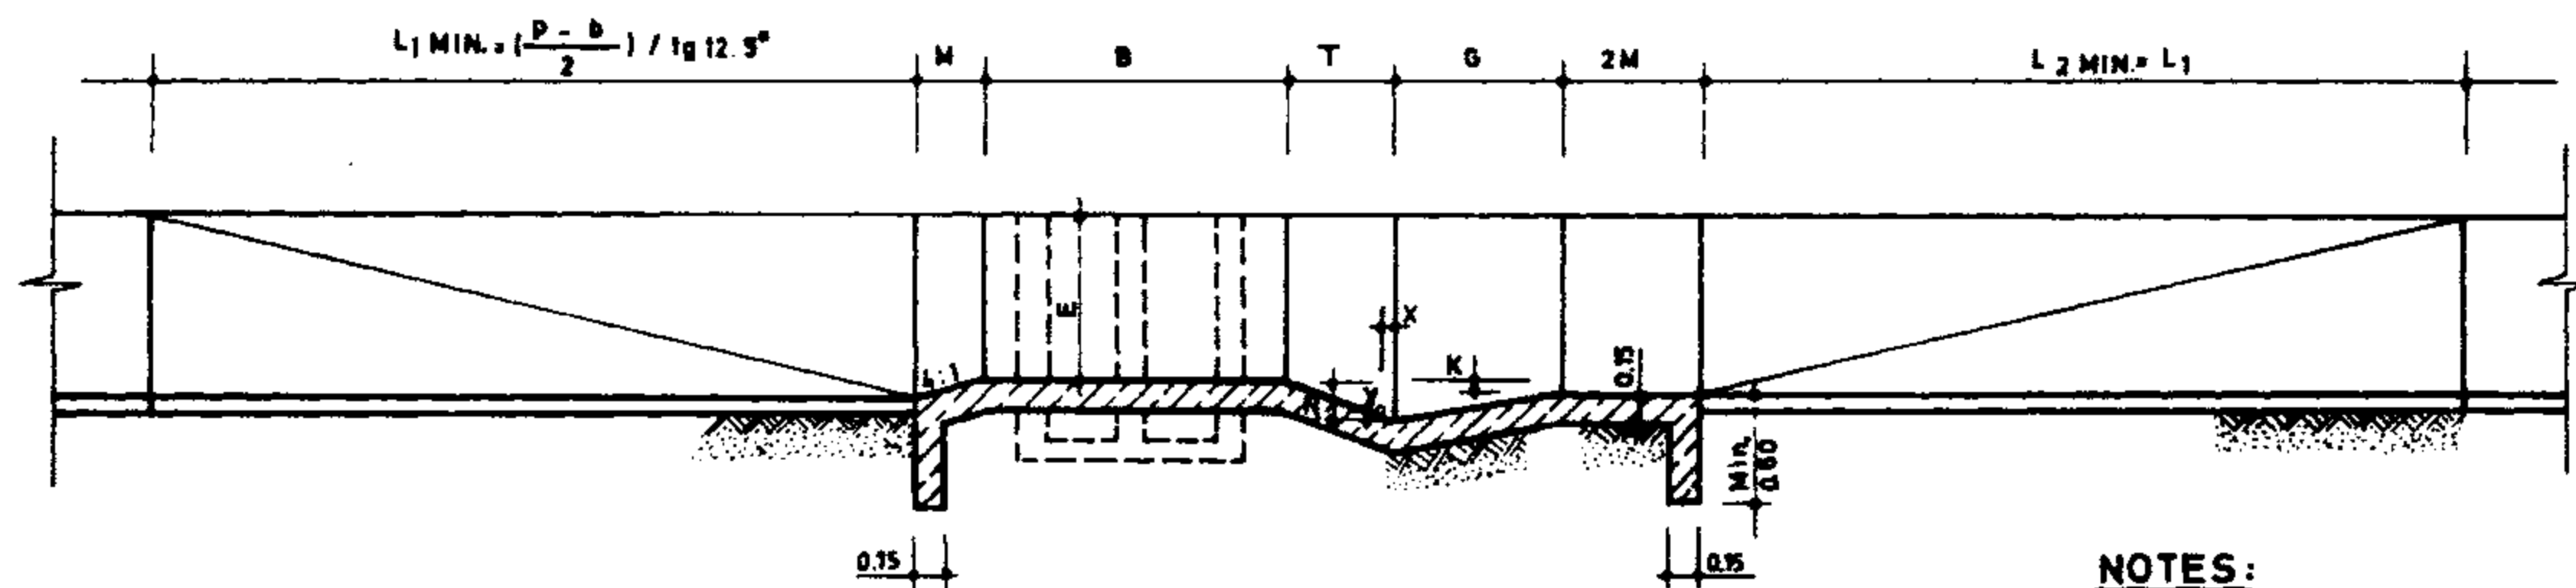

SECTION A-A
Scale 1:50

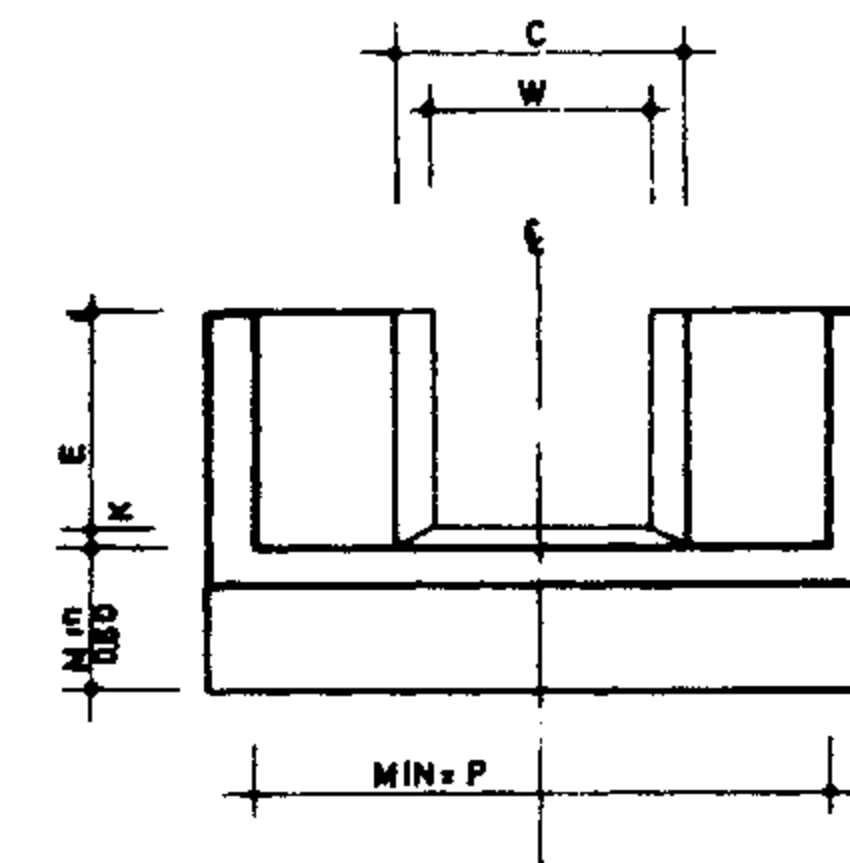


SECTION D-D
Scale 1:50

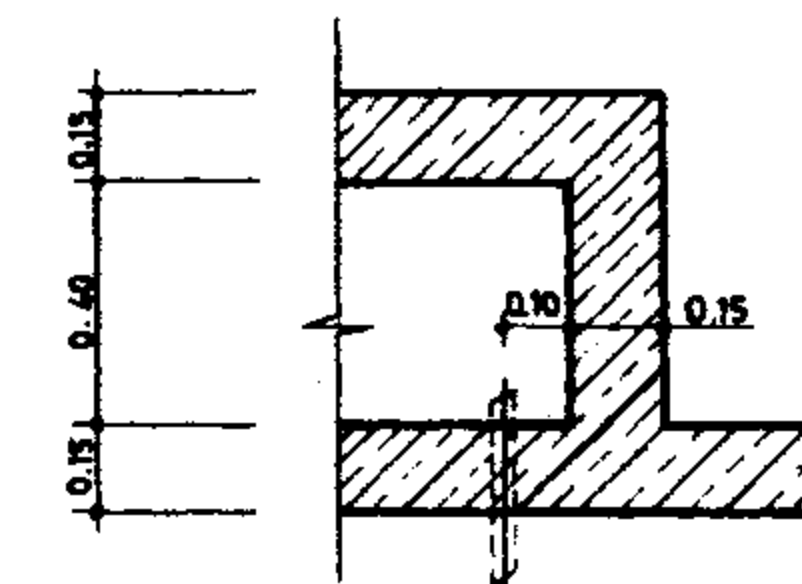

DETAIL "A"
Scale 1:20

NOTES:

- 1- For selecting a proper parshall flumes refer to PBO publication No 106 .
- 2- For hydraulic properties and design example refer to PBO publication No 106 .
- 3- Parshall flums with a throat width less than one foot must be constructed with iron or other types of suitable metals.

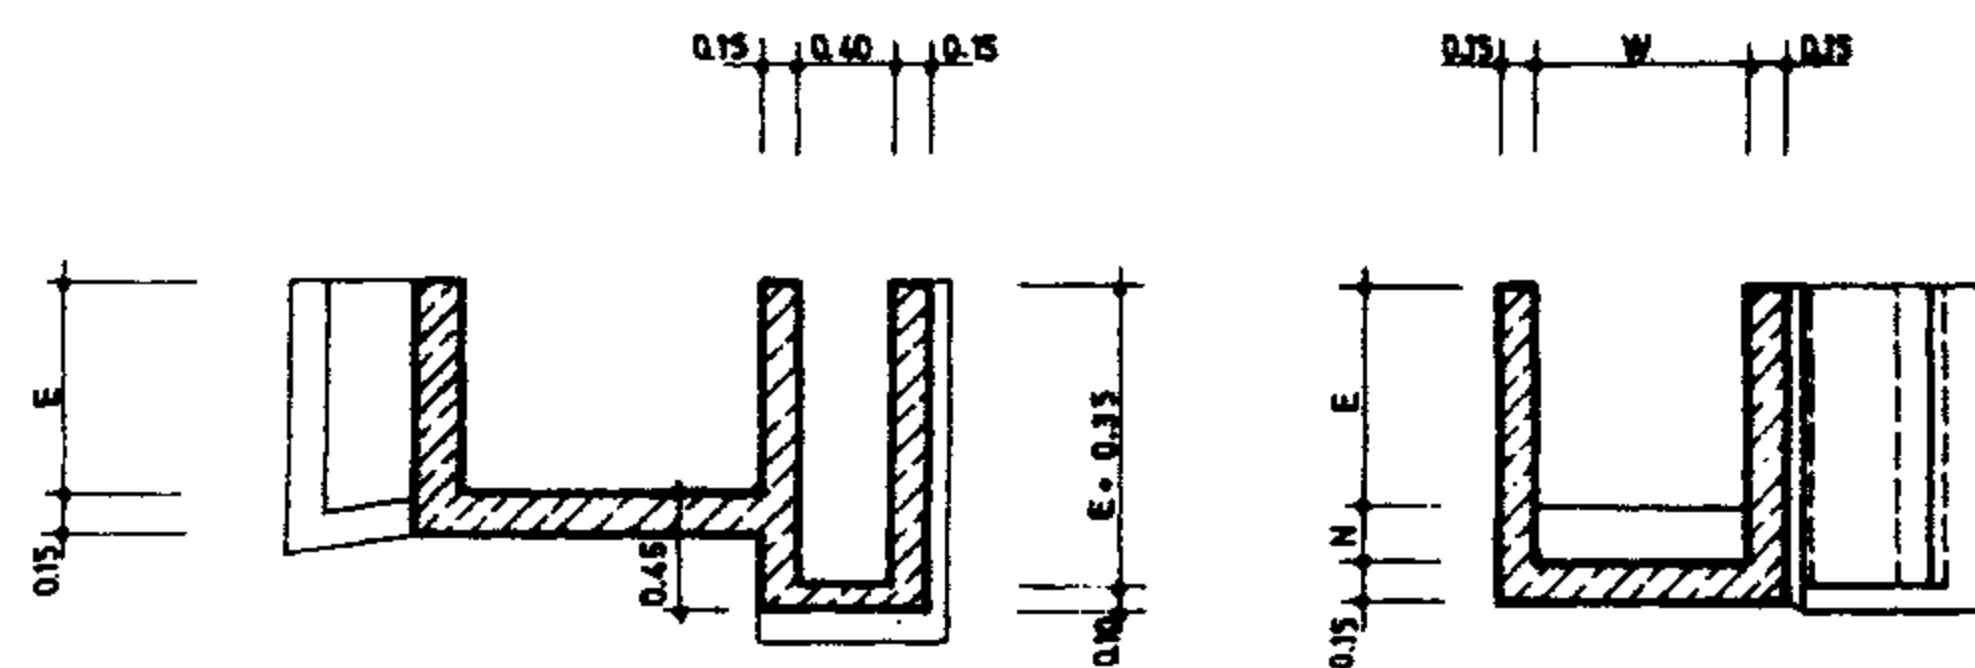

SECTION B-B
Scale 1:50

SECTION C-C
Scale 1:50

STANDARD DIMENSION

	W	A	a	B	C	D	E	T	G	K	M	N	P	X	Y	Z	H	R/Bar. kg.	Conc. m ³	Form m ²
1'	25.4	363	242	356	93	167	229	76	203	19	—	29	—	8	13	3	206	—	—	—
2'	50.8	414	276	406	135	214	254	114	254	22	—	43	—	16	25	6	257	—	—	—
3'	76.2	467	311	457	178	259	457	152	305	25	—	57	—	25	38	13	309	—	—	—
6'	152.4	621	414	610	394	397	610	305	610	76	305	114	902	51	76	—	—	—	—	—
6'	228.6	879	587	864	381	575	762	305	457	76	305	114	1080	51	76	—	—	—	—	—
1'	304.8	1372	914	1343	610	845	914	610	914	76	381	229	1492	51	76	—	—	260.89	2.54	—
15'	457.2	1448	965	1419	762	1026	914	610	914	76	381	229	1676	51	76	—	—	279.16	2.71	26.29
2'	609.6	1524	1016	1495	914	1206	914	610	914	76	381	229	1854	51	76	—	—	287.47	2.84	28.10
3'	914.4	1676	1118	1645	1219	1572	914	610	914	76	381	229	2222	51	76	—	—	321.15	3.19	29.23
4'	1219.2	1829	1219	1794	1524	1937	914	610	914	76	457	229	2711	51	76	—	—	366.24	3.69	31.79
5'	1524.0	1981	1321	1943	1829	2302	914	610	914	76	457	229	3080	51	76	—	—	359.14	4.15	33.73
6'	1828.8	2134	1422	2092	2134	2667	914	610	914	76	457	229	3442	51	76	—	—	428.59	4.53	34.73
7'	2133.6	2286	1524	2242	2438	3032	914	610	914	76	457	229	3810	51	76	—	—	467.77	4.93	36.17
8'	2438.4	2438	1626	2391	2743	3397	914	610	914	76	457	229	4172	51	76	—	—	500.23	5.00	37.71

ALL DIMENSIONS ARE IN mm

REFERENCE DWGS : For reinforcement see dwg. No. 15/1/3/01
For general notes see dwgs. No 20/2/1/01 TO 20/2/1/03

Scale: 1.50

Date:

Approved:

DWG. No. 15/1/1/01


Sheet No. 1 of 3 Rev. No.

IRRIGATION & DRAINAGE STANDARDS


PARSHALL FLUMES
PLAN & SECTIONS

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET


TECNICAL RESEARCH AND
STANDARD BUREAU

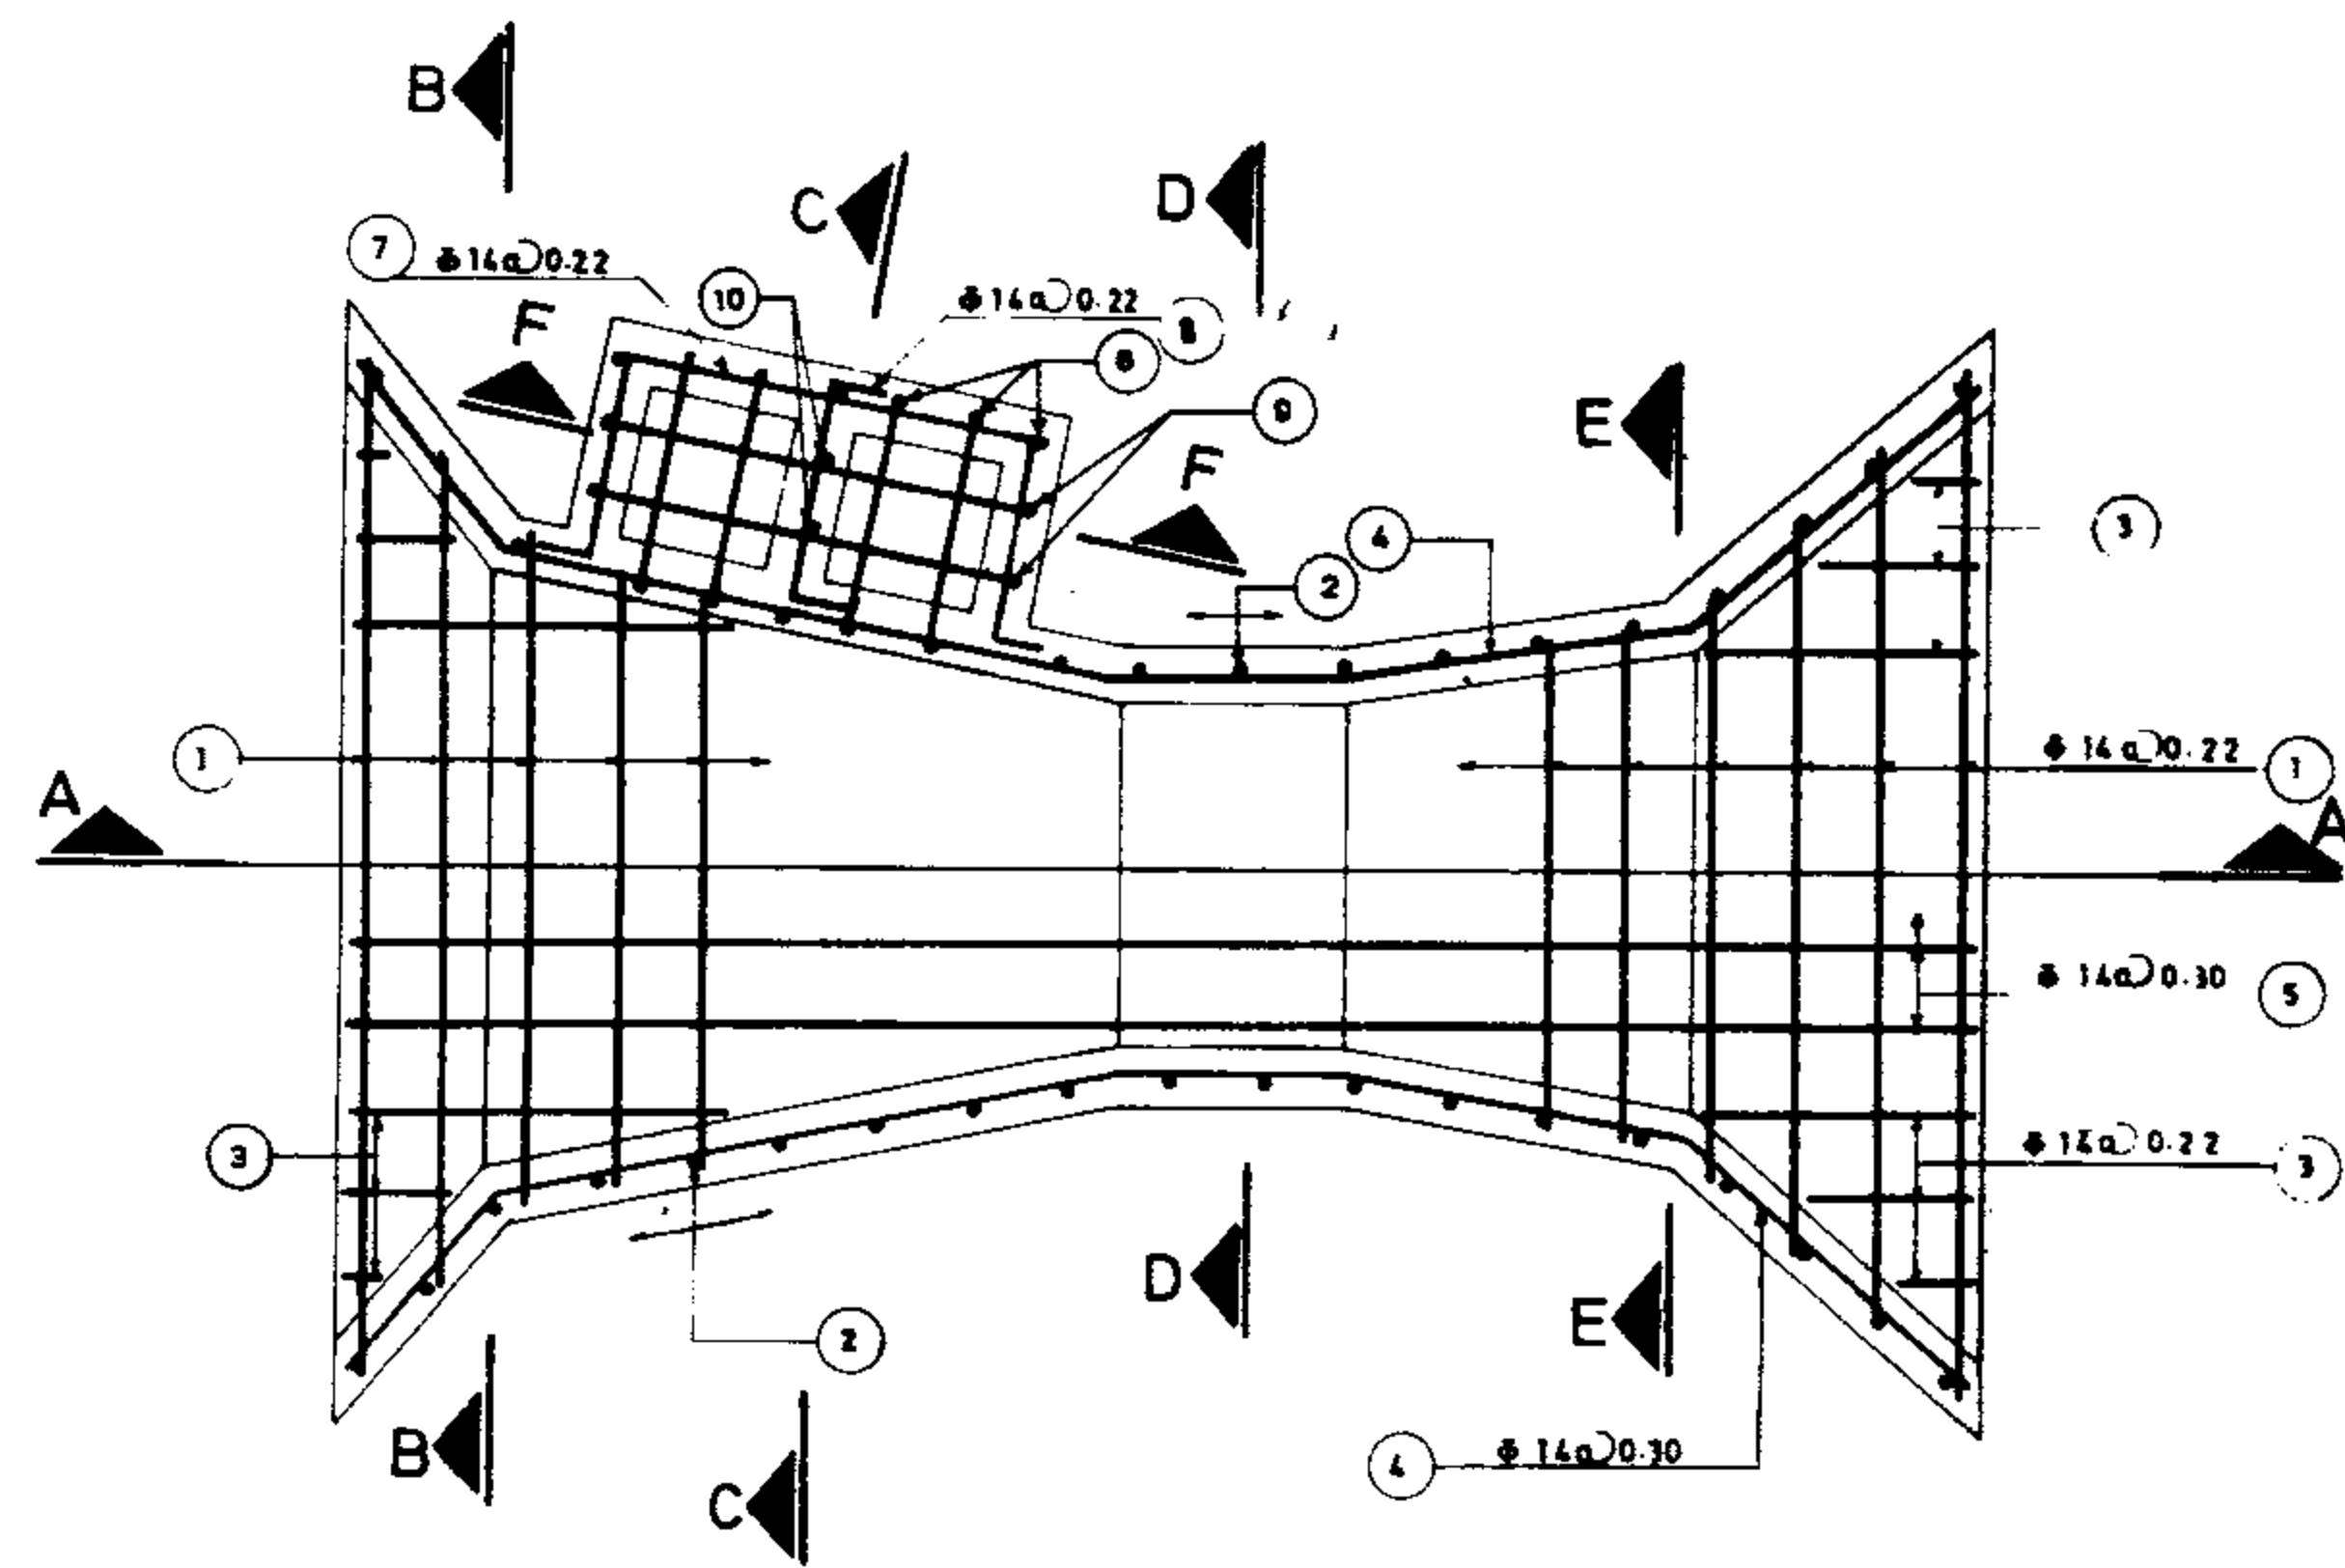


PLAN

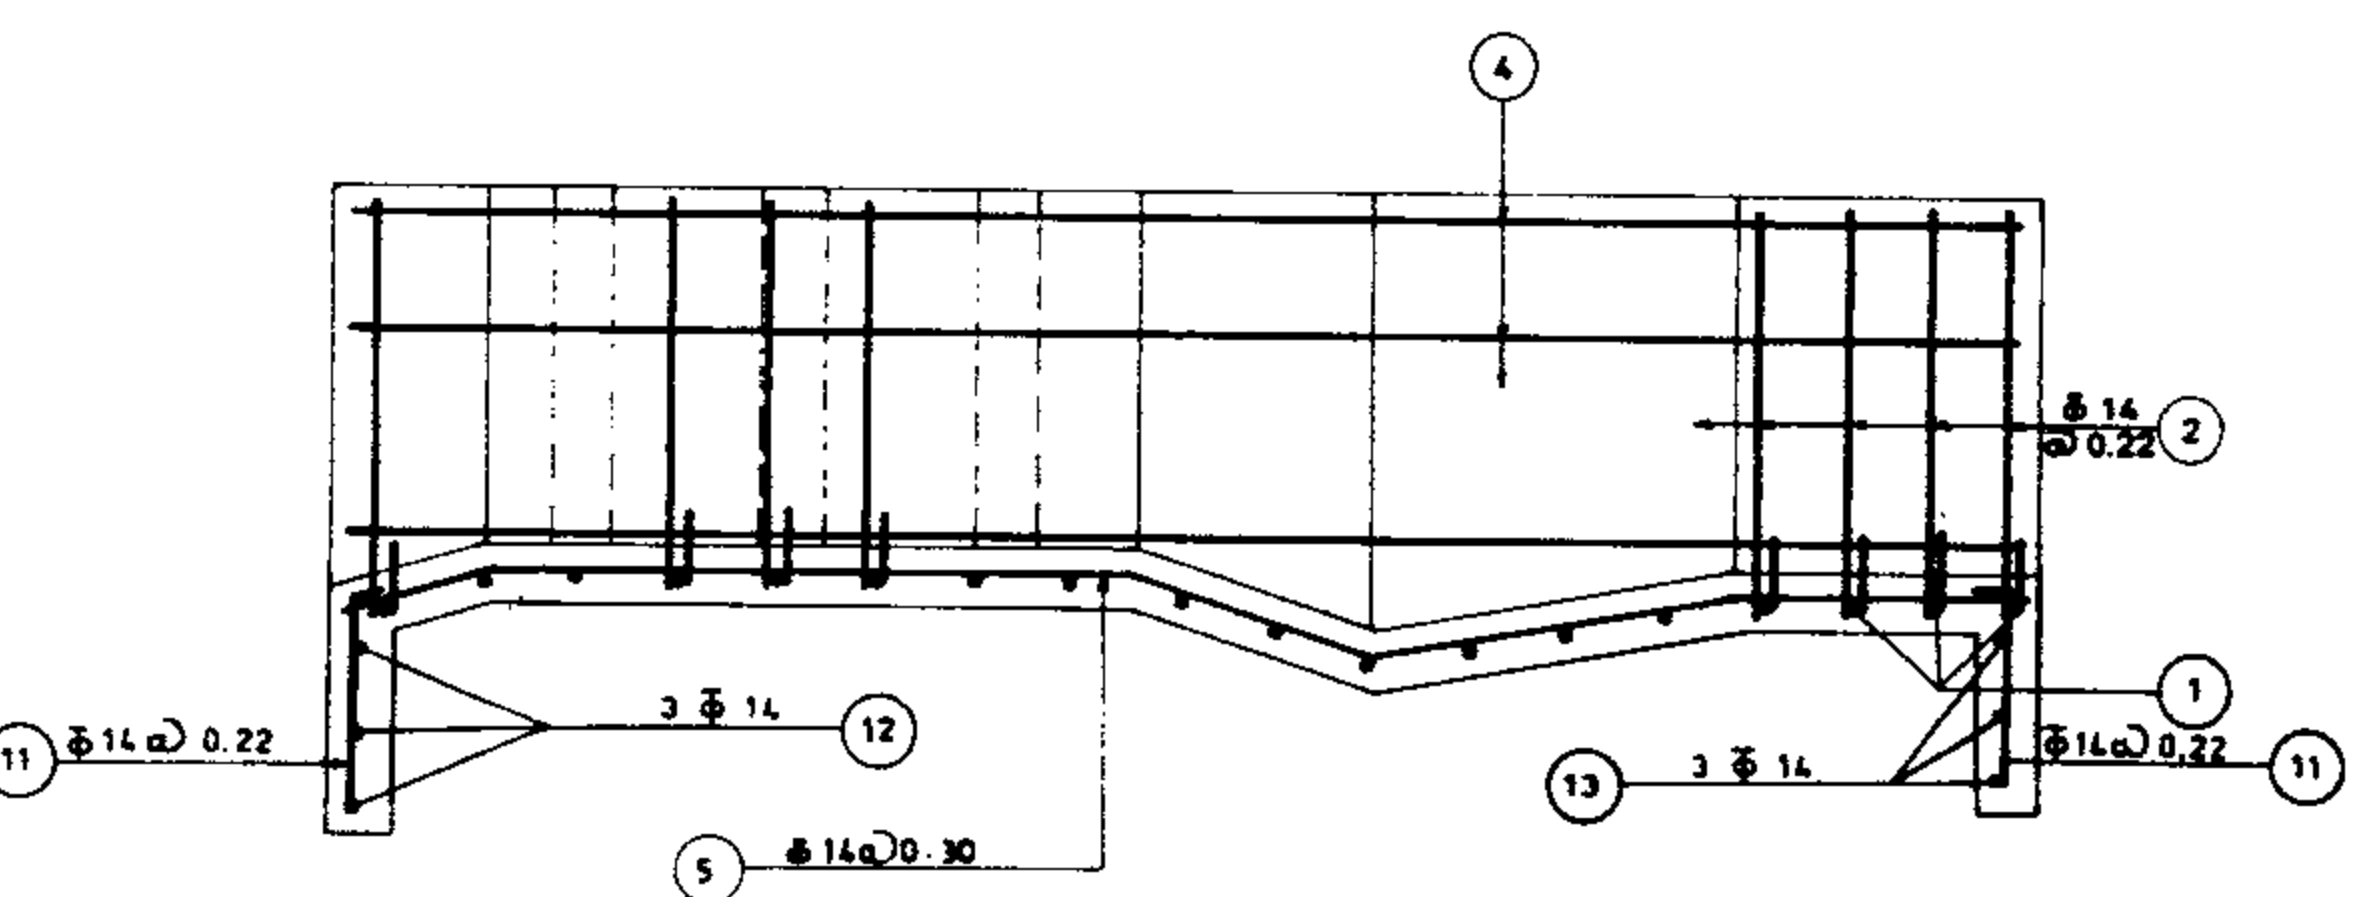


SECTION A-A

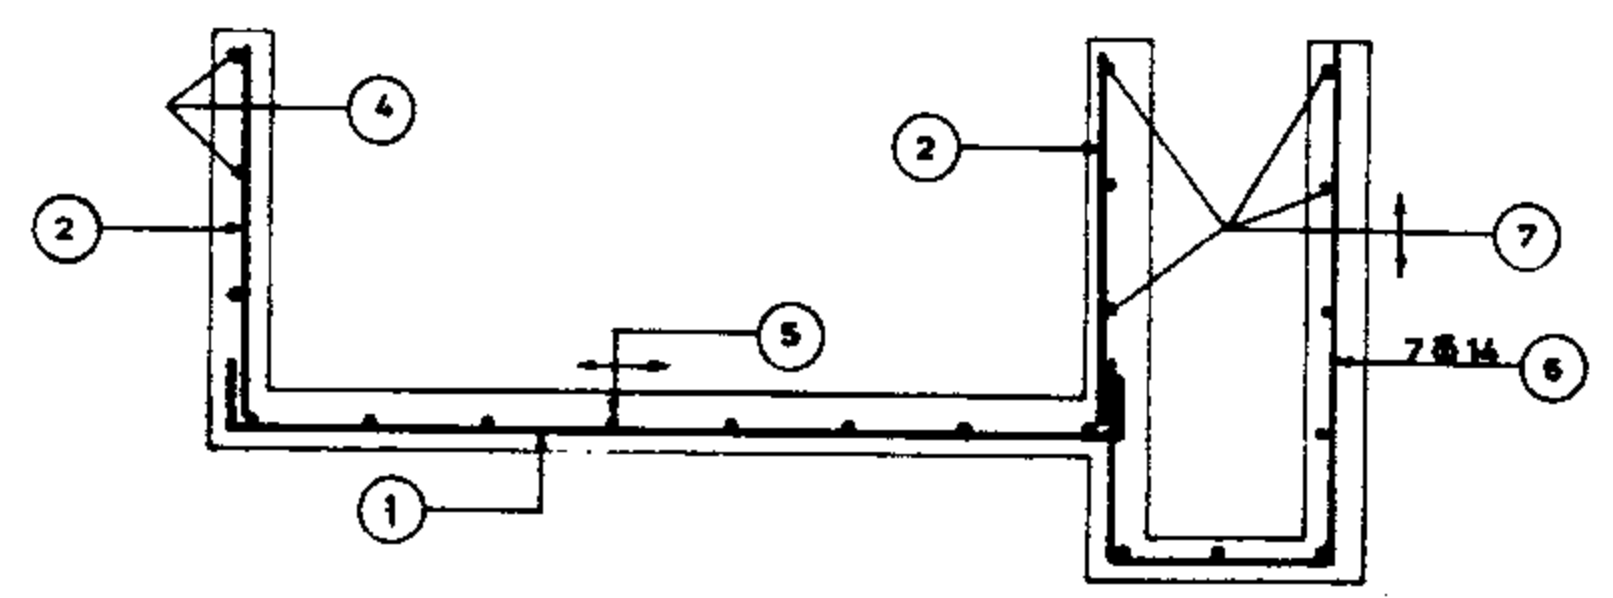


SECTION C-C

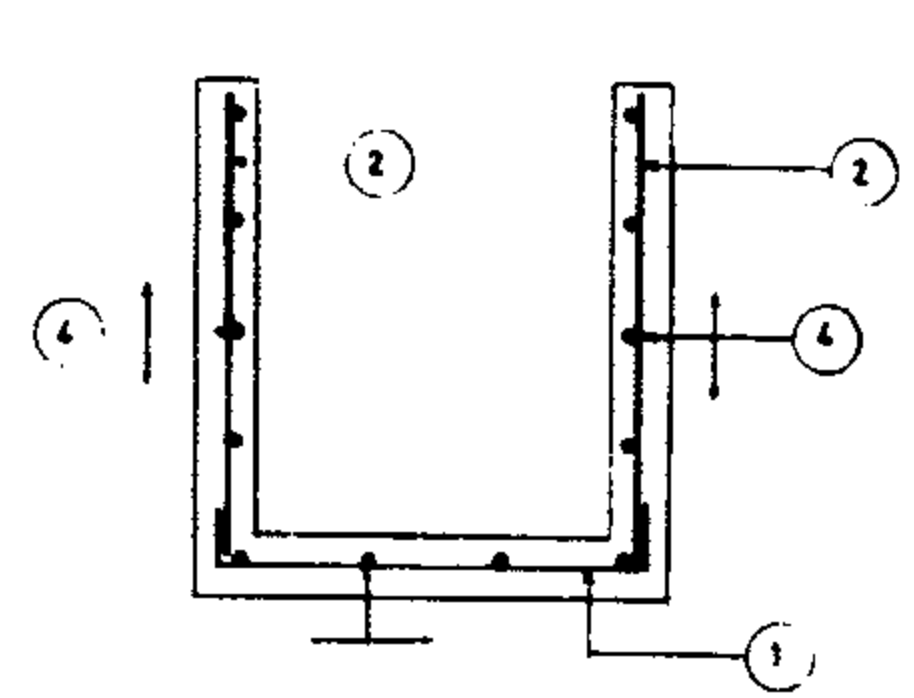


SECTION D-D

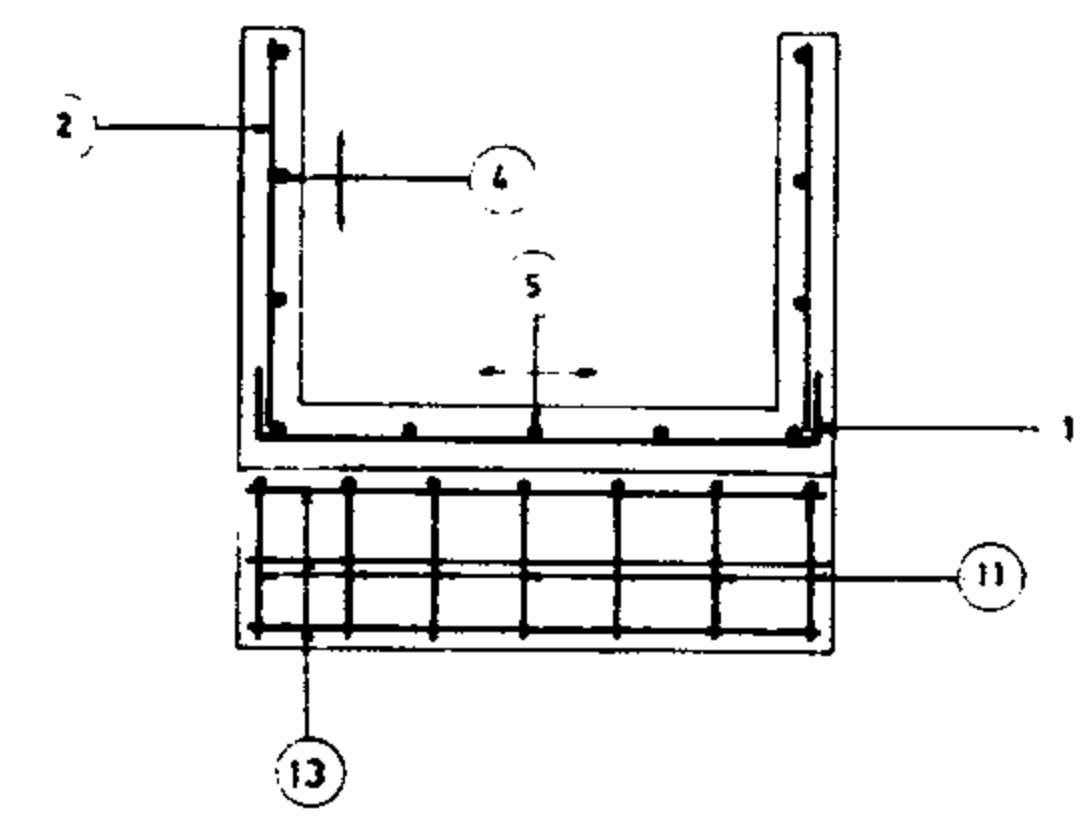

SECTION E-E

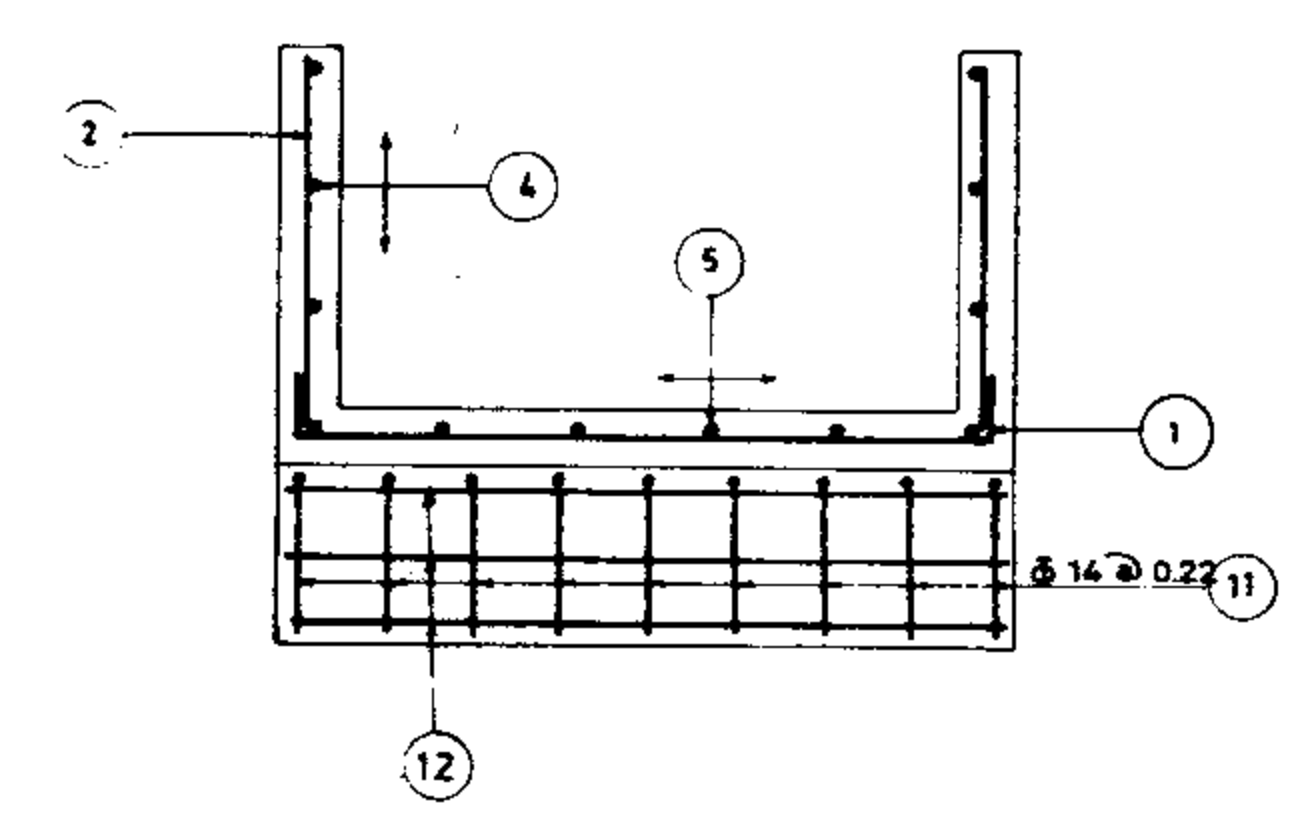

SECTION B-B

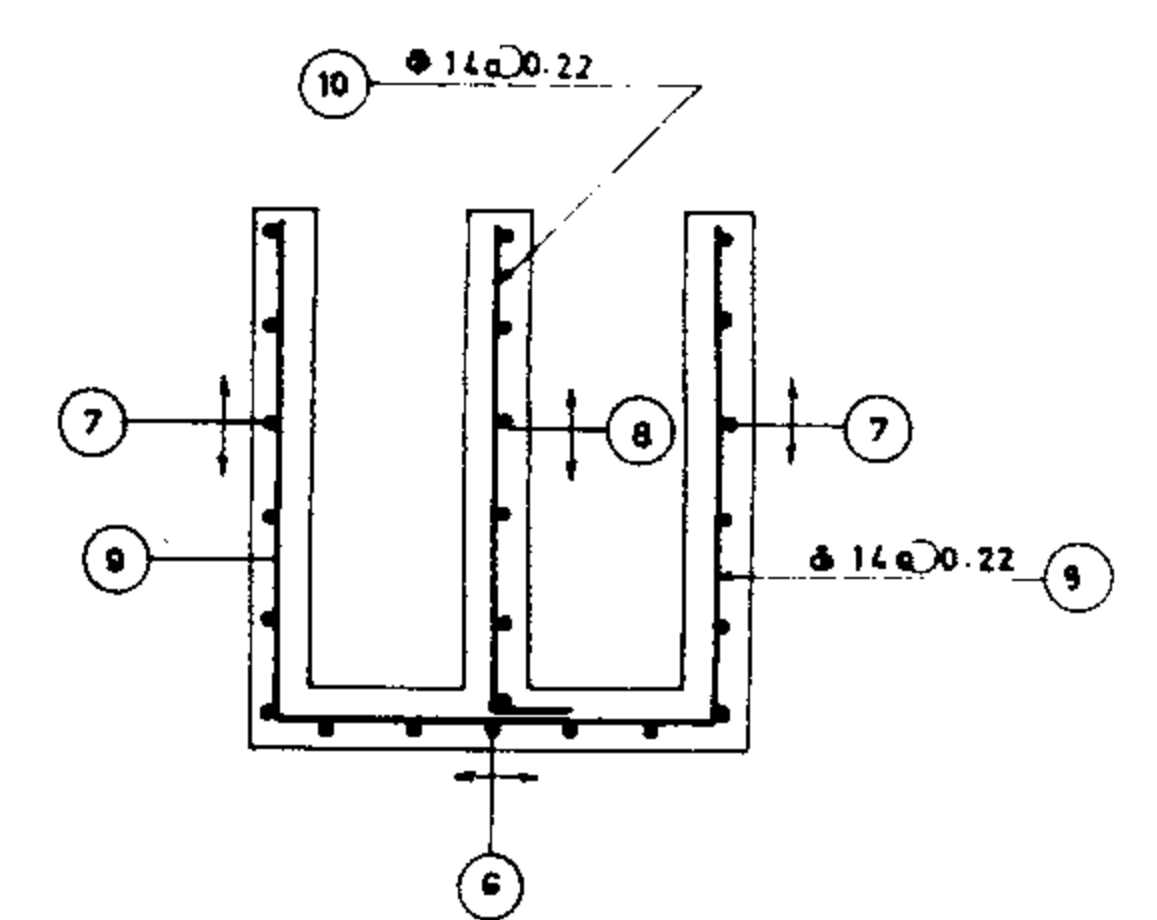

SECTION F-F

REFERENCE DWGS: For reinforcement tables see dwg. No. 15/1/3/02

Scale: 1:30	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG No 15/1/3/01	PARSHALL FLUMES-REINFORCEMENT
Approved:	Sheet No. 2 of 3 Rev. No	

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

		W=1'			
BAR NO.	QTY	FORM	UNIT LENG.	TOTAL LENG.	
1	19	050 0.53~1.71 050	2.12	40.28	
2	2x19	0.98~1.21	1.10	41.80	
3	12	0.20~1.21	0.71	8.52	
4	10	0.47 1.37 0.84 0.81 0.88	4.17	41.70	
5	4	0.34 1.34 0.65 0.76 0.81	3.93	15.72	
6	7	0.55 0.55 1.27	2.37	16.59	
7	7	0.20 0.55 1.10 0.55 0.20	2.60	18.20	
8	7	0.20 0.55 0.20	0.95	6.65	
9	2	1.27 1.10 1.27	3.64	7.28	
10	2	1.27 1.020	1.47	2.94	
11	8	0.49 1.020	0.69	5.52	
12	3	1.00	1.00	3.00	
13	3	0.76	0.76	2.28	
				210.48	
				210.48 x 1.21 = 254.68 Kg	

		W=1.5'			
BAR NO.	QTY	FORM	UNIT LENG.	TOTAL LENG.	
1	20	050 0.65~1.90 050	2.29	45.80	
2	2x20	0.98~1.21	1.10	44.00	
3	12	0.20~1.21	0.71	8.52	
4	10	0.45 1.45 0.84 0.81 0.88	4.24	42.40	
5	5	0.34 1.42 0.65 0.76 0.81	4.01	20.05	
6	7	0.55 0.55 1.27	2.37	16.59	
7	7	0.20 0.55 1.10 0.55 0.20	2.60	18.20	
8	7	0.20 0.55 0.20	0.95	6.65	
9	2	1.27 1.10 1.27	3.64	7.28	
10	2	1.27 1.020	1.47	2.94	
11	9	0.49 1.020	0.69	6.21	
12	3	1.18	1.18	3.54	
13	3	0.91	0.91	2.73	
				224.91	
				224.91 x 1.21 = 272.14 Kg	

		W=2'			
BAR NO.	QTY	FORM	UNIT LENG.	TOTAL LENG.	
1	20	050 0.82~2.07 050	2.45	49.00	
2	2x20	0.98~1.21	1.10	44.00	
3	12	0.20~1.21	0.71	8.52	
4	10	0.45 1.52 0.84 0.81 0.88	4.31	43.10	
5	5	0.34 1.38 0.65 0.76 0.81	4.09	20.45	
6	7	0.55 0.55 1.27	2.37	16.59	
7	7	0.20 0.55 1.10 0.55 0.20	2.60	18.20	
8	7	0.20 0.55 0.20	0.95	6.65	
9	2	1.27 1.10 1.27	3.64	7.28	
10	2	1.27 1.020	1.47	2.94	
11	11	0.49 1.020	0.69	7.59	
12	3	1.36	1.36	4.08	
13	3	1.06	1.06	3.18	
				231.58	
				231.58 x 1.21 = 280.21 Kg	

		W=3'			
BAR NO.	QTY	FORM	UNIT LENG.	TOTAL LENG.	
1	21	050 1.12~2.44 050	2.79	58.59	
2	2x21	0.98~1.21	1.10	46.20	
3	12	0.20~1.21	0.71	8.52	
4	10	0.45 1.68 0.84 0.81 0.91	4.49	44.90	
5	7	0.34 1.85 0.65 0.76 0.81	4.24	29.68	
6	7	0.55 0.55 1.27	2.37	16.59	
7	7	0.20 0.55 1.10 0.55 0.20	2.60	18.20	
8	7	0.20 0.55 0.20	0.95	6.65	
9	2	1.27 1.10 1.27	3.64	7.28	
10	2	1.27 1.020	1.47	2.94	
11	14	0.49 1.020	0.69	9.66	
12	3	1.72	1.72	5.16	
13	3	1.37	1.37	4.11	
				258.48	
				258.48 x 1.21 = 312.76 Kg	

		W=4'			
BAR NO.	QTY	FORM	UNIT LENG.	TOTAL LENG.	
1	23	050 1.45~2.93 050	3.19	73.37	
2	2x23	0.98~1.21	1.10	50.60	
3	12	0.20~1.37	0.79	9.48	
4	10	0.56 1.83 0.84 0.81 1.10	4.94	49.40	
5	8	0.42 1.79 0.65 0.92 0.81	4.62	36.96	
6	7	0.55 0.55 1.27	2.37	16.59	
7	7	0.20 0.55 1.10 0.55 0.20	2.60	18.20	
8	7	0.20 0.55 0.20	0.95	6.65	
9	2	1.27 1.10 1.27	3.64	7.28	
10	2	1.27 1.020	1.47	2.94	
11	17	0.49 1.020	0.69	11.73	
12	3	2.09	2.09	6.27	
13	3	1.67	1.67	5.01	
				294.48	
				294.48 x 1.21 = 356.32 Kg	

		W=5'			
BAR NO.	QTY	FORM	UNIT LENG.	TOTAL LENG.	
1	23	050 1.74~3.30 050	3.52	80.96	
2	2x23	0.98~1.21	1.10	50.60	
3	12	0.20~1.37	0.79	9.48	
4	10	0.56 1.98 0.84 1.10 0.81 1.17	5.10	51.00	
5	10	0.42 1.94 0.65 0.92 0.81	4.77	47.70	
6	7	0.55 0.55 1.27	2.37	16.59	
7	7	0.20 0.55 1.10 0.55 0.20	2.60	18.20	
8	7	0.20 0.55 0.20	0.95	6.65	
9	2	1.27 1.10 1.27	3.64	7.28	
10	2	1.27 1.020	1.47	2.94	
11	20	0.49 1.020	0.69	13.80	
12	3	2.45	2.45	7.35	
13	3	1.98	1.98	5.94	
				317.59	
				317.59 x 1.21 = 384.28 Kg	

		W=6'			
BAR NO.	QTY	FORM	UNIT LENG.	TOTAL LENG.	
1	24	050 2.04~3.66 050	3.85	92.40	
2	2x24	0.98~1.21	1.10	52.80	
3	12	0.20~1.37	0.79	9.48	
4	10	0.56 2.13 0.84 0.81 1.17	5.27	52.70	
5	11	0.42 2.09 0.65 0.92 0.81	4.88	53.68	
6	7	0.55 0.55 1.27	2.37	16.59	
7	7	0.20 0.55 1.10 0.55 0.20	2.60	18.20	
8	7	0.20 0.55 0.20	0.95	6.65	
9	2	1.27 1.10 1.27	3.64	7.28	
10	2	1.27 1.020	1.47	2.94	
11	23	0.49 1.020	0.69	15.87	
12	3	2.82	2.82	8.46	
13	3	2.28	2.28	6.84	
				343.89	
				343.89 x 1.21 = 416.11 Kg	

		W=7'			
BAR NO.	QTY	FORM	UNIT LENG.	TOTAL LENG.	
1	25	050 2.35~4.03 050	4.19	104.75	
2	2x25	0.98~1.21	1.10	55.00	
3	16	0.20~1.37	0.79	12.64	
4	10	0.56 2.29 0.91 0.81 1.17	5.52	55.20	
5	12	0.42 2.24 0.65 0.92 0.81	5.07	60.84	
6	7	0.55 0.55 1.27	2.37	16.59	
7	7	0.20 0.55 1.10 0.55 0.20	2.60	18.20	
8	7	0.20 0.55 0.20	0.95	6.65	
9	2	1.27 1.10 1.27	3.64	7.28	
10	2	1.27 1.020	1.47	2.94	
11	26	0.49 1.020	0.69	17.94	
12	3	3.18	3.18	9.54	
13	3	2.59	2.59	7.77	
				375.34	
				375.34 x 1.21 = 454.16 Kg	


		W=8'			
BAR NO.	QTY	FORM	UNIT LENG.	TOTAL LENG.	
1	25	050 2.67~4.39 050	4.53	113.25	
2	2x25	0.98~1.21	1.10	55.00	
3	16	0.20~1.37	0.79	12.64	
4	10	0.56 2.44 0.84 0.81 1.17	5.62	56.20	
5	14	0.42 2.39 0.65 0.92 0.81	5.22	73.08	
6	7	0.55 0.55 1.27	2.37	16.59	
7	7	0.20 0.55 1.10 0.55 0.20	2.60	18.20	
8	7	0.20 0.55 0.20	0.95	6.65	
9	2	1.27 1.10 1.27	3.64	7.28	
10	2	1.27 1.020	1.47	2.94	
11	29	0.49 1.020	0.69	20.01	
12	3	3.55	3.55	10.65	
13	3	2.89	2.89	8.67	
				401.16	
				401.16 x 1.21 = 485.40 Kg	

ALL BARS ARE $\phi 14$ (1.21 Kg/m)


REFERENCE DWGS: For reinforcement see dwg. No. 15/1/3/01
For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale: IRRIGATION & DRAINAGE STANDARDS
Date: DWG. No. 15/1/3/02
Approved: Sheet No. 3 of 3 Rev. No. PARSHALL FLUMES REINFORCEMENT TABLES STR.1 TO 9

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND STANDARD BUREAU

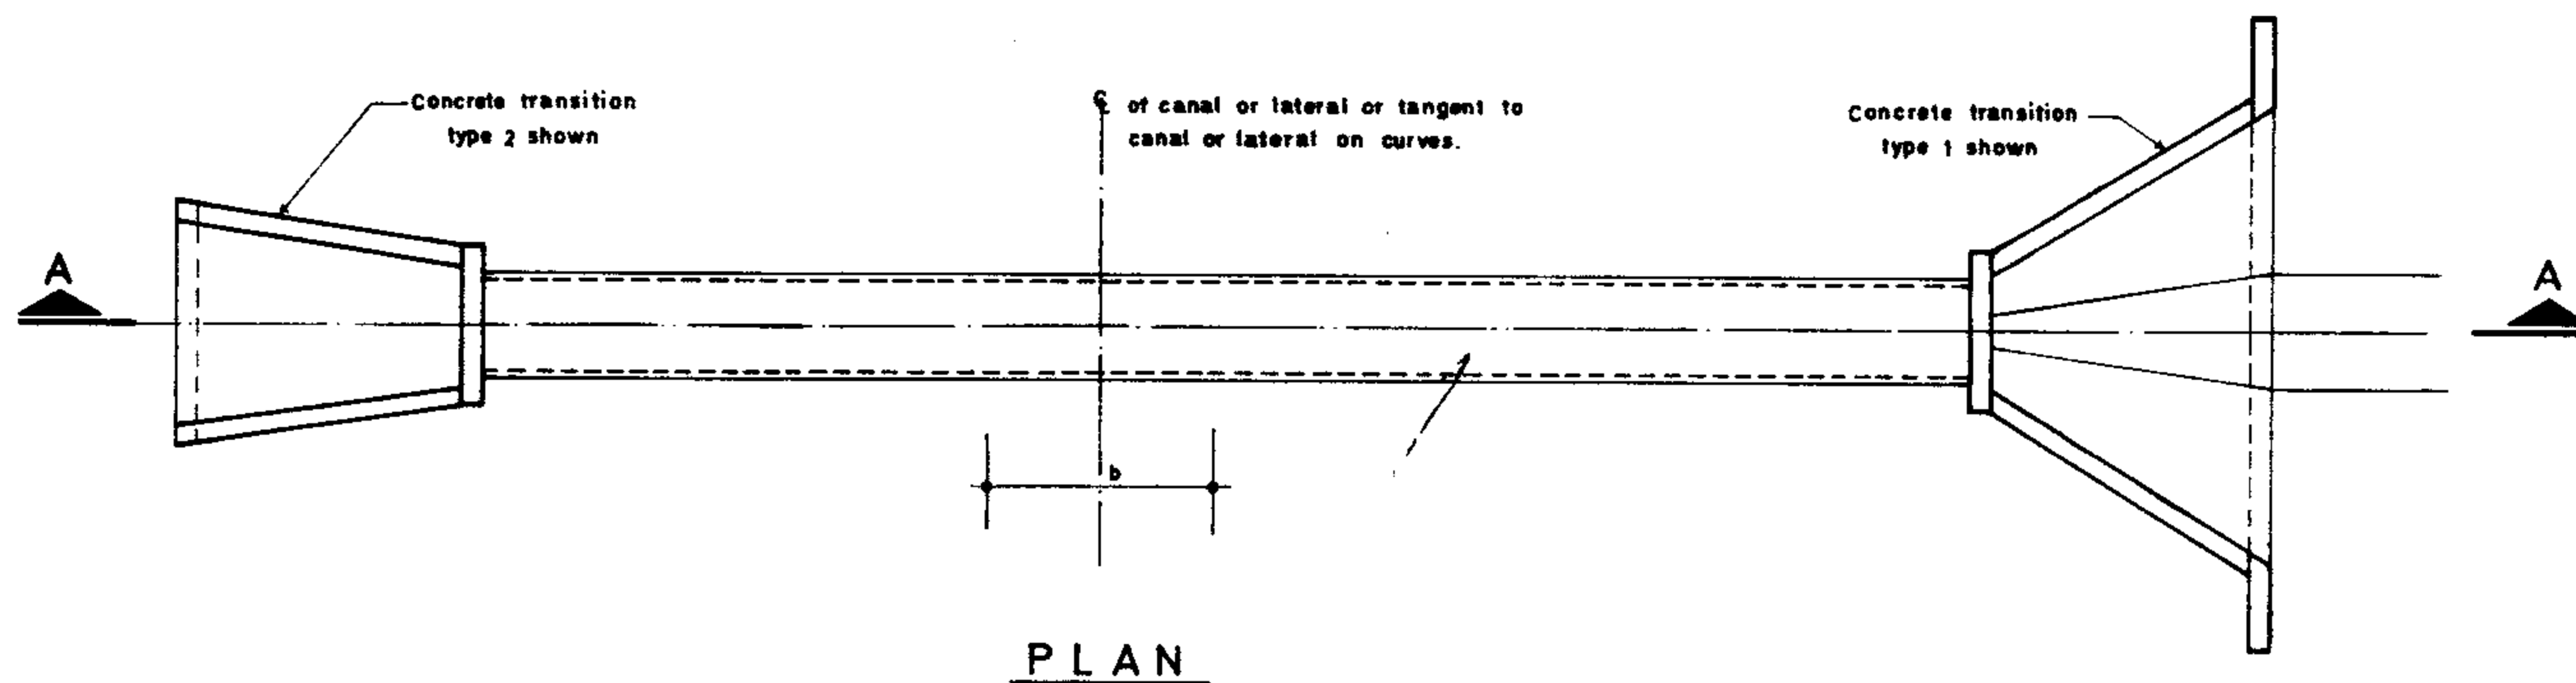

PLAN

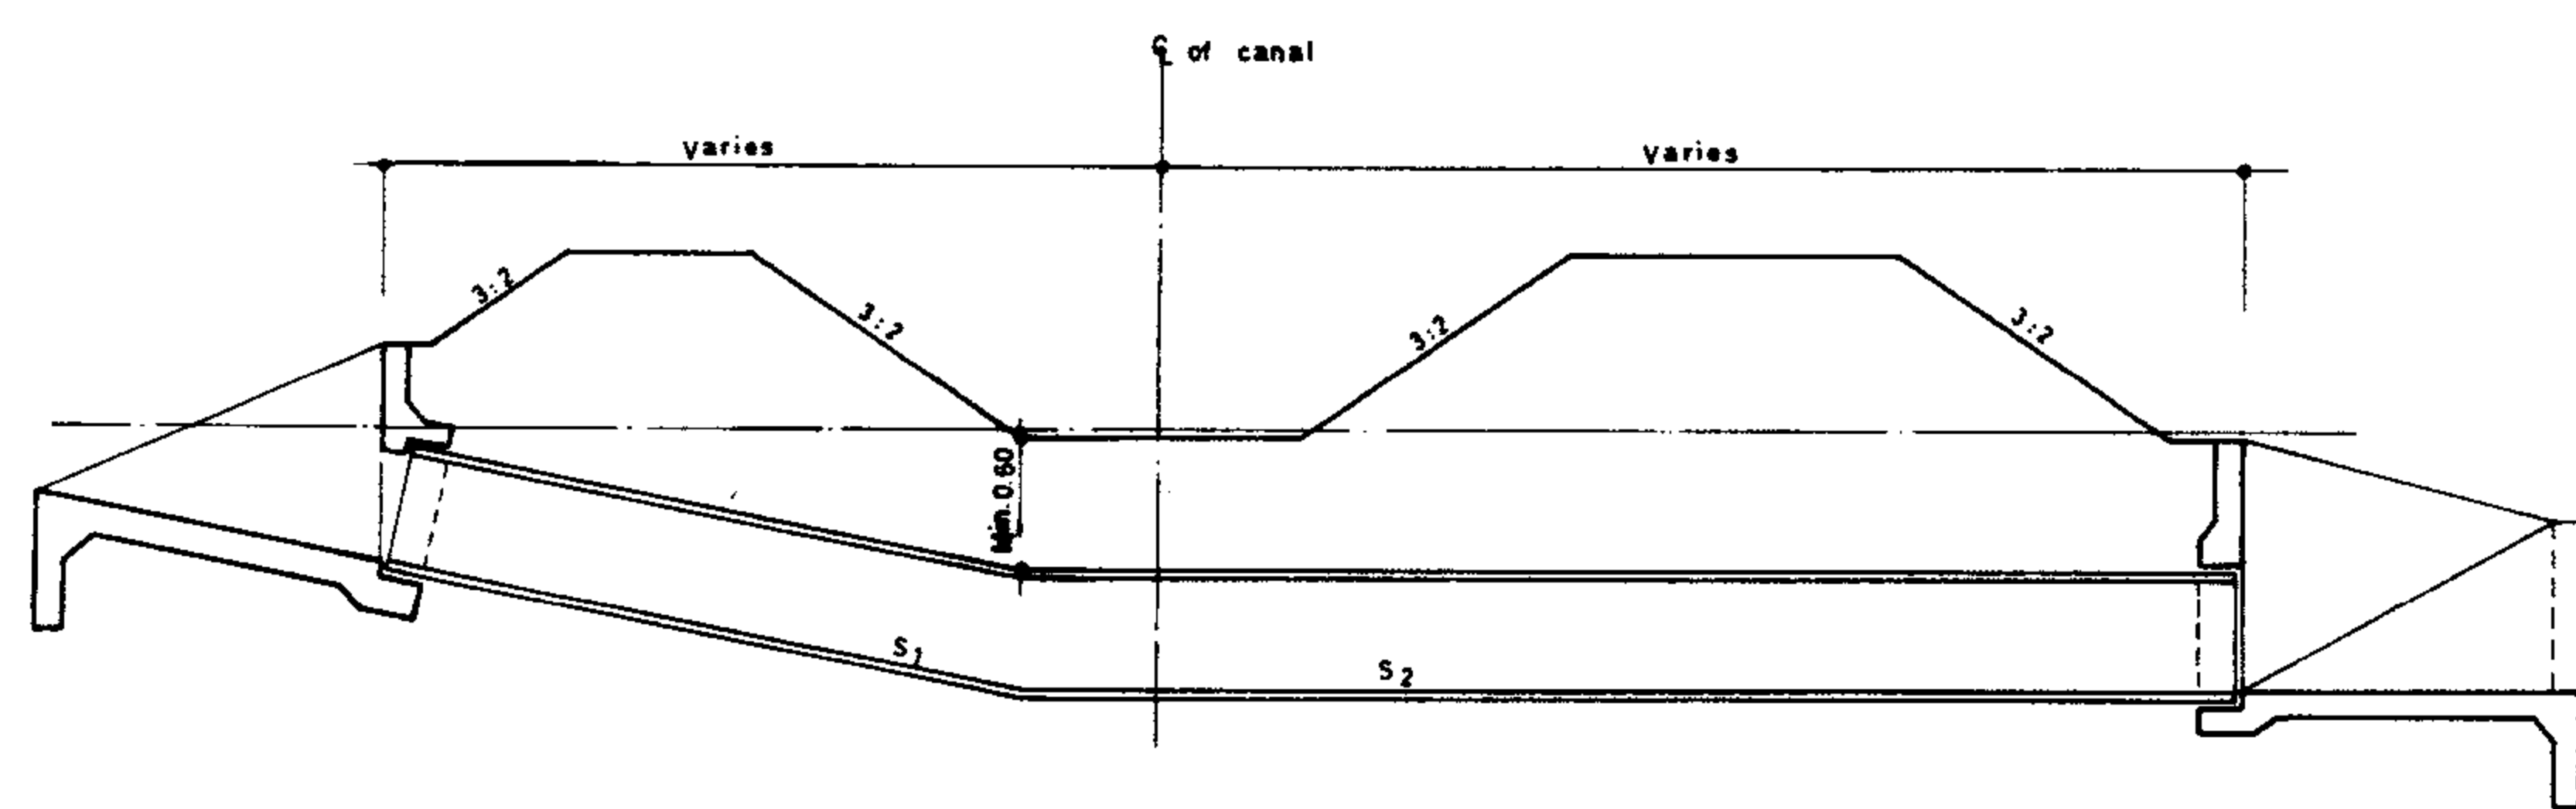

SECTION A-A

NOTES



- ① Culvert, as discussed in this publication, carries storm runoff or drainage water, under the canal.
- ② Precast concrete pipe is the usual choice for culverts under canals.
- ③ Where the conduit is on a uniform grade it has been found satisfactory to use a minimum slope of 0.005 and a maximum slope, slightly steeper than the critical slope.
- ④ Where a uniform slope would greatly exceed the critical slope, requiring an energy dissipator, it is usually preferable to include a vertical bend and two invert slopes, S_1 and S_2 the upstream slope, S_1 should be much steeper than critical and the downstream slope S_2 is usually set on the flat slope of 0.005 to facilitate dissipation of excess energy by a hydraulic jump in the pipe.
- ⑤ Type 1, 2, 3 and 4 of transitions (Dwgs. No. 13/6/1/01, 13/7/1/01, 13/8/1/01, 13/9/1/01) are used as culvert inlets. The best choice for any particular situations is dependent upon the hydraulics the topographic character of the site, and the relative elevations of the canal and drainage.
- ⑥ The culvert outlet performs the basic function of releasing water to outlet channel without excessive erosion. Excess energy may be dissipated by a concrete transition, baffled outlet (Dwg. No. 16/1/1/01) baffled apron drop (Dwg. No. 16/2/2/01). The type 1 and 2 of concrete outlet transitions are used at culvert outlets.
- ⑦ Generally, culverts are sized on the basis of storm runoff for a 25 year flood frequency.
- ⑧ The culvert should be designed for a maximum full pipe velocity of:
 - $3 \text{ m}^3/\text{sec}$ if a concrete transition is used at the outlet.
 - $3.5 \text{ m}^3/\text{sec}$ if an energy dissipator is used.
- ⑨ For pipe flowing full the pipe diameter is determined from the equation $Q = A \cdot V$ or $D = 1.13 \sqrt{\frac{Q}{V}}$
- ⑩ The minimum diameter usually permitted for pipe culvert is 60 cm.
- ⑪ The upstream water surface will be controlled by the head:
 - a. Inlet control: That is when the upstream water surface is not influenced by flow conditions downstream from the inlet.
 - b. Outlet control: That is when upstream water surface is influenced by downstream conditions.
- ⑫ The need for energy dissipation structures at culvert outlets should be avoided if possible, but if the exit velocity in the pipe exceeds 6.0 m/s, some kind of energy dissipator such as baffled outlet, drops, chutes, etc. should be provided.
- ⑬ Standard outlet protection is used if the pipe velocity at the outlet is equal to or less than 5 m/sec and the next higher class of protection is required if the pipe velocity at the outlet is greater than 5 m/sec.

REFERENCE DWGS: For pipe connection to structure see dwg No 17/1/1/01 TO 17/1/1/03
For general notes see dwg No 20/2/1/01 TO 20/2/1/03


Scale: N.T.S	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. No. 14/2/1/01	
Approved:	Sheet No 1 of 1	Rev. No.

**CULVERT
PLAN & SECTION**


ISLAMIC REPUBLIC OF IRAN
PLAN & BUDGET ORGANIZATION
TECNICAL RESEARCH AND
STANDARD BUREAU

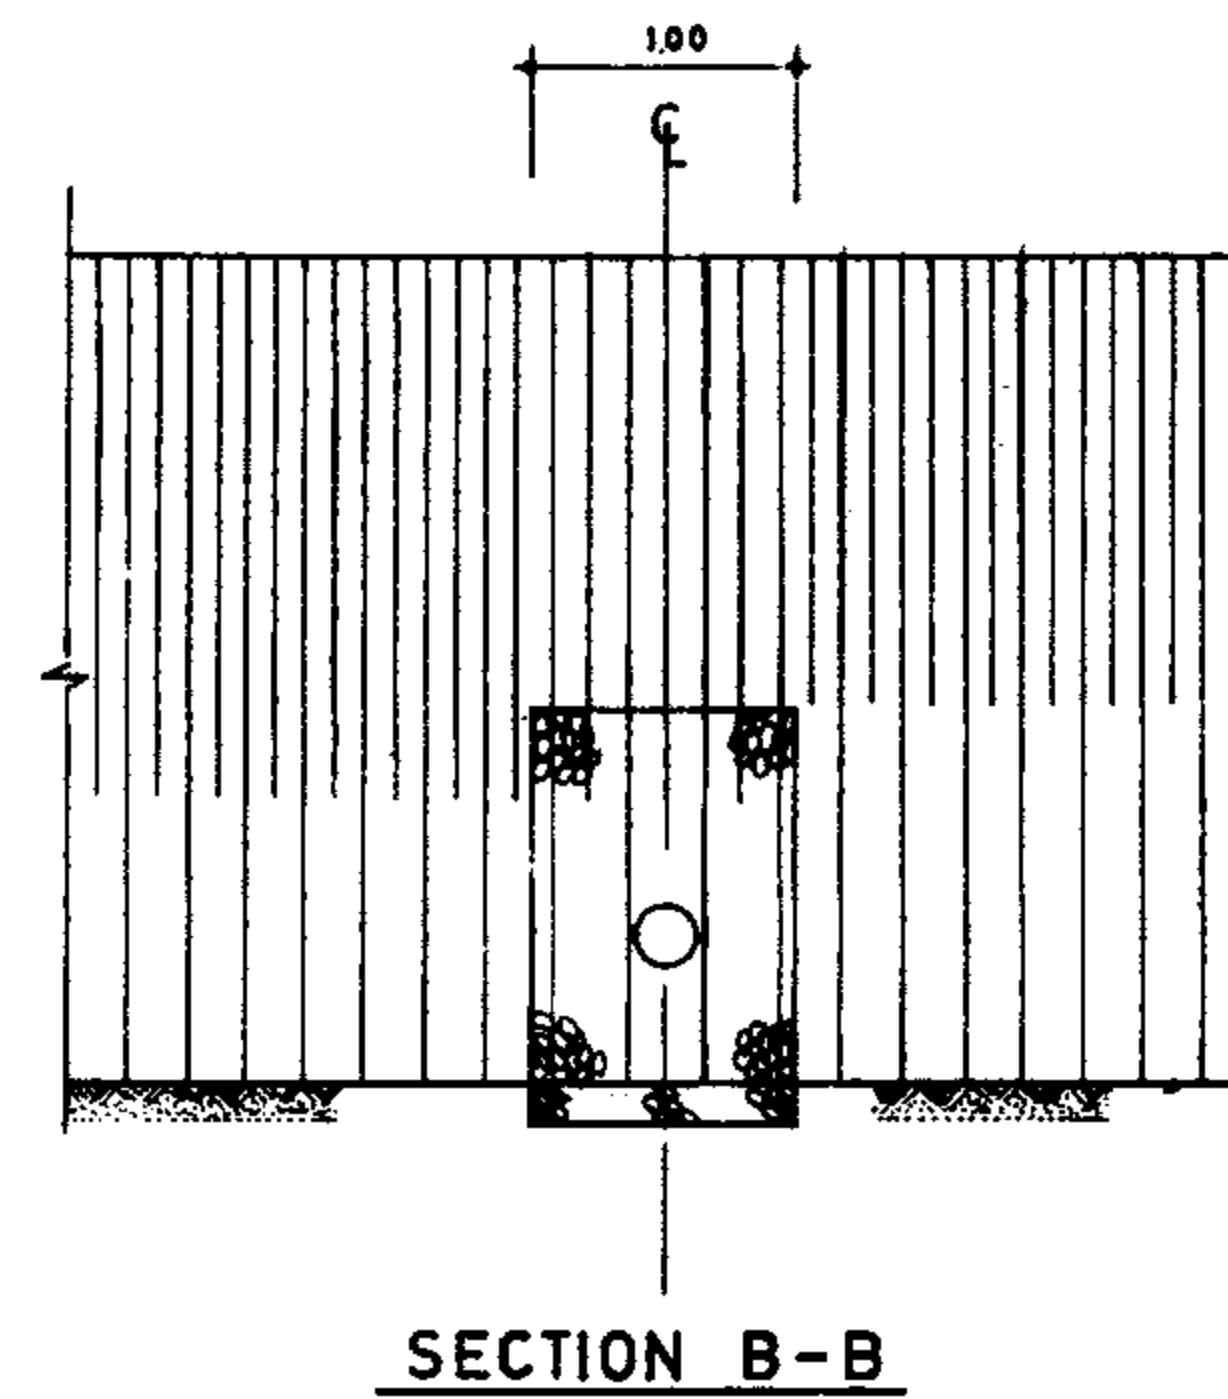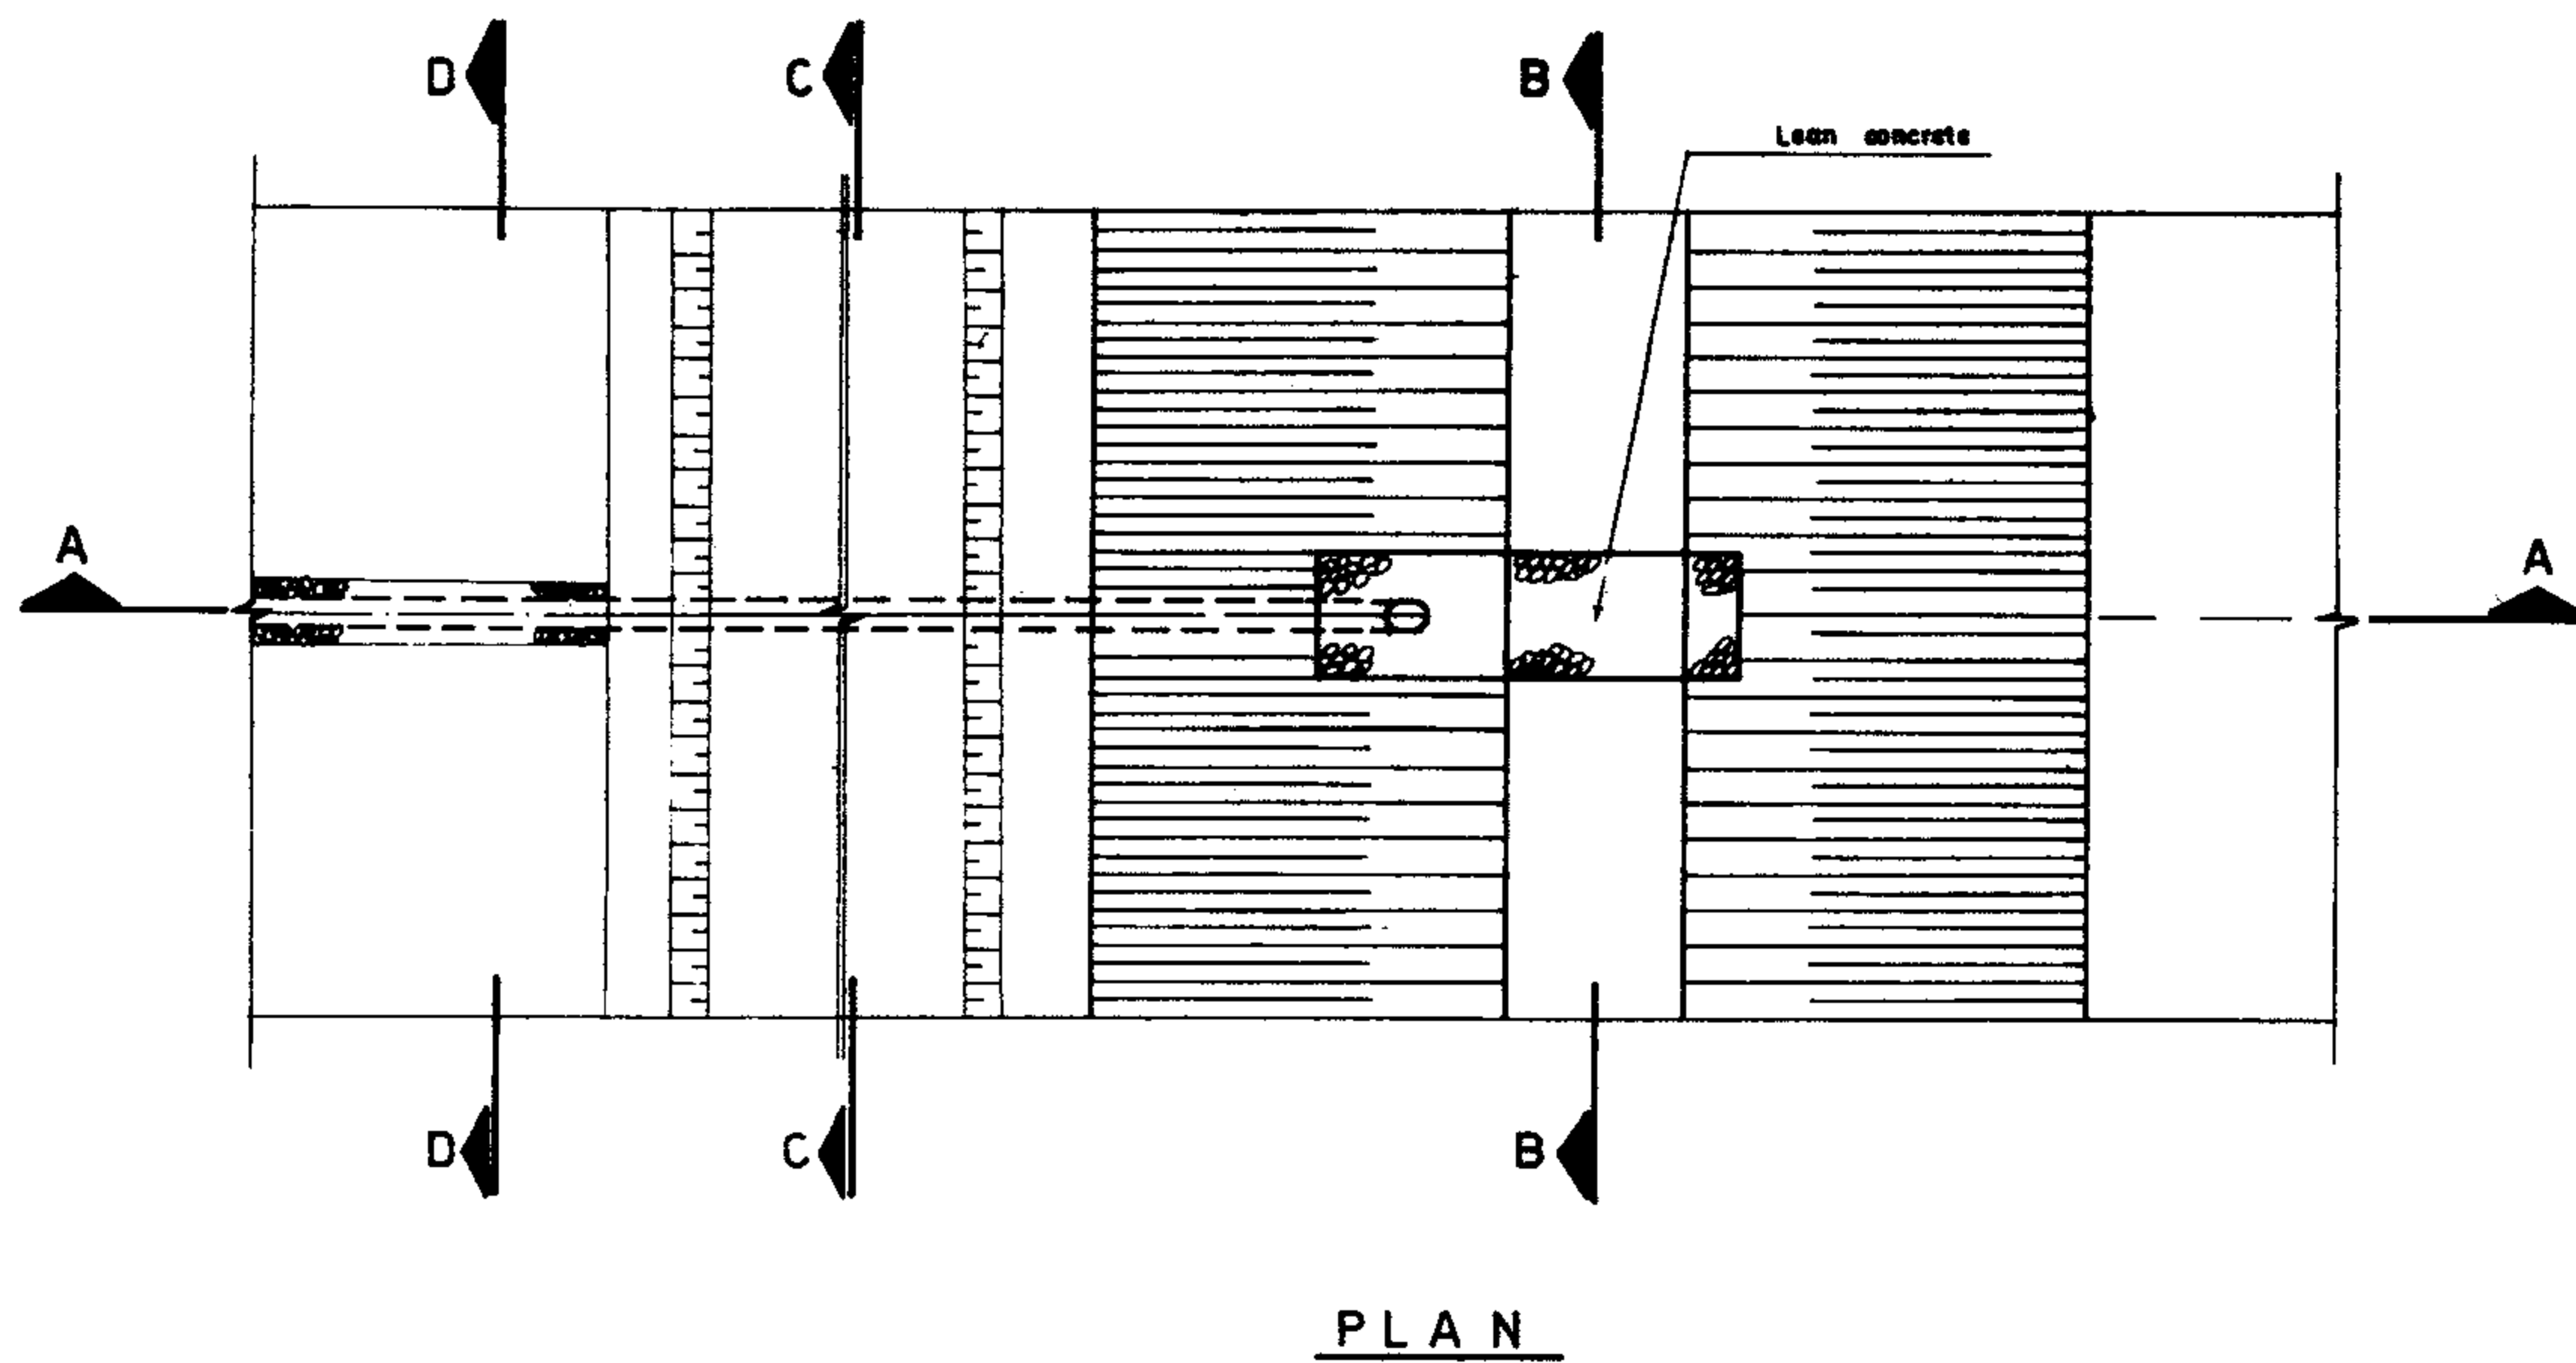


PLAN

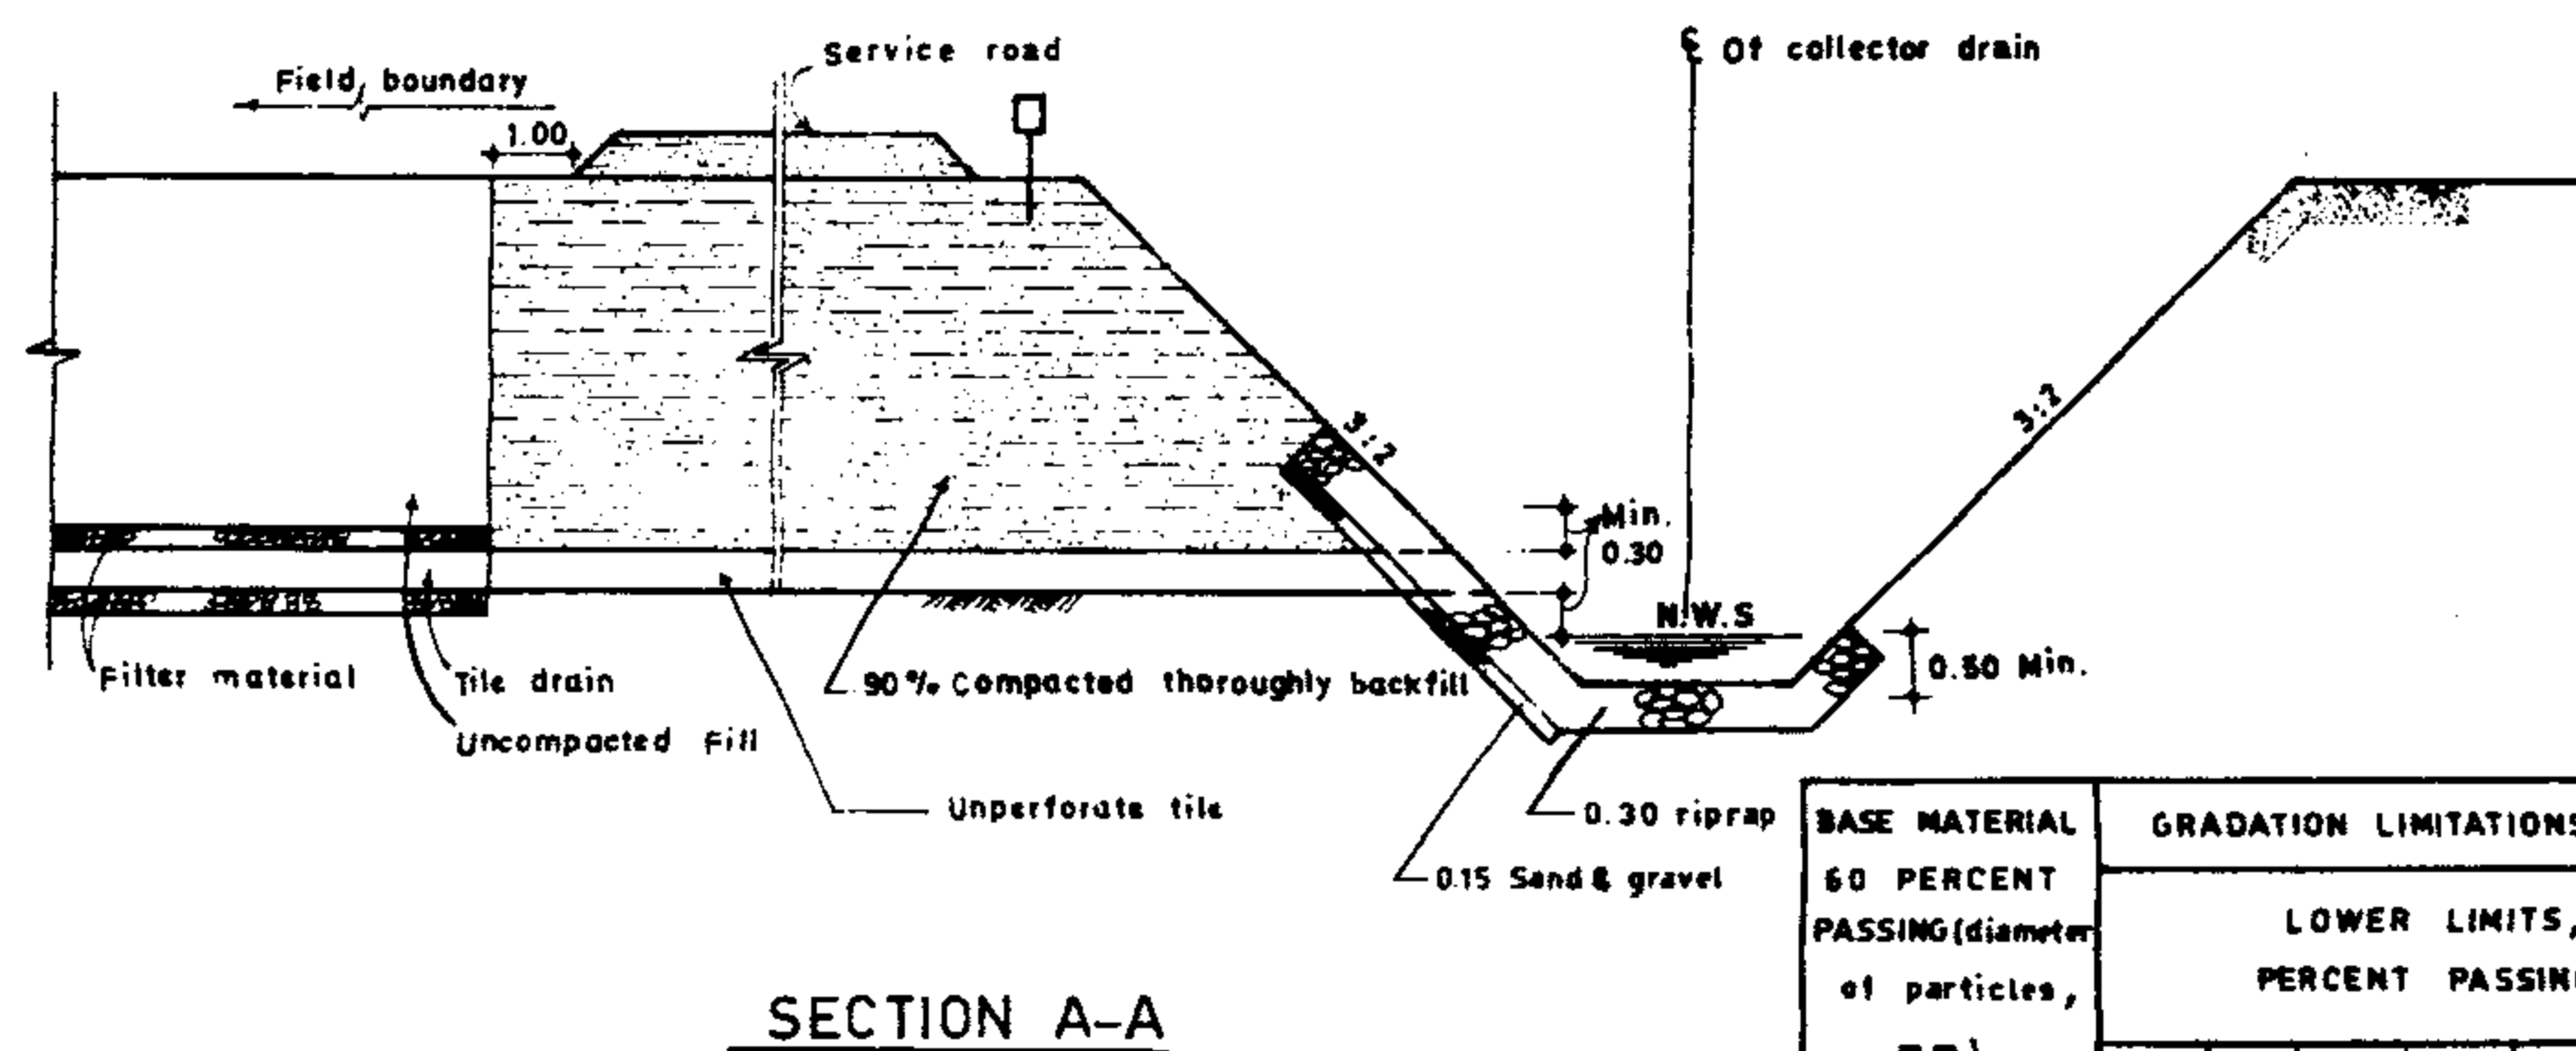

SECTION A-A

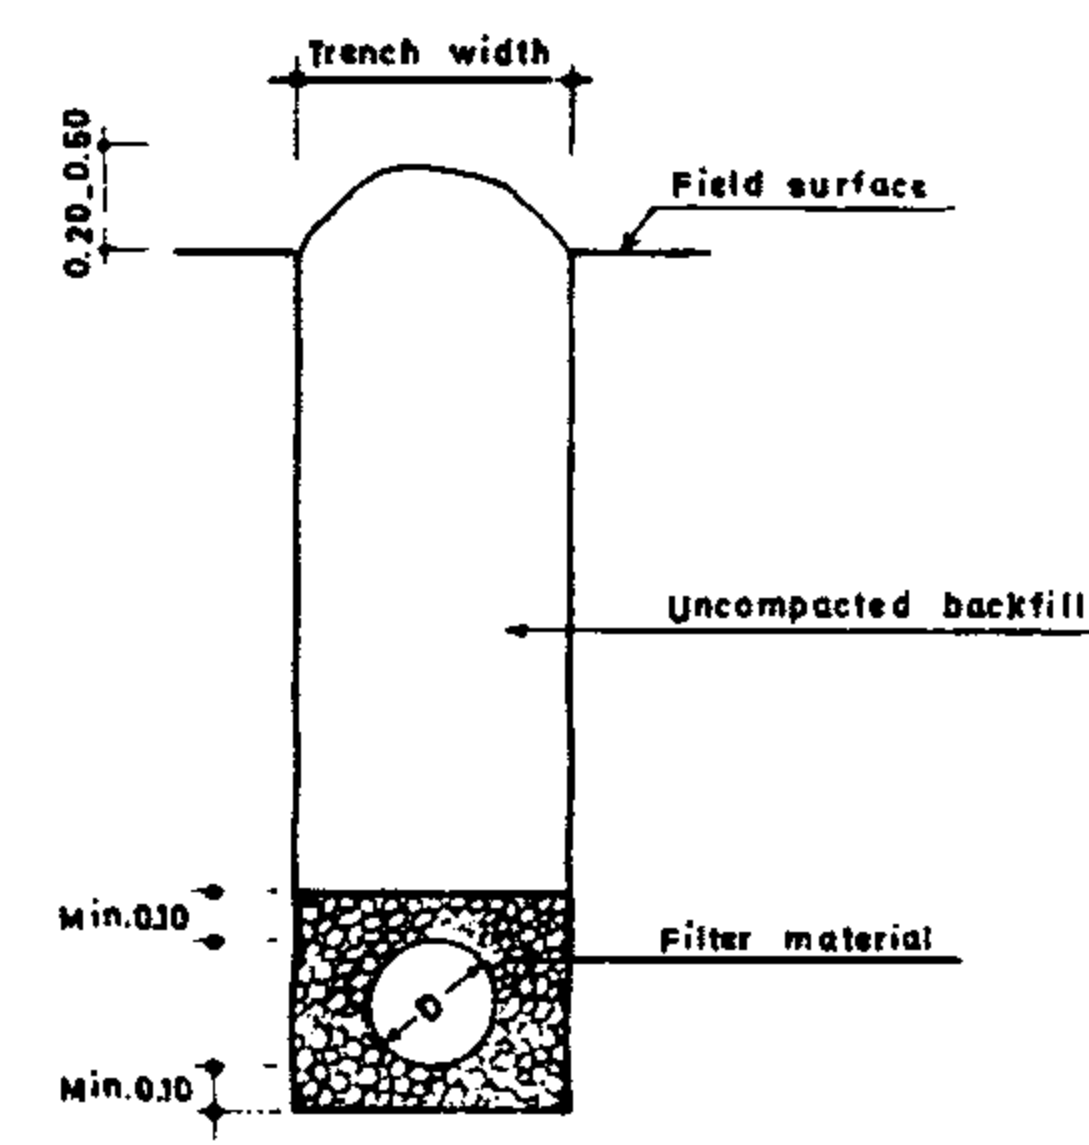

SECTION D-D

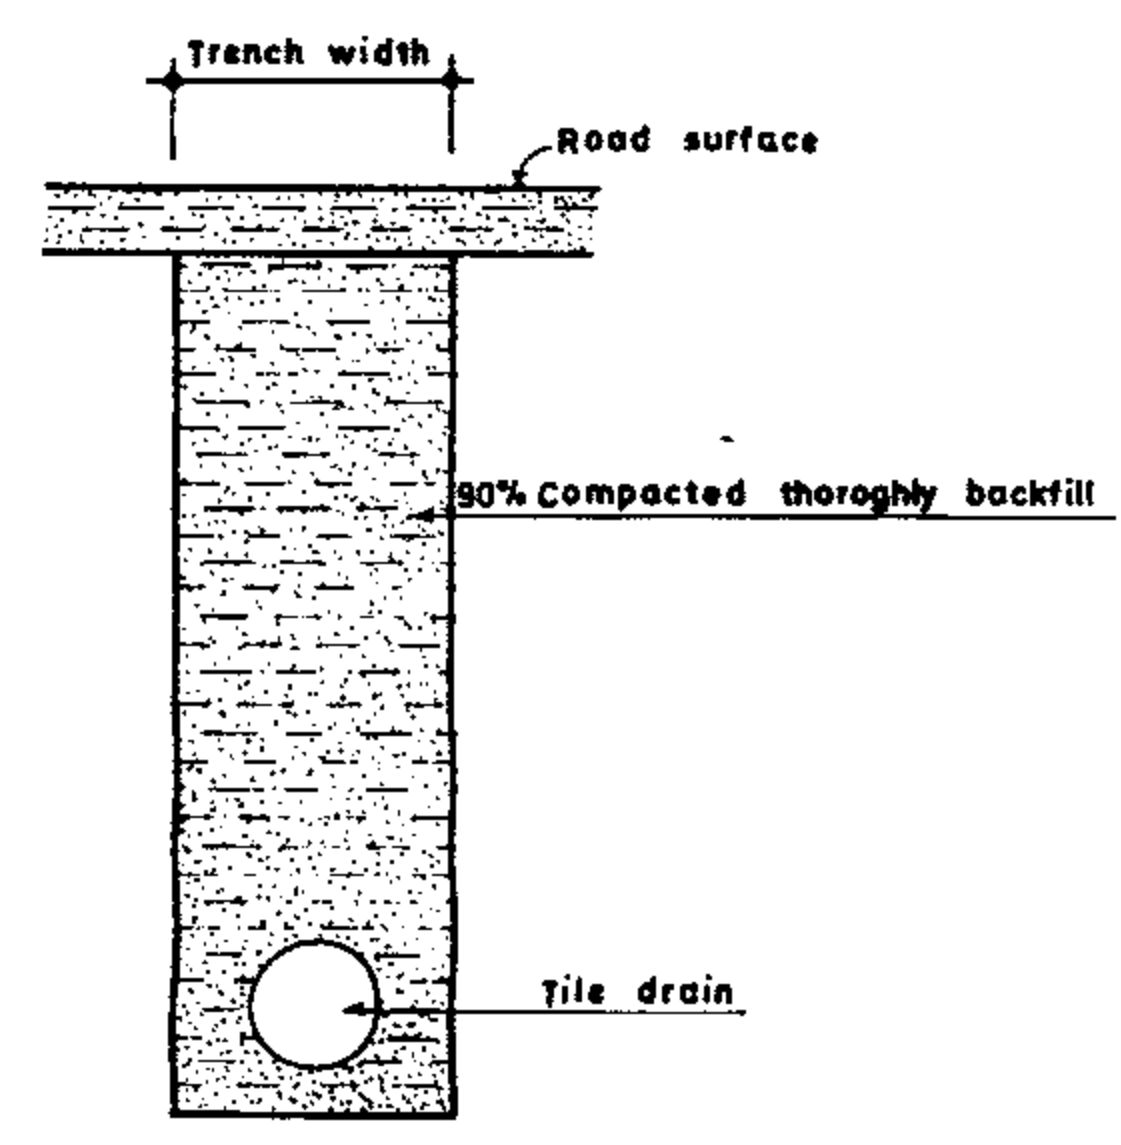

SECTION C-C








BASE MATERIAL 60 PERCENT PASSING (diameter of particles, mm)	GRADATION LIMITATIONS FOR ENVELOPE (diameter of particles,mm)											
	LOWER LIMITS, PERCENT PASSING						UPPER LIMITS, PERCENT PASSING					
	100	60	30	10	5	0	100	60	30	10	5	0
0.02-0.05	9.52	2.0	0.81	0.33	0.3	0.074	38.1	10.0	8.7	2.5	-	0.59
0.05-0.10	"	3.0	1.07	0.38	"	"	"	12.0	10.4	3.0	-	"
0.10-0.25	"	4.0	1.30	0.40	"	"	"	15.0	13.1	3.8	-	"
0.25-1.00	"	5.0	1.45	0.42	"	"	"	20.0	17.3	5.0	-	"

REFERENCE DWGS:

Scale: N.T.S. IRRIGATION & DRAINAGE STANDARDS
 Date: DWG. NO. 14/3/1/01
 Approved: Sheet No 1 of 1 Rev. No.

ISLAMIC REPUBLIC OF IRAN
 PLAN & BUDGET ORGANIZATION
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

TILE DRAIN OUTLET

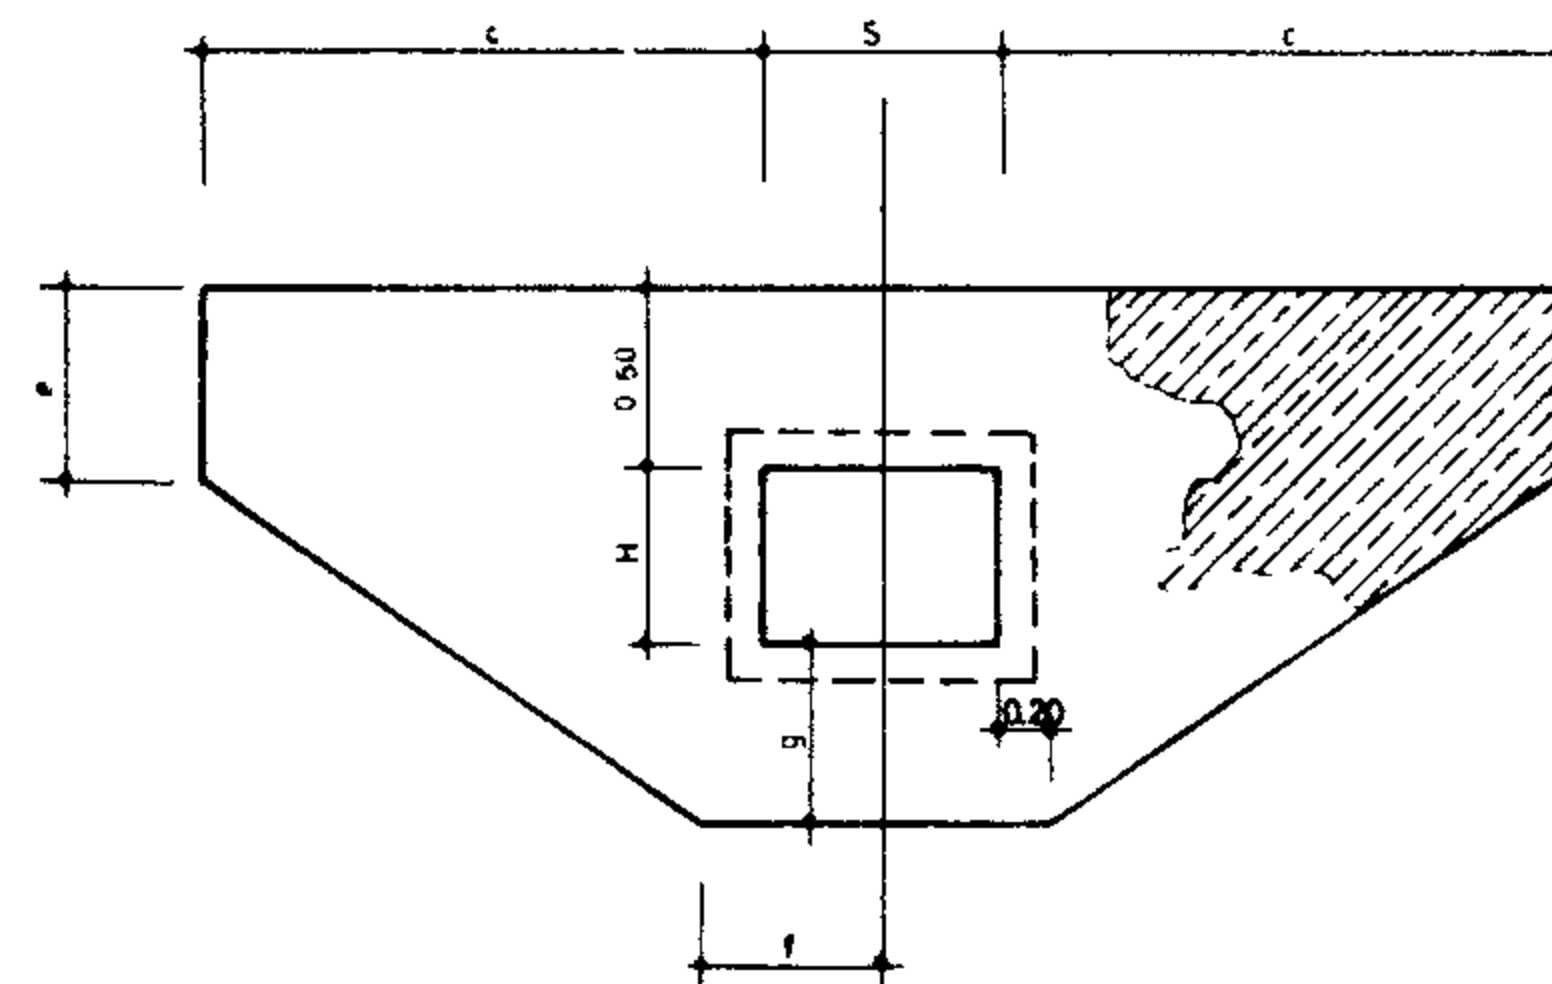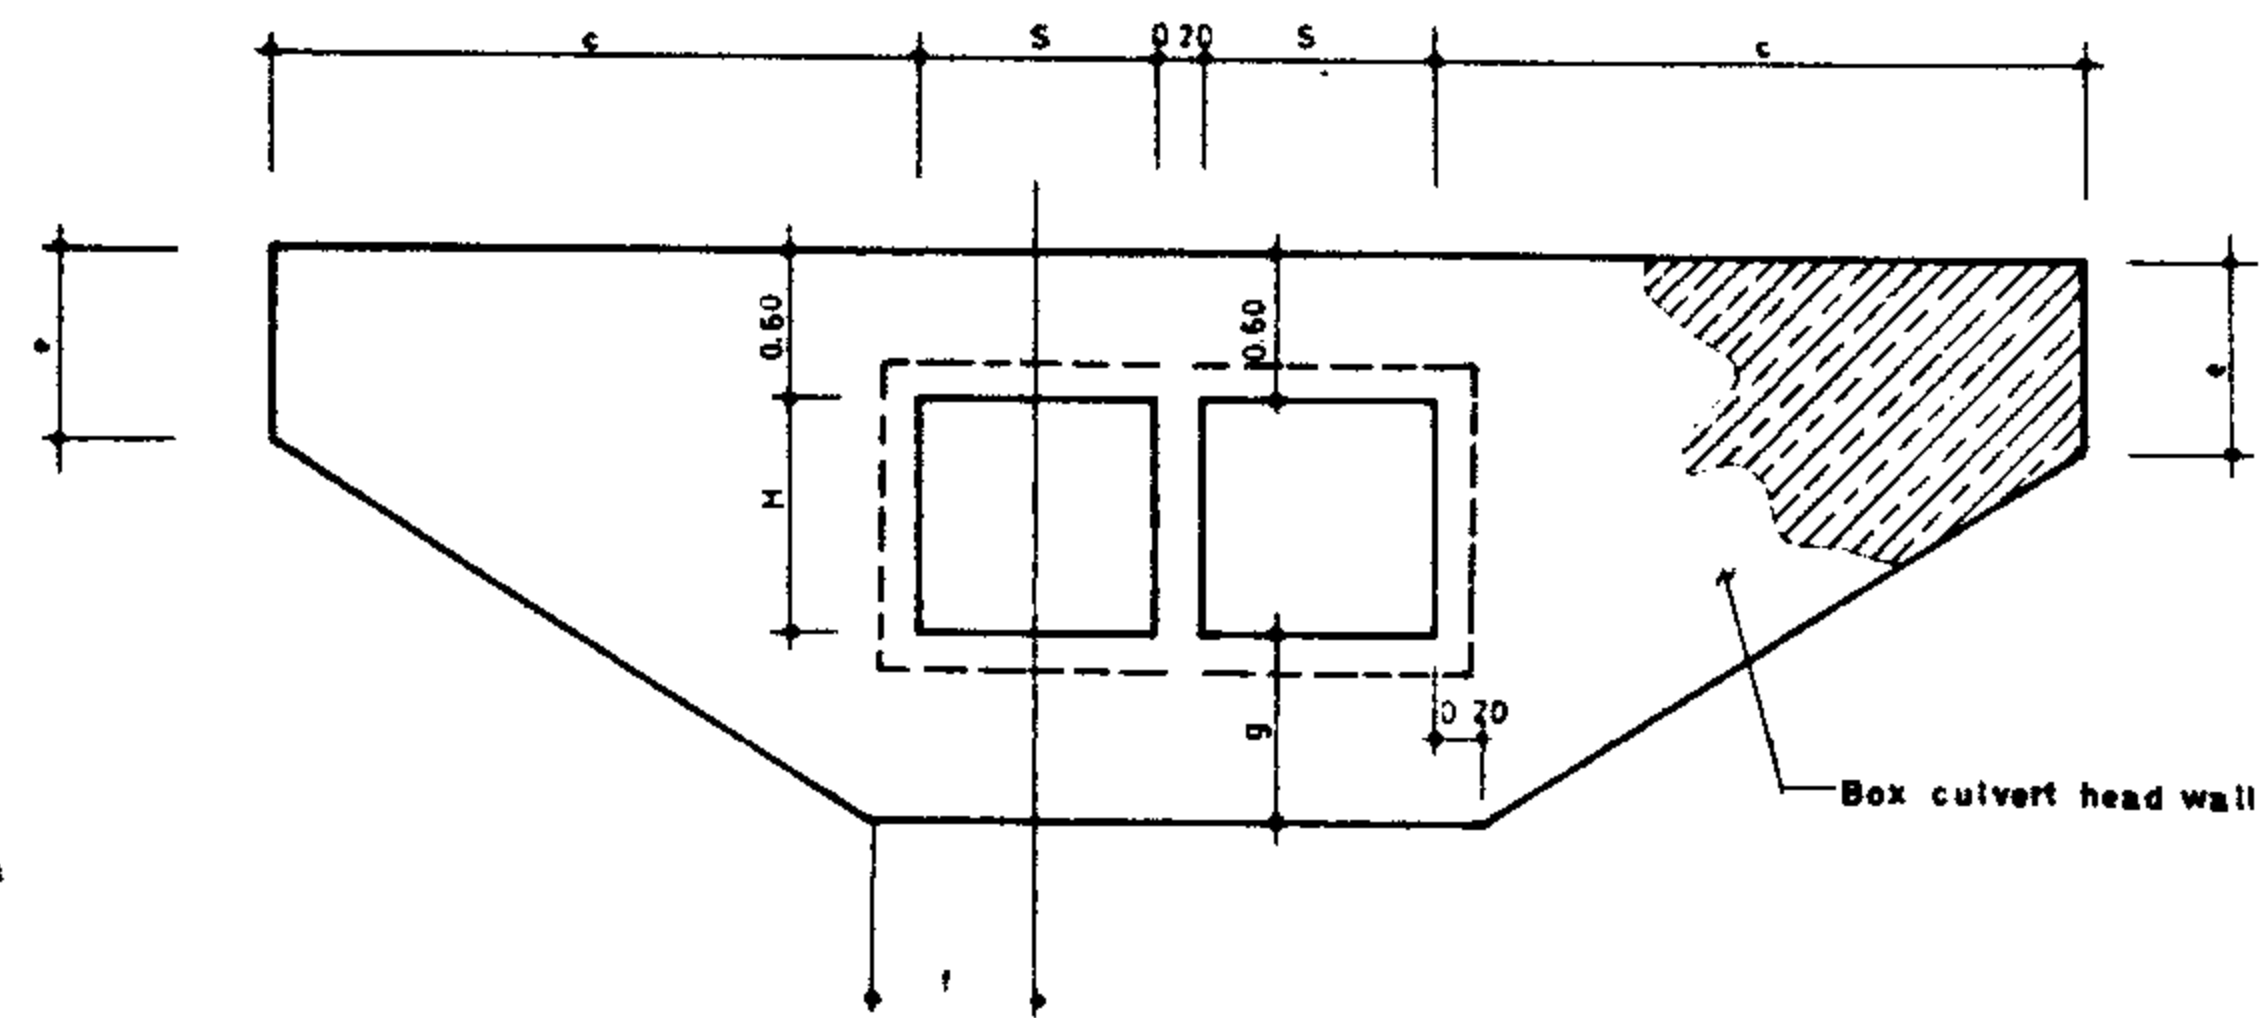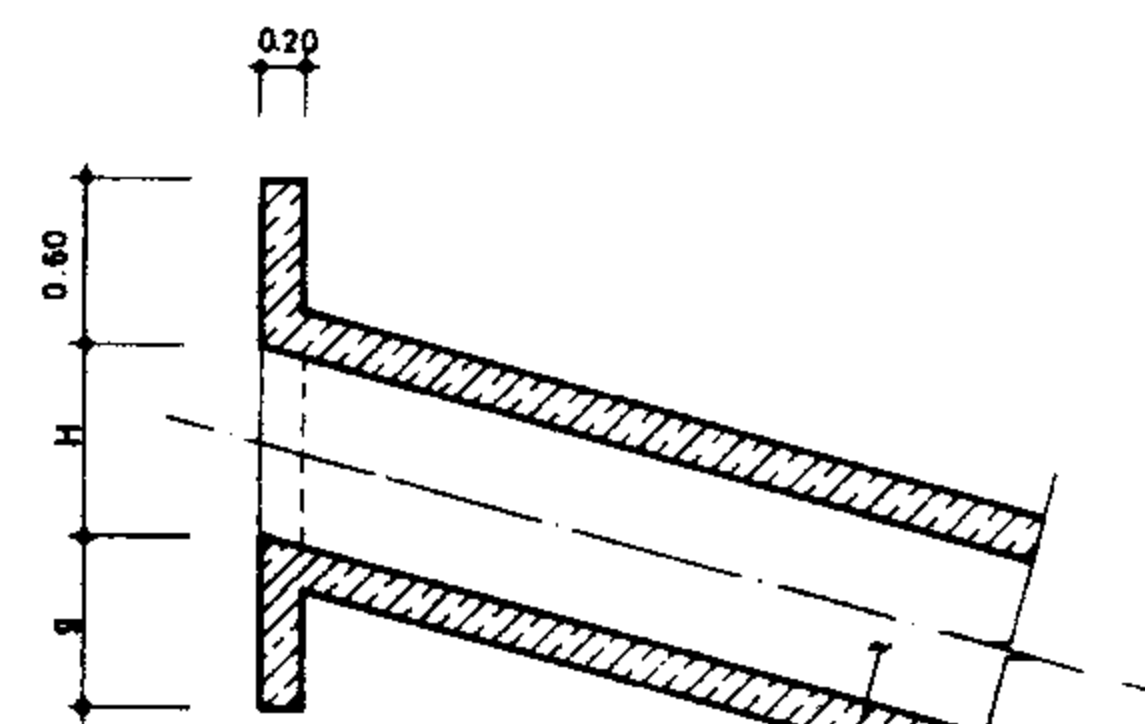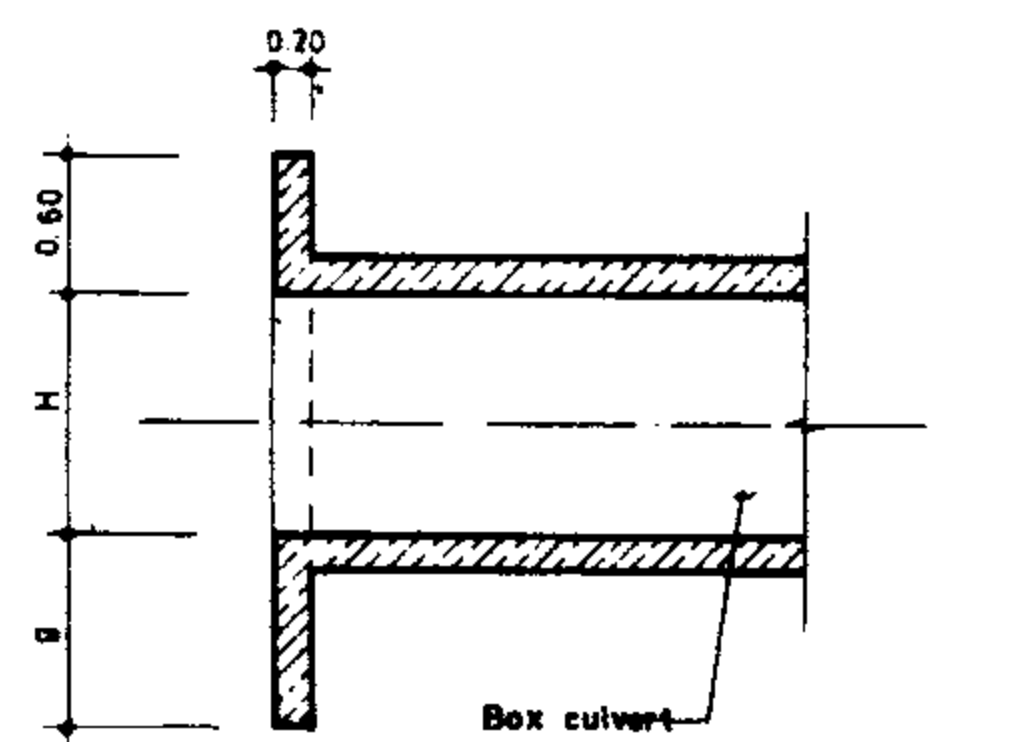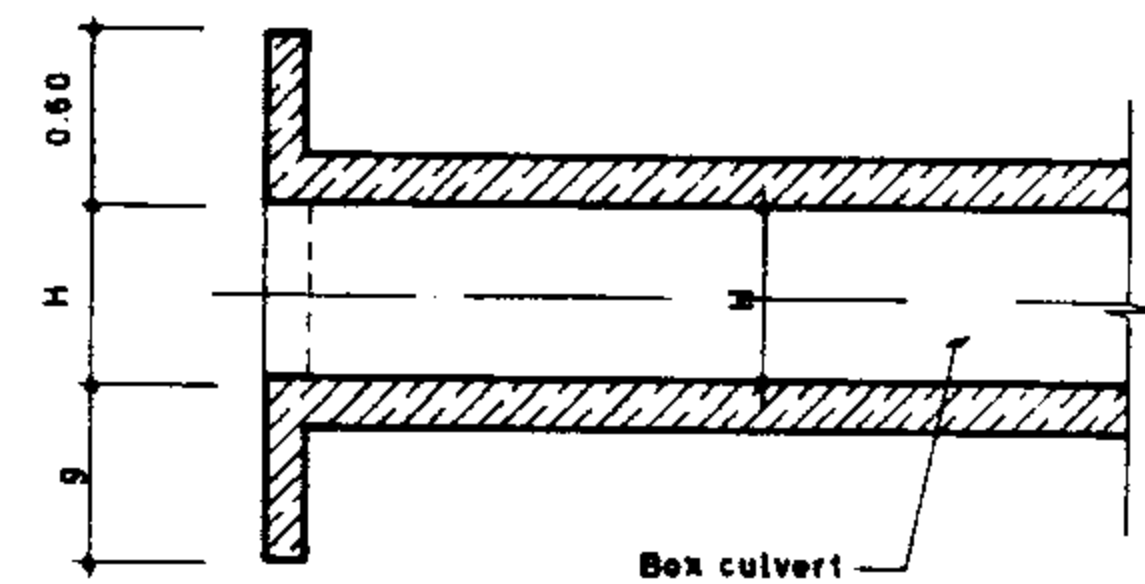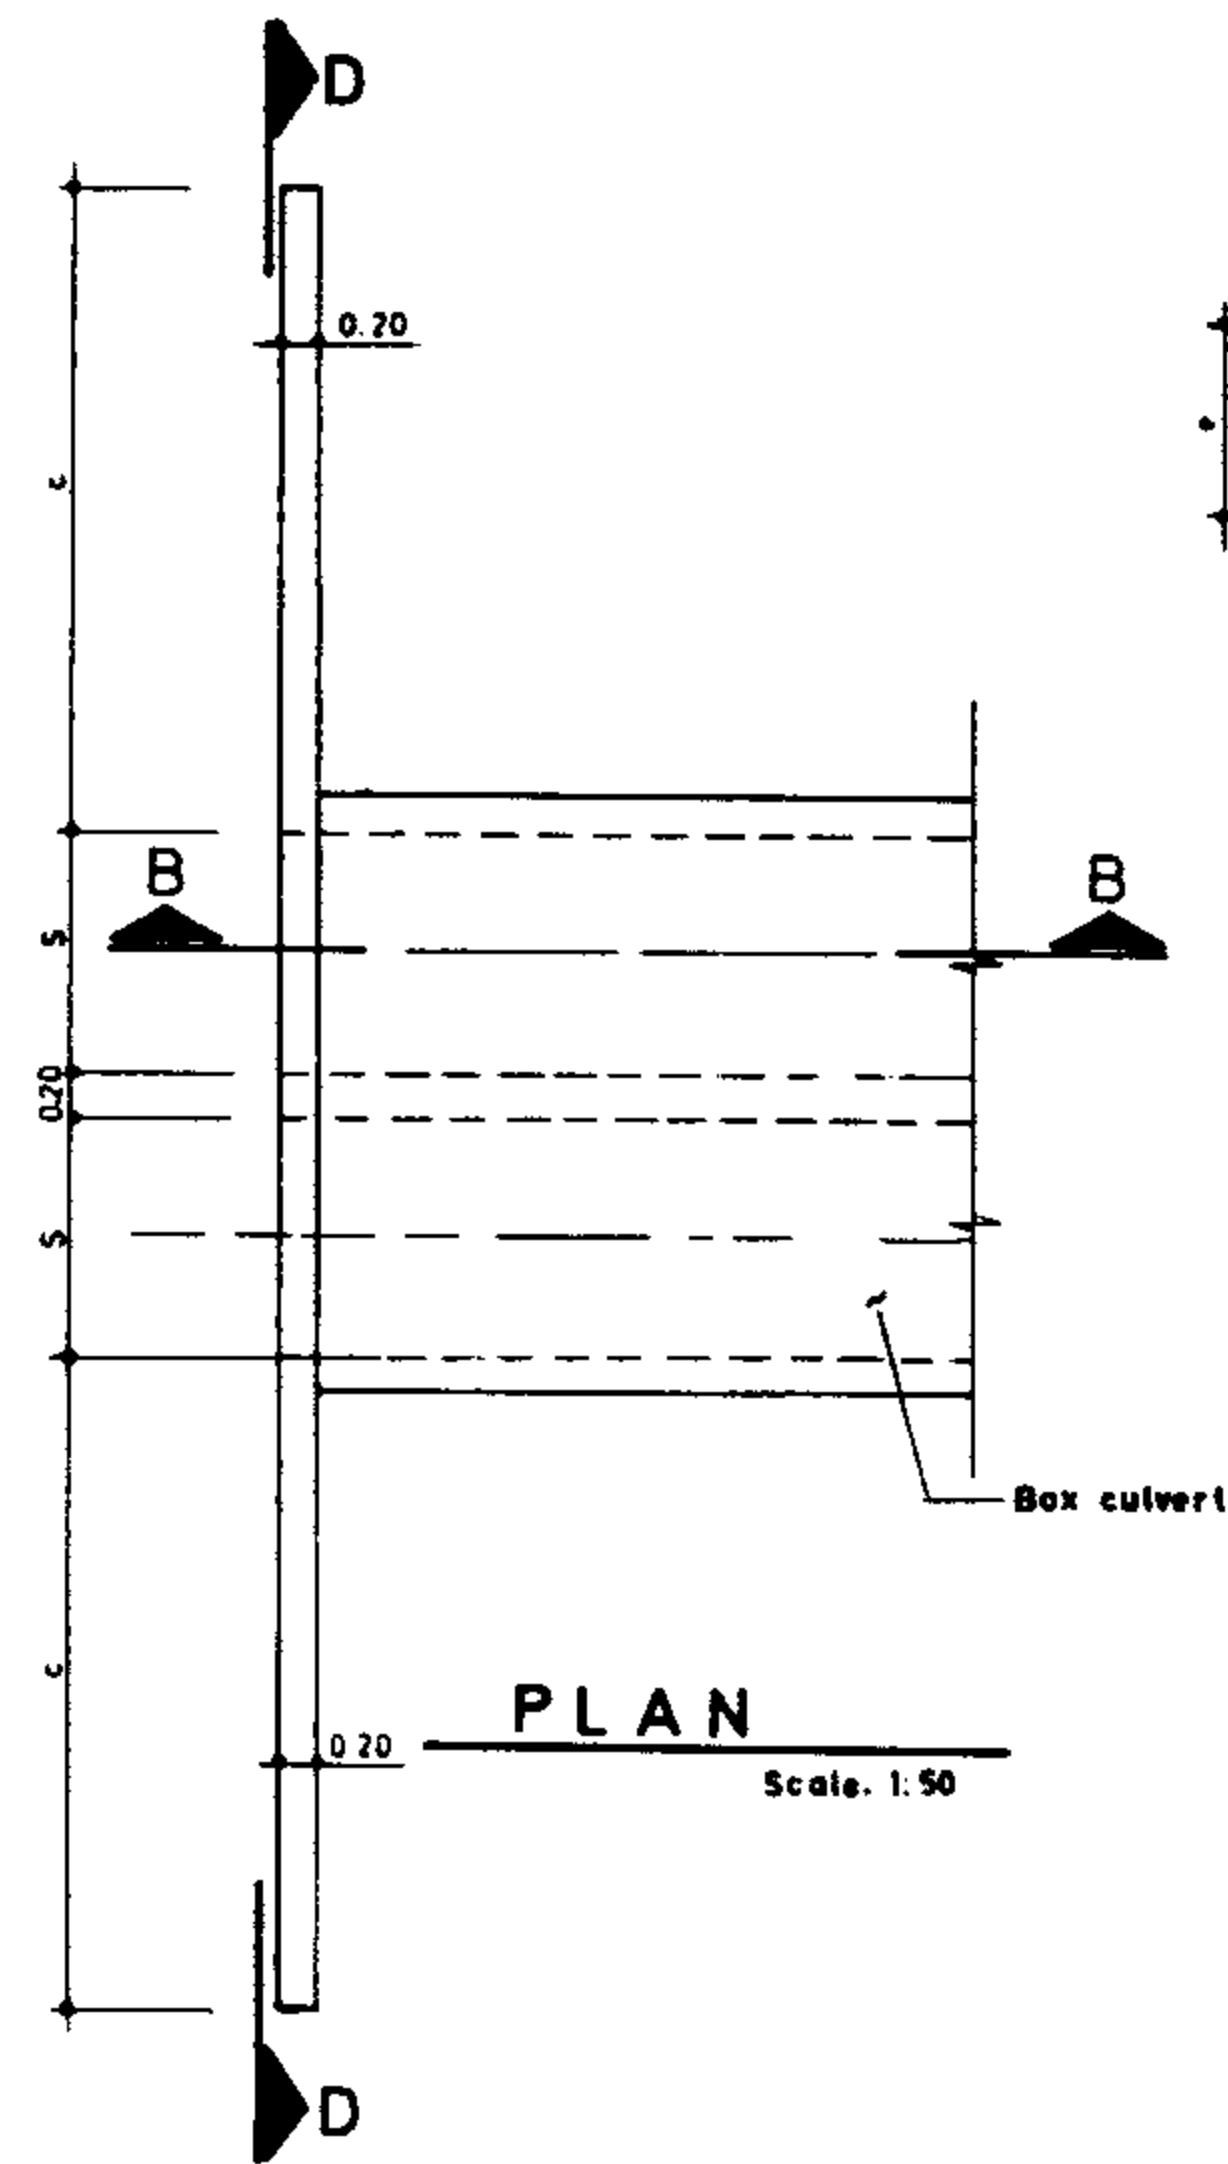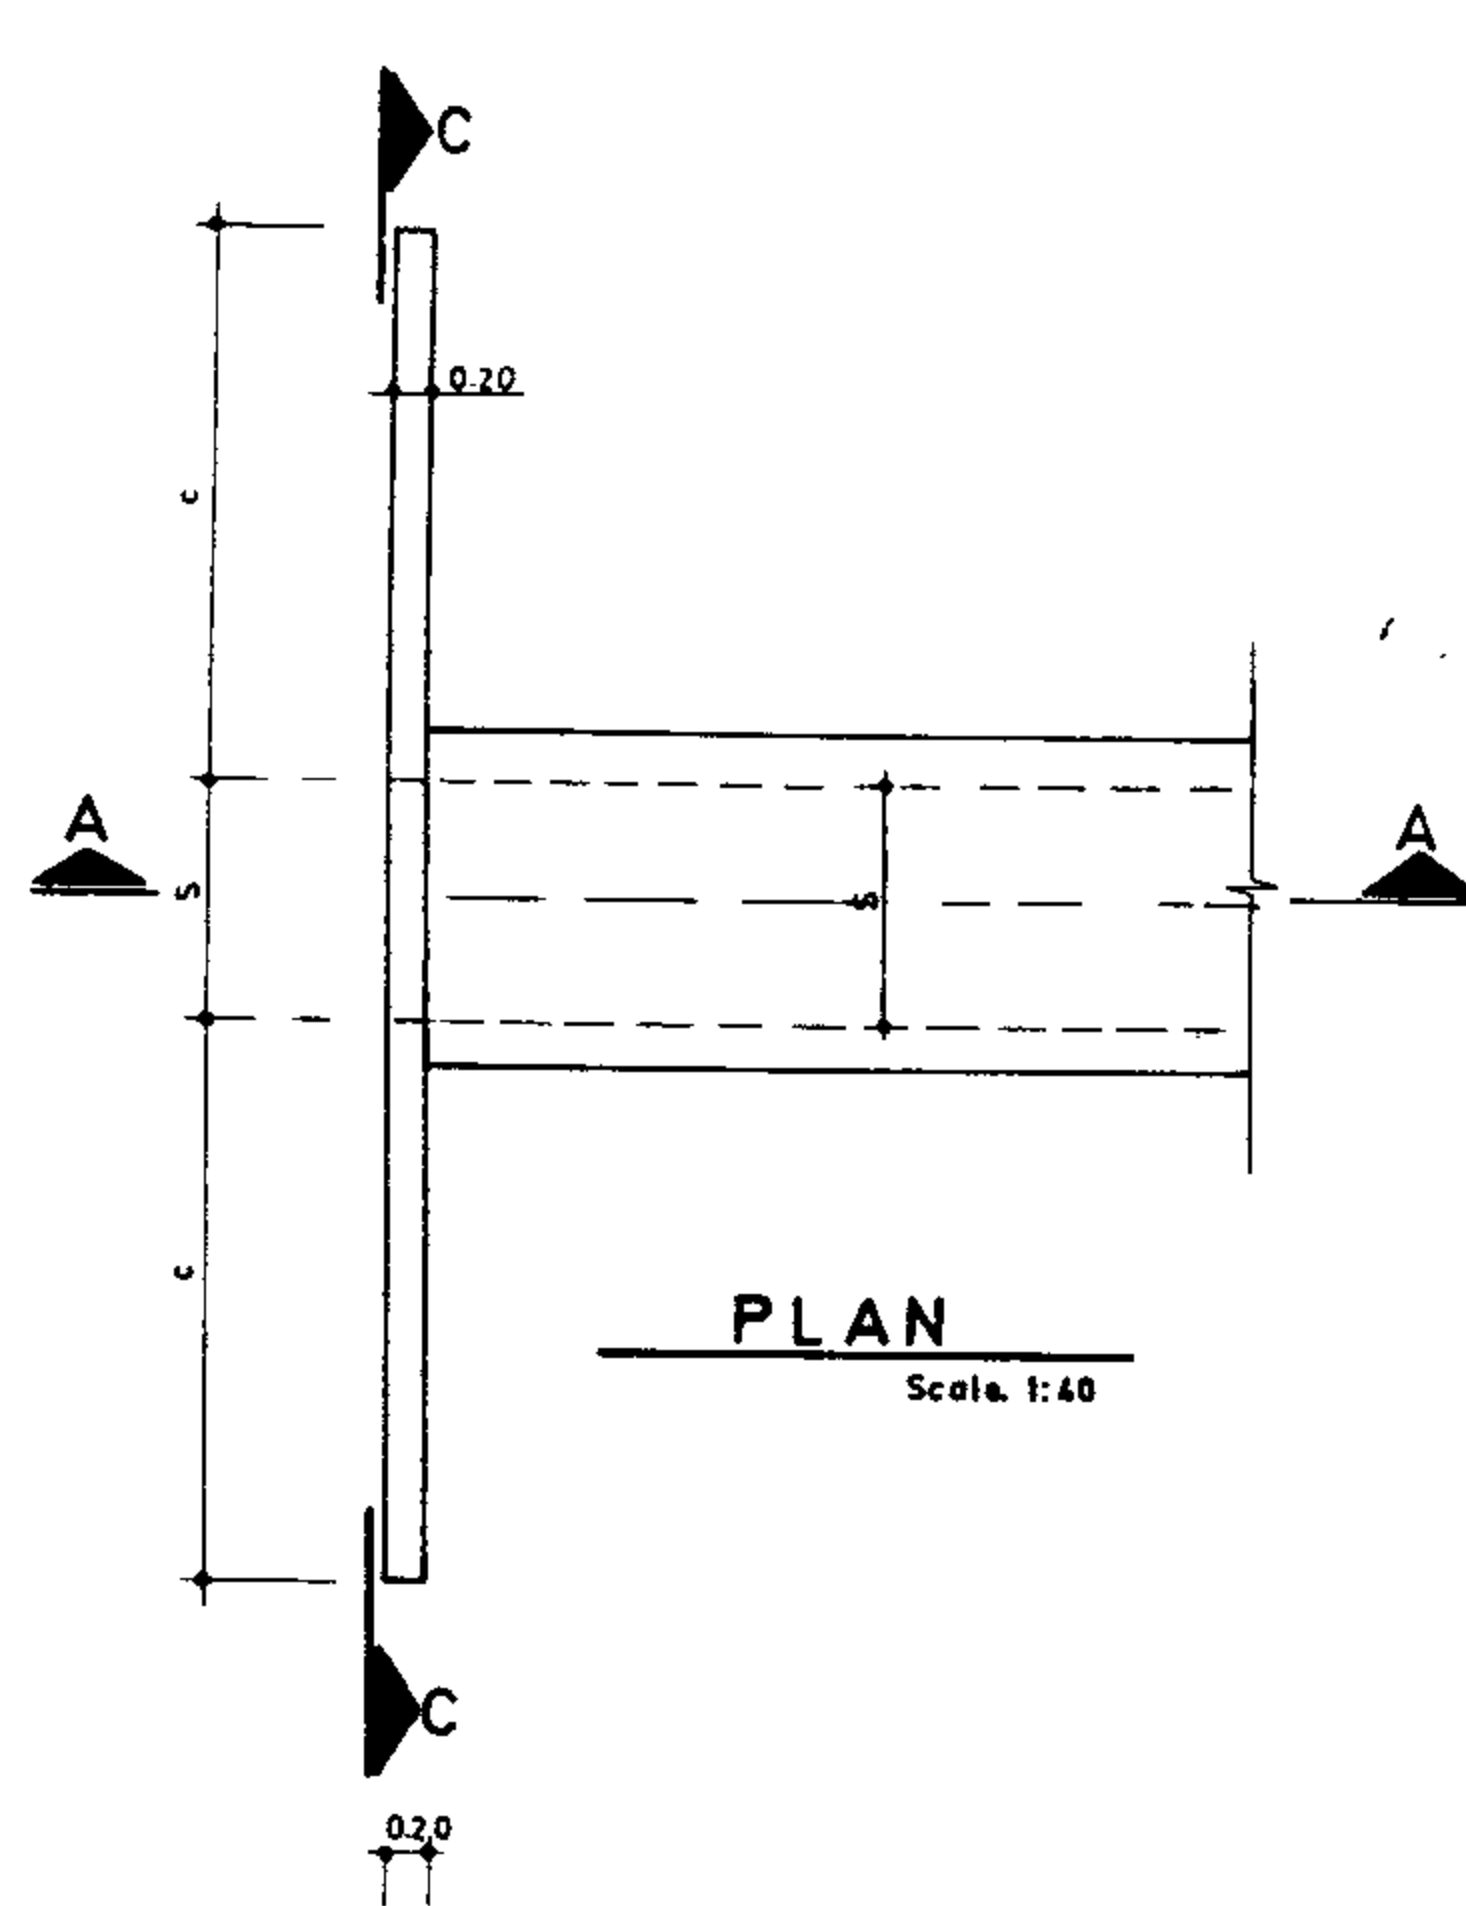

NOTES:

- ① Headwalls could be used at the culvert ends under compacted fill in lieu to inlet and outlet transitions.
- ② "H" designated as height of opening is equal to height of box culvert.
- ③ "S" designated as span of opening is equal to defined as span of box culvert.

SINGLE BOX HEADWALL DIMENSION TABLE

H	S	c	g	e	f	R/Bar Kg	Conc m ³	FORM m ²
0.60	0.80	1.95	0.60	0.55	0.60	136.15	1.19	13.28
0.80	0.80	2.30	0.80	0.80	0.60	185.13	1.66	18.52
0.80	1.00	2.30	0.80	0.80	0.70	188.52	1.72	18.84
0.80	1.50	2.30	0.80	0.80	0.95	207.73	1.86	20.32
1.00	1.00	2.60	0.80	0.80	0.70	219.35	2.01	21.88
1.00	1.50	2.60	0.80	0.80	0.95	238.56	2.15	23.38
1.00	2.00	2.75	1.00	0.90	1.20	296.45	2.63	28.48
1.50	1.50	3.35	1.00	1.00	0.95	338.97	3.31	35.61
1.50	2.00	3.35	1.00	1.00	1.20	360.36	3.47	37.38
1.75	2.00	3.70	1.00	1.00	1.20	403.44	3.95	42.38
2.00	2.00	3.80	1.00	1.20	1.20	437.75	4.38	47.04
2.00	2.50	4.10	1.20	1.20	1.45	501.93	5.10	54.52

DOUBLE BOX HEADWALL DIMENSION TABLE

H	S	c	g	e	f	R/Bar Kg	Conc m ³	FORM m ²
1.00	1.00	2.60	0.80	0.80	0.70	266.93	2.38	25.84
1.00	1.50	2.60	0.80	0.80	0.95	305.48	2.66	28.84
1.00	2.00	2.60	1.00	1.00	1.20	379.29	3.32	35.84
1.50	1.50	3.35	1.00	1.00	0.95	415.68	3.92	42.10
1.50	2.00	3.35	1.00	1.00	1.20	446.76	4.24	45.60
1.50	2.50	3.35	1.20	1.20	1.45	528.12	5.03	54.10
2.00	2.00	4.10	1.20	1.20	1.20	575.74	5.80	62.04
2.00	2.50	4.10	1.20	1.20	1.45	629.18	6.16	66.04

REFERENCE DWGS: For head wall reinforcement see dwg. No: 14/1/3/01
For general notes see dwg. No: 20/2/1/01 TO 20/2/1/03

Scale: 1:40-1:50

IRRIGATION & DRAINAGE STANDARDS

Date:


DWG. No 14/1/1/01

Approved:


Sheet. No 1 of 9 Rev. No

TYPICAL HEADWALL FOR BOX CULVERTS
PLAN & SECTION


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU

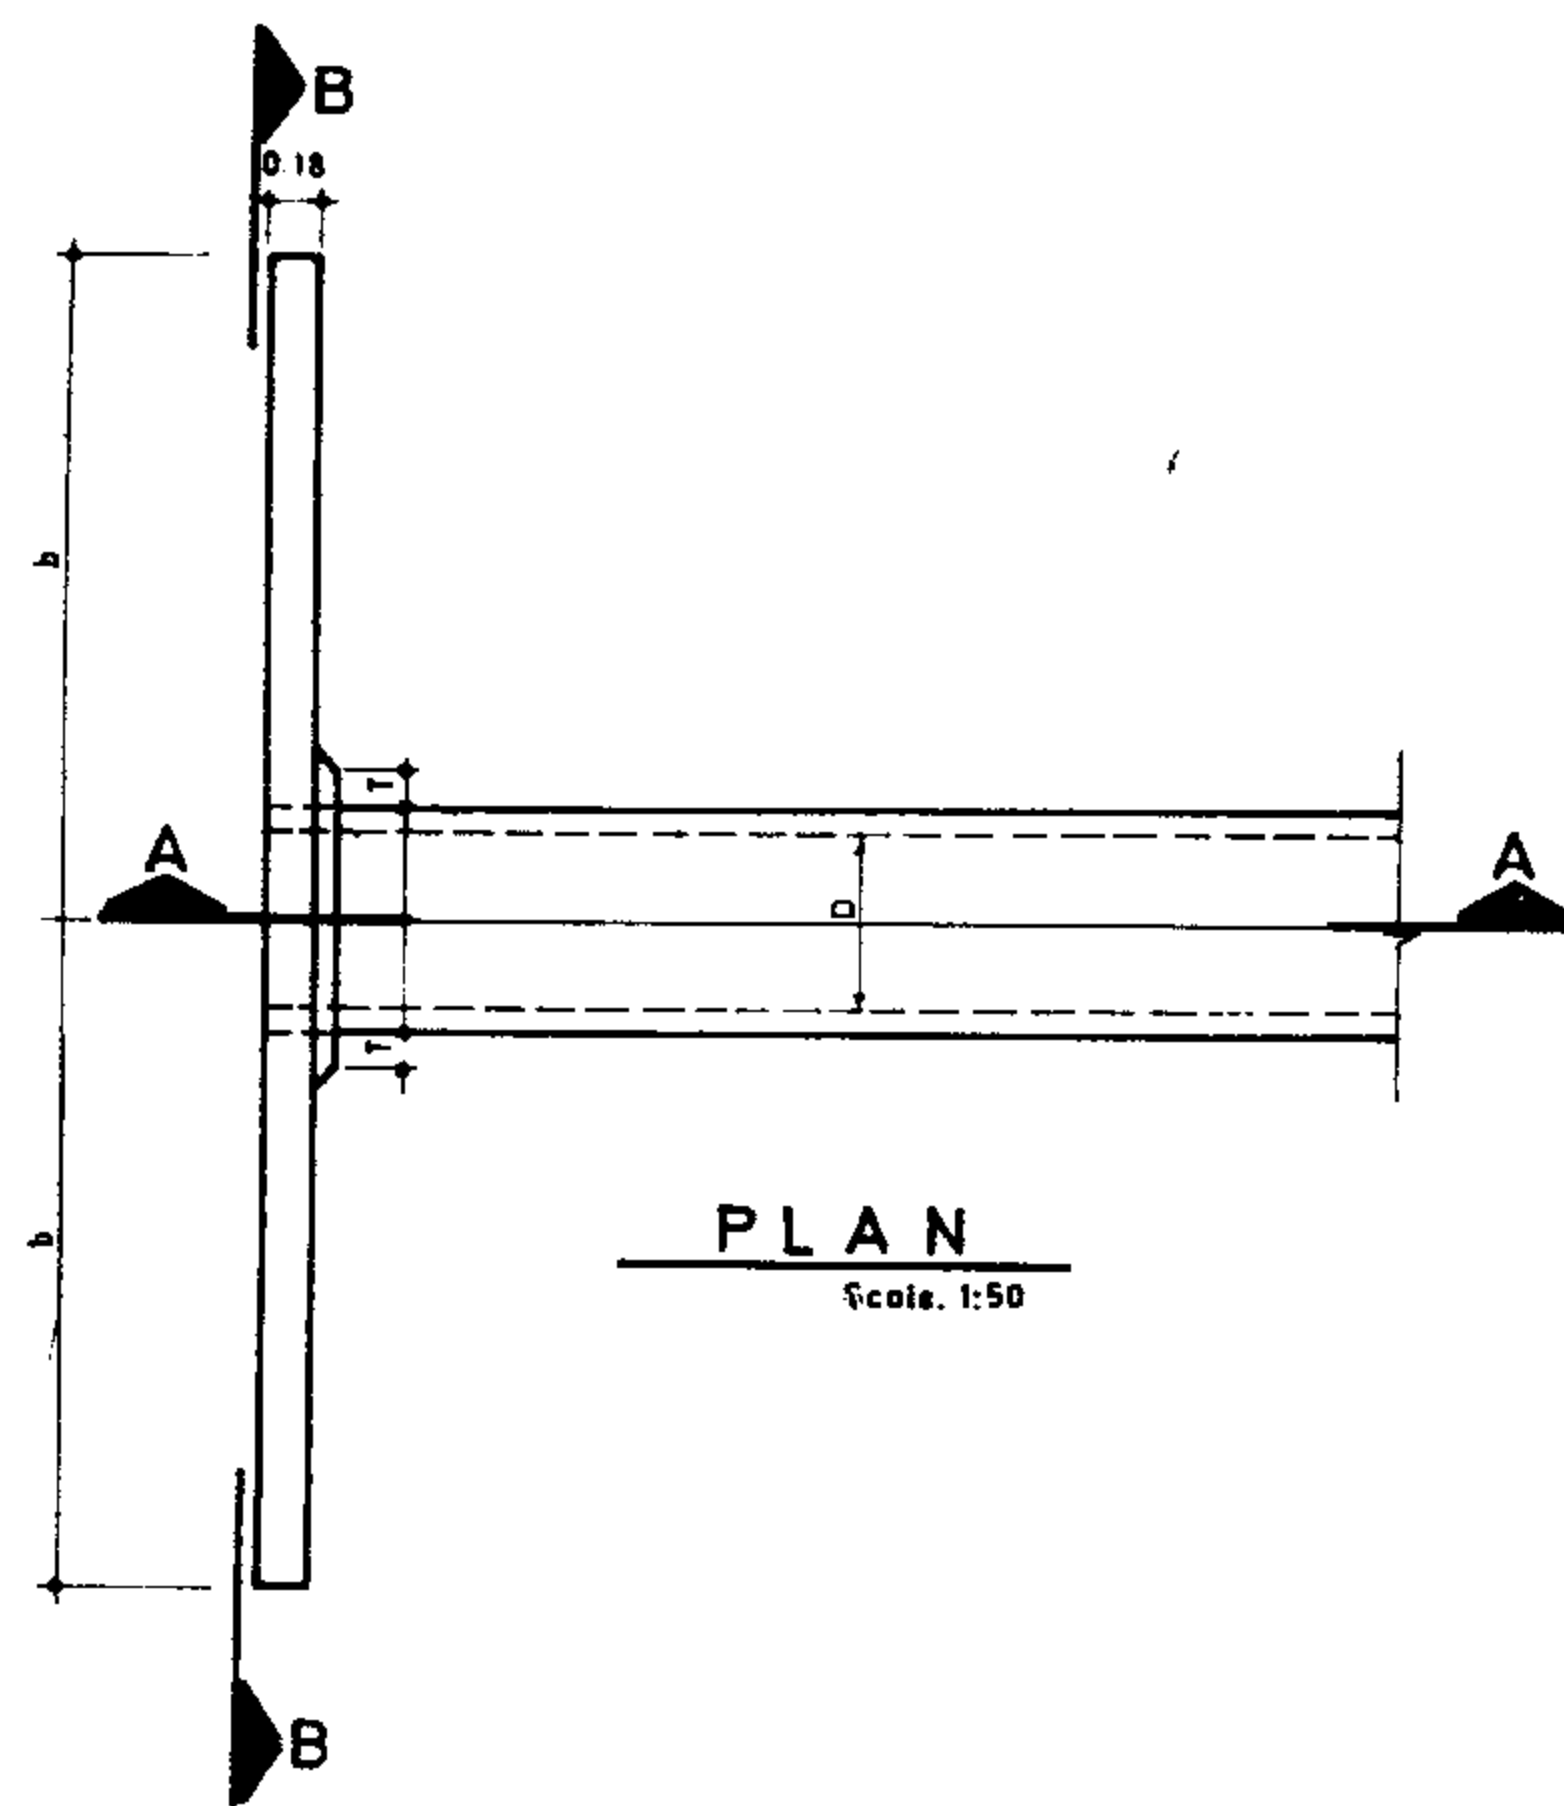


PLAN
Scale: 1:50

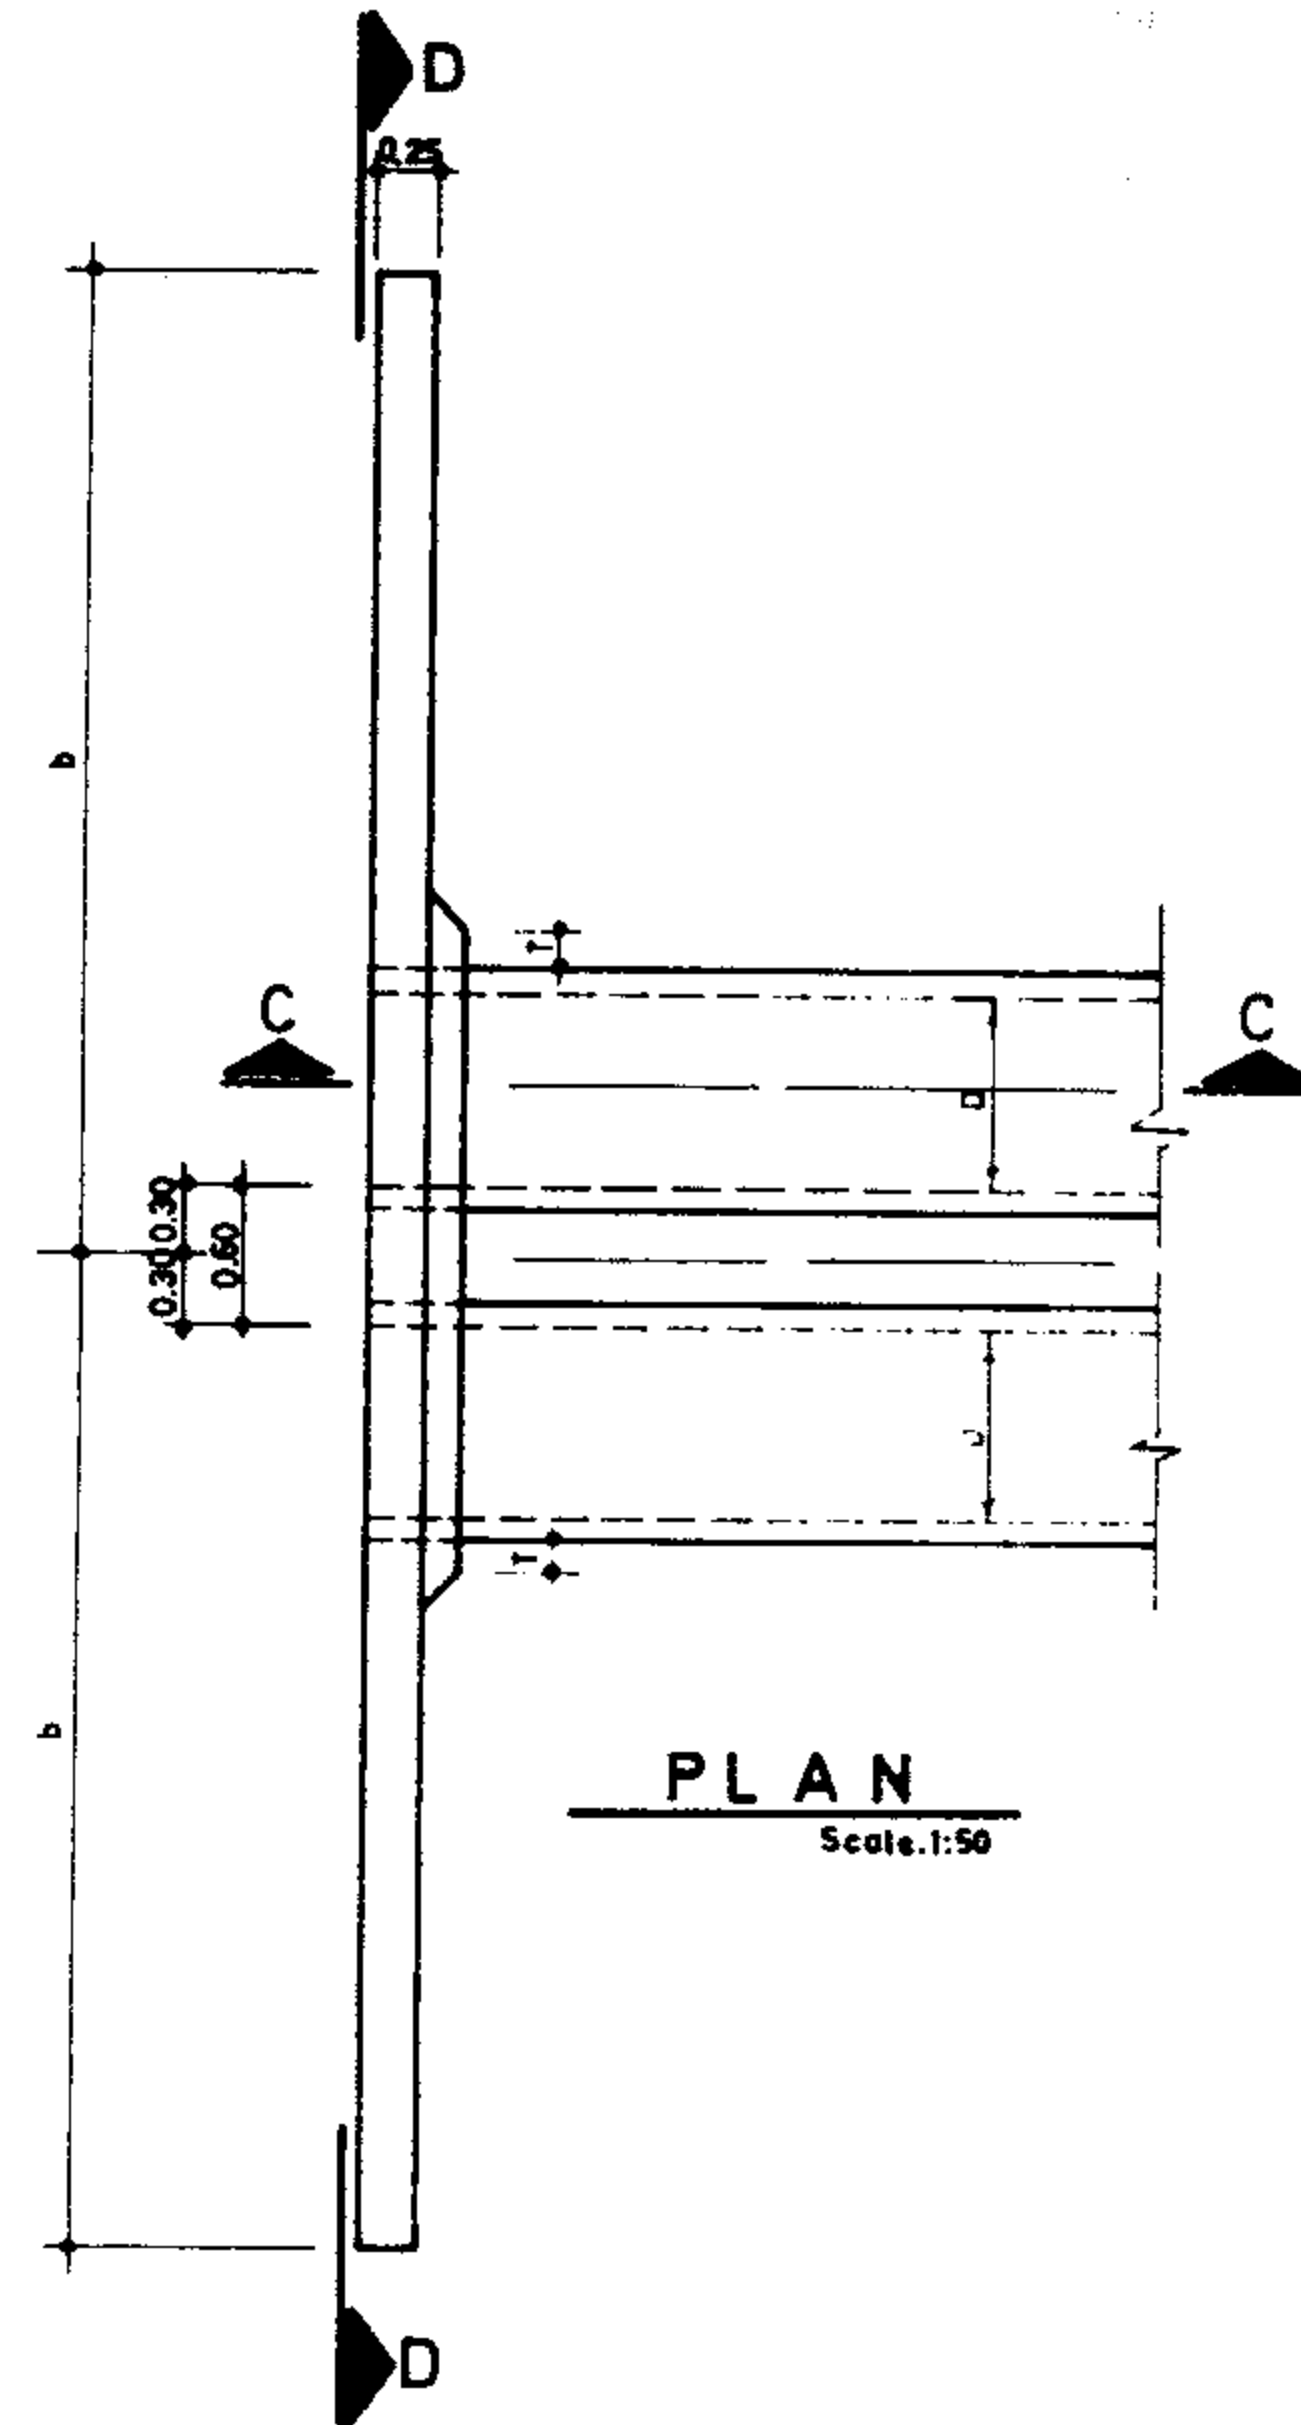


PLAN
Scale: 1:50

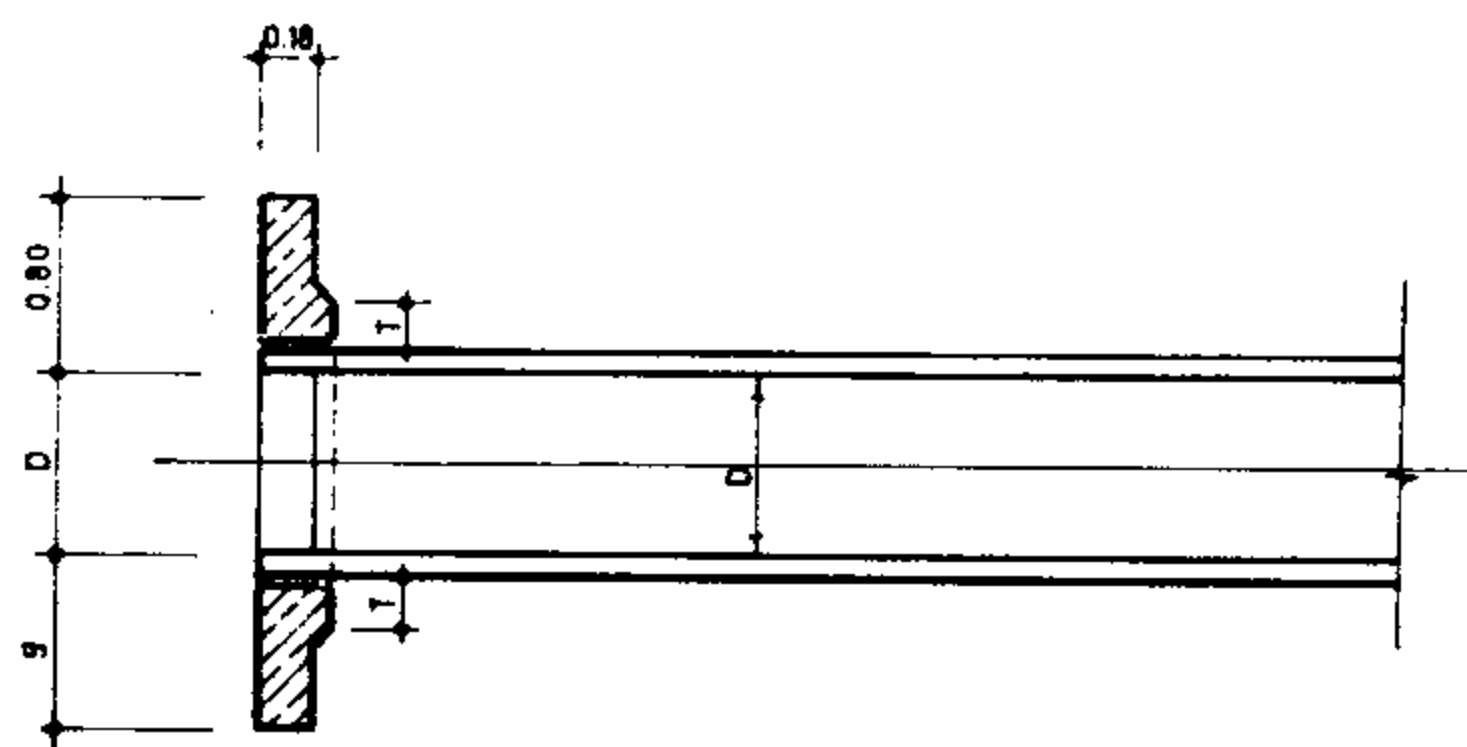


SECTION A-A
One barrel pipe culvert Scale: 1:40

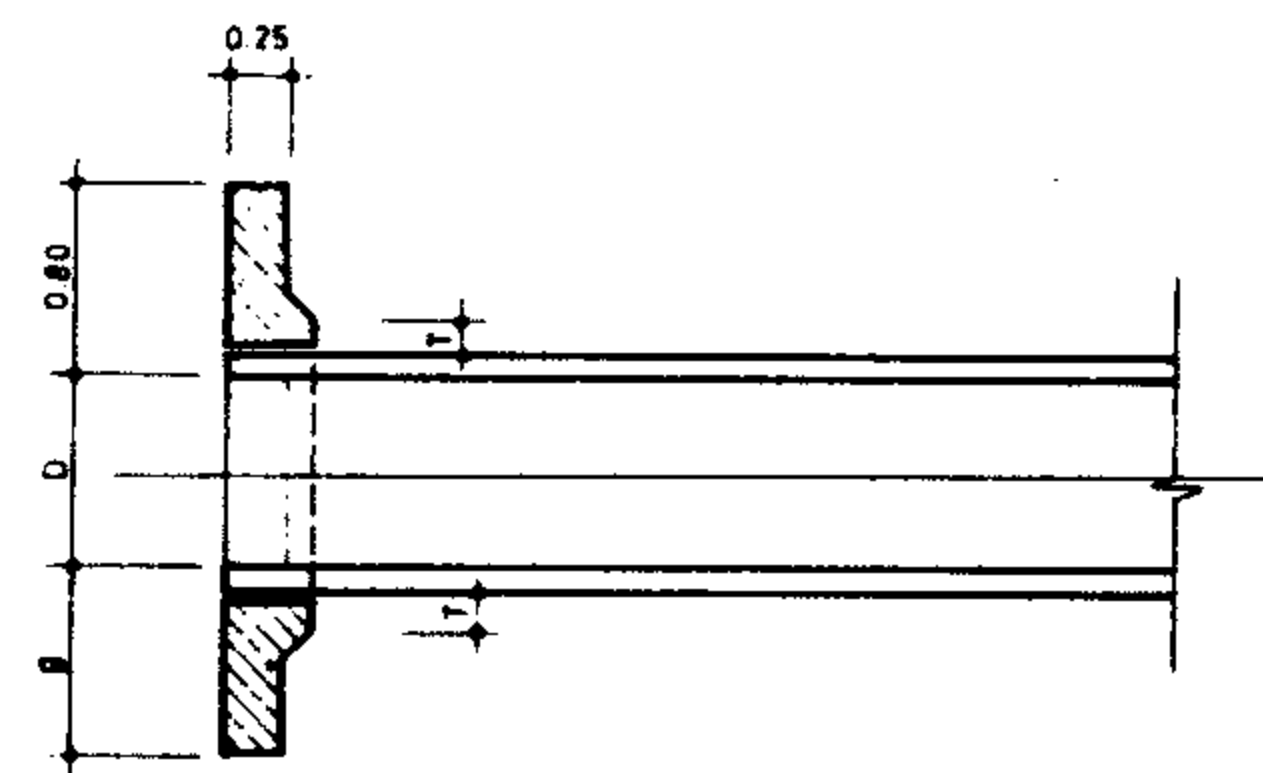

SECTION C-C
Two barrel pipe culvert Scale: 1:40

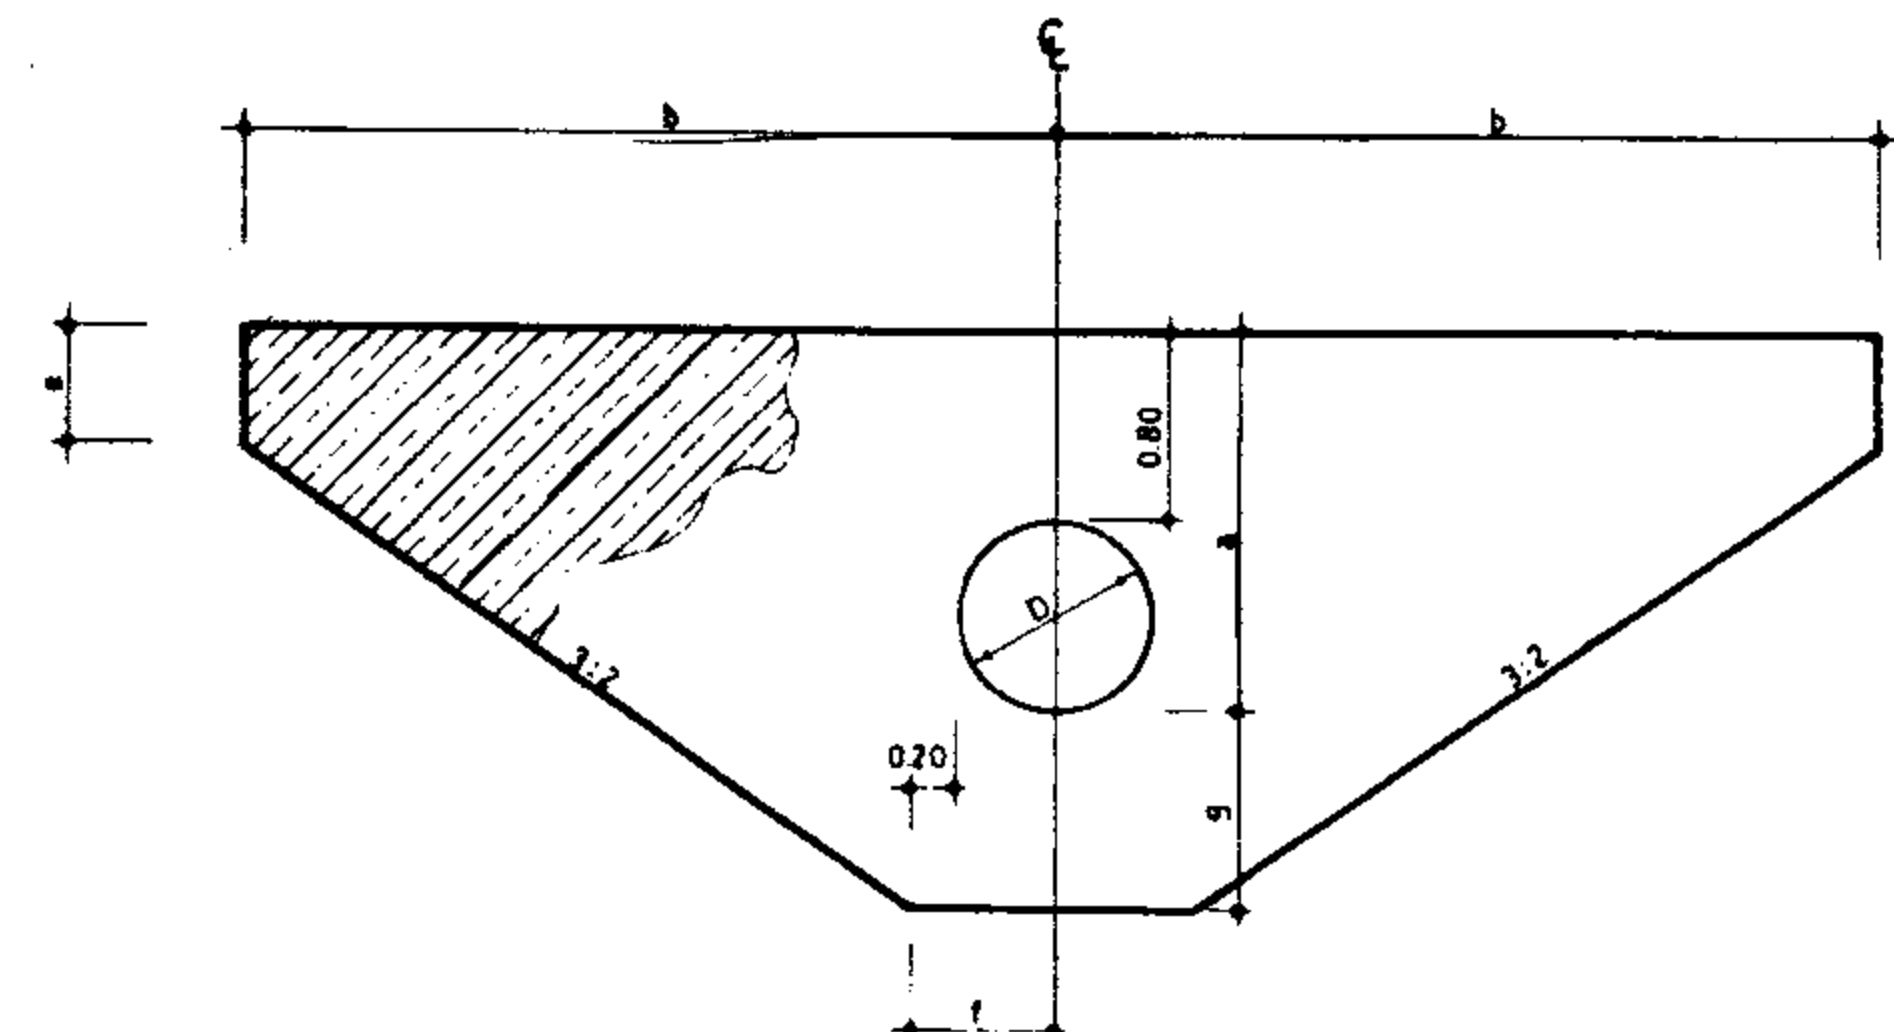

SECTION B-B
Scale: 1:50

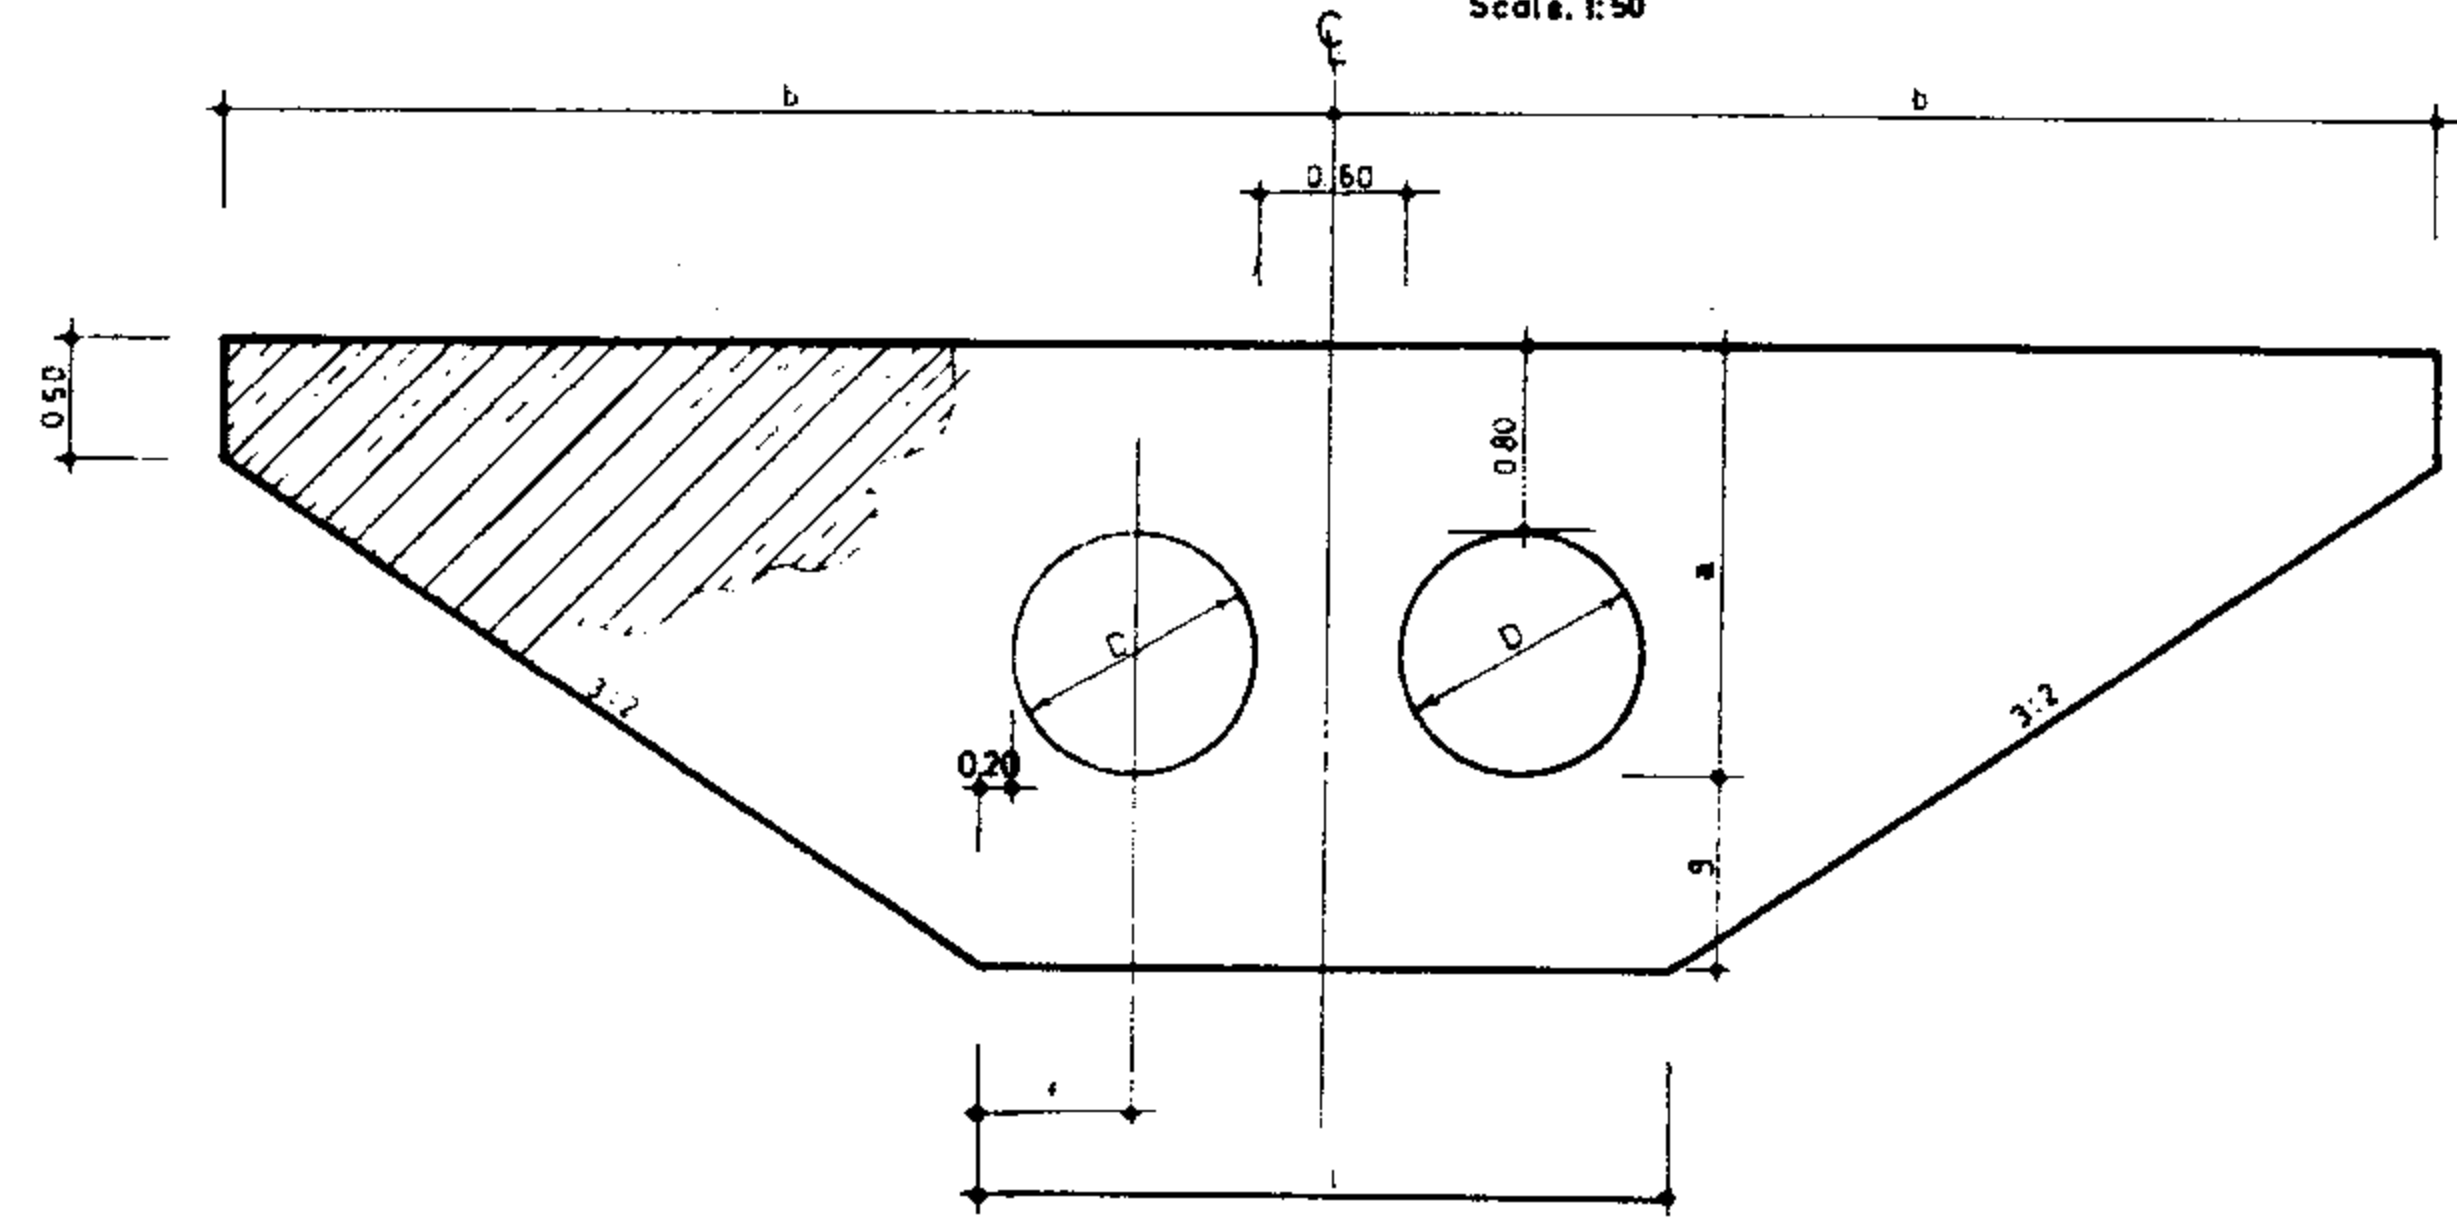

SECTION D-D
Scale: 1:50

ONE BARREL HEADWALL DIMENSION TABLE

Dia. m.	a	b	g	e	f	R/Bar Kg.	Conc. m ³	FORM m ²
0.30	1.10	2.45	0.60	0.30	0.35	71.40	0.90	11.42
0.40	1.20	2.65	0.60	0.30	0.40	80.86	1.01	13.09
0.50	1.30	2.85	0.60	0.30	0.45	92.35	1.12	14.84
0.60	1.40	3.05	0.60	0.30	0.50	98.49	1.24	16.71
0.70	1.50	3.25	0.80	0.50	0.55	126.92	1.57	21.80
0.80	1.60	3.45	0.80	0.50	0.60	133.28	1.71	24.19
0.90	1.70	3.65	0.80	0.50	0.65	156.34	1.85	26.58
1.00	1.80	3.85	0.80	0.50	0.70	163.29	1.99	29.12

TWO BARREL HEADWALL DIMENSION TABLE

Dia. m.	a	b	g	f	l	R/Bar Kg.	Conc. m ³	FORM m ²
0.70	1.50	3.90	0.80	0.55	2.40	301.70	3.08	27.15
0.80	1.60	4.15	0.80	0.60	2.60	322.83	3.37	30.84
0.90	1.70	4.40	0.80	0.65	2.80	376.41	3.68	32.40
1.00	1.80	4.65	0.80	0.70	3.00	393.59	4.00	34.89

NOTES:

- ① These types of head walls could be used at the culvert ends under compacted fills in place of transitions type ① to ⑤ or inlet and outlet transitions.
- ② 'D' designated as diameter of opening.
- ③ To select headwall:
a) define D for pipe culvert's current section with respect to hydraulic criteria discussed on dwg. N° 11/6/1/02 and other field conditions.
b) select the suitable headwall which fits the required 'D' value, from dimension table.

REFERENCE DWGS: For head wall reinforcement see dwg. N° 14/1/3/01
For pipe connection to structure see dwgs. 17/1/1/01 TO 17/1/1/03
For general notes see dwgs. N° 20/2/1/01 To 20/2/1/03

Scale: 1:40-1:50

IRRIGATION & DRAINAGE STANDARDS

Date:


DWG. N° 14/1/1/02

Approved:

Sheet. N° 2 of 9 Rev. N°


TYPICAL HEADWALL FOR PIPE CULVERTS (STRAIGHT) PLAN & SECTION

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND STANDARD BUREAU

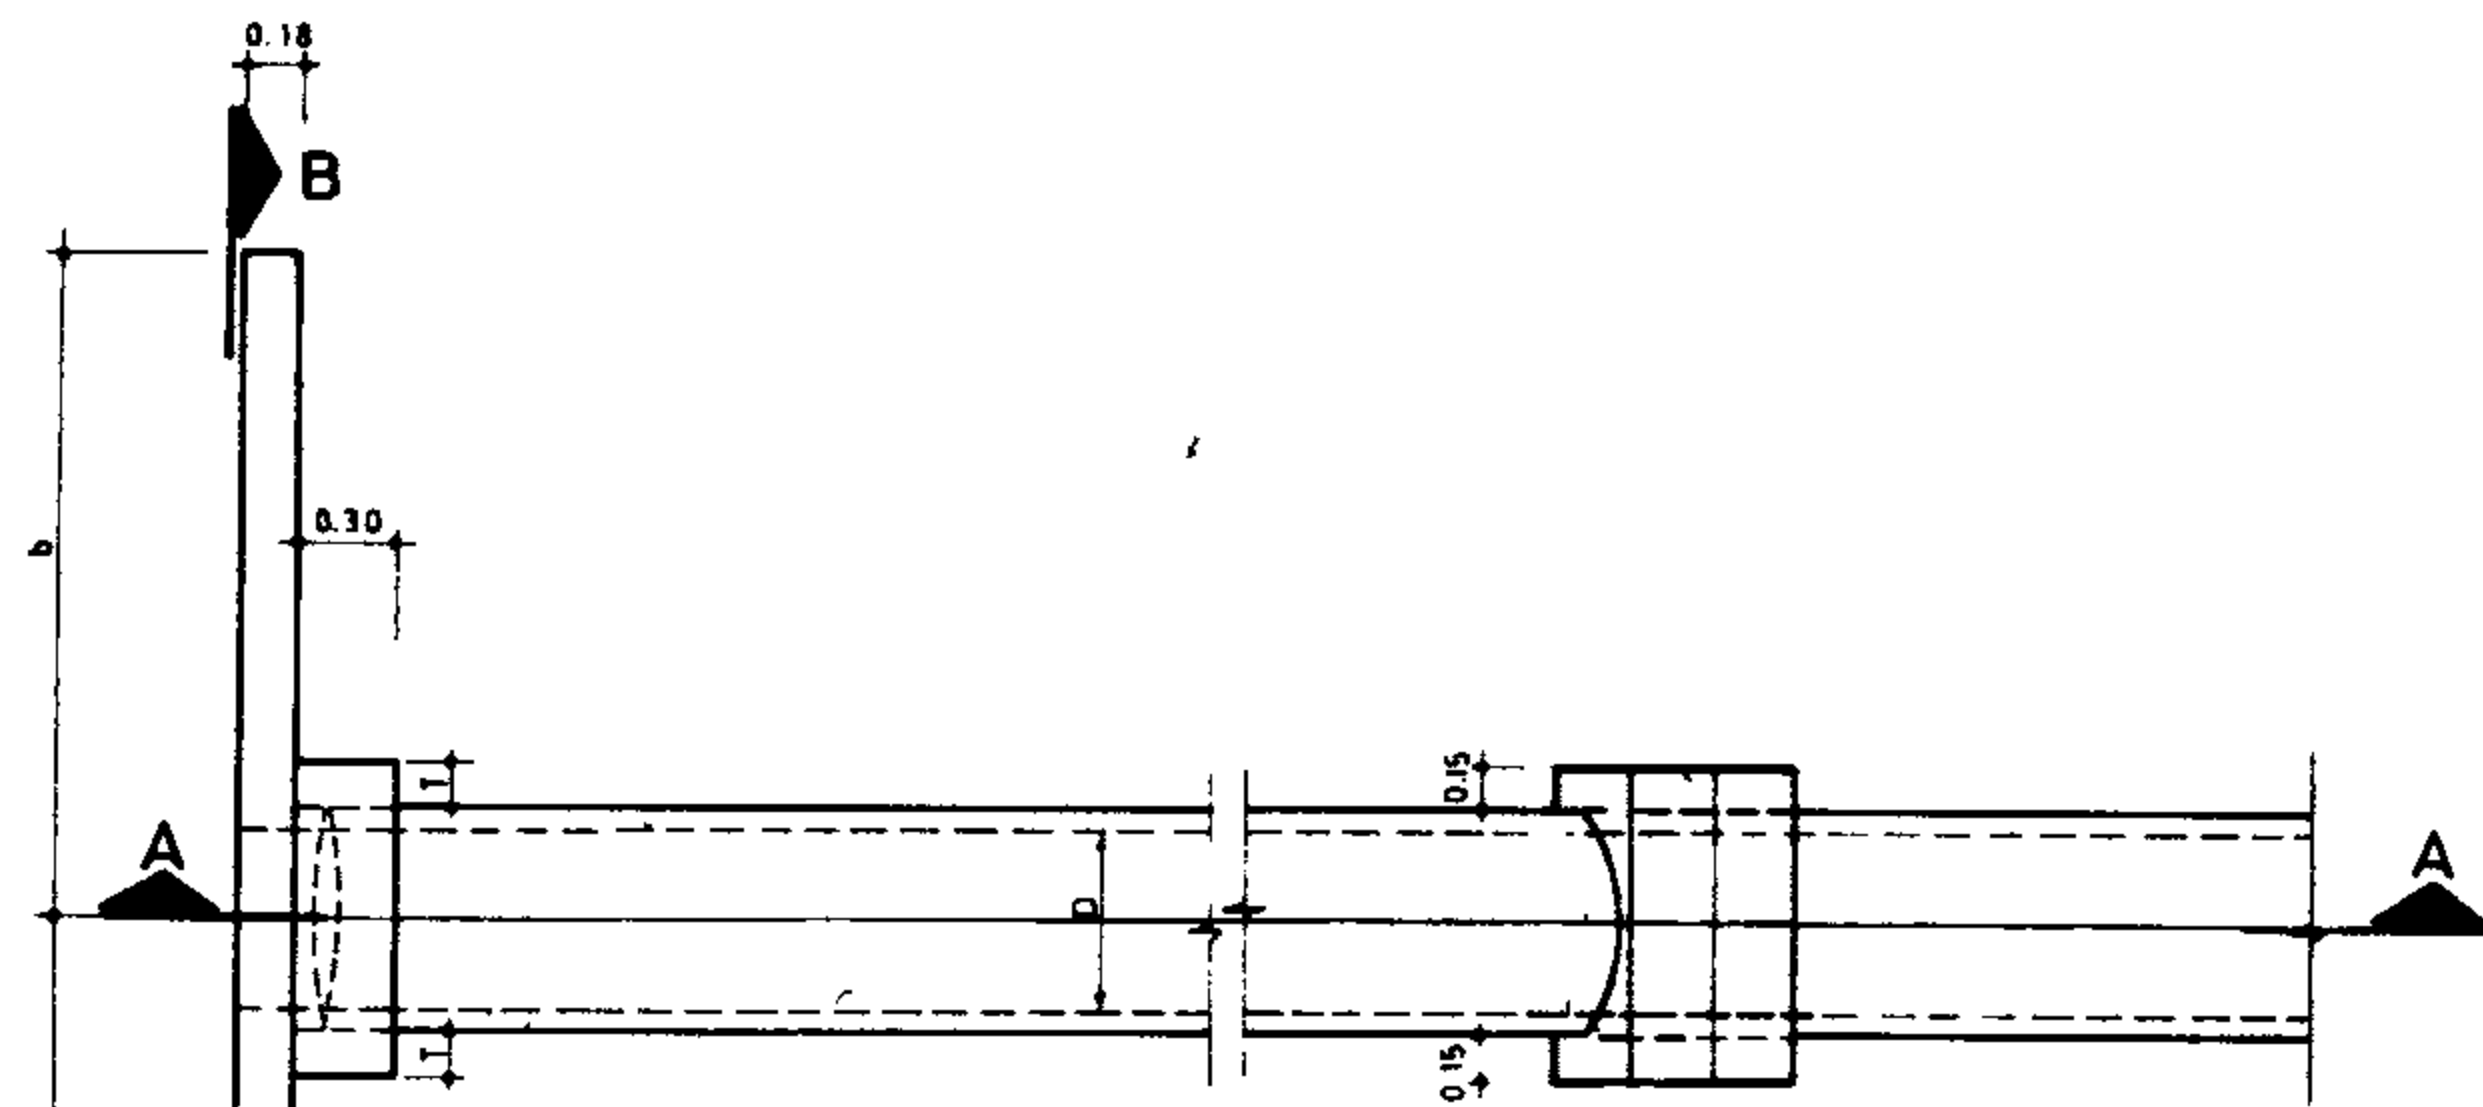


PLAN

Scale: 1:40

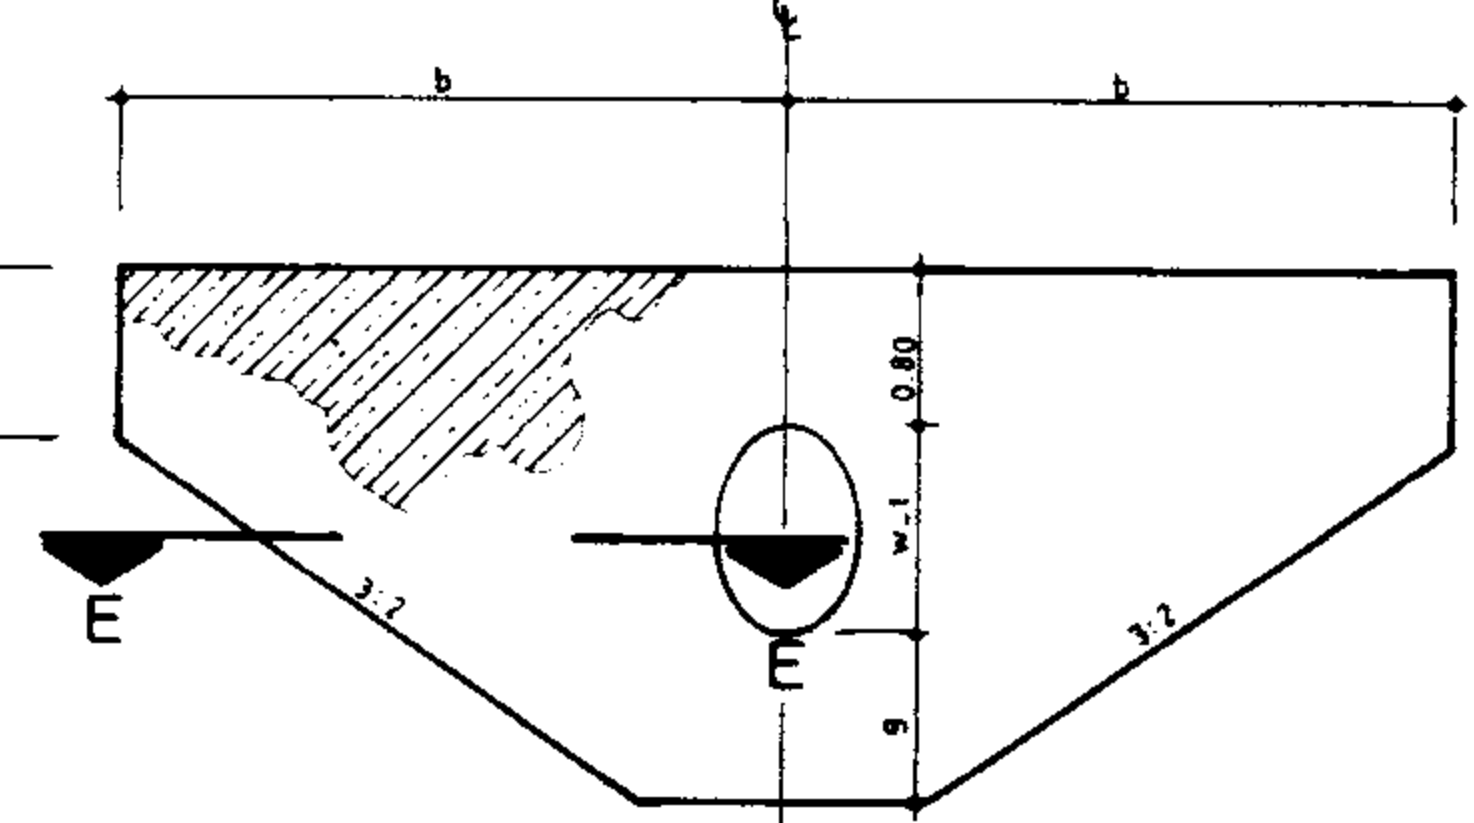

SECTION B-B

Scale: 1:40

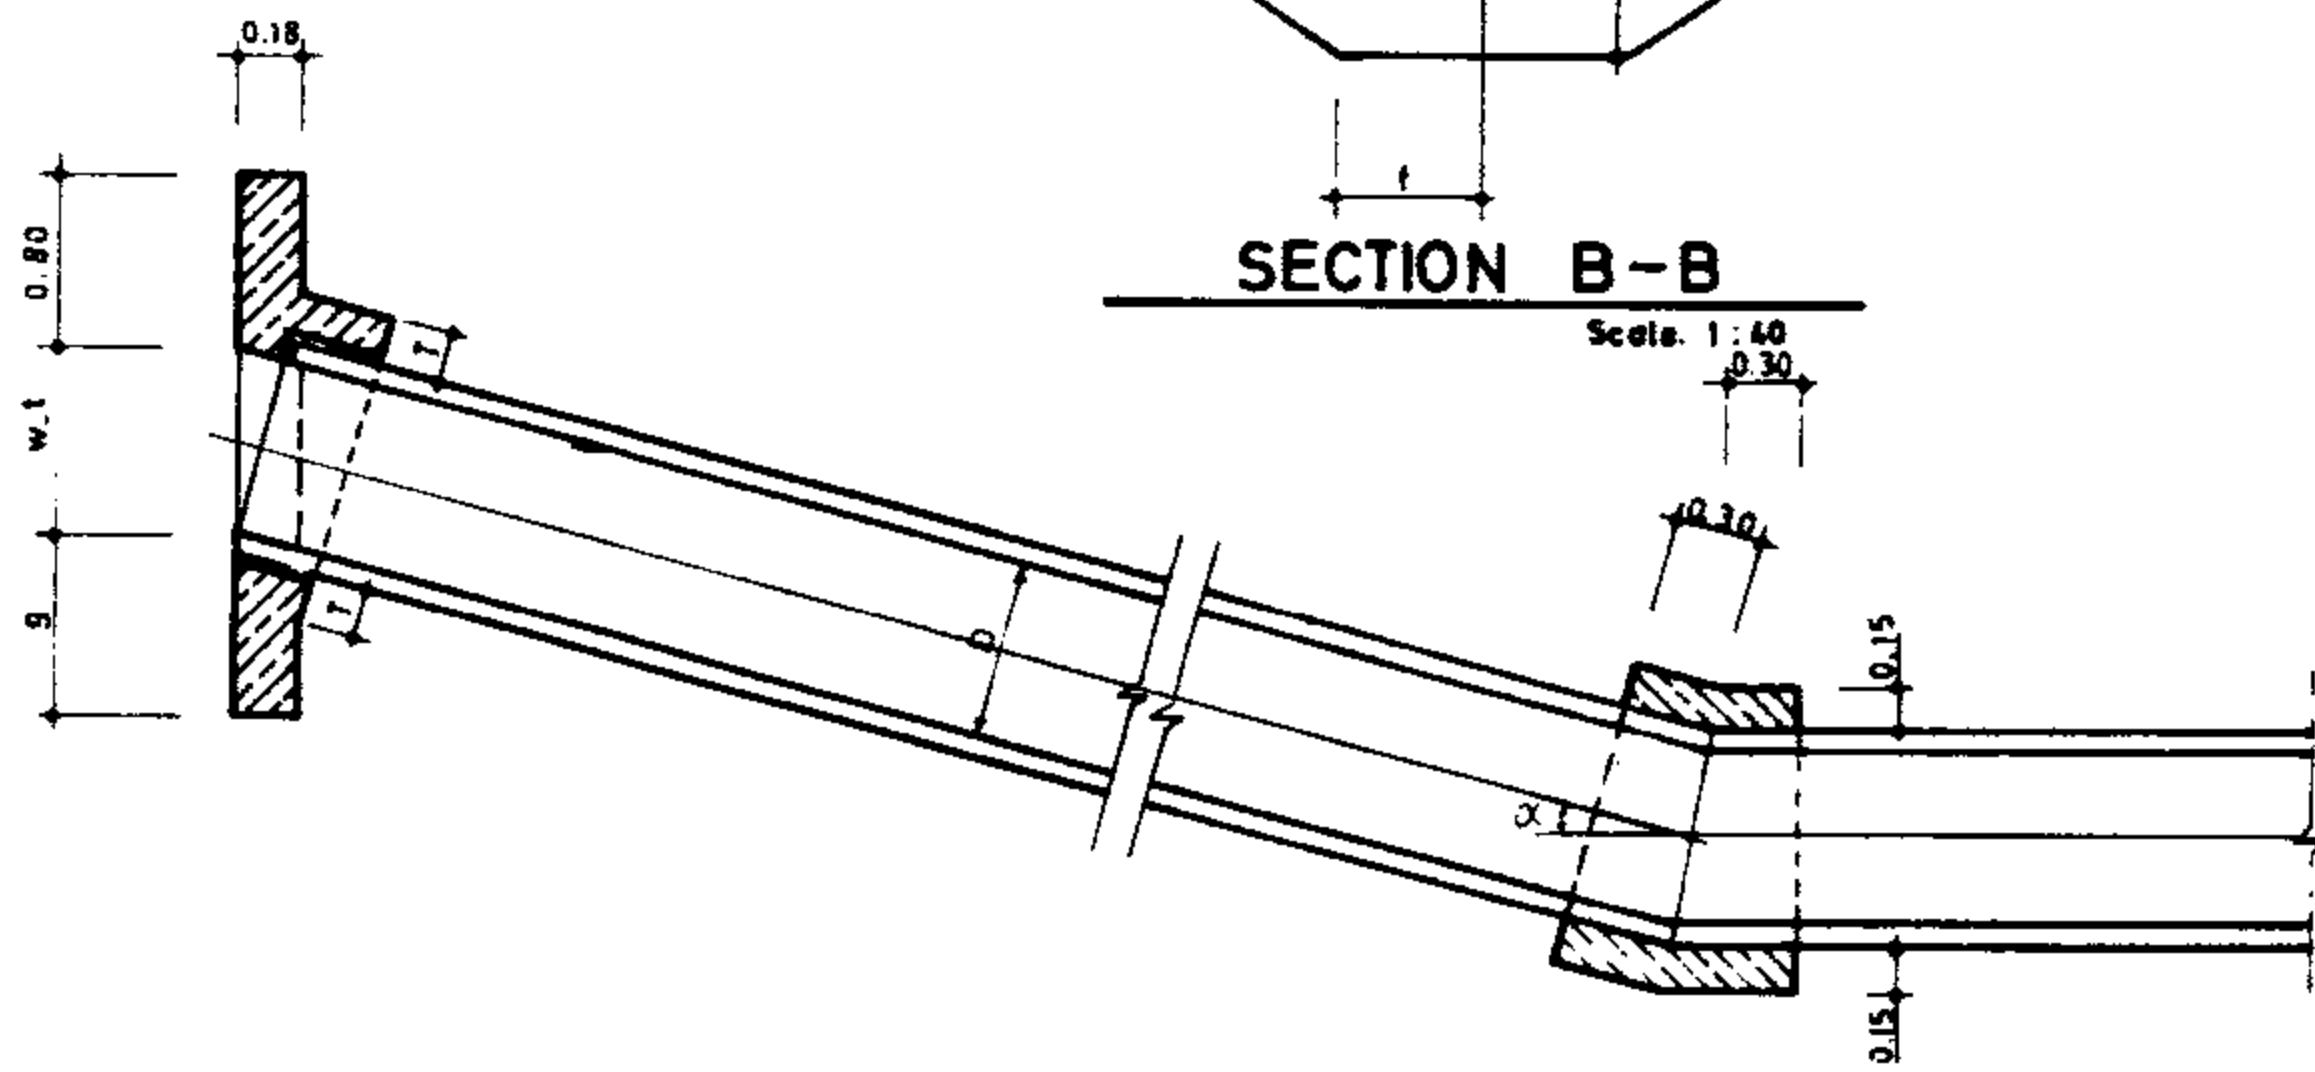


SECTION A-A

Scale: 1:40




SECTION E-E

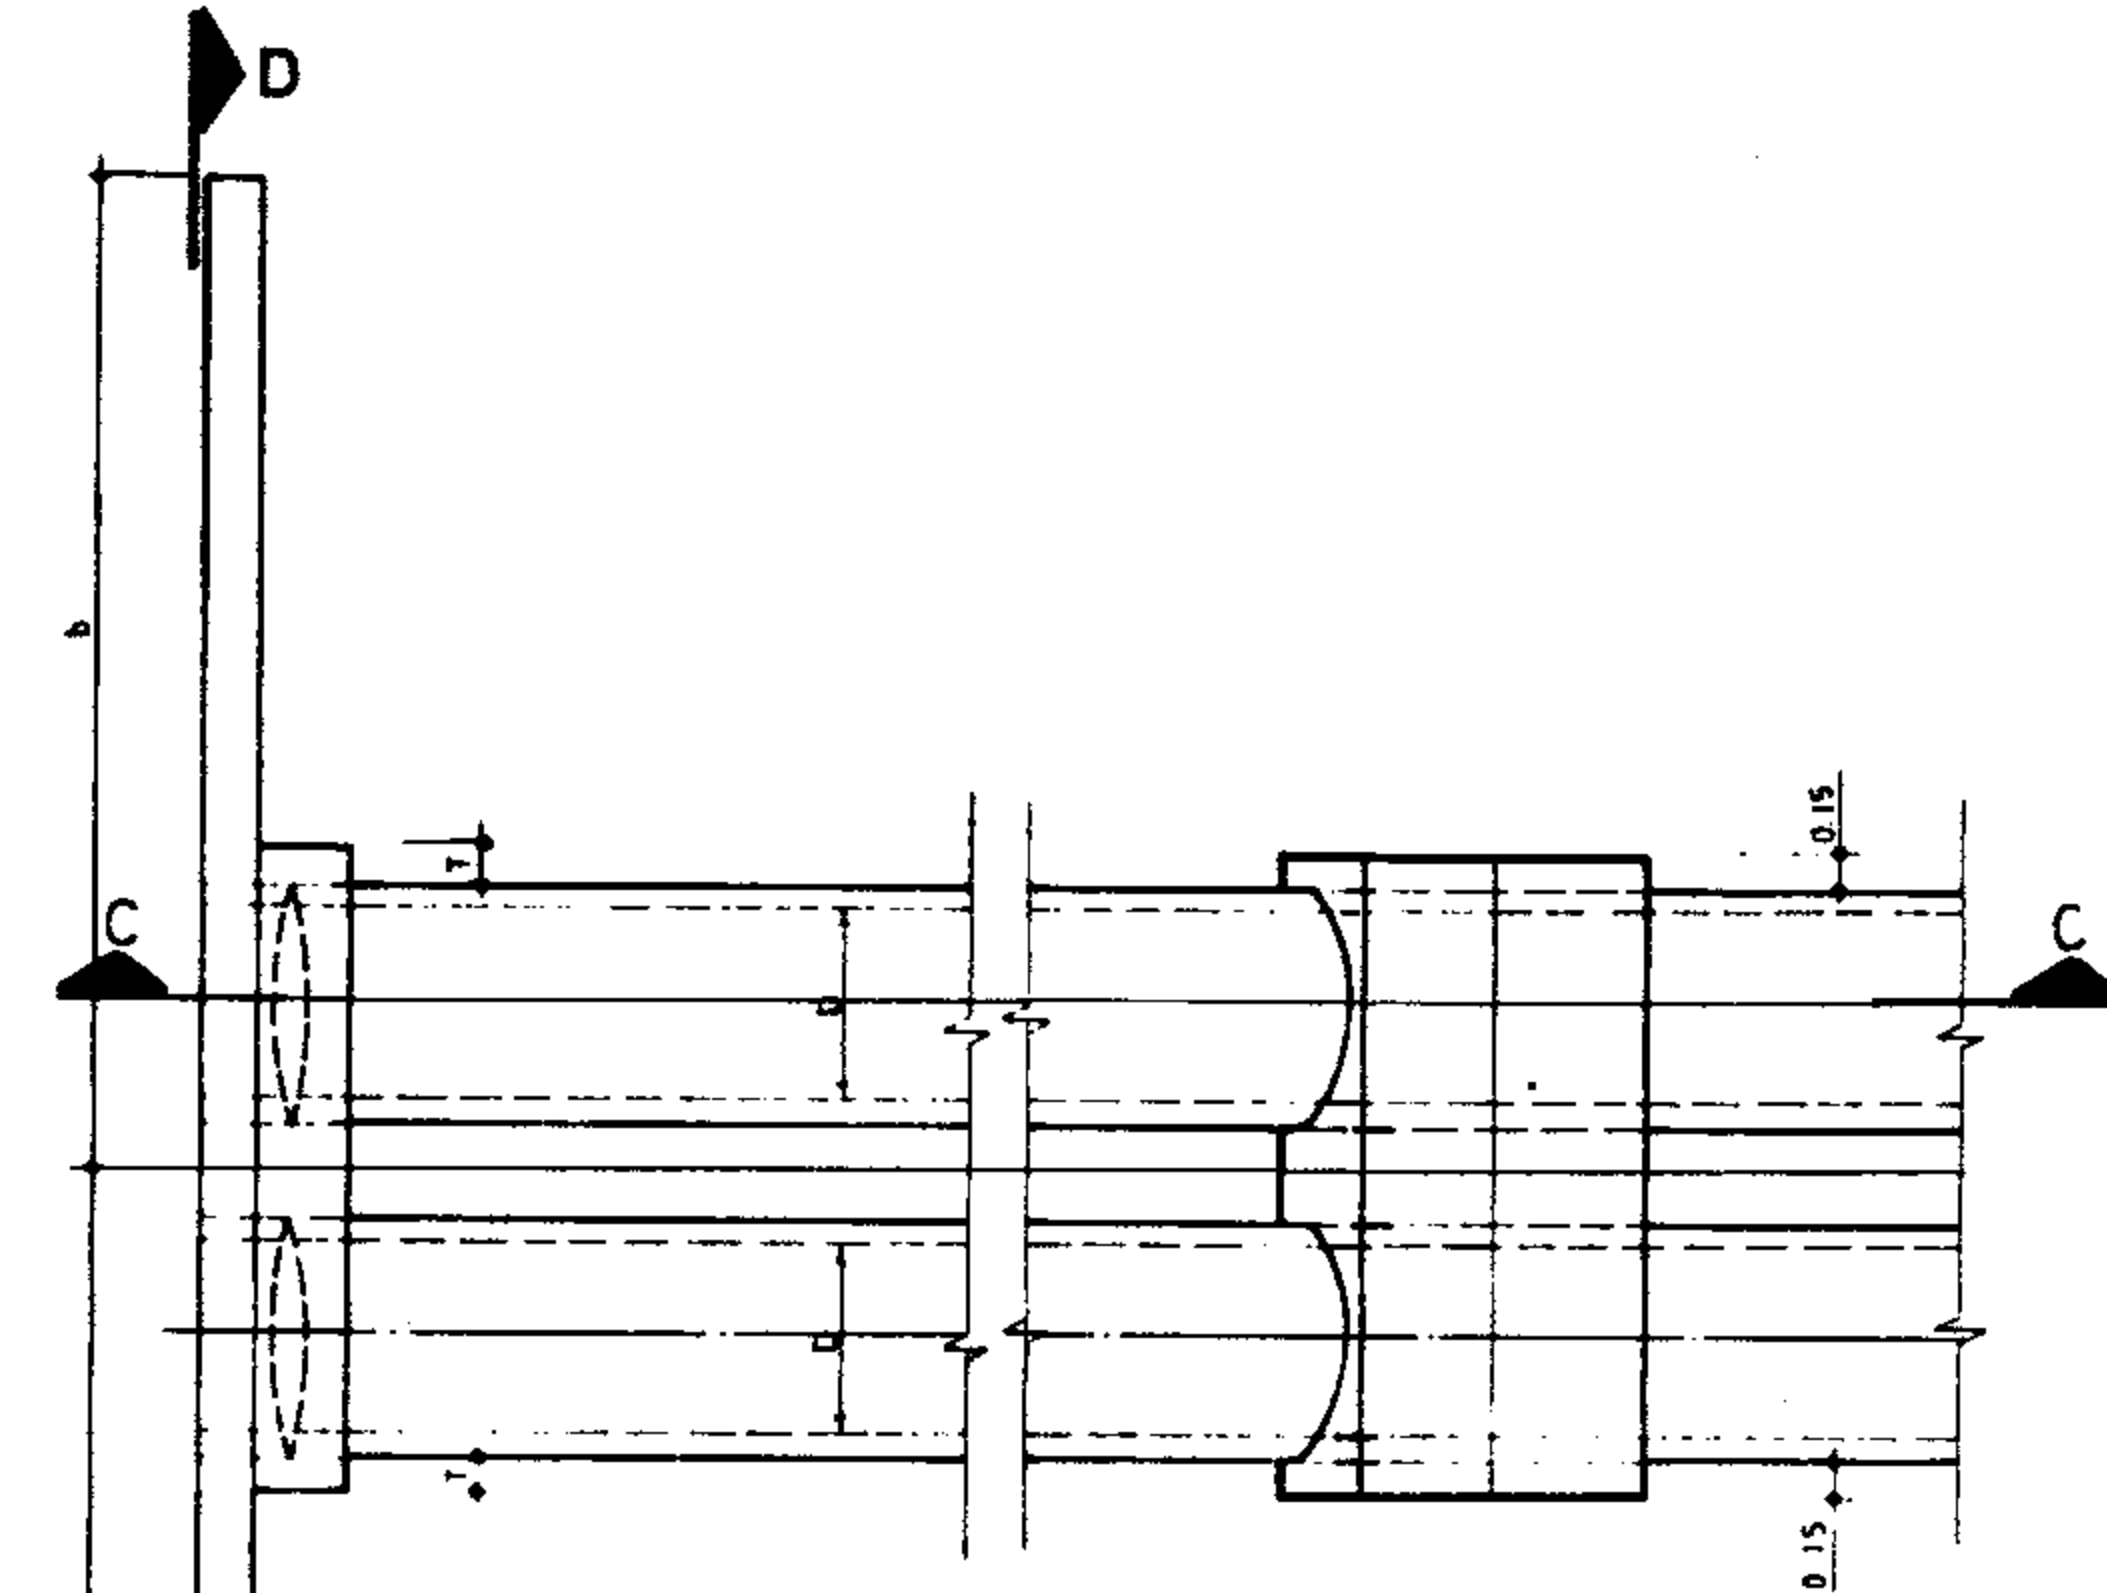


PLAN

Scale: 1:40

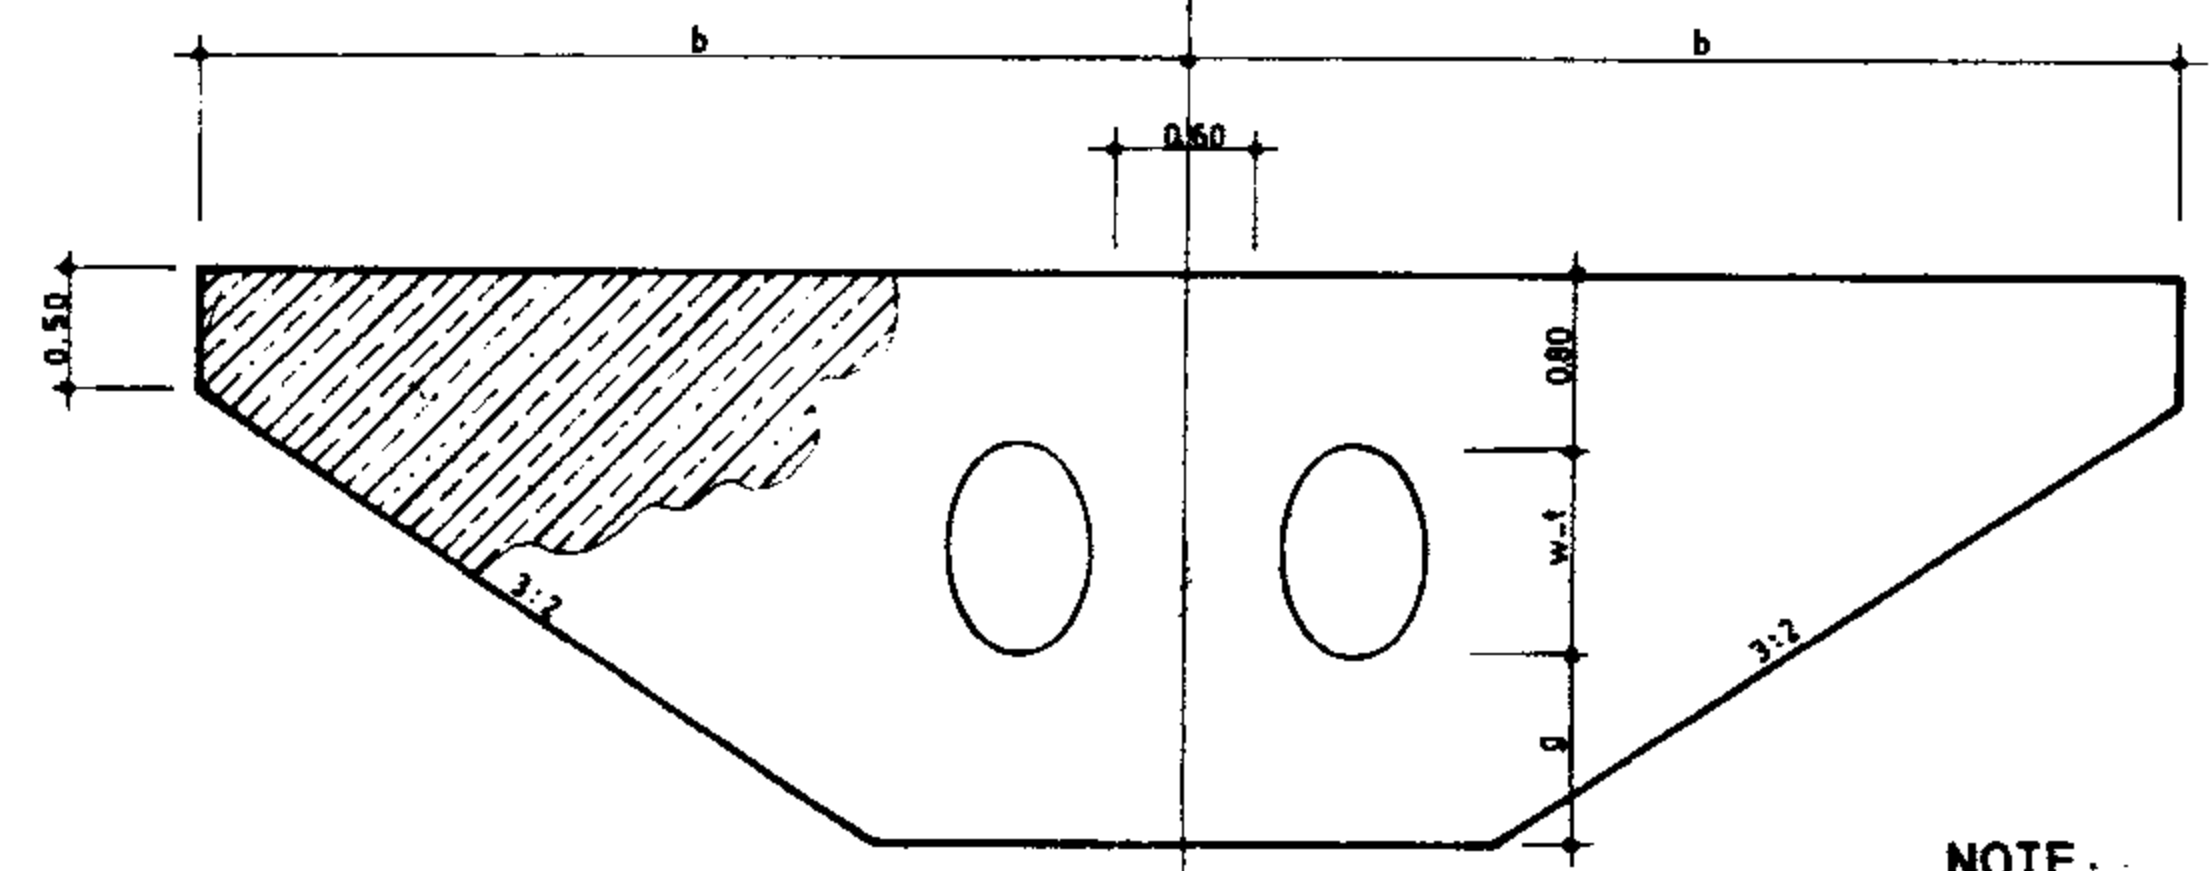

SECTION D-D

Scale: 1:50

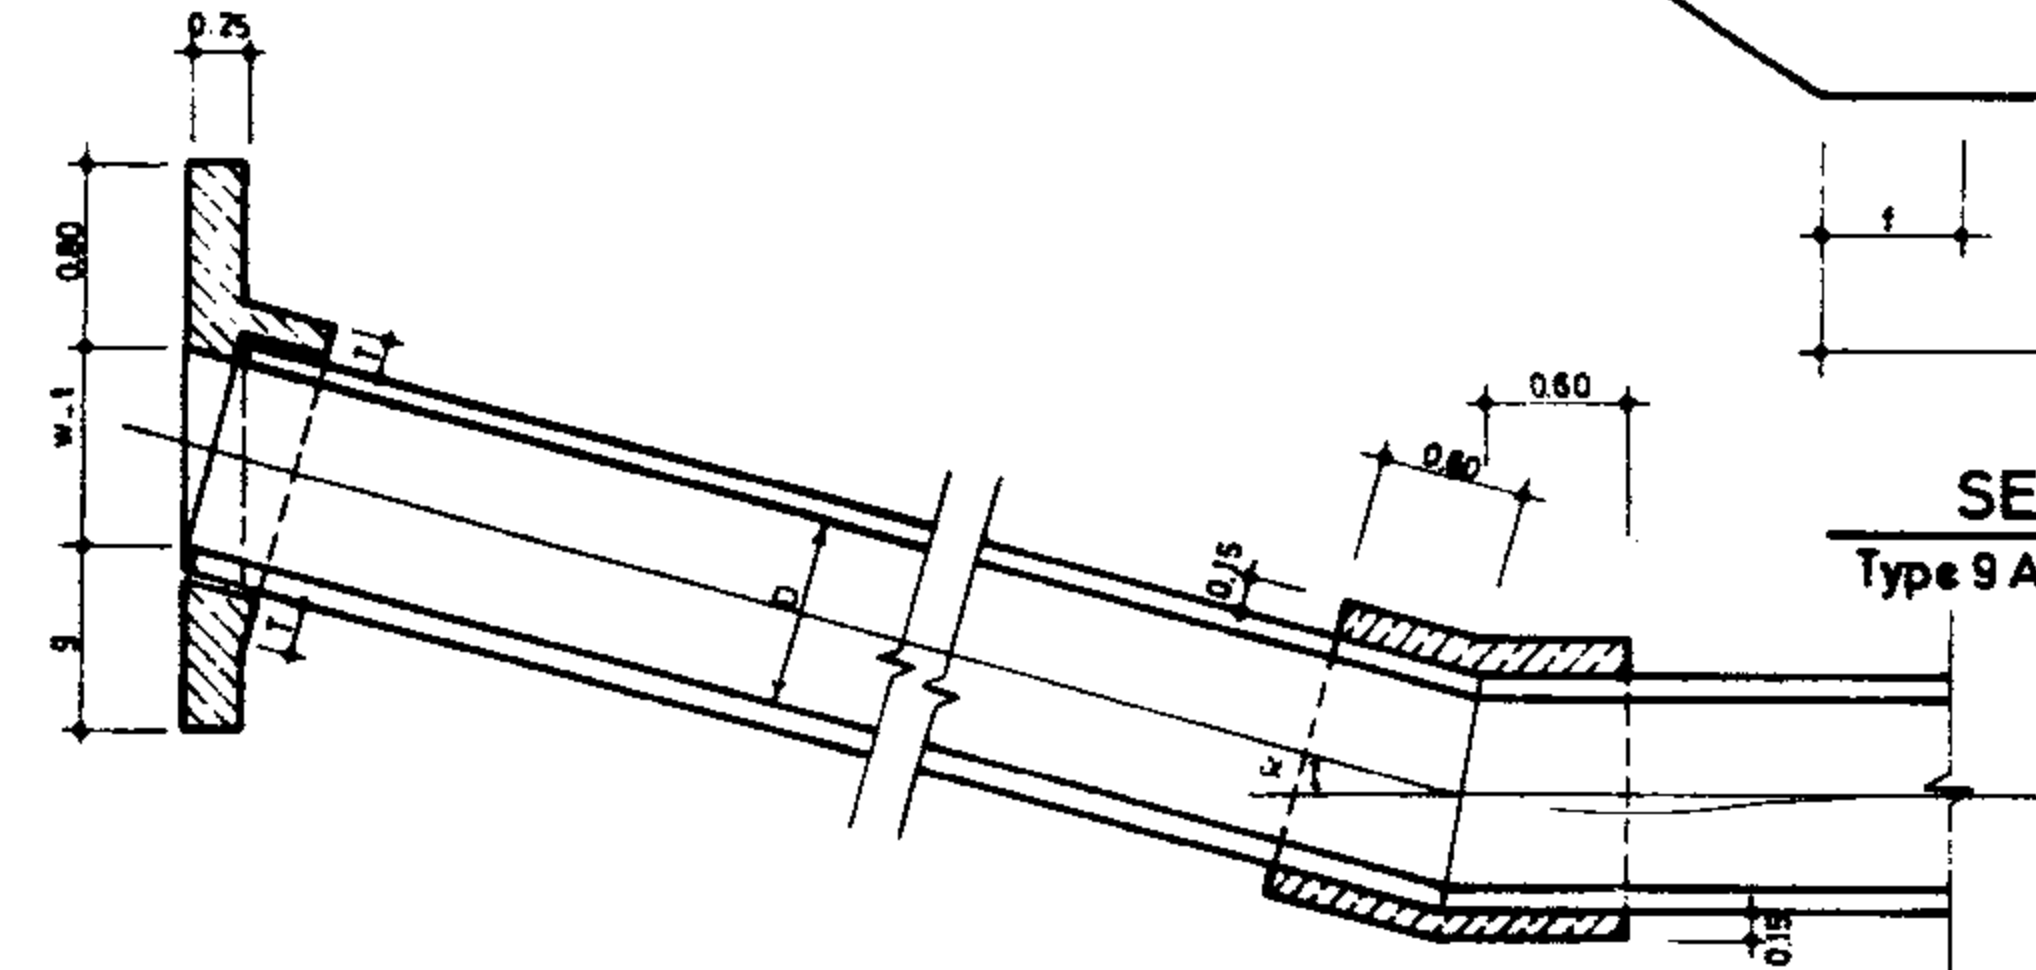

SECTION C-C

Scale: 1:50

ONE BARREL HEADWALL DIMENSION TABLE

Dia. m.	b	g	e	f	R/Bar Kg.	Conc. m ³	FORM m ²
0.30	2.45	0.60	0.30	0.35	71.40	0.90	11.42
0.40	2.65	0.60	0.30	0.40	80.86	1.01	13.09
0.50	2.85	0.60	0.30	0.45	92.35	1.12	14.84
0.60	3.05	0.60	0.30	0.50	98.49	1.24	16.71
0.70	3.25	0.80	0.50	0.55	126.92	1.57	21.80
0.80	3.45	0.80	0.50	0.60	133.28	1.71	24.19
0.90	3.65	0.80	0.50	0.65	156.34	1.85	26.58
1.00	3.85	0.80	0.50	0.70	163.29	1.99	29.12

Concrete quantities determined for $\alpha = 0$

NOTE: See notes on dwg. No 14/1/1/02

TWO BARREL HEADWALL DIMENSION TABLE

Dia. m.	b	g	f	l	R/Bar Kg.	Conc. m ³	FORM m ²
0.70	3.90	0.80	0.55	2.40	301.70	3.08	27.15
0.80	4.15	0.80	0.60	2.60	322.83	3.37	30.84
0.90	4.40	0.80	0.65	2.80	376.41	3.38	32.40
1.00	4.65	0.80	0.70	3.00	393.59	4.00	34.89

* Concrete quantities determined for $\alpha = 0$

REFERENCE DWGS: For head wall reinforcement see dwg. No. 14/1/3/01
 For pipe connection structure see dwgs. No. 17/1/1/01 TO 17/1/1/03
 For general notes see dwgs. No. 20/2/1/01 TO 20/2/1/03

Scale: 1:40-1:50

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG. No. 14/1/1/03

TYPICAL HEADWALL FOR PIPE CULVERTS (INCLINED)


Approved:

Sheet No. 3 of 9


Rev. No.

PLAN & SECTION


ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

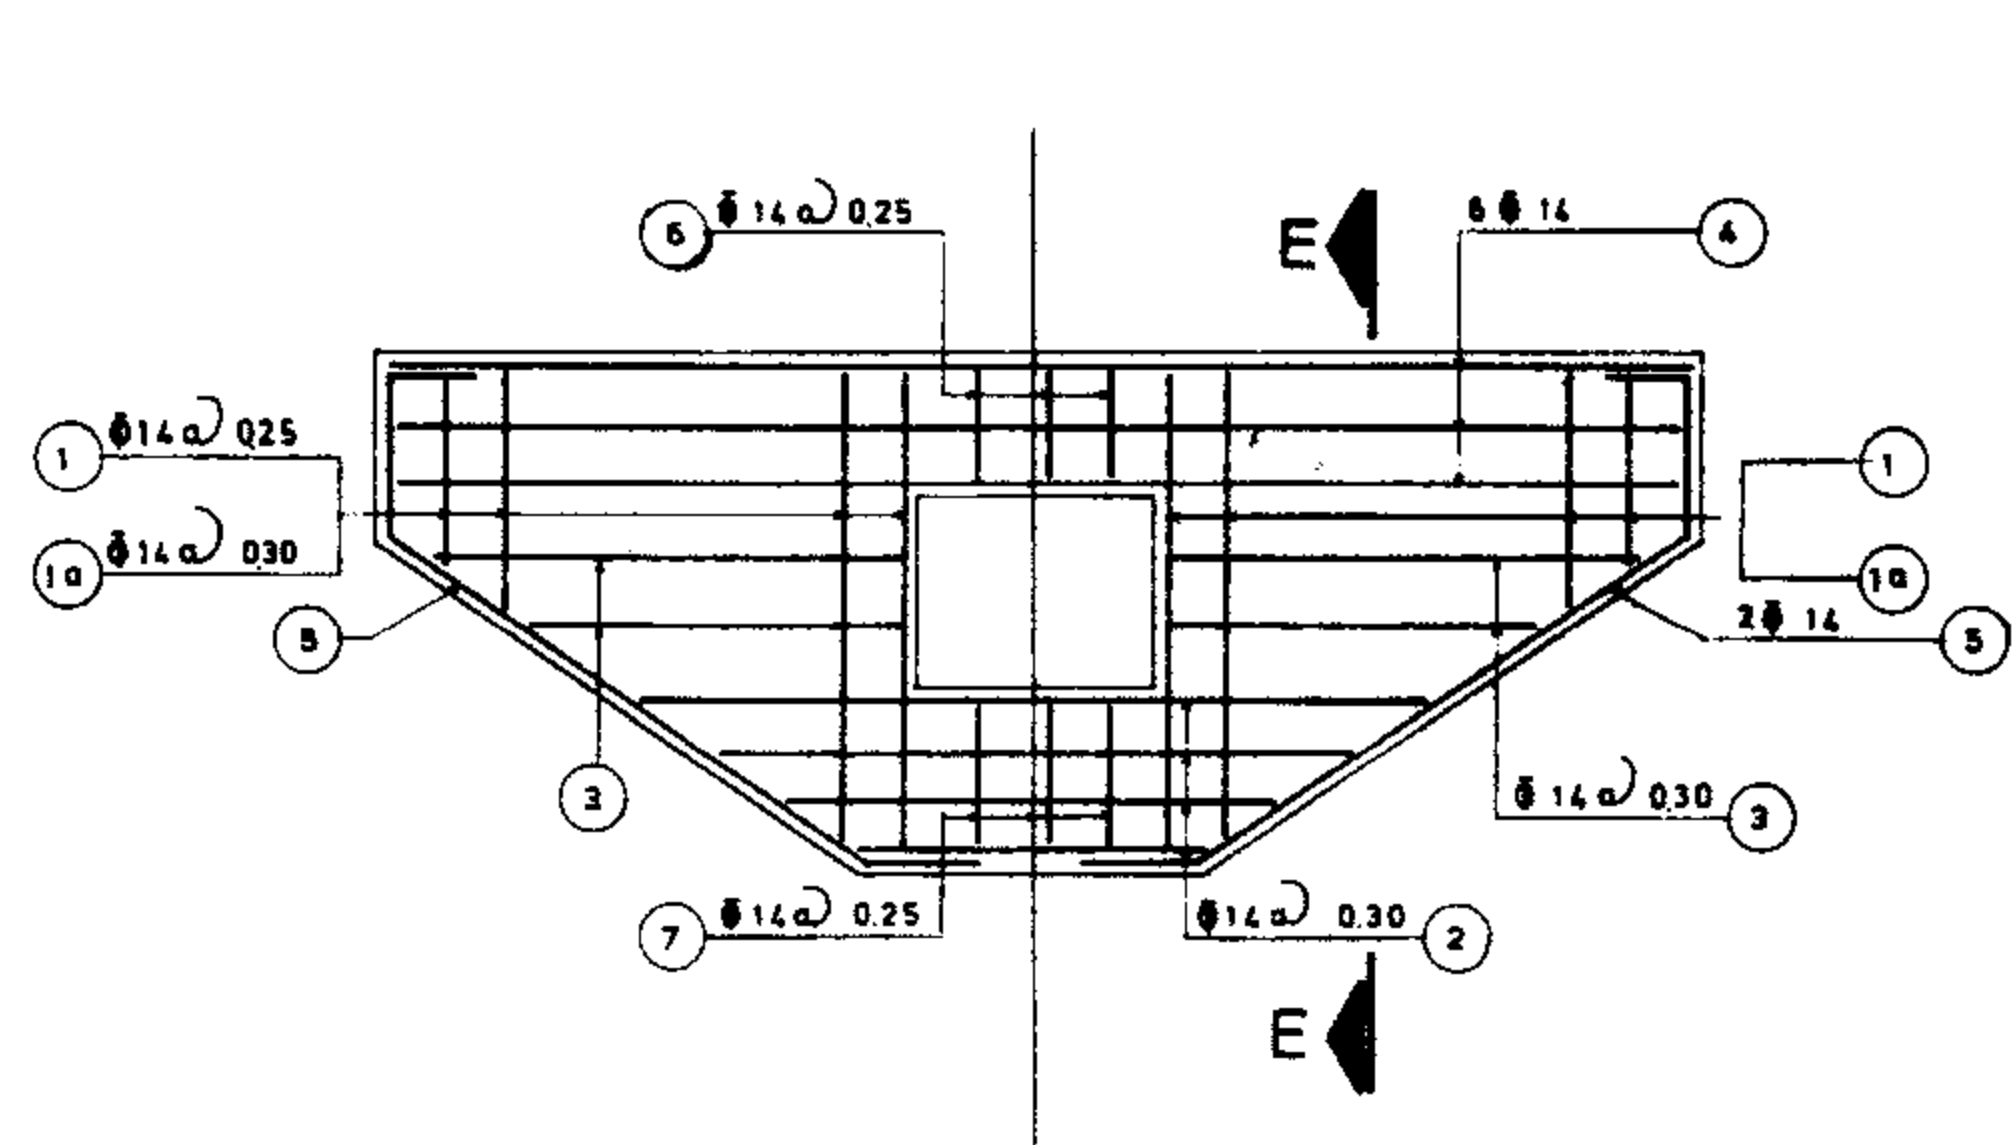


SECTION C-C

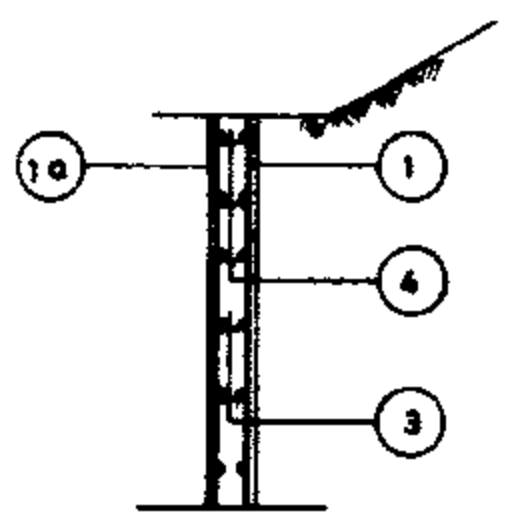


SECTION E-E

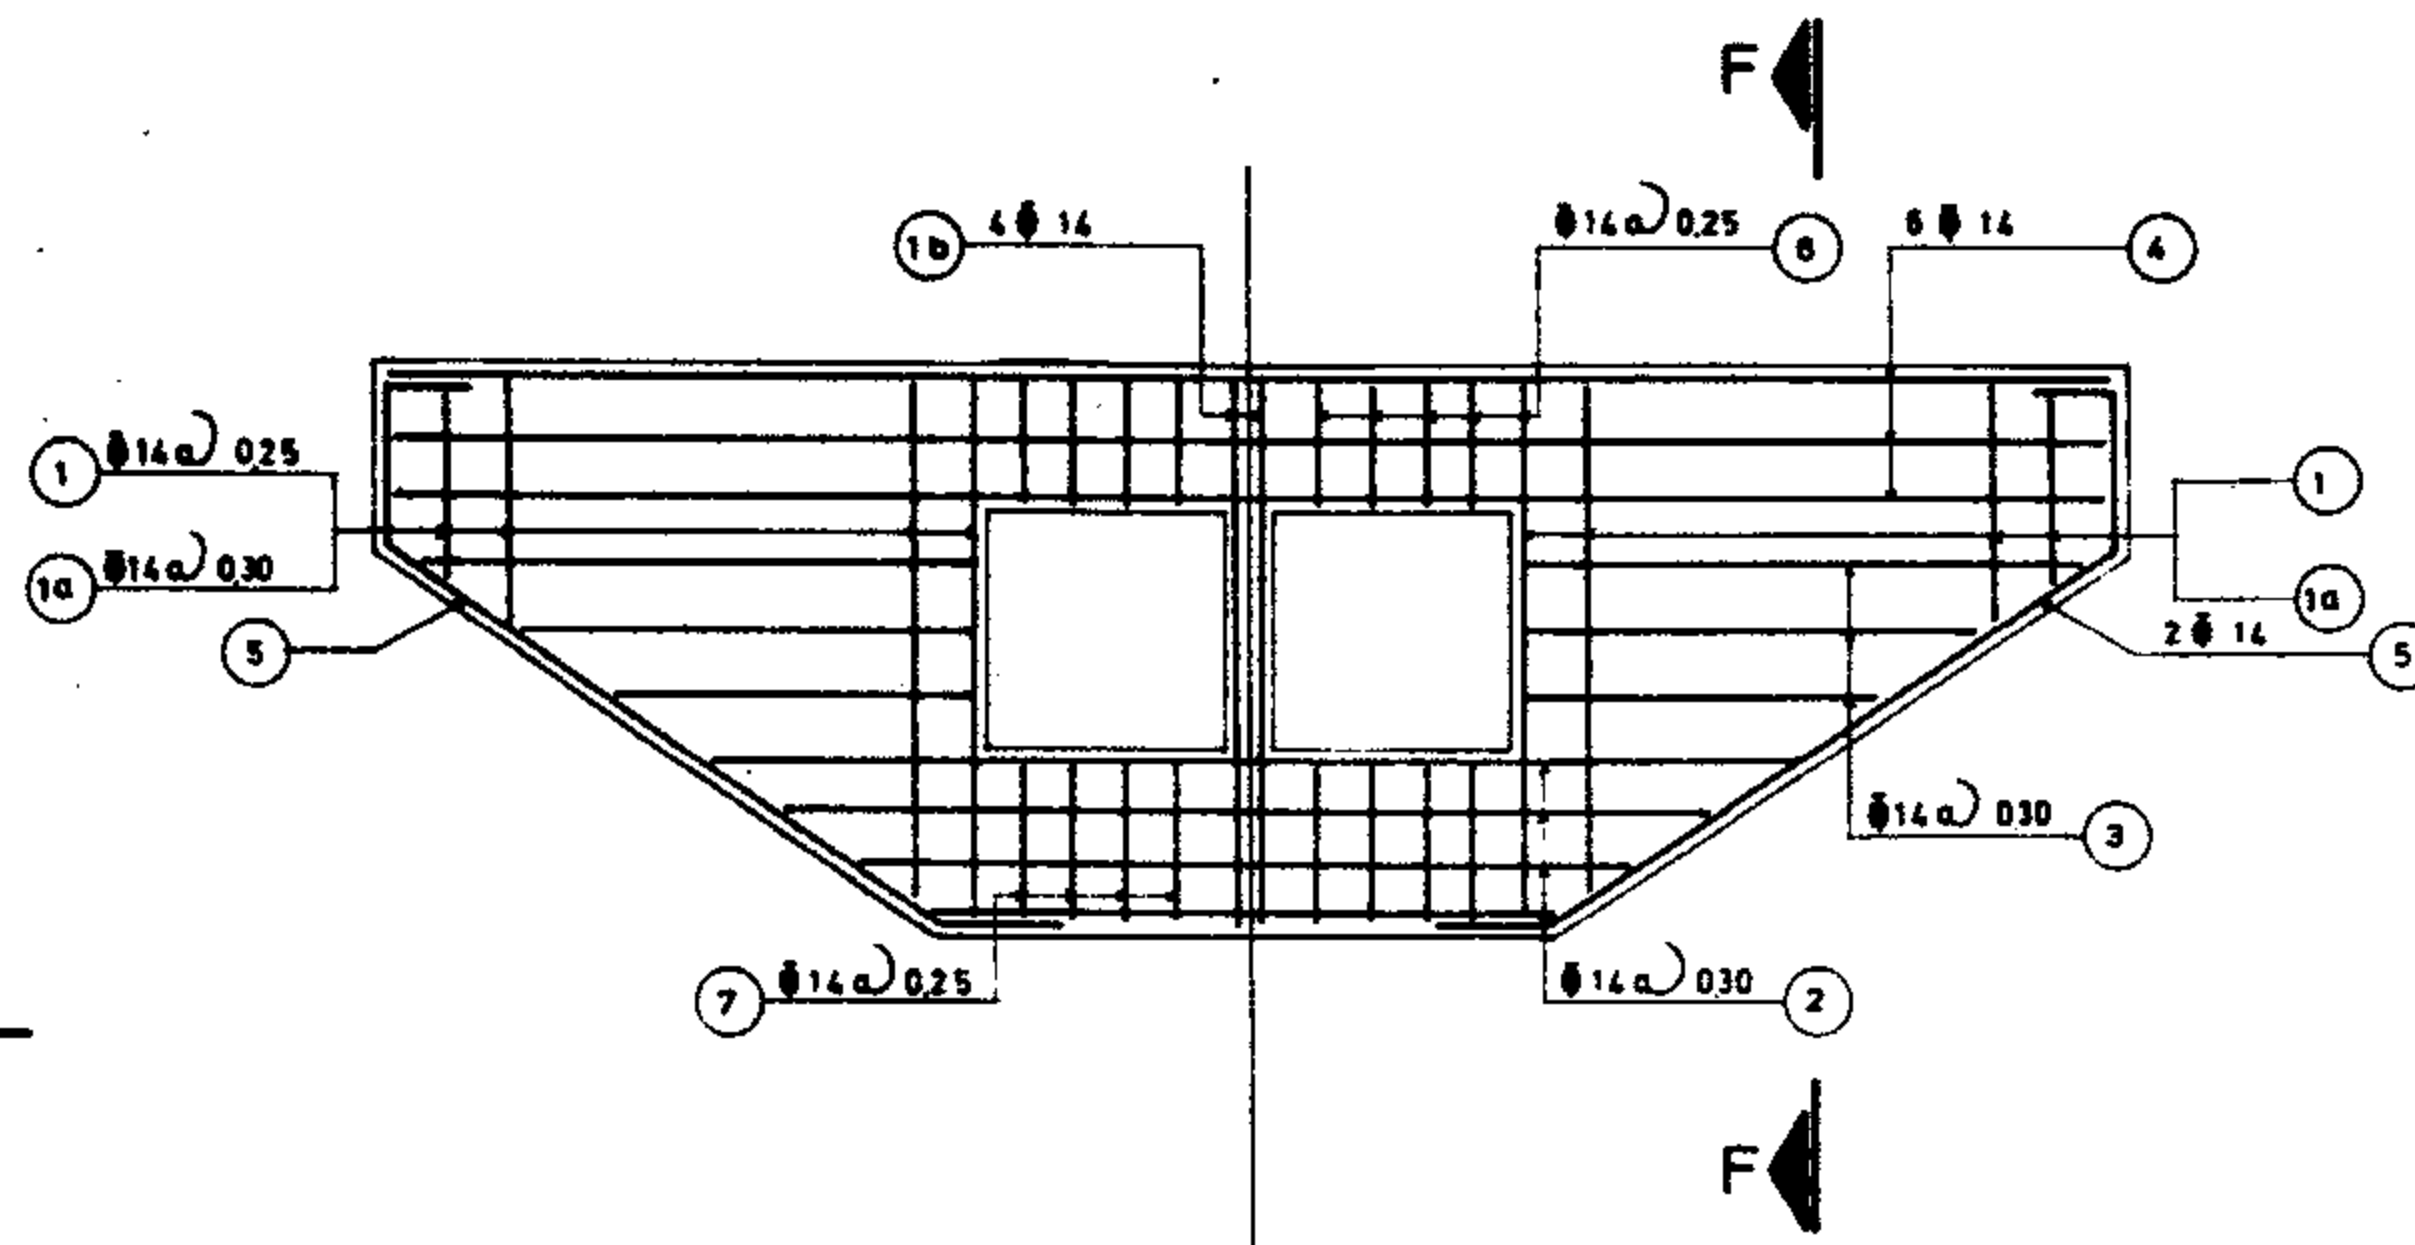


SECTION D-D

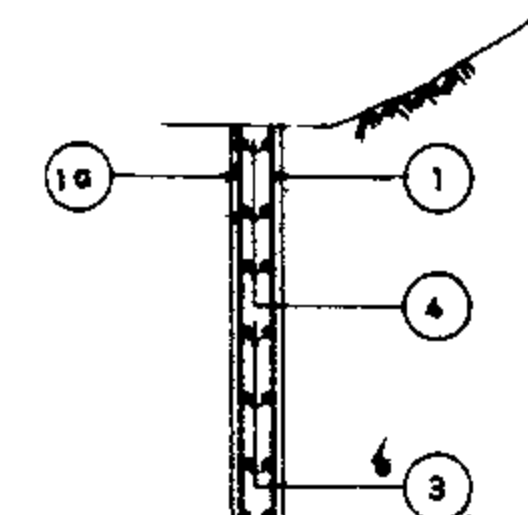


SECTION F-F

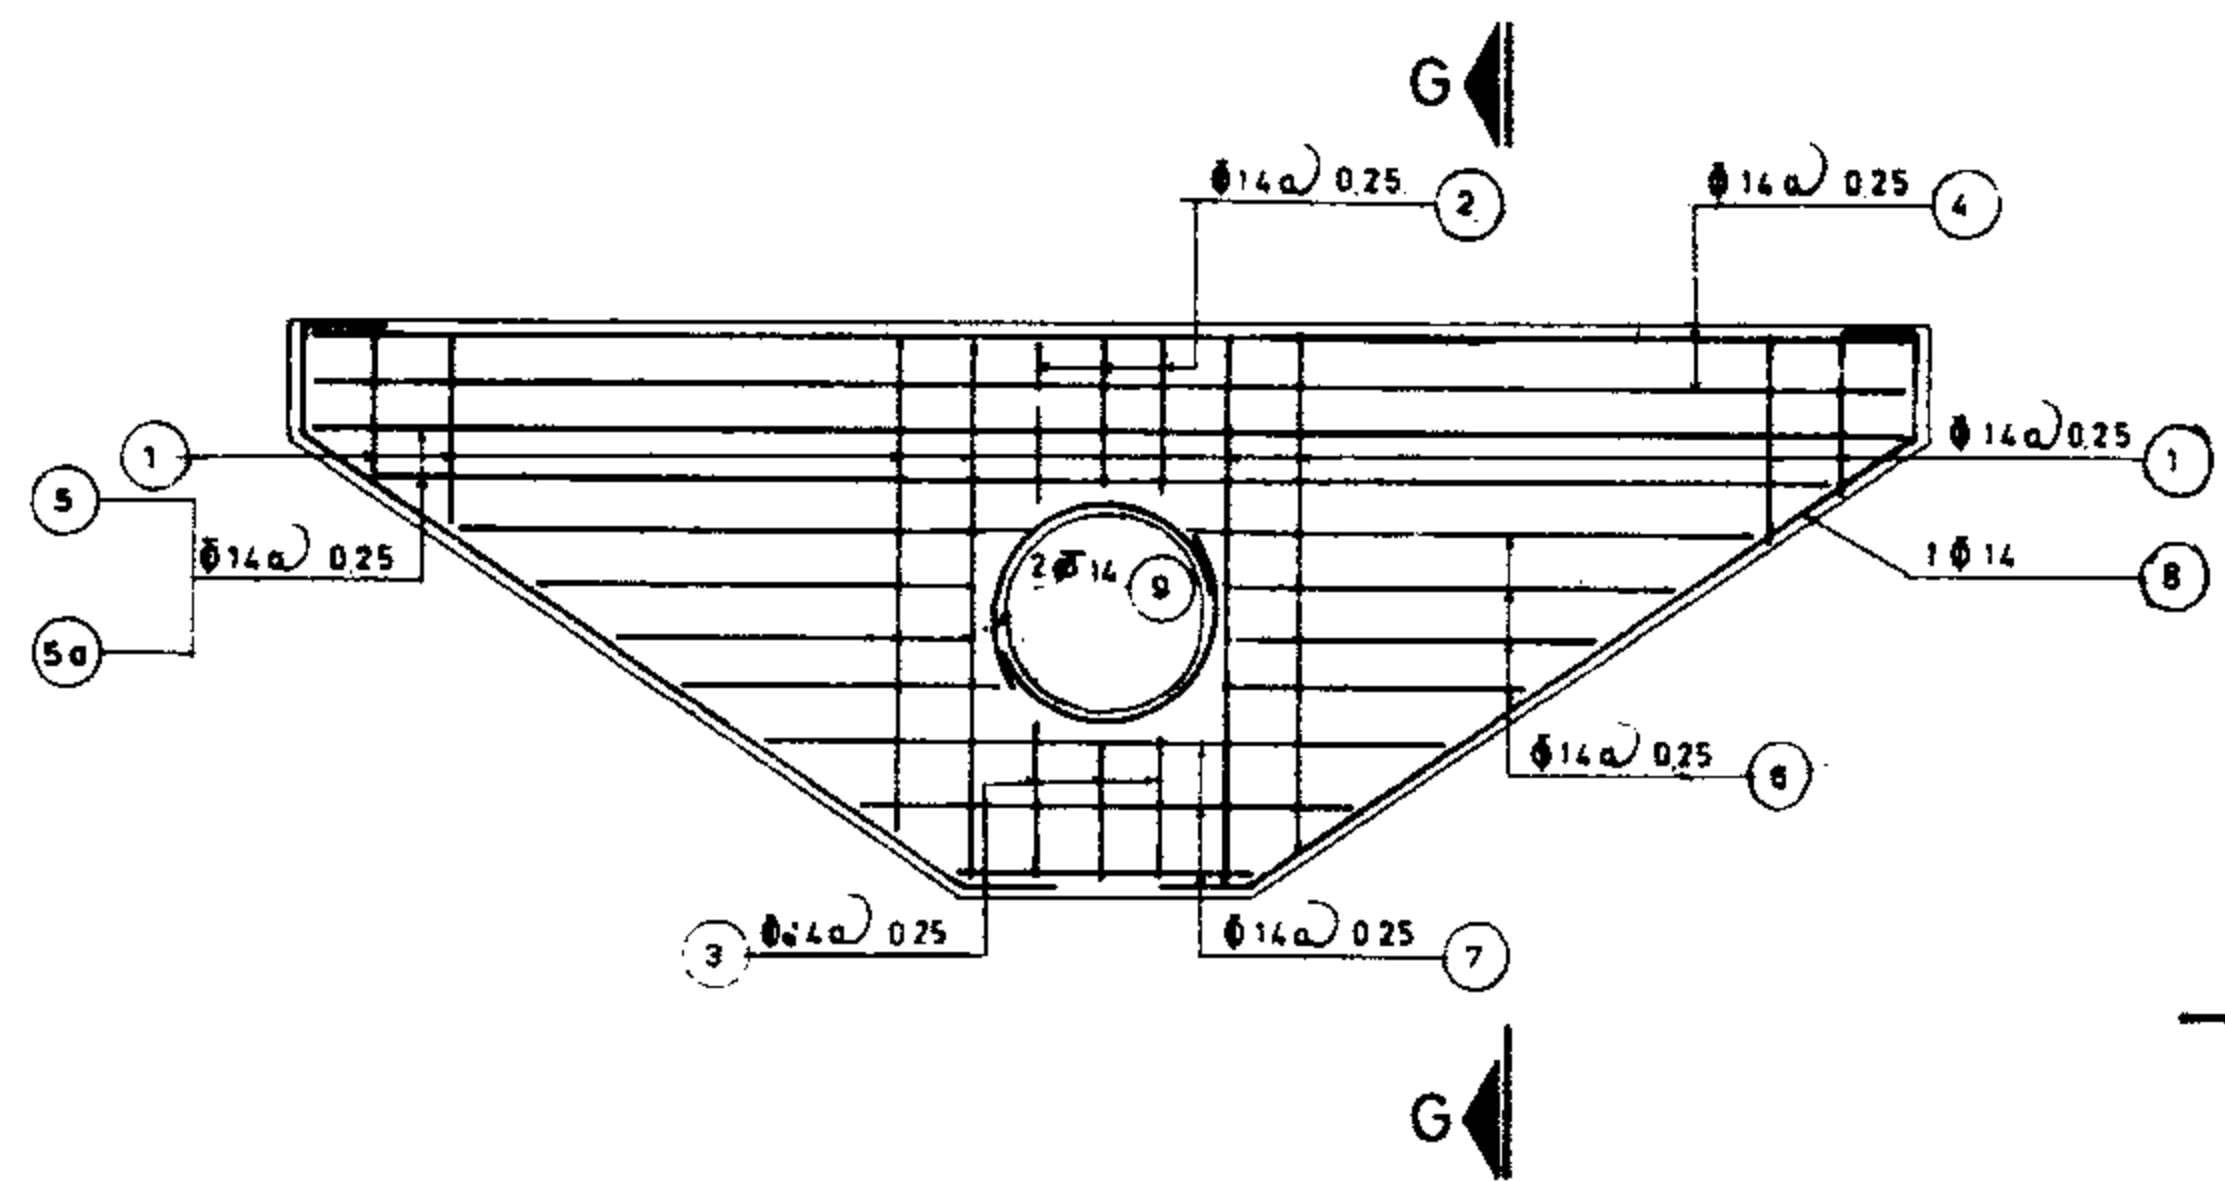

SECTION B-B

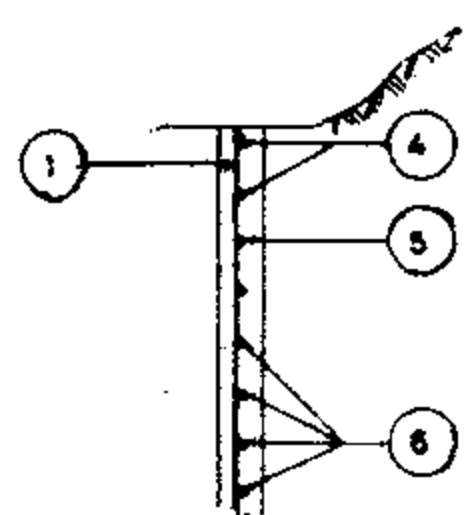

SECTION G-G

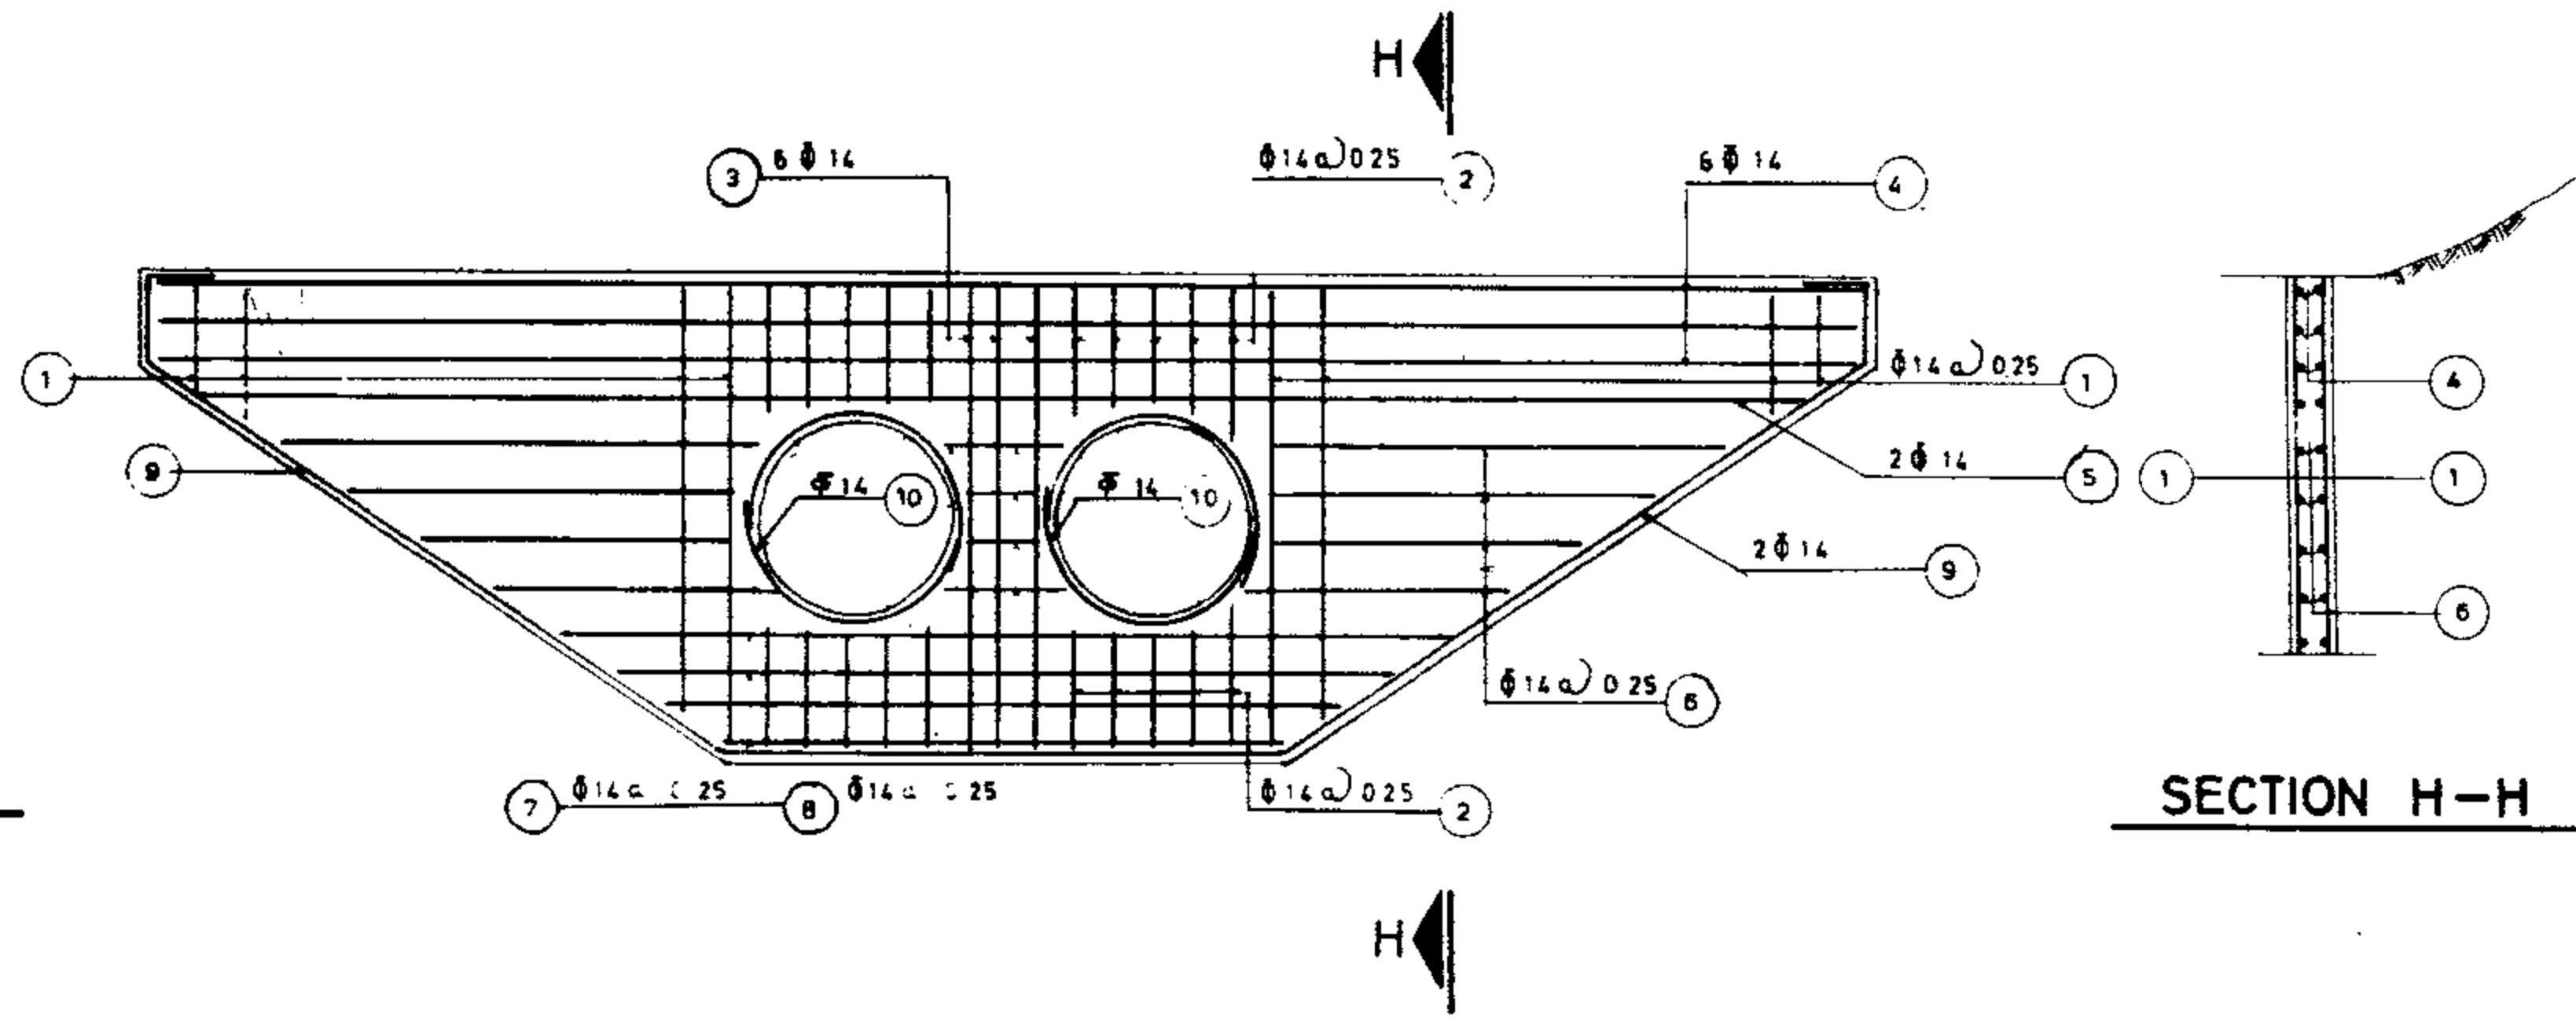

SECTION D'-D'

SECTION H-H

REFERENCE DWGS: For plan & section see dwgs. No. 14/1/1/01 TO 14/1/1/03
For list of reinforcement see dwgs. No. 14/1/3/02 TO 14/1/3/09

Scale:

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG. No. 14/1/3/01

Approved:

Sheet No. 4 of 9 Rev. No.

HEAD WALLS
FOR 1 & 2 BARRELS BOX & PIPE
CULVERTS
REINFORCEMENT SECTION

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU

0.60x0.80

Sl. No.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	16	0.75 ~ 1.70	1.23	19.68
1a	14	0.75 ~ 1.70	1.23	17.22
2	6	1.12 ~ 2.62	1.87	11.22
3	4	1.10 ~ 1.85	1.78	7.12
4	6	4.62	4.62	27.72
5	4	0.90 ~ 2.01	4.36	17.44
6	3	0.52 $\frac{0.12}{0.50} 0.38$	2.04	6.12
7	3	0.50 $\frac{0.50}{0.12} 0.38$	2.00	6.00
				112.52
112.52 x 1.21 =				136.15 Kg

0.80x0.80

Sl. No.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	20	0.90 ~ 2.10	1.50	30.00
1a	16	0.90 ~ 2.10	1.50	24.00
2	8	1.12 ~ 3.22	2.17	17.36
3	8	1.15 ~ 2.20	1.98	15.84
4	6	5.32	5.32	31.92
5	4	1.00 ~ 2.44	5.14	20.56
6	3	0.52 $\frac{0.12}{0.50} 0.38$	2.04	6.12
7	3	0.70 $\frac{0.50}{0.12} 0.38$	2.40	7.20
				153.00
153.00 x 1.21 =				185.13 Kg

0.80x1.00

Sl. No.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	20	0.90 ~ 2.10	1.50	30.00
1a	16	0.90 ~ 2.10	1.50	24.00
2	8	1.32 ~ 3.42	2.37	18.96
3	8	1.15 ~ 2.20	1.98	15.84
4	6	5.52	5.52	33.12
5	4	1.00 ~ 2.44	5.14	20.56
6	3	0.52 $\frac{0.12}{0.50} 0.38$	2.04	6.12
7	3	0.70 $\frac{0.50}{0.12} 0.38$	2.40	7.20
				155.80
155.80 x 1.21 =				188.52 Kg

0.80x1.50

Sl. No.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	20	0.90 ~ 2.10	1.50	30.00
1a	16	0.90 ~ 2.10	1.50	24.00
2	8	1.82 ~ 3.92	2.87	22.96
3	8	1.15 ~ 2.20	1.98	15.84
4	6	6.02	6.02	36.12
5	4	1.00 ~ 2.44	5.14	20.56
6	5	0.52 $\frac{0.12}{0.50} 0.38$	2.04	10.20
7	5	0.70 $\frac{0.50}{0.12} 0.38$	2.40	12.00
				171.68
171.68 x 1.21 =				207.73 Kg

1.00x1.00

Sl. No.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	22	0.90 ~ 2.30	1.60	35.20
1a	18	0.90 ~ 2.30	1.60	28.80
2	8	1.32 ~ 3.42	2.37	18.96
3	12	1.15 ~ 2.50	2.13	25.56
4	6	6.12	6.12	36.72
5	4	1.00 ~ 2.78	5.68	22.72
6	3	0.52 $\frac{0.12}{0.50} 0.38$	2.04	6.12
7	3	0.70 $\frac{0.50}{0.12} 0.38$	2.40	7.20
				181.28
181.28 x 1.21 =				219.35 Kg

1.00x1.50

Sl. No.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	22	0.90 ~ 2.30	1.60	35.20
1a	18	0.90 ~ 2.30	1.60	28.80
2	8	1.82 ~ 3.92	2.87	22.96
3	12	1.15 ~ 2.50	2.13	25.56
4	6	6.52	6.62	39.72
5	4	1.10 ~ 2.78	5.68	22.72
6	5	0.52 $\frac{0.12}{0.50} 0.38$	2.04	10.20
7	5	0.70 $\frac{0.50}{0.12} 0.38$	2.40	12.00
				197.16
197.16 x 1.21 =				238.56 Kg

ALL BARS ARE $\phi 14$ (1.21 Kg/m)

REFERENCE DWGS: For reinforcement see dwg. No. 14/1/3/01
For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale:	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. No. 14/1/3/02	
Approved:	Sheet. No. 5 of 9 Rev. No.	

HEAD WALLS
FOR 1 BARREL BOX CULVERT
LIST OF REINFORCEMENT

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

1.00x2.00

POS	No.	FORM	UNIT LENG.	TOTAL LENG.
1	22	1.00 ~ 2.56	1.75	38.50
1a	20	1.00 ~ 2.50	1.75	35.00
2	10	2.32 ~ 5.02	3.67	36.70
3	12	1.30 ~ 2.65	2.28	27.36
4	6	7.42	7.42	44.52
5	4	1.15 ~ 2.95 ~ 1.15	6.05	24.20
6	8	0.52 ^{0.12} / 0.50 _{0.38}	2.04	16.32
7	8	0.90 ^{0.50} / 0.12 _{0.38}	2.80	22.40
				245.00
245.00 x 1.21 =				296.45 Kg

1.50x1.50

POS	No.	FORM	UNIT LENG.	TOTAL LENG.
1	28	1.10 ~ 3.00	2.05	57.40
1a	24	1.10 ~ 3.00	2.05	49.20
2	10	1.82 ~ 4.52	3.17	31.70
3	16	1.15 ~ 3.25	2.50	40.00
4	6	8.12	8.12	48.72
5	4	1.30 ~ 3.73 ~ 1.30	7.23	28.92
6	5	0.52 ^{0.12} / 0.50 _{0.38}	2.04	10.20
7	5	0.90 ^{0.50} / 0.12 _{0.38}	2.80	14.00
				280.14
280.14 x 1.21 =				338.97 Kg

1.50x2.00

POS	No.	FORM	UNIT LENG.	TOTAL LENG.
1	28	1.10 ~ 3.00	2.05	57.40
1a	24	1.10 ~ 3.00	2.05	49.20
2	10	2.32 ~ 5.02	3.67	36.70
3	16	1.15 ~ 3.25	2.50	40.00
4	6	8.62	8.62	51.72
5	4	1.30 ~ 3.73 ~ 1.30	7.23	28.92
6	7	0.52 ^{0.12} / 0.50 _{0.38}	2.04	14.28
7	7	0.90 ^{0.50} / 0.12 _{0.38}	2.80	19.60
				297.82
297.82 x 1.21 =				360.36 Kg

1.75x2.00

POS	No.	FORM	UNIT LENG.	TOTAL LENG.
1	30	1.10 ~ 3.25	2.18	65.40
1a	26	1.10 ~ 3.25	2.18	56.68
2	10	2.32 ~ 5.02	3.67	36.70
3	20	1.13 ~ 3.60	2.67	53.40
4	6	9.32	9.32	55.92
5	4	1.40 ~ 4.16 ~ 1.40	7.86	31.44
6	7	0.52 ^{0.12} / 0.50 _{0.38}	2.04	14.28
7	7	0.90 ^{0.50} / 0.12 _{0.38}	2.80	19.60
				333.42
333.42 x 1.21 =				403.44 Kg

2.00x2.00

POS	No.	FORM	UNIT LENG.	TOTAL LENG.
1	32	1.30 ~ 3.50	2.40	76.80
1a	26	1.30 ~ 3.50	2.40	62.40
2	10	2.32 ~ 5.02	3.67	36.70
3	24	0.85 ~ 3.70	2.58	61.92
4	6	9.52	9.52	57.12
5	4	1.45 ~ 4.24 ~ 1.45	8.24	32.96
6	7	0.52 ^{0.12} / 0.50 _{0.38}	2.04	14.28
7	7	0.90 ^{0.50} / 0.12 _{0.38}	2.80	19.60
				361.78
361.78 x 1.21 =				437.75 Kg

2.00x2.50

POS	No.	FORM	UNIT LENG.	TOTAL LENG.
1	34	1.30 ~ 3.70	2.50	85.00
1a	28	1.30 ~ 3.70	2.50	70.00
2	10	2.82 ~ 5.12	4.47	44.70
3	24	1.15 ~ 4.00	2.88	69.12
4	6	10.62	10.62	63.72
5	4	1.55 ~ 4.56 ~ 1.55	8.78	35.12
6	9	0.52 ^{0.12} / 0.50 _{0.38}	2.04	18.36
7	9	1.10 ^{0.50} / 0.12 _{0.38}	3.20	28.80
				414.82
414.82 x 1.21 =				501.93 Kg

ALL BARS ARE $\phi 14$ (1.21 kg/m)

REFERENCE DWGS: For reinforcement see dwg. No. 14/1/3/01
For bars with variable unit length see note under the same title at dwg. No. 20/2/001

Scale: IRRIGATION & DRAINAGE STANDARDS
Date: DWG. No. 14/1/3/03
Approved: Sheet No. 6 of 9 Rev. No.

HEAD WALLS
FOR 1 BARREL BOX CULVERT
LIST OF REINFORCEMENT

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

1.00x1.00

NO.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	22	0.90 ~ 2.30	1.60	35.20
1a	18	0.90 ~ 2.30	1.60	28.80
1b	4	2.30	2.30	9.20
2	8	2.52 ~ 4.62	3.57	28.56
3	12	1.15 ~ 2.50 0.30	2.13	25.56
4	6	2.32	7.32	43.92
5	4	1.10 2.78 1.70 0.70	5.68	22.72
6	6	0.52 0.12 0.50 0.38	2.04	12.24
7	6	0.70 0.50 0.38 0.12	2.40	14.40
			220.60	
220.60 X 1.21 =			266.93 Kg	

1.00x1.50

NO.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	22	0.90 ~ 2.30	1.60	35.20
1a	18	0.90 ~ 2.30	1.60	28.80
1b	4	2.30	2.30	9.20
2	8	2.52 ~ 4.62	4.57	36.56
3	12	1.15 ~ 2.50 0.30	2.13	25.56
4	6	6.32	8.32	49.92
5	4	1.10 2.78 1.70 0.70	5.68	22.72
6	10	0.52 0.12 0.50 0.38	2.04	20.40
7	10	0.70 0.50 0.38 0.12	2.40	24.00
			252.46	
252.46 X 1.21 =			305.48 Kg	

1.00x2.00

NO.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	22	1.10 ~ 2.50	1.80	39.60
1a	18	1.10 ~ 2.50	1.80	32.40
1b	4	2.50	2.50	10.00
2	10	4.52 ~ 7.22	5.87	58.70
3	12	1.15 ~ 2.50 0.30	2.13	25.56
4	6	9.32	9.32	55.92
5	4	1.10 2.78 1.70 0.90	5.88	23.52
6	14	0.52 0.12 0.50 0.38	2.04	28.56
7	14	0.90 0.50 0.38 0.12	2.80	39.20
			313.46	
313.46 X 1.21 =			379.29 Kg	

1.50x1.50

NO.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	28	1.10 ~ 3.00	2.05	57.40
1a	24	1.10 ~ 3.00	2.05	49.20
1b	4	3.00	3.00	12.00
2	10	3.52 ~ 6.22	4.87	48.70
3	16	1.15 ~ 3.25 0.30	2.50	40.00
4	6	9.82	9.82	58.92
5	4	1.30 3.73 1.30 0.90	7.23	28.92
6	10	0.52 0.12 0.50 0.38	2.04	20.40
7	10	0.90 0.50 0.38 0.12	2.80	28.00
			343.54	
343.54 X 1.21 =			415.68 Kg	

1.50x2.00

NO.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	28	1.10 ~ 3.00	2.05	57.40
1a	24	1.10 ~ 3.00	2.05	49.20
1b	4	3.00	3.00	12.00
2	10	4.52 ~ 7.22	5.87	58.70
3	16	1.15 ~ 3.25 0.30	2.50	40.00
4	6	10.82	10.82	64.92
5	4	1.30 3.73 1.30 0.90	7.23	28.92
6	12	0.52 0.12 0.50 0.38	2.04	24.48
7	12	0.90 0.50 0.38 0.12	2.80	33.60
			369.22	
369.22 X 1.21 =			446.76 Kg	

1.50x2.50

NO.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	28	1.30 ~ 3.20	2.25	63.00
1a	24	1.30 ~ 3.20	2.25	54.00
1b	4	3.20	3.20	12.80
2	10	5.52 ~ 8.82	7.17	71.70
3	16	1.15 ~ 3.25 0.30	2.50	40.00
4	6	11.82	11.82	70.92
5	4	1.30 3.73 1.30 1.10	7.43	29.72
6	18	0.52 0.12 0.50 0.38	2.04	36.72
7	18	1.10 0.50 0.38 0.12	3.20	57.60
			436.46	
436.46 X 1.21 =			528.12 Kg	

2.00x2.00

NO.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	34	1.30 ~ 3.70	2.50	85.00
1a	28	1.30 ~ 3.70	2.50	70.00
1b	4	3.70	3.70	14.80
2	10	4.52 ~ 7.82	6.17	61.70
3	24	1.15 ~ 4.00 0.30	2.58	61.92
4	6	12.32	12.32	73.92
5	4	1.55 4.58 1.55 1.10	8.78	35.12
6	14	0.52 0.12 0.50 0.38	2.04	28.56
7	14	1.10 0.50 0.38 0.12	3.20	44.80
			475.82	
475.82 X 1.21 =			575.74 Kg	

2.00x2.50

NO.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	34	1.30 ~ 3.70	2.50	85.00
1a	28	1.30 ~ 3.70	2.50	70.00
1b	4	3.70	3.70	14.80
2	10	5.52 ~ 8.82	7.17	71.70
3	24	1.15 ~ 4.00 0.30	2.88	69.12
4	6	13.32	13.32	79.92
5	4	1.55 4.58 1.55 1.10	8.78	35.12
6	18	0.52 0.12 0.50 0.38	2.04	36.72
7	18	1.10 0.50 0.38 0.12	3.20	57.60
			519.98	
519.98 X 1.21 =			629.18 Kg	

ALL BARS ARE $\phi 14$ (1.21 kg/m)

REFERENCE DWGS: For reinforcement see dwg. No. 14/1/3/01

For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale:

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG. No. 14/1/3/04

Approved:

Sheet. No. 7 of 9 Rev. No.

HEAD WALLS
FOR 2 BARRELS BOX CULVERT
LIST OF REINFORCEMENT

ISLAMIC REPUBLIC OF IRAN

MINISTRY OF PLAN & BUDGET

TECHNICAL RESEARCH AND
STANDARD BUREAU

Dia. 0.30

Q.D.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	18	0.40 ~ 1.60	1.00	18.00
2	1	0.66 ~ 0.87	0.77	0.77
3	1	0.46 ~ 0.67	0.57	0.57
4	2	4.80	4.80	9.60
5	1	4.32	4.32	4.32
5a	1	3.63	3.63	3.63
6	2	1.00 ~ 1.45	1.23	2.46
7	4	0.62 ~ 2.12	1.37	5.48
8	2	0.60 2.33 1.40 0.20	4.53	9.06
9	2	0.40 (0.40)	2.56	5.12
			59.01	
59.01 X 1.21 =			71.40 Kg	

Dia. 0.40

Q.D.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	20	0.40 ~ 1.70	1.05	21.00
2	2	0.66 ~ 0.92	0.79	1.58
3	2	0.46 ~ 0.72	0.59	1.18
4	2	5.20	5.20	10.40
5	1	4.72	4.72	4.72
5a	1	4.03	4.03	4.03
6	2	1.00 ~ 1.60	1.30	2.60
7	4	0.72 ~ 2.22	1.47	5.88
8	2	0.70 2.50 1.40 0.20	4.80	9.60
9	2	0.40 (0.40)	2.92	5.84
			66.83	
66.83 X 1.21 =			80.96 Kg	

Dia. 0.50

Q.D.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	22	0.40 ~ 1.80	1.10	24.20
2	2	0.66 ~ 0.97	0.82	1.64
3	2	0.46 ~ 0.77	0.62	1.24
4	2	5.60	5.60	11.20
5	1	5.12	5.12	5.12
5a	1	4.43	4.43	4.43
6	4	1.00 ~ 1.75	1.38	5.52
7	4	0.82 ~ 2.32	1.57	6.28
8	2	0.80 2.67 1.40 0.20	5.07	10.14
9	2	0.40 (0.40)	3.28	6.56
			76.33	
76.33 X 1.21 =			92.35 Kg	

Dia. 0.60

Q.D.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	22	0.40 ~ 1.80	1.15	25.30
2	2	0.64 ~ 1.02	0.83	1.66
3	2	0.44 ~ 0.82	0.63	1.26
4	2	6.00	6.00	12.00
5	1	5.58	5.58	5.58
5a	1	4.92	4.92	4.92
6	4	1.00 ~ 1.90	1.45	5.80
7	4	0.92 ~ 2.42	1.67	6.68
8	2	0.90 2.90 1.30 0.20	5.30	10.60
9	2	0.40 (0.40)	3.80	7.60
			81.40	
81.40 X 1.21 =			98.49 Kg	

Dia. 0.70

Q.D.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	24	0.60 ~ 2.20	1.40	33.60
2	3	0.64 ~ 1.07	0.86	2.58
3	3	0.64 ~ 1.07	0.86	2.58
4	3	6.40	6.40	19.20
5	1	5.74	5.74	5.74
5a	—	—	—	—
6	6	1.30 ~ 2.35	1.83	10.98
7	5	1.02 ~ 3.12	2.07	10.35
8	2	1.00 3.07 1.30 0.40	5.77	11.54
9	2	0.40 (0.40)	4.16	8.32
			104.89	
104.89 X 1.21 =			126.92 Kg	

Dia. 0.80

Q.D.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	24	0.60 ~ 2.30	1.45	34.80
2	3	0.62 ~ 1.12	0.87	2.61
3	3	0.62 ~ 1.12	0.87	2.61
4	3	6.80	6.80	20.40
5	1	6.14	6.14	6.14
5a	—	—	—	—
6	6	1.30 ~ 2.50	1.90	11.40
7	5	1.12 ~ 3.22	2.17	10.85
8	2	1.10 3.21 1.30 0.40	6.01	12.02
9	2	0.40 (0.40)	4.66	9.32
			110.15	
110.15 X 1.21 =			133.28 Kg	

Dia. 0.90

Q.D.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	26	0.60 ~ 2.40	1.50	39.00
2	4	0.62 ~ 1.17	0.90	3.60
3	4	0.62 ~ 1.17	0.90	3.60
4	3	7.20	7.20	21.60
5	1	6.54	6.54	6.54
5a	—	—	—	—
6	8	1.30 ~ 2.55	1.98	15.84
7	5	1.22 ~ 3.32	2.27	11.35
8	2	1.20 3.38 1.30 0.40	6.28	12.56
9	3	0.40 (0.40)	5.04	15.12
			129.21	
129.21 X 1.21 =			156.34 Kg	

Dia. 1.00

Q.D.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	26	0.60 ~ 2.50	1.55	40.30
2	4	0.62 ~ 1.22	0.92	3.68
3	4	0.62 ~ 1.22	0.92	3.68
4	3	7.60	7.60	22.80
5	1	6.94	6.94	6.94
5a	—	—	—	—
6	8	1.30 ~ 2.80	2.05	16.40
7	5	1.32 ~ 3.42	2.37	11.85
8	2	1.30 3.55 1.30 0.40	6.55	13.10
9	3	0.40 (0.40)	5.40	16.20
			134.95	
134.95 X 1.21 =			163.29 Kg	

ALL BARS ARE $\Phi 14$ (1.21 kg/m)

REFERENCE DWGS: For reinforcement see dwg. No. 14/1/3/01

For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale:

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG. No. 14/1/3/05

Approved:

Sheet. No. 8 of 9 Rev. No.

HEAD WALLS
FOR 1 BARREL PIPE CULVERT
LIST OF REINFORCEMENT

ISLAMIC REPUBLIC OF IRAN

MINISTRY OF PLAN & BUDJET

TECHNICAL RESEARCH AND
STANDARD BUREAU

Dia 0.70

NO. OF P.C.	Nº.	FORM	UNIT LENG.	TOTAL LENG.
1	44	0.60 ~ 2.20	1.40	61.60
2	24	0.64 ~ 1.97	0.86	20.64
3	6	2.20	2.20	13.20
4	6	7.70	7.70	46.20
5	2	7.04	7.04	14.08
6	12	1.52 ~ 2.27	1.90	22.80
7	8	2.32 ~ 4.42	3.37	26.96
8	6	0.34 ~ 1.04	0.69	4.14
9	4	1.15 3.07 1.35 0.40	5.77	23.08
10	4	0.40 0.40	4.16	16.64
			249.34	
249.34 X 1.21 =			301.70 Kg	

Dia 0.80

NO. OF P.C.	Nº.	FORM	UNIT LENG.	TOTAL LENG.
1	48	0.80 ~ 2.30	1.45	69.60
2	24	0.62 ~ 1.12	0.87	20.88
3	6	2.30	2.30	13.80
4	6	8.20	8.20	49.20
5	2	7.54	7.54	15.08
6	12	1.20 ~ 2.40	1.80	21.60
7	8	2.52 ~ 4.62	3.57	28.56
8	6	0.30 ~ 1.50	0.90	5.40
9	4	1.20 3.21 1.20 0.40	6.01	24.04
10	4	0.40 0.40	4.66	18.64
			266.80	
266.80 X 1.21 =			322.83 Kg	

Dia 0.90

NO. OF P.C.	Nº.	FORM	UNIT LENG.	TOTAL LENG.
1	52	0.60 ~ 2.40	1.50	78.00
2	32	0.62 ~ 1.17	0.90	28.80
3	6	2.40	2.40	14.40
4	6	8.70	8.70	52.20
5	2	8.04	8.04	16.08
6	16	1.20 ~ 2.55	1.88	30.08
7	8	2.72 ~ 4.82	3.77	30.16
8	8	0.30 ~ 1.20	0.75	6.00
9	4	1.25 3.08 1.25 0.40	6.28	25.12
10	6	0.40 0.40	5.04	30.24
			311.08	
311.08 X 1.21 =			376.41 Kg	

Dia 1.00

NO. OF P.C.	Nº.	FORM	UNIT LENG.	TOTAL LENG.
1	52	0.60 ~ 2.50	1.55	80.60
2	32	0.62 ~ 1.22	0.92	29.44
3	6	2.50	2.50	15.00
4	6	9.20	9.20	55.20
5	2	8.54	8.54	17.08
6	16	1.20 ~ 2.70	1.95	31.20
7	8	2.92 ~ 5.02	3.97	31.76
8	8	0.30 ~ 1.30	0.80	6.40
9	4	1.30 3.55 1.30 0.40	6.55	26.20
10	6	0.40 0.40	5.40	26.76
			325.28	
325.28 X 1.21 =			393.59 Kg	

ALL BARS ARE $\Phi 14$ (1.21 kg/m)

REFERENCE DWGS: For reinforcement see dwg. N^o. 14/1/3/01
For bars with variable unit length see note under the same title at dwg. N^o. 20/2/1/01

Scale:

IRRIGATION & DRAINAGE STANDARDS

Date:


DWG. N^o 14/1/3/06

Approved:


Sheet. N^o 9 of 9 Rev. N^o

HEAD WALLS
FOR 2 BARRELS PIPE, CULVERT
LIST OF REINFORCEMENT


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU

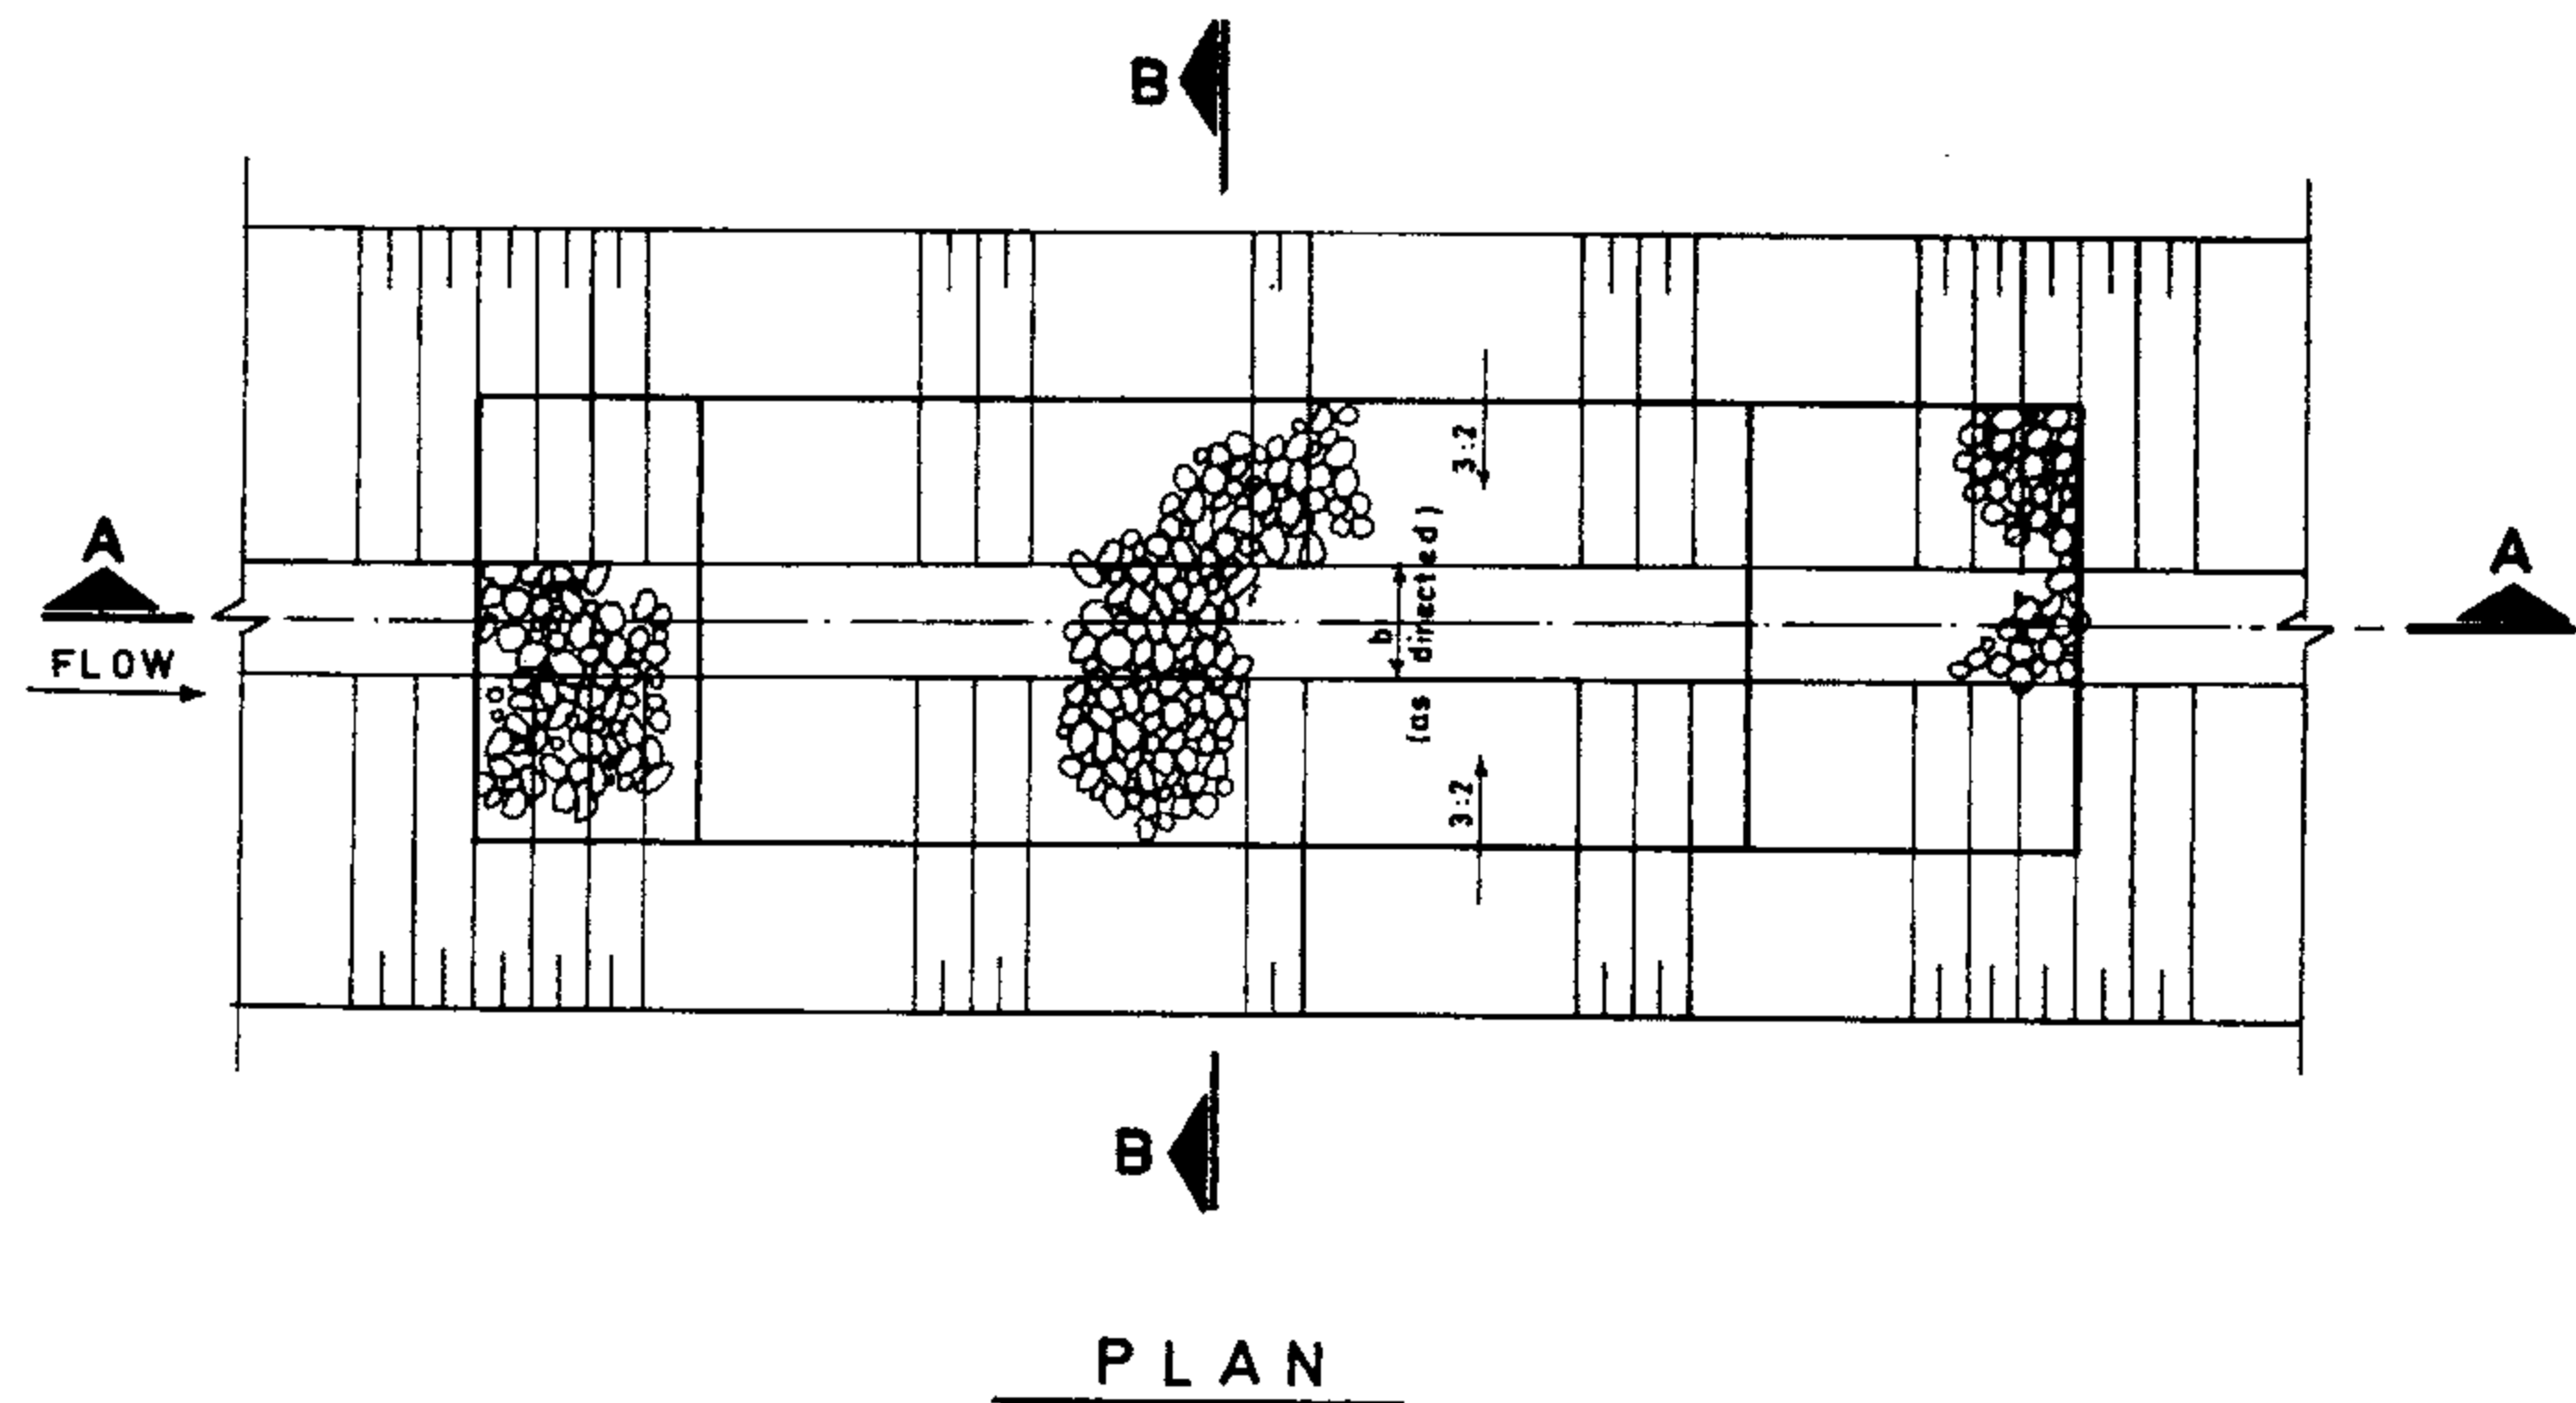


PLAN

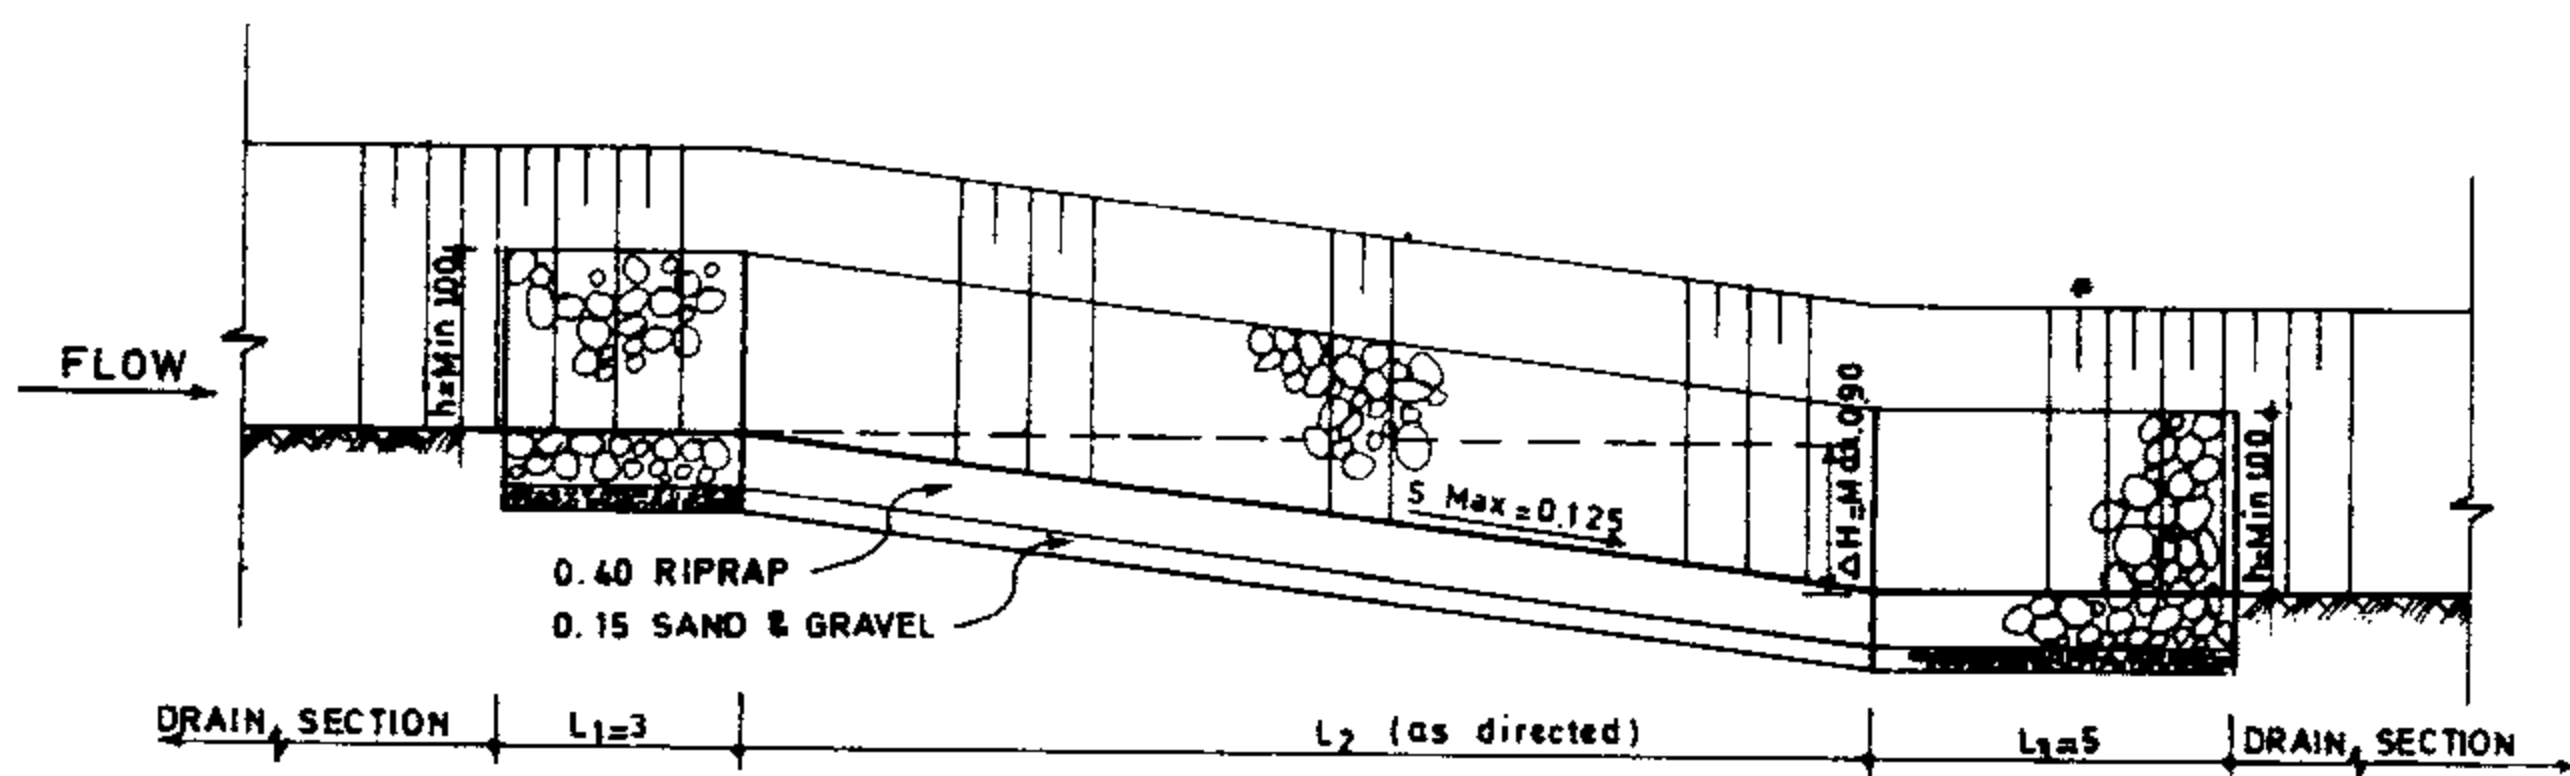


SECTION A-A

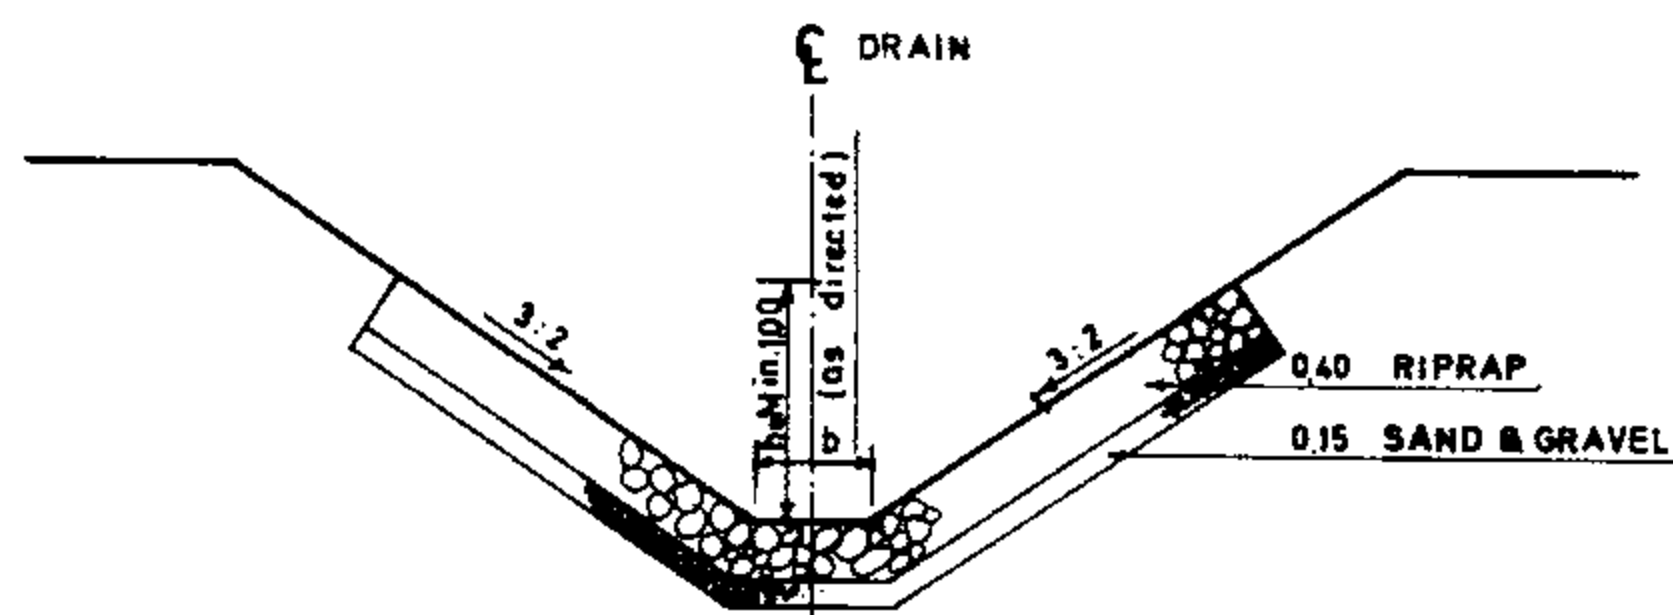

SECTION B-B

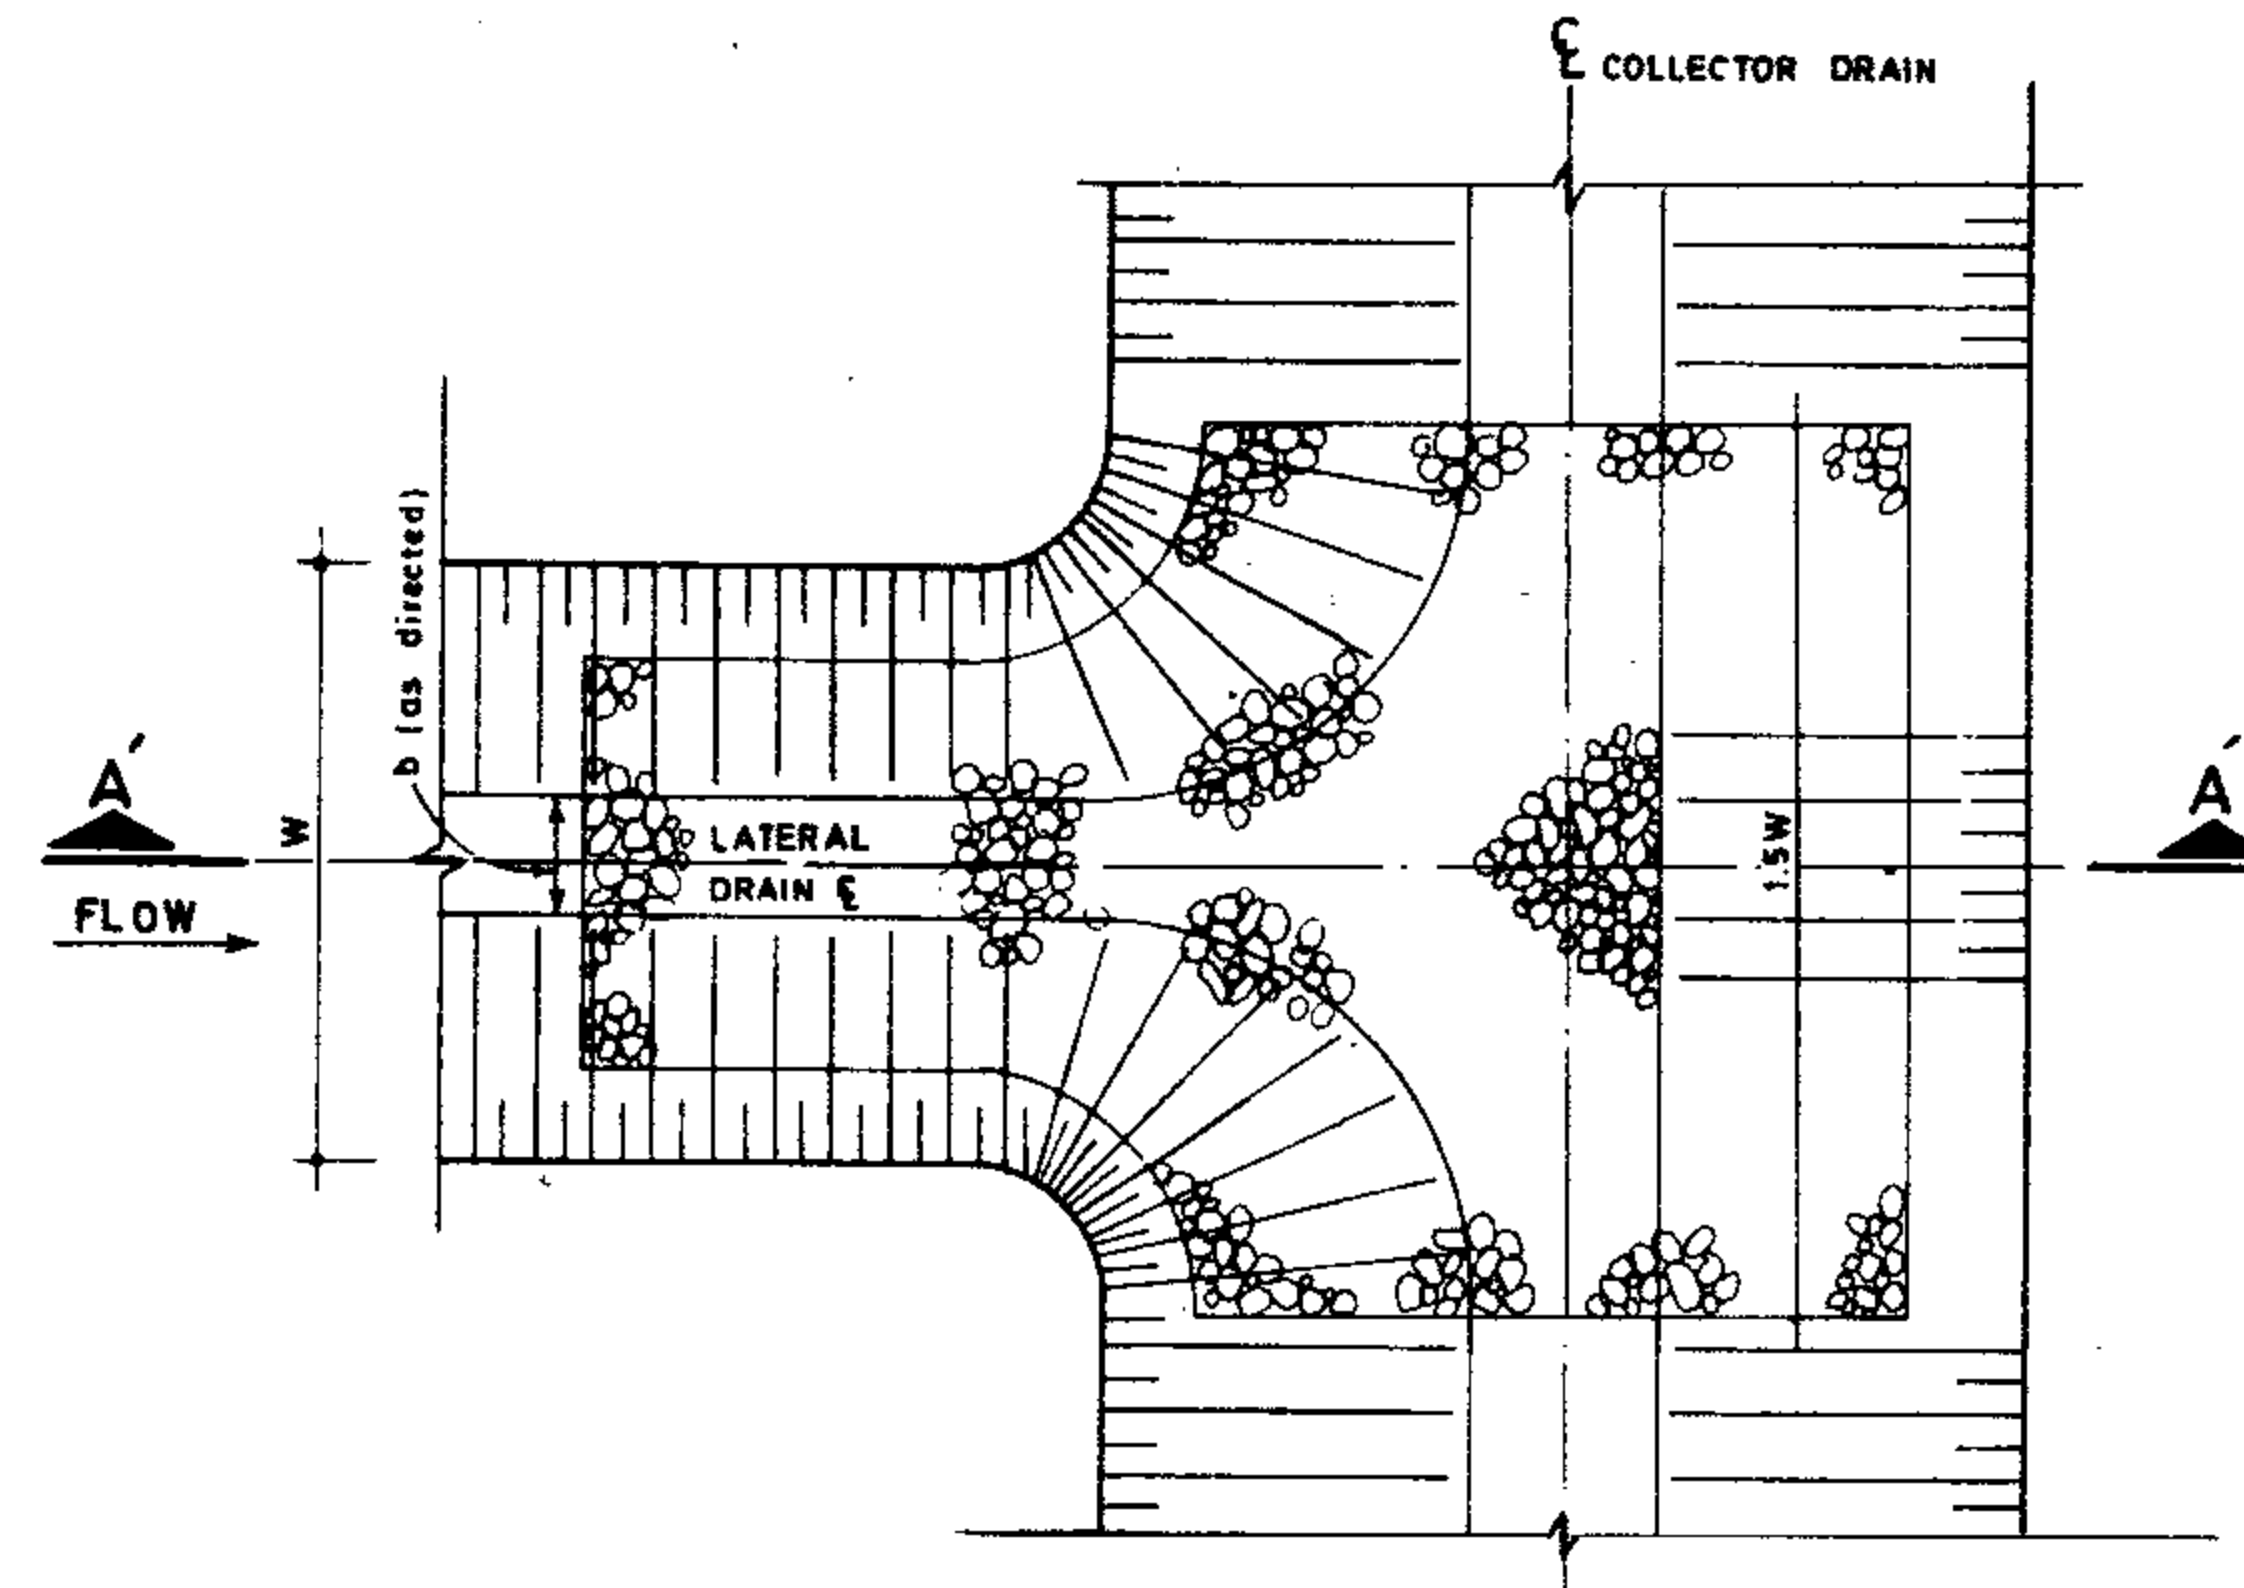

PLAN

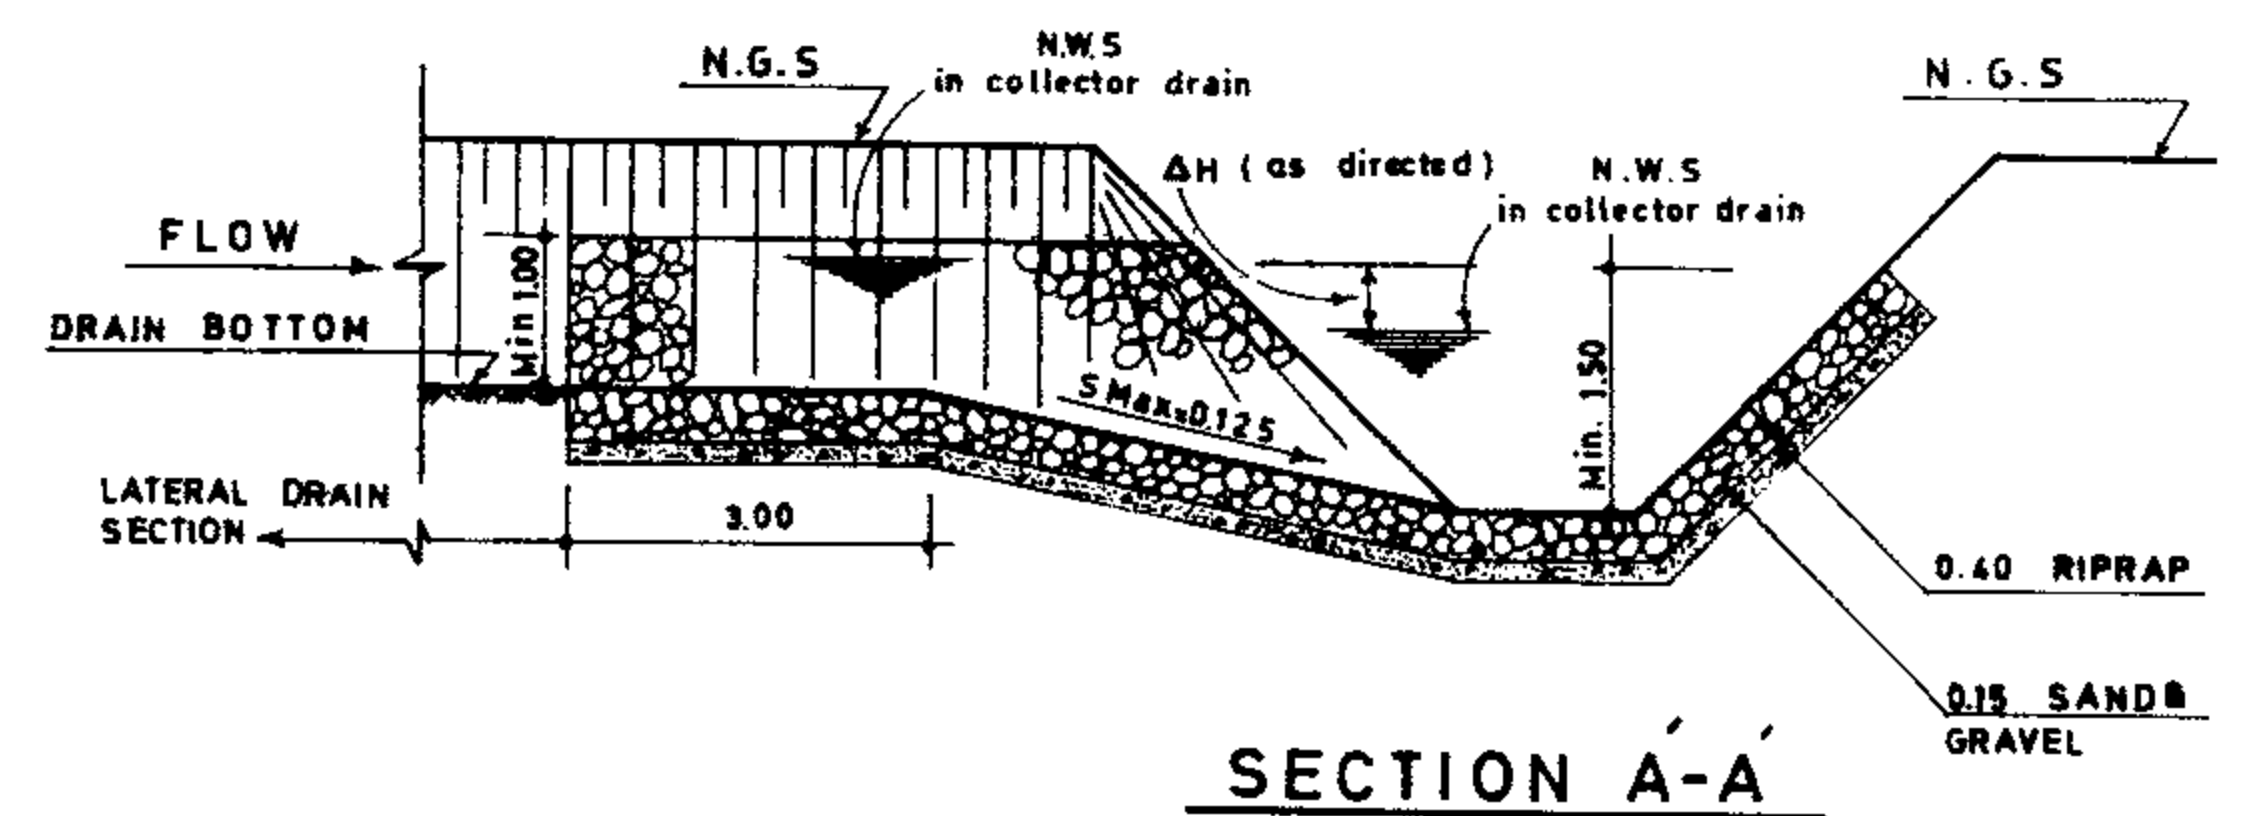

SECTION A-A

REFERENCE DWGS:

Scale: N.T.S

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG No 13/13/1/01

Approved:

Sheet No 1 of 1

Rev. No

RIPRAP INCLINED DROP AND PROTECTION IN INTERSECTION OF COLLECTOR DRAIN WITH LATERAL DRAIN

ISLAMIC REPUBLIC OF IRAN
PLAN & BUDGET ORGANIZATION
TECNICAL RESEARCH AND
STANDARD BUREAU

STRUCTURE DESCRIPTION

Side spillway is a protective structure which protect the canal system and adjacent property from damage, which would result from uncontrolled storm runoff or drainage water, or an uncontrolled excess of flow within the canal. Side spillway and its wasteway, is also used to empty the canal for inspection, maintenance, seasonal shutdown or an emergency such as a canal bank failure.


STRUCTURE COMPONENTS

Side spillway consists of the following hydraulic elements:

- Wasteway inlet which is usually an overflow structure.
- Wasteway turnout gate for drainage of the canal.
- Pool
- Pipe
- Transition
- Wasteway channel

APPLICATION


Side channel spillway are located along the canal bank with the spillway crest parallel to the canal alignment. As the canal water surface rises above the crest, the excess water is automatically discharged into a side channel. This structure is used in conjunction with a slide gate which provides for complete drainage of the canal. The following plan shows the location of entring excess water into the canal as well as the location of side spillway channel.

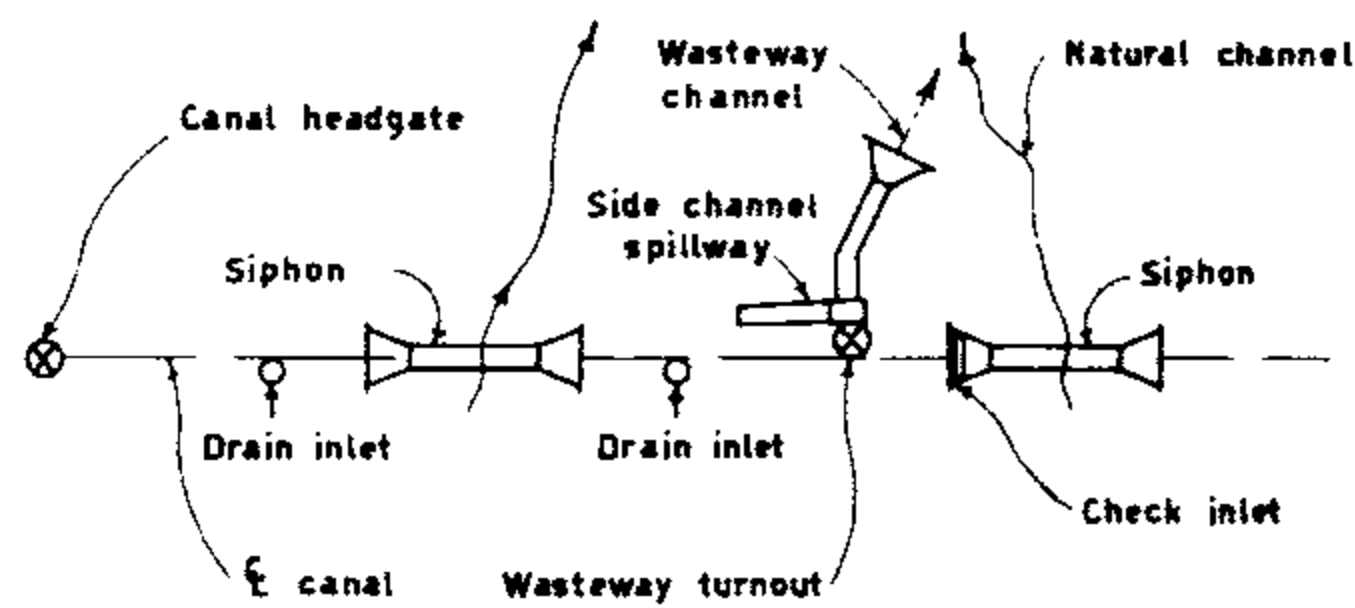

DESIGN PROCEDURE

Step 1

Collect the hydraulic properties of the canal which a side channel spillway is subject to design.

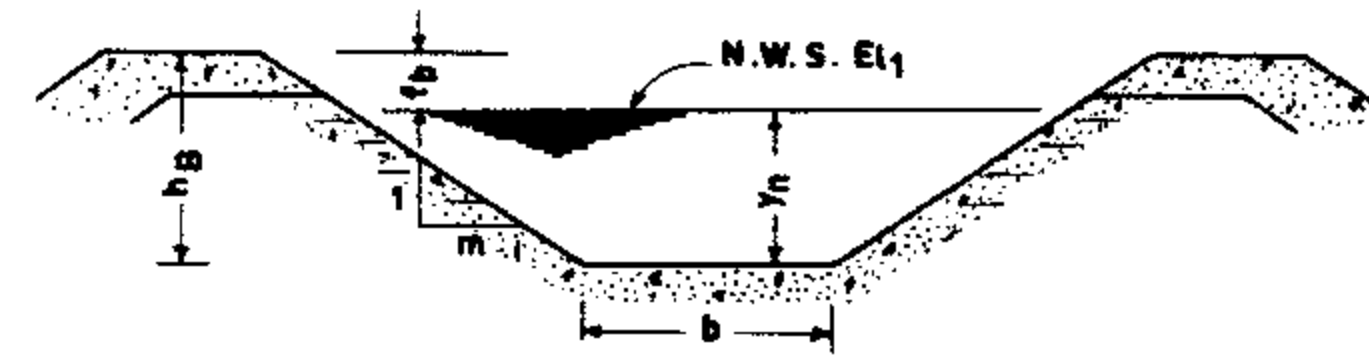


let:

- Q_1 = Canal flow (m^3/s)
- y_n = Canal normal water depth (m.)
- f_b = Canal freeboard as shown (m.)
- Q_2 = The excess flow subject to be spilled (m^3/s)
- E_{11} = Elevation of normal water surface

Step 2

Set spillway crest, calculate required head and crest length.

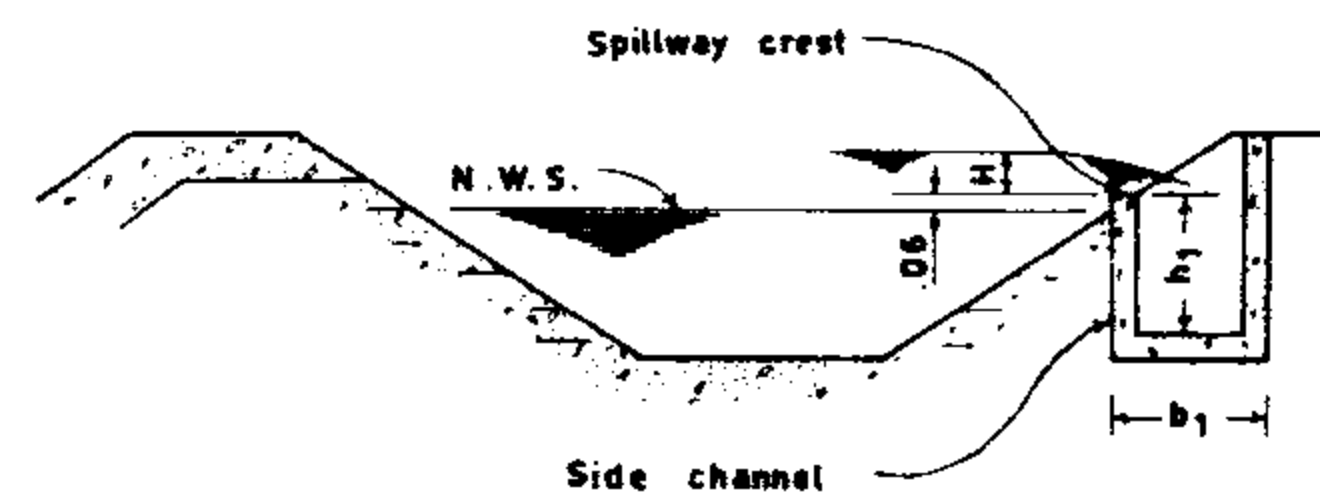

- 2-1 Set spillway crest 0.06 m. above NWS.
- 2-2 Calculate maximum head (H) on the spillway crest allowing 50% encroachment on normal canal bank freeboard.

$$H = 0.5 f_b - 0.06$$

- 2-3 Calculate required crest length (L_c) from the standard suppressed rectangular weir formula for the excess water (Q_2)

$$L_c = \frac{Q_2}{1.336 H^{1.5}}$$

Step 3

Design side channel:


Side channel has a rectangular cross section. The width, depth and slope should be adequate

Y/D	K_A	K_p	K_C
.01	.00133	.00005	.00054
.02	.00375	.00021	.00136
.03	.00687	.00050	.00305
.04	.01054	.00093	.00541
.05	.01468	.00150	.00844
.06	.01924	.00221	.01217
.07	.02417	.00306	.01647
.08	.02944	.00407	.02147
.09	.03501	.00521	.02717
.10	.04088	.00651	.03341
.11	.04701	.00795	.04014
.12	.05339	.00953	.04739
.13	.06000	.01126	.05511
.14	.06683	.01314	.06439
.15	.07387	.01515	.07441
.16	.08111	.01731	.08448
.17	.08854	.01960	.09518
.18	.09613	.02203	.010649
.19	.10390	.02460	.11840
.20	.11182	.02729	.13491
.21	.11990	.03010	.14405
.22	.12811	.03308	.15408
.23	.13647	.03616	.16495
.24	.14494	.03937	.17673
.25	.15353	.04270	.18947
.26	.16225	.04614	.20314

Y/D	K_A	K_p	K_C
.27	.17109	.04970	.23518
.28	.18002	.05337	.25241
.29	.18905	.05715	.27020
.30	.19817	.06104	.28856
.31	.20738	.06503	.30749
.32	.21667	.06912	.32698
.33	.22603	.07330	.34702
.34	.23547	.07758	.36762
.35	.24498	.08195	.38877
.36	.25455	.08641	.41047
.37	.26418	.09095	.43272
.38	.27386	.09557	.45551
.39	.28359	.10027	.47884
.40	.29337	.10503	.50271
.41	.30319	.10987	.52711
.42	.31304	.11477	.55205
.43	.32293	.11973	.57752
.44	.33284	.12475	.60352
.45	.34278	.12983	.63006
.46	.35274	.13495	.65712
.47	.36272	.14011	.68471
.48	.37270	.14532	.71282
.49	.38270	.15057	.74147
.50	.39270	.15584	.77064
.51	.40270	.16115	.80034
.52	.41269	.16648	.83057
.53	.42268	.17182	.86133
.54	.43266	.17719	.89263
.55	.44262	.18256	.92447
.56	.45255	.18794	.95685
.57	.46247	.19331	.98977
.58	.47236	.19869	1.02325
.59	.48221	.20405	1.05728
.60	.49203	.20940	1.09189
.61	.50181	.21473	1.12707
.62	.51154	.22004	1.16283
.63	.52122	.22532	1.19920
.64	.53085	.23056	1.23617
.65	.54042	.23576	1.27378
.66	.54992	.24092	1.31203
.67	.55936	.24602	1.35095
.68	.56873	.25106	1.39054
.69	.57802	.25604	1.43080
.70	.58723	.26095	1.47178
.71	.59635	.26579	1.51345
.72	.60538	.27054	1.55585
.73	.61431	.27520	1.60000
.74	.62313	.27976	1.64480
.75	.63185	.28422	1.69012
.76	.64045	.28856	1.73688
.77	.64893	.29279	1.78405
.78	.65728	.29689	1.83155
.79	.66550	.30085	1.88038
.80	.67357	.30466	1.93050
.81	.68150	.30832	1.98189
.82	.68926	.31181	2.03453
.83	.69686	.31513	2.08841
.84	.70429	.31825	2.14352
.85	.71152	.32117	2.20085
.86	.71856	.32388	2.25937
.87	.72540	.32635	2.31909
.88	.73201	.32858	2.38081
.89	.73839	.33053	2.44452
.90	.74452	.33219	2.51021
.91	.75039	.33354	2.57788
.92	.75596	.33452	2.64752
.93	.76123	.33512	2.71915
.94	.76616	.33537	2.79277
.95	.77072	.33529	2.86838
.96	.77486	.33488	2.94599
.97	.77853	.33413	3.02560
.98	.78165	.33293	3.10721
.99	.78407	.33226	3.19082

to provide freeflow while carrying weed, trash or ice load.

A reasonable width should vary uniformly from 0.6 m. at the upstream end to 1.2 m. at the downstream end, except that a downstream width of 0.9 m. is sufficient for discharge less than $1.4 m^3/s$

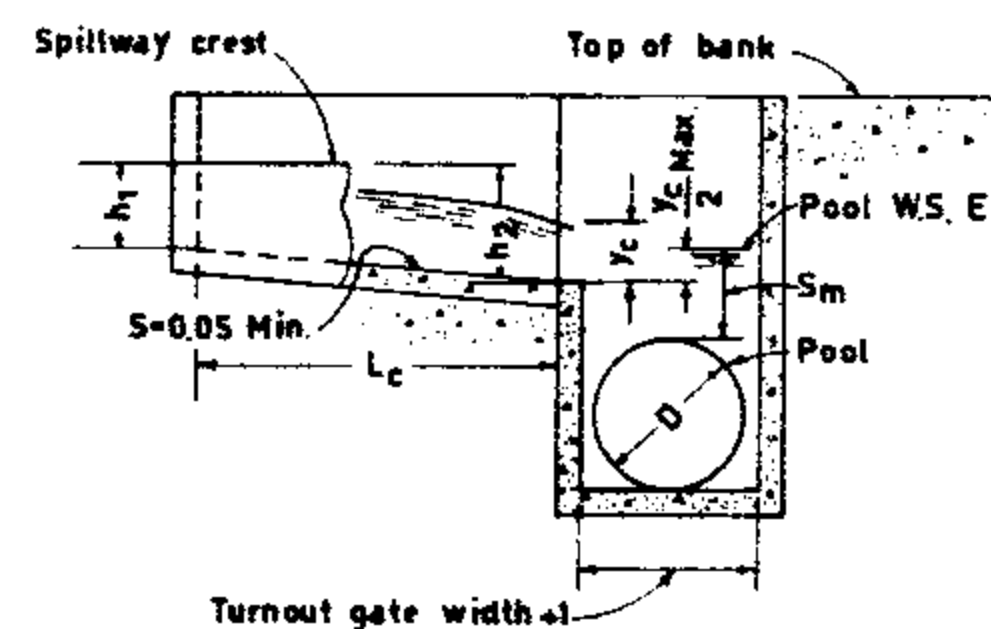

Set: Upstream end bottom width = $b_1 = 0.60$ m. and, downstream end bottom width = $b_2 = 1.20$ m. if $Q_2 \leq 1.4 m^3/s$ set: $b_2 = 0.90$ m.

let:

- q_2 = Unit flow at the downstream end.
- y_c = Critical water depth at the downstream end.

then:

$$q_2 = \frac{Q_2}{b_2} \quad h_2 = 1.5 y_c + 0.3$$

$$y_c = 0.467 q_2^{2/3} \quad h_1 = h_2 - 0.05 L_c$$


REFERENCE DWGS:

Scale:	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. No 13/12/4/01	Side channel spillway with slide gate
Approved:	Sheet No. 1 of 3 Rev. No.	

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

Step 4

4-1 Determine wasteway turnout gate size and head for normal canal flow (Q_1)

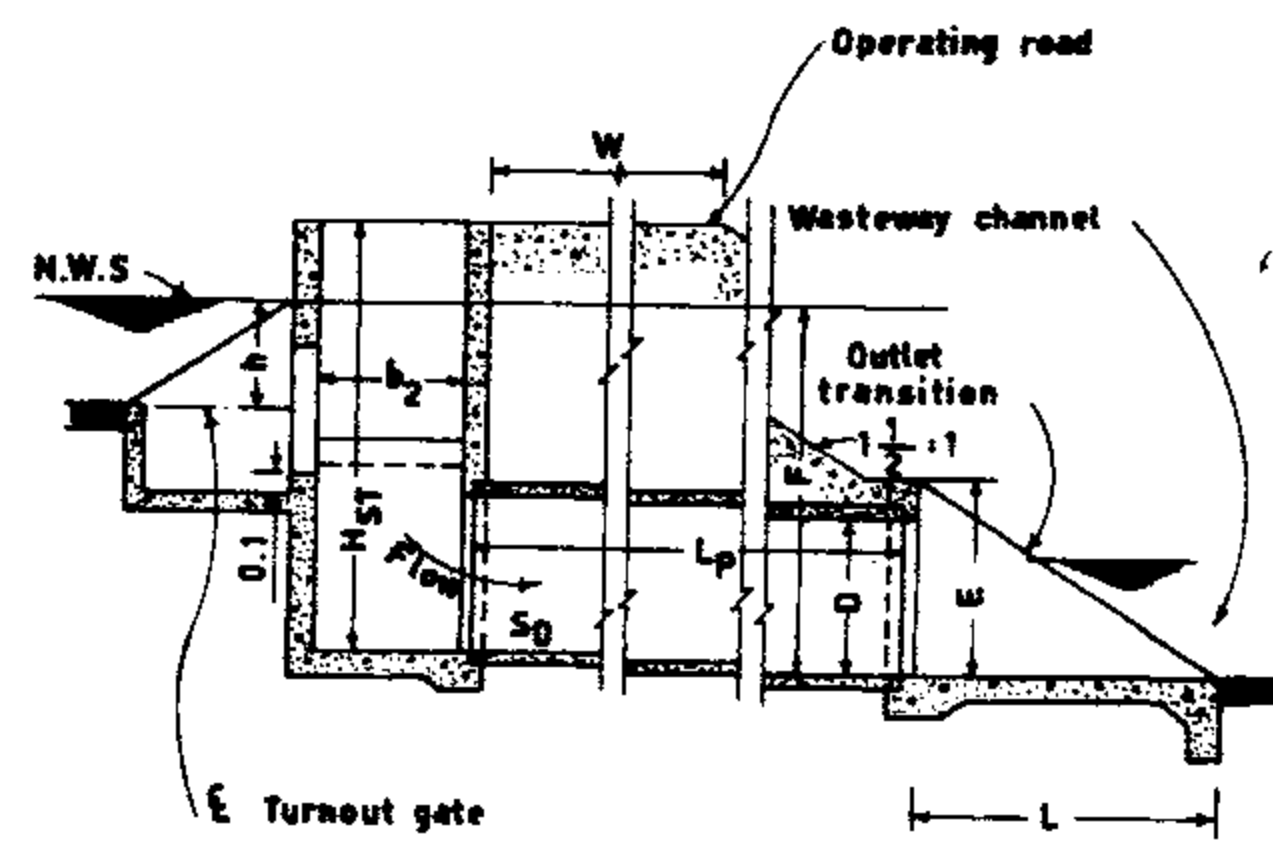

let:

$V = \text{Max. gate velocity (m/s): Max. 3 m/s}$

$A_g = \text{Gate area (m}^2\text{)}$

$h = \text{Gate head (m)}$

Set the centerline of gate at canal invert elevation; so: $h = Y_n$

then,

$$V = C \sqrt{2gh} \quad \text{where: } C=0.6$$

if $V \leq 3 \text{ m/s}$ then $A = \frac{Q_1}{V}$ goto 4.2

otherwise set: $V = 3 \text{ m/s}$ then,

$$A_g = \frac{Q_1}{V} \quad \text{and} \quad h = \frac{Q_1^2}{2gA^2C^2}$$

4-2 Select the gate size based on A, h from the standard gates.

Step 5

Set elevation of pool water surface.

let:

$El_2 = \text{Elevation of pool water surface.}$

Calculate El_2 :

$$El_2 = El_1 + 0.06 - h_1 - 0.05L_c + 0.5Y_c$$

Or:

$$El_2 = El_1 - h$$

Select whichever resulted lower pool water surface

Step 6

Determine pipe diameter and crown submergence for the normal canal capacity (Q_1) plus the excess water (Q_2):

$$Q_3 = Q_1 + Q_2$$

set pipe velocity, $V_p = 3 \text{ m/s}$

$$\text{Pipe area: } A_p = \frac{Q_3}{V_p}$$

$$\text{Calculated pipe dia.: } D_1 = \sqrt{\frac{4A}{\pi}}$$

Select pipe diameter (D) from the standard pipes (D).

$$\text{Recalculate: } A_p = \frac{\pi D^2}{4}$$

$$V_p = \frac{Q_3}{A_p}$$

$$h_{V_p} = \frac{V_p^2}{2g}$$

6-1 Set pipe crown 1.5 h_{V_p} below the pool water surface.

6-2 Submergence, $S_m = 1.5 h_{V_p}$

6-3 Set pipe invert on a slope of $S_0 = .001$

Step 7

Find structure height (H_{ST})

$$H_{ST} = D + S_m + (El_1 - El_2) + f_b$$

Step 8

Select outlet transition type 2 and read E and L base on the selected pipe diameter.

Step 9

Determine pipe length (L_p)

let:

$W = \text{Width of operating road.}$

$$L_p = W + 1.5(H_{ST} - E) + 0.3$$

Step 10

Select type of protection for inlet and outlet.

Step 11

Check the percolation path.

Step 12

Check the effect of downstream water surface to pipe hydraulic properties.

12-1 Collect the hydraulic properties of wasteway channel.


let:

$$Q_{max} = \text{Wasteway channel flow} = Q_1 + Q_2 = Q_3$$

$Y_4 = \text{Depth of water for } Q_{max}$

$V_4 = \text{Wasteway water velocity}$

$$h_{V_4} = \text{Velocity head} = \frac{V_4^2}{2g}$$

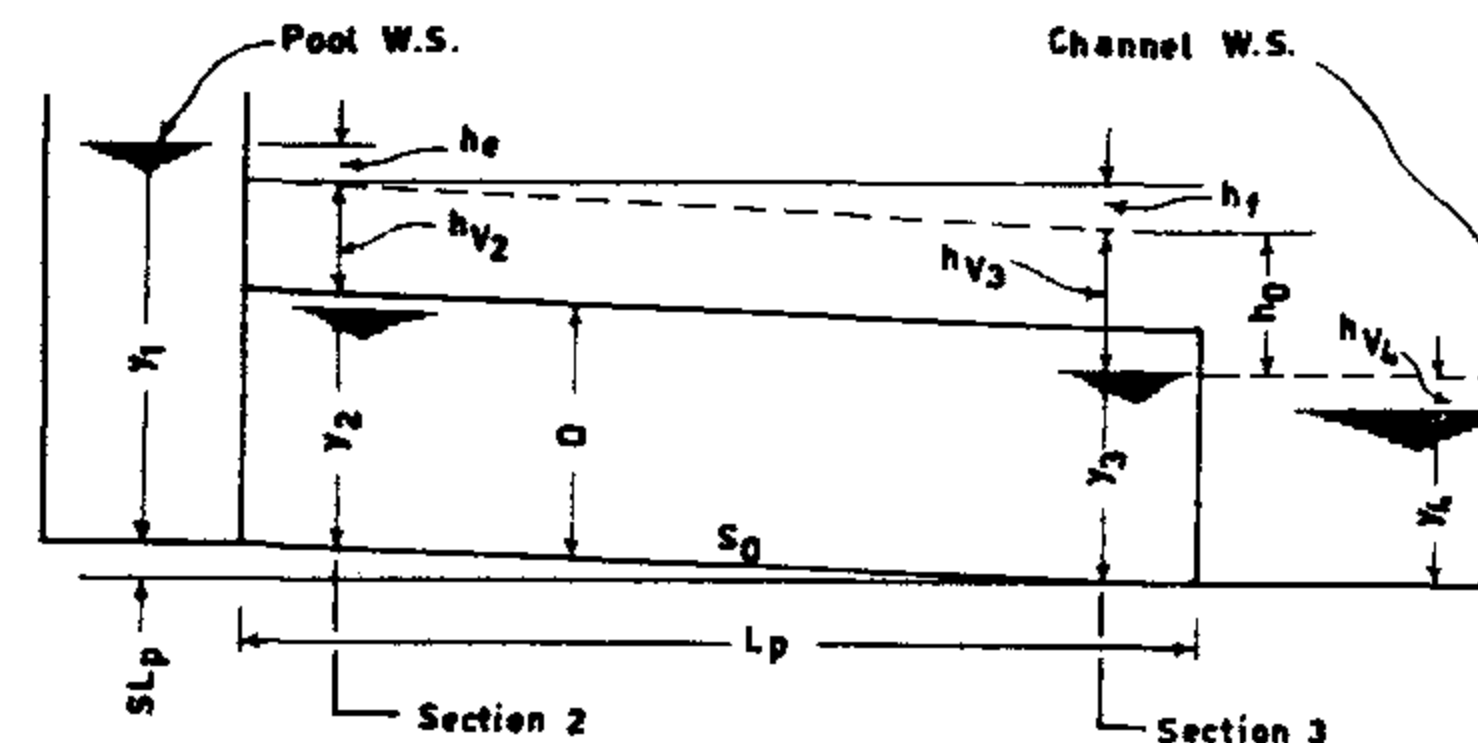

12-2 Calculate specific energy in wasteway channel:

$$E_4 = d_4 + h_{V_4}$$

12-3 Compute pipe flow at critical flow:

$$\text{Calculate } K_C = \frac{Q_{max}}{D^{5/2}}$$

From the table find the value of K_C Close to calculated K_C and read:

$$\frac{Y_C}{D} \quad \text{and} \quad K_p, K_A$$

$$\text{Set } \frac{Y_C}{D} = K_C \quad \text{and compute } Y_C$$

$$\text{Set } \frac{A_C}{D^2} = K_A \quad \text{and compute } A_C$$

$$\text{Compute } V_C = \frac{Q_{max}}{A_C}, \quad h_{V_C} = \frac{V_C^2}{2g}$$

Calculate maximum specific energy at the critical condition (E_C):

$$E_C = Y_C + h_{V_C}$$

Calculate the critical slope.

$$\text{Set } \frac{Q_n}{D^{8/3} S_C^{1/2}} = K_p \quad \text{and calculate } S_C \text{ for } n = 0.013$$

12-4 Check the pipe slope:

S_C should be $> S_0$

12-5 Compute energy required at section 3:

$$E_3 = E_4 + 0.8(h_{V_C} - h_{V_4})$$

12-6 Check E_3 should be $< E_C$

Otherwise the wasteway channel shall control the pipe flow.

The excess energy = $E_C - E_3$

If the value of $(E_C - E_3)$ is small, an energy dissipator is not required otherwise, an energy dissipator should be considered.

12-7 Compute energy at section 2:

$$E_2 + S_0 L_p = E_C + h_f$$

$$h_f = L_p \left(\frac{S_2 + S_C}{2} \right)$$

by try and error find y_2 in order to satisfies the above equality.

- Assume a value to y_2 which should be greater than Y_C .

- Compute the ratio of $\frac{Y_C}{D}$ and through the table read K_A and K_r .

- By using the equation $K_p = \frac{Q_n}{D^{8/3} S^{1/2}}$ and $\frac{A_2}{D^2} = K_A$ compute S_2 and A_2 .

- Compute $V_2 = \frac{Q_{max}}{A_2}$ and $h_{V_2} = \frac{V_2^2}{2g}$

- Insert the values to the following Bernolli equation:

$$Y_2 + h_{V_2} + S_0 L_p = E_C + L_p \left(\frac{S_2 + S_C}{2} \right)$$

If the value of y_2 satisfied the above equation then, calculate:

$E_2 = Y_2 + h_{V_2}$ otherwise change the value of y_2 and try it again.

12-8 Compute specific energy at section 1 (E_1) and check the pipe submergence.

- Assume zero velocity in the pool.

- Assume pipe entrance loss, $h_e = 0.5 h_{V_2}$

$$E_1 = E_2 + h_e \quad \text{and} \quad y_1 = E_1$$

$$S_m = y_1 - D$$

REFERENCE DWGS:

Scale:

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG. No 13,12,4,02

Side channel spillway with slide gate

Approved:

Sheet Ng 2 of 3 Rev Ng

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU

DESIGN EXAMPLE

Step 1

Let:

$$Q_1 = 2.00 \text{ m}^3/\text{s}$$

$$y_n = 0.90 \text{ m}$$

$$f_b = 0.60 \text{ m}$$

$$Q_2 = 0.50 \text{ m}^3/\text{s}$$

$$El_1 = 212.65 \text{ m from sea level.}$$

Step 2

2-1 Elevation of spillway crest:

$$212.65 + 0.06 = 212.71$$

2-2 $H = 0.5 \times f_b - 0.06 = 0.5 \times 0.6 - 0.06 = 0.24 \text{ m.}$

$$2-3 \quad L_c = \frac{Q_2}{1.838 H^{1.5}} = \frac{0.5}{1.838 \times (0.24)^{1.5}} = 2.31 \text{ m.}$$

$$\text{Set } L_c = 2.5 \text{ m.}$$

Step 3

As $Q_2 = 0.5 < 1.4 \text{ m}^3/\text{s}$

then:

$$b_2 = 0.9 \text{ m. and } b_1 = 0.6 \text{ m.}$$

$$q_2 = \frac{Q_2}{b_2} = \frac{0.5}{0.9} = 0.556$$

$$y_2 = 0.467 q_2^{2/3} = 0.467 \times (0.556)^{2/3} = 0.32 \text{ m.}$$

$$h_2 = 1.5 y_2 + 0.3 = 1.5 \times 0.32 + 0.3 = 0.78 \text{ m.}$$

$$h_1 = h_2 - 0.05 L_c = 0.78 - 0.05 \times 2.5 = 0.65 \text{ m.}$$

Step 4

4-1 Set $h = y_n = 0.9 \text{ m.}$

$$V = 0.6 \sqrt{2 \times 9.81 \times 0.9} = 2.52 \text{ m/s}$$

As $V = 2.52 < 3 \text{ m/s}$ then:

$$A_g = \frac{Q_1}{V} = \frac{2}{2.52} = 0.794 \text{ m}^2$$

4-2 Select gate width = 1.00 m and Height = 0.80 m. from gate standard presented at check structure structure drawing (Dwg.No.12/1/1/01).

then:

$$\text{Gate area } A_g = 1.00 \times 0.8 = 0.8 \text{ m}^2$$

Step 5

$$El_2 = El_1 + 0.06 - h_1 - 0.05 L_c + 0.5 y_c$$


$$= 212.65 + 0.06 - 0.65 - 0.05 \times 2.5 + 0.5 \times 0.32$$

$$= 212.10$$

Or:

$$El_2 = El_1 - h = 212.65 - 0.9 = 211.75$$

Select $El_2 = 211.75$ because 211.75 gives the lower pool water surface.

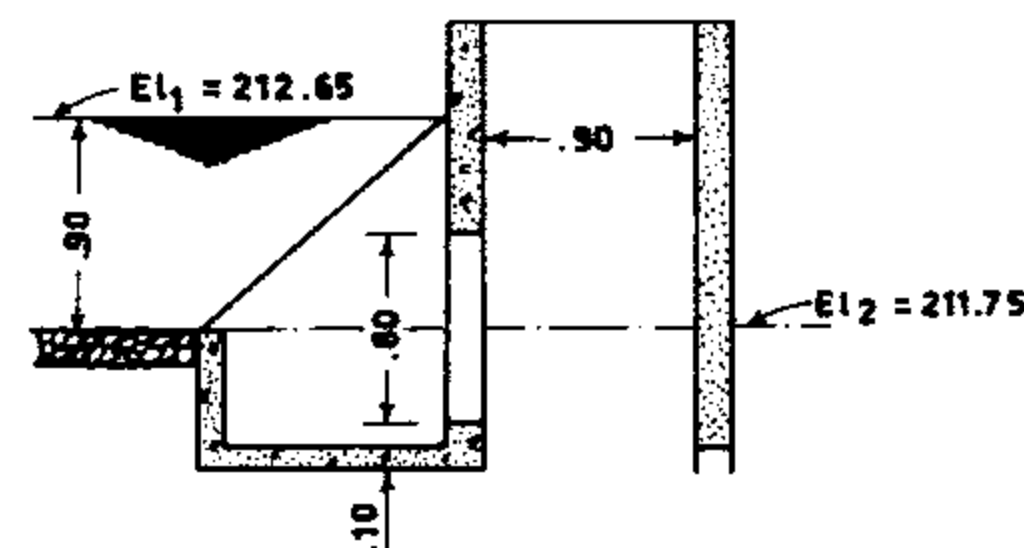

Step 6

$$Q_3 = Q_1 + Q_2 = 2.00 + 0.5 = 2.5 \text{ m}^3/\text{s}$$

let $V_p = 3 \text{ m/s}$

$$\text{Pipe area } A_p = \frac{Q_3}{V_p} = \frac{2.5}{3} = 0.833 \text{ m}^2$$

$$\text{Pipe dia. } D_1 = \sqrt{\frac{4A}{\pi}} = \sqrt{\frac{4 \times 0.833}{\pi}} = 1.03 \text{ m.}$$

As far as pipe diameter 1000 mm. gives velocity more than 3 m/s so select pipe diameter $D = 1200 \text{ mm.}$

$$D = 1.2 \text{ m.}$$

$$A_p = \frac{\pi D^2}{4} = \frac{3.1416 \times (1.2)^2}{4} = 1.131 \text{ m}^2$$

$$V_p = \frac{Q_3}{A_p} = \frac{2.5}{1.131} = 2.21 \text{ m/s}$$

$$h_{Vp} = \frac{V_p^2}{2g} = 0.25 \text{ m.}$$

$$6-1 \text{ Elevation of pipe crown} = El_2 - 1.5 h_{Vp}$$

$$= 211.75 - 1.5 \times 0.25 = 211.38 \text{ m.}$$

$$6-2 \text{ Pipe submergence, } S_m = 1.5 h_p = 1.5 \times 0.25 = 0.38$$

$$6-3 \text{ Set } S_0 = 0.001$$

Step 7

$$H_{ST} = D + S_m + (El_1 - El_2) + f_b$$

$$= 1.2 + 0.38 + (212.65 - 211.75) + 0.6$$

$$= 3.08 \text{ m.}$$

Step 8

From type transition table :

$$E = 1.80 \text{ m. } L = 2.75 \text{ m.}$$

Step 9

Let $W =$ Width of operating road = 4 m.

$$L_p = W + 1.5(H_{ST} - E) + 0.3$$

$$= 4 + 1.5(3.08 - 1.8) + 0.3 = 6.22 \text{ m.}$$

Set $L_p = 6.5 \text{ m.}$

Step 12

12-1 The following hydraulic data collected for the wasteway channel:

$$Q_{max} = Q_3 = 2.5 \text{ m}^3/\text{s}$$

$$d_4 = 0.85 \text{ m.}$$

$$V_4 = 1.2 \text{ m/s}$$

$$h_{V4} = \frac{(V_4)^2}{2g} = \frac{(1.2)^2}{2 \times 9.81} = 0.07 \text{ m.}$$

$$12-2 \quad E_4 = y_4 + h_{V4} = 0.85 + 0.07 = 0.92 \text{ m.}$$

$$12-3 \quad K_C = \frac{Q_{max}}{D^{5/2}} = \frac{2.5}{(1.2)^{5/2}} = 1.58485$$

From the table and by interpolation:

$$\frac{Y_C}{D} = 0.72 + \frac{1.58485 - 1.55655}{1.60012 - 1.55655} \times 0.01 = 0.7265$$

$$K_A = 0.60538 + \frac{0.61431 - 0.60538}{0.01} \times (0.7265 - 0.72) = 0.61118$$

$$K_P = 0.27054 + \frac{0.27520 - 0.27054}{0.01} \times (0.7265 - 0.72) = 0.27357$$

$$y_C = 0.7265 \times 1.2 = 0.872$$

$$A_C = 0.61118 \times (1.2)^2 = 0.880$$

$$V_C = \frac{Q_{max}}{A_C} = \frac{2.5}{0.880} = 2.84 \text{ m/s}$$

$$h_{V_C} = \frac{(V_C)^2}{2g} = \frac{(2.84)^2}{2 \times 9.81} = 0.41 \text{ m.}$$

$$E_C = y_C + h_{V_C} = 0.88 + 0.41 = 1.29 \text{ m.}$$

$$K_P = \frac{Q_n}{D^{8/3} S_C^{1/2}} \quad \text{Or: } S_C = \left(\frac{Q_n}{K_P D^{8/3}} \right)^2$$

$$S_C = \left(\frac{2.5 \times 0.013}{0.27357 \times (1.2)^{8/3}} \right)^2 = 0.00533$$

12-4 $S_C = 0.00533 > S_0 = 0.001$ satisfied.

$$12-5 \quad E_3 = E_4 + 0.8(h_{V_C} - h_{V_4})$$

$$= 0.92 + 0.8(0.41 - 0.07) = 1.19 \text{ m.}$$

$$12-6 \quad E_3 = 1.19 < E_C = 1.29 \text{ satisfied.}$$

Excess energy = $E_C - E_3 = 1.29 - 1.19 = 0.1$ is small so energy dissipator is not required.

$$12-7 \quad E_2 + S_0 L_p = E_C + h_f$$

Or:

$$E_2 - h_f = E_C - S_0 L_p = 1.29 - 0.001 \times 6.5 = 1.28 \text{ m.}$$

Assume $y_2 = 0.95$

$$\frac{y_2}{D} = \frac{0.95}{1.2} = 0.79$$

From table read $K_A = 0.6655$

$$K_P = 0.30085$$

$$K_P = 0.30085 = \frac{Q_n}{D^{8/3} S_2^{1/2}} = \frac{2.5 \times 0.013}{(1.2)^{8/3} \times S_2^{1/2}}$$

$$S_2 = \left(\frac{2.5 \times 0.013}{0.30085 \times (1.2)^{8/3}} \right)^2 = 0.00441$$

$$K_A = 0.6655 = \frac{A_2}{D^2} = \frac{A_2}{(1.2)^2}$$

$$A_2 = 0.9583 \text{ m}^2$$

$$V_2 = \frac{Q_{max}}{A_2} = \frac{2.5}{0.9583} = 2.61 \text{ m/s}$$

$$h_{V_2} = \frac{(V_2)^2}{2g} = \frac{(2.61)^2}{2 \times 9.81} = 0.35$$

Bernolli equation:

$$y_2 + h_{V_2} + S_0 L_p = E_C + L_p \left(\frac{S_2 + S_C}{2} \right)$$

$$0.95 + 0.35 + 0.001 \times 6.5 = 1.29 + 6.5 \left(\frac{0.00441 + 0.00533}{2} \right)$$

$$1.307 \# 1.322$$

Assume $y_2 = 1.00$

$$\frac{y_2}{D} = \frac{1}{1.2} = 0.83$$

$$K_A = 0.69686 \quad K_P = 0.31513$$

$$S_2 = \left(\frac{2.5 \times 0.013}{0.31513 \times (1.2)^{8/3}} \right)^2 = 0.00402$$

$$A_2 = 0.69686 \times (1.2)^2 = 1.0035$$

$$V_2 = \frac{2.5}{1.0035} = 2.49 \quad h_{V_2} = \frac{(2.49)^2}{2 \times 9.81} = 0.32$$

$$1.00 + 0.32 + 0.001 \times 6.5 = 1.29 + 6.5 \left(\frac{0.00402 + 0.00533}{2} \right)$$

$$1.327 \# 1.320$$

As 1.327 is close to 1.320 then: $y_2 = 1.00$

$$E_2 = y_2 + h_{V_2} = 1.00 + 0.32 = 1.32$$

$$12-8 \quad E_1 = E_2 + h_e = E_2 + 0.5 h_{V_2}$$

$$= 1.32 + 0.5 \times 0.32 = 1.48$$

$$y_1 = E_1 = 1.48$$

$$S_m = y_1 - D = 1.48 - 1.20 = 0.28$$

REFERENCE DWGS:

Scale:

Date:

Approved:


DWG. No 13/12/4/03

Sheet No 3 of 3 Rev. No

IRRIGATION & DRAINAGE STANDARDS

Side channel spillway
with slide gate


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU

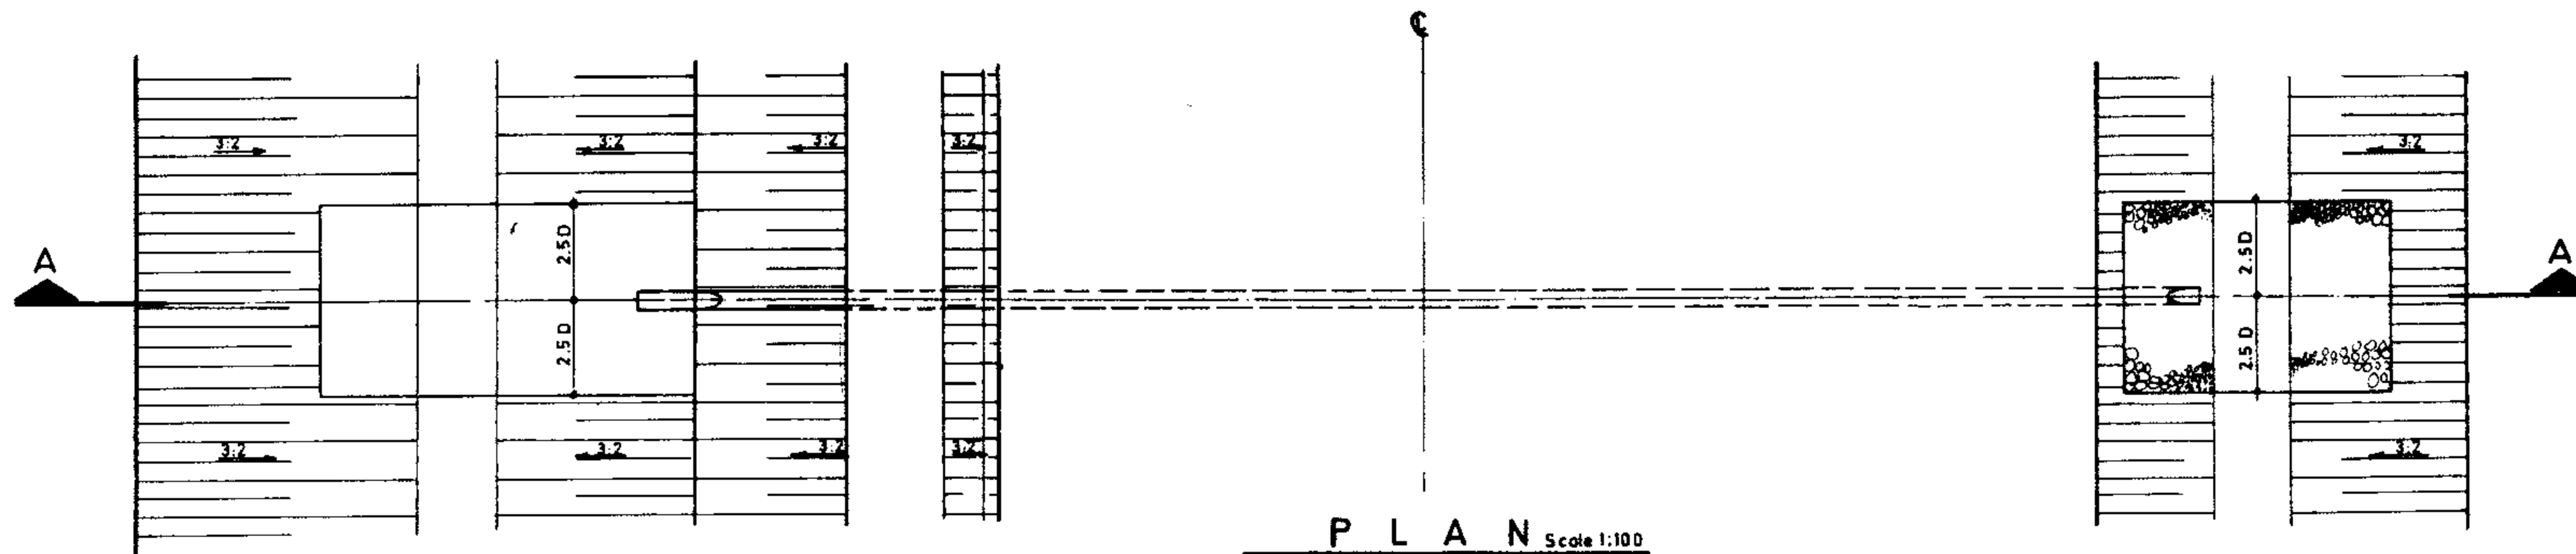


PLAN Scale 1:100
Drain inlet to earth canal

NOTES:

- ① Drain inlets are structures used to carry relatively small amounts of storm run-off or drainage water into the canal.
- ② The drain inlet may be located in a natural drainage channel or at the terminal end of an interceptor drain which parallels the canal. As the inlet end must be above the canal watersurface, the drain inlet is best suited where the canal prism is below the original ground surface.
- ③ A pipe section is generally used where the design flow is small, and it is therefore the type most commonly used. Use of pipe section is desirable if an operating road crosses the drain inlet.
- ④ Drain inlets should be designed to accommodate the storm run-off from the drainage area, based upon the design storm frequency (usually 25 years).
- ⑤ Where overflow wasteway facilities are not provided for a reach of canal, the total design capacity of all drain inlets within that reach should be limited to 10% of the normal design capacity of the canal.
- ⑥ Where an overflow wasteway facility is provided, the design capacity of an individual drain inlet should not exceed 10% of the cumulative inflows from all drain inlets within that reach should not exceed 20% of the normal design capacity of the canal.
- ⑦ Earth inlet transitions are usually satisfactory for drain inlets. If a particular situation requires a concrete transition its type should be determined on the basis of the conditions discussed in dwgs. N213/7/1/01 or 13/9/1/01_13/11/1/01
- ⑧ To prevent degradation of the inlet channel and to provide complete drainage of the channel the pipe invert (assuming an earth transition) should be set at or slightly below the original ground surface of the channel invert. The invert must be preferably 15cm, but at least 10cm, above the normal water surface in an earth canal or 3cm, above the maximum water surface.
- ⑨ The pipe diameter should be determined on the basis of a maximum full pipe velocity of 3 m./s. if a concrete inlet is used and 1.5 m./s. if an earth transition is used.
- ⑩ The road dimensions shown on this dwg. are not obligatory and could be changed or revised with respect to local or project conditions.

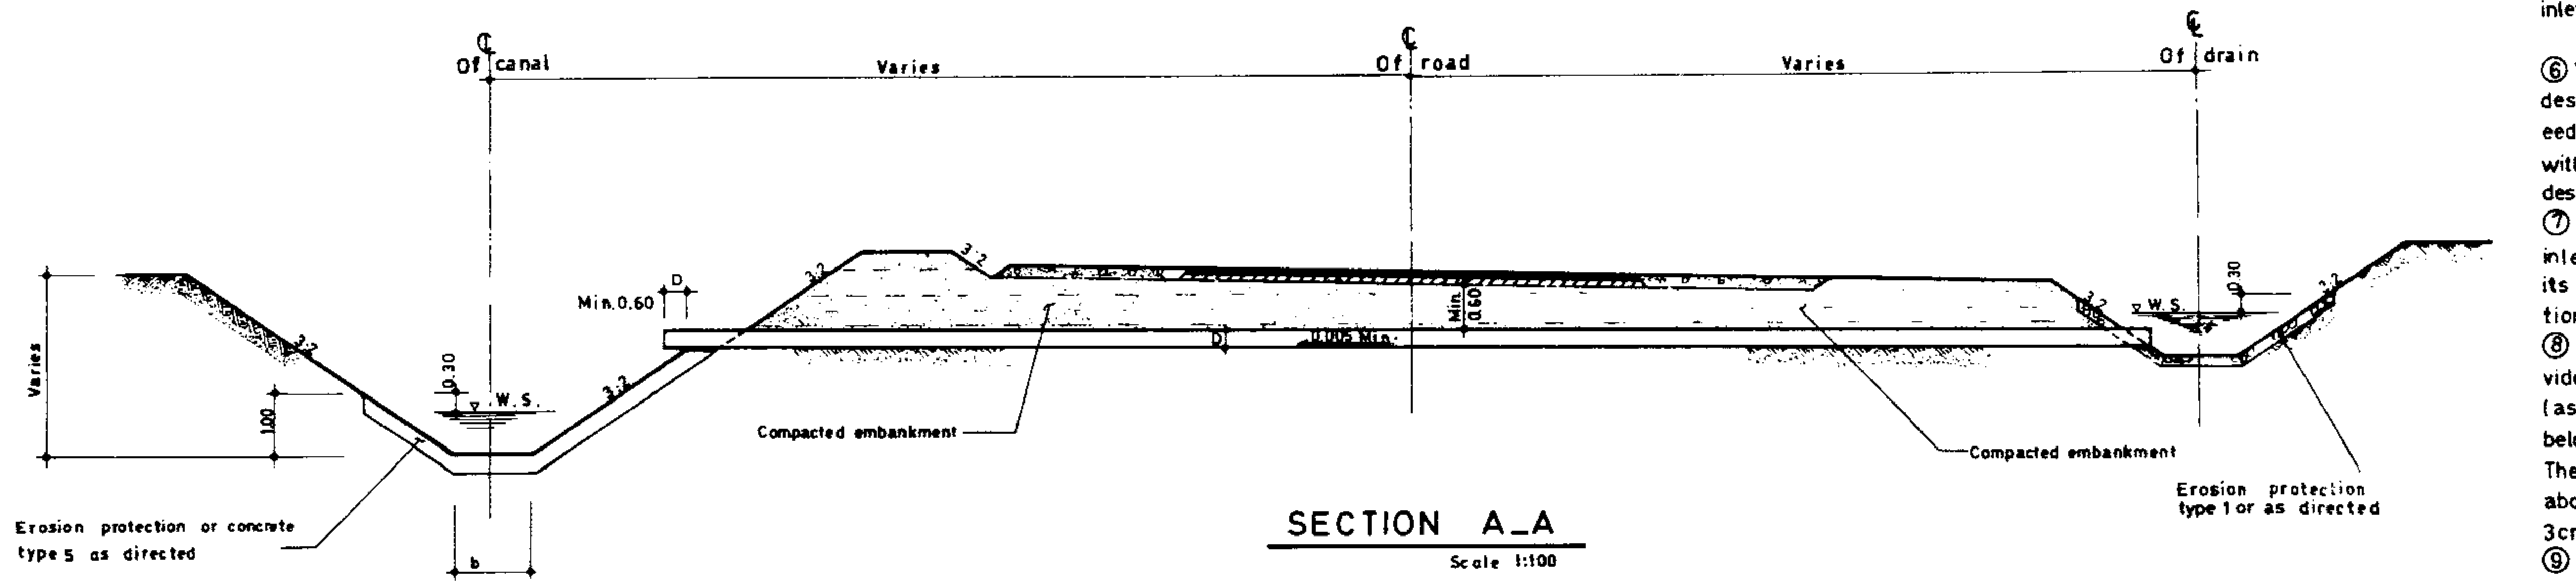

SECTION A_A Scale 1:100

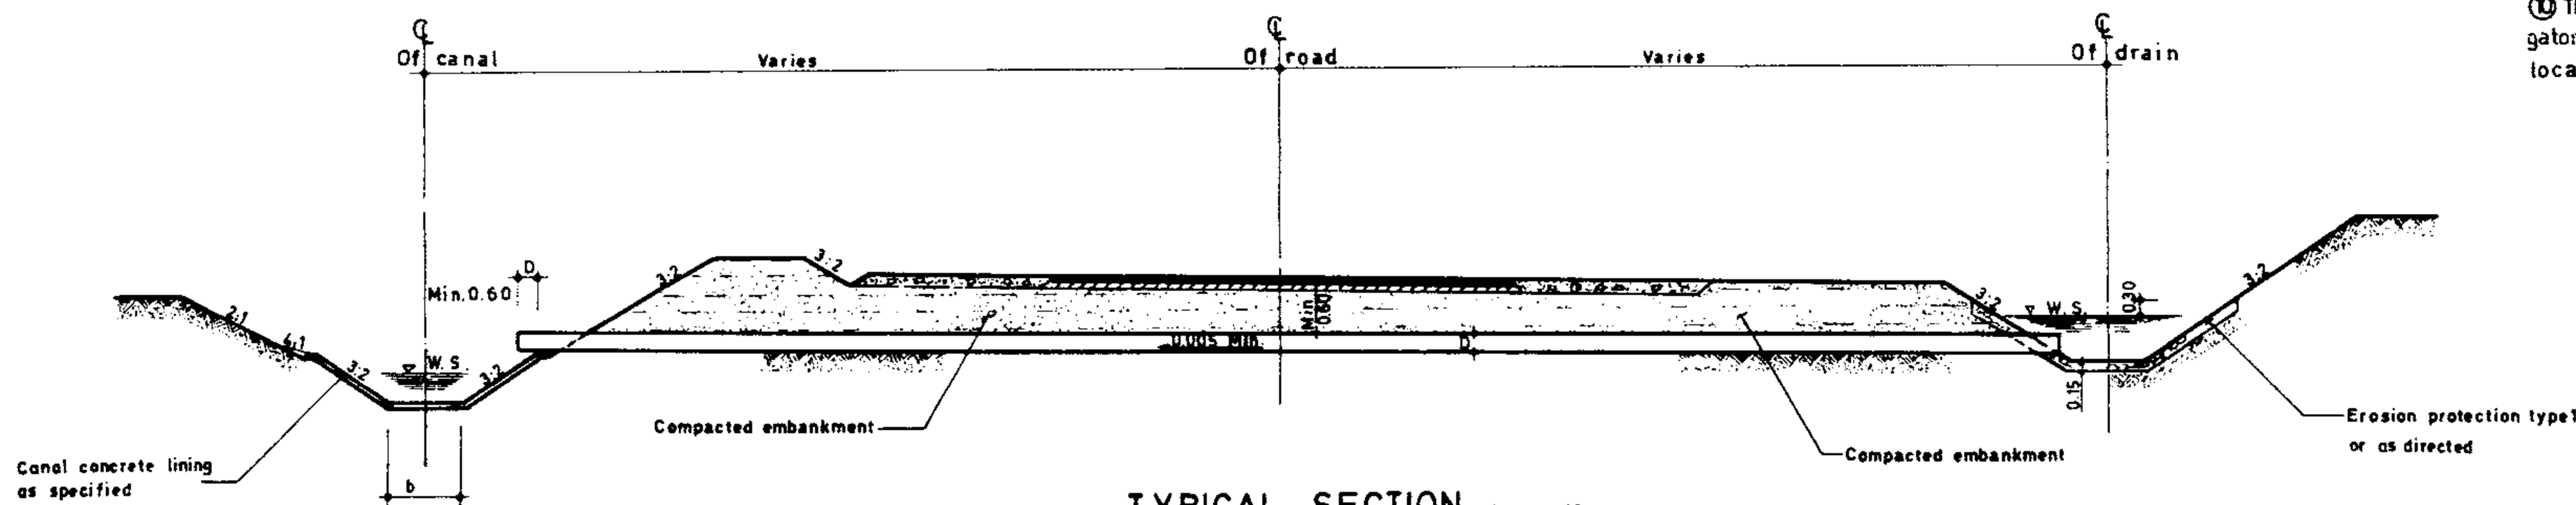

TYPICAL SECTION Scale 1:100
Drain inlet to concrete lined canal

REFERENCE DWG :
For erosion protection see dwg. N2 13/4/1/01

Scale: 1:100

Date:

Approved

DWG N^o 13/11/01

Sheet N^o 1 of 1


Rev. N^o

IRRIGATION & DRAINAGE STANDARDS


DRAIN INLETS

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU




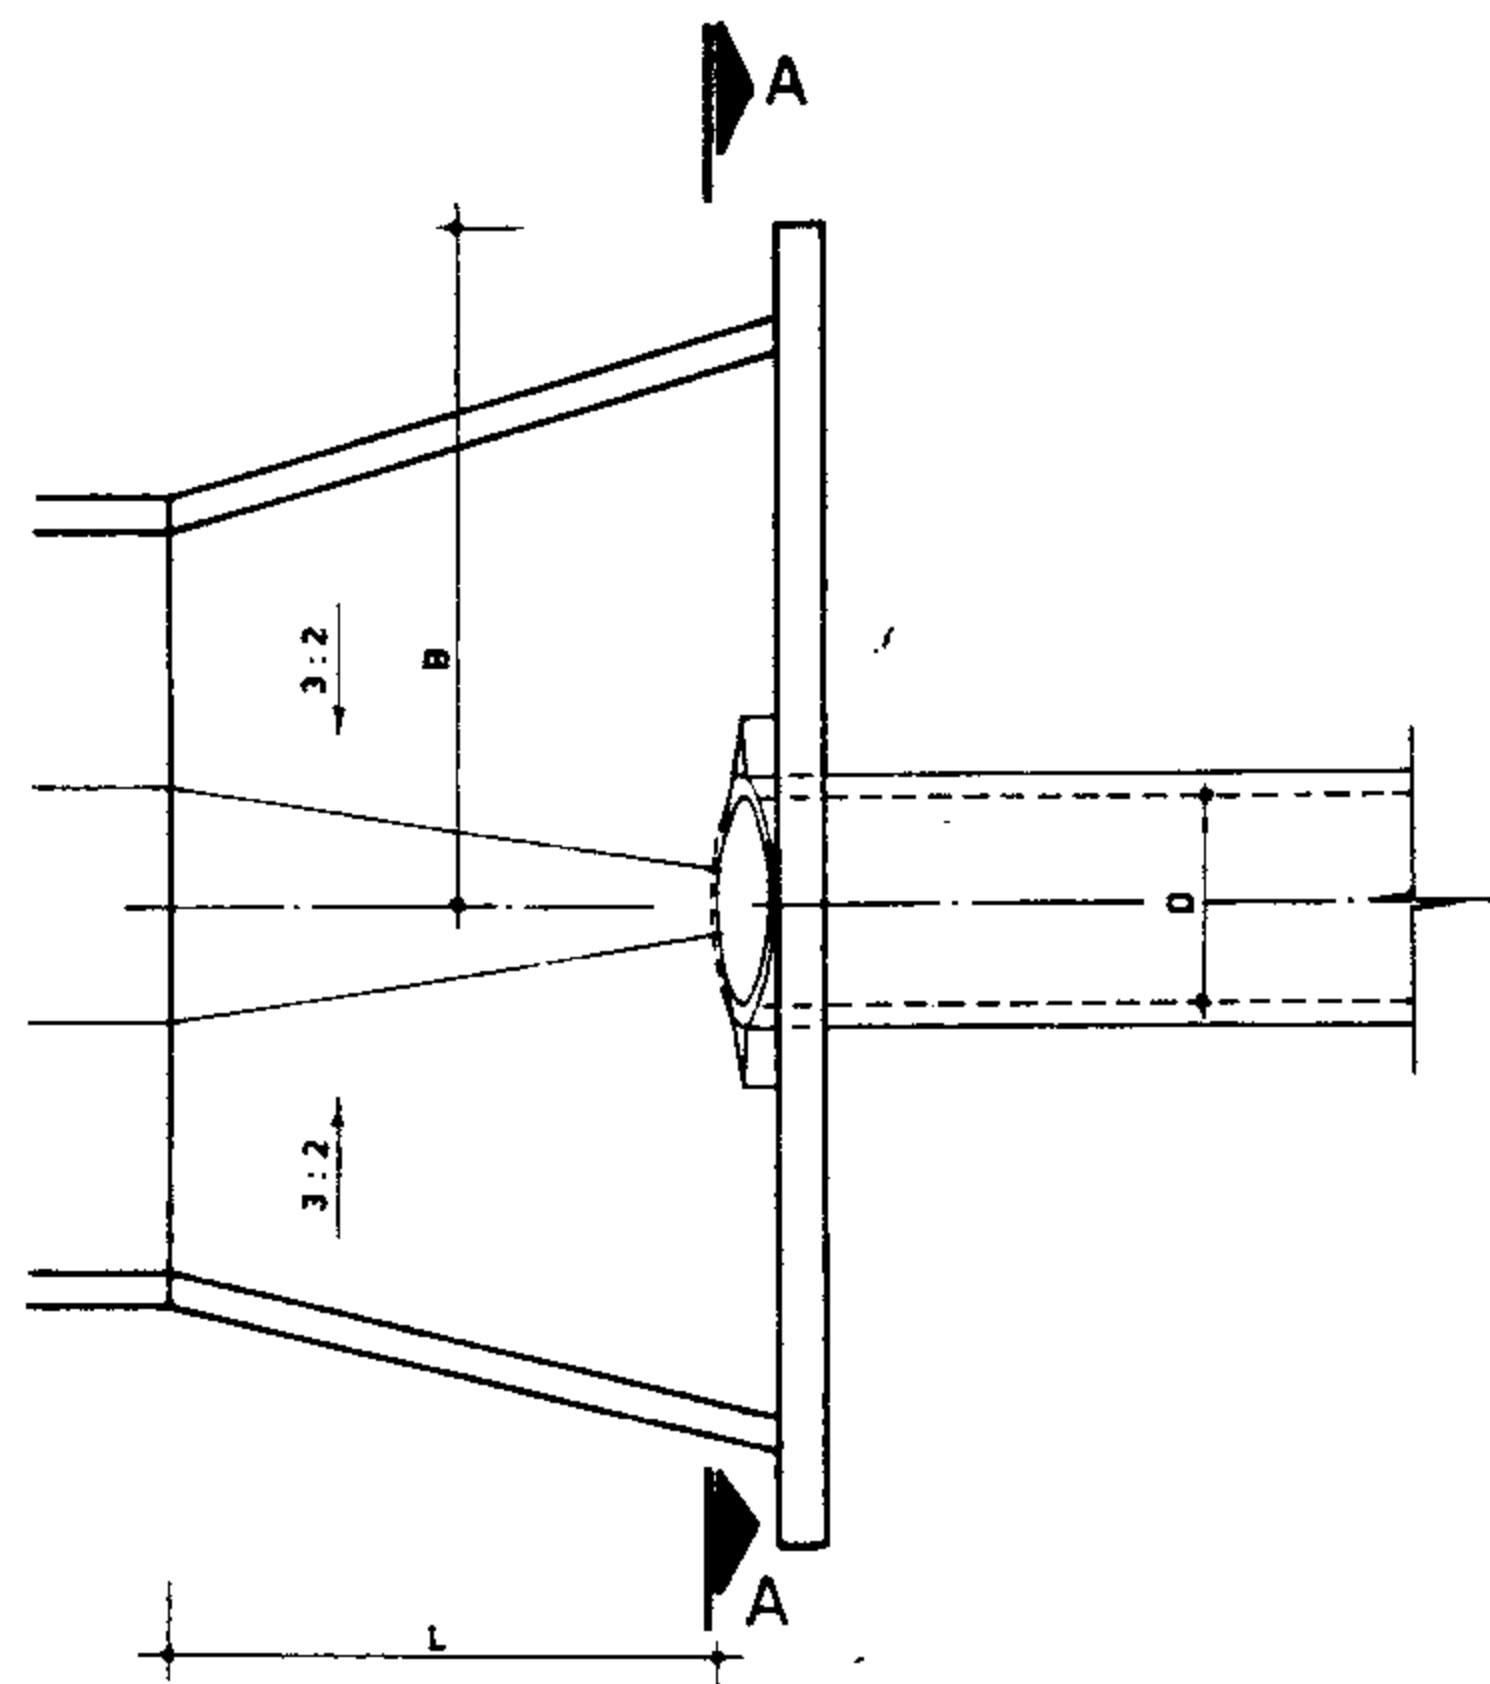


PLAN OF INLET

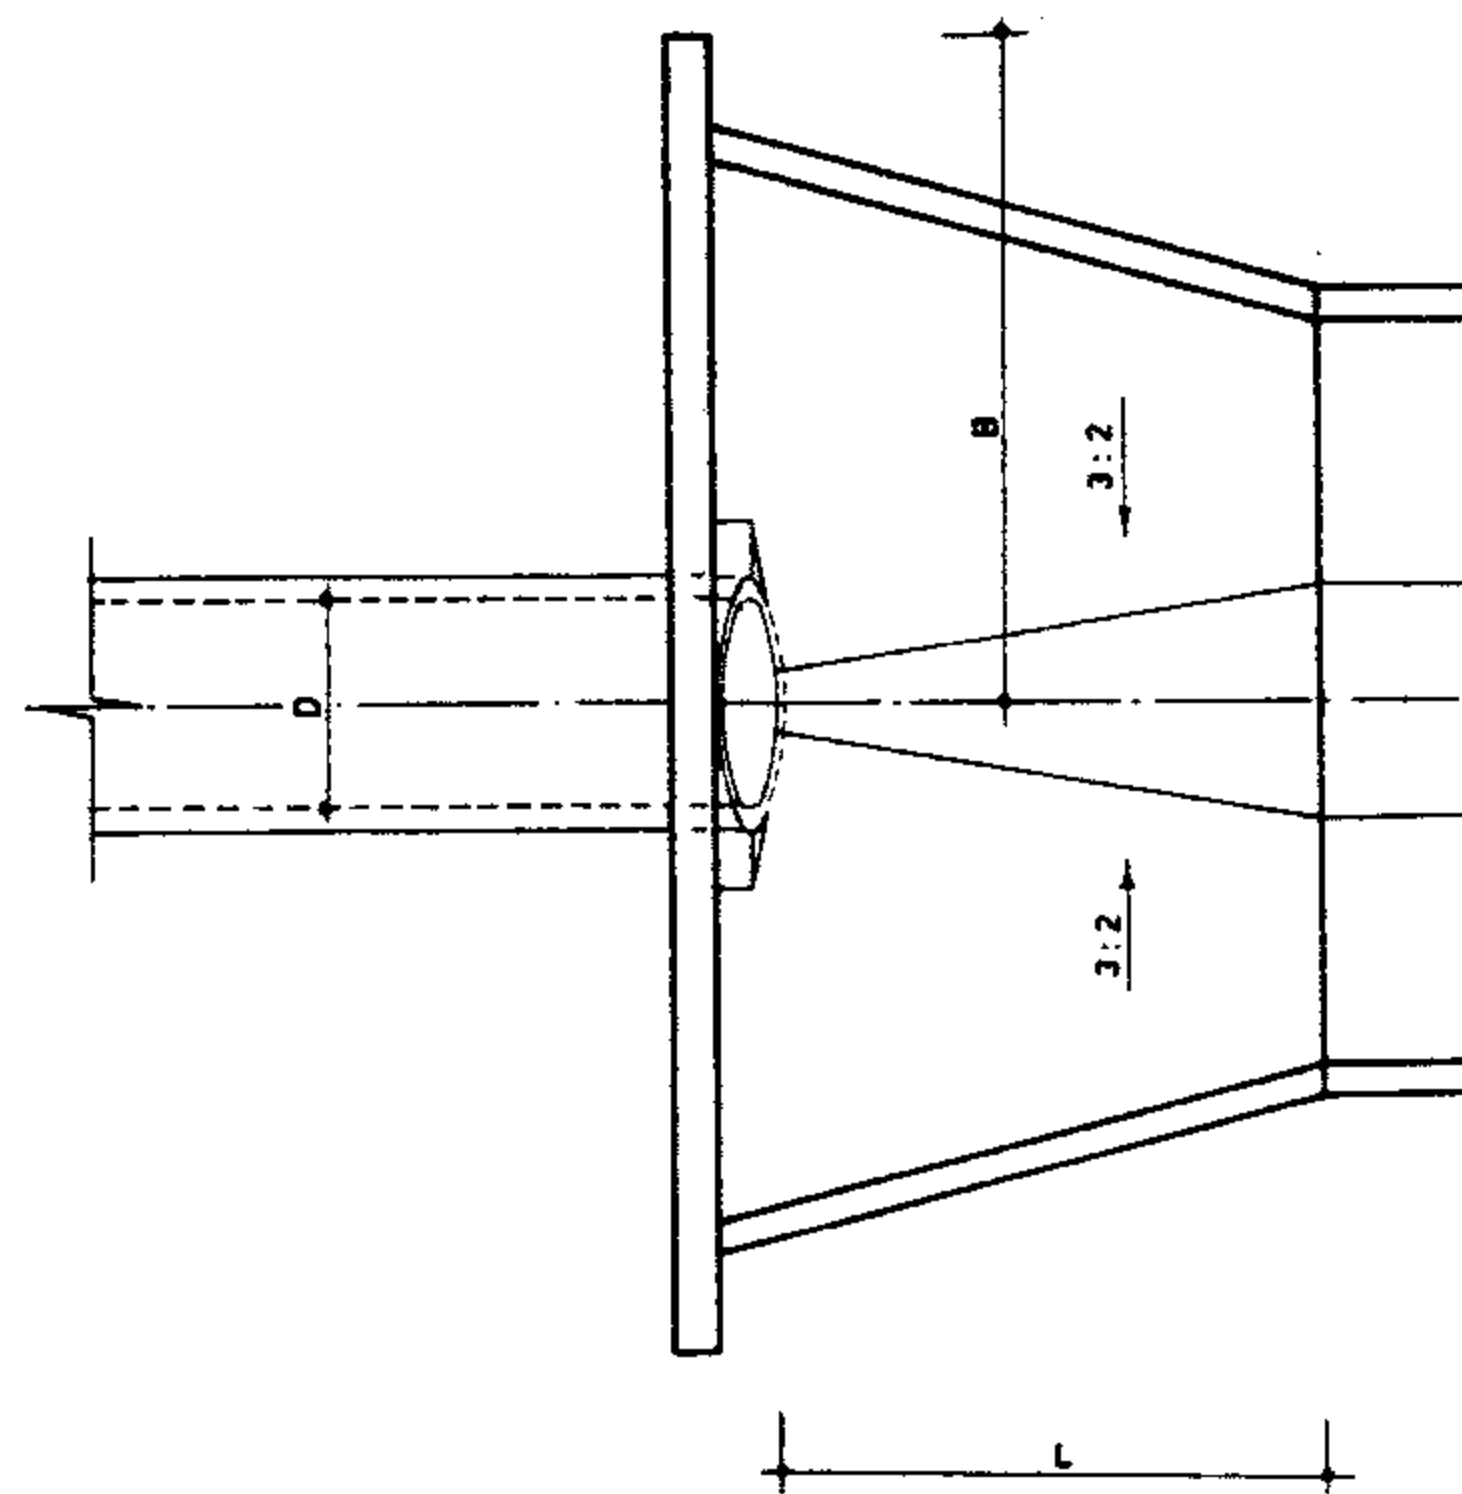


PLAN OF OUTLET

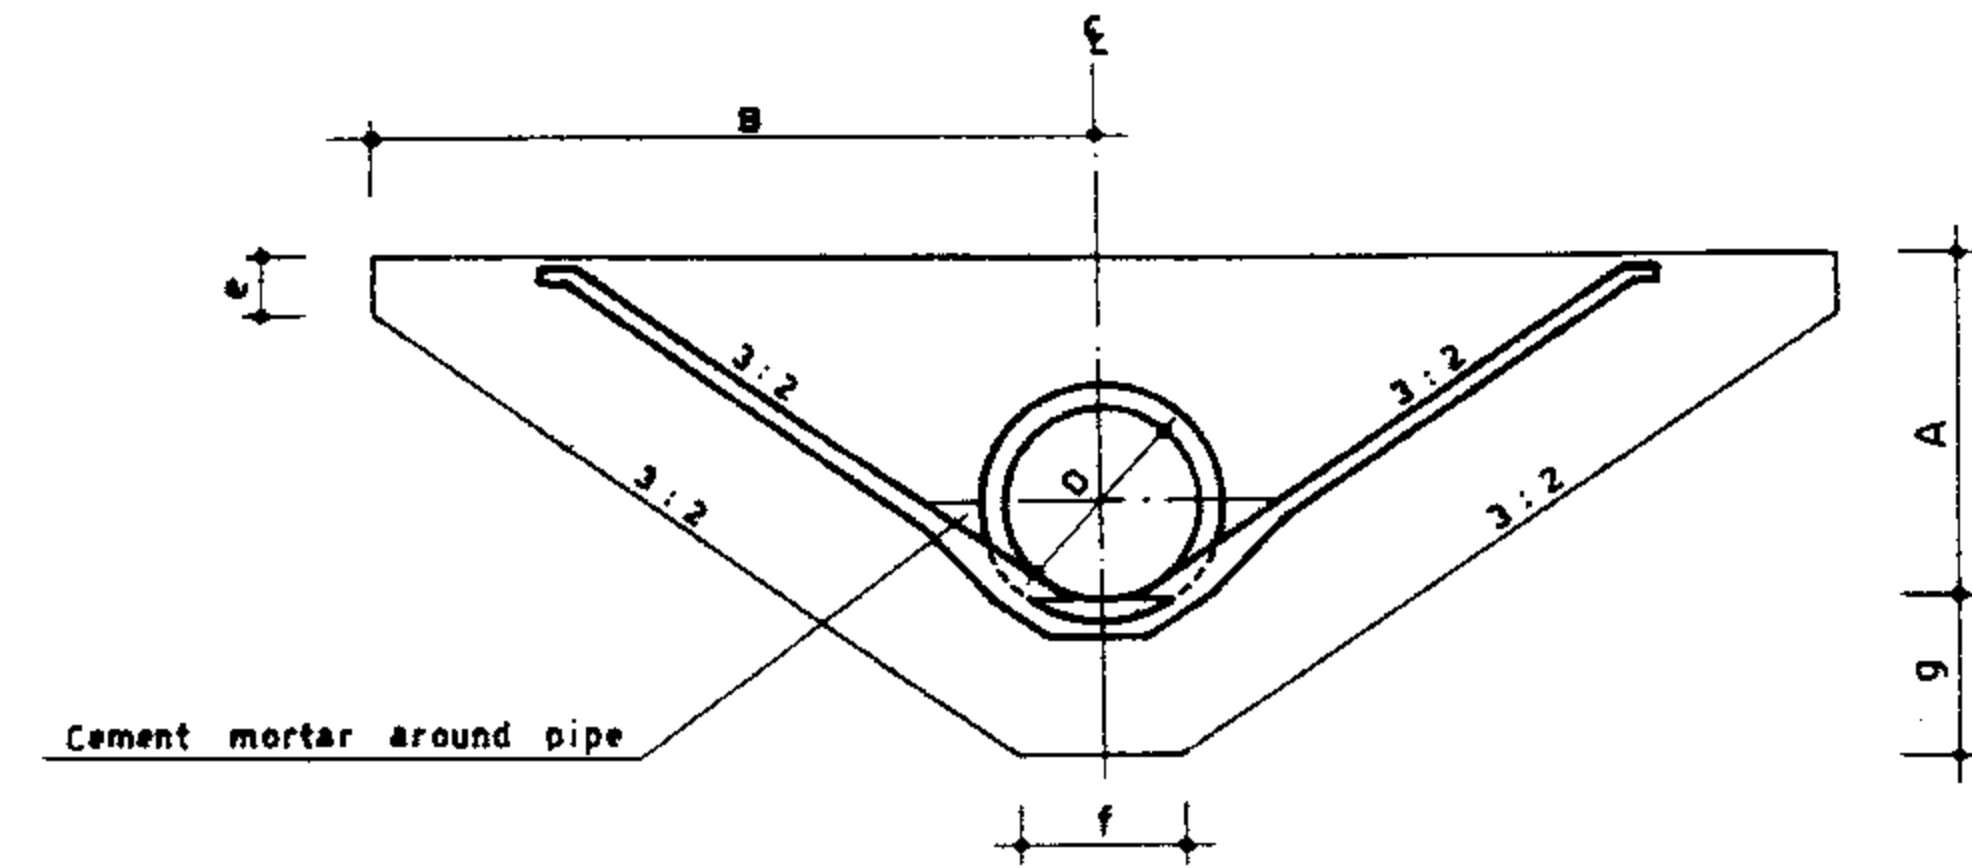

SECTION A-A

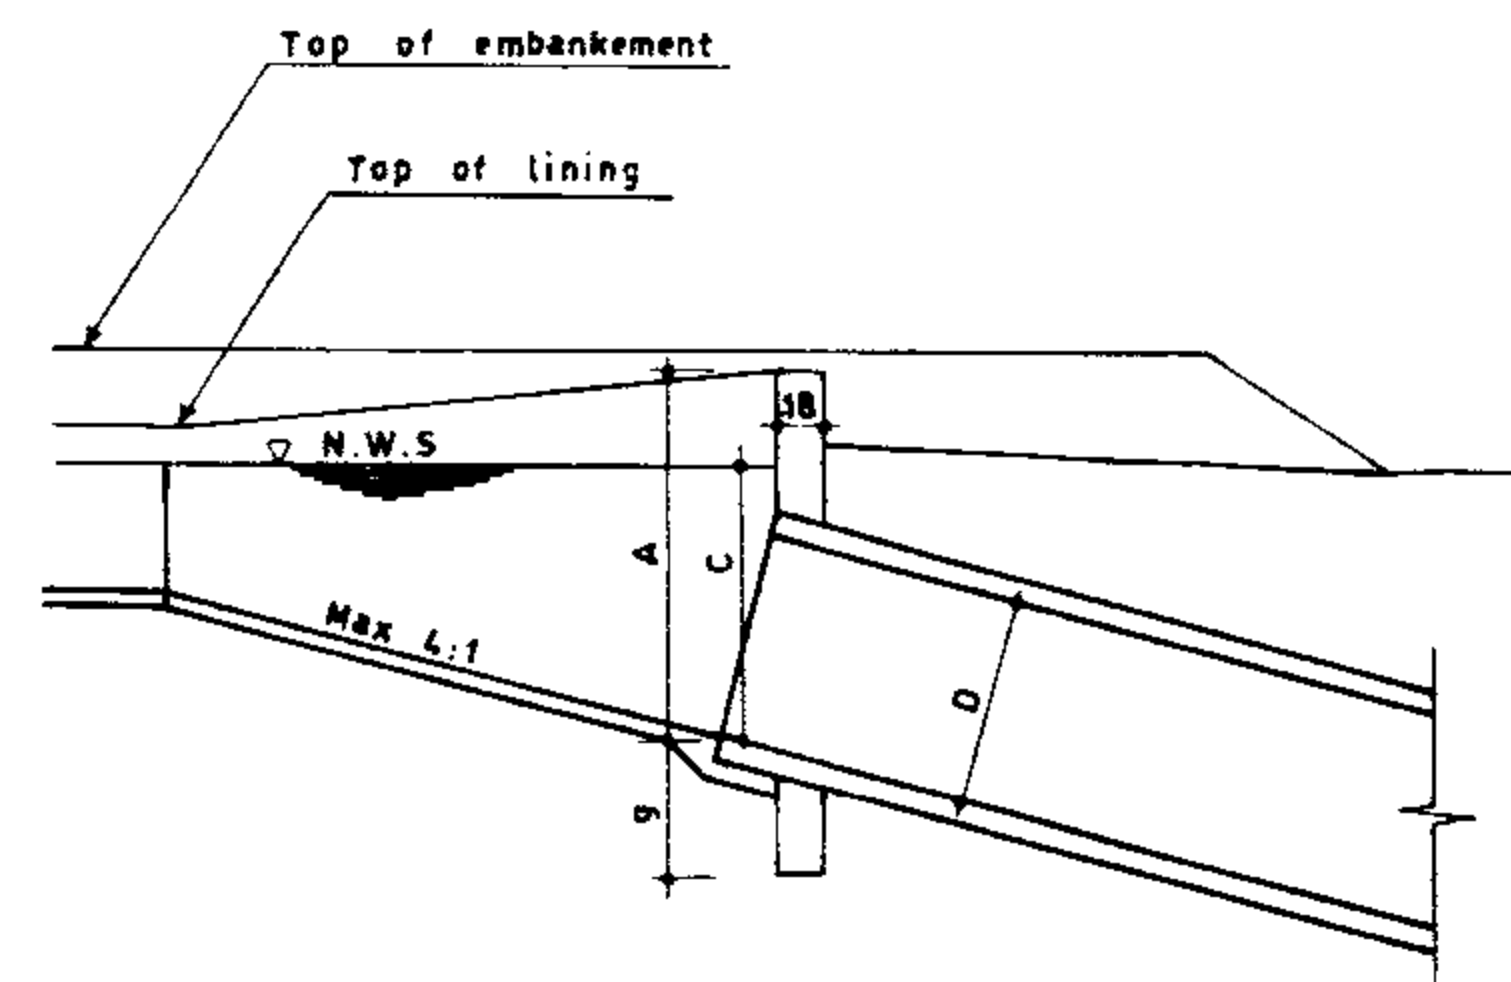

LONGITUDINAL SECTION

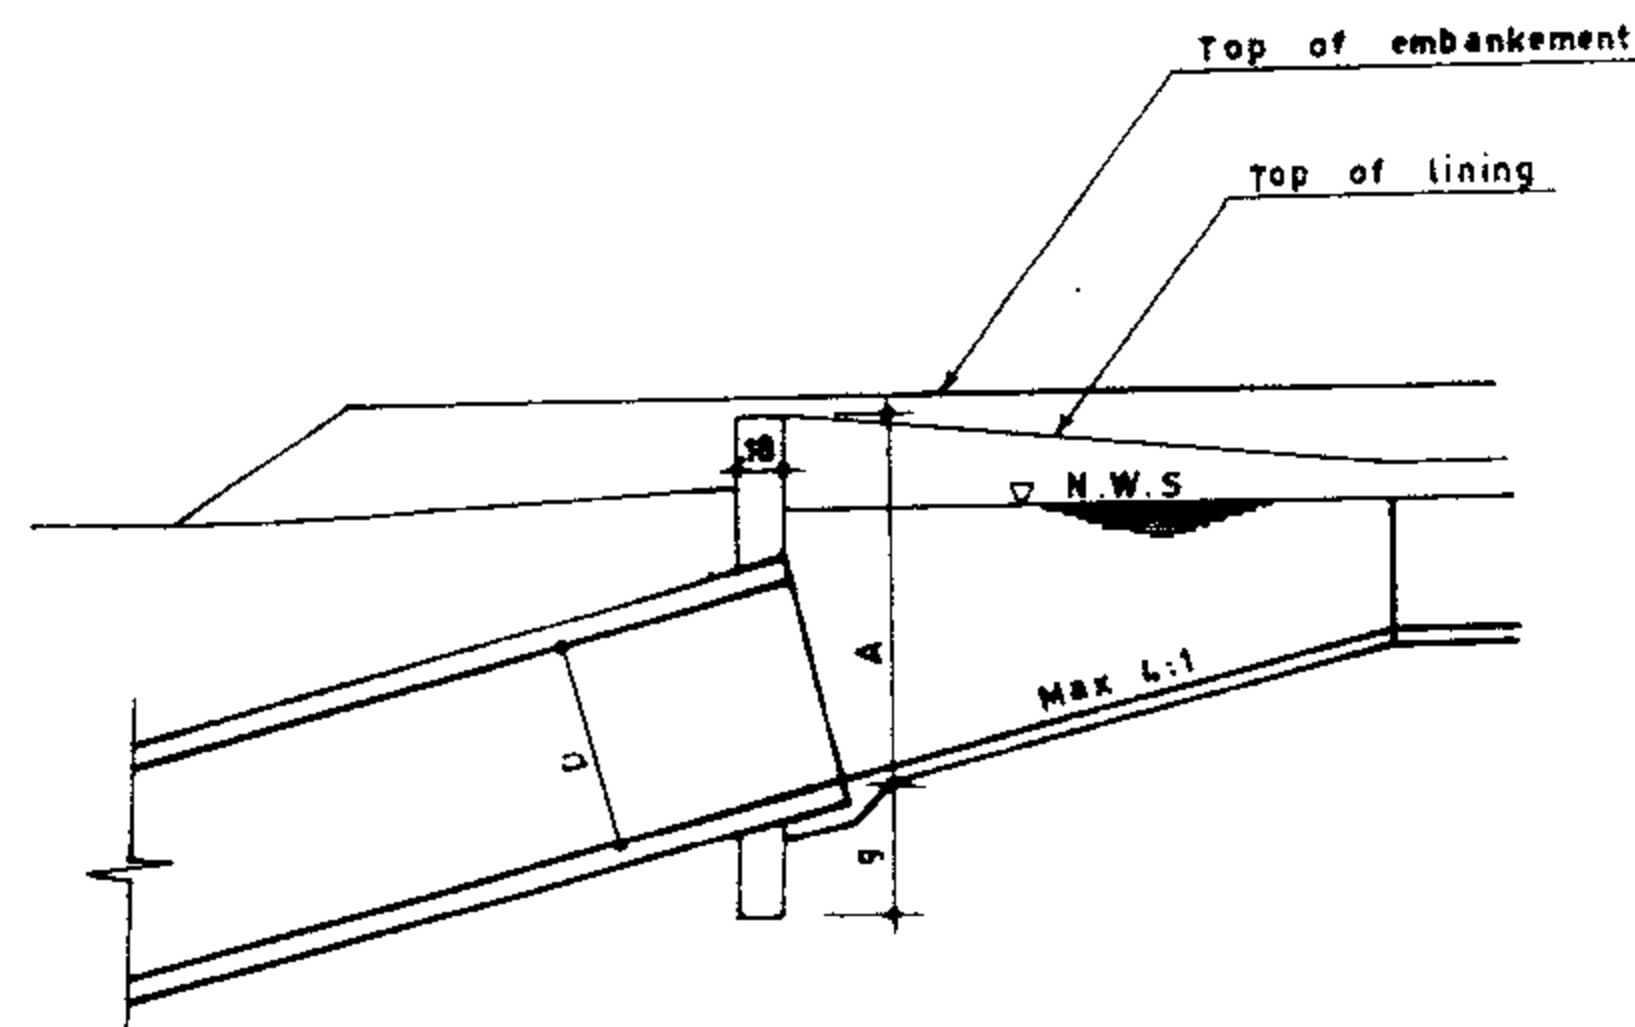

LONGITUDINAL SECTION

Dia	L	X	A	B	e	f	g	C	
								Inlet	Outlet
0.30	1.50	0.10	1.10	2.45	0.30	0.35	0.60	0.60	0.40
0.40	1.50	0.13	1.20	2.65	0.30	0.40	0.60	0.70	0.55
0.45	1.50	0.15	1.25	2.75	0.30	0.425	0.60	0.75	0.60
0.50	1.60	0.17	1.30	2.85	0.30	0.45	0.60	0.80	0.70
0.60	1.80	0.17	1.40	3.05	0.30	0.50	0.60	0.90	0.80
0.70	2.10	0.20	1.50	3.25	0.50	0.55	0.80	1.00	0.95
0.80	2.40	0.24	1.60	3.45	0.50	0.60	0.80	1.10	1.10
0.90	2.70	0.27	1.70	3.65	0.50	0.65	0.80	1.20	1.20
1.00	3.00	0.30	1.80	3.85	0.50	0.70	0.80	1.30	1.30

REFERENCE DWG:

Scale: N.T.S

IRRIGATION DRAINAGE STANDARDS

Date:

DWG N^o 13/10/1/01

CONCRETE TRANSITION (TYPE 5)


Approved:

Sheet N^o 1 of 1


Rev. N^o:

PLAN & SECTION

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDJE
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

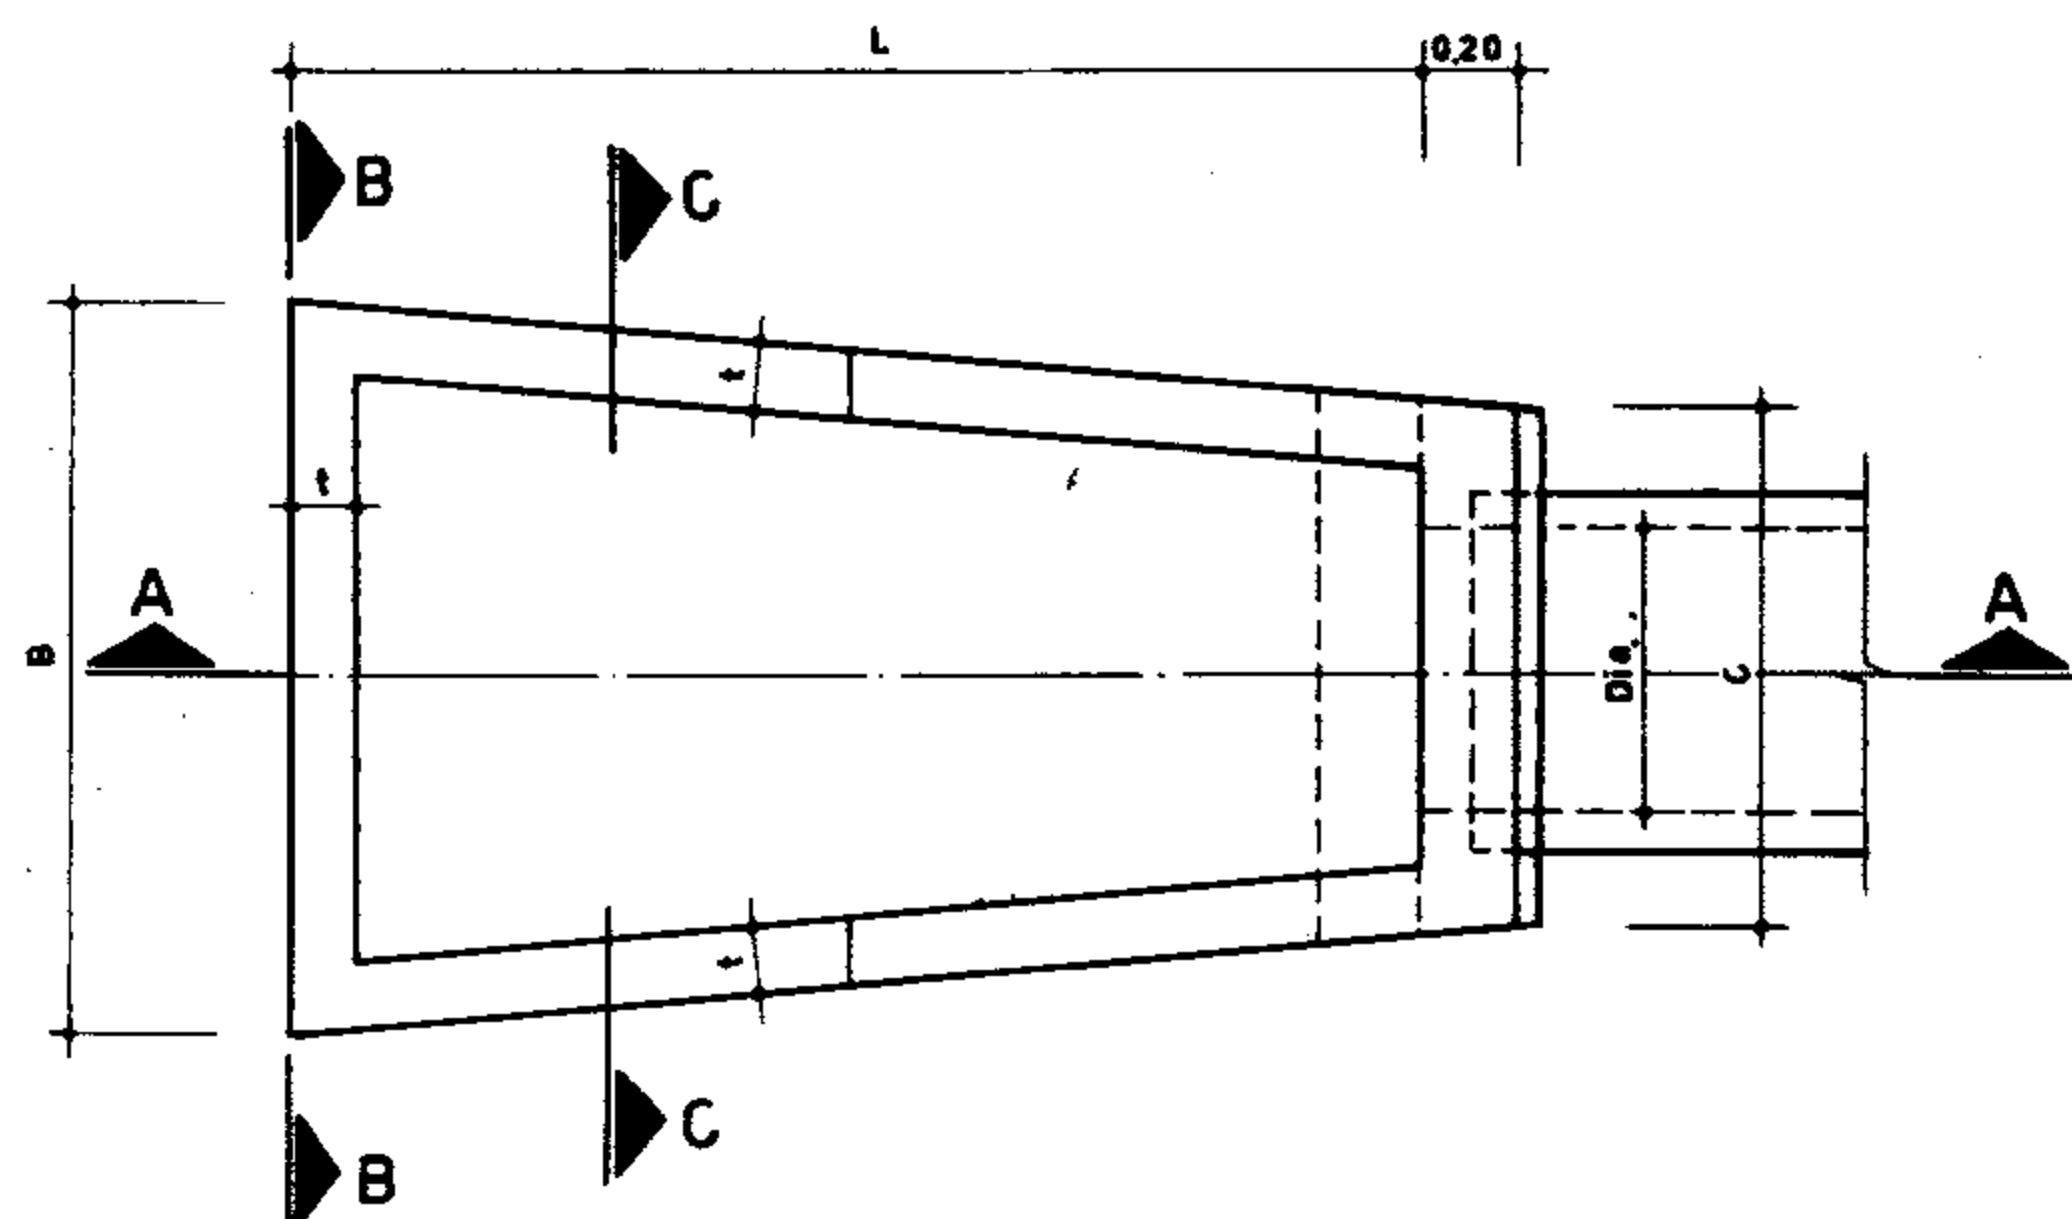


PLAN
Sloped type 4 Scale 1:25

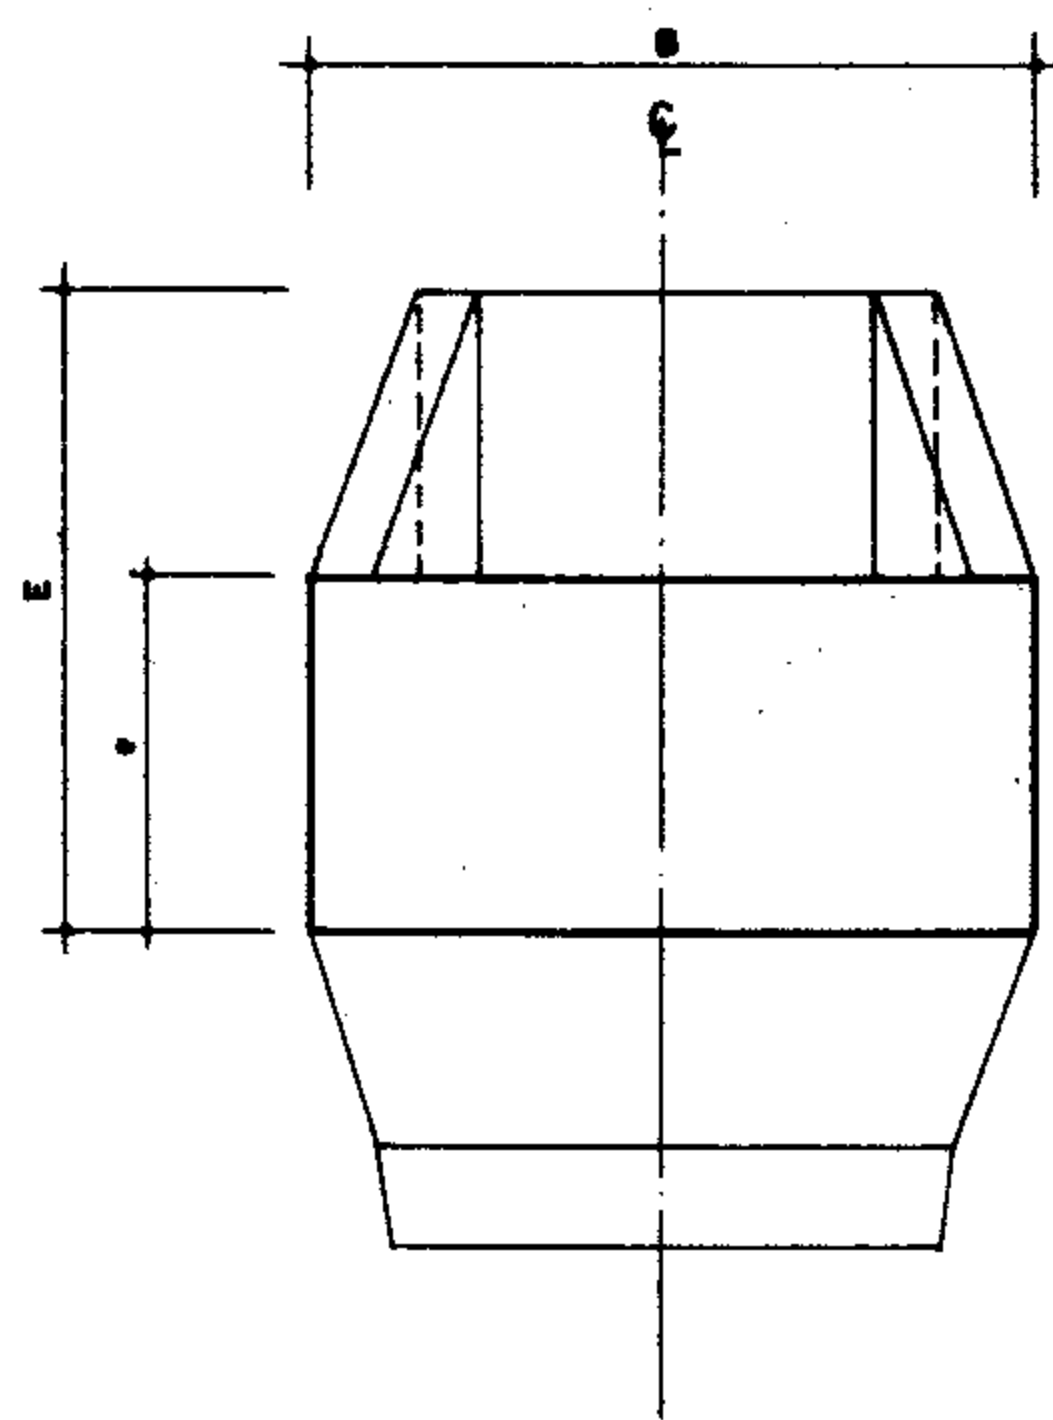


SECTION B-B
Scale 1:25

DIMENSION TABLE

Dia.	B	C	E	L	S	T	e	t	R/Bar. Kg.	Conc. m ³	Form m ²
0.60	1.55	1.10	1.20	2.40	0.10	0.15	0.60	0.15	158.78	1.95	15.19
0.70	1.80	1.20	1.30	2.60	0.15	0.20	0.60	0.15	192.96	2.29	18.09
0.80	2.00	1.35	1.40	2.80	0.15	0.20	0.60	0.15	218.80	2.80	20.68
0.90	2.30	1.45	1.50	3.00	0.20	0.20	0.60	0.15	251.23	3.04	23.73
1.00	2.75	1.55	1.60	3.20	0.20	0.20	0.75	0.15	292.93	4.00	28.21
1.20	3.25	1.80	1.80	3.60	0.20	0.20	0.75	0.18	356.60	5.10	34.61
1.40	3.80	2.05	2.00	4.00	0.20	0.20	0.75	0.18	436.96	6.29	41.89

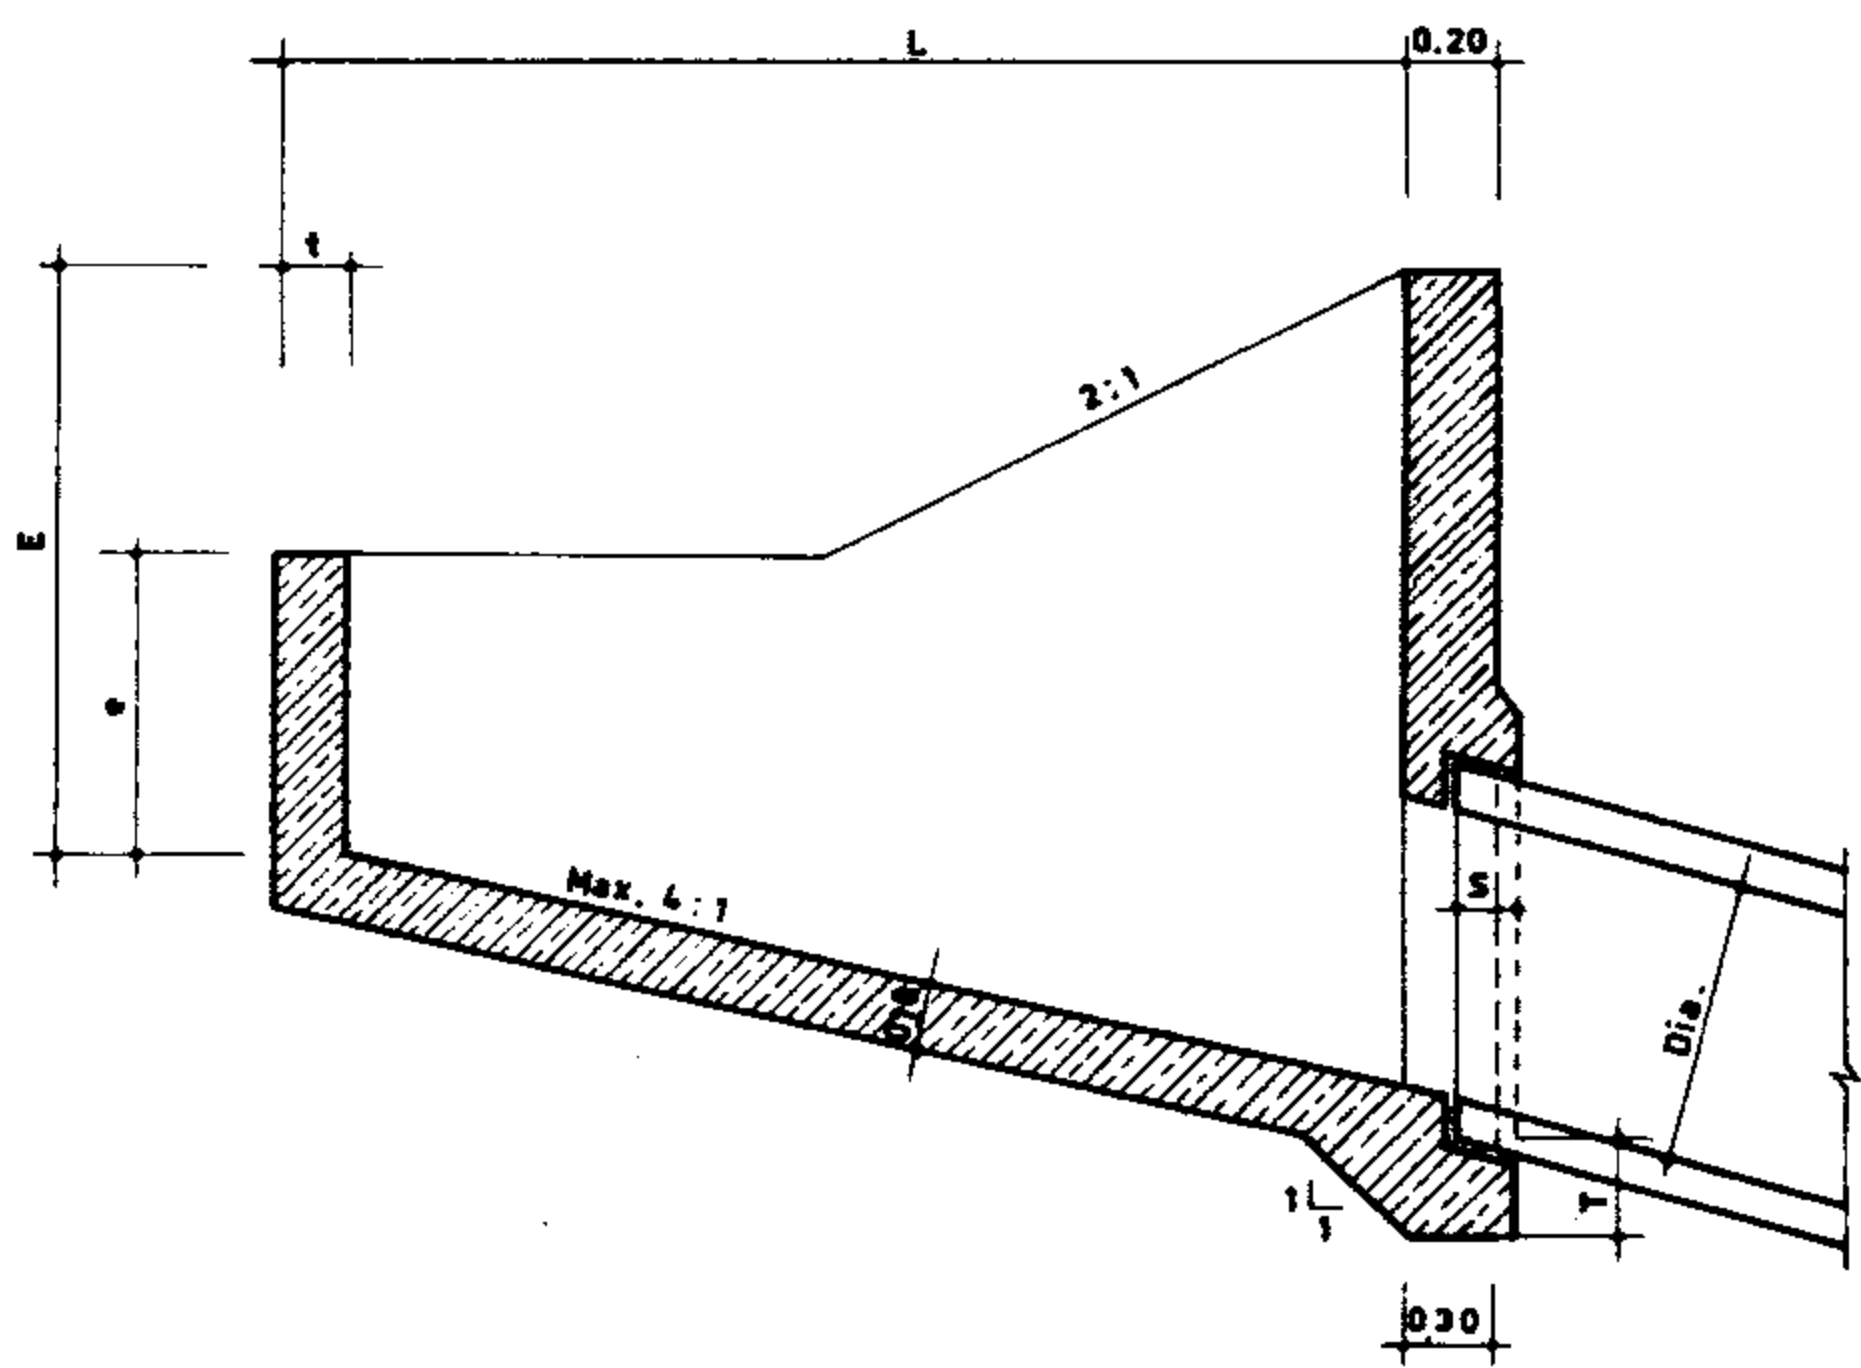

SECTION A-A
Sloped type 4 Scale 1:25

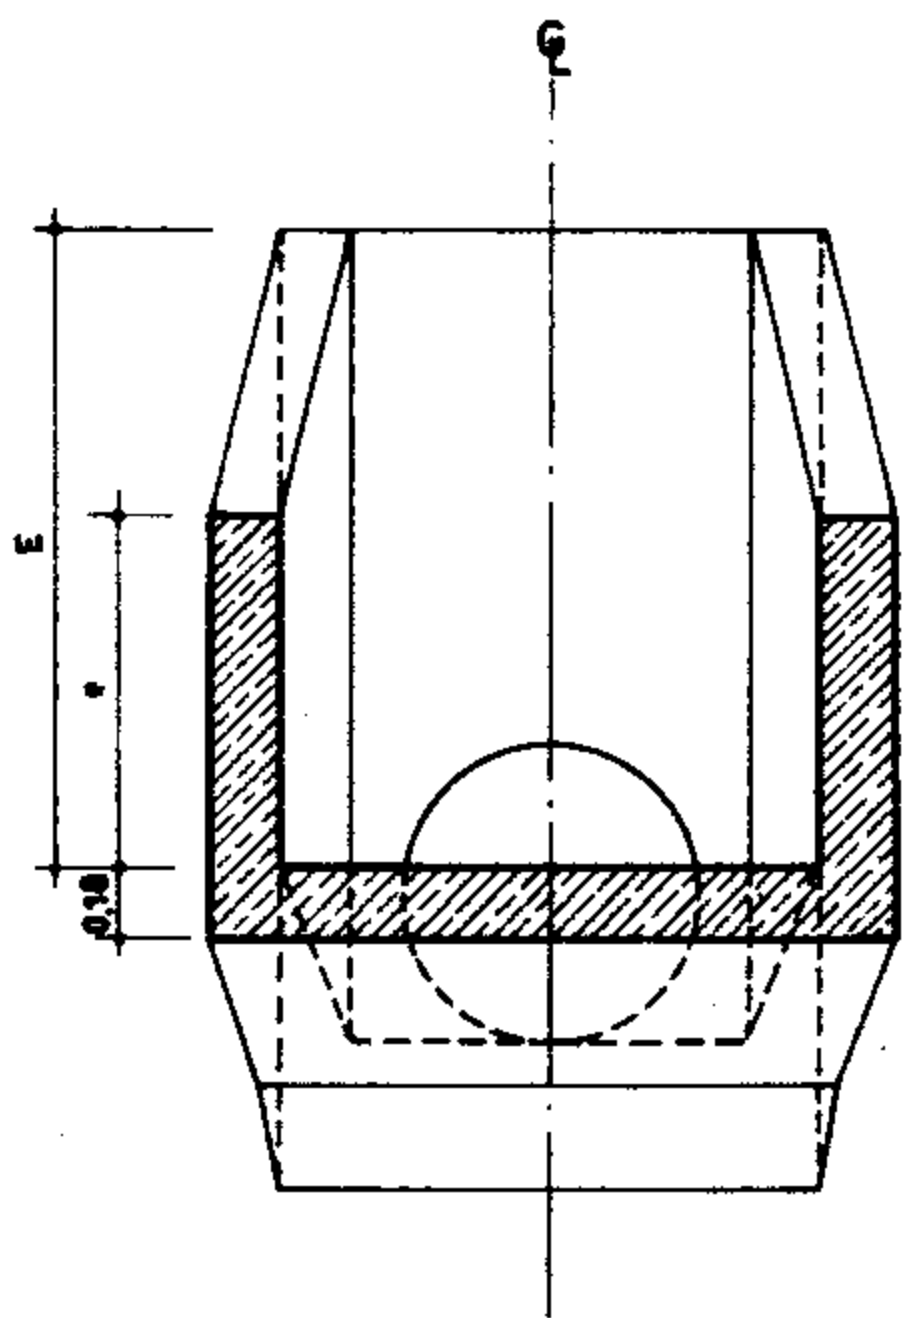

SECTION C-C
Scale 1:25


NOTES

- ① Dimensions in the table are for the pipe diameters sized for a full pipe flow velocity of 3.5 m/s with a free flow pipe inlet.
- ② The dimension provide control at inlet headwalls for design capacity and free flow pipe.
- ③ To prevent degradation at the inlet the top of the inlet wall is placed at or near existing ground surface.
- ④ A maximum full pipe flow velocity of 3.5 m/s is permitted for cross drainage culvert structures having baffled outlets or stilling pools.


RÉFERENCE DWGS: For general notes see dwgs. No 20/2/1/01 to 20/2/1/03
 For reinforcement see dwg. No 13/9/3/01
 For detail of pipe connection to structure see dwgs. No 17/1/1/01 to 17/1/1/03

Scale: 1:25	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG No 13/9/1/01	CONCRETE TRANSITION (TYPE 4) PLAN & SECTION
Approved:	Sheet No 1 of 3 Rev. No	


ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

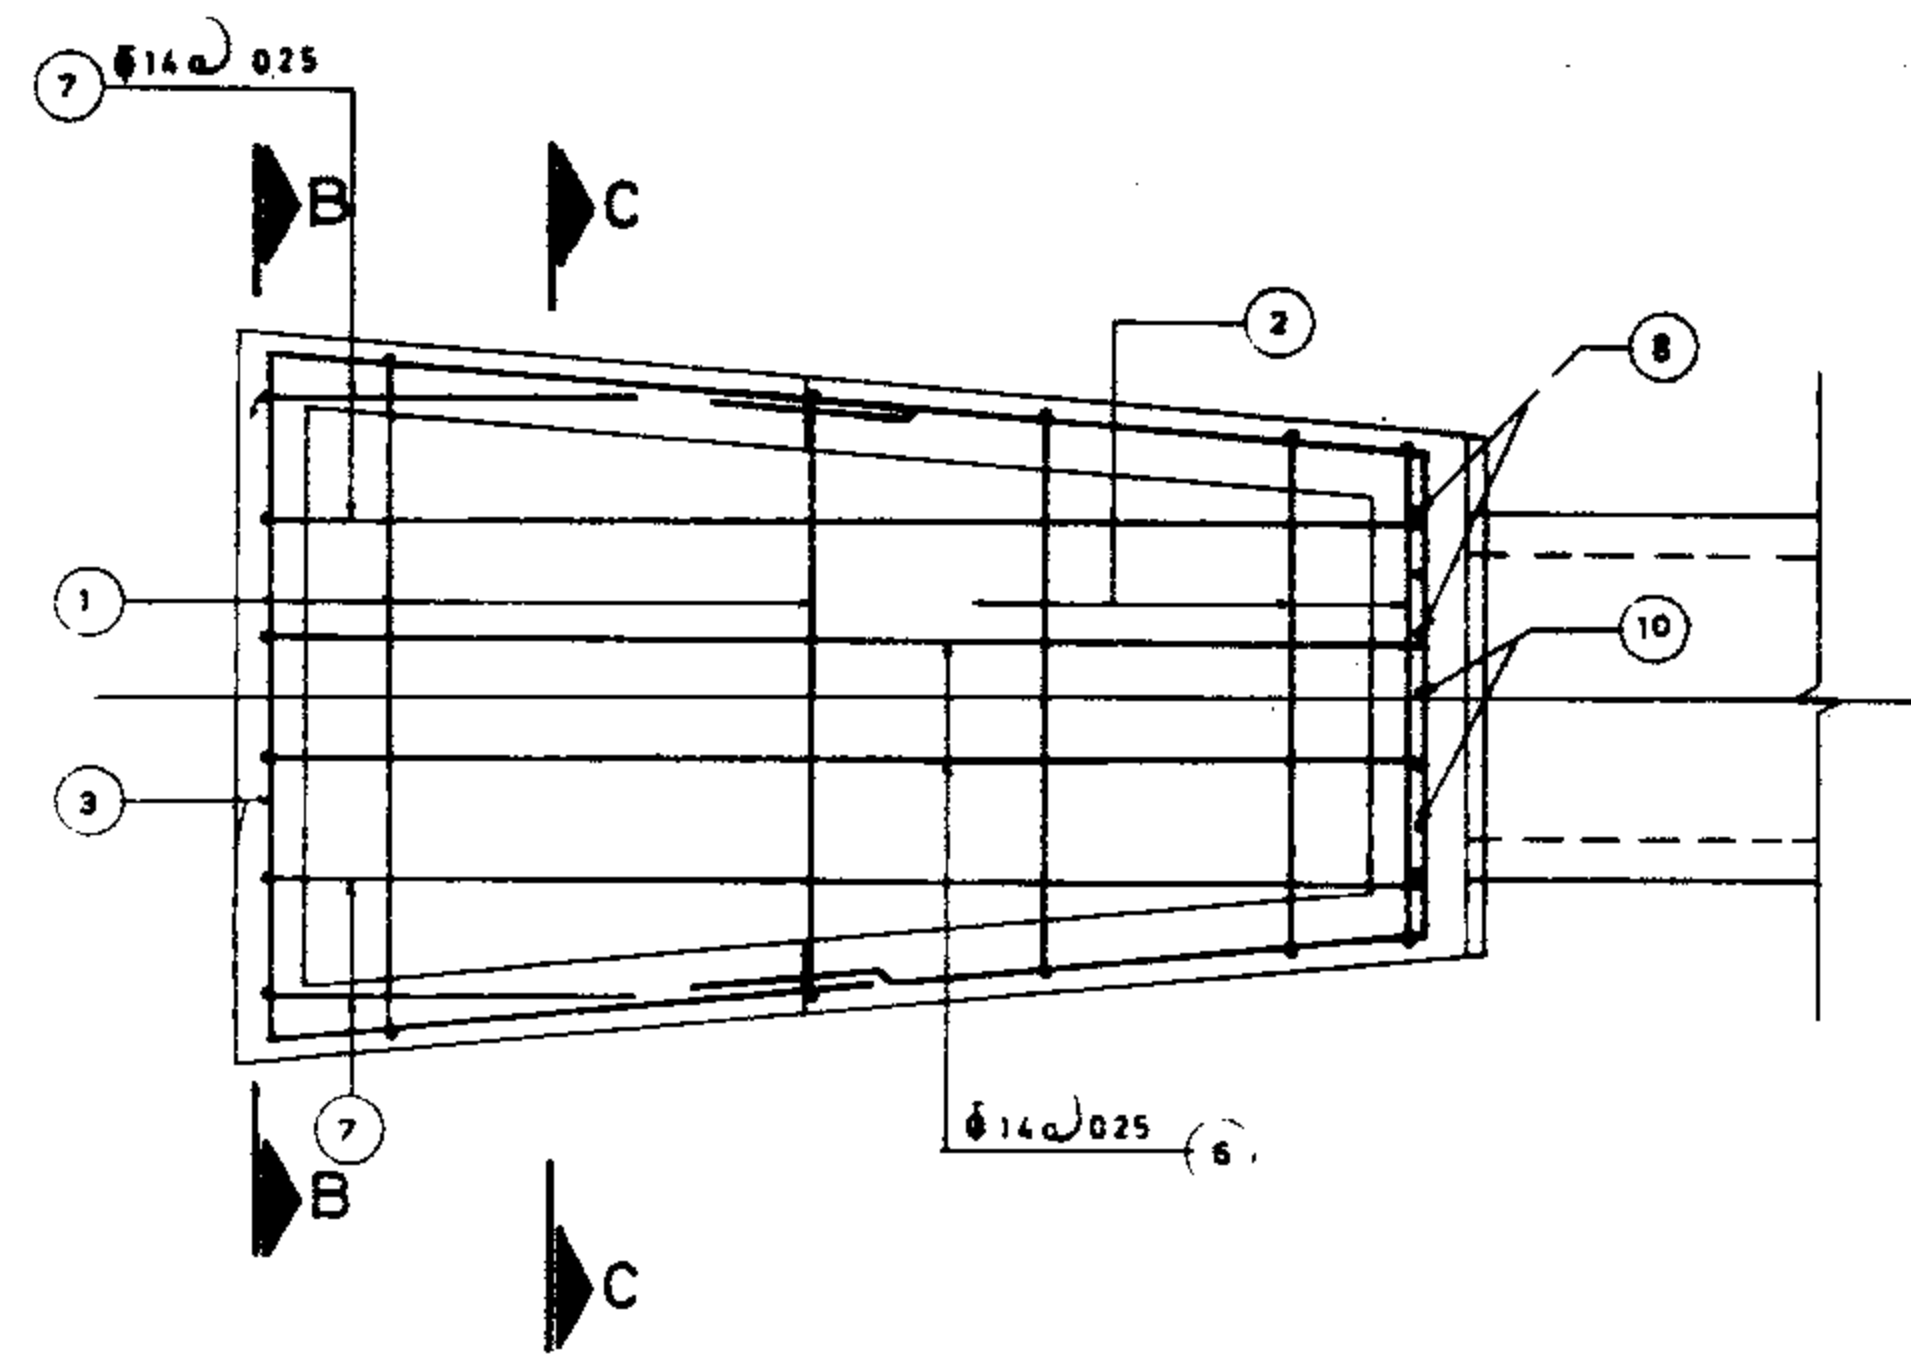


PLAN
Scale 1:25

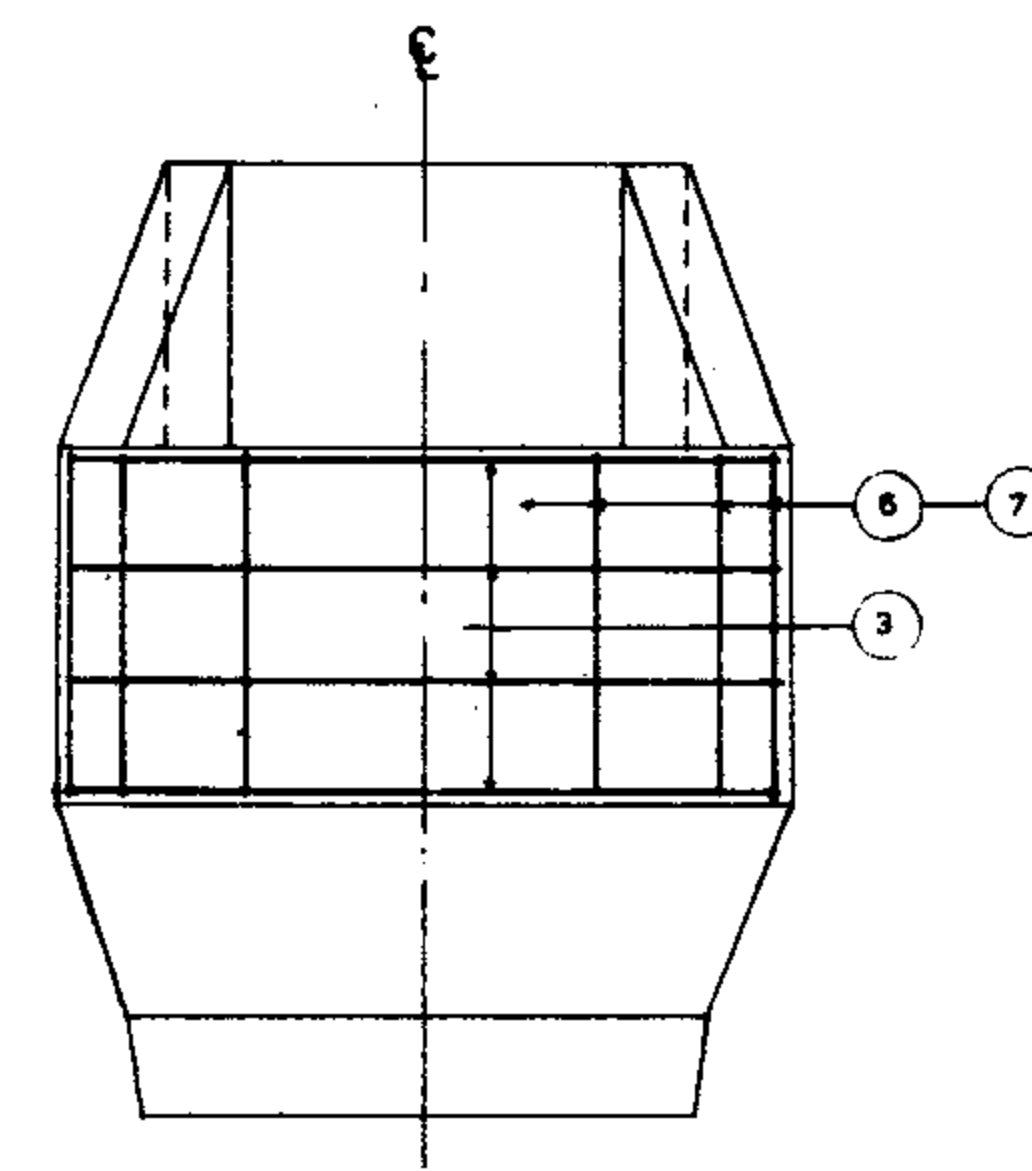

SECTION B-B
Scale 1:25

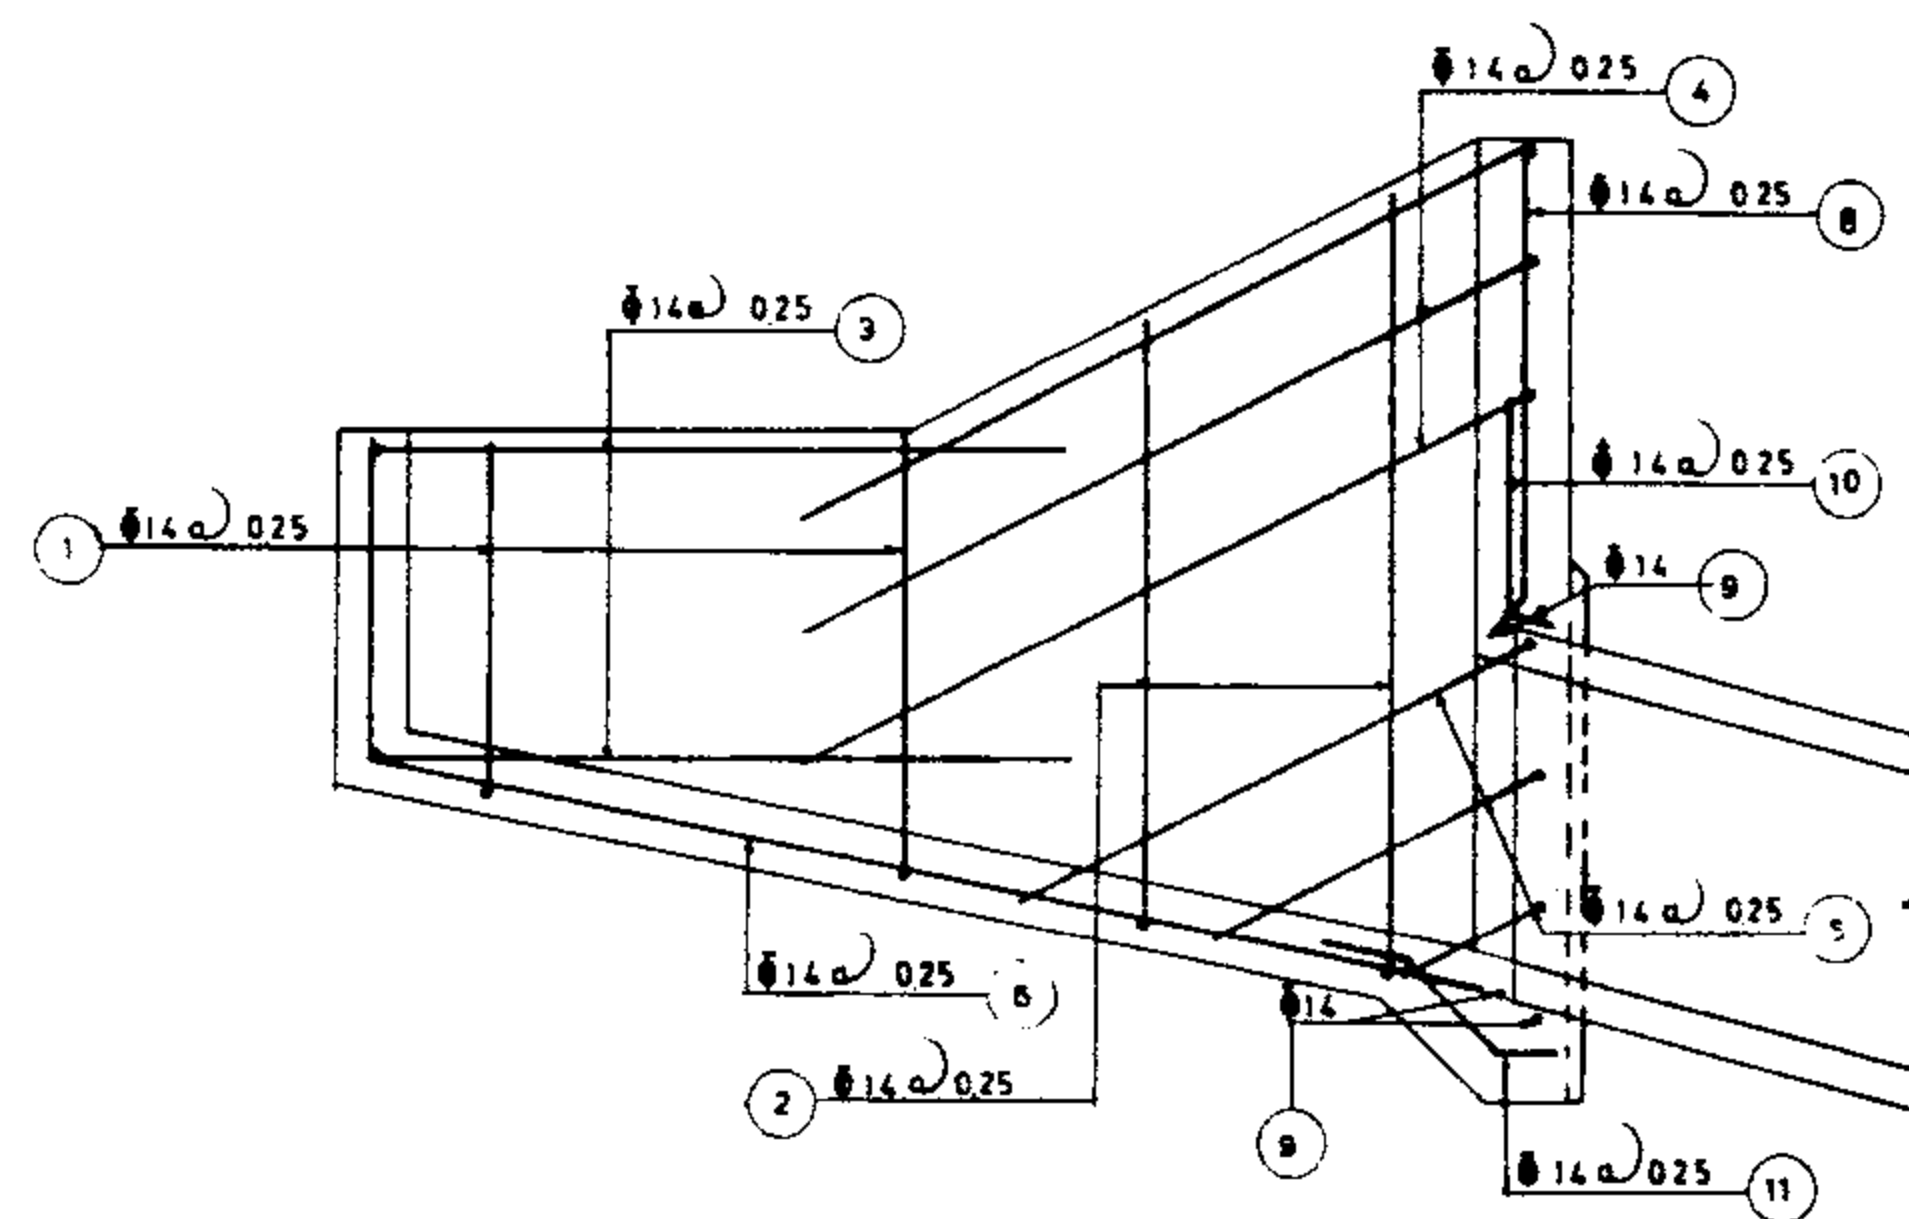

SECTION A-A
Scale 1:25

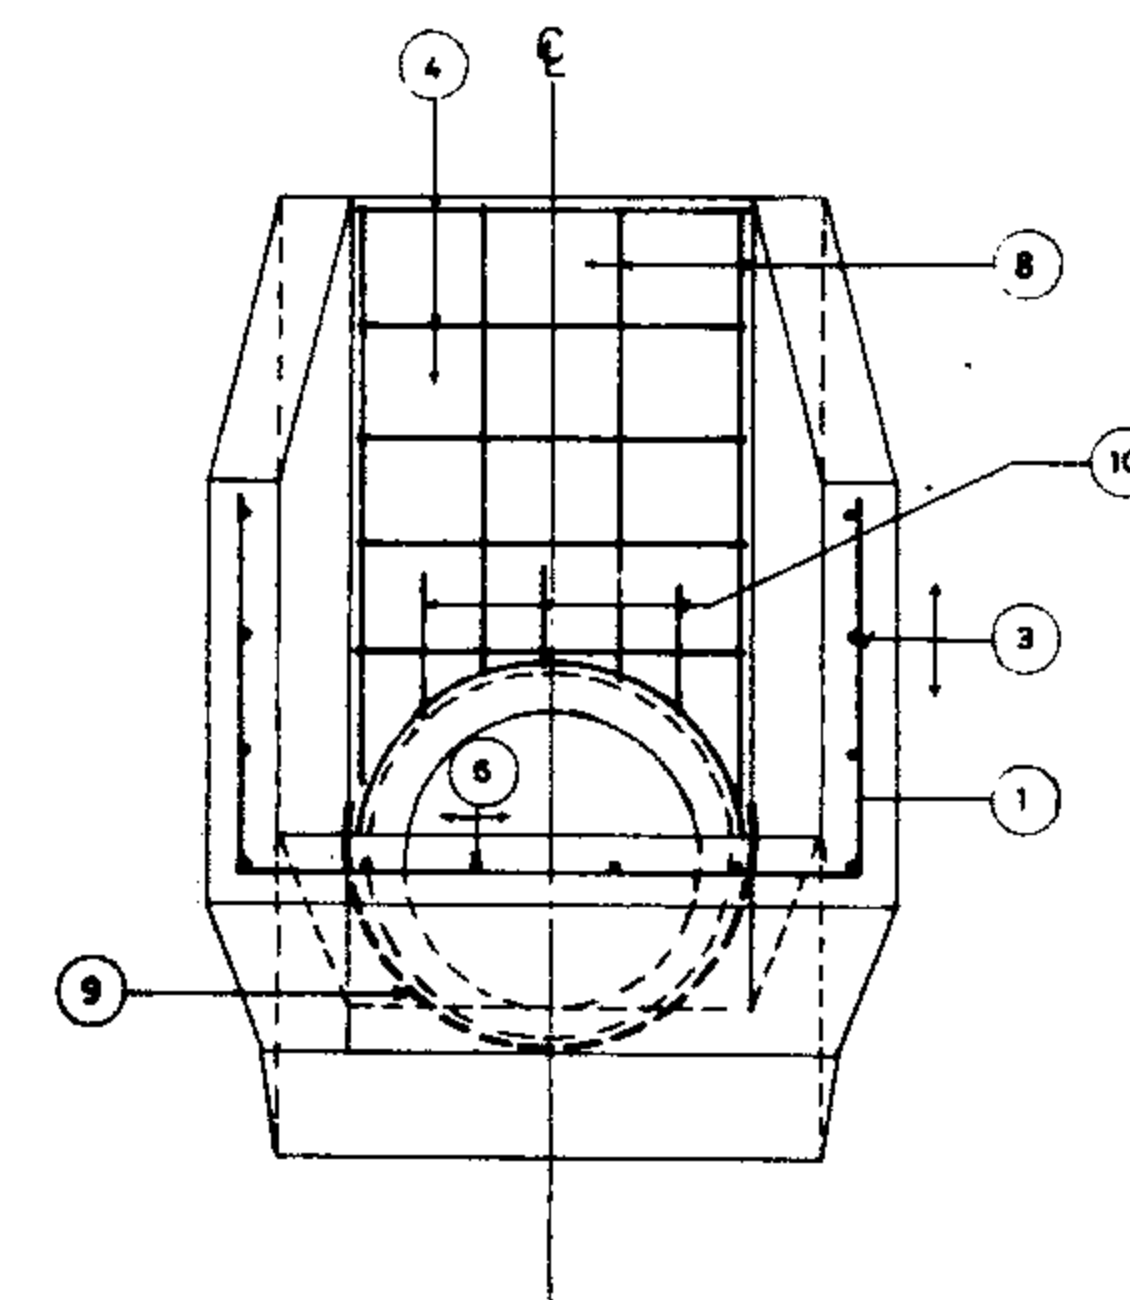

SECTION C-C
Scale 1:25

REFERENCE DWGS: For Plan & Section see dwg. N° 13/9/1,01
For list reinforcement see dwg. N° 13/9/3,02

Scale: 1:25

Date:

Approved:

IRRIGATION & DRAINAGE STANDARDS

DWG. N° 13/9/3,01

Sheet N° 2 of 3

Rev. N°

**CONCRETE TRANSITION (TYPE 4)
REINFORCEMENT
PLAN & SECTION**

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

Dia 060

POS	No.	FORM	UNIT LENG.	TOTAL LENG.
1	5		3.04	15.20
2	5		4.02	20.10
3	4		4.47	17.88
4	6		4.30	25.80
5	6		1.38	8.28
6	4		3.20	12.80
7	4		2.41	9.64
8	6		1.17	7.02
9	2		3.80	7.60
10	4		0.60	2.40
11	6		0.75	4.50
				131.22
$131.22 \times 1.21 = 158.78 \text{ Kg}$				

Dia 070

POS	No.	FORM	UNIT LENG.	TOTAL LENG.
1	5		3.26	16.30
2	7		4.31	30.17
3	4		4.72	18.88
4	6		4.86	29.16
5	8		1.52	12.16
6	4		3.41	13.64
7	6		2.54	15.24
8	6		1.25	7.50
9	2		4.16	8.32
10	6		0.60	3.60
11	6		0.75	4.50
				159.47
$159.47 \times 1.21 = 192.96 \text{ Kg}$				

Dia 080

POS	No.	FORM	UNIT LENG.	TOTAL LENG.
1	5		3.46	17.30
2	8		4.64	37.12
3	4		4.92	19.68
4	6		5.45	32.70
5	8		1.67	13.36
6	5		3.61	18.05
7	6		2.67	16.02
8	7		1.29	9.03
9	2		4.66	9.32
10	5		0.60	3.00
11	7		0.75	5.25
				180.83
$180.83 \times 1.21 = 218.80 \text{ Kg}$				

Dia 090

POS	No.	FORM	UNIT LENG.	TOTAL LENG.
1	5		3.73	18.65
2	9		4.96	44.64
3	4		5.22	20.88
4	6		5.99	35.94
5	10		1.80	18.00
6	5		3.82	19.10
7	6		2.81	16.86
8	7		1.37	9.59
9	3		5.04	15.12
10	6		0.60	3.60
11	7		0.75	5.25
				207.63
$207.63 \times 1.21 = 251.23 \text{ Kg}$				

Dia 100

POS	No.	FORM	UNIT LENG.	TOTAL LENG.
1	6		4.45	26.70
2	8		5.50	44.00
3	5		6.27	31.35
4	6		5.87	35.22
5	10		1.77	17.70
6	6		4.18	25.08
7	8		3.09	24.72
8	8		1.44	11.52
9	3		5.40	16.20
10	6		0.60	3.60
11	8		0.75	6.00
				242.09
$242.09 \times 1.21 = 292.93 \text{ Kg}$				

Dia 120

POS	No.	FORM	UNIT LENG.	TOTAL LENG.
1	6		4.93	29.58
2	10		6.16	61.60
3	5		6.77	33.85
4	6		7.02	42.12
5	12		2.06	24.72
6	7		4.59	32.13
7	8		3.36	26.88
8	9		1.56	14.04
9	3		6.28	18.84
10	7		0.60	4.20
11	9		0.75	6.75
				294.71
$294.71 \times 1.21 = 356.60 \text{ Kg}$				

Dia 140

POS	No.	FORM	UNIT LENG.	TOTAL LENG.
1	6		5.45	32.70
2	11		6.83	75.13
3	5		7.32	36.60
4	7		8.17	57.19
5	14		2.35	32.90
6	8		5.00	40.00
7	10		3.62	36.20
8	10		1.71	17.10
9	3		7.00	21.0
10	8		0.60	4.80
11	10		0.75	7.50
				361.12
$361.12 \times 1.21 = 436.96 \text{ Kg}$				





ALL BARS ARE $\phi 14$ (121 Kg/m)

REFERENCE DWGS: For Reinforcement see dwg. No. 13/9/3/01

For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale:	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. No. 13/9/3/02	
Approved:	Sheet No: 3 of 3	Rev No:
CONCRETE TRANSITION (TYPE 4) LIST OF REINFORCEMENT		

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

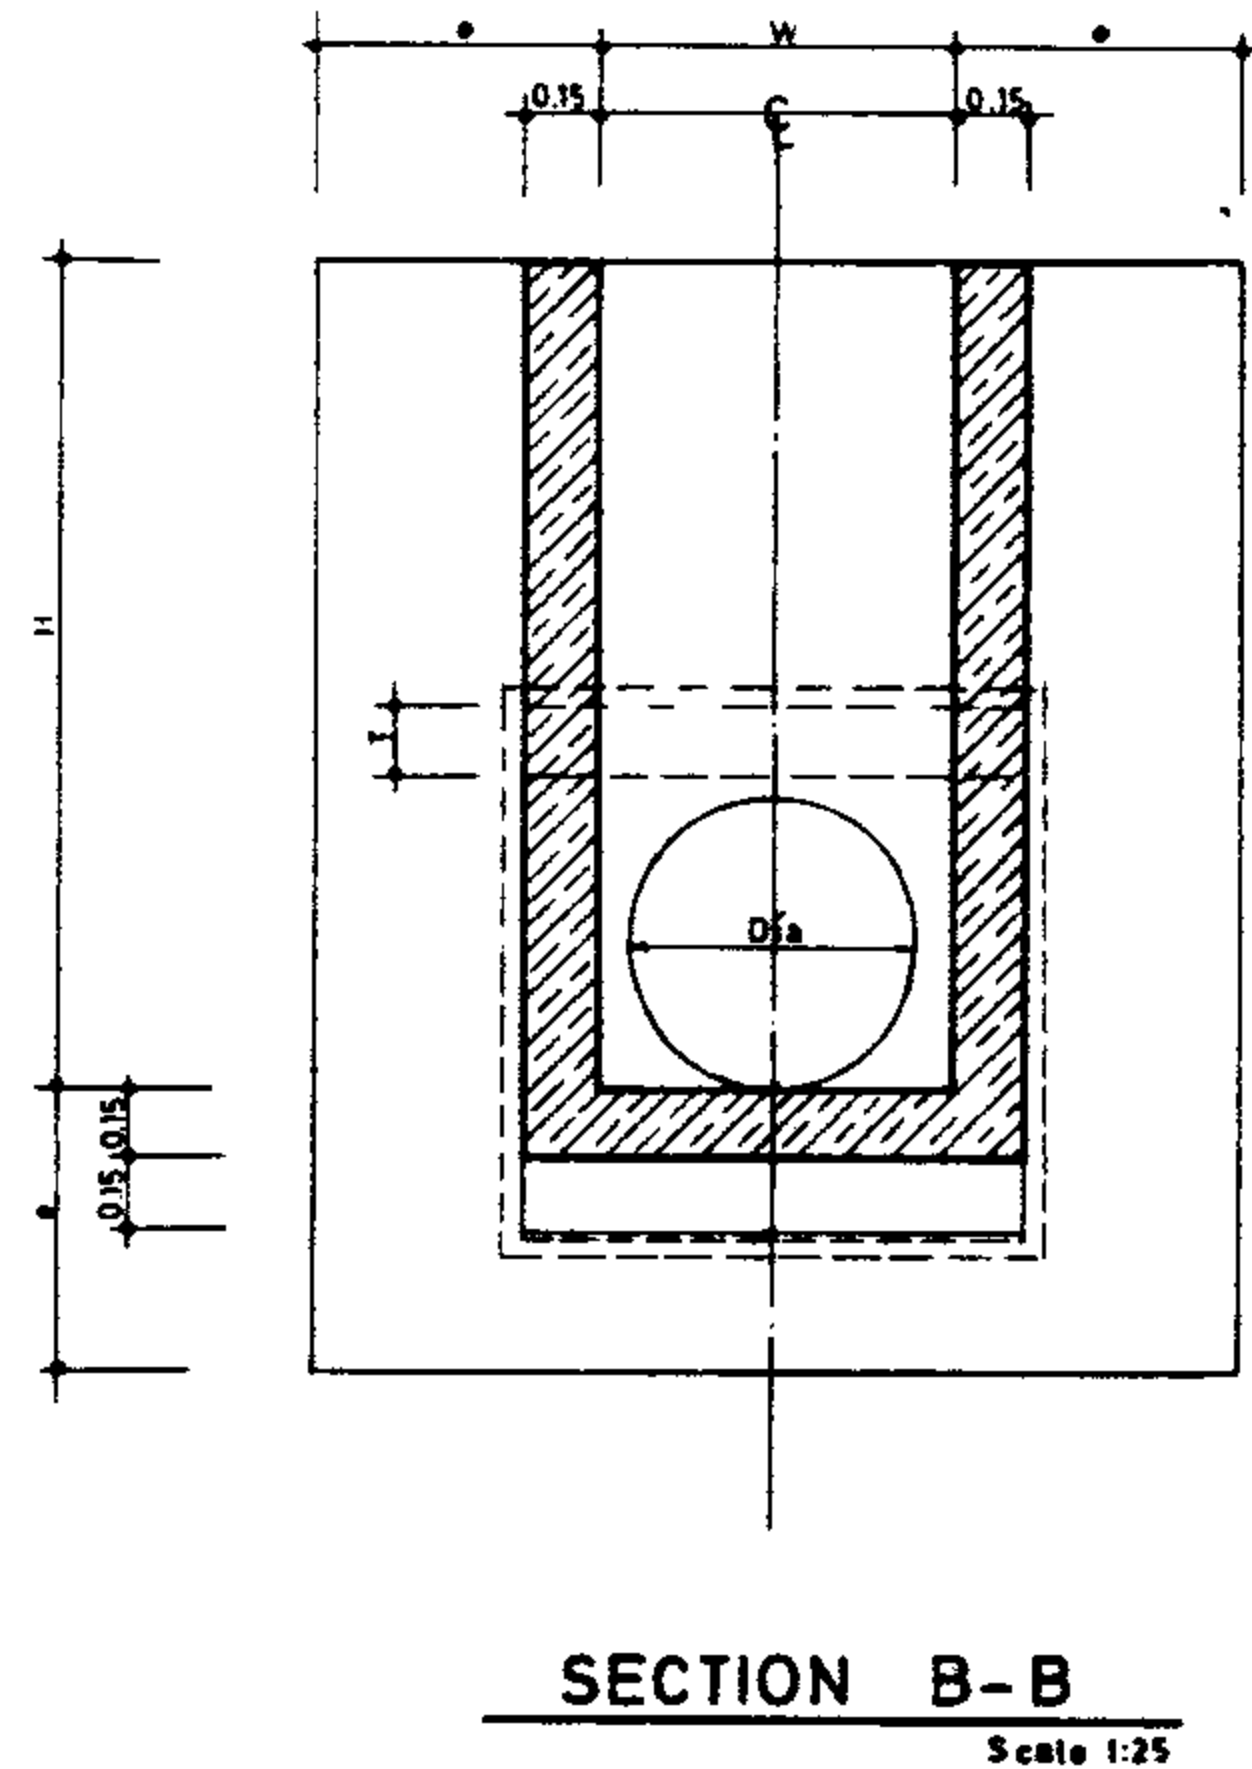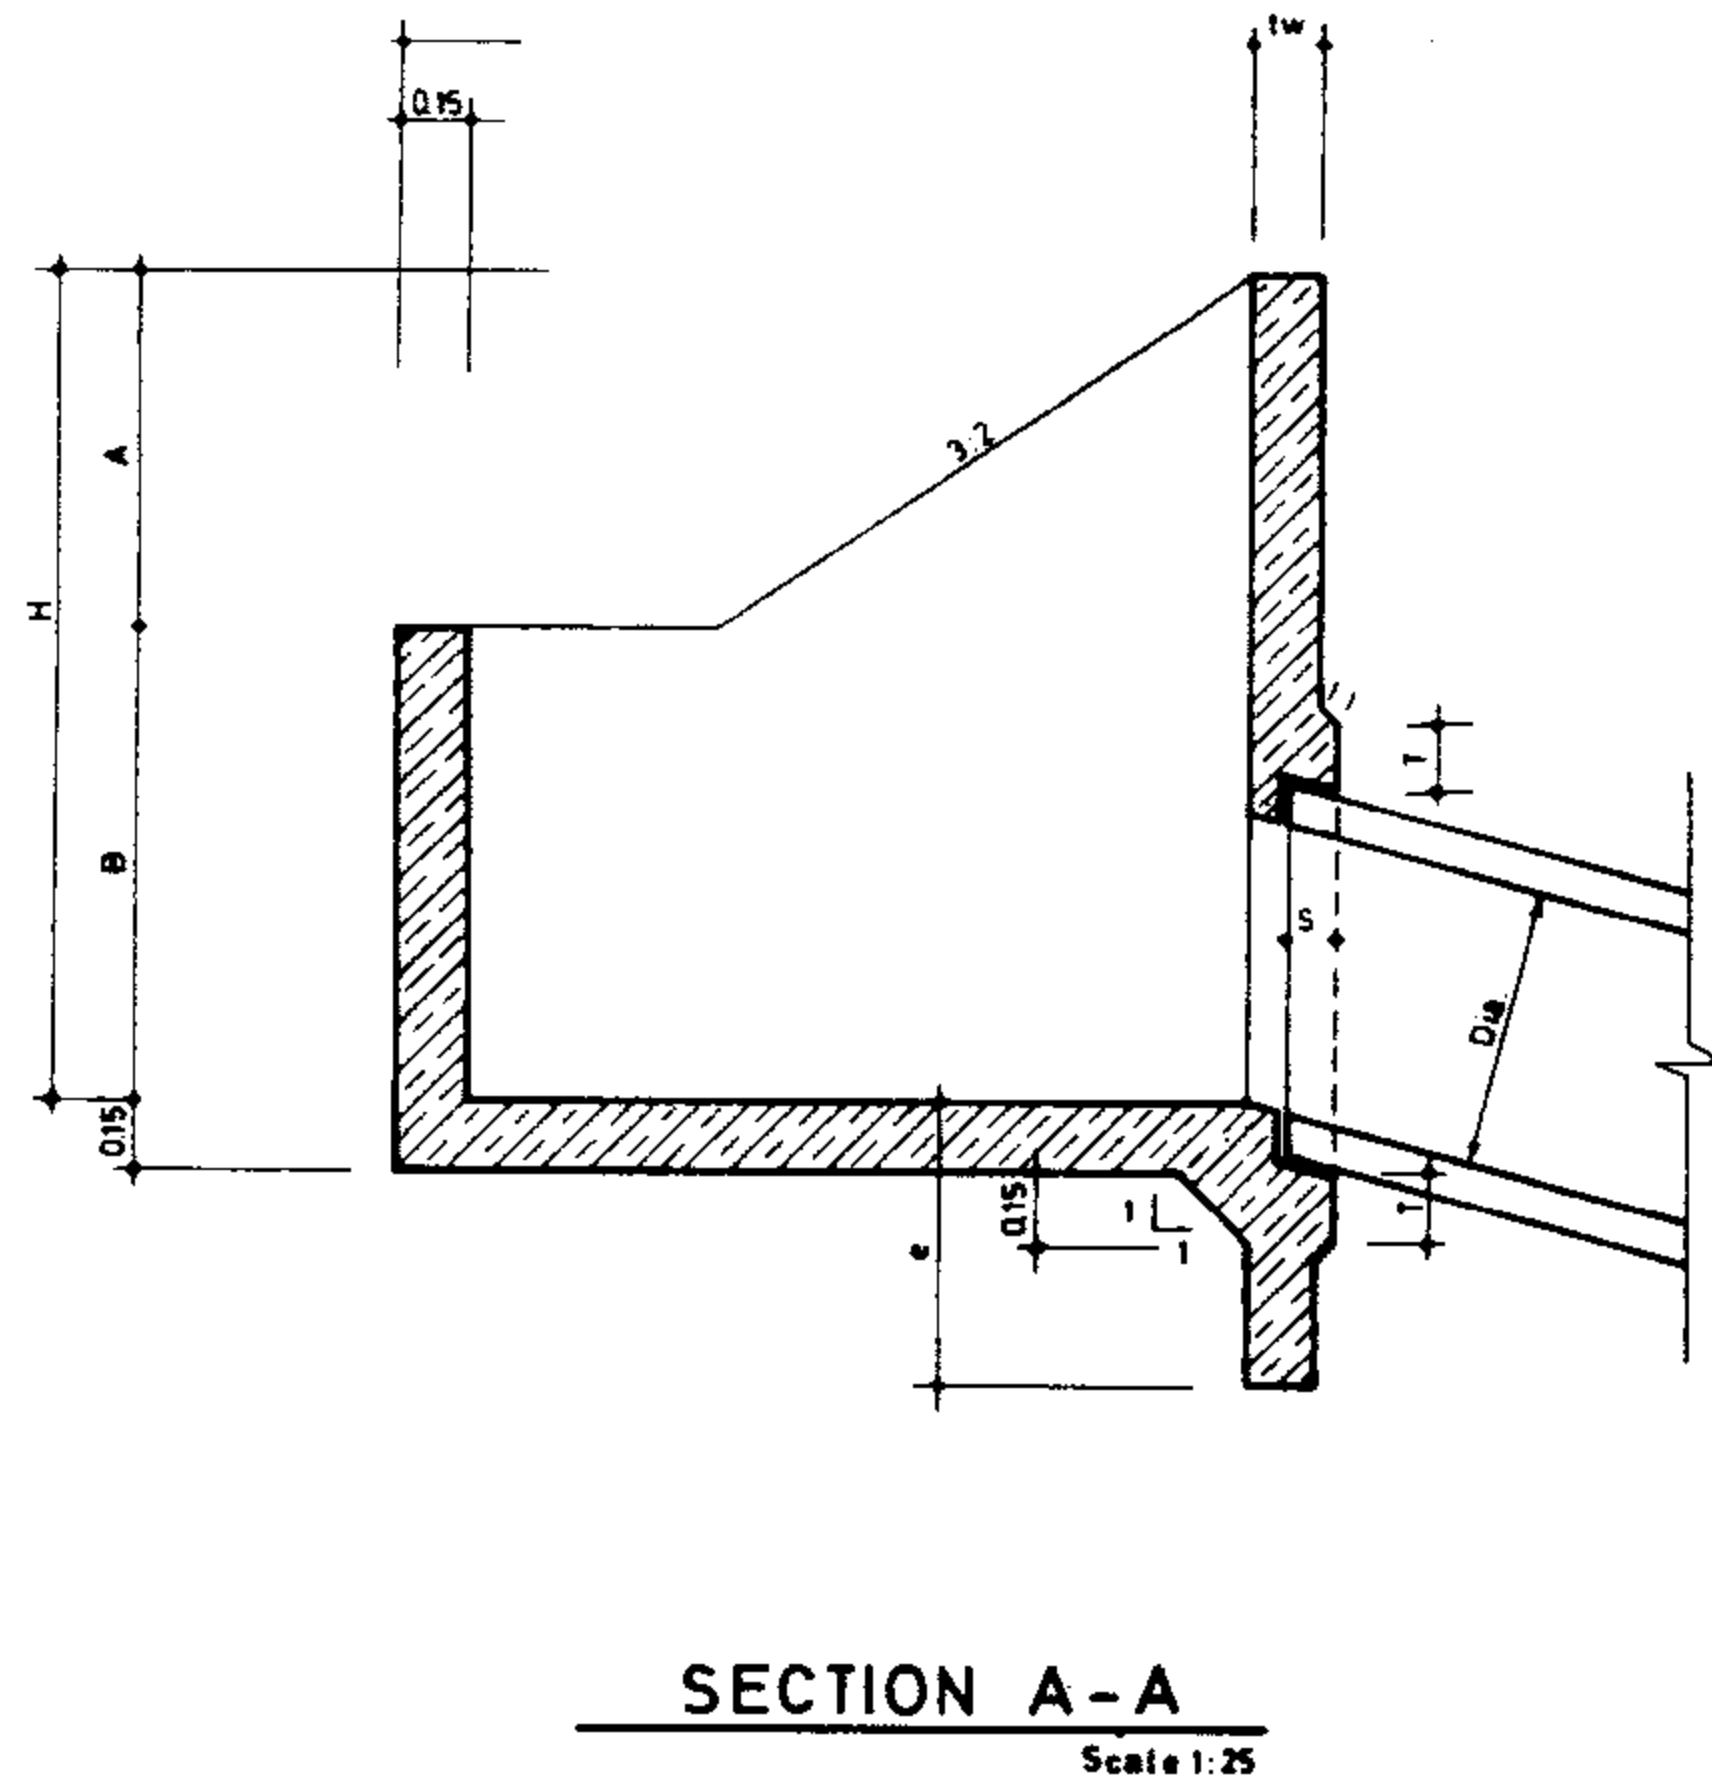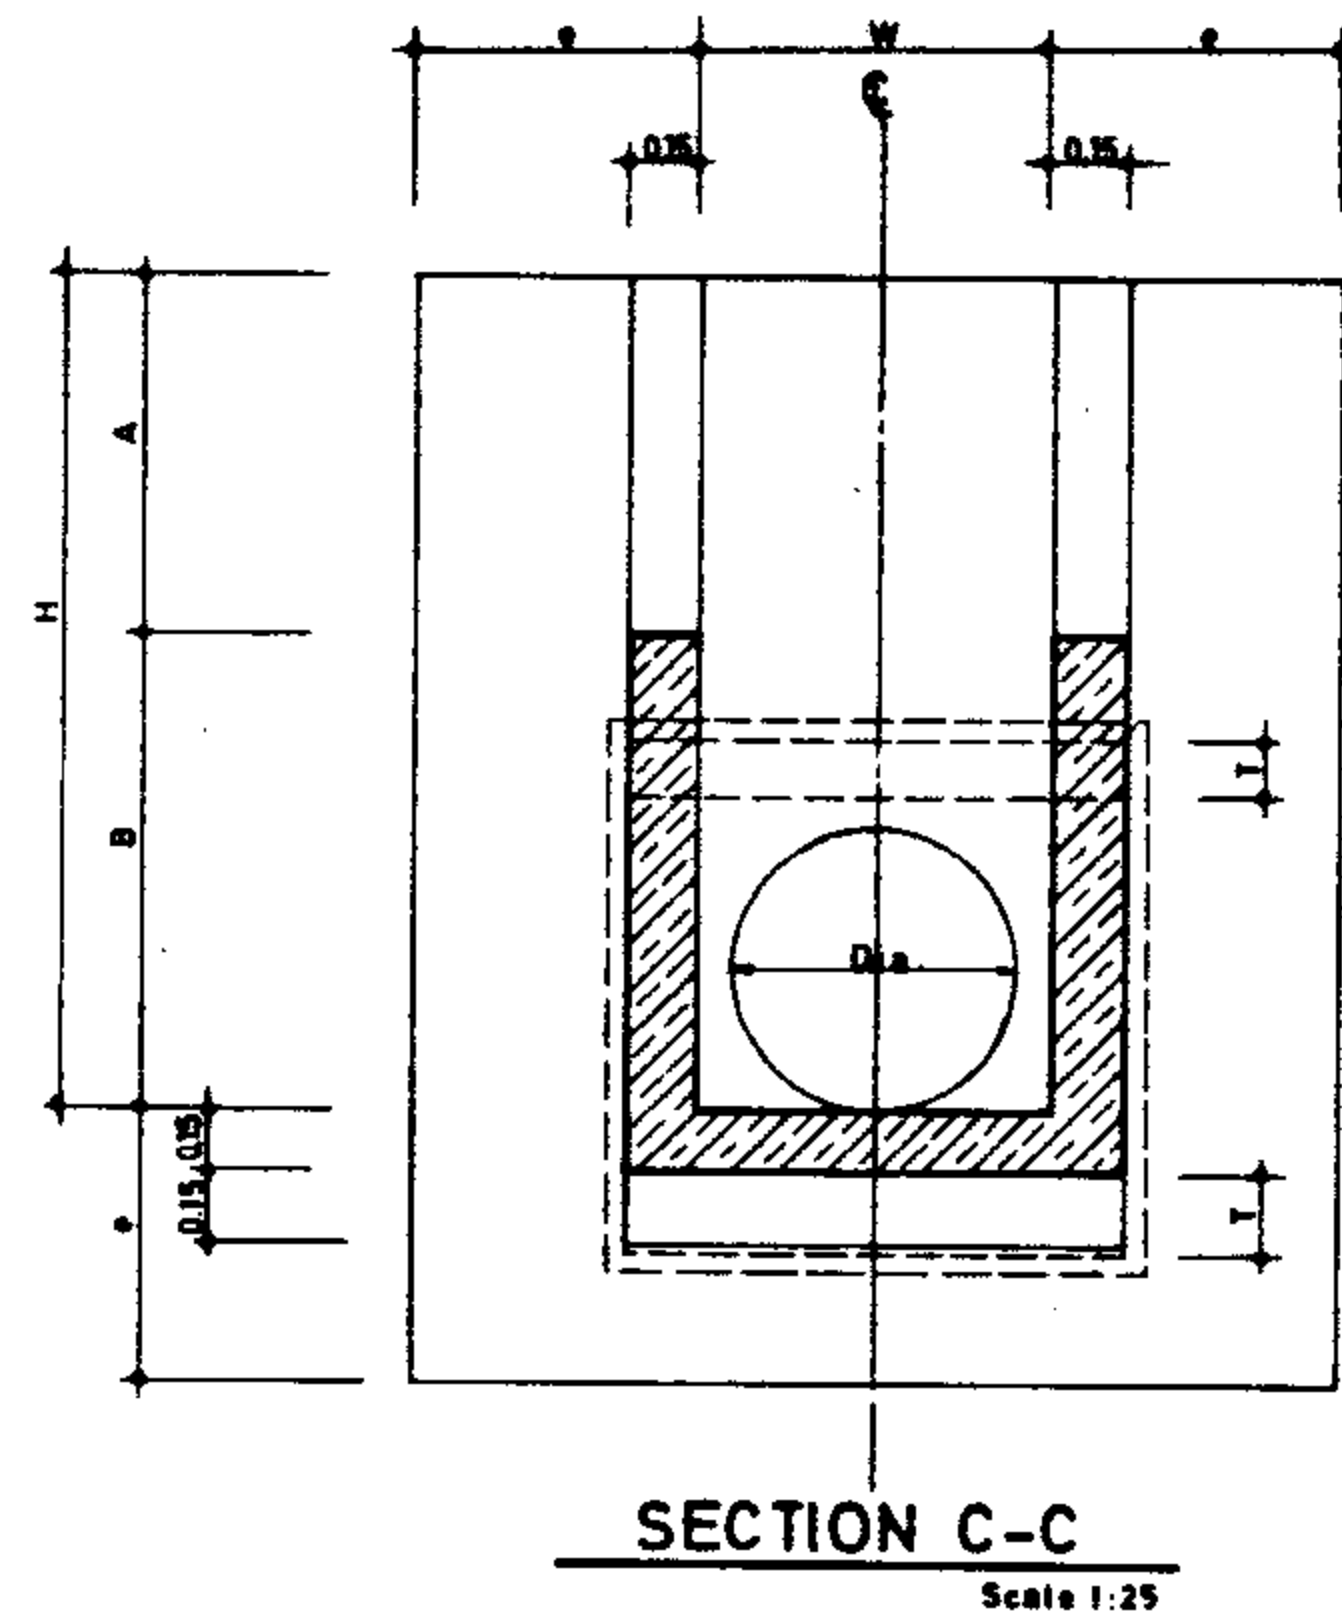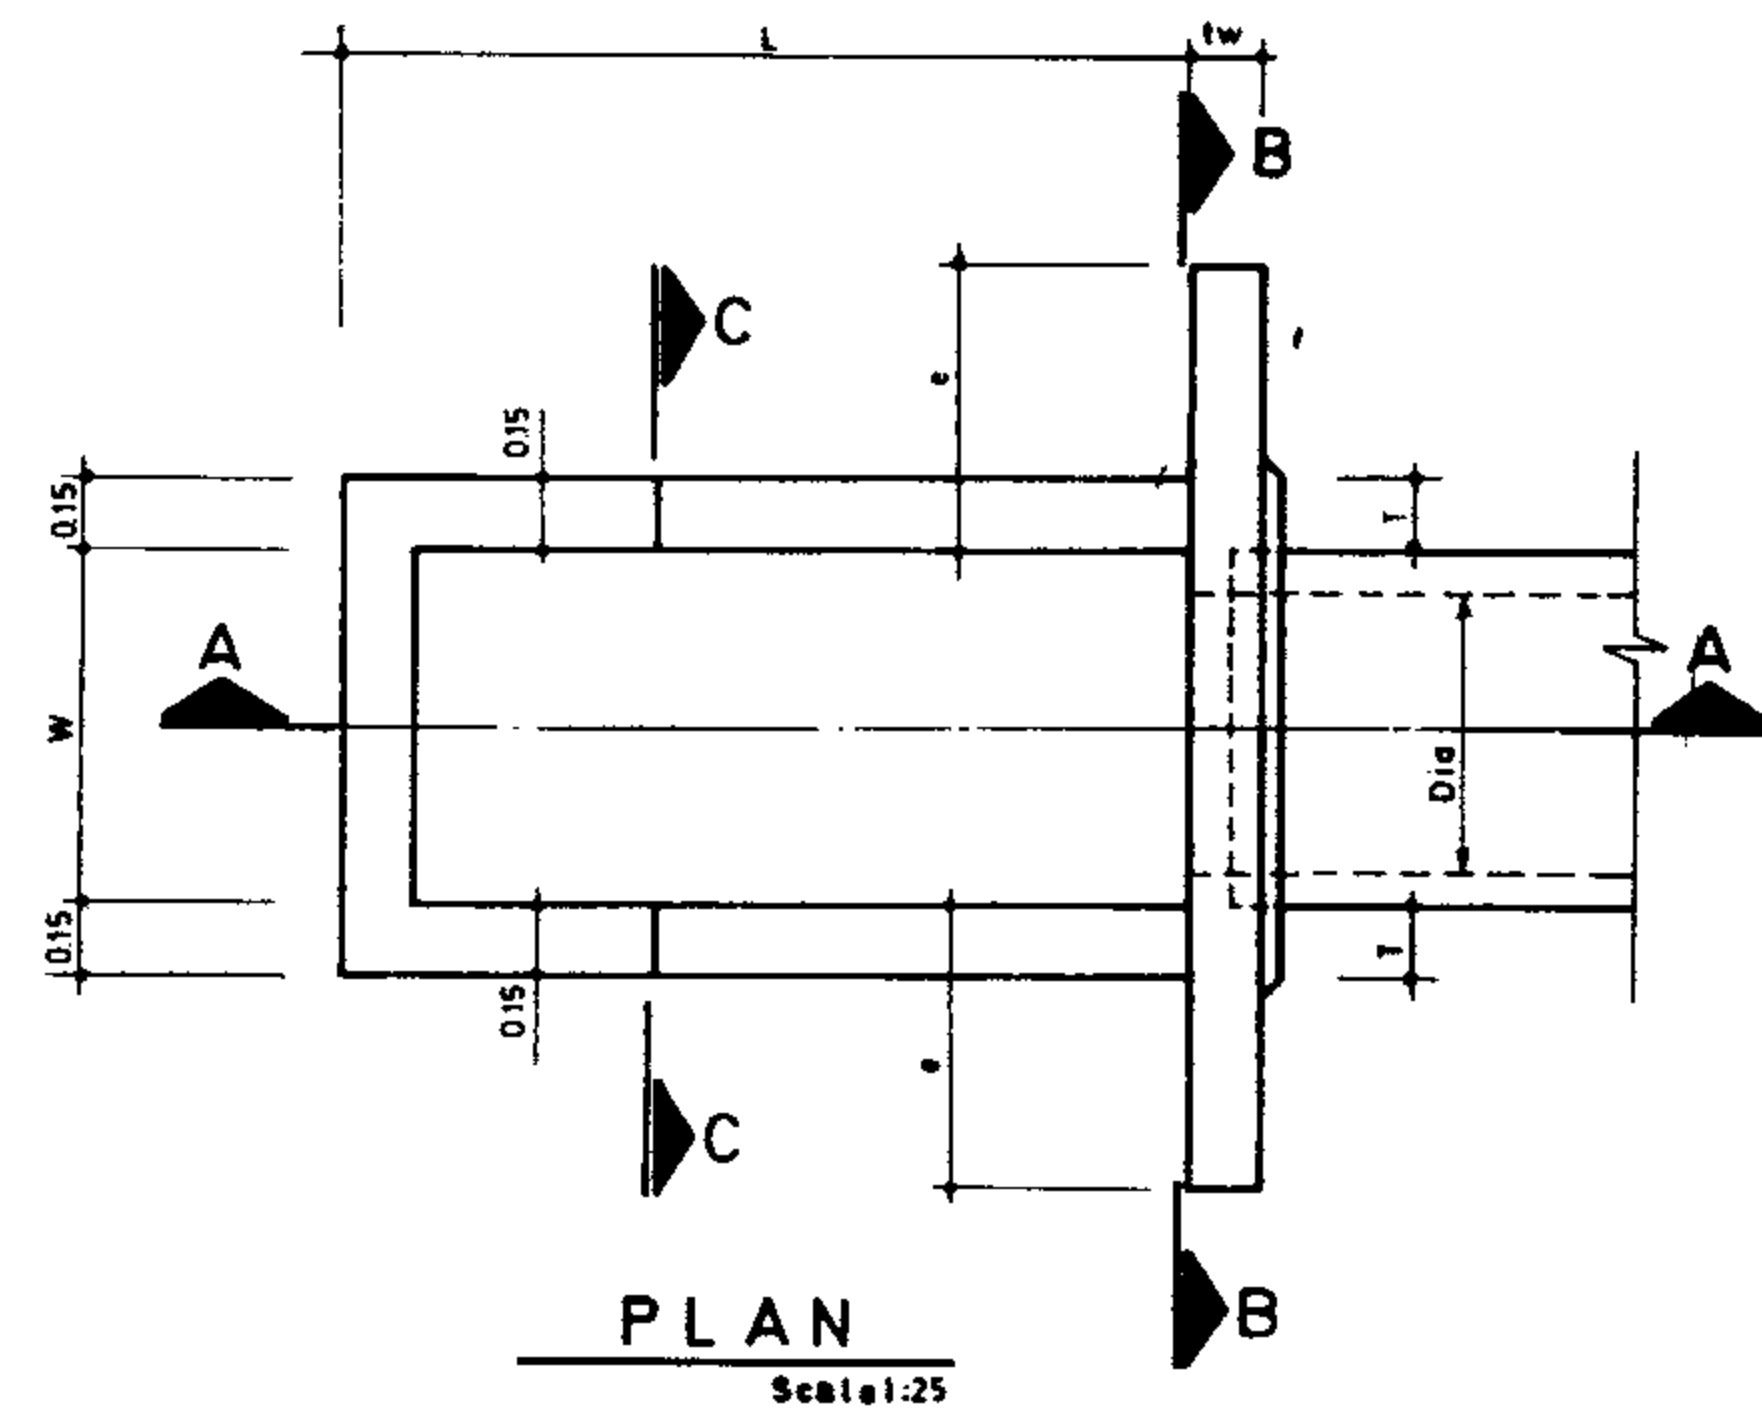

DIMENSION TABLE

STR. #	D	A	B	H	L	S	T	W	e	tw	R/Bar. Kg.	Conc. m ³	From.
600_1	0.60	0.75	0.45	1.20	1.80	0.10	0.15	0.80	0.60	0.15	122.31	2.88	13.34
600_2	0.60	0.75	0.60	1.35	1.80	0.10	0.15	0.80	0.60	0.15	135.40	3.39	15.20
600_3	0.60	0.75	0.75	1.50	1.80	0.10	0.15	0.80	0.60	0.15	143.89	3.76	17.10
600_4	0.60	0.75	1.00	1.75	1.80	0.10	0.15	0.80	0.60	0.15	163.42	4.48	20.26
700_1	0.70	0.75	0.90	1.65	2.10	0.15	0.20	0.90	0.60	0.15	172.26	4.42	20.73
700_2	0.70	0.75	1.10	1.85	2.10	0.15	0.20	0.90	0.60	0.15	199.19	5.04	23.59
800_1	0.80	0.90	0.60	1.50	2.40	0.15	0.20	1.00	0.75	0.20	184.68	4.72	21.08
800_2	0.80	0.90	0.90	1.80	2.40	0.15	0.20	1.00	0.75	0.20	221.06	5.83	26.02
800_3	0.80	0.90	1.10	2.00	2.40	0.15	0.20	1.00	0.75	0.20	234.17	6.55	29.32
900_1	0.90	0.90	0.90	1.80	2.70	0.20	0.20	1.10	0.75	0.20	240.96	6.09	27.91
900_2	0.90	0.90	1.10	2.00	2.70	0.20	0.20	1.10	0.75	0.20	265.33	6.85	31.53
900_3	0.90	0.90	1.20	2.10	2.70	0.20	0.20	1.10	0.75	0.20	271.02	7.25	33.37
1000_1	1.00	1.00	1.10	2.10	3.00	0.20	0.20	1.20	0.75	0.20	280.27	7.77	34.48
1000_2	1.00	1.00	1.20	2.20	3.00	0.20	0.20	1.20	0.75	0.20	285.96	8.18	36.44

NOTES

- ① Dimension provided in the table are for different capacities, to be fitted to the working condition.
- ② Full-pipe velocities range from about 1.5 m/s for 600 mm dimension pipe to about 3 m for all pipe diameters listed. The dimensions provided control at the inlet headwall and also at freeboard at the headwall for the design capacity and free-flow pipe.
- ③ A maximum full-pipe flow velocity of 3 m/s is permitted for cross drainage culverts.
- ④ To prevent degradation at the inlet the top of the inlet wall is placed at or near existing ground surface.
- ⑤ Structures numbered 600-4, 700-2, 800-2, 900-2, 900-3 and 1000-2 may also be used for velocities up to 3.5 m/s.

REFERENCE DWGS. For general notes see dwgs. No 20/2/1/01 to 20/2/1/03
For reinforcement see dwg. No 13/8/3/01
For detail of pipe connection to structure see dwgs. No 17/1/1/01 to 17/1/1/03

Scale: 1:25

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG No 13/8/1/01

Approved:


Sheet No 1 of 4

Rev. No:


CONCRETE TRANSITION (TYPE 3)

PLAN & SECTION


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJE
TECHNICAL RESEARCH AND
STANDARD BUREAU

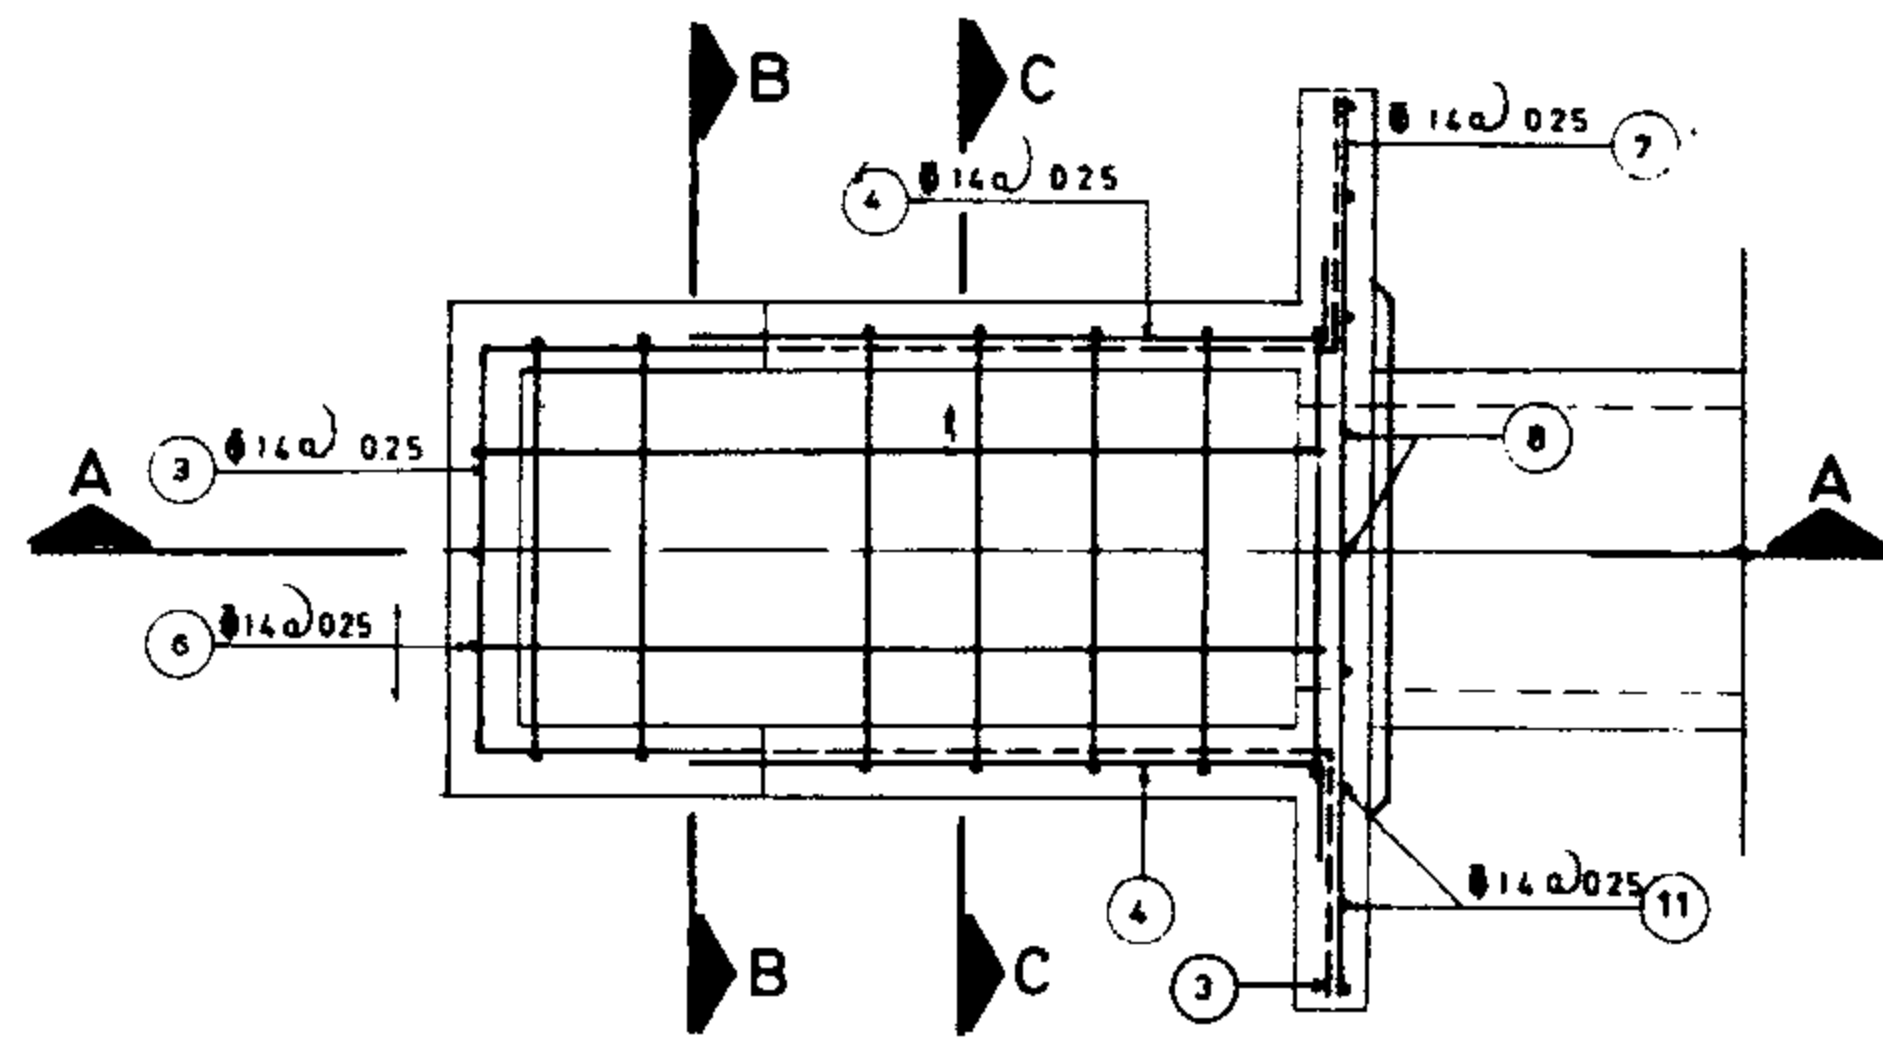


PLAN
Scale 1:25

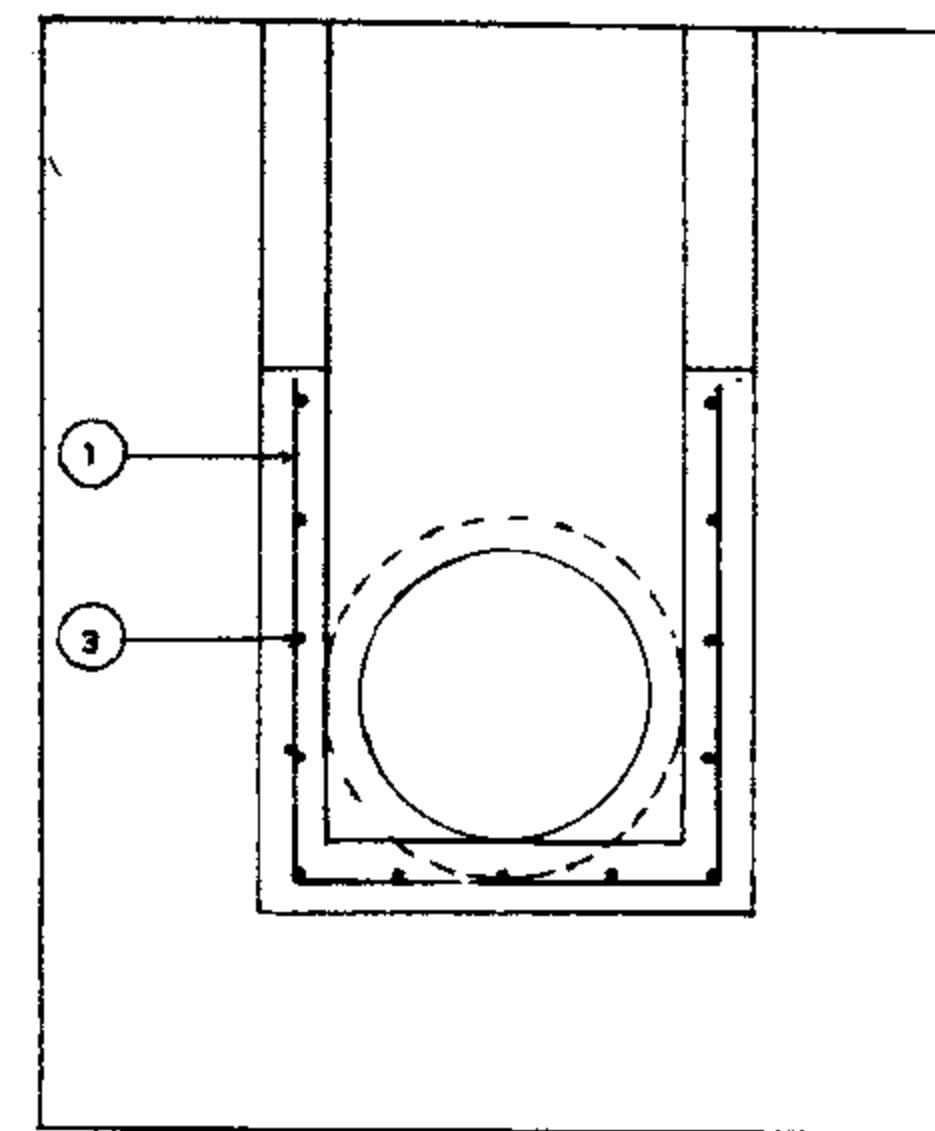

SECTION B-B
Scale 1:25

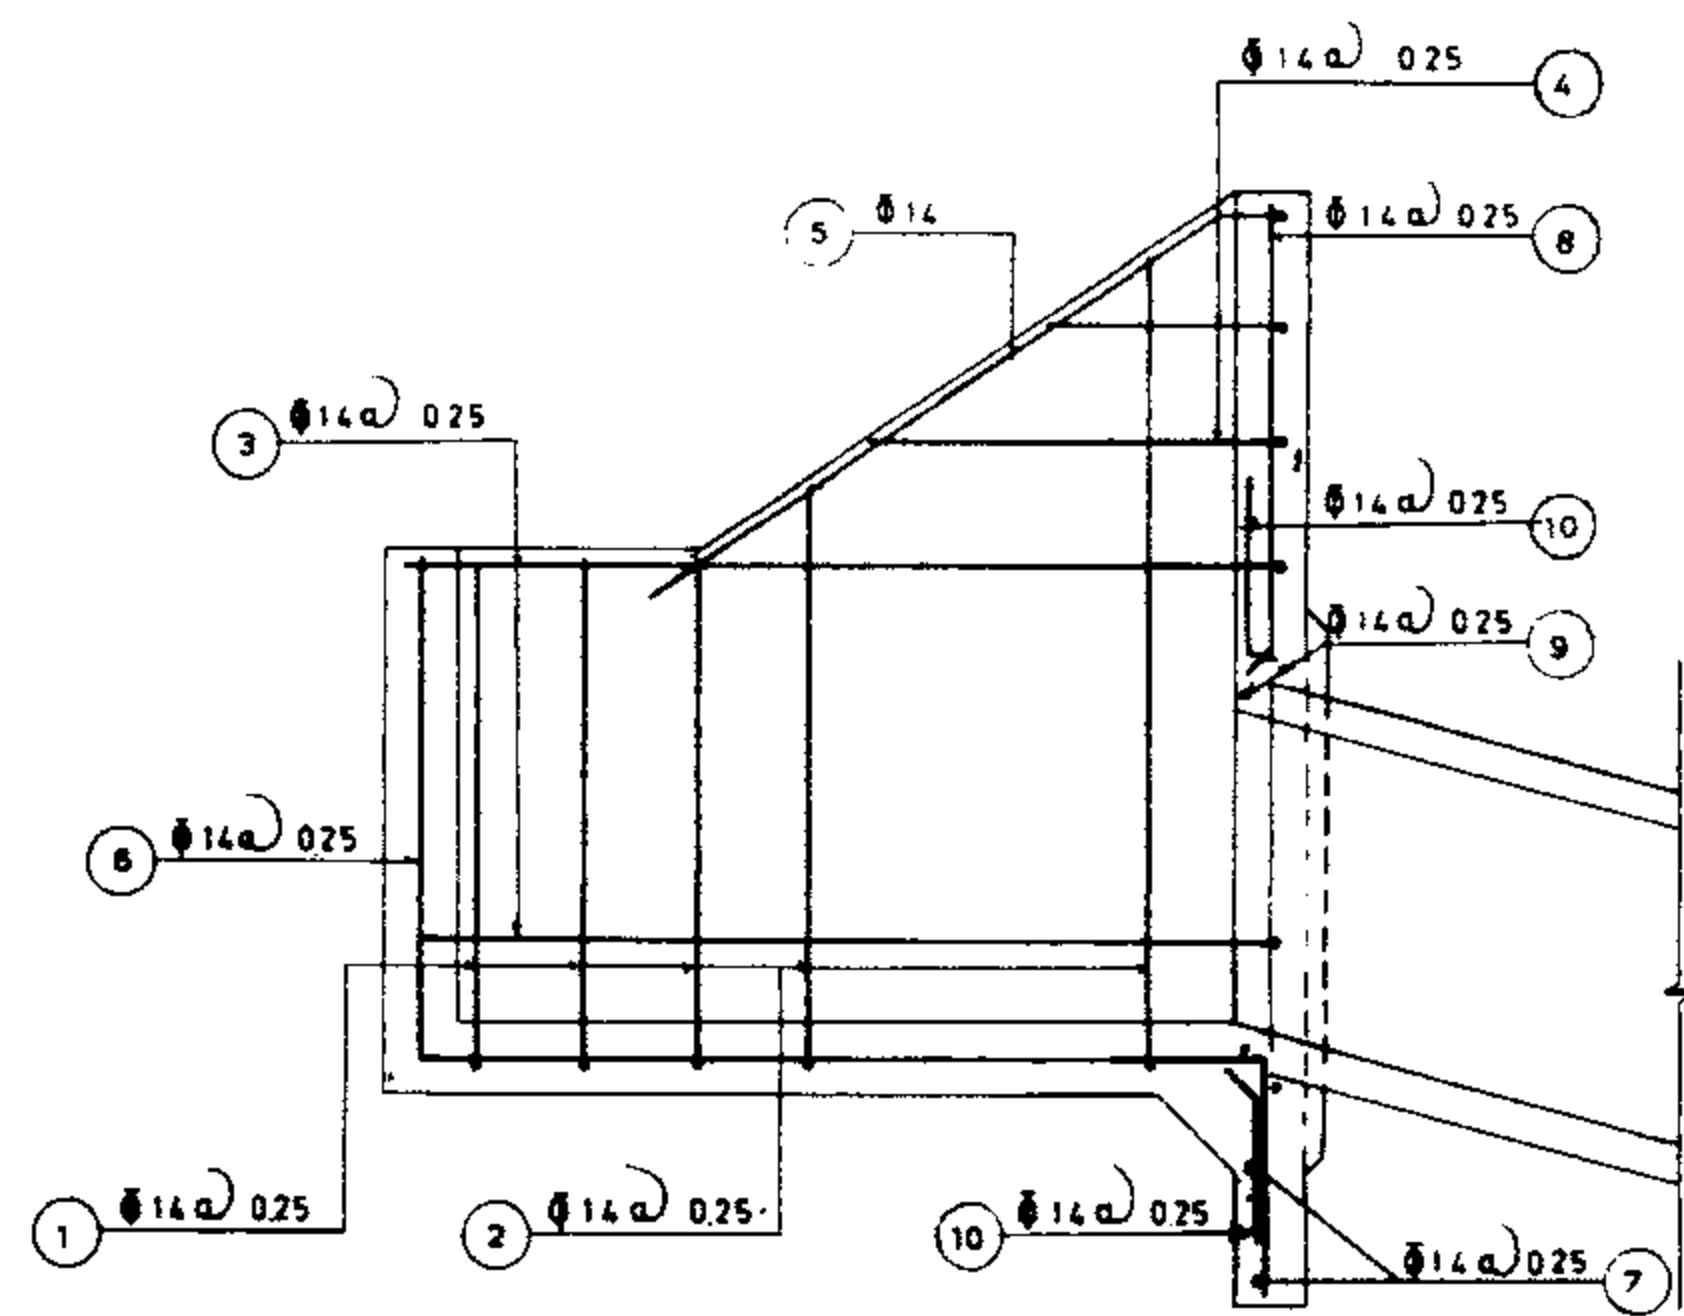

SECTION A-A
Scale 1:25

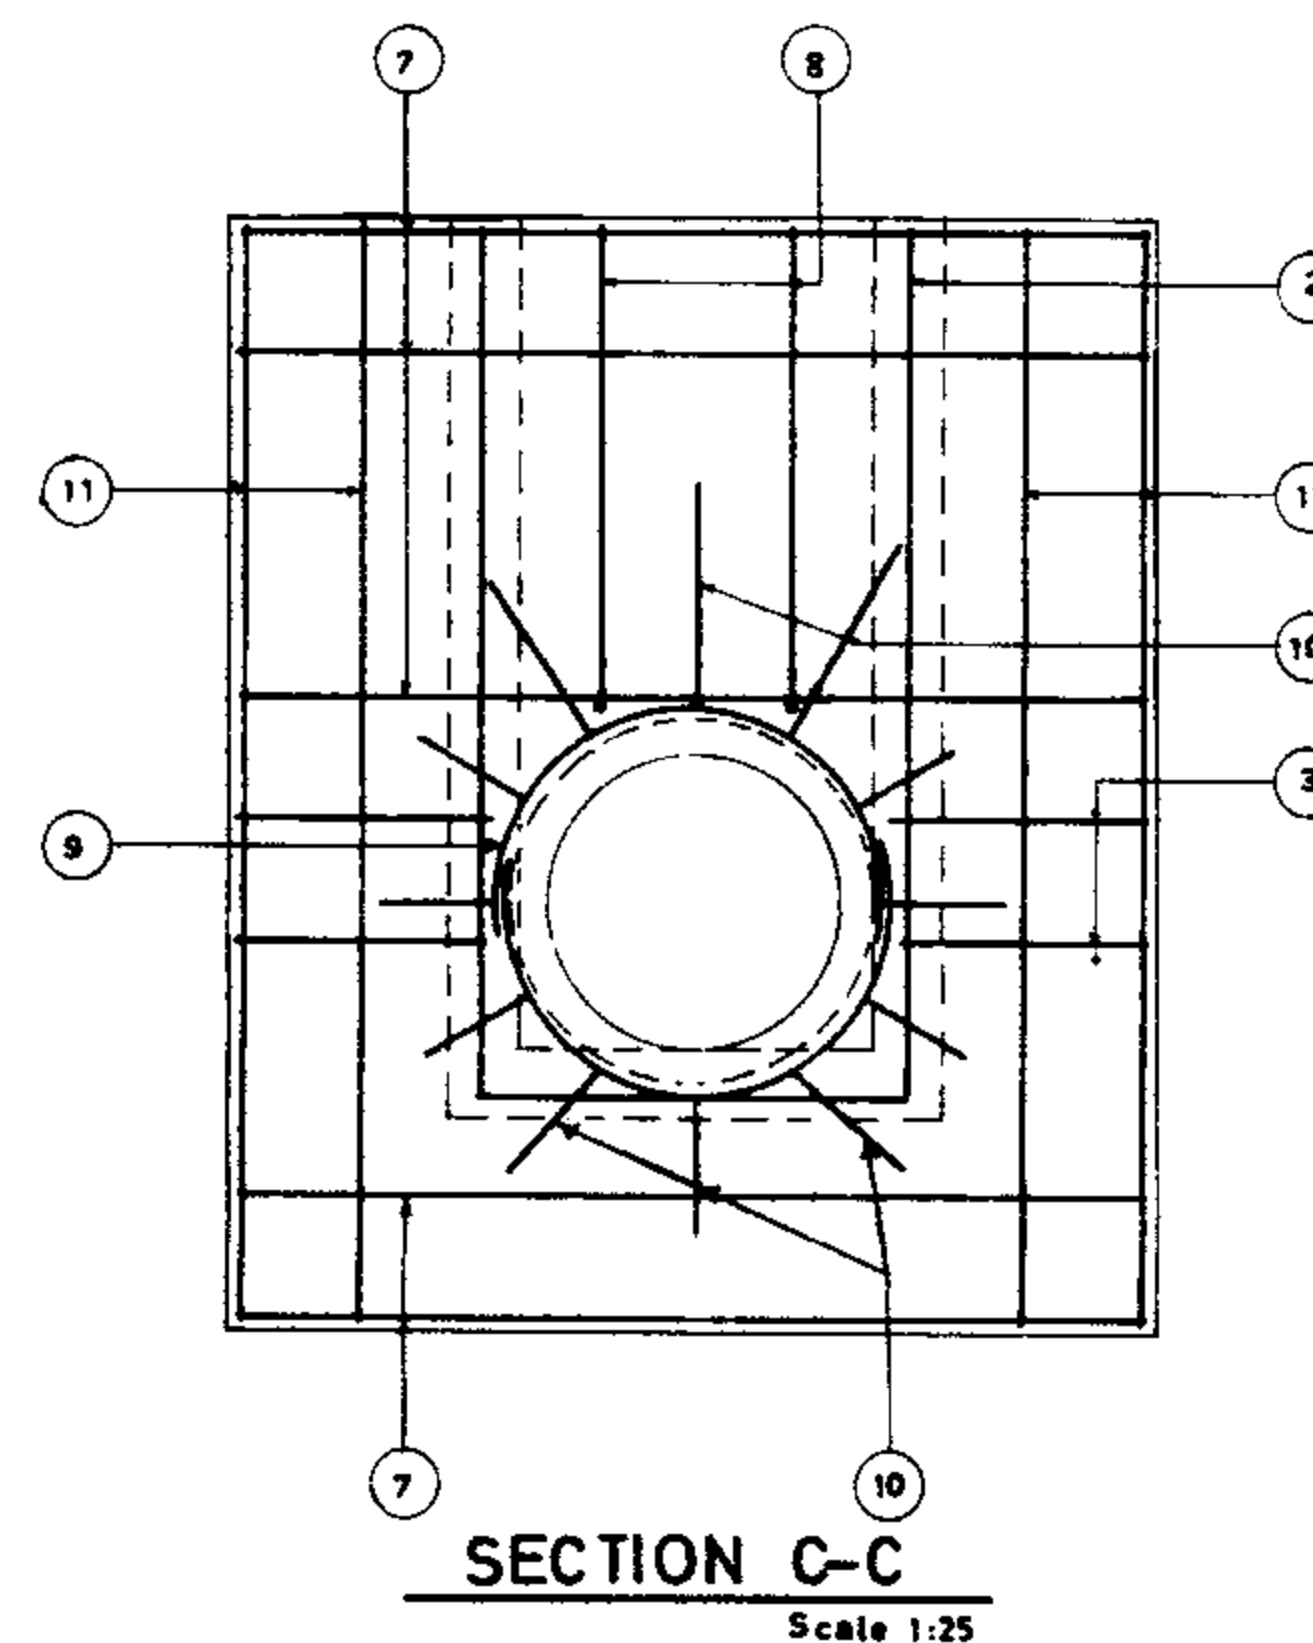

SECTION C-C
Scale 1:25

REFERENCE DWGS: For Plan & Section see dwg. N° 13/8,1,01
For List of Reinforcement see dwgs. N° 13/8,3,02 & 13/8,3,03

Scale: 1:25

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG. N° 13/8/3/01

CONCRETE TRANSITION (TYPE 3)

Approved:

Sheet N° 2 of 4 Rev. N°

REINFORCEMENT
PLAN & SECTION

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU

STR. 600_1

POS.	Nº	FORM	UNIT LENG.	TOTAL LENG.
1	3	0.51 1.02 0.51	2.04	6.12
2	6	0.51 1.26 0.51	2.79	16.74
3	2	0.48 1.87 0.48	5.72	11.44
4	6	0.55 ~ 0.89	0.92	5.52
5	2	1.75	1.95	3.90
6	6	0.51 1.84 0.50	2.85	17.10
7	6	1.92	1.92	11.52
8	4	0.20 ~ 1.61 0.20-0.30	1.06	4.24
9	2	0.40 (0.40)	3.80	7.60
10	13	0.20-0.30 0.40 ~ 0.50	0.70	9.10
11	6	1.80	1.80	10.80
				104.08
104.08 x 1.21 =				125.94 Kg.

STR. 600_2

POS.	Nº	FORM	UNIT LENG.	TOTAL LENG.
1	3	0.66 1.02 0.66	2.34	7.02
2	6	0.66 1.41 0.66	3.09	18.54
3	3	0.48 1.87 0.48	5.72	17.16
4	6	0.55 ~ 0.89	0.92	5.52
5	2	1.75	1.95	3.90
6	6	0.66 1.84 0.50	3.00	18.00
7	6	1.92	1.92	11.52
8	4	0.35 ~ 1.56 0.20-0.30	1.21	4.84
9	2	0.40 (0.40)	3.80	7.60
10	13	0.20-0.30 0.40 ~ 0.50	0.70	9.10
11	6	1.95	1.95	11.70
				114.90
114.90 x 1.21 =				139.03 Kg.

STR. 600_3

POS.	Nº	FORM	UNIT LENG.	TOTAL LENG.
1	3	0.81 1.02 0.81	2.64	7.92
2	6	0.81 1.56 0.81	3.39	20.34
3	3	0.48 1.87 0.48	5.72	17.16
4	6	0.55 ~ 0.89	0.92	5.52
5	2	1.75	1.95	3.90
6	6	0.81 1.84 0.50	3.15	18.90
7	7	1.92	1.92	13.44
8	4	0.50 ~ 1.71 0.20-0.30	1.36	5.44
9	2	0.40 (0.40)	3.80	7.60
10	13	0.20-0.30 0.40 ~ 0.50	0.70	9.10
11	6	2.10	2.10	12.60
				121.92
121.92 x 1.21 =				147.52 Kg.

STR. 600_4

POS.	Nº	FORM	UNIT LENG.	TOTAL LENG.
1	3	1.04 1.02 1.06	3.14	9.42
2	6	1.06 1.81 1.06	3.89	23.34
3	4	0.48 1.87 0.48	5.72	22.88
4	6	0.55 ~ 0.89	0.92	5.52
5	2	1.75	1.95	3.90
6	6	1.06 1.84 0.50	3.40	20.40
7	8	1.92	1.92	15.36
8	4	0.75 ~ 1.96 0.20-0.30	1.61	6.44
9	2	0.40 (0.40)	3.80	7.60
10	13	0.20-0.30 0.40 ~ 0.50	0.70	9.10
11	6	2.35	2.35	14.10
				138.06
138.06 x 1.21 =				167.05 Kg.

STR. 700_1

POS.	Nº	FORM	UNIT LENG.	TOTAL LENG.
1	4	0.96 1.12 0.96	3.04	12.16
2	6	0.96 1.71 0.96	3.79	22.74
3	4	0.48 2.17 0.48	6.42	25.68
4	6	0.55 ~ 0.89	0.92	5.52
5	2	1.75	1.95	3.90
6	6	0.96 2.14 0.50	3.60	21.60
7	7	2.02	2.02	14.14
8	5	0.55 ~ 1.86 0.20-0.30	1.46	7.30
9	2	0.40 (0.40)	4.16	8.32
10	15	0.20-0.30 0.40 ~ 0.50	0.70	10.50
11	6	2.25	2.25	13.50
				145.36
145.36 x 1.21 =				175.89 Kg.

STR. 700_2

POS.	Nº	FORM	UNIT LENG.	TOTAL LENG.
1	4	1.16 1.12 1.16	3.44	13.76
2	6	1.16 1.91 1.16	4.19	25.14
3	6	0.48 2.17 0.48	6.42	38.52
4	6	0.55 ~ 0.89	0.92	5.52
5	2	1.75	1.95	3.90
6	6	1.16 2.14 0.50	3.80	22.80
7	8	2.02	2.02	16.16
8	5	0.75 ~ 2.06 0.20-0.30	1.66	8.30
9	2	0.40 (0.40)	4.16	8.32
10	15	0.20-0.30 0.40 ~ 0.50	0.70	10.50
11	6	2.45	2.45	14.70
				167.62
167.62 x 1.21 =				202.82 Kg.

STR. 800_1

POS.	Nº	FORM	UNIT LENG.	TOTAL LENG.
1	5	0.66 1.22 0.66	2.54	12.70
2	7	0.66 1.56 0.66	3.44	24.08
3	3	0.63 2.52 0.63	7.52	22.56
4	8	0.55 ~ 1.16	1.06	8.48
5	2	2.02	2.22	4.44
6	7	0.66 2.49 0.50	3.65	25.55
7	6	2.42	2.42	14.52
8	5	0.26 ~ 1.86 0.20-0.30	1.31	6.55
9	2	0.40 (0.40)	4.66	9.32
10	17	0.20-0.30 0.55 ~ 0.65	0.85	14.45
11	8	2.25	2.25	18.00
				156.13
156.13 x 1.21 =				188.92 Kg.

ALL BARS ARE ϕ 14 (1.21 Kg/m)

REFERENCE DWGS: For Reinforcement see dwg. No. 13/8,3/01

For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale:

IRRIGATION DRAINAGE STANDARDS

Date:

DWG. No. 13/8,3/02

Approved:

Sheet No. 3 of 4 Rev. No.

CONCRETE TRANSITION (TYPE 3)
LIST OF REINFORCEMENTISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

STR. 800_2

POS.	Nº	FORM	UNIT LENG.	TOTAL LENG.
1	5	0.96 1.22 0.96	3.14	15.70
2	7	0.96 1.22 0.96	4.04	28.28
3	4	0.63 1.22 0.63	7.52	30.08
4	8	0.55 ~ 1.16 0.20	1.06	8.48
5	2	2.02 0.20	2.22	4.44
6	7	0.96 2.48 0.50	3.95	27.65
7	8	2.42	2.42	19.36
8	5	0.55 ~ 2.16 0.20-0.30	1.61	8.05
9	2	0.40 0.40	4.66	9.32
10	17	0.20-0.30 0.55 ~ 0.65	0.85	14.45
11	8	2.55	2.55	20.40
				186.21
186.21 x 1.21 =				225.31 Kg

STR. 800_3

POS.	Nº	FORM	UNIT LENG.	TOTAL LENG.
1	5	1.16 1.22 1.16	3.54	17.70
2	7	1.16 1.22 1.16	4.44	31.08
3	5	0.63 1.22 0.63	7.52	37.60
4	8	0.55 ~ 1.16 0.20	1.06	8.48
5	2	2.02 0.20	2.22	4.44
6	7	1.16 2.48 0.50	4.15	29.05
7	8	2.42	2.42	19.36
8	5	0.76 ~ 2.36 0.20-0.30	1.81	9.05
9	2	0.40 0.40	4.66	9.32
10	17	0.20-0.30 0.55 ~ 0.65	0.85	14.45
11	8	2.75	2.75	22.00
				197.03
197.03 x 1.21 =				238.41 Kg

STR. 900_1

POS.	Nº	FORM	UNIT LENG.	TOTAL LENG.
1	6	0.96 1.32 0.96	3.24	19.44
2	7	0.96 1.32 0.96	4.14	28.98
3	4	0.63 1.32 0.63	8.22	32.88
4	8	0.55 ~ 1.16 0.20	1.06	8.48
5	2	2.02 0.20	2.22	4.44
6	7	0.96 2.79 0.50	4.25	29.75
7	7	2.52	2.52	17.64
8	6	0.46 ~ 2.16 0.20-0.30	1.56	9.36
9	3	0.40 0.40	5.04	15.12
10	19	0.20-0.30 0.55 ~ 0.65	0.85	16.15
11	8	2.55	2.55	20.40
				202.64
202.64 x 1.21 =				245.19 Kg

STR. 900_2

POS.	Nº	FORM	UNIT LENG.	TOTAL LENG.
1	6	1.16 1.32 1.16	3.64	21.84
2	7	1.16 1.32 1.16	4.54	31.78
3	5	0.63 1.32 0.63	8.22	41.10
4	8	0.55 ~ 1.16 0.20	1.06	8.48
5	2	2.02 0.20	2.22	4.44
6	7	1.16 2.79 0.50	4.45	31.15
7	8	2.52	2.52	20.16
8	6	0.66 ~ 2.36 0.20-0.30	1.76	10.56
9	3	0.40 0.40	5.04	15.12
10	19	0.20-0.30 0.55 ~ 0.65	0.85	16.15
11	8	2.75	2.75	22.00
				222.78
222.78 x 1.21 =				269.56 Kg

STR. 900_3

POS.	Nº	FORM	UNIT LENG.	TOTAL LENG.
1	6	1.26 1.32 1.26	3.84	23.04
2	7	1.26 1.32 1.26	4.74	33.18
3	5	0.63 1.32 0.63	8.22	41.10
4	8	0.55 ~ 1.16 0.20	1.06	8.48
5	2	2.02 0.20	2.22	4.44
6	7	1.26 2.79 0.50	4.55	31.85
7	8	2.52	2.52	20.16
8	6	0.76 ~ 2.46 0.20-0.30	1.86	11.16
9	3	0.40 0.40	5.04	15.12
10	19	0.20-0.30 0.55 ~ 0.65	0.85	16.15
11	8	2.85	2.85	22.80
				227.48
227.48 x 1.21 =				275.25 Kg

STR. 1000_1

POS.	Nº	FORM	UNIT LENG.	TOTAL LENG.
1	6	1.16 1.42 1.16	3.74	22.44
2	7	1.16 1.42 1.16	4.74	33.18
3	5	0.63 1.42 0.63	8.92	44.60
4	8	0.55 ~ 1.31 0.20	1.13	9.04
5	2	2.20 0.20	2.40	4.80
6	7	1.16 3.09 0.50	4.75	33.25
7	8	2.62	2.62	20.96
8	6	0.66 ~ 2.46 0.20-0.30	1.81	10.86
9	3	0.40 0.40	5.40	16.20
10	20	0.20-0.30 0.55 ~ 0.65	0.85	17.00
11	8	2.85	2.85	22.80
				235.13
235.13 x 1.21 =				284.51 Kg

STR. 1000_2

POS.	Nº	FORM	UNIT LENG.	TOTAL LENG.
1	6	1.26 1.42 1.26	3.94	23.64
2	7	1.26 1.42 1.26	4.94	34.58
3	5	0.63 1.42 0.63	8.92	44.60
4	8	0.55 ~ 1.31 0.20	1.13	9.04
5	2	2.20 0.20	2.40	4.80
6	7	1.26 3.09 0.50	4.85	33.95
7	8	2.62	2.62	20.96
8	6	0.76 ~ 2.56 0.20-0.30	1.91	11.46
9	3	0.40 0.40	5.40	16.20
10	20	0.20-0.30 0.55 ~ 0.65	0.85	17.00
11	8	2.95	2.95	23.60
				239.83
239.83 x 1.21 =				290.19 Kg

ALL BARS ARE $\phi 14$ (1.21 Kg/m)

REFERENCE DWGS: For Reinforcement see dwg. Nº 13/8/3/01

For bars with variable unit length see note under the same title at dwg. Nº 20/2/1/01

Scale:

IRRIGATION & DRAINAGE STANDARDS


Date:

DWG. Nº 13/8/3/03


Approved:

Sheet Nº 4 of 4 Rev. Nº


CONCRETE TRANSITION (TYPE 3)
LIST OF REINFORCEMENTISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

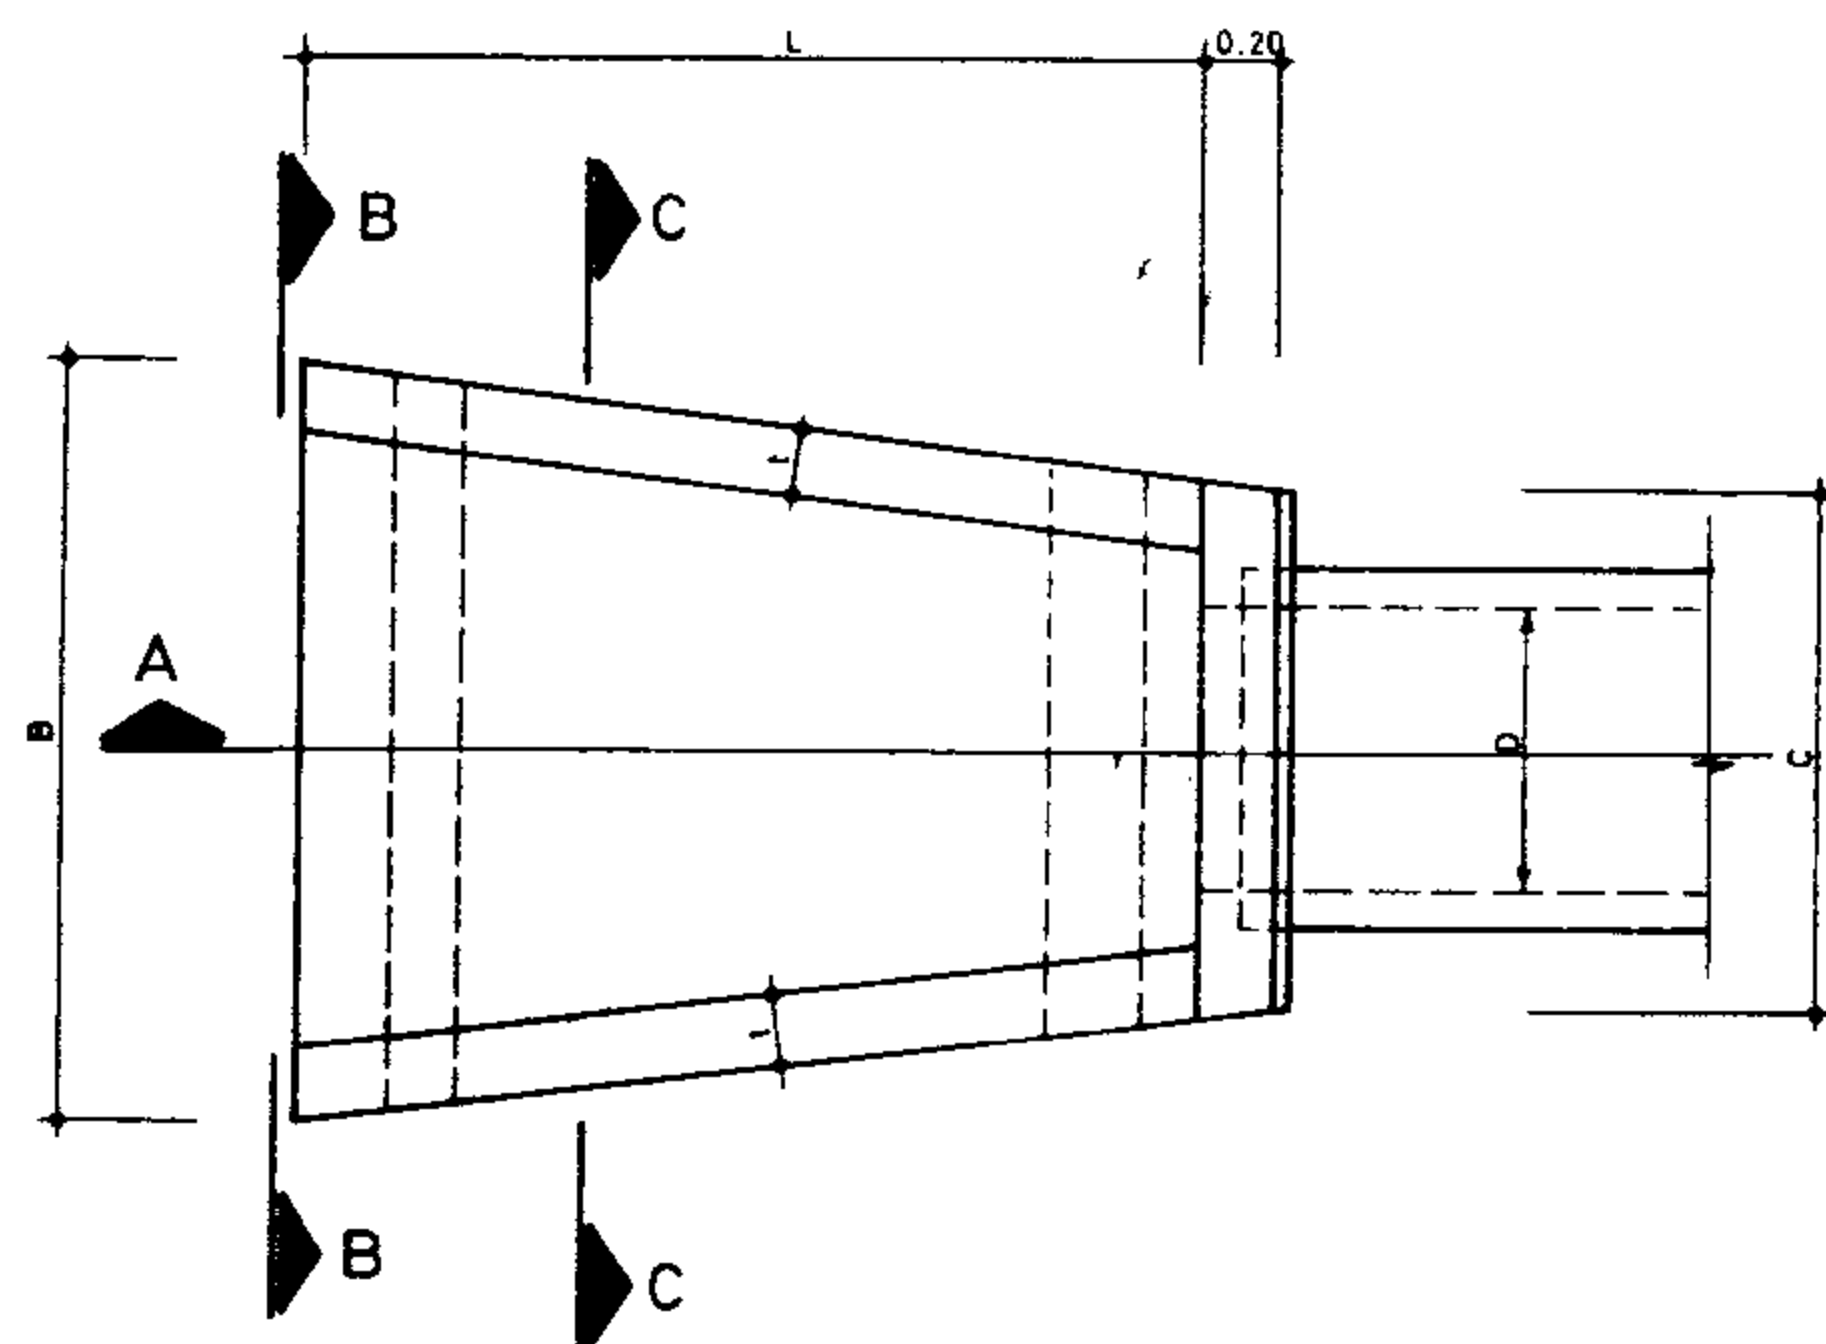


PLAN
Sloped type 2

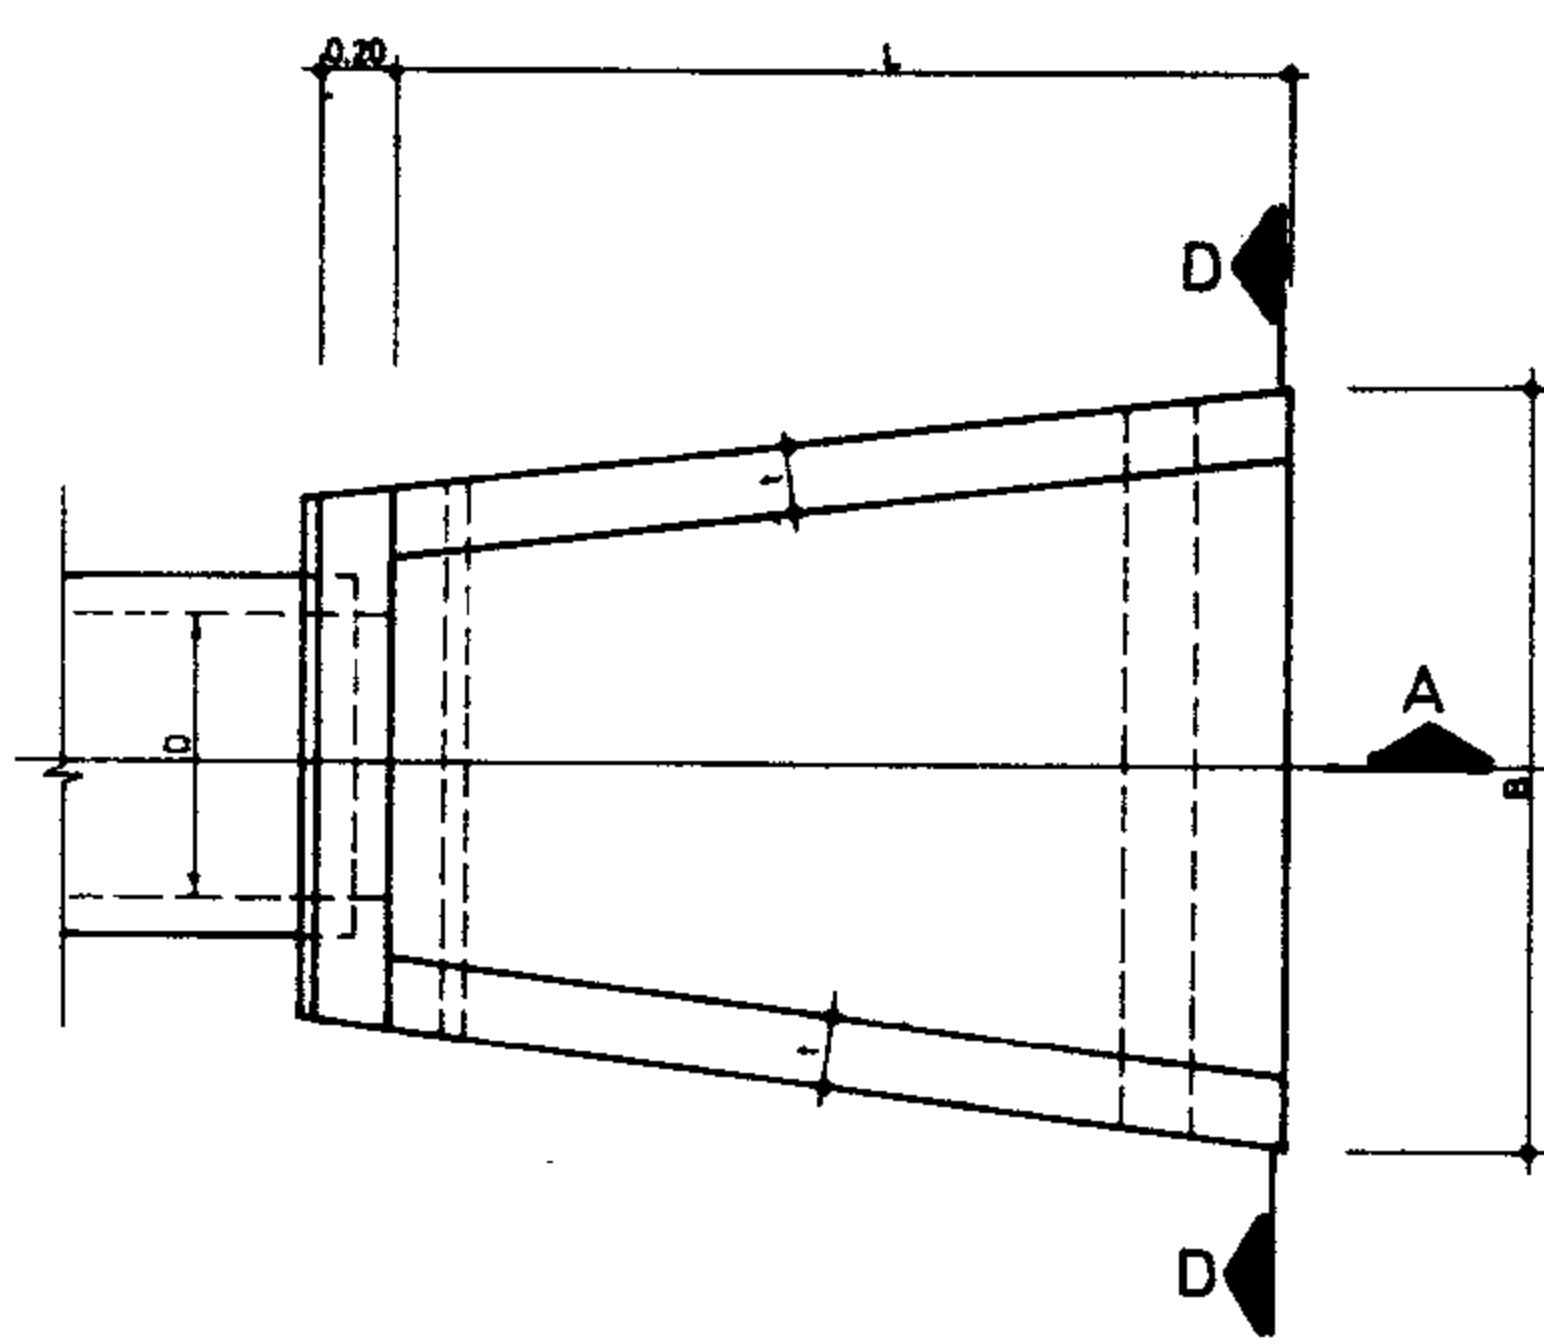


PLAN
Straight type 2

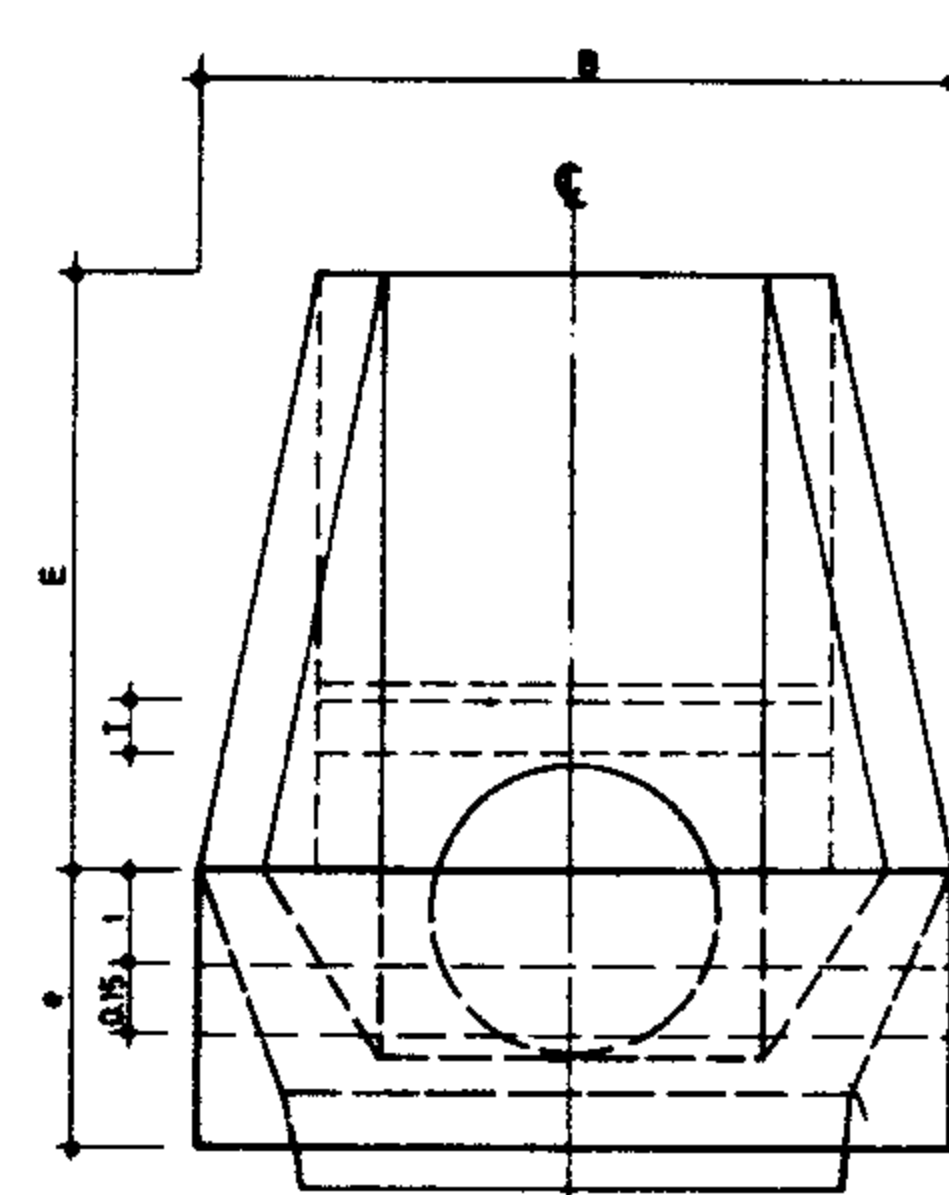


SECTION B-B
Sloped

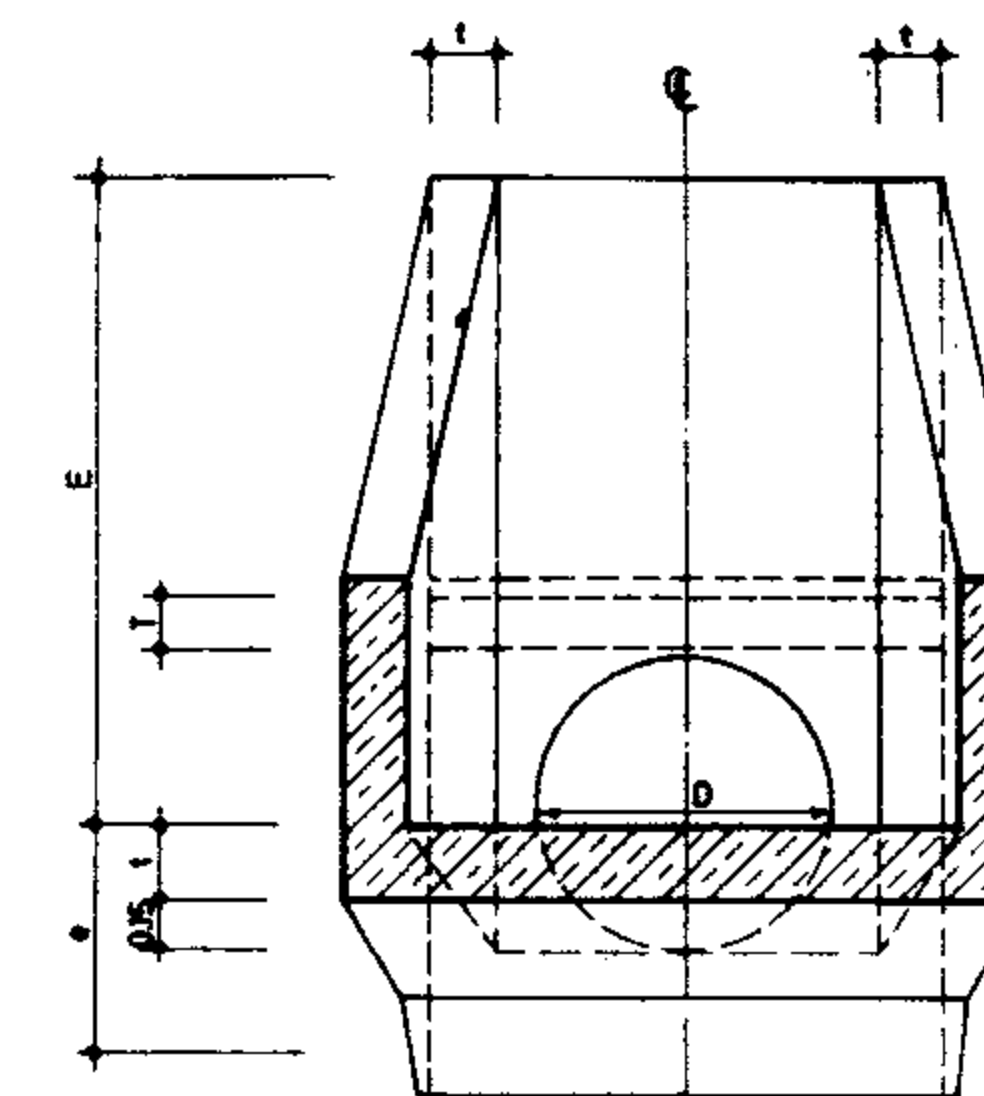


SECTION C-C
Sloped

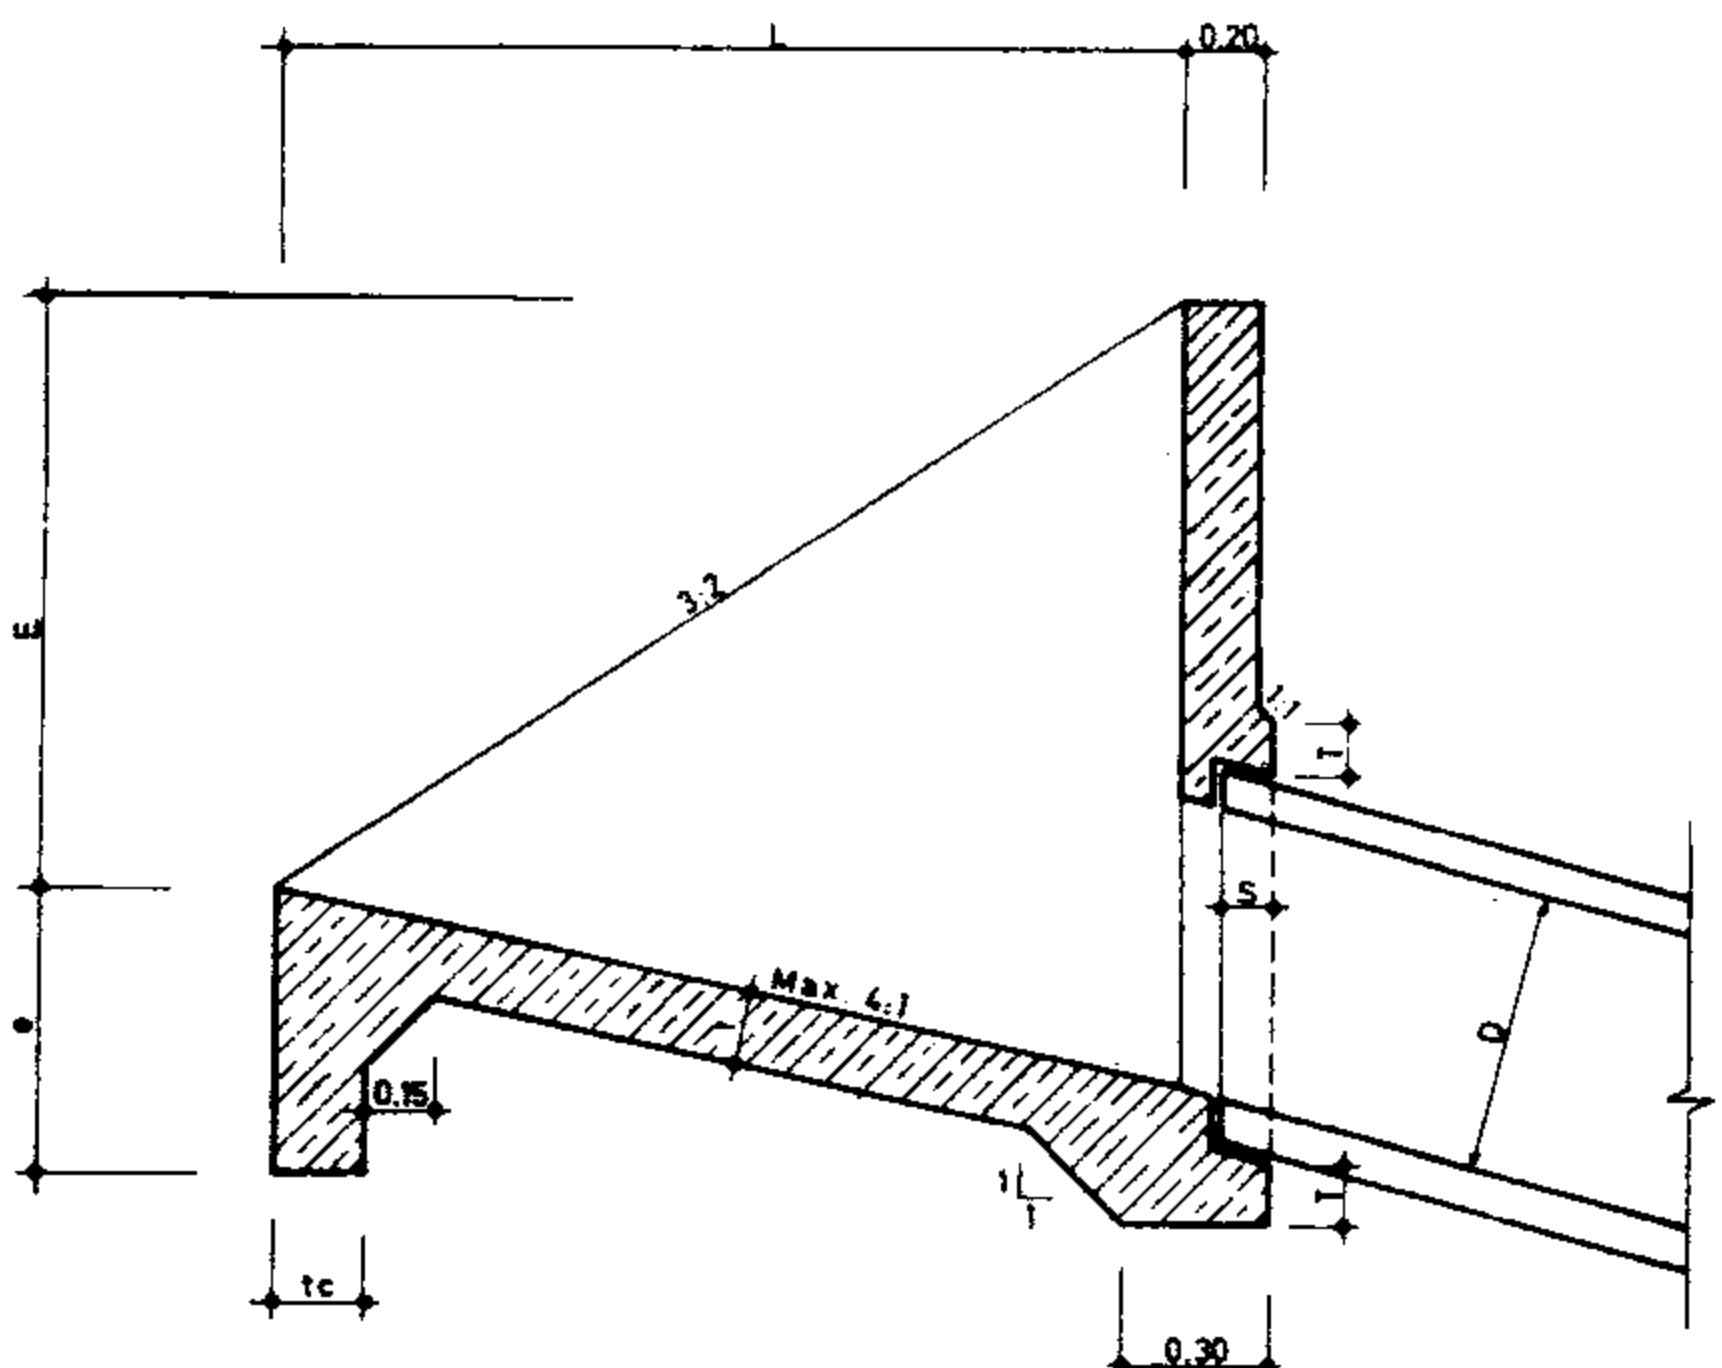

SECTION A-A
Sloped type 2

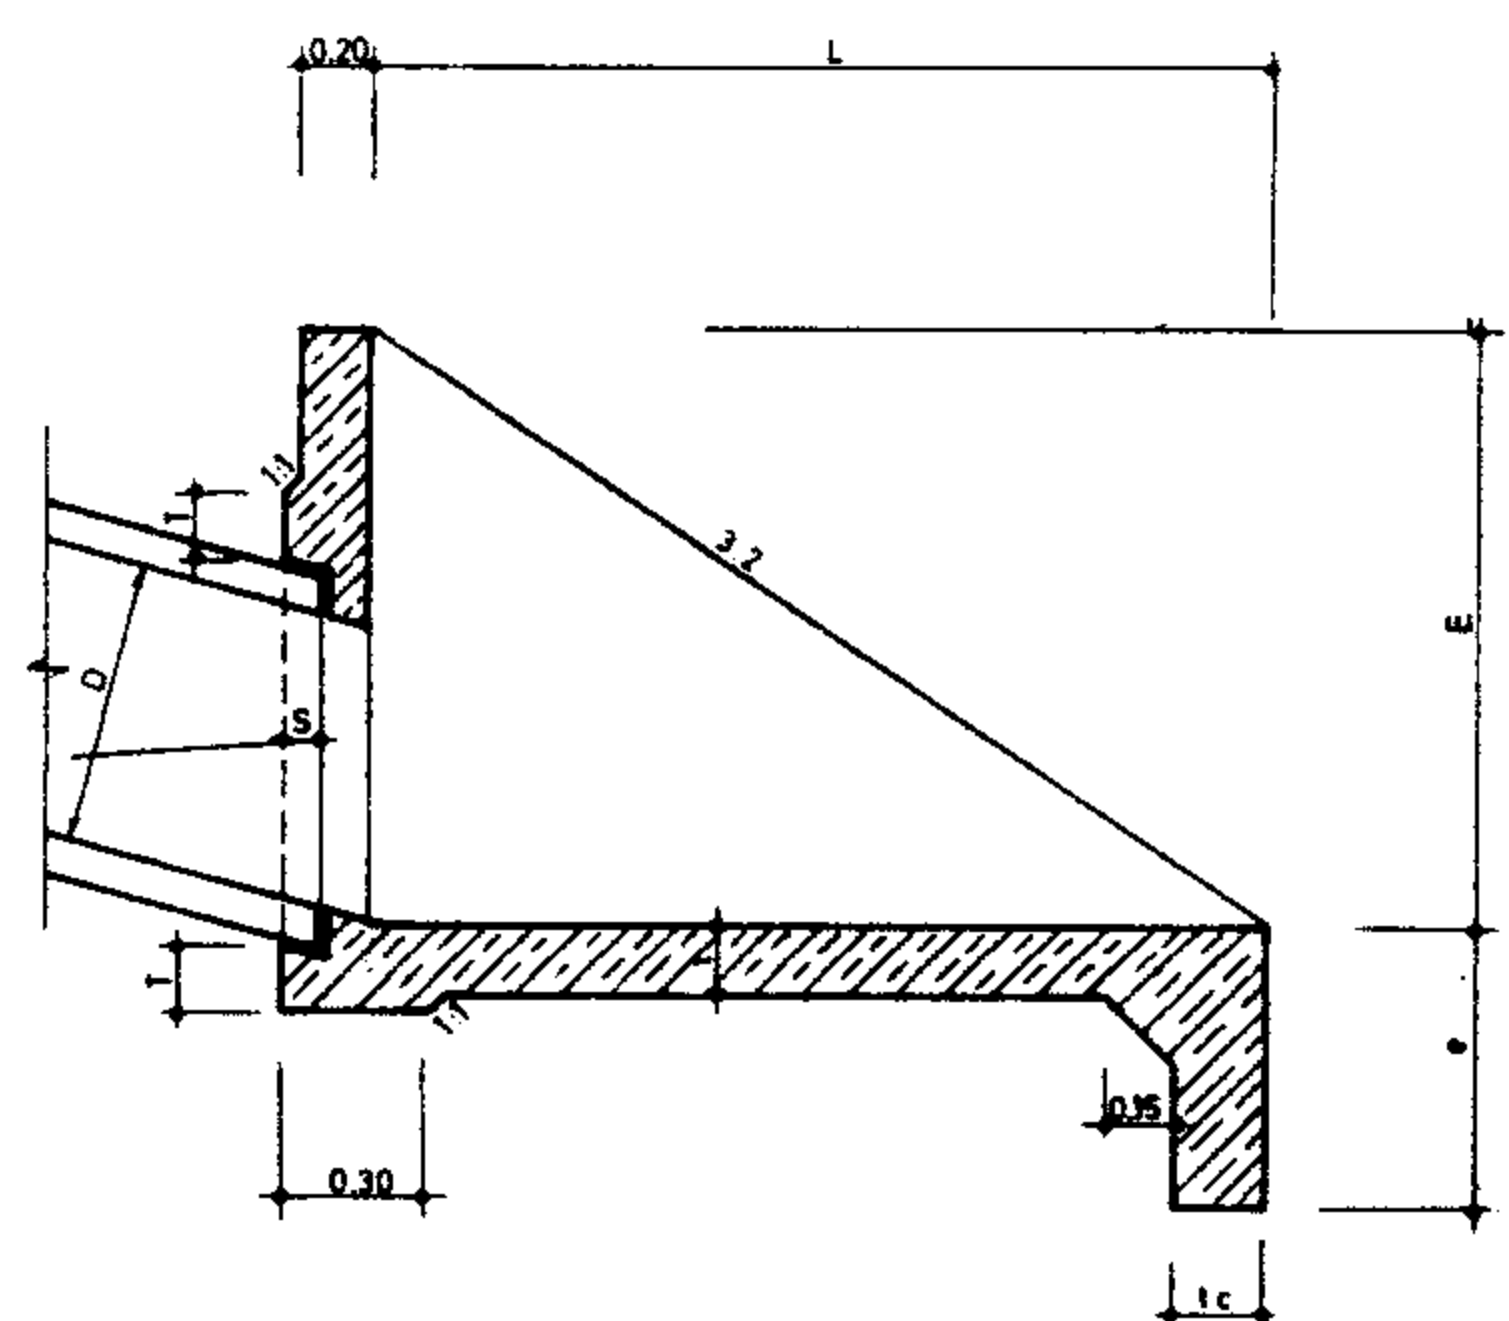

SECTION A-A
Straight type 2

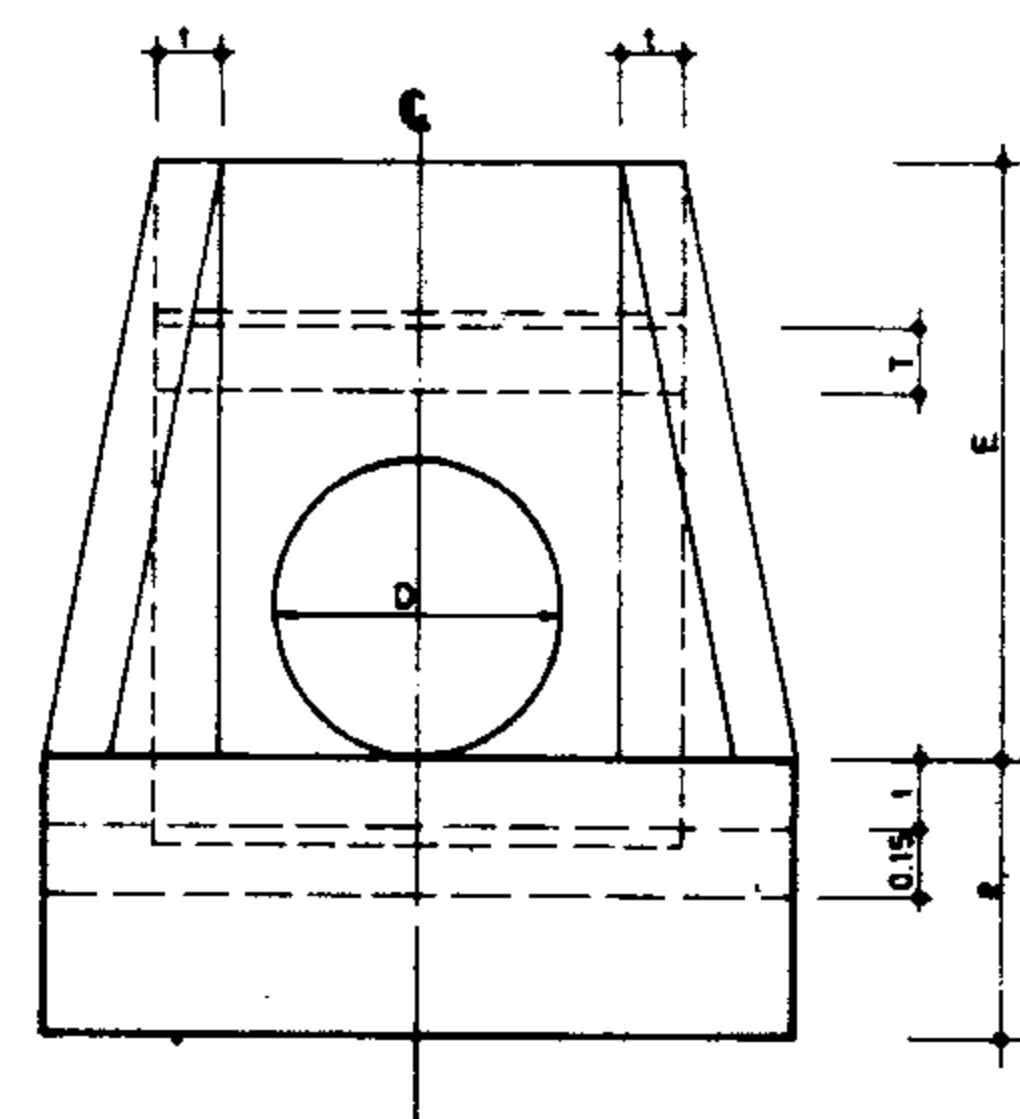

SECTION D-D
Straight

DIMENSION TABLE

Dia.	B	C	E	L	S	T	e	t	tc	R/Bar. Kg.	Conc. m ³	Ferm. m ²	R/Bar. Kg.	Conc. m ³	Ferm. m ²
0.40	1.35	0.85	0.95	1.45	0.10	0.15	0.60	0.15	0.20	87.08	1.03	8.45	78.46	0.77	6.56
0.45	1.40	0.90	1.00	1.55	0.10	0.15	0.60	0.15	0.20	96.91	1.16	9.83	82.84	0.86	7.15
0.50	1.45	1.00	1.10	1.65	0.10	0.15	0.60	0.15	0.20	103.41	1.32	11.08	88.20	0.97	8.51
0.60	1.60	1.10	1.25	1.90	0.10	0.15	0.60	0.15	0.20	125.09	1.65	13.62	105.85	1.19	9.89
0.70	1.70	1.20	1.30	2.10	0.15	0.20	0.60	0.15	0.20	139.95	1.97	15.57	120.36	1.43	11.11
0.80	2.05	1.35	1.40	2.15	0.15	0.20	0.75	0.15	0.25	164.83	2.36	18.18	142.59	1.78	13.35
0.90	2.35	1.45	1.50	2.30	0.20	0.20	0.75	0.15	0.25	191.12	2.75	20.81	168.03	2.09	15.41
1.00	2.65	1.55	1.60	2.45	0.20	0.20	0.75	0.18	0.25	215.42	3.51	23.05	189.62	2.64	17.03
1.20	3.20	1.75	1.80	2.75	0.20	0.20	0.75	0.18	0.25	262.00	4.42	28.52	218.44	3.34	20.66

WITH SLOPE STRAIGHT


NOTES:

- ① Dimensions in the table are for pipe diameters sized for a full pipe flow velocity of 3 m/s, and a free-flow pipe with hydraulic control at the inlet transition headwall.
- ② To prevent degradation at the inlet the invert at the transition cutoff is located at or near existing ground surface.
- ③ The tabulated dimensions provide for freeboard at the inlet headwall. If submergence of the top of the headwall for design flow is not objectionable, the listed transition dimensions may also be used for design flow for a full pipe velocity of 3.5 m/s. In this case a baffled outlet is required.
- ④ A maximum full-pipe flow velocity of 3 m/s is permitted for cross-drainage culvert structures having concrete outlet transitions.


REFERENCE DWGS: For general notes see dwg. N^o 20/2/1/03
 For reinforcement see dwg. N^o 13/7/3/01
 For detail of pipe connection to structure see dwgs. N^o 17/1/1/01 to 17/1/1/03

Scale: N.T.S.	IRRIATION & DRAINAGE STANDARDS	
Date:		
Approved:	DWG N ^o 13/7/1/01	CONCRETE TRANSITION (Type 2)
	Sheet N ^o 1 of 4	Rev N ^o :
		PLAN & SECTION


ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

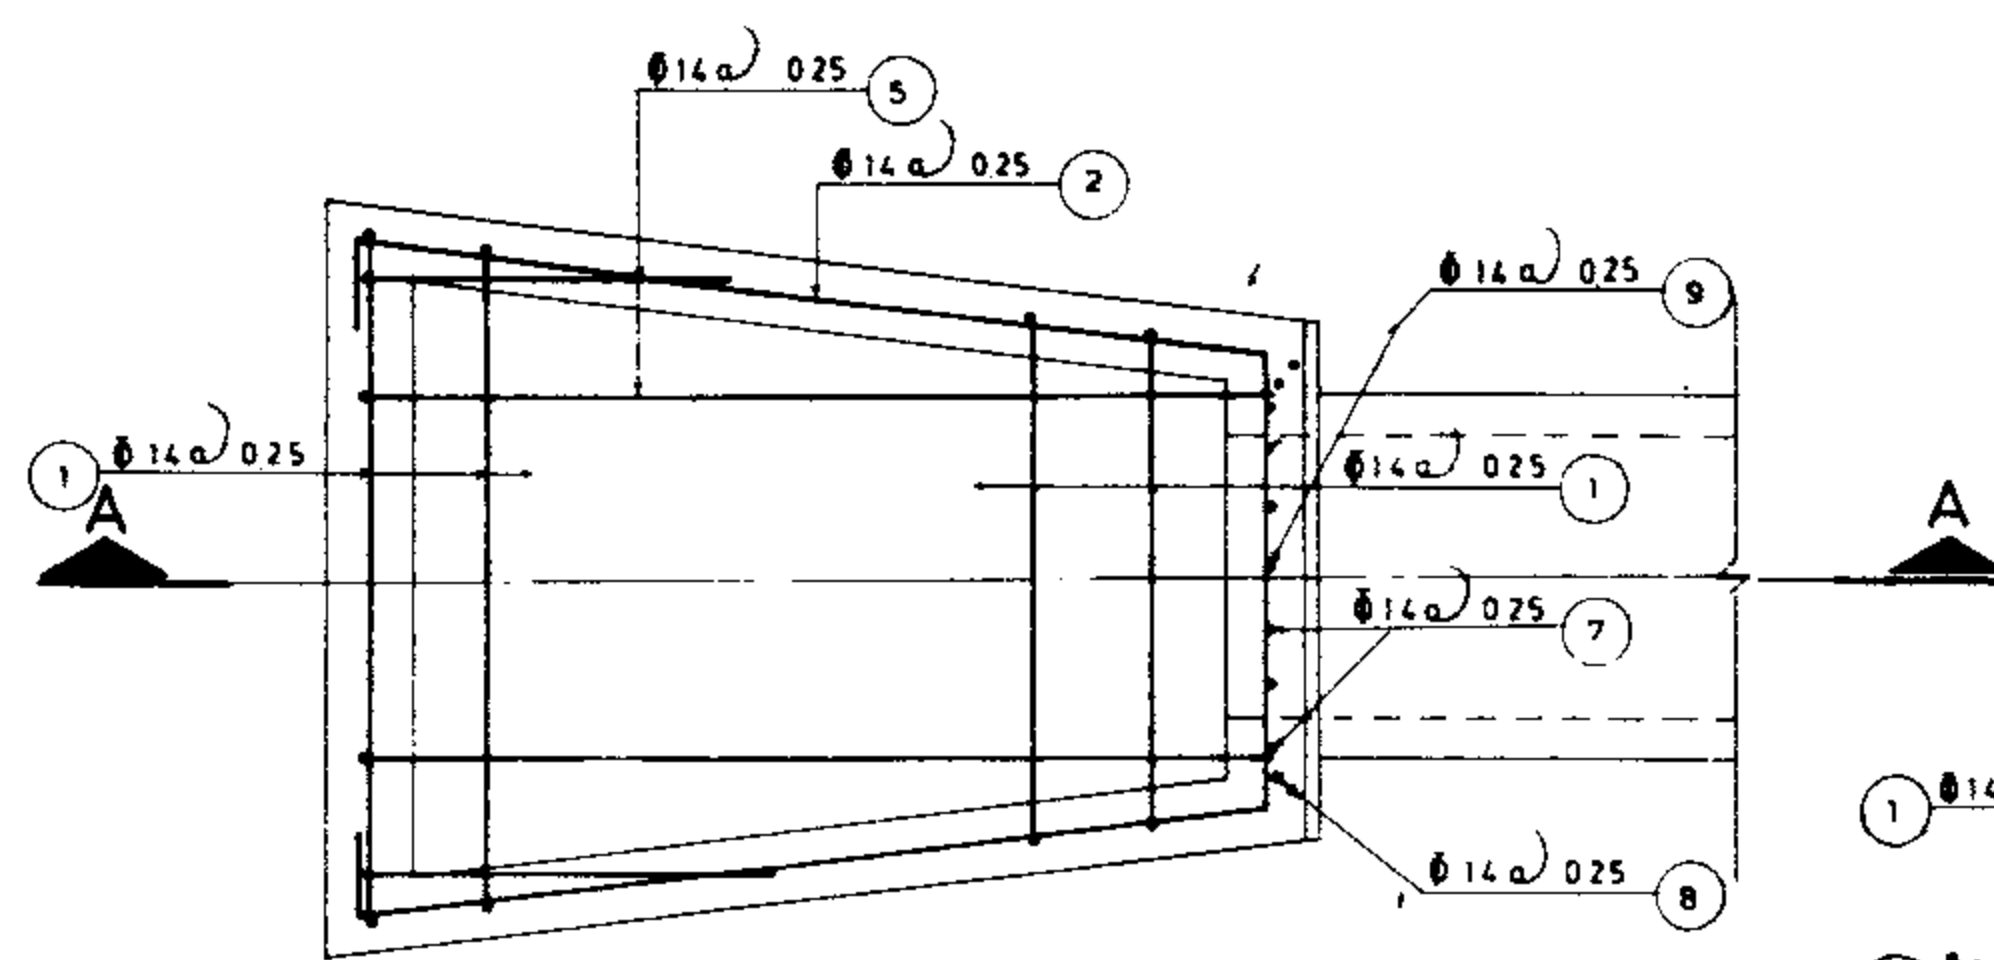


PLAN
Sloped Scale 1:25

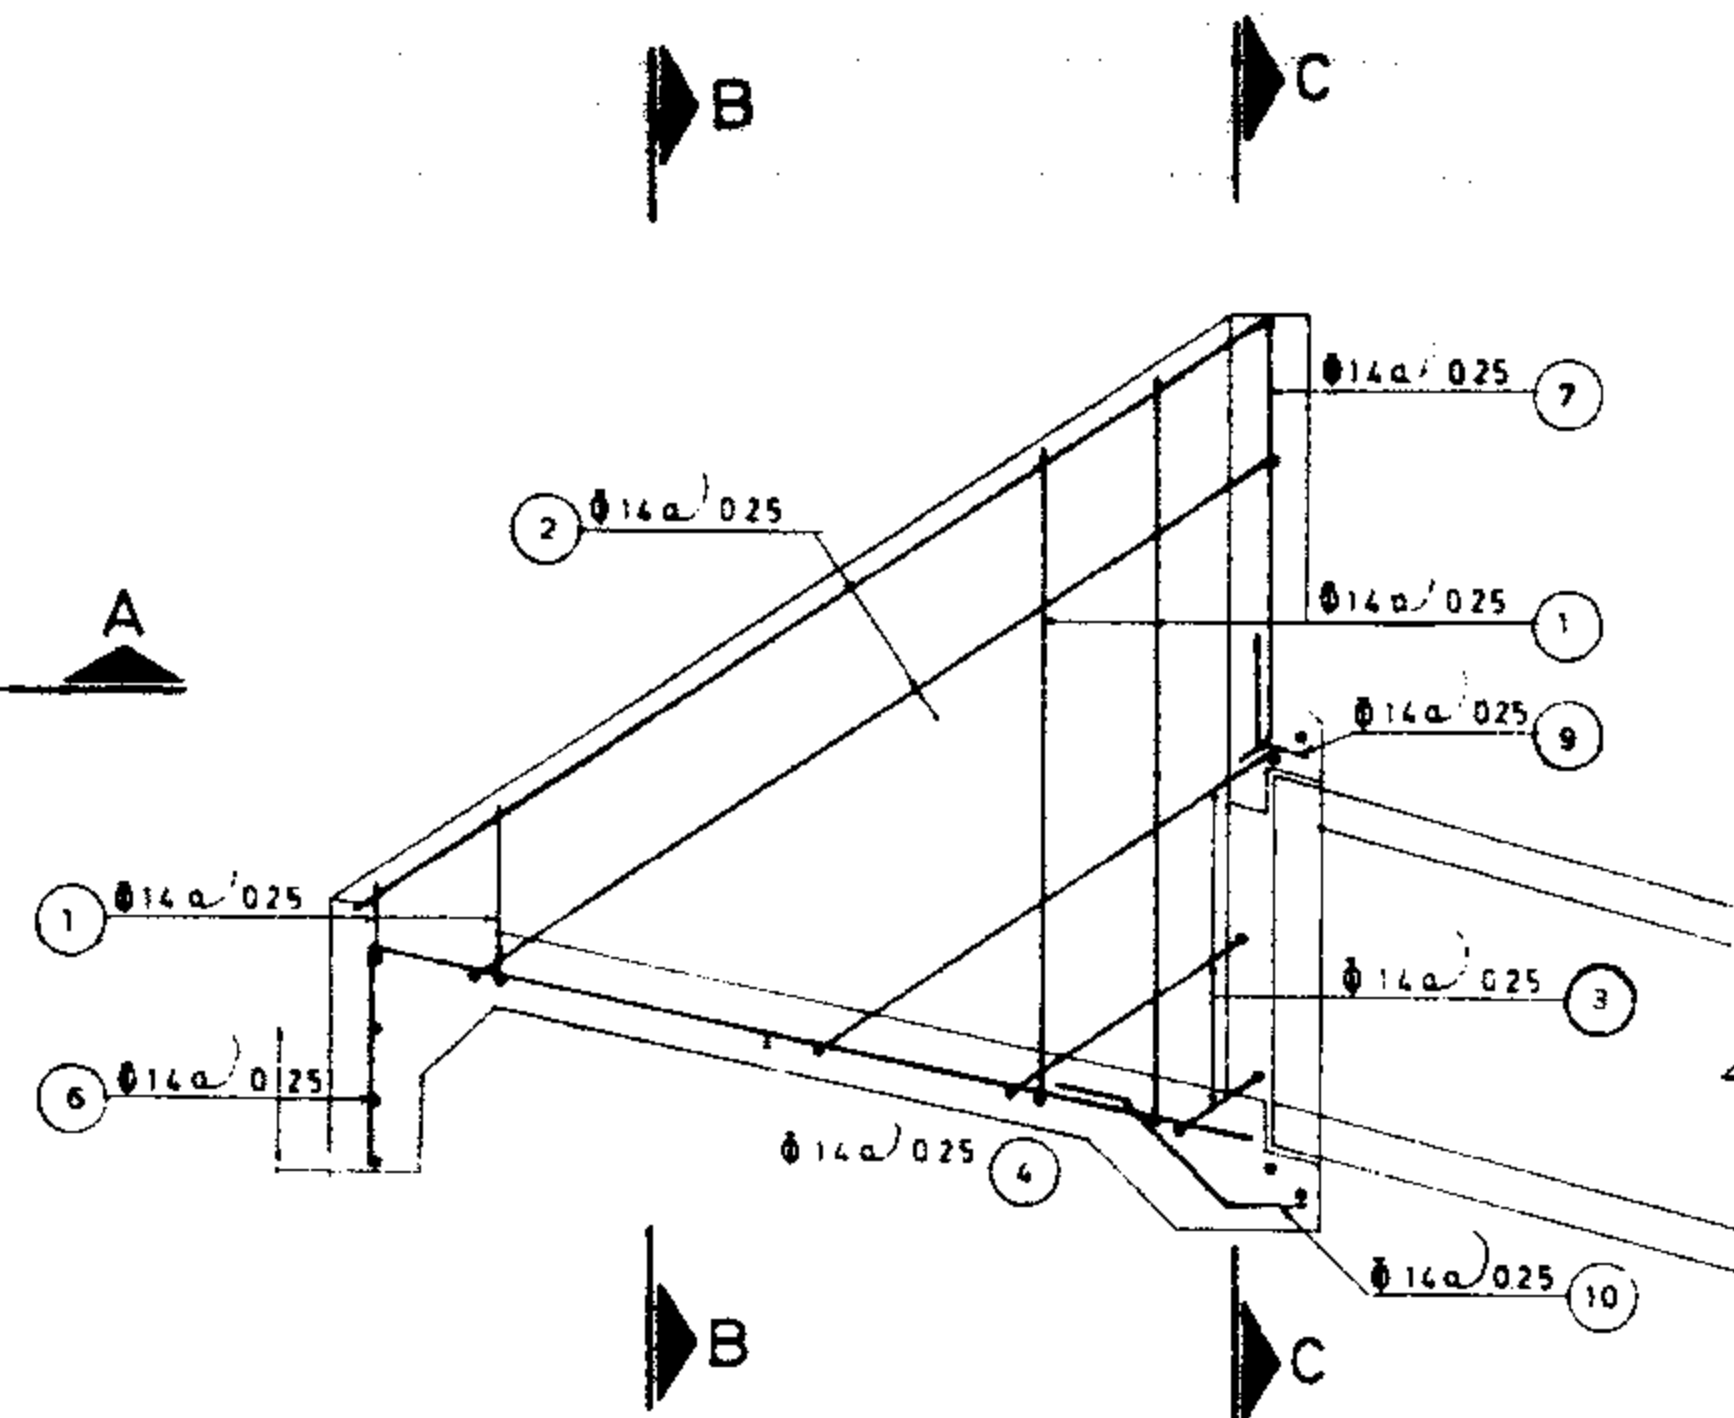


SECTION A-A
Sloped Scale 1:25

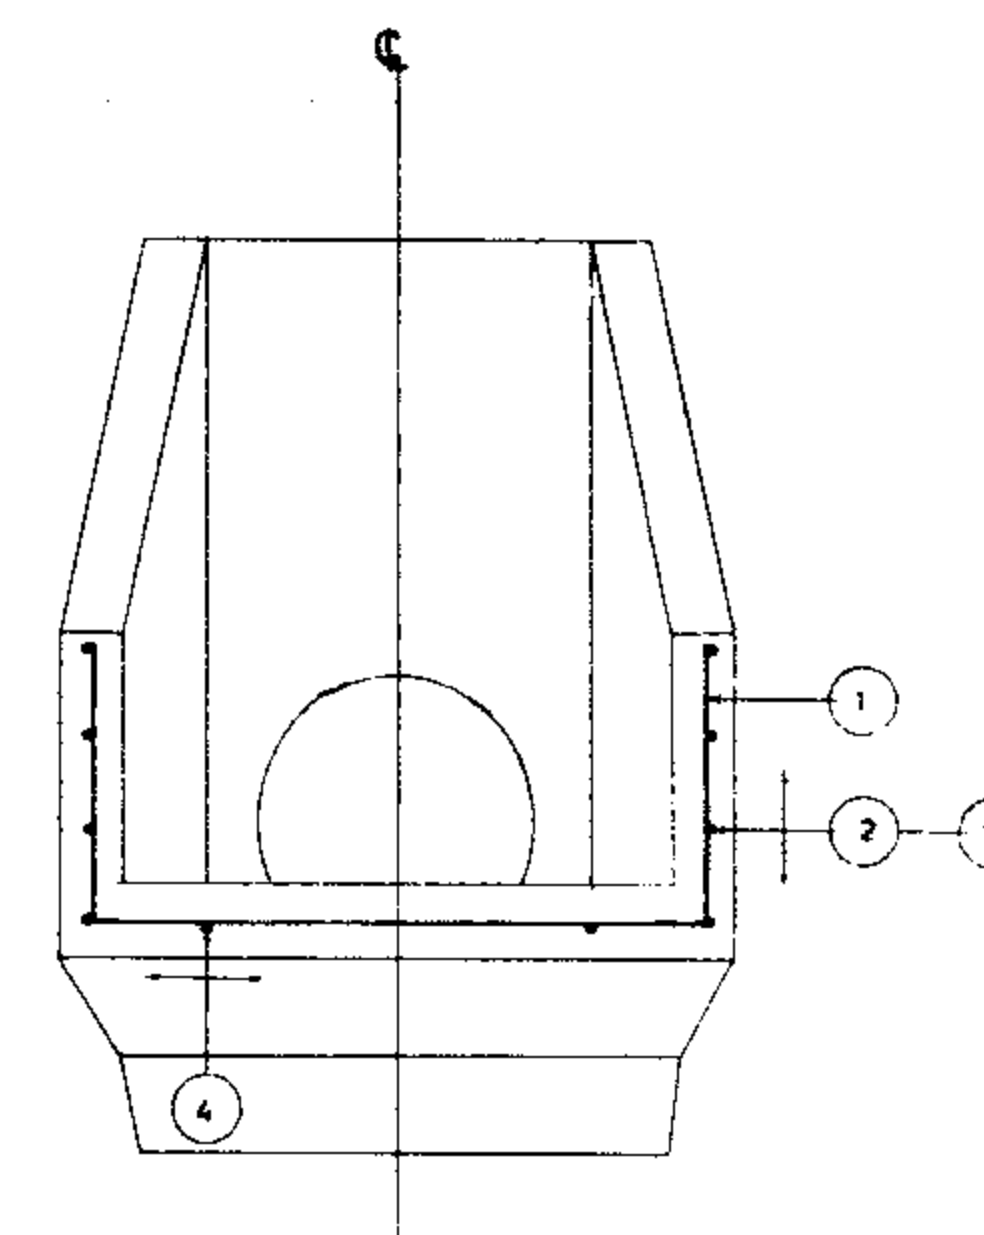


SECTION B-B
Sloped Scale 1:25

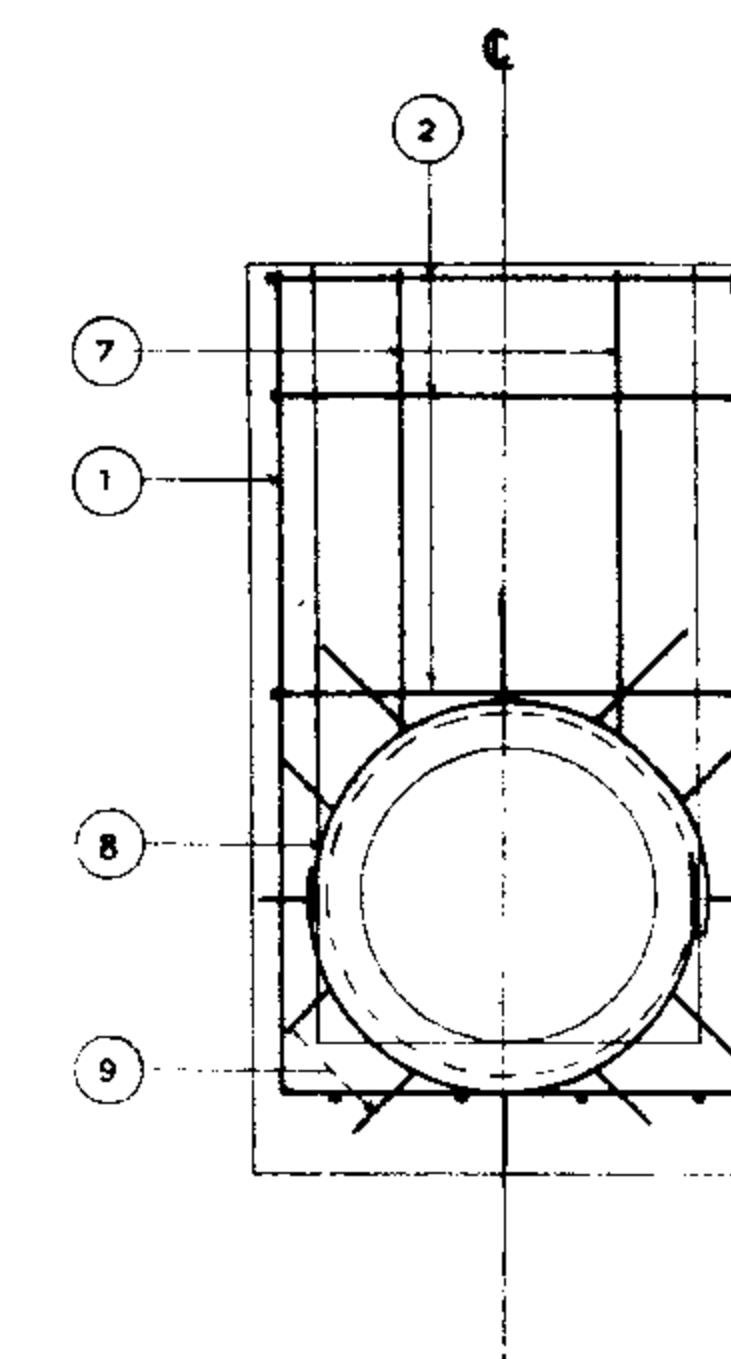


SECTION C-C
Sloped Scale 1:25

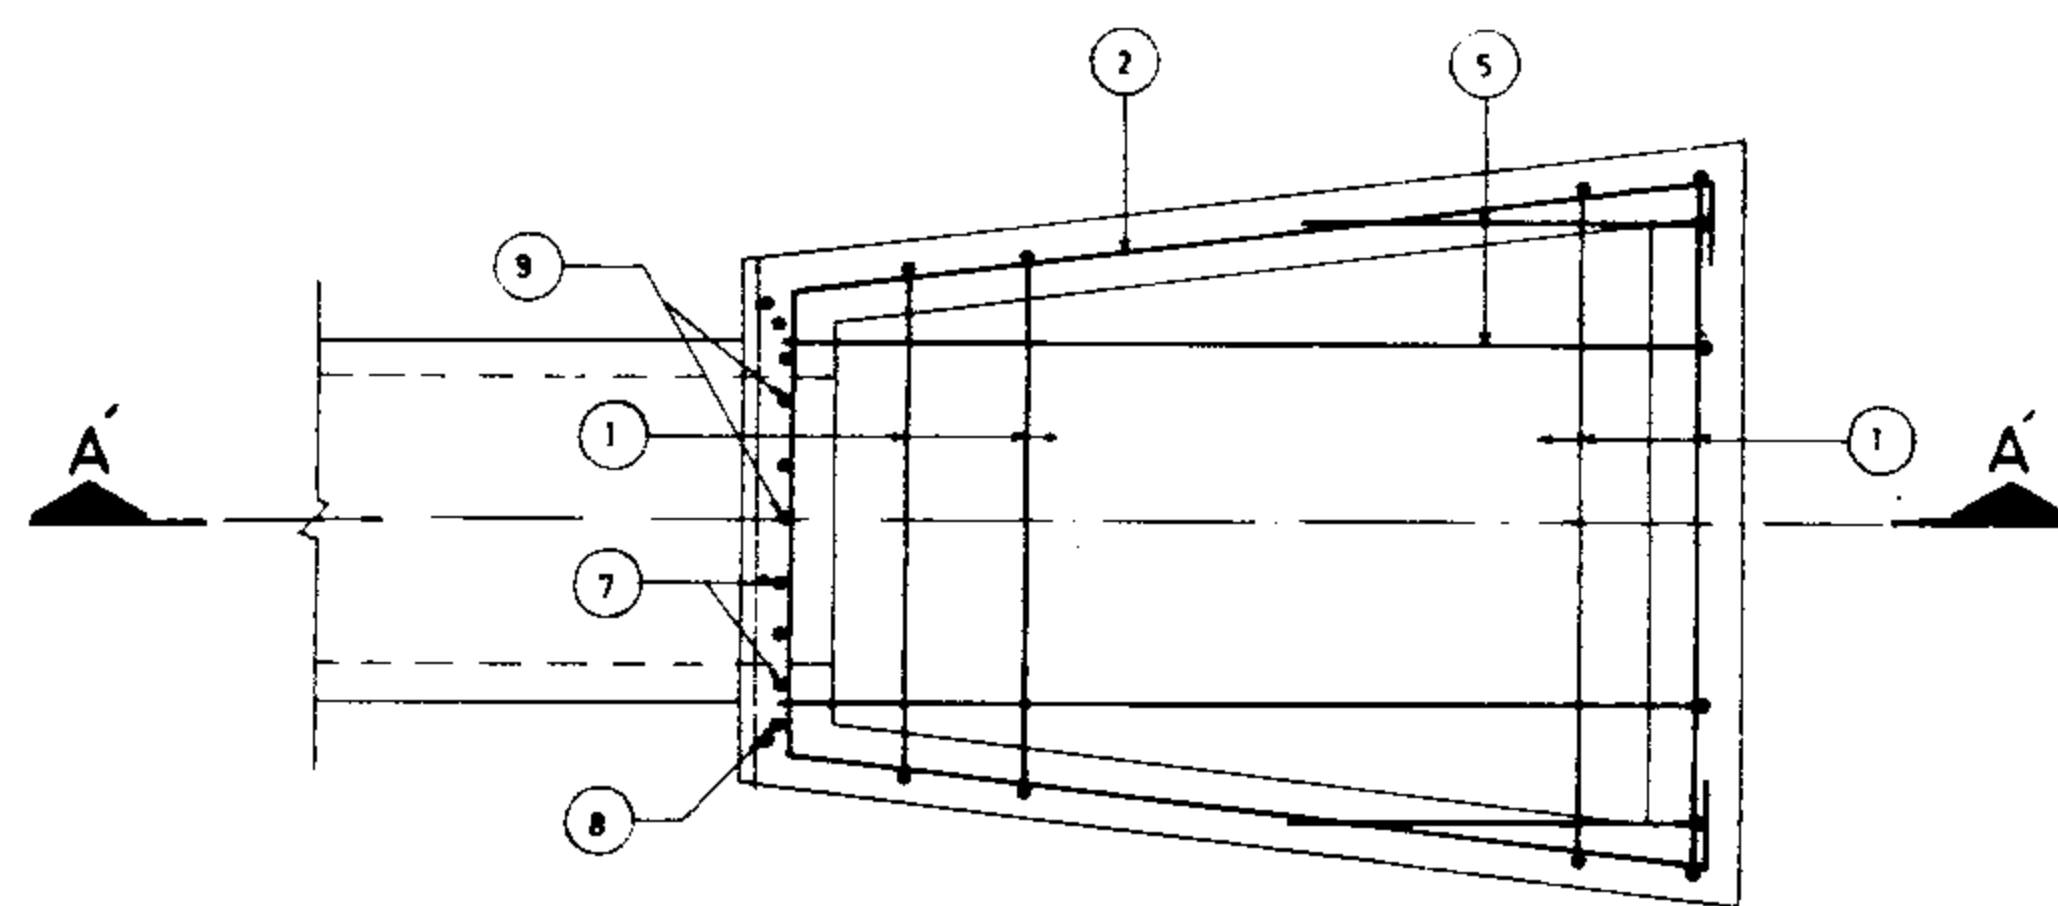


PLAN
Straight Scale 1:25

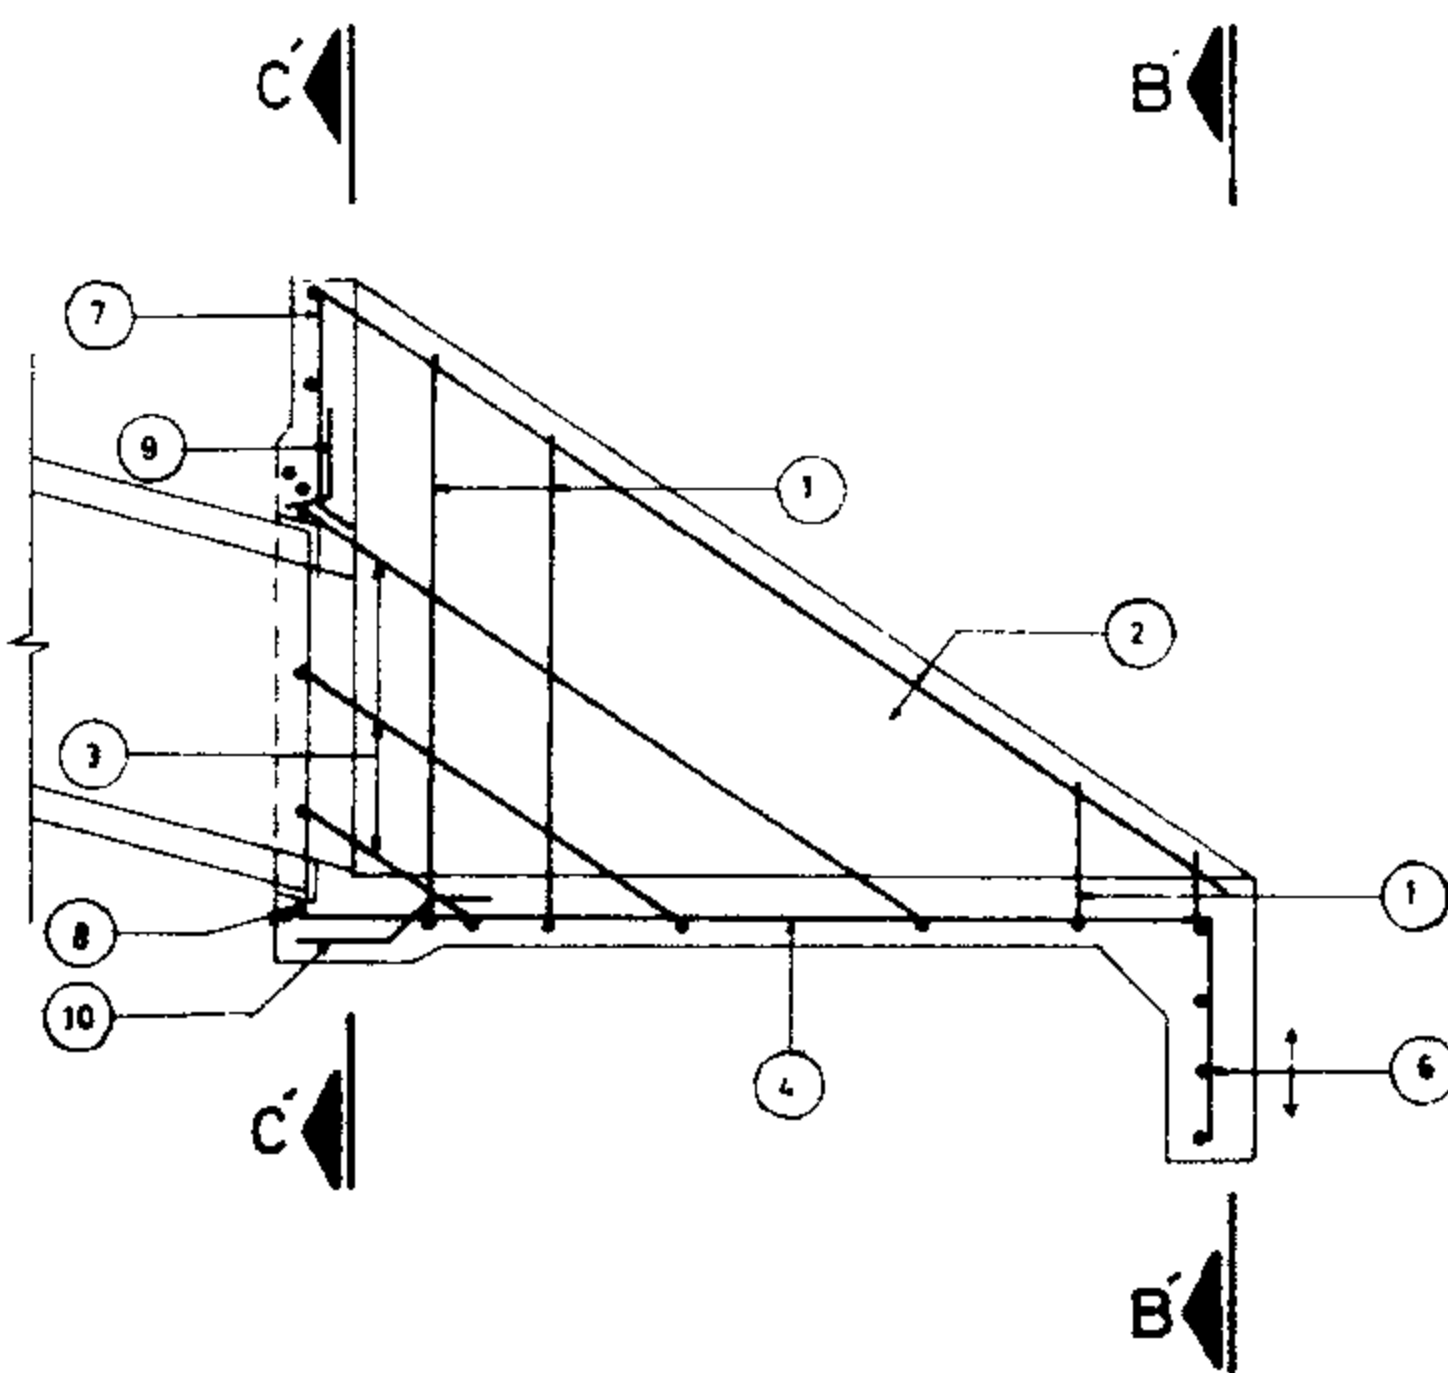

SECTION A-A
Straight Scale 1:25

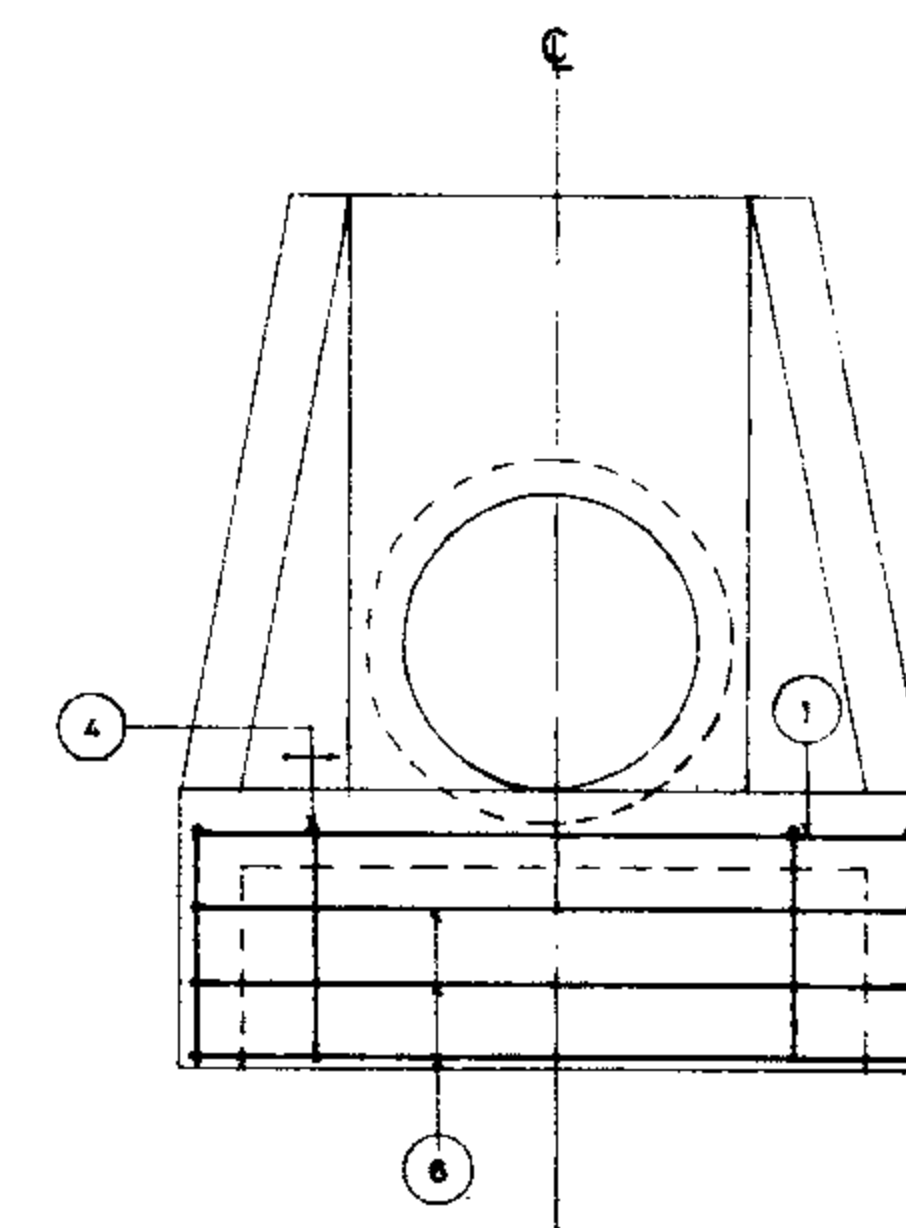

SECTION B-B
Straight Scale 1:25

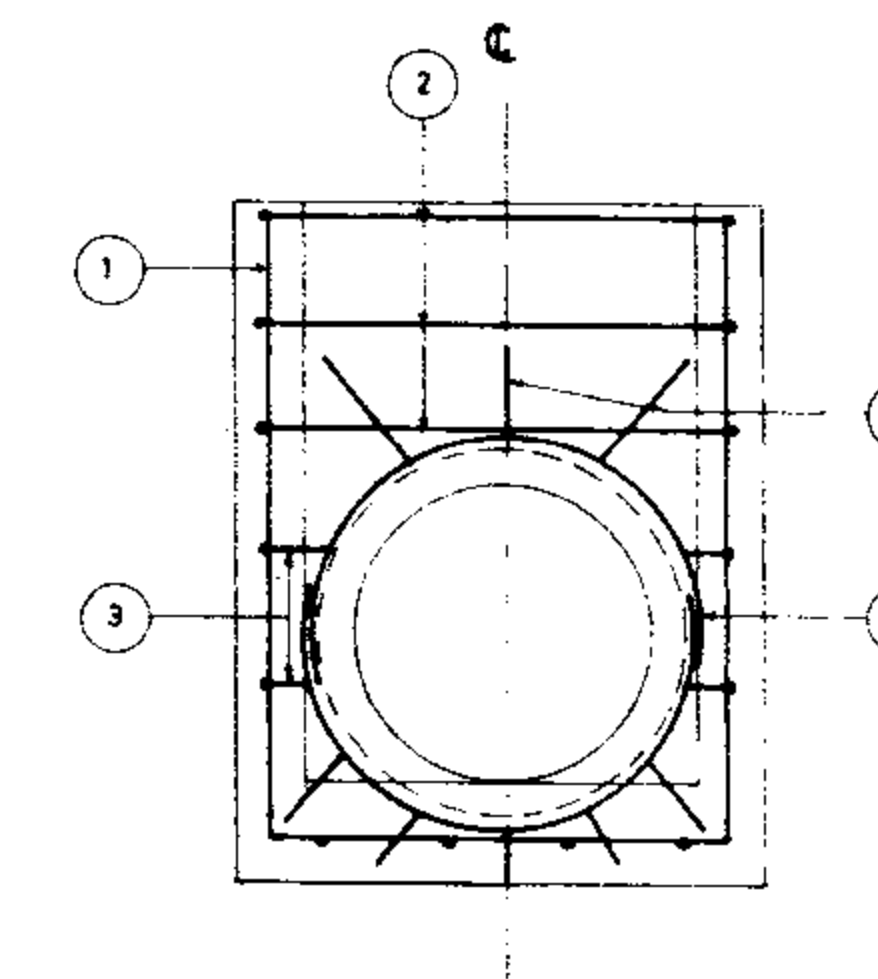

SECTION C-C
Straight Scale 1:25

REFERENCE DWGS: For Plan & Section see dwg. N^o 13/7/1/01
For List of Reinforcement see dwgs. N^o 13/7/3/02 & 13/7/3/03

Scale: 1:25

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG N^o 13/7/3/01

Approved:

Sheet N^o 2 of 4

Rev N^o 7

CONCRETE TRANSITION (TYPE 2)

REINFORCEMENT
PLAN & SECTION

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET

TECHNICAL RESEARCH AND
STANDARD BUREAU

Dia 0.40					Dia 0.45					Dia 0.50					Dia 0.60					Dia 0.70				
POS.	No	FORM	UNIT LENG.	TOTAL LENG.	POS.	No	FORM	UNIT LENG.	TOTAL LENG.	POS.	No	FORM	UNIT LENG.	TOTAL LENG.	POS.	No	FORM	UNIT LENG.	TOTAL LENG.	POS.	No	FORM	UNIT LENG.	TOTAL LENG.
1	7		2.59	18.13	1	8		2.72	21.76	1	8		2.92	23.36	1	9		3.25	29.34	1	10		3.46	34.60
2	4		3.51	14.04	2	4		3.75	15.04	2	4		4.11	16.44	2	4		4.66	18.64	2	4		4.96	19.84
3	6		0.94	5.64	3	8		0.97	7.76	3	8		1.01	8.08	3	8		1.10	8.80	3	10		1.15	11.50
4	3		1.97	5.91	4	3		2.08	6.24	4	3		2.18	6.54	4	4		2.44	9.76	4	4		2.64	10.56
5	4		1.55	6.20	5	4		1.62	6.48	5	4		1.68	6.72	5	4		1.85	7.40	5	4		1.98	7.92
6	3		1.27	3.81	6	3		1.32	3.96	6	3		1.37	4.11	6	3		1.52	4.56	6	3		1.62	4.86
7	5		0.89	4.45	7	5		0.94	4.70	7	5		1.02	5.10	7	6		1.13	6.78	7	6		1.16	6.96
8	2		2.92	5.84	8	2		3.10	6.20	8	2		3.28	6.56	8	2		3.80	7.60	8	2		4.16	8.32
9	7		0.60	4.20	9	7		0.60	4.20	9	8		0.60	4.80	9	10		0.60	6.00	9	11		0.60	6.60
10	5		0.75	3.75	10	5		0.75	3.75	10	5		0.75	3.75	10	6		0.75	4.50	10	6		0.75	4.50
				71.97					80.09					85.46					103.38					115.66
71.97 x 1.21 =				87.08 Kg	80.09 x 1.21 =				96.91 Kg	85.46 x 1.21 =				103.41 Kg	103.38 x 1.21 =				125.09 Kg	115.66 x 1.21 =				139.95 Kg

Dia 0.80					Dia 0.90					Dia 1.00					Dia 1.20				
POS.	No	FORM	UNIT LENG.	TOTAL LENG.	POS.	No	FORM	UNIT LENG.	TOTAL LENG.	POS.	No	FORM	UNIT LENG.	TOTAL LENG.	POS.	No	FORM	UNIT LENG.	TOTAL LENG.
1	10		3.82	38.20	1	11		4.15	45.75	1	11		4.52	49.72	1	12		5.18	62.16
2	4		5.49	21.96	2	4		5.50	23.60	2	4		6.31	25.24	2	5		7.19	35.95
3	10		1.25	12.50	3	12		1.32	15.84	3	12		1.38	16.56	3	14		1.54	21.56
4	5		2.84	14.20	4	5		3.00	15.00	4	6		3.12	18.72	4	6		3.43	20.58
5	6		2.16	12.96	5	6		2.26	13.56	5	8		2.33	18.64	5	8		2.53	20.24
6	3		1.97	5.91	6	3		2.27	6.81	6	3		2.57	7.71	6	3		3.12	9.36
7	7		1.16	8.12	7	7		1.23	8.61	7	8		1.28	10.24	7	8		1.38	11.04
8	2		4.66	9.32	8	3		5.04	15.12	8	3		5.40	16.20	8	3		6.28	18.84
9	13		0.60	7.80	9	14		0.60	8.40	9	15		0.60	9.00	9	18		0.60	10.80
10	7		0.75	5.25	10	7		0.75	6.00	10	8		0.75	6.00	10	8		0.75	6.00
				136.22					157.95					178.03					216.53
136.22 x 1.21 =				164.83 Kg	157.95 x 1.21 =				191.12 Kg	178.03 x 1.21 =				215.42 Kg	216.53 x 1.21 =				262.00 Kg

ALL BARS ARE ϕ 14 (1.21 Kg/m)

REFERENCE DWGS. For Reinforcement see dwg. No 13/7/3/01
For bars with variable unit length see note under the same title at dwg. No 20/2/1/01

Scale: IRRIGATION & DRAINAGE STANDARDS
Date: DWG No 13/7/3/02
Approved: Sheet No: 3 of 4 Rev No:

CONCRETE TRANSITION (TYPE 2)
LIST OF REINFORCEMENT (SLOPED)

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

Dia 0.40					Dia 0.45					Dia 0.50					Dia 0.60					Dia 0.70				
POS.	Nº	FORM	UNIT LENG.	TOTAL LENG.	POS.	Nº	FORM	UNIT LENG.	TOTAL LENG.	POS.	Nº	FORM	UNIT LENG.	TOTAL LENG.	POS.	Nº	FORM	UNIT LENG.	TOTAL LENG.	POS.	Nº	FORM	UNIT LENG.	TOTAL LENG.
1	7		2.23	15.61	1	8		2.33	18.64	1	8		2.51	20.08	1	9		2.78	25.02	1	10		2.93	29.30
2	2		3.82	7.64	2	2		4.05	8.10	2	2		4.42	8.84	2	2		5.04	10.08	2	2		5.41	10.82
3	6		1.13	6.78	3	8		1.12	8.96	3	8		1.16	9.28	3	8		1.29	10.32	3	10		1.38	13.80
4	5		1.90	9.50	4	3		2.03	6.09	4	3		2.13	6.39	4	4		2.38	9.52	4	4		2.58	10.32
5	4		1.53	6.12	5	4		1.59	6.36	5	4		1.66	6.64	5	4		1.82	7.28	5	4		1.95	7.80
6	3		1.27	3.81	6	3		1.32	3.96	6	3		1.37	4.11	6	3		1.52	4.56	6	3		1.62	4.86
7	3		0.53	1.59	7	4		0.55	2.20	7	4		0.61	2.44	7	4		0.65	2.60	7	5		0.63	3.15
8	2		2.92	5.84	8	2		3.10	6.20	8	2		3.28	6.56	8	2		3.80	7.60	8	2		4.16	8.32
9	7		0.60	4.20	9	7		0.60	4.20	9	8		0.60	4.80	9	10		0.60	6.00	9	11		0.60	6.60
10	5		0.75	3.75	10	5		0.75	3.75	10	5		0.75	3.75	10	6		0.75	4.50	10	6		0.75	4.50
				64.84					68.46					72.89					87.48					99.47
64.84 x 1.21 =				78.46 Kg	68.46 x 1.21 =				82.84 Kg	72.89 x 1.21 =				88.20 Kg	87.48 x 1.21 =				105.85 Kg	99.47 x 1.21 =				120.36 Kg

Dia 0.80					Dia 0.90					Dia 1.00					Dia 1.20				
POS.	Nº	FORM	UNIT LENG.	TOTAL LENG.	POS.	Nº	FORM	UNIT LENG.	TOTAL LENG.	POS.	Nº	FORM	UNIT LENG.	TOTAL LENG.	POS.	Nº	FORM	UNIT LENG.	TOTAL LENG.
1	10		3.28	32.80	1	11		3.58	39.38	1	11		3.88	42.68	1	12		4.49	53.88
2	2		5.99	11.98	2	2		6.45	12.90	2	2		6.91	13.82	2	2		7.90	15.80
3	10		1.50	15.00	3	12		1.59	19.08	3	12		1.68	20.16	3	14		1.50	21.00
4	5		2.78	13.90	4	5		2.93	14.65	4	6		3.08	18.48	4	6		3.35	20.10
5	6		2.13	12.78	5	6		2.23	13.38	5	8		2.33	18.64	5	8		2.49	19.92
6	3		1.97	5.91	6	3		2.27	6.81	6	3		2.57	7.71	6	3		3.12	9.36
7	5		0.62	3.10	7	6		0.65	3.90	7	6		0.67	4.02	7	7		0.69	4.83
8	2		4.66	9.32	8	3		5.04	15.12	8	3		5.40	16.20	8	3		6.28	18.84
9	13		0.60	7.80	9	14		0.60	8.40	9	15		0.60	9.00	9	18		0.60	10.80
10	7		0.75	5.25	10	7		0.75	5.25	10	8		0.75	6.00	10	8		0.75	6.00
				117.84					138.87					156.71					180.53
117.84 x 1.21 =				142.59 Kg	138.87 x 1.21 =				168.03 Kg	156.71 x 1.21 =				189.62 Kg	180.53 x 1.21 =				218.44 Kg

ALL BARS ARE $\phi 14$ (1.21 Kg/m)

REFERENCE DWGS: For Reinforcement see dwg. N^o 13/7/3/01
For bars with variable unit length see note under the same title at dwg. N^o 20/2/1/01

Scale: IRRIGATION & DRAINAGE STANDARDS
Date: DWG. N^o 13/7/3/03
Approve: Sheet N^o 4 of 4 Rev: N^o
CONCRETE TRANSITION (TYPE 2)
LIST OF REINFORCEMENT (STRAIGHT)

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU

DIMENSION INFORMATION

- Let :
- D = Pipe diameter
 - L = Transition length
 - C = Base width at cutoff wall
 - d = Depth of water
 - θ = Water surface angle

-Freeboard at the transition cutoff adjacent to concrete canal lining or other hard surface or buried membrane canal lining shall be selected according to the following table.

Water Depth at Cutoff (m)	Minimum Freebord (cm)
$d \leq 0.35$	15
$0.35 < d \leq 0.60$	23
$0.60 < d \leq 1.50$	30

The following relationship between the dimension should be considered:

- $L = 3D$
- Dimension B is chosen so that the 1.5 to 1 sloping walls are approximately tangent to the opening at the headwall for simplification let.
 $B = 303 D$
- C dimension is dependent to the water surface angle.

-The invert at the headwall opening is established by the required submergence of the top of the opening as discussed under design consideration.
-P value is difference in elevation of the invert at the transition cutoff and at the headwall opening.

$P \leq \frac{3}{4} D$ for inlet

$P \leq \frac{1}{2} D$ for outlet

-Y=Water depth at cutoff(d)+freebord at cutoff
- $a = \frac{D}{\cos \theta} + 1.5 \left(\frac{V^2}{2g} + \frac{V^2}{2g} \right) + \text{freebord at cutoff}$ Y+P

For $D \leq 600$ mm a may be taken equal to Y+P
For $D > 600$ mm a shall be taken greater than Y+P
Dimension τ and t_w may be determined according to the following table.

Depth of water in canal (d) (m)	e (m)	t_w (m)
$d \leq 90$	0.60	0.15
$90 < d \leq 1.80$	0.75	0.20
$1.80 < d$	0.90	0.20

From the above fig:









$C = 2L \tan \theta - 3d + D$

or

$C = (6 \tan \theta + 1) D - 3d$

-Dimension C could be calculated easily by using the following table.










$\frac{D}{d}$ ratio	$\theta = 22.5^\circ$	$\theta = 25^\circ$	$\theta = 27.5^\circ$
1	$C = 0.5 D$	$C = 0.8 D$	$C = 1.1 D$
1.25	$C = 1.1 D$	$C = 1.4 D$	$C = 1.7 D$
1.50	$C = 1.5 D$	$C = 1.8 D$	$C = 2.1 D$
2	$C = 2 D$	$C = 2.3 D$	$C = 2.6 D$

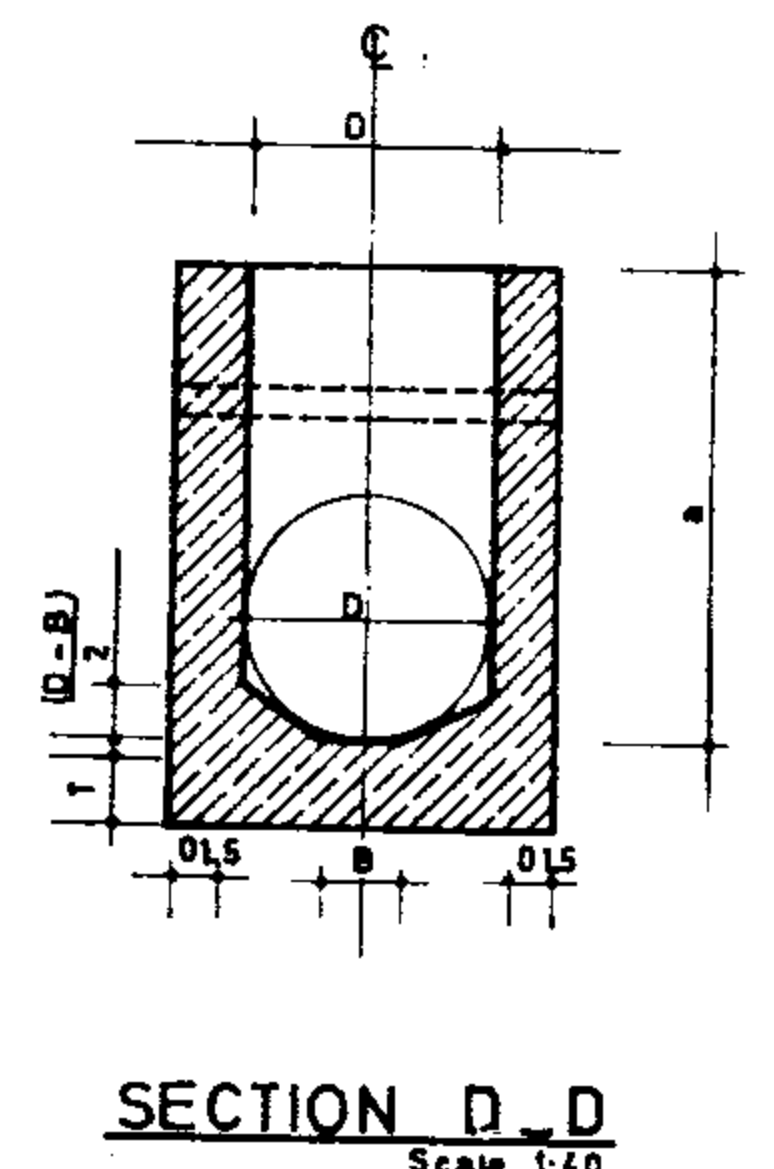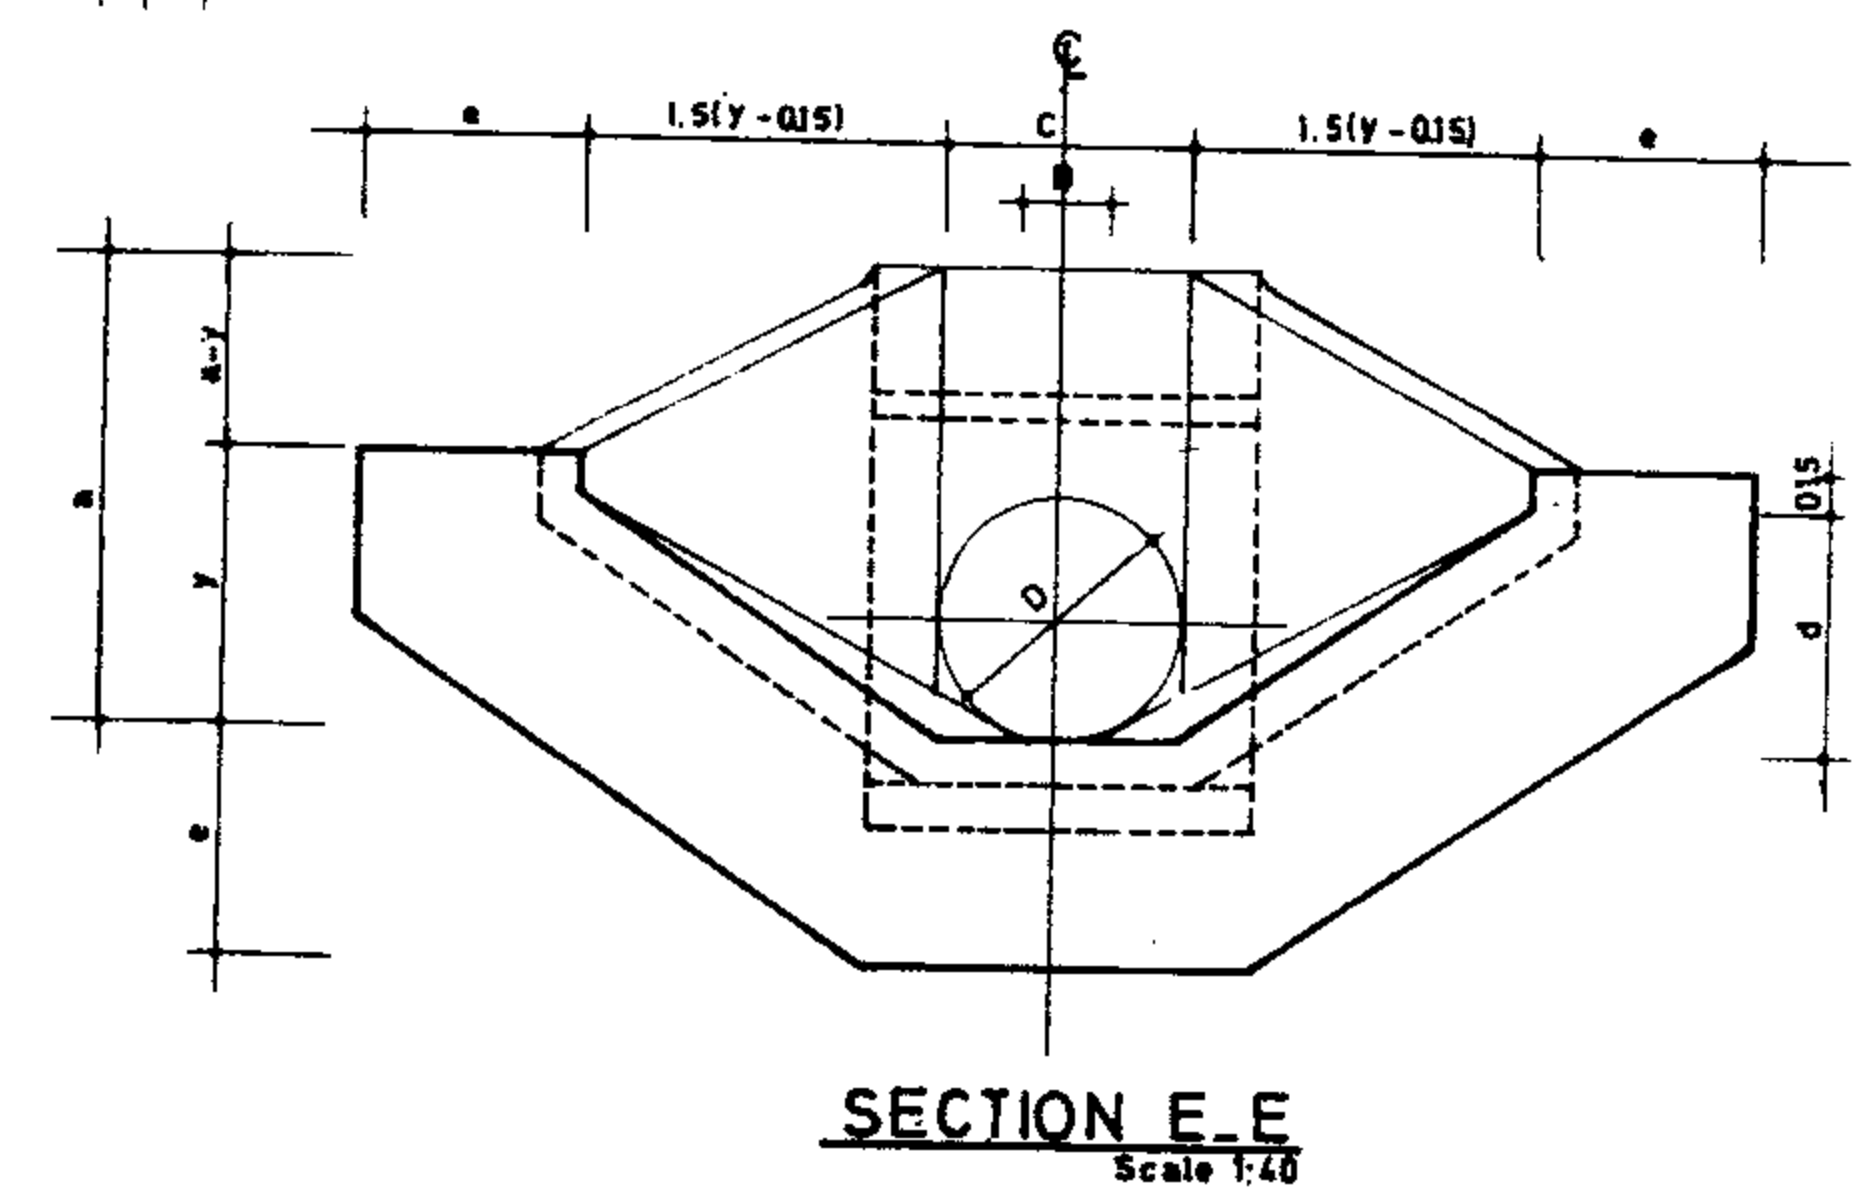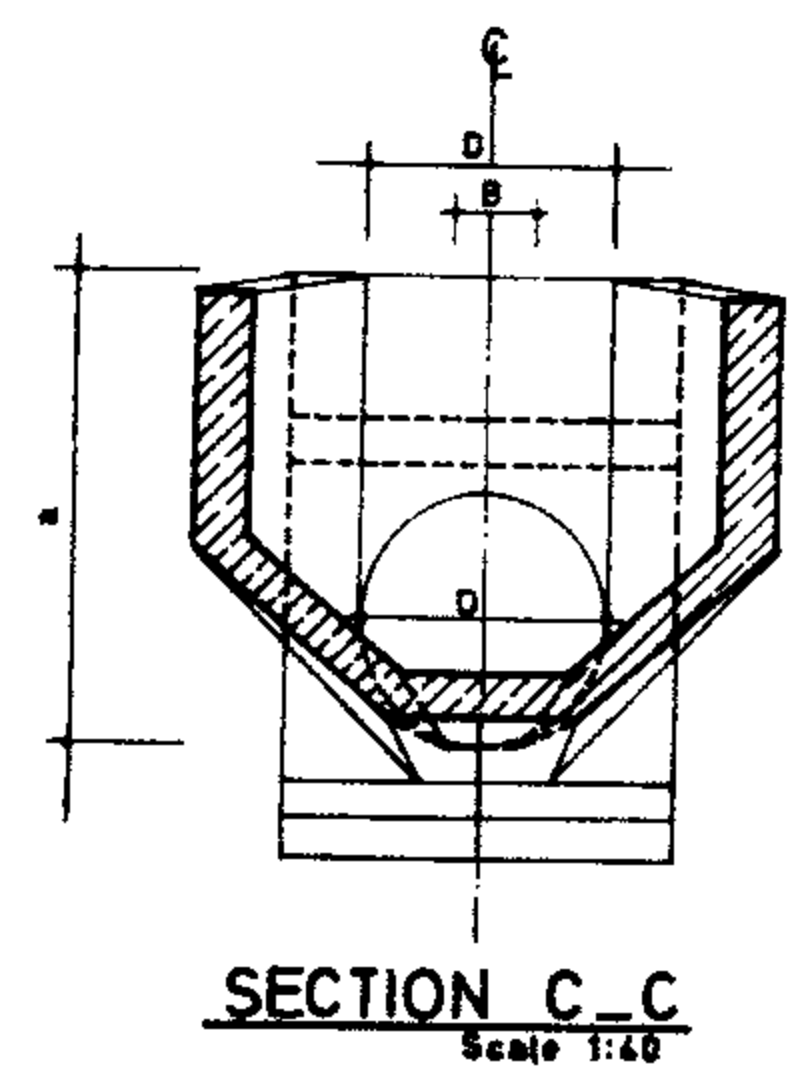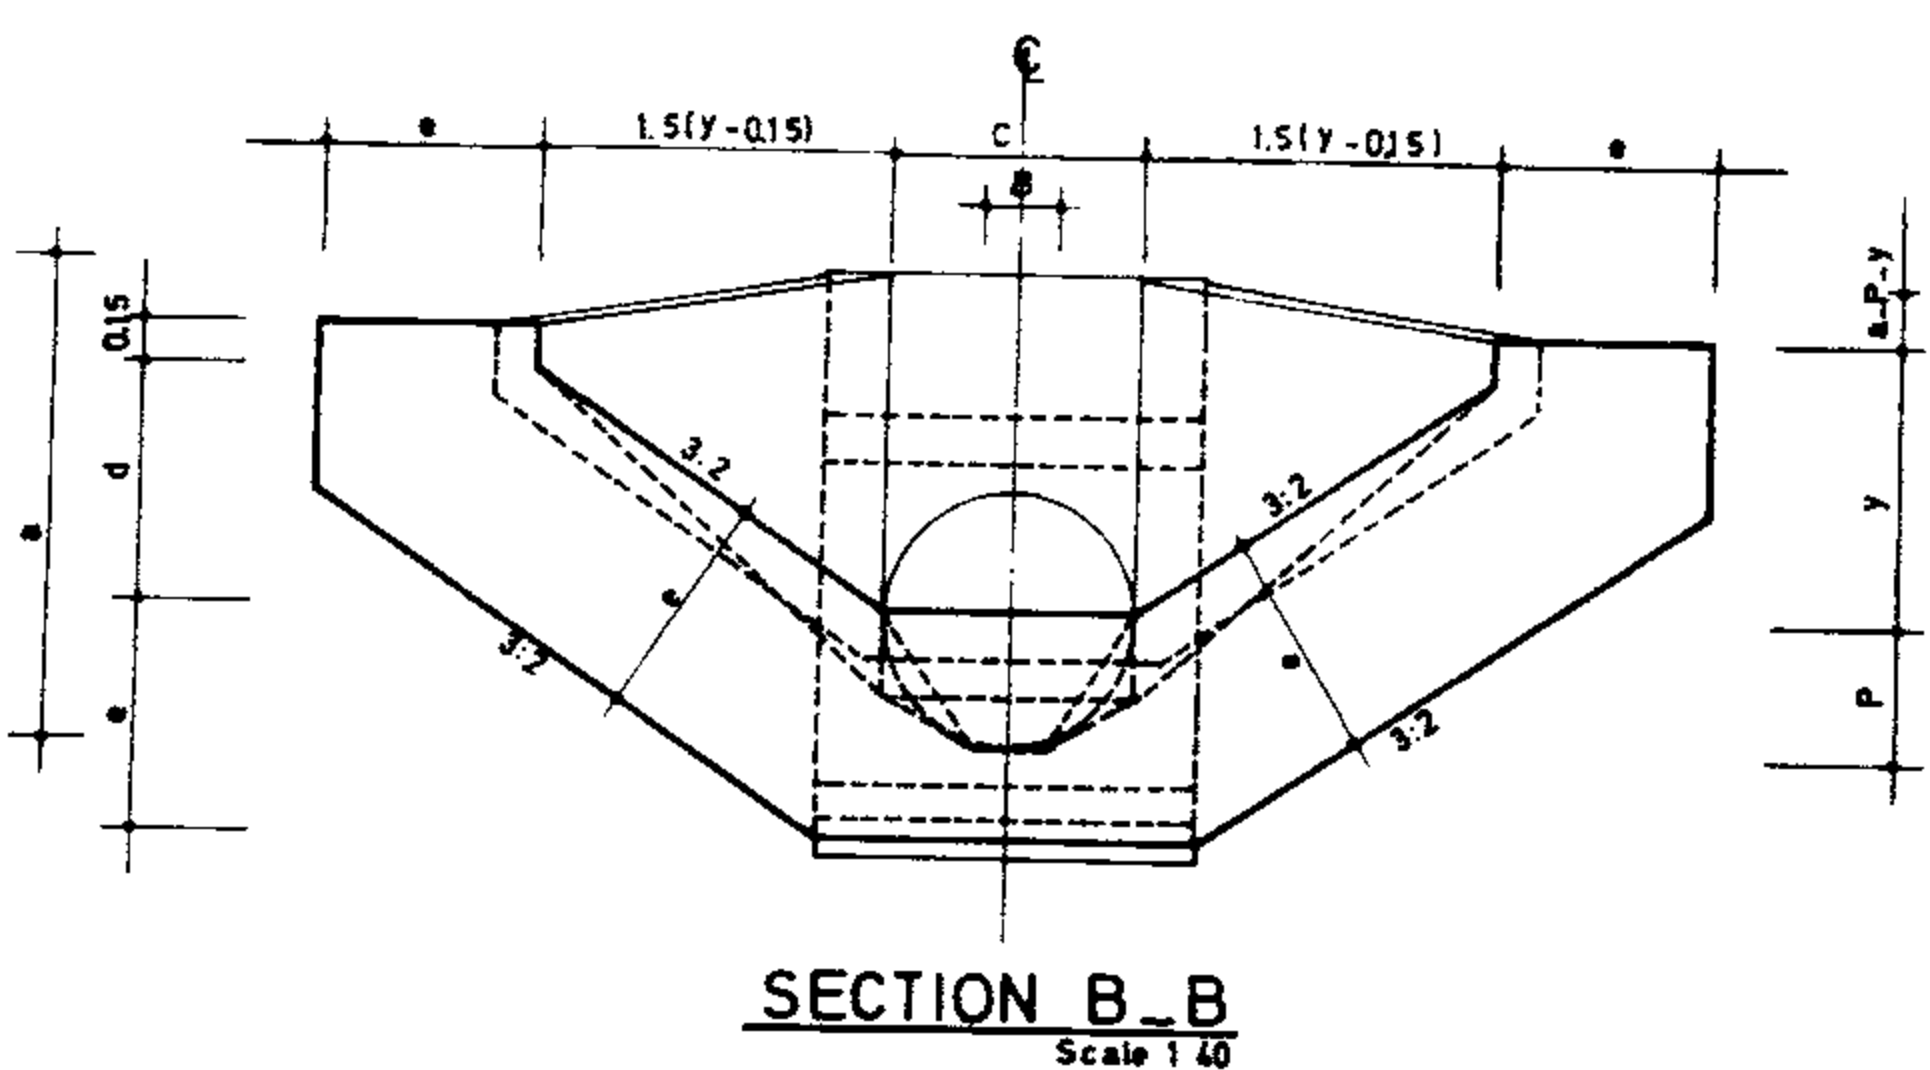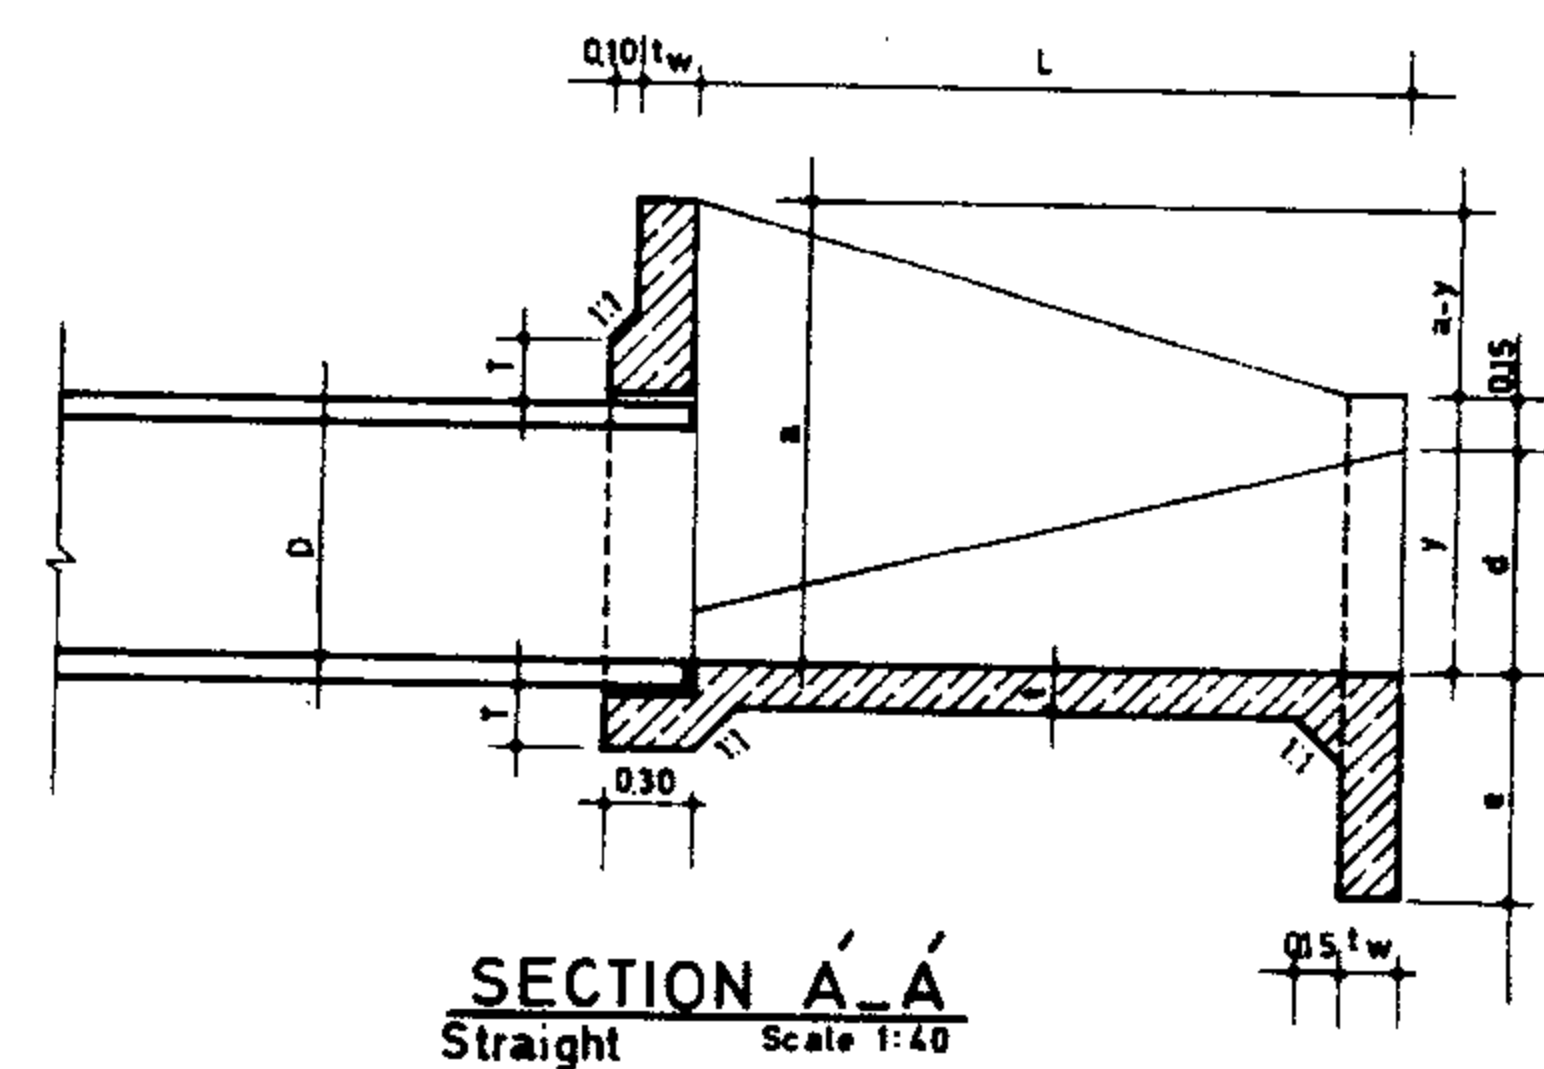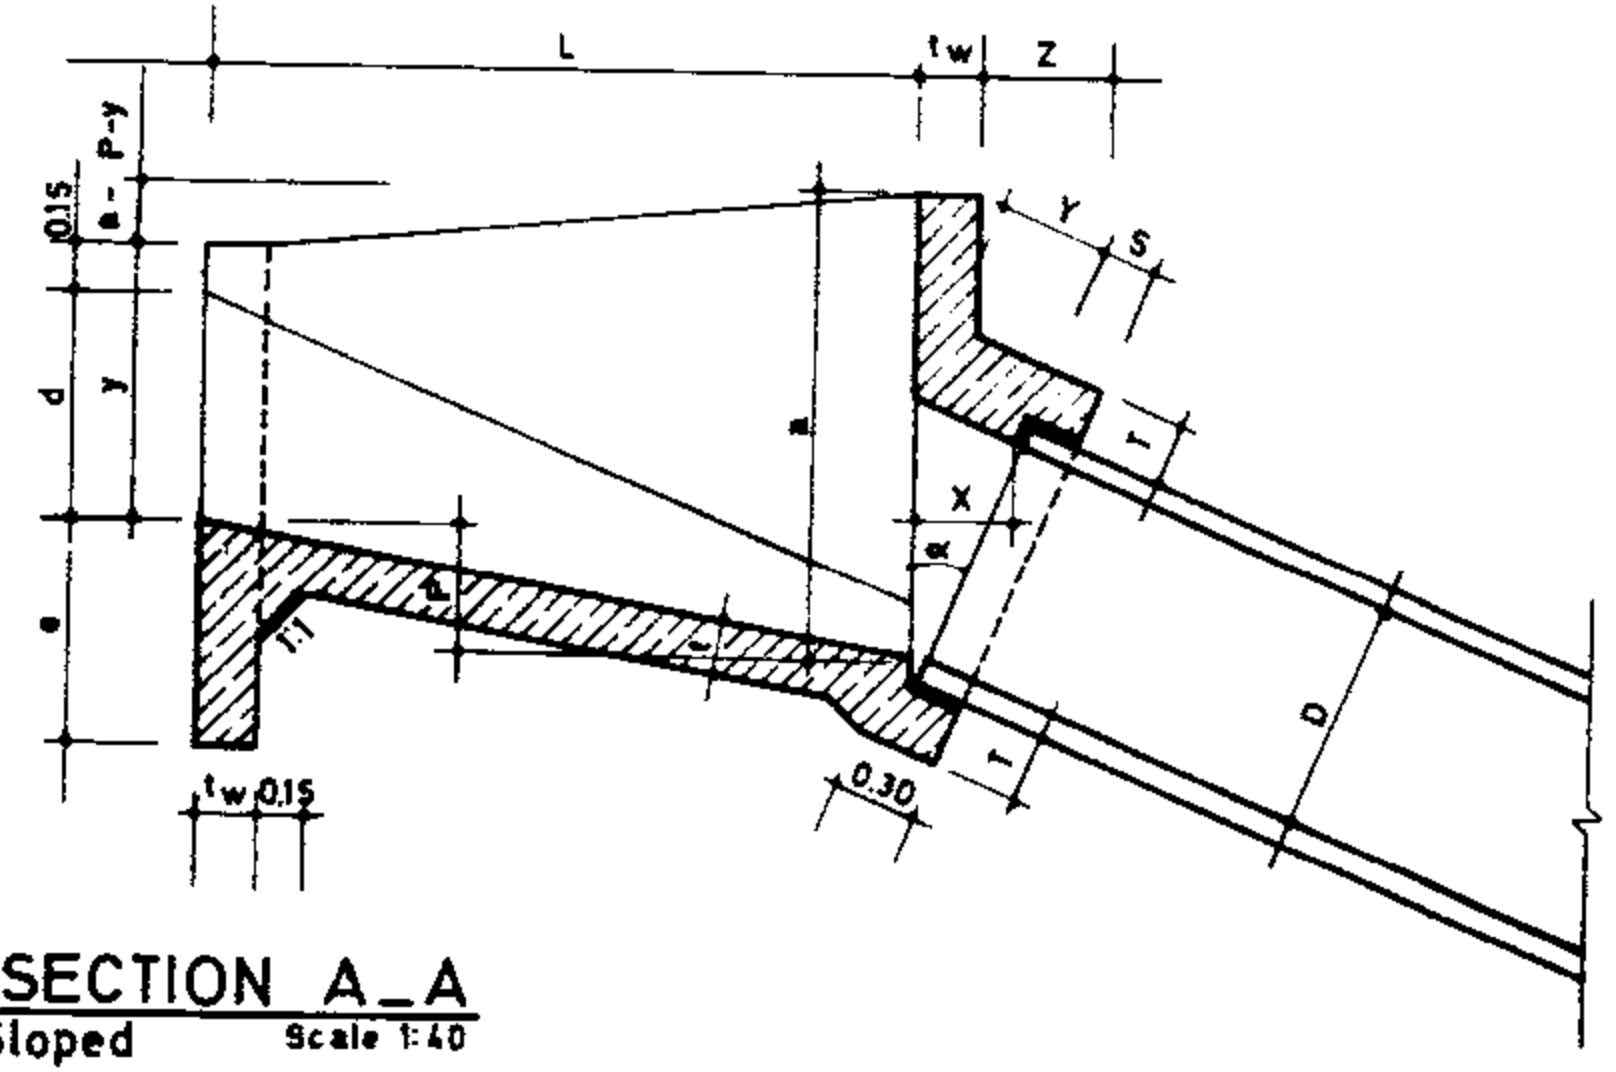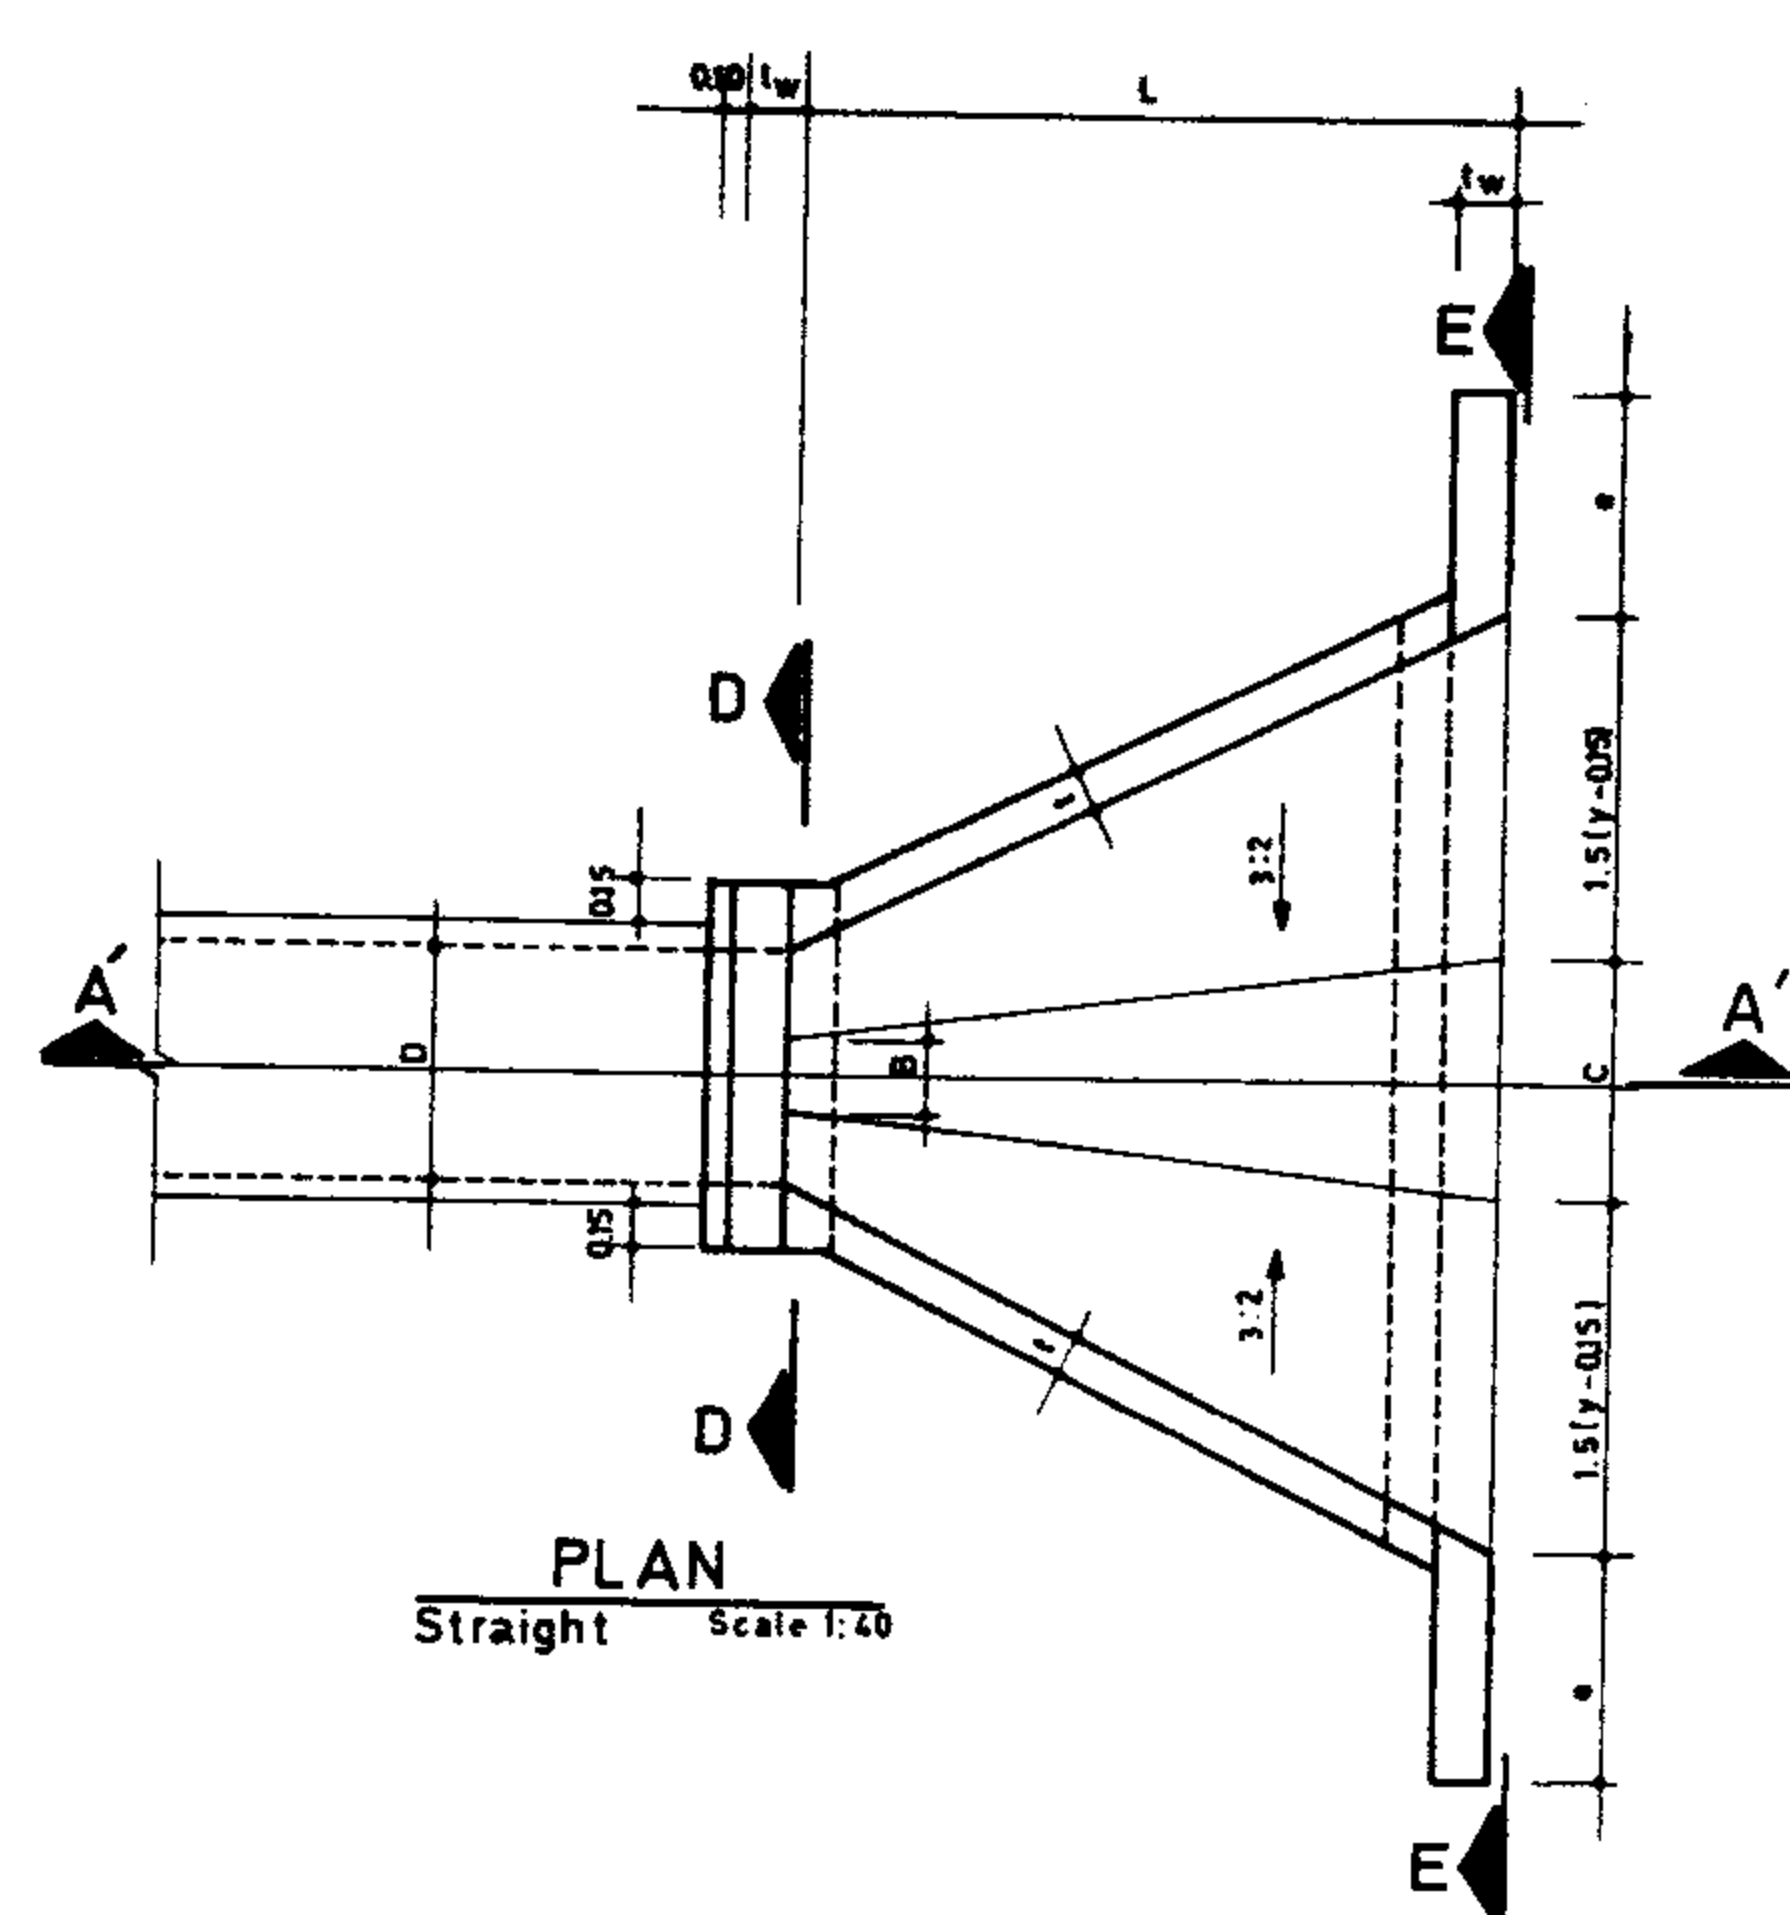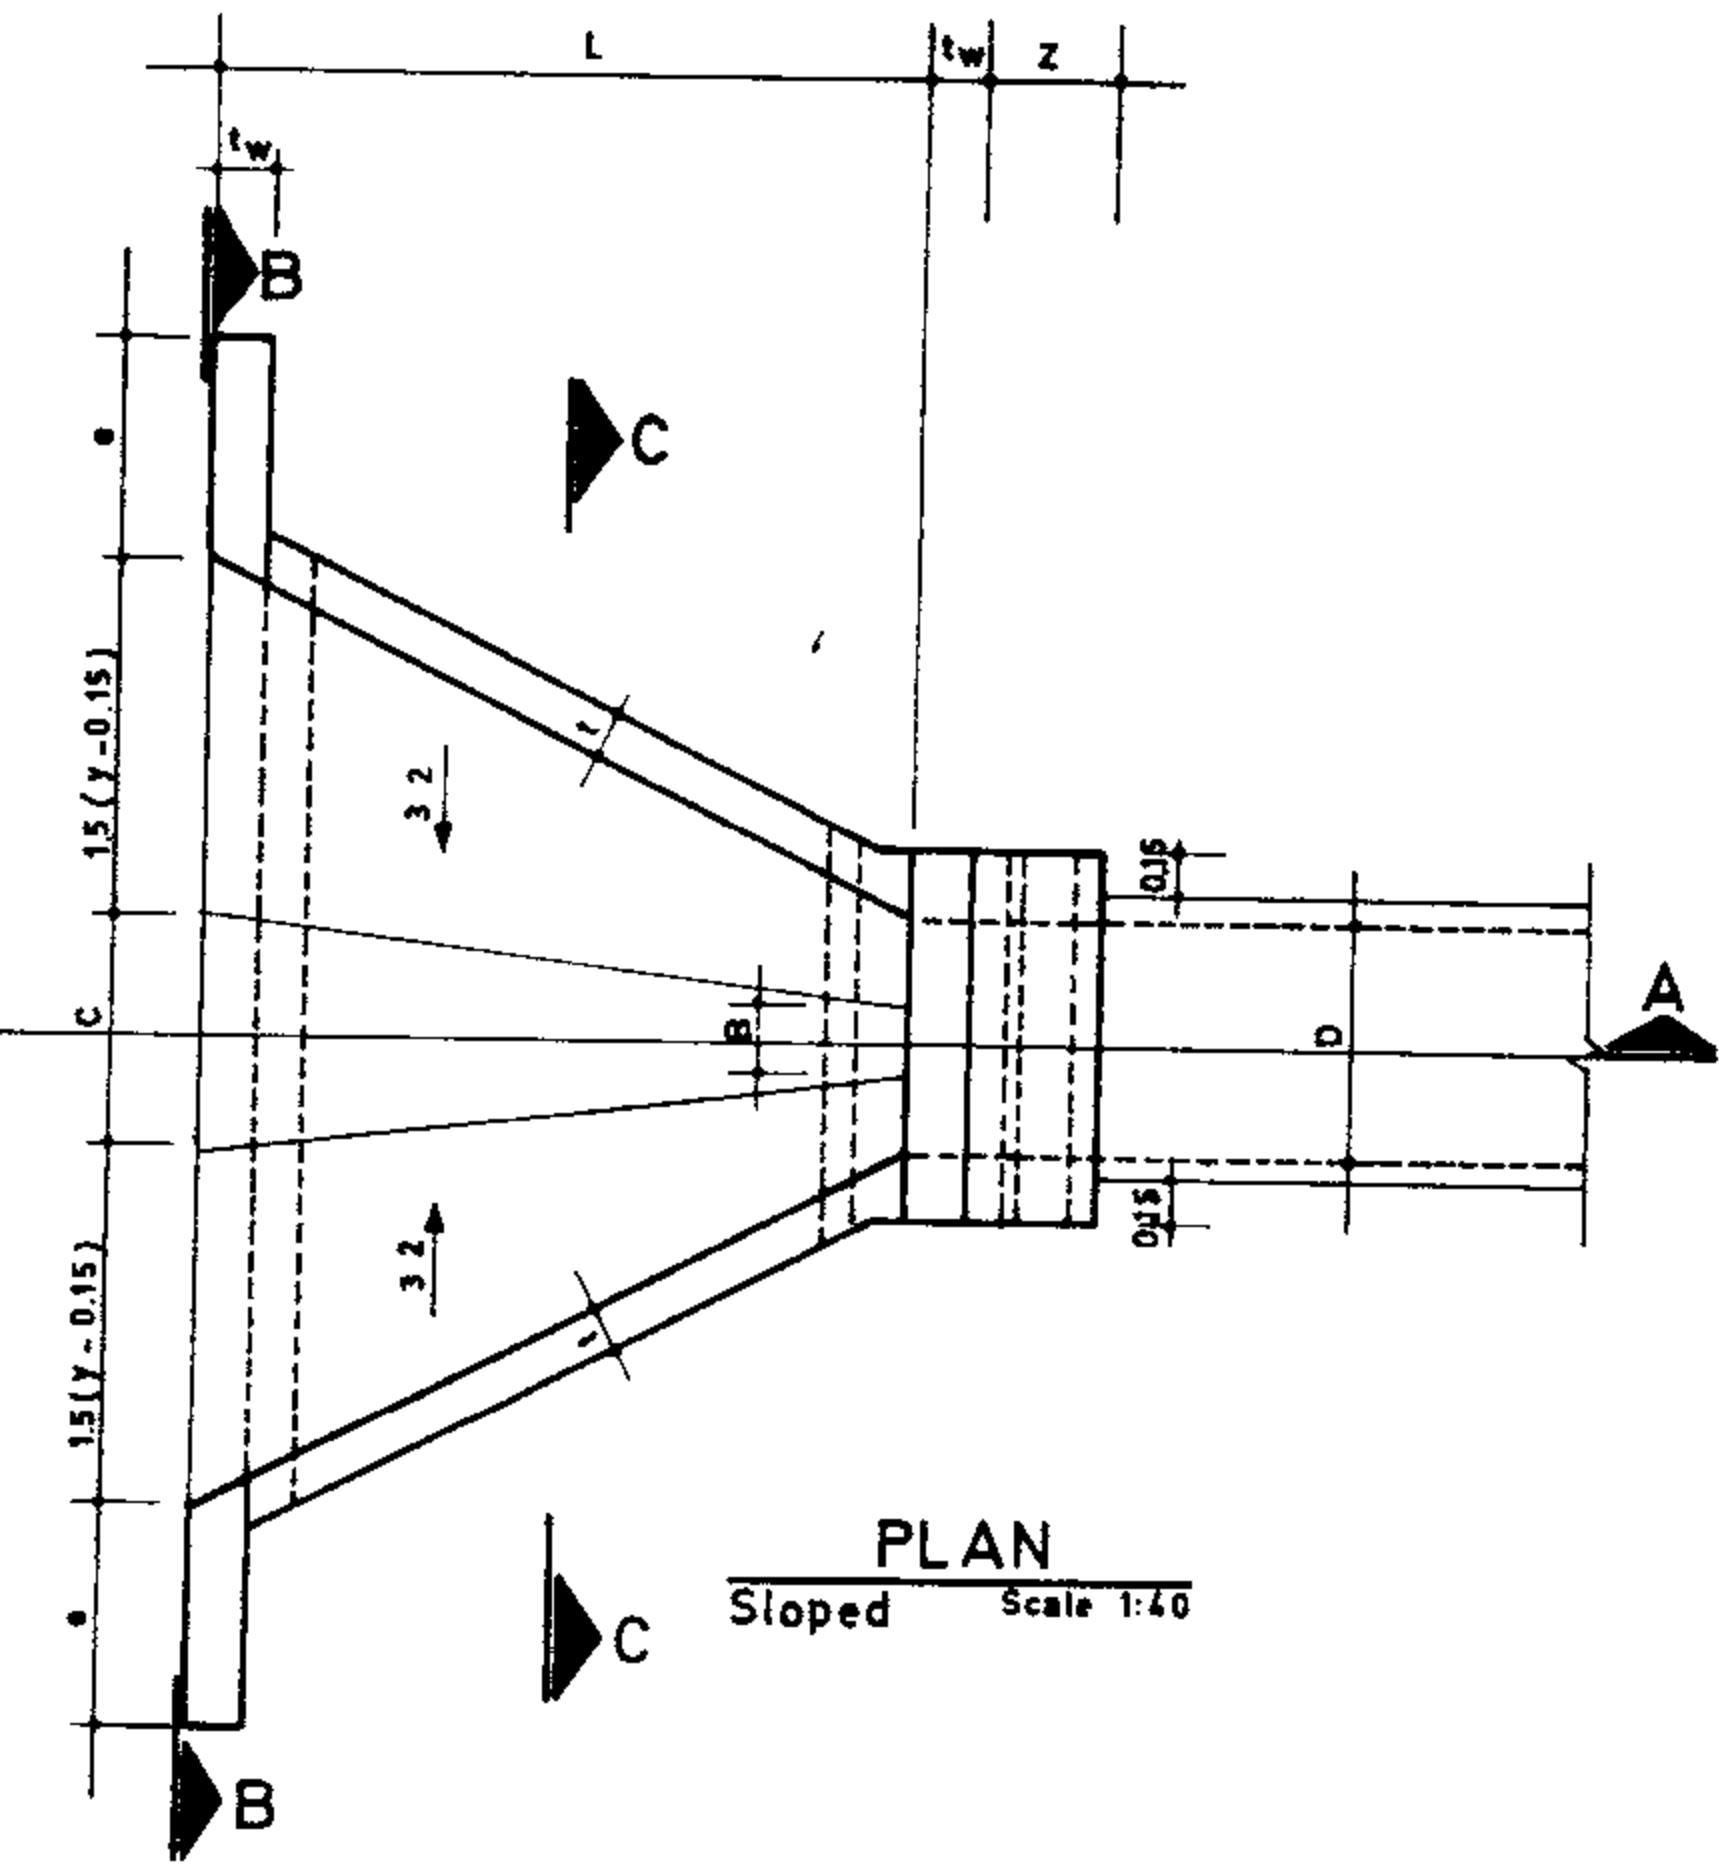

REFERENCE DWGS: For reinforcement see dwg. No. 13/6/3/01
For detail of pipe junction to structure see dwgs. No. 17/1/1/01 TO 17/1/1/03
For general uses see dwgs. No. 20/2/1/01 TO 20/2/1/03

Scale: 1:40	IRRIGATION & DEAINAGE STANDARDS	
Date:	DWG No. 13/6/1/01	
Approved:	Sheet. No. 1 of 3	Rev. No.
CONCRETE TRANSITION (Type 1)		
PLAN & SECTION		

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU

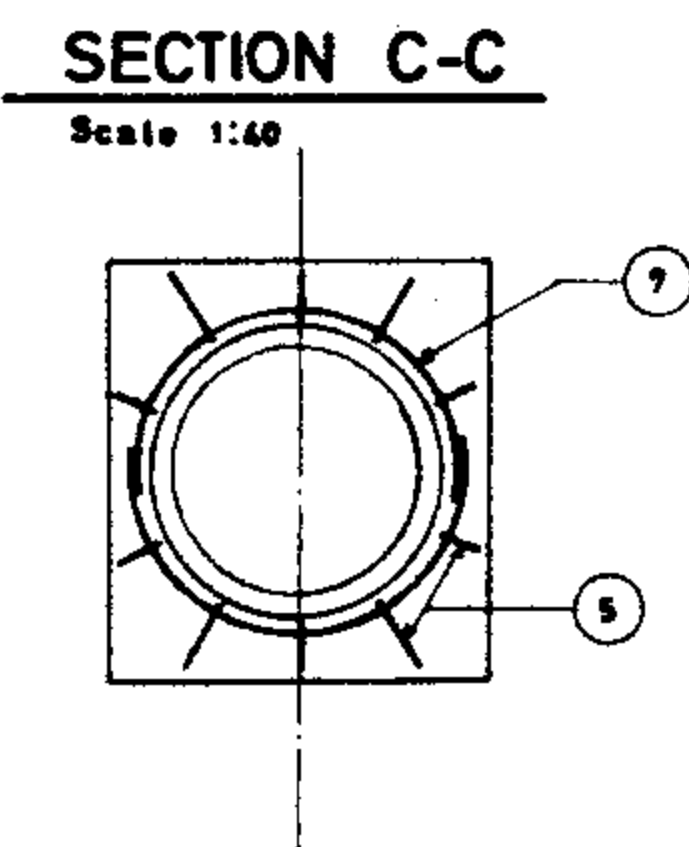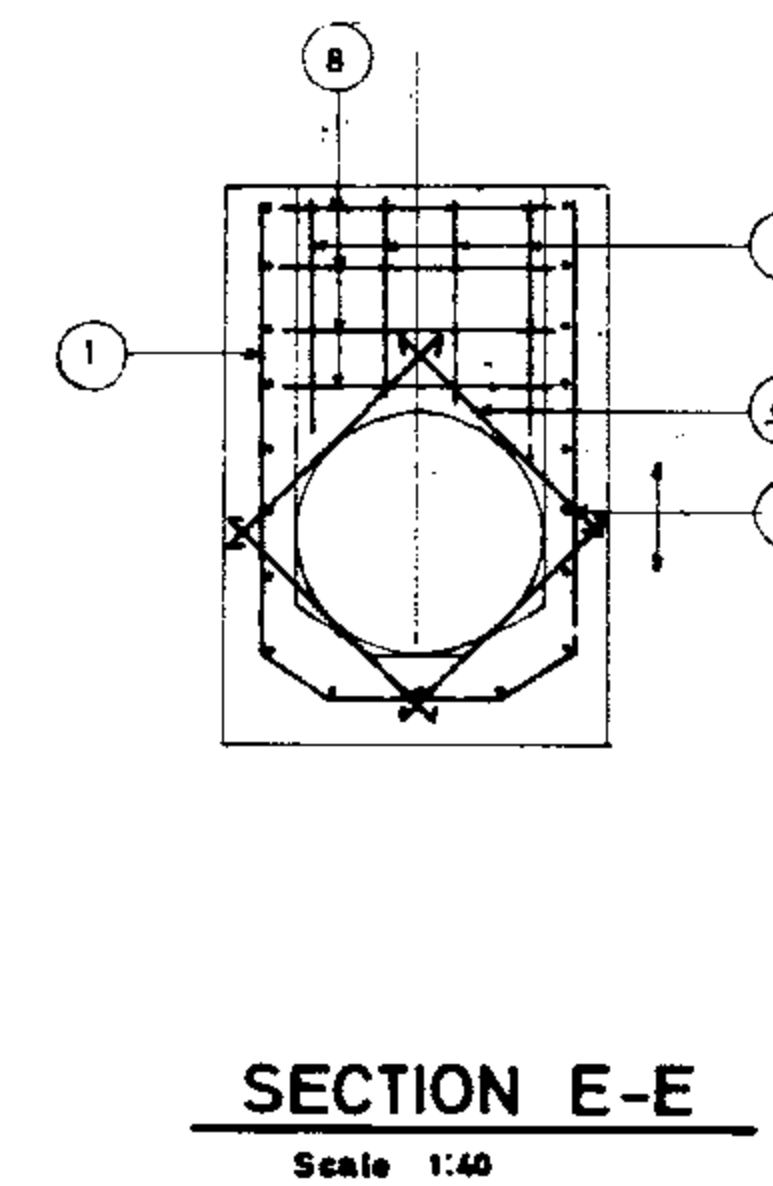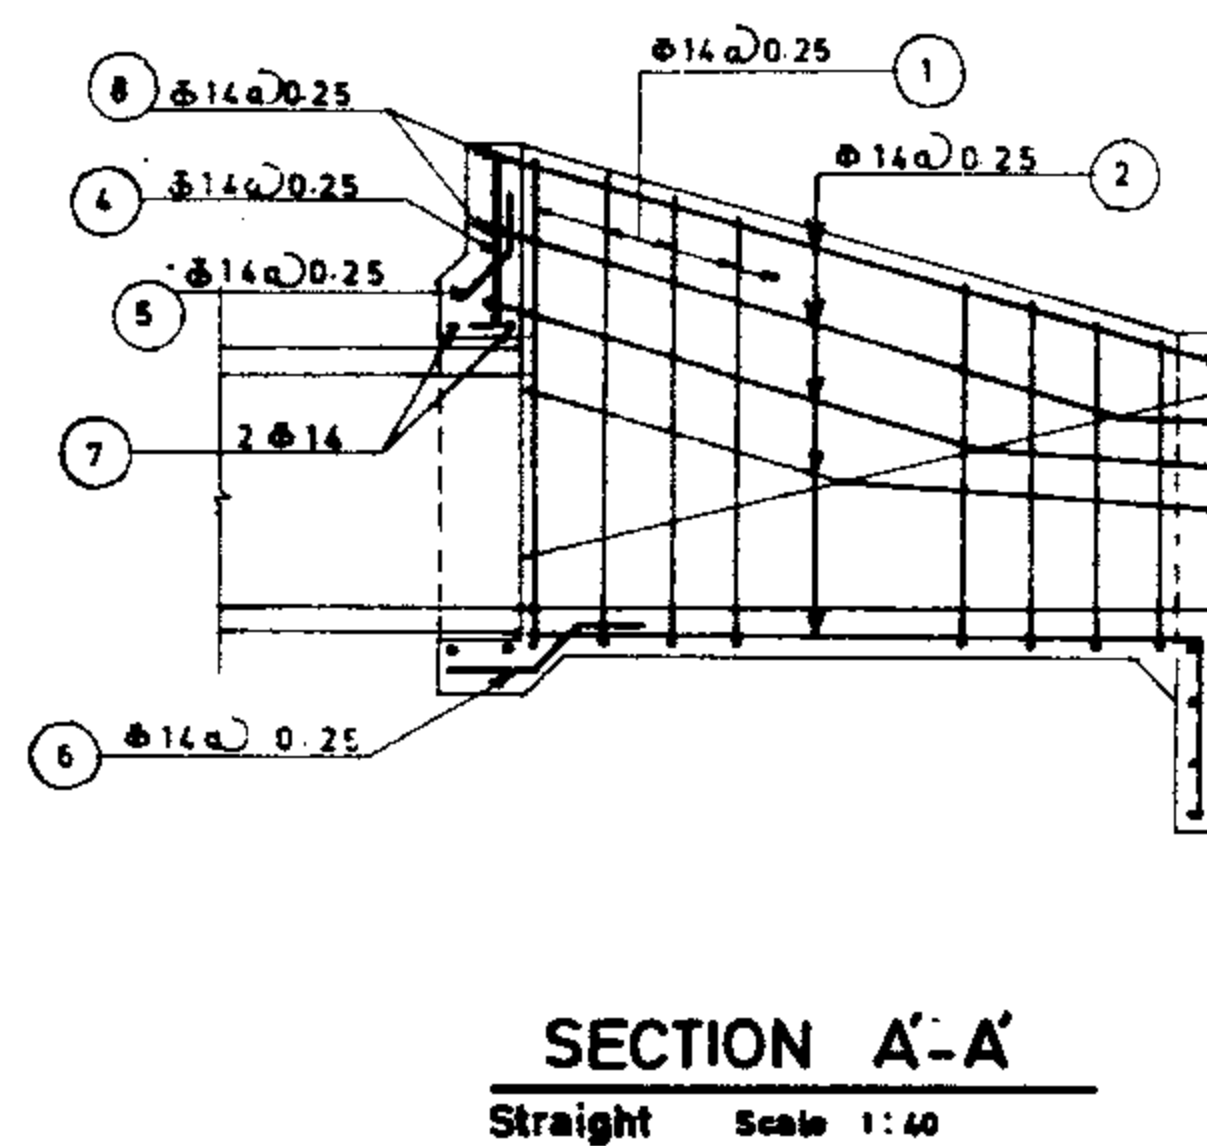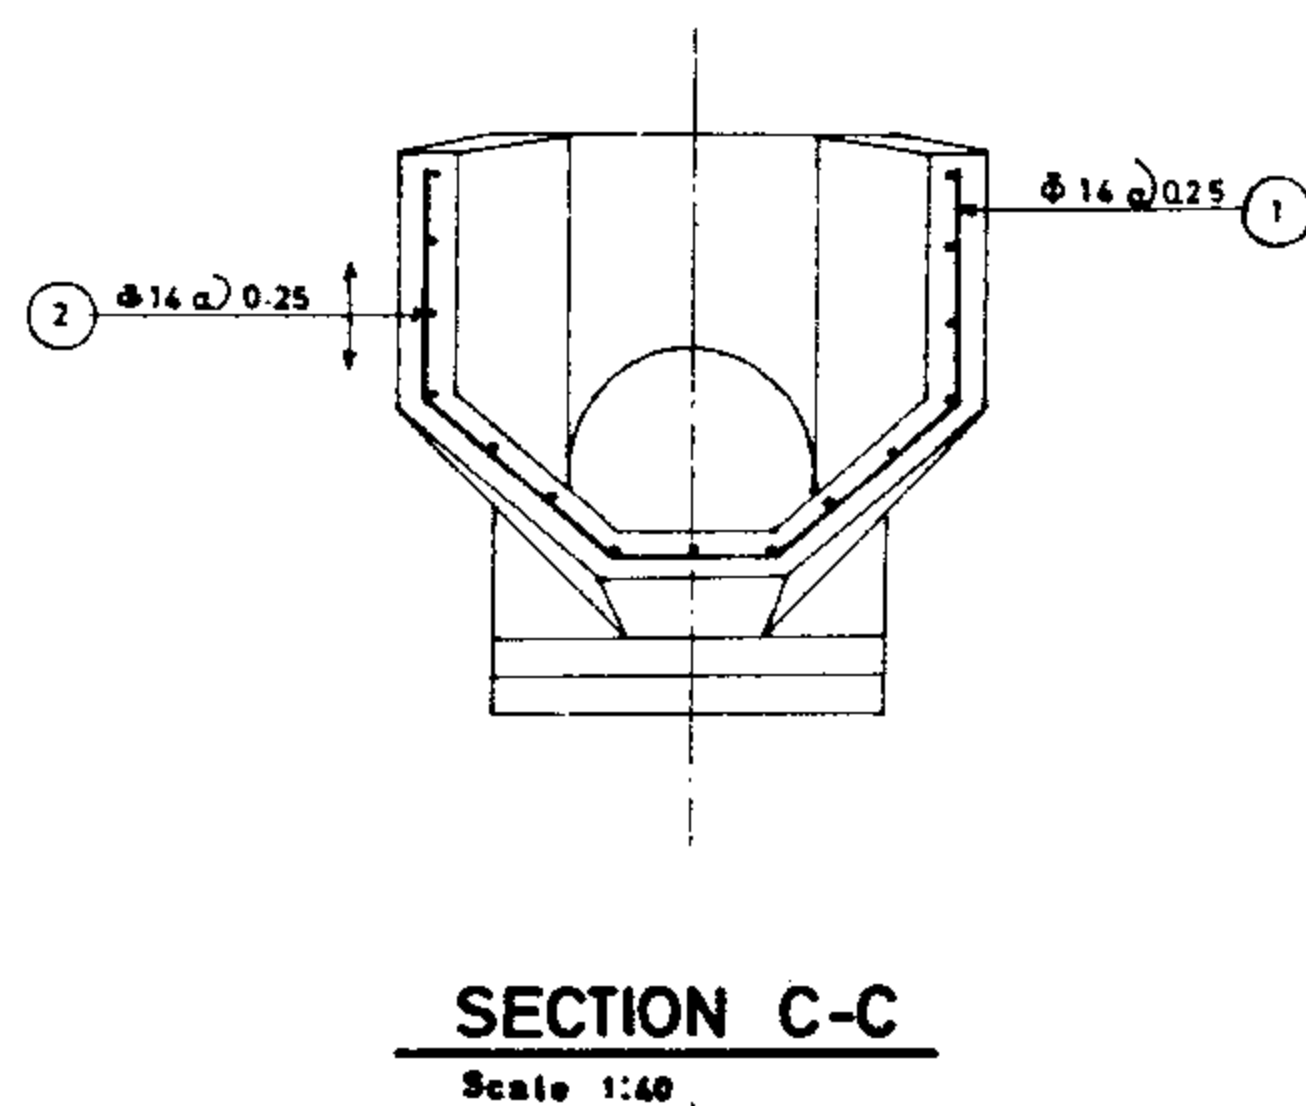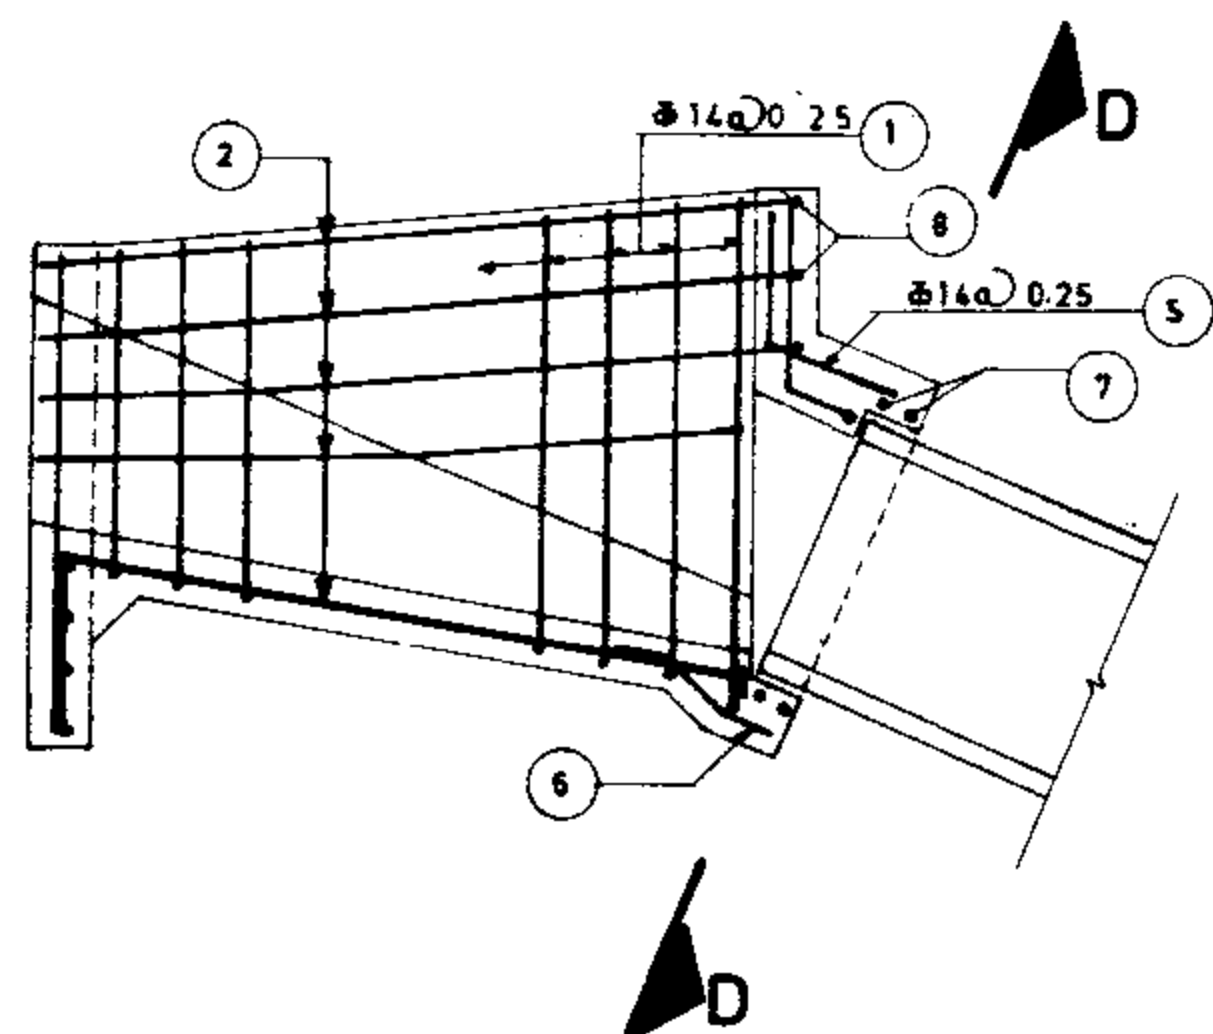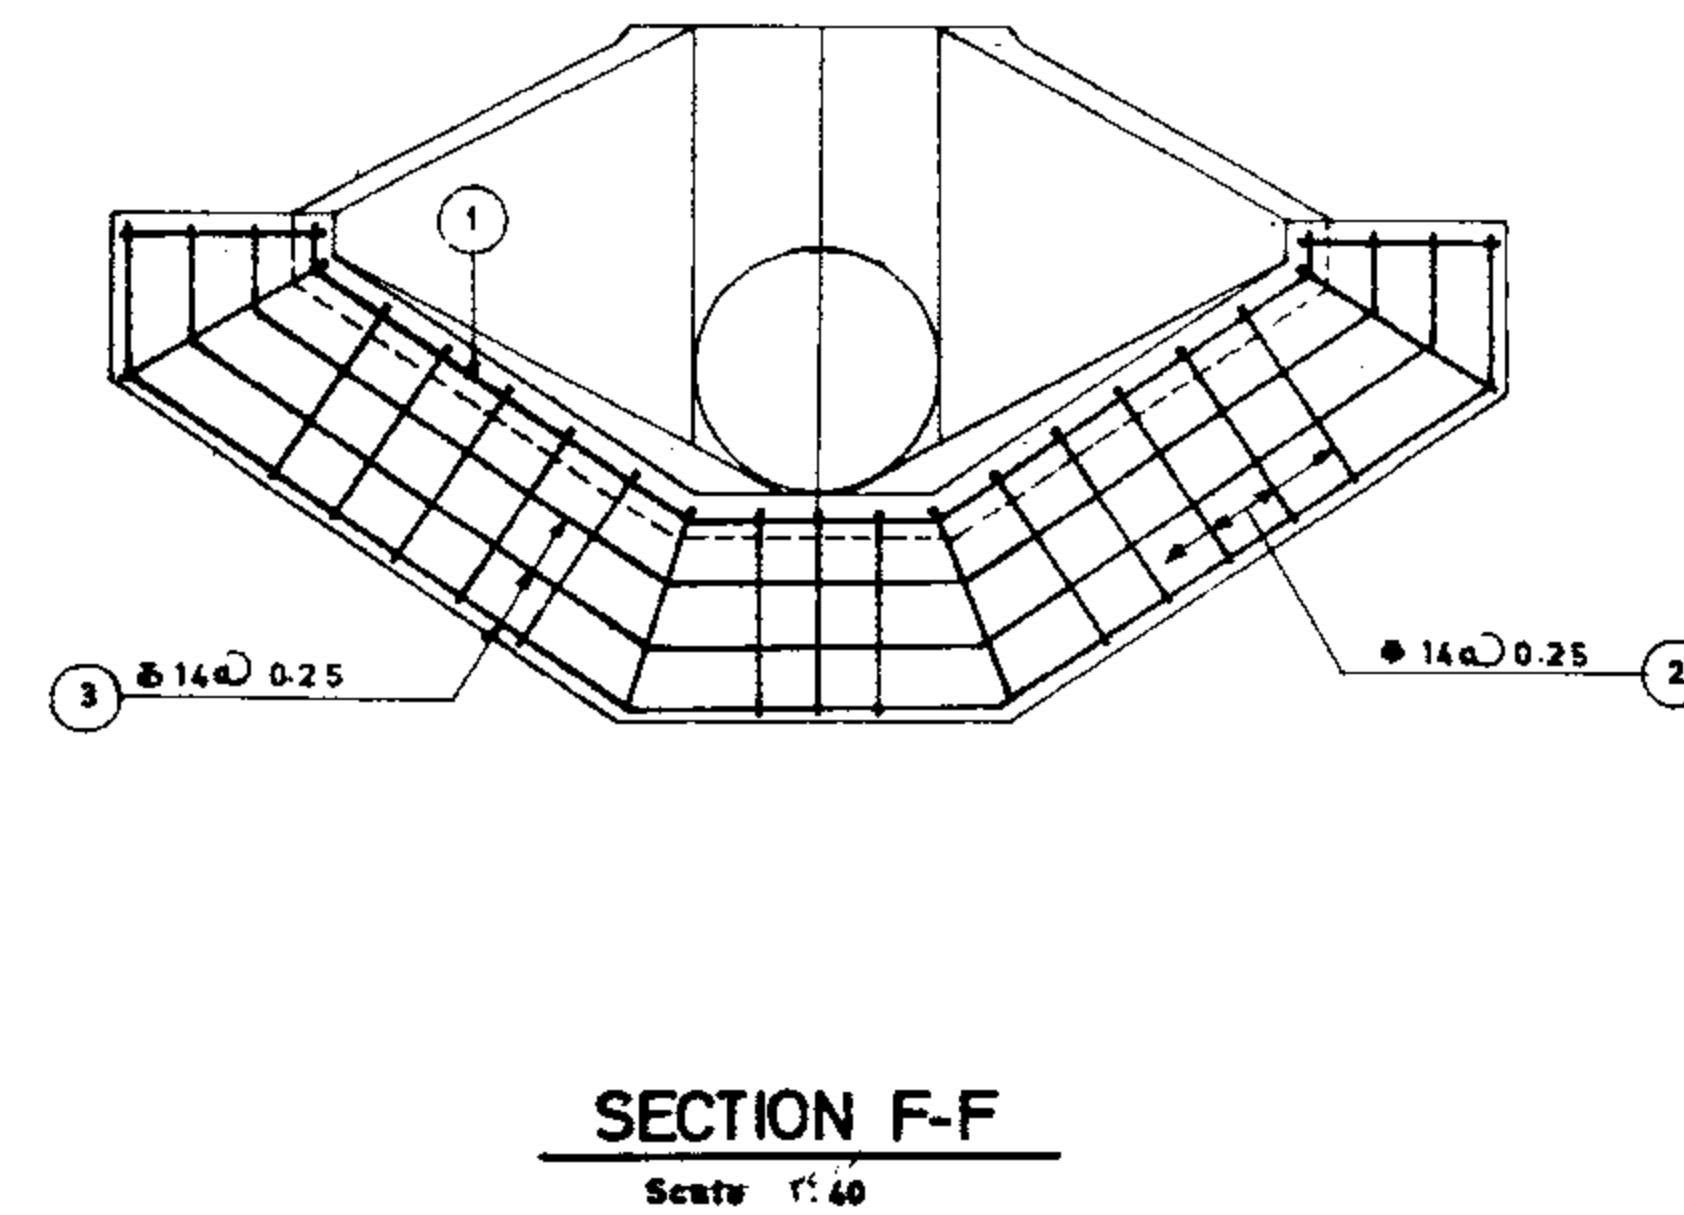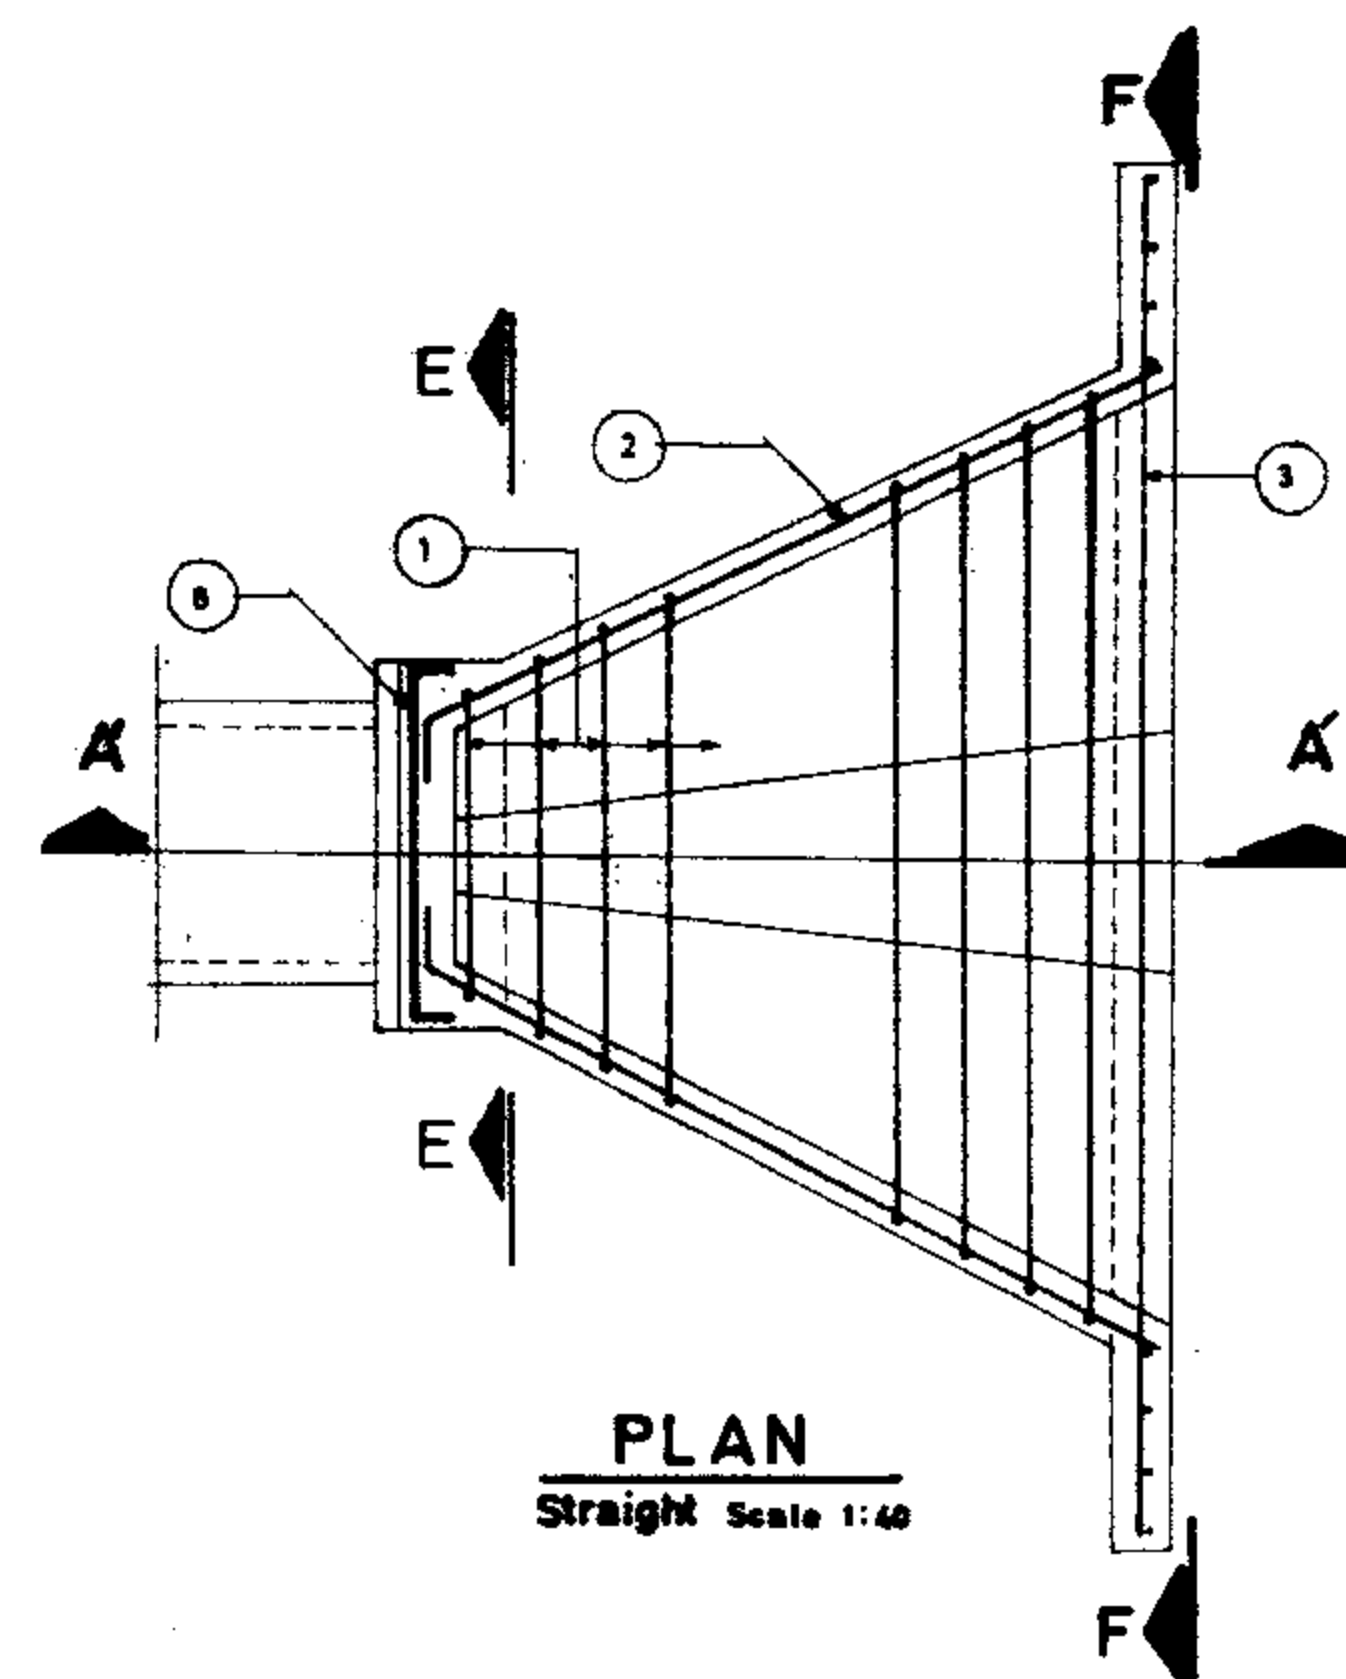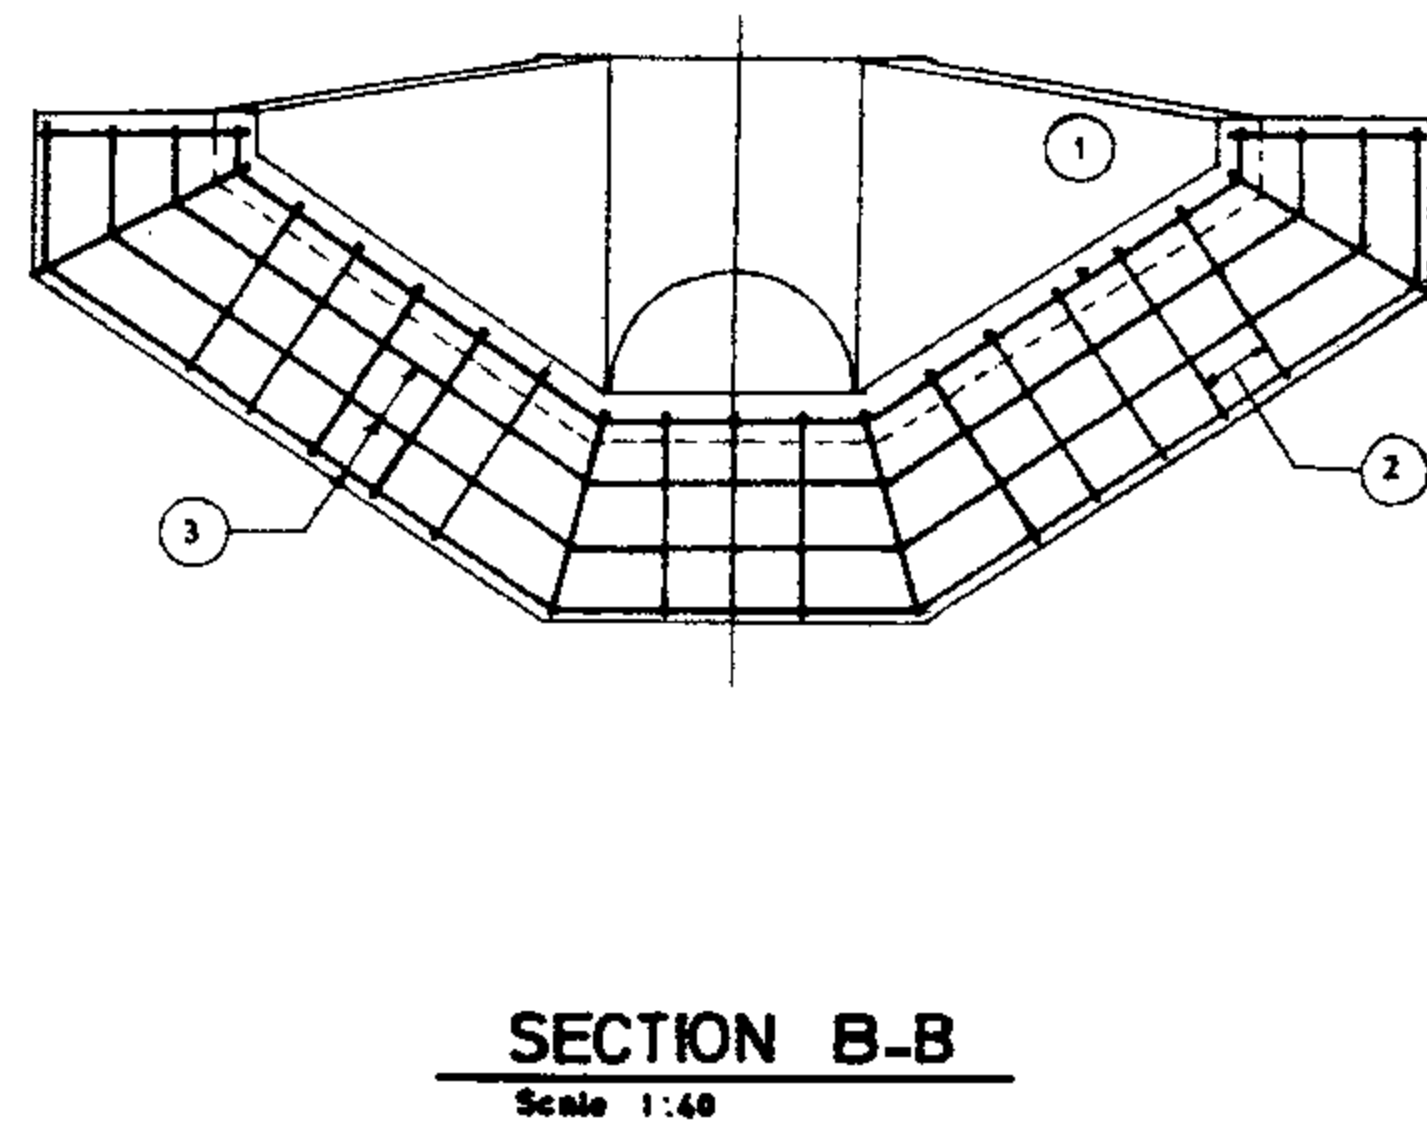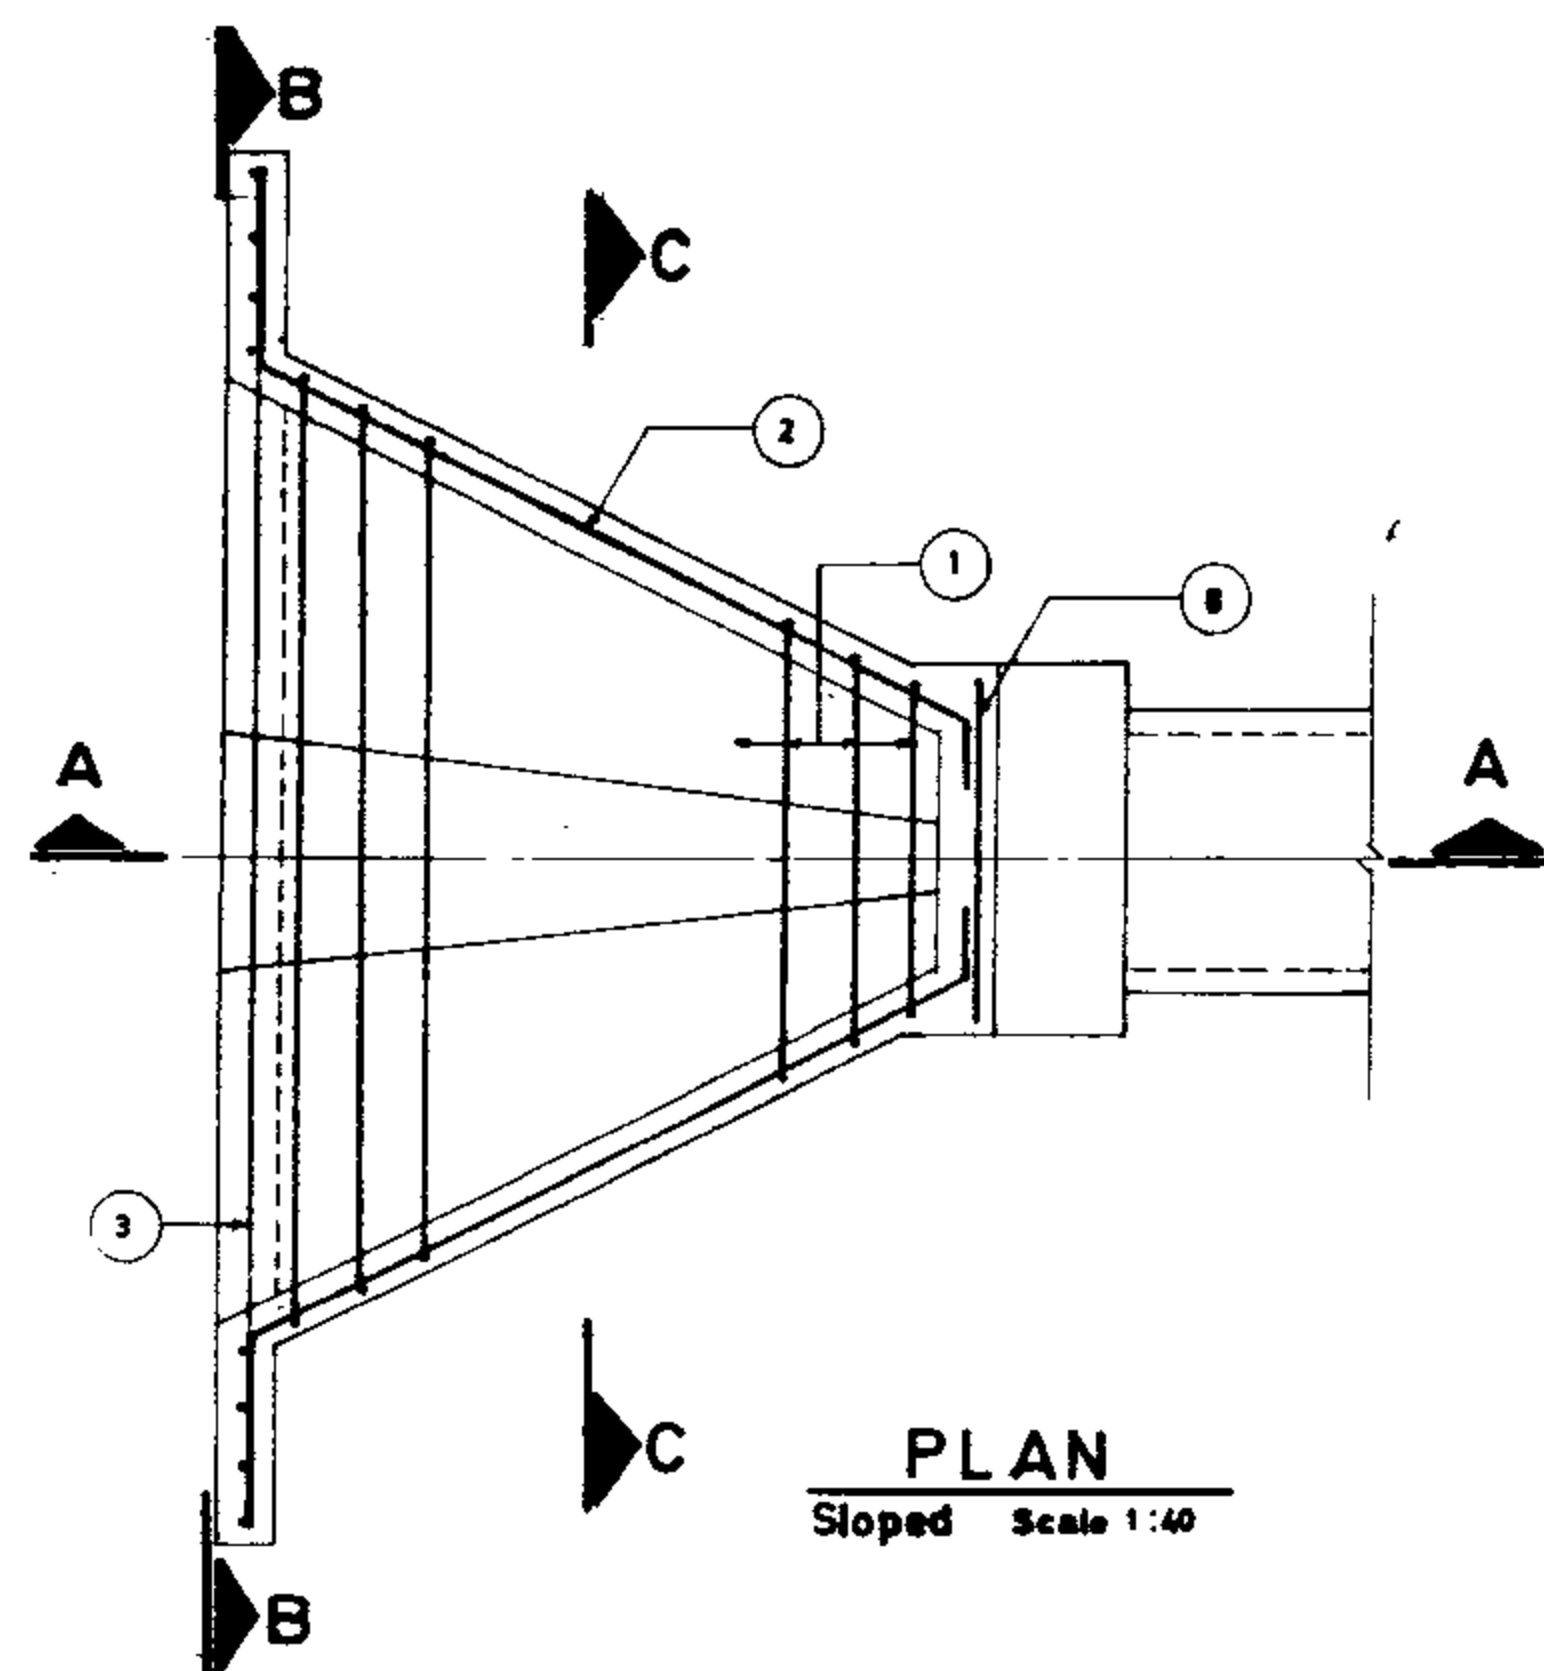

REFERENCE DWGS: For plan and section see dwg. No. 13/6/1/01
For list of reinforcement see dwg. No. 13/6/3/02

Scale: 1:40	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG No. 13/6/3/01	CONCRETE TRANSITION (TYPE 1) REINFORCEMENT
Approved:	Sheet No. 2 of 3 Rev. No.	

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

STR .1 Dia 0.40

Pos	No	FORM	UNIT LENG.	TOTAL LENG.
1	6		2.72	16.32
2	12		1.97	23.64
3	3		4.38	13.14
4	5		0.81	4.05
5	8		0.51	4.00
6	3		0.61	1.83
7	3		2.91	8.73
8	4		1.07	4.28
9	4		0.81	3.24
			79.23	
79.23 x 1.21 =			95.87 Kg.	

STR .2 Dia 0.50

Pos	No	FORM	UNIT LENG.	TOTAL LENG.
1	7		3.13	21.91
2	15		2.26	33.90
3	3		4.88	14.64
4	5		0.79	3.95
5	9		0.50	4.5
6	4		0.61	2.44
7	3		3.28	9.84
8	4		1.17	4.68
9	4		0.88	3.52
			99.38	
99.38 x 1.21 =			120.25 Kg.	

STR .3 Dia 0.60

Pos	No	FORM	UNIT LENG.	TOTAL LENG.
1	9		3.53	31.77
2	16		2.50	40.96
3	3		4.84	14.52
4	6		0.77	4.62
5	11		0.50	5.50
6	4		0.61	2.44
7	3		3.79	11.37
8	4		1.31	5.24
9	4		0.97	3.88
			120.30	
120.30 x 1.21 =			145.56 Kg.	

STR .4 Dia 0.70

Pos	No	FORM	UNIT LENG.	TOTAL LENG.
1	10		3.94	39.40
2	18		3.06	55.08
3	3		5.81	17.43
4	6		0.77	4.62
5	12		0.50	6.00
6	5		0.73	3.65
7	3		4.15	12.45
8	4		1.41	5.64
9	4		1.04	4.16
			148.43	
148.43 x 1.21 =			179.60 Kg.	

STR .5 Dia 0.80

Pos	No	FORM	UNIT LENG.	TOTAL LENG.
1	11		4.33	47.63
2	19		3.37	64.03
3	3		6.31	18.93
4	7		0.75	5.25
5	14		0.50	7.0
6	5		0.73	3.65
7	3		4.66	13.98
8	4		1.55	6.2
9	4		1.14	4.56
			171.23	
171.23 x 1.21 =			207.19 Kg.	

STR .6 Dia 0.90

Pos	No	FORM	UNIT LENG.	TOTAL LENG.
1	12		4.74	56.88
2	21		3.68	77.28
3	3		6.81	20.43
4	7		0.75	5.25
5	15		0.50	7.50
6	6		0.78	4.68
7	4		5.03	20.12
8	4		1.65	6.60
9	4		1.21	4.84
			203.58	
203.58 x 1.21 =			246.33 Kg.	

STR .7 Dia 1.00

Pos	No	FORM	UNIT LENG.	TOTAL LENG.
1	13		5.10	66.30
2	22		3.99	87.78
3	3		7.31	21.93
4	7		0.73	5.11
5	17		0.53	8.50
6	6		0.78	4.68
7	4		5.54	22.16
8	4		1.79	7.16
9	4		1.31	5.24
			228.86	
228.86 x 1.21 =			276.92 Kg.	

ALL BARS ARE Φ 14(1.21 kg/m)

REFERENCE DWGS: For reinforcement see dwg. No. 13/6/3/01
For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale:

Date:

Approved:

IRRIGATION & DRAINAGE STANDARDS

DWG. No. 13/6/3/02

Sheet No. 3 of 3

Rev. No

CONCRETE TRANSITION

(Type 1)
LIST OF REINFORCEMENT

ISLAMIC REPUBLIC OF IRAN

MINISTRY OF PLAN & BUDJET

TECHNICAL RESEARCH AND
STANDARD BUREAU

Structure Description

Transitions are used at structure inlets and outlets or at the change in canal sections for the following purposes:

- Reduce energy loss
- Provide smoother water flow
- Minimize canal erosion
- Provide additional stability to adjacent structures because of the added resistance to percolation
- To retain earth fill at the ends of structures
- Reduce ponded water surface elevations at cross-drainage structures

Classification & Application

Six types of transitions are presented in this publication:

- Type 1. or Broken back could be used for in-line canal structures. This type of transition is also used for cross-drainage structures if the natural drainage canal has well-defined cross section with dimensions that reasonably be transitioned to the broken-back cross section.
- Type 2. Could be used for cross-drainage structures, where the channel is wide and poorly defined.
- Type 3. Could also be used for cross-drainage structures, where the channel is poorly defined, by extending the pool beyond the end of sloping sidewalls, a longer crest result. By lowering the invert, the headwall opening is lowered, resulting lower water surface elevation for the inlet pool.
- Type 4. Except for its sloping floor and omission of headwall cutoff, this type of transition is similar to type 3. The sloping floor permits a lower pipe invert at the inlet headwall if type 4 transition is used.

Type 5. This type of transition is sometimes used to transition from a contretelined canal to a pipe structure.

Design Considerations for Pipe Structure Transition

1. Pipe Submergence

1-1. Head losses

Let:

V_c = Flow velocity in canal (m/s)

V_p = Flow velocity at the centerline section of the closed conduit at the headwall (m/s)

Energy losses in transitions could be calculated as follows:

$$\text{Energy losses at inlet} = K_1 \left(\frac{V_p^2}{2g} - \frac{V_c^2}{2g} \right)$$

$$\text{Energy losses at outlet} = K_2 \left(\frac{V_p^2}{2g} - \frac{V_c^2}{2g} \right)$$

For broken-back transition $K_1=0.4$ and $K_2=0.7$.

1-2. Friction Losses

Friction losses for short transitions associated with capacities up to 3 m³/s will be small and are usually omitted.

1-3. Pipe Submergence

Inlet transition to pipe structures where the hydraulic control is at the downstream end of the structure should have a seal of $1.5 \left(\frac{V_p^2}{2g} - \frac{V_c^2}{2g} \right)$ but not less than 8 cm.

The seal is measured between the upstream water surface of the inlet transition and the top of the opening in the transition headwall, where an inlet transition connected to a free-flow closed conduit in such a way that the conduit inlet is sealed, the head required to discharge the design flow can be determined by orifice equation.

$$Q = CA\sqrt{2gh}$$

Where:

Q = Discharge (m³/s)


A = Pipe area (m²)

h = Head (m) measured from the center of the headwall opening to the inlet water surface.

C = Discharge Coefficient = 0.6

2. Water Surface Angle

Water surface angle is defined; the angle between water surface and transition centerline(θ).

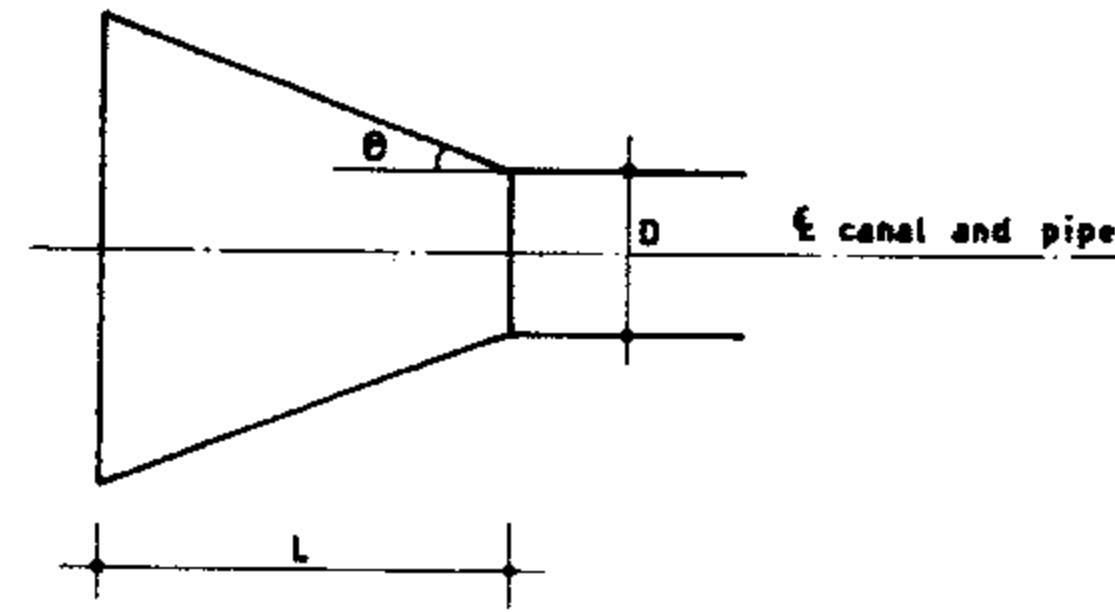

Water surface angle should not exceed $27 \frac{1}{2}^\circ$

for inlet transition and $22 \frac{1}{2}^\circ$ for outlet transition. For some designs it may be more economical to use angle of 25° for either inlet and outlet transition.

3. Channel Erosion

The following criteria should be used to prevent undue channel erosion downstream from a structure outlet:

Pipe Velocity V_p (m/s)	Erosion Protection
$V_p \leq 1$	An earth outlet transition is sufficient
$1 < V_p \leq 3$	An concrete outlet transition should be used
$3 < V_p$	A baffled outlet or stilling pool should be used.

General Notes for Transition Type 2,3 and 4

1. To provide adequate freeboard for the canal, the inlet water surface for design flow should be at least 0.6 meter below the top of the canal bank.
2. The equation $Q = CA\sqrt{2gh}$ may be used to calculate the inlet water surface required to discharge to design flow.
h measured from the opening centerline to the water surface and $C = 0.6$.
For free flow the following equation could be used for determining the required head:


$$h = 0.14206 V^2$$

Where V is the design velocity of the pipe in m/s and h is the required head in meter.


REFERENCE DWG :

Scale:	IRRIGATION & DRAINAGE STANDARD	
Date:	DWG. No 13/5/1/01	
Approved:	Sheet No 1 of 1	Rev. No
TRANSITION DESCRIPTION AND SELECTION		


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU

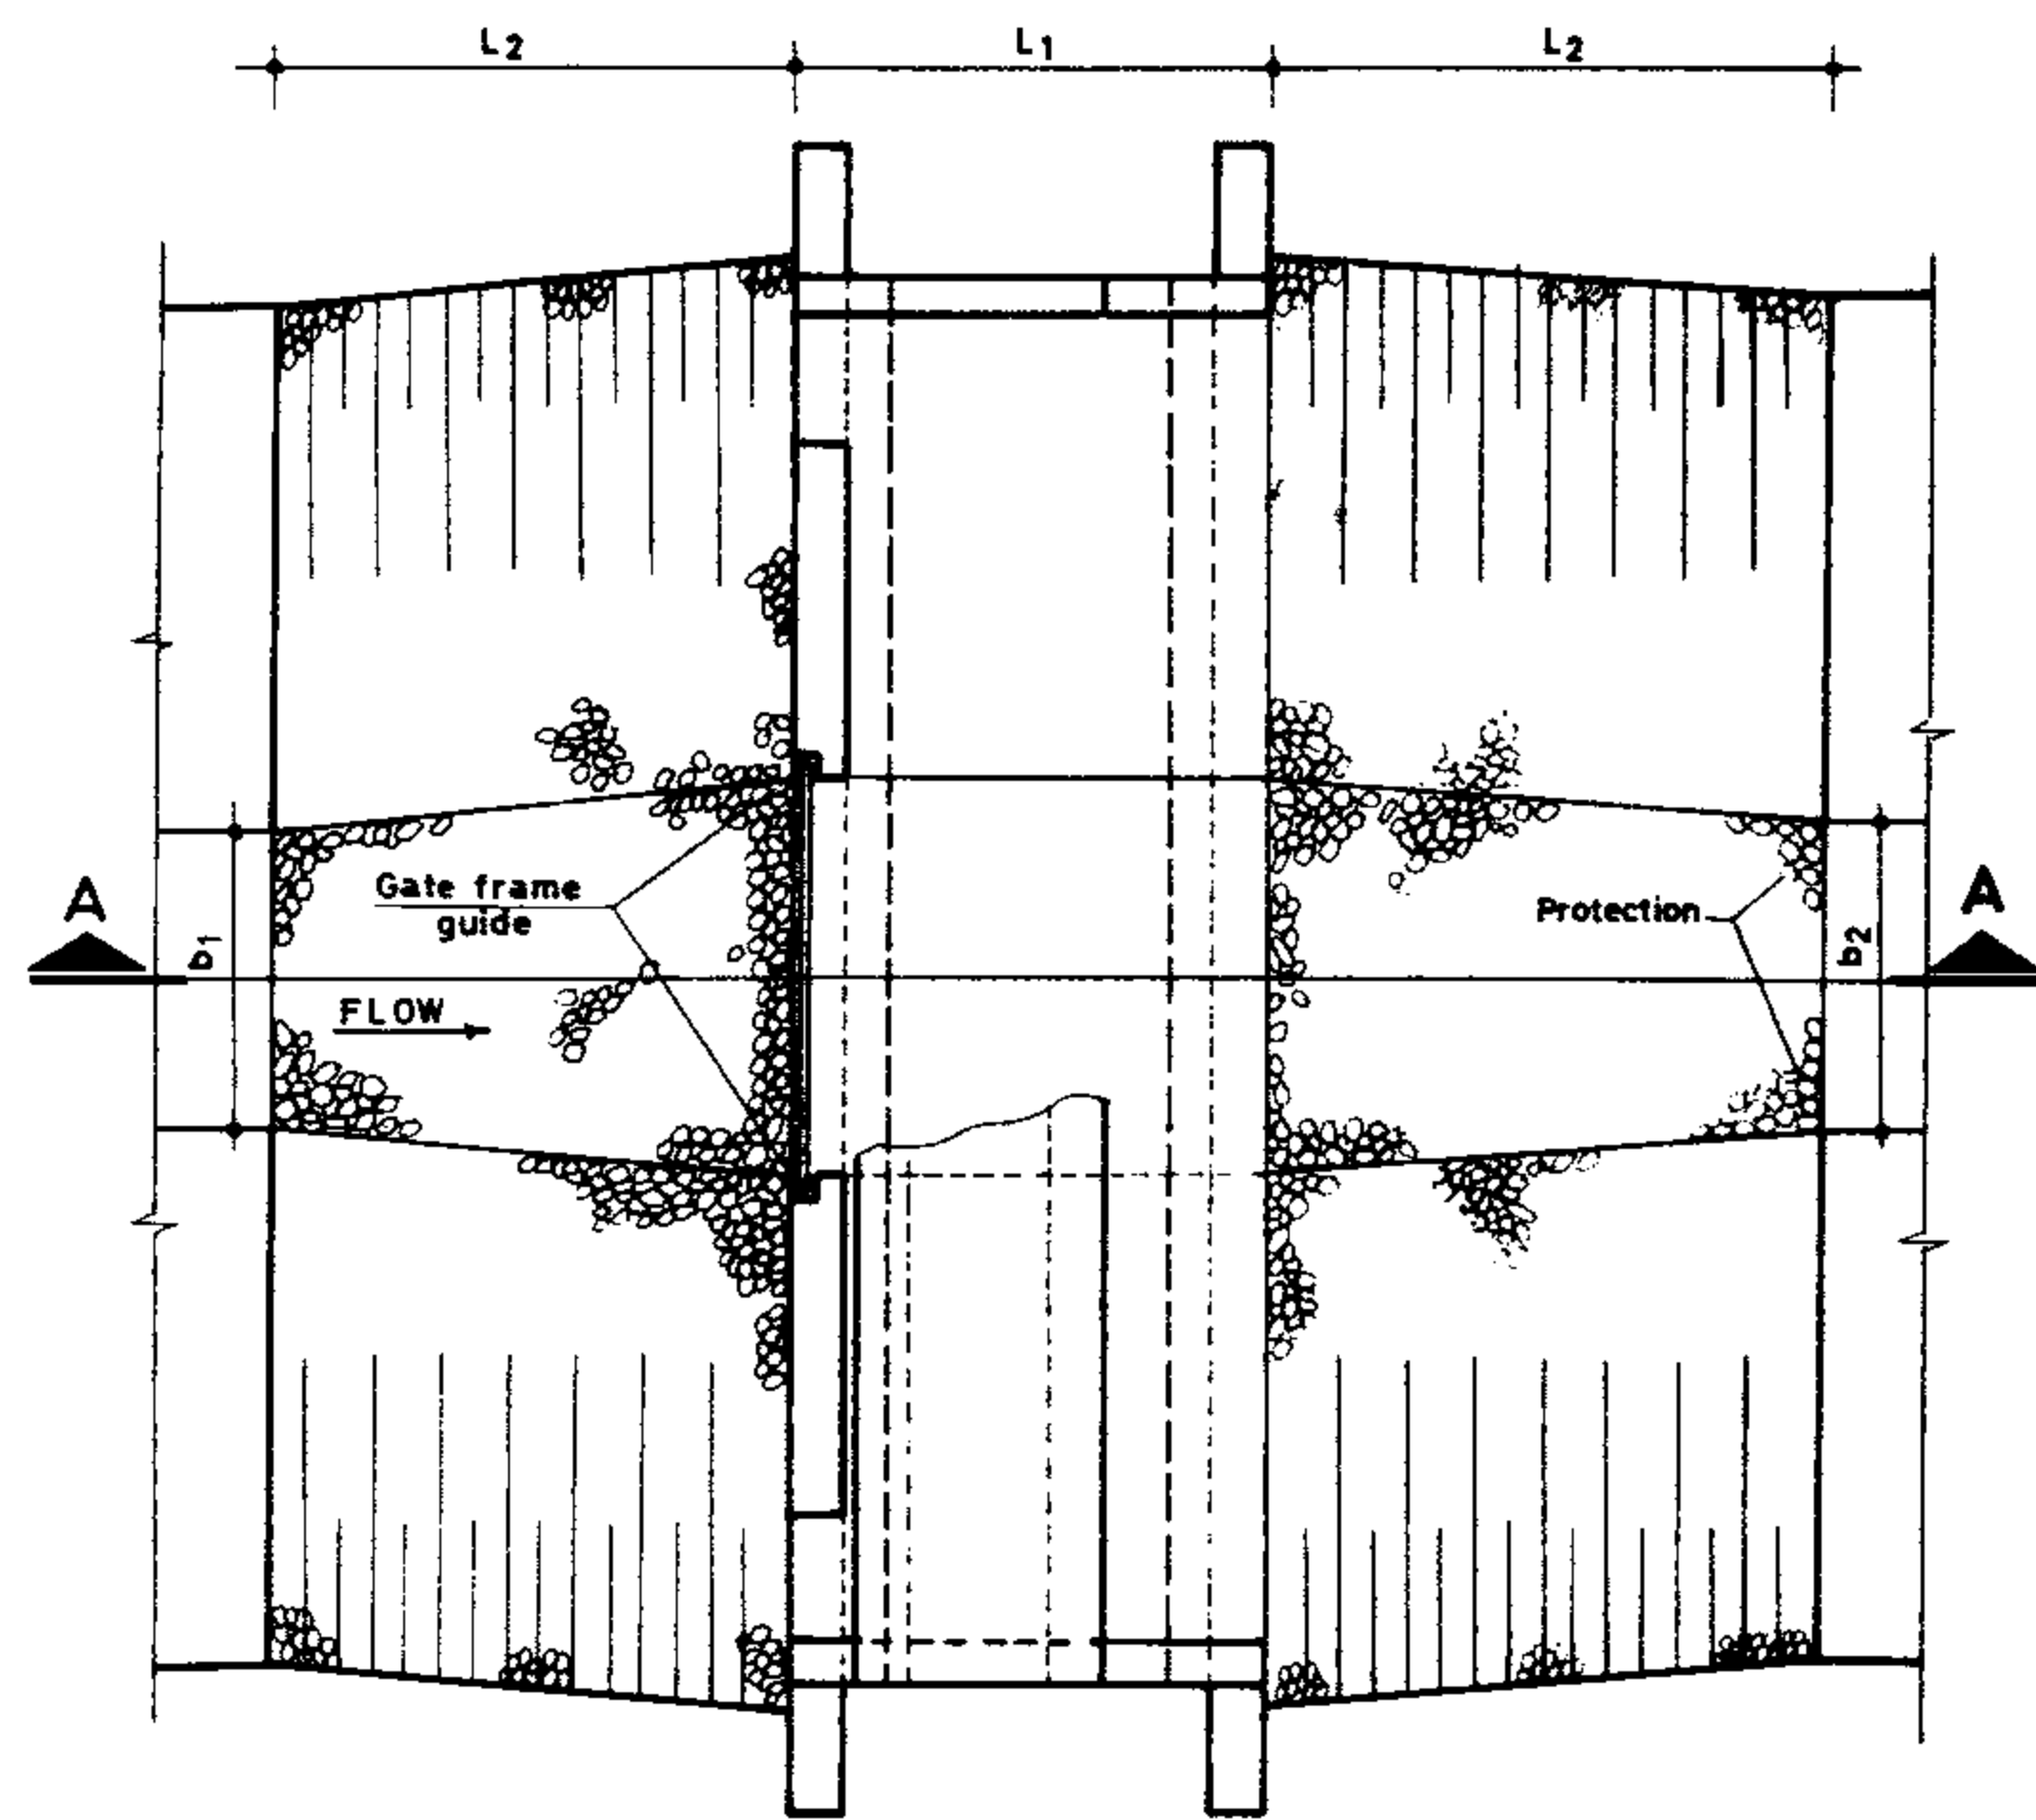


PLAN

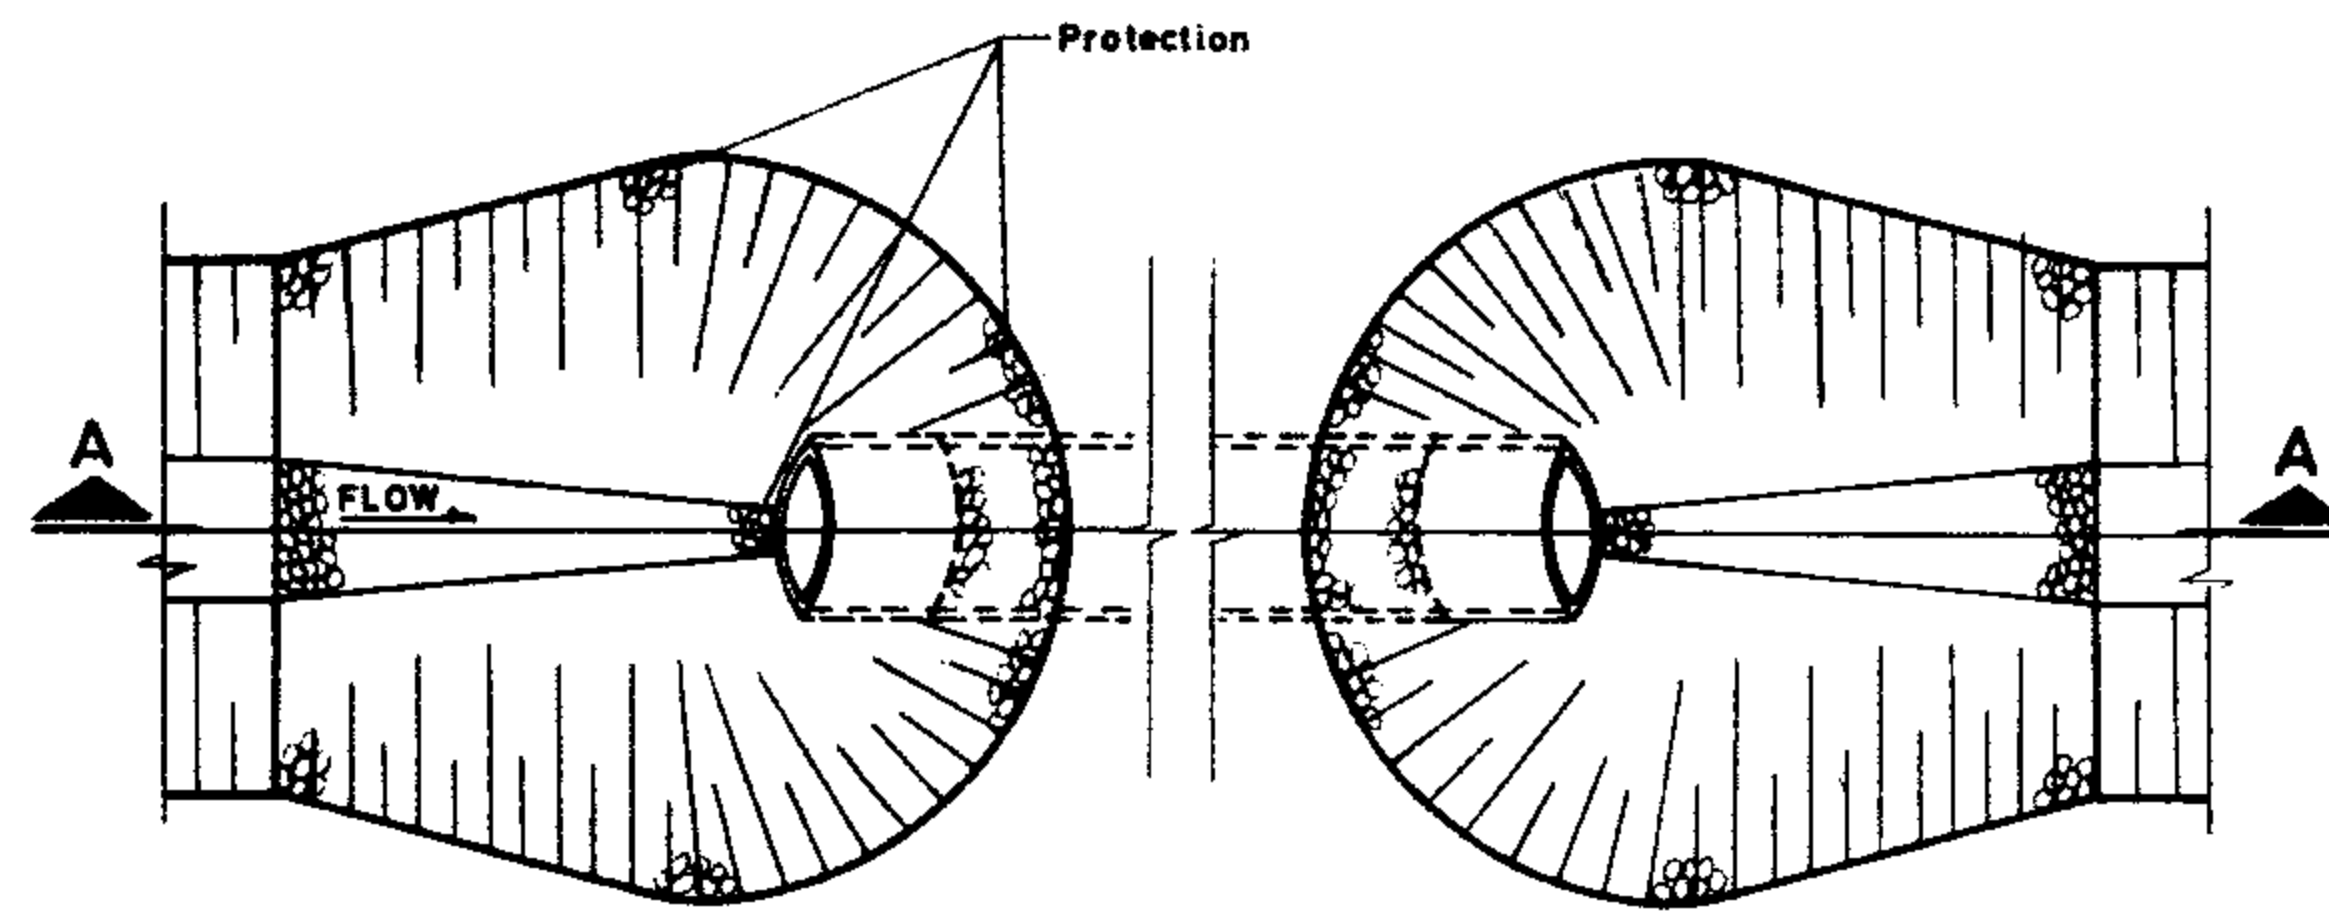

PLAN

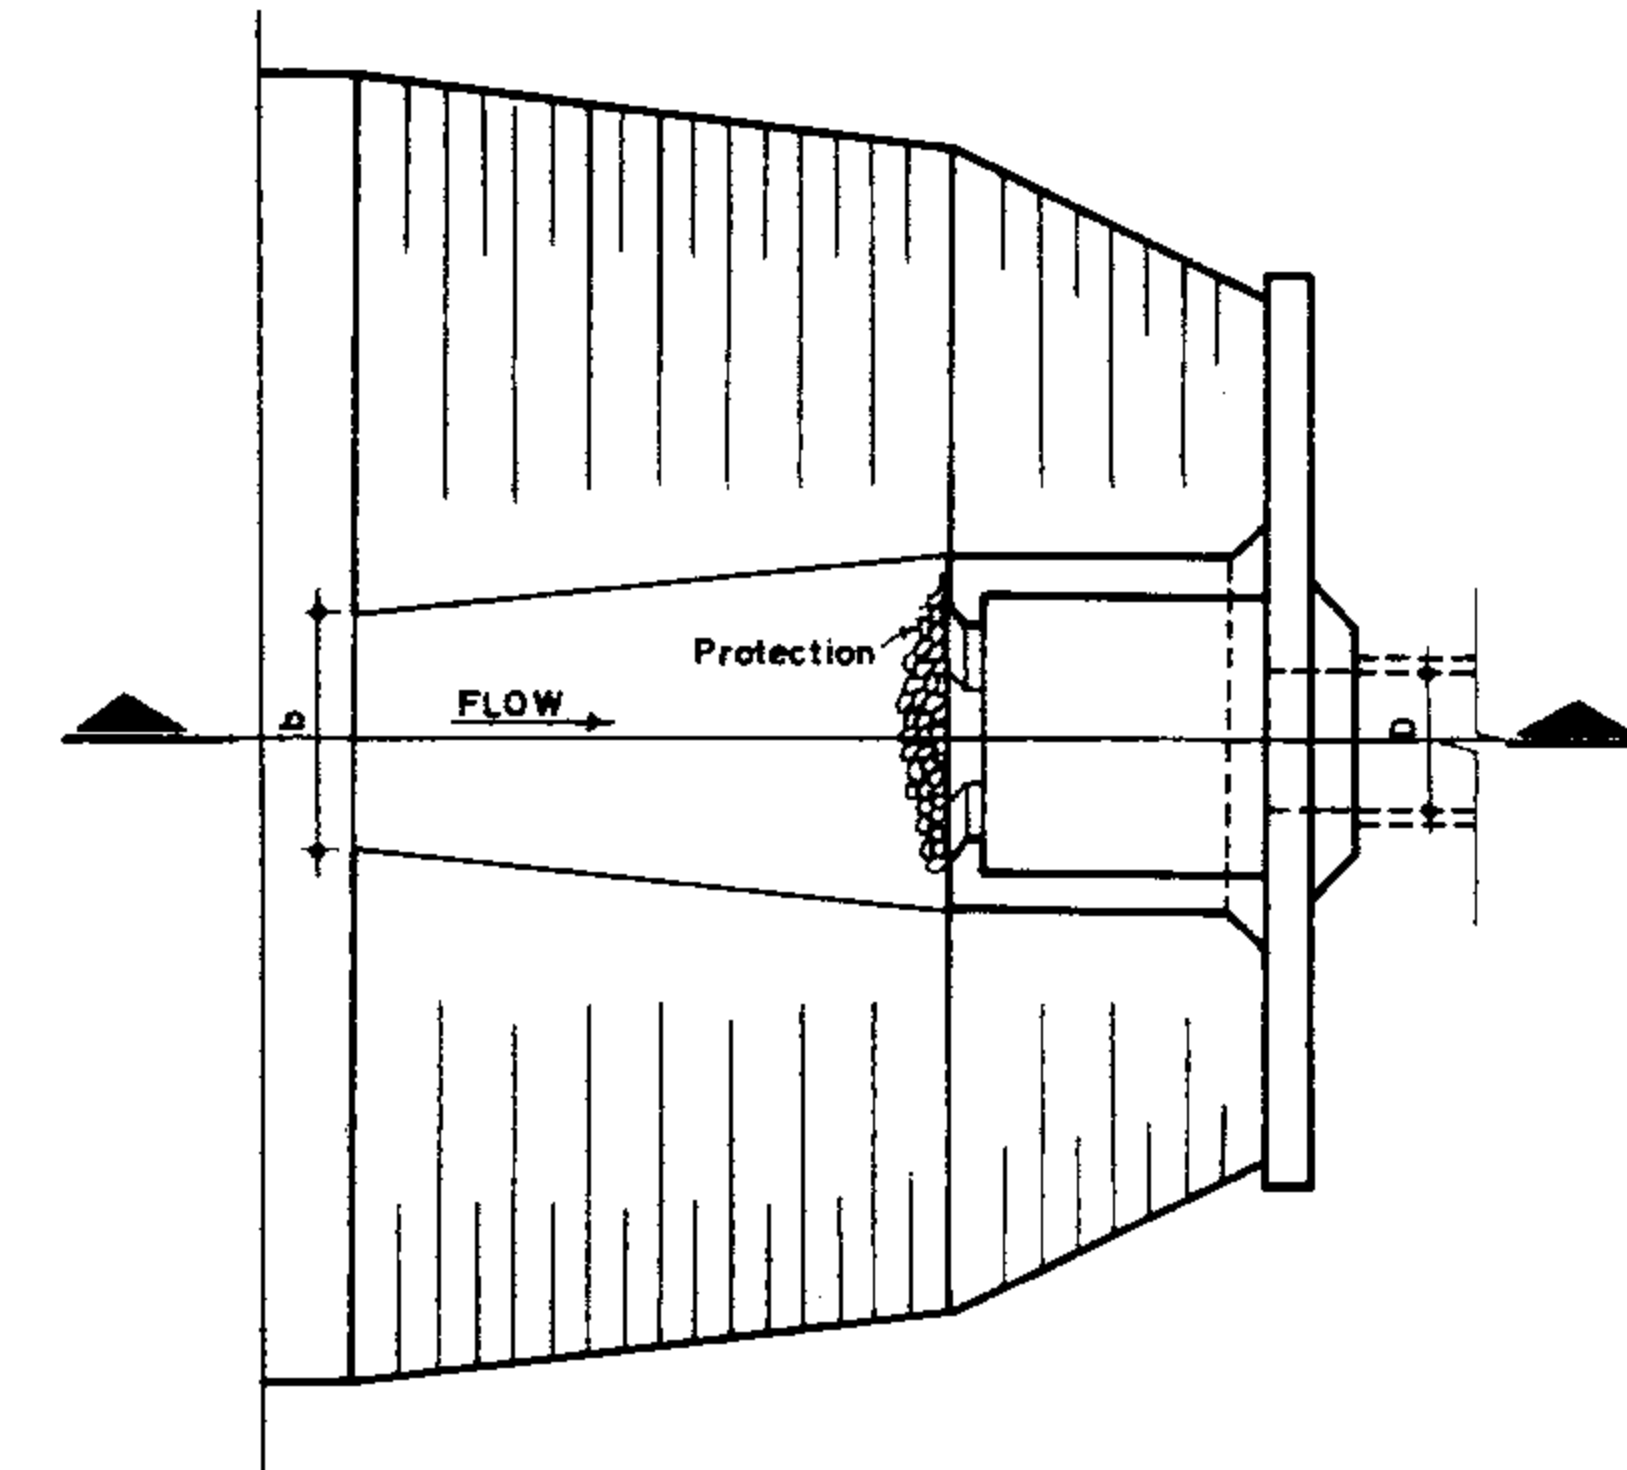


PLAN

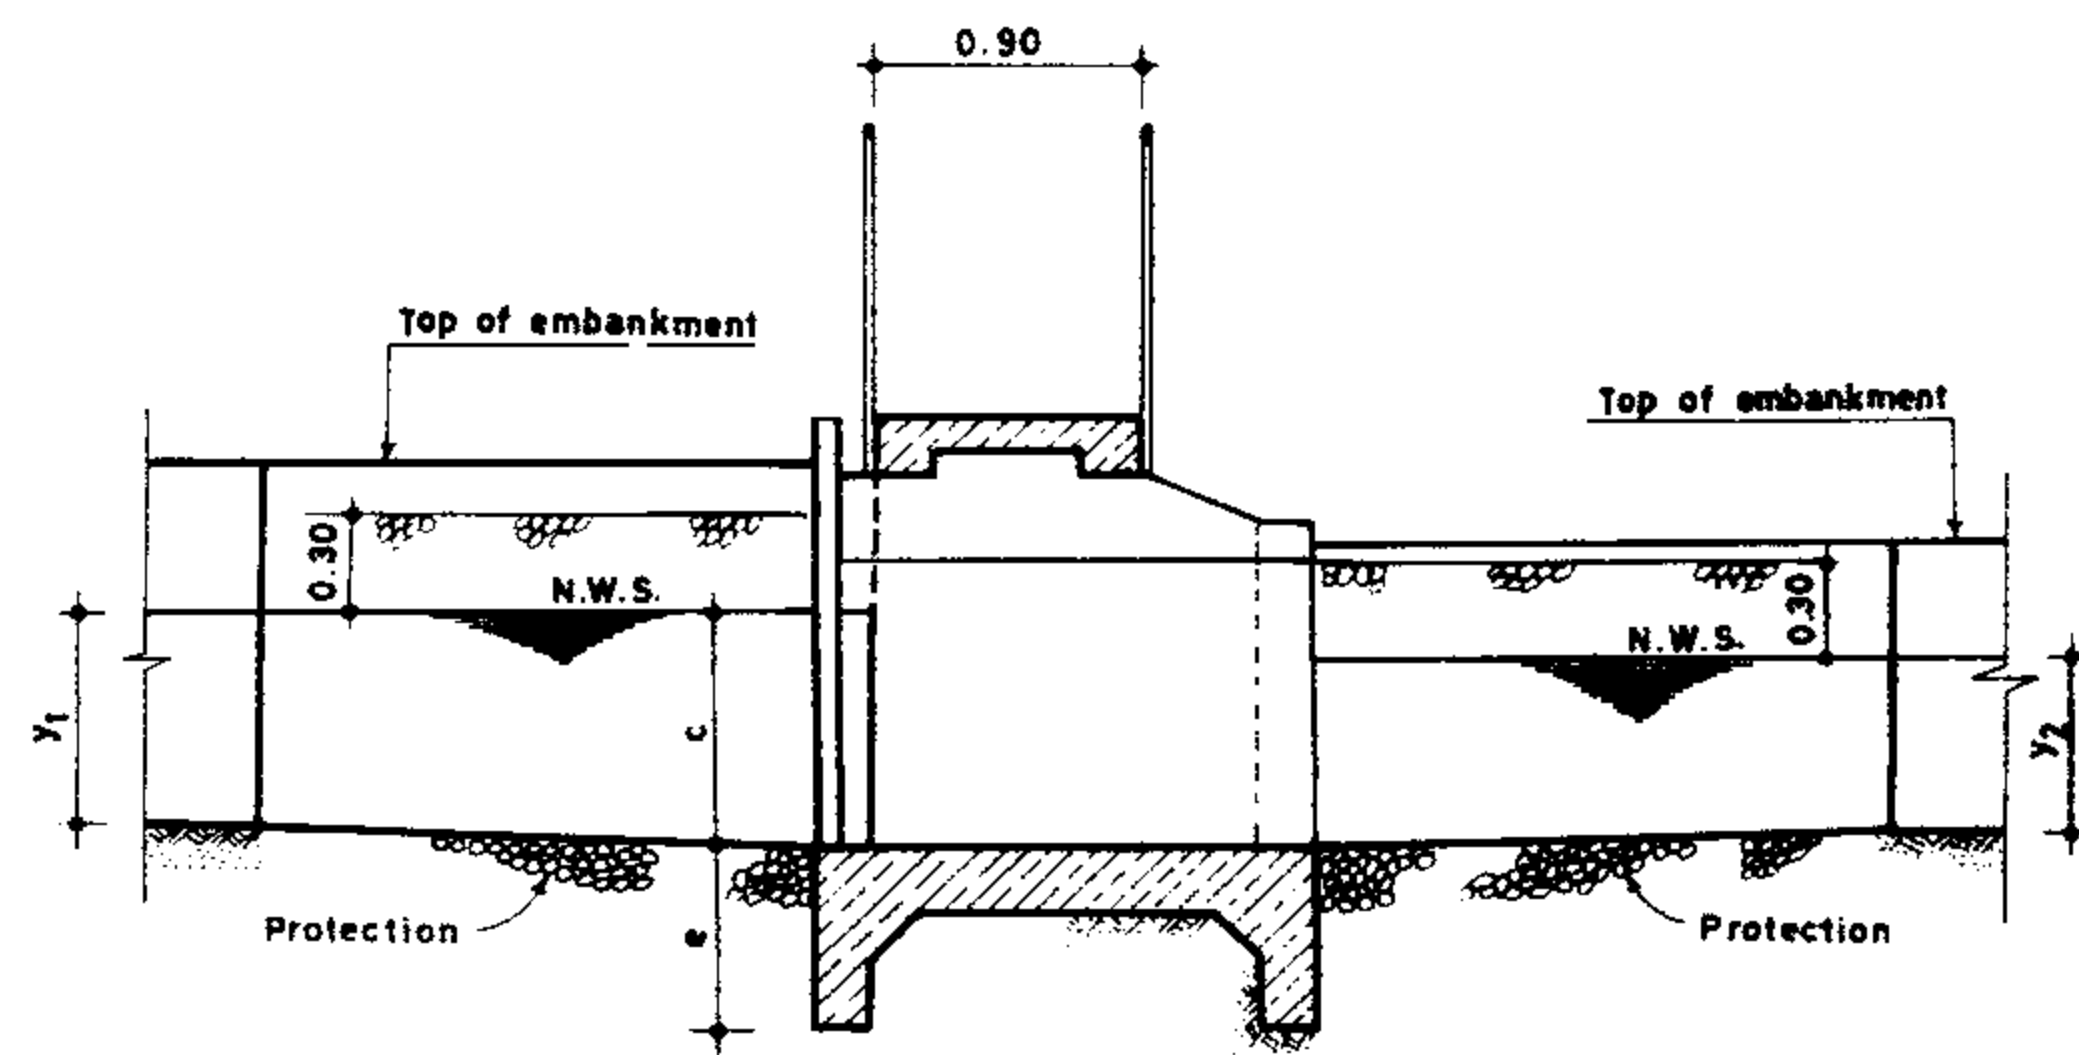


SECTION A-A

CHECK DROP

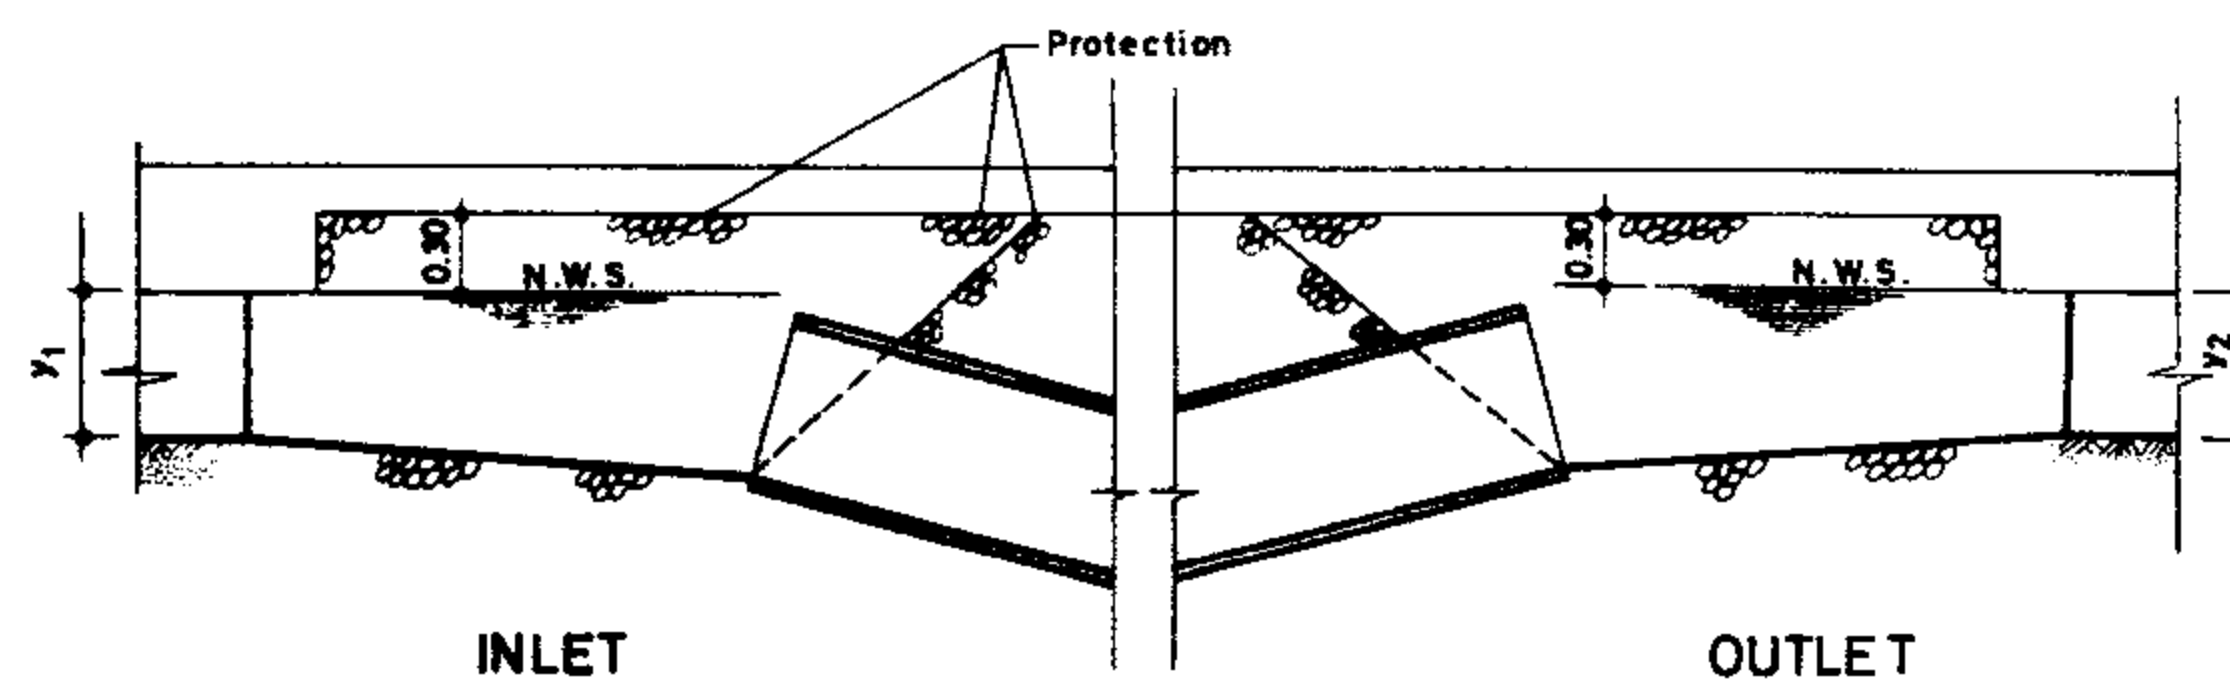

SECTION A-A

PIPE INLET OR OUTLET

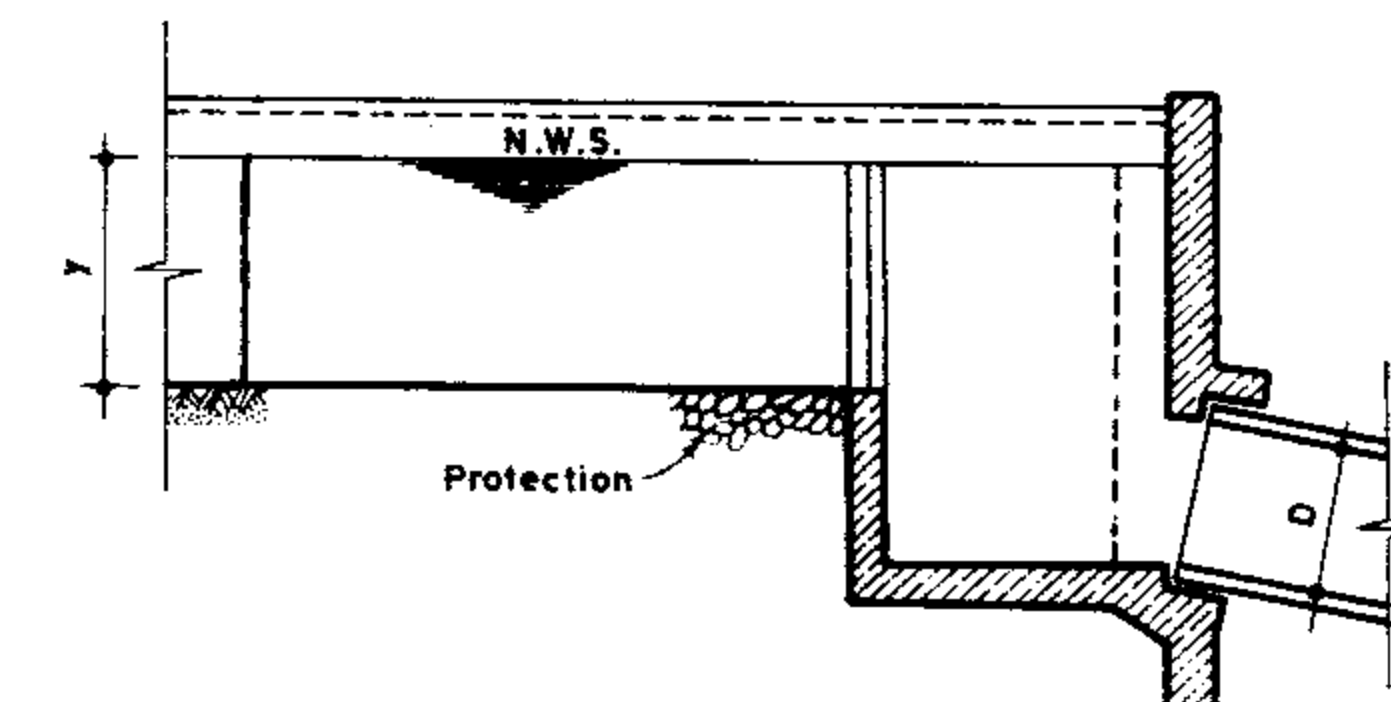

SECTION A-A

CONTROL AND PIPE INLET

REFERENCE DWGS: For construction detail of check structure see dwg. N^o. 12/1/1/02
For erosion protection notes see dwg. N^o. 13/L/1/01

Scale: N.T.S

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG. N^o. 13/3/1/01

Approved

Sheet N^o. 1 of 1

Rev. N^o

EROSION PROTECTION
FOR CHECK DROP, PIPE INLET
OR OUTLET, CONTROL AND PIPE INLET

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU

SIZE RANGE OF ROCK TO BE USED FOR EROSION PROTECTION

Type of protection	Protection thickness cm.	Max. size		Min. size	
		d m.	Cm.	d m.	Cm.
1	15	3.5	15	0.001	1
2	30	30	30	0.03	3
3	30	30	30	0.03	3
4	46	100	46	3	15

CROSS DRAINAGE STRUCTURES

Q m ³ /sec.	Type of protection		
	Inlet	Outlet	Outlet length (m)
0 - 1	None	Type 2	2.5
1 - 2	None	Type 2	3.5
2 <	Type 1	Type 3	4.5

NOTES:

- The types of erosion protection shown on various drawings represent minimum thickness and sizes of material to be used, and adjustment should be made to the local conditions.
- 15 Cm. sand and gravel bedding (filter material) for rip rap should be a continuous layer of sand and gravel or sand and crushed rock, reasonably well graded to a max. of 35mm. in size
- Stone protection and filter material shall be placed in a uniform thickness normal to finished grade and to the limits shown on plans and sections.
- Type of stone protection to be used for inlets and outlets of various irrigation and drainage structures shall be selected from the table "type of protection"
- Unless otherwise noted transition length from the end of the conduit to existing channel shall be 3 times D for inlet and 4 times D for outlet or determined by the engineer
- Metal guard railing shall be determined by the engineer if required.
- Bottom width at the end of stone protection to be 2.5xH or 2.5xD for drainage culvert and HorD for irrigation culvert or the outside width of the inlet and outlet structures whichever is greater.
- H calls for box and D calls for pipe

Parshall flumes, Checks, Check drops, Chutes, inclined drops, Check & pipe inlet, Control & pipe inlet, Road crossing, Turnouts, Etc.

Water depth d (m.)	Type of protection	
	Inlet	Outlet
0.60	None	Type 1
0.60 - 1.00	None	Type 2
1.00 - 2.00	Type 1	Type 3

TYPE OF PROTECTION

Type 1	15cm. coarse gravel
Type 2	30cm. coarse gravel
Type 3	30cm. riprap on 15cm. sand and gravel bedding.
Type 4	45cm. riprap on 15cm. sand and gravel bedding

SIPHONS

Water depth d (m.)	Type of protection		Length of protection	
	Inlet	Outlet	Inlet	Outlet
0 - 0.60	None	None	—	—
0.60 - 1.00	None	Type 1	—	2.5 depth (1.5m. Min.)
1.00 - 2.00	Type 1	Type 2	1 depth (1.5m. Min.)	2.5 depth (1.5m. Min.)

REFERENCE DWG:

Scale:

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG No 13/4 /1/01






EROSION PROTECTION

Approved:

Sheet No 1 of 1 Rev No

TYPES, QUANTITIES & NOTES

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU

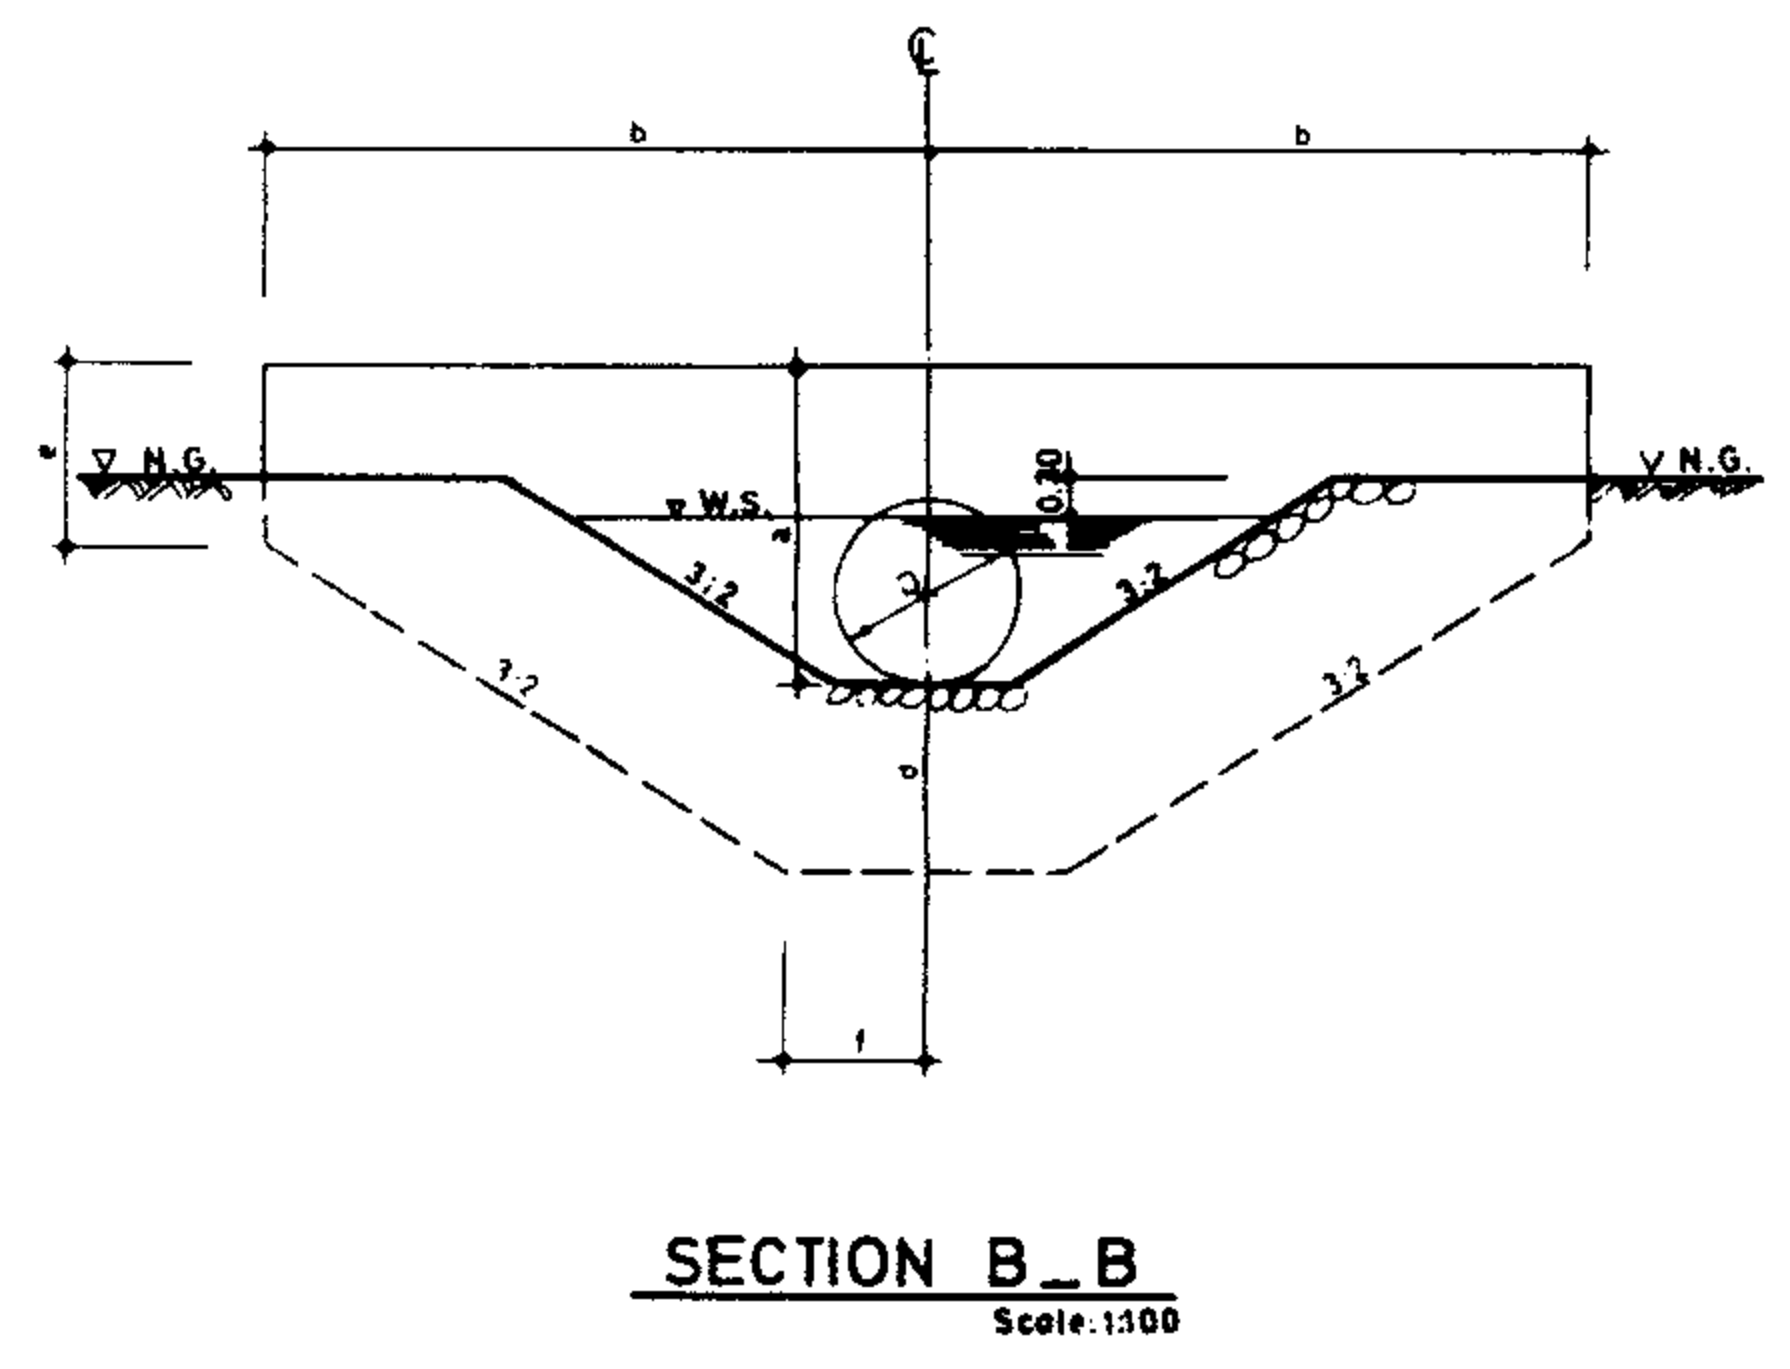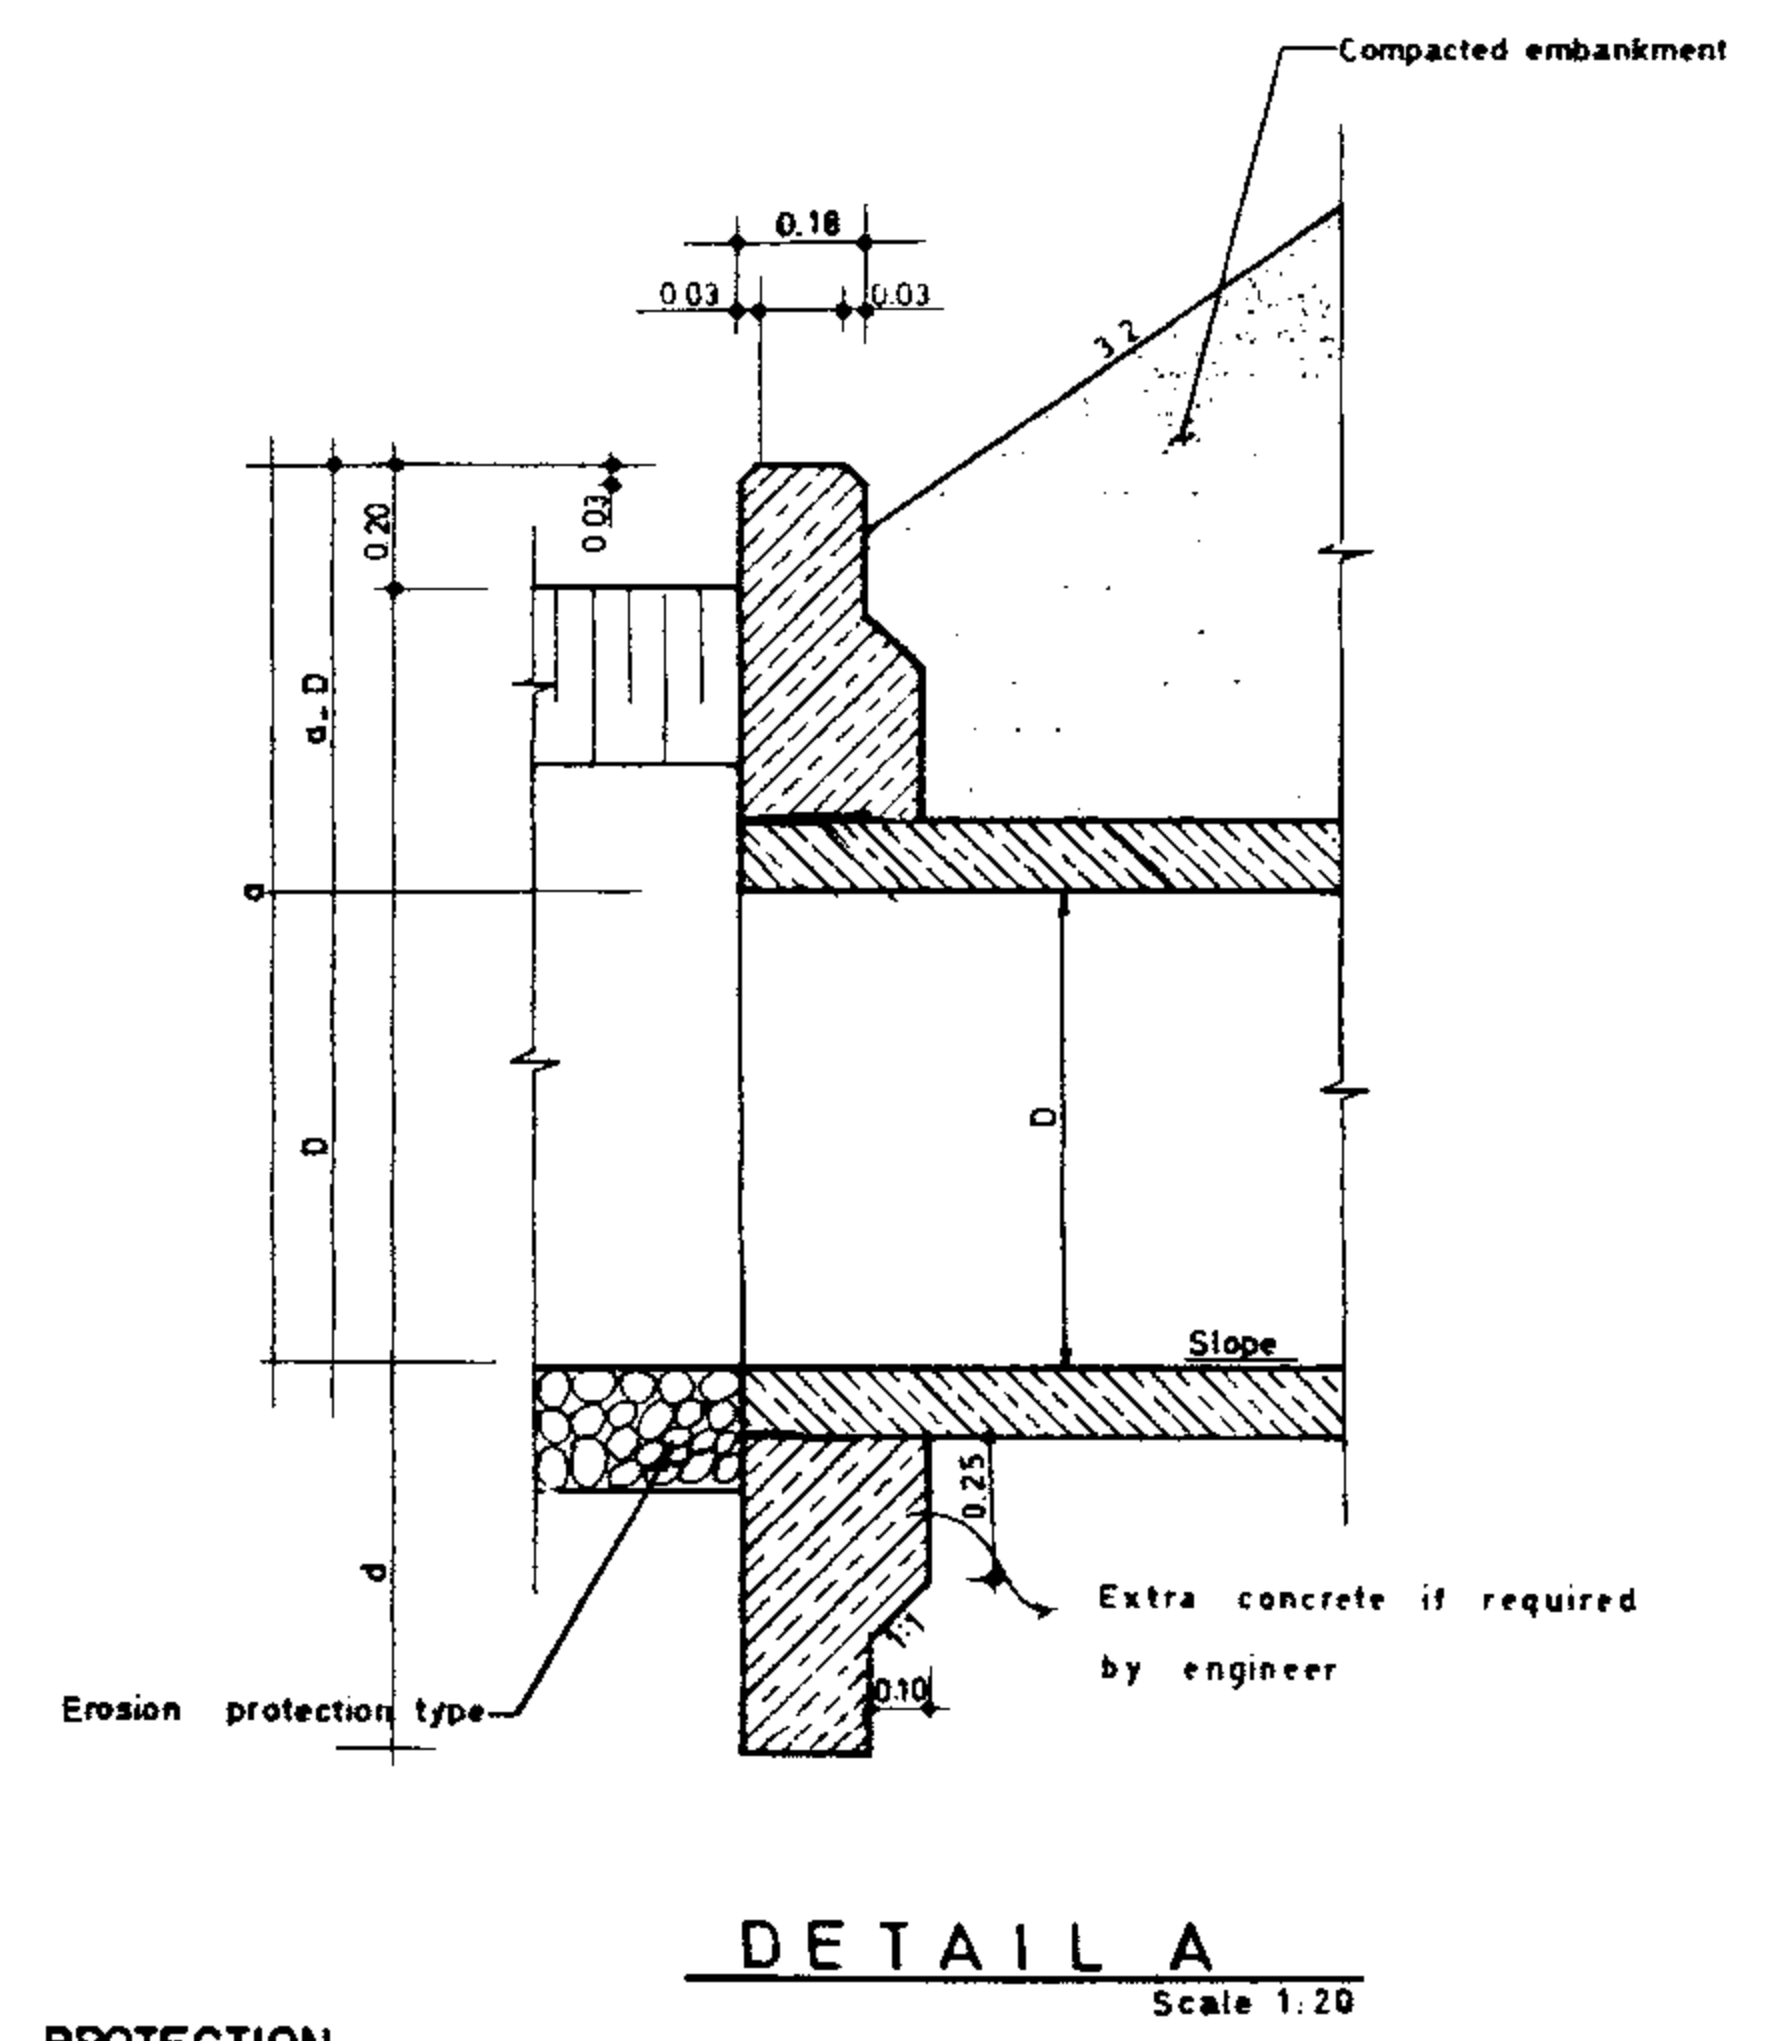
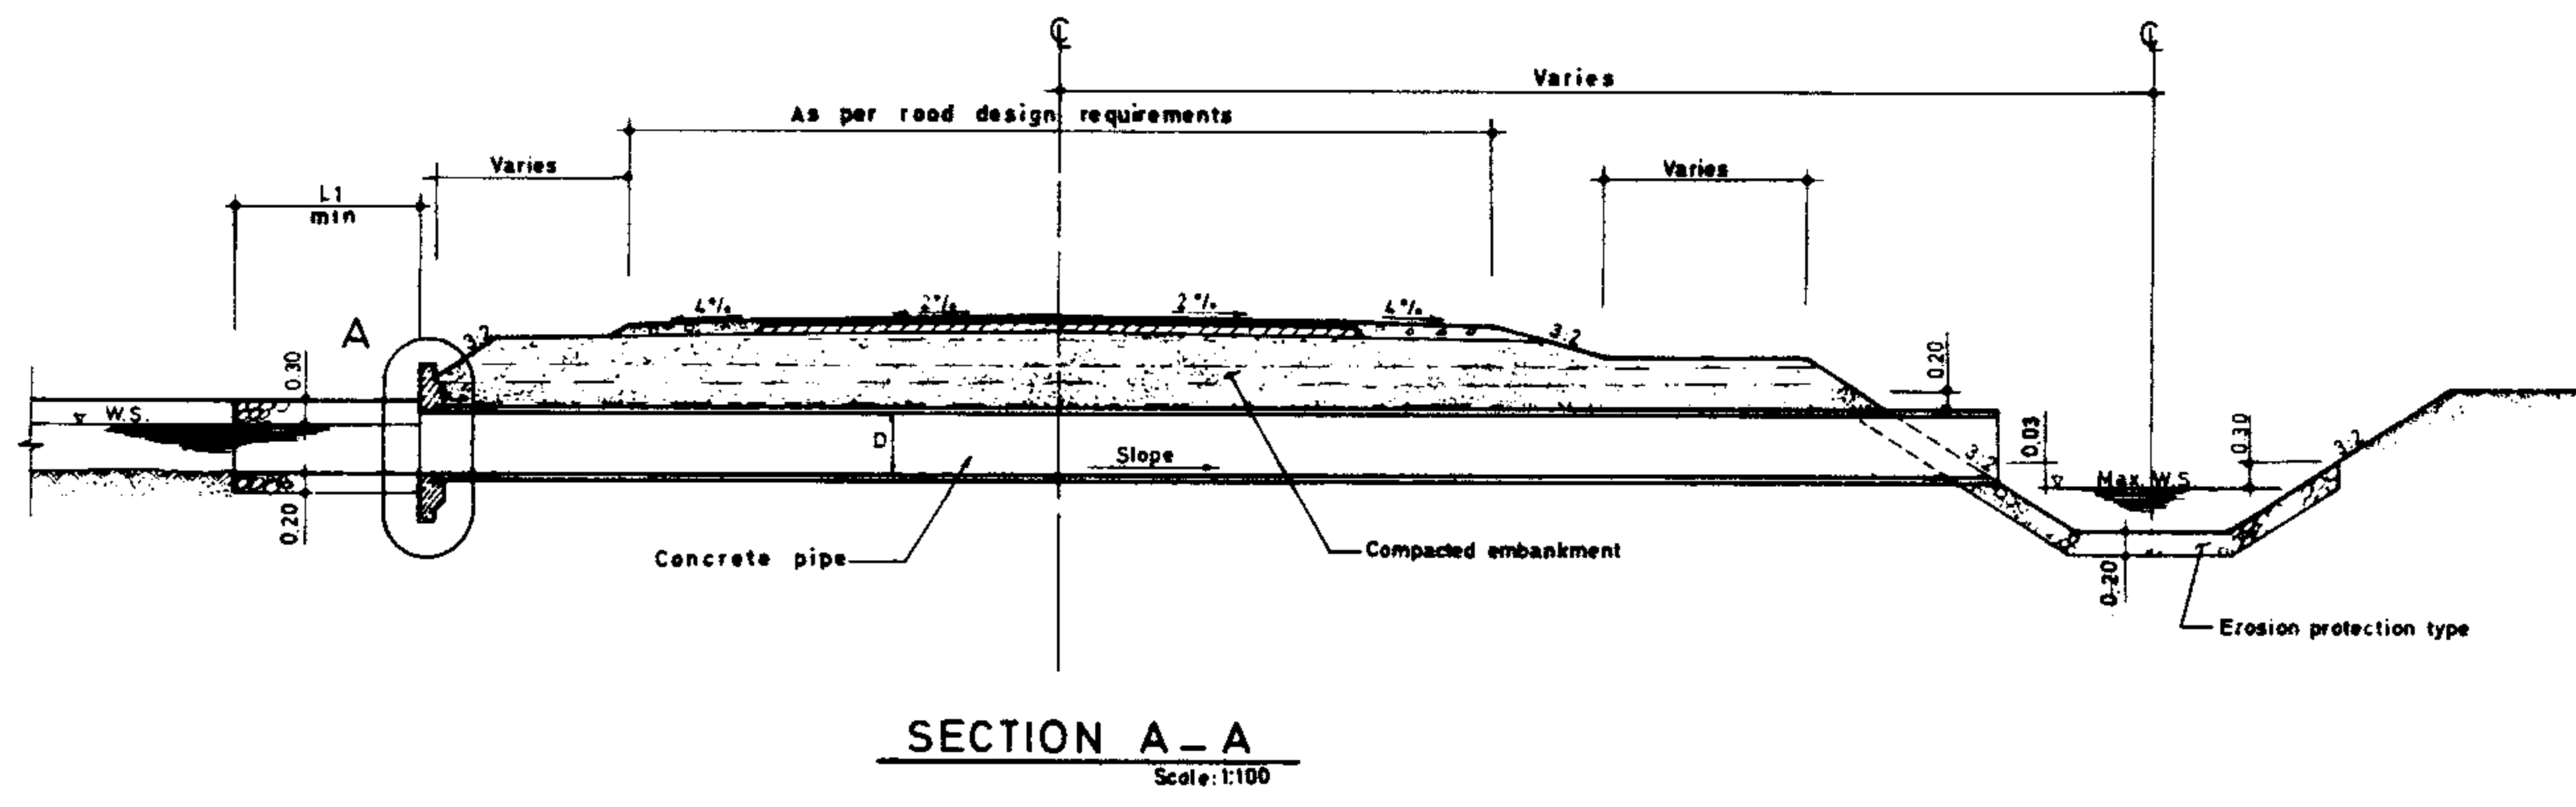
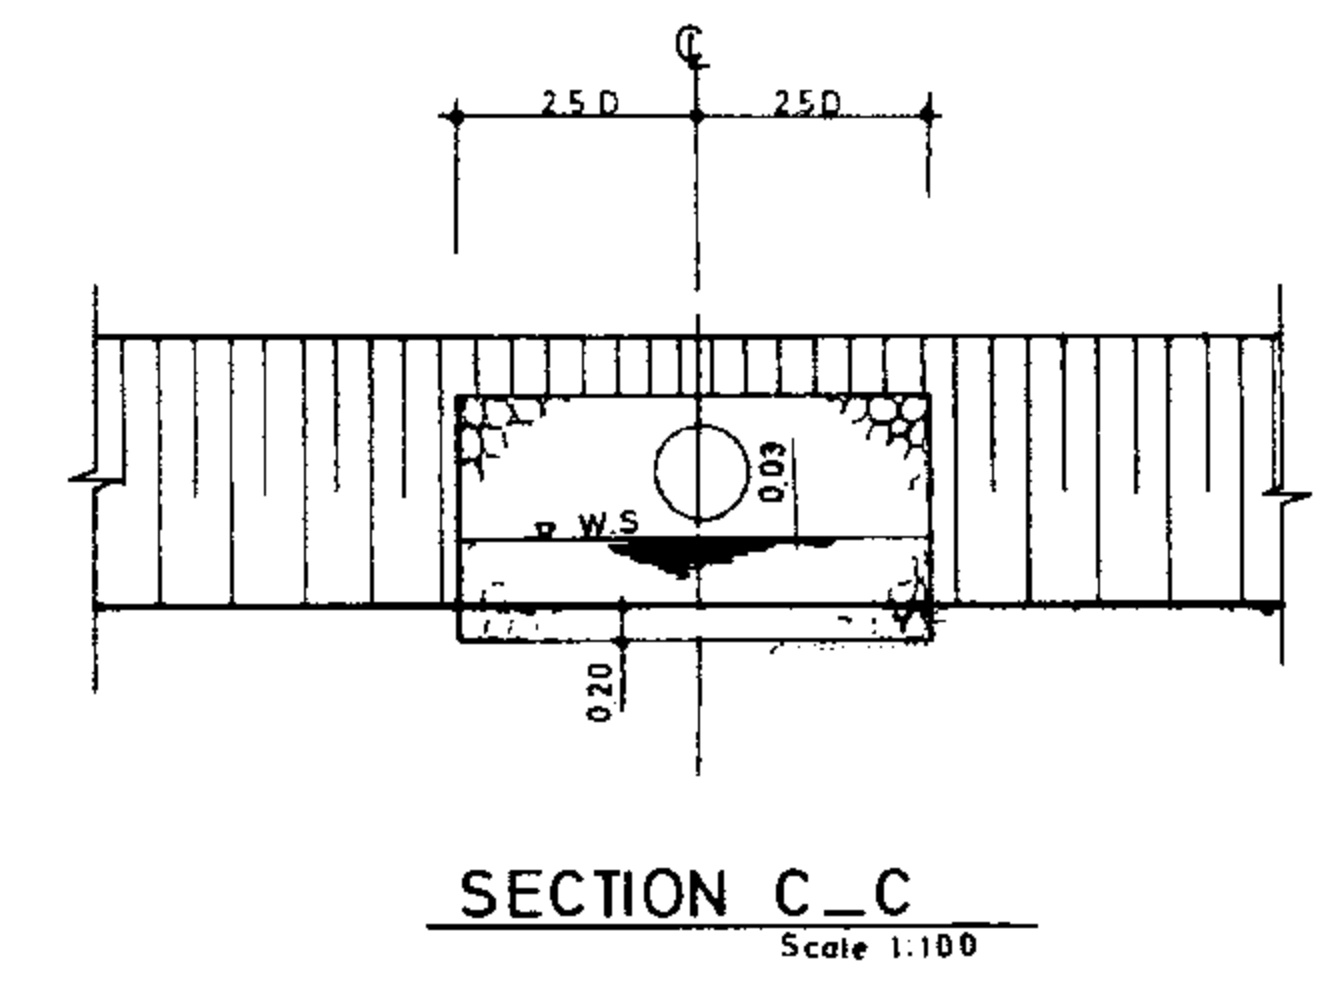
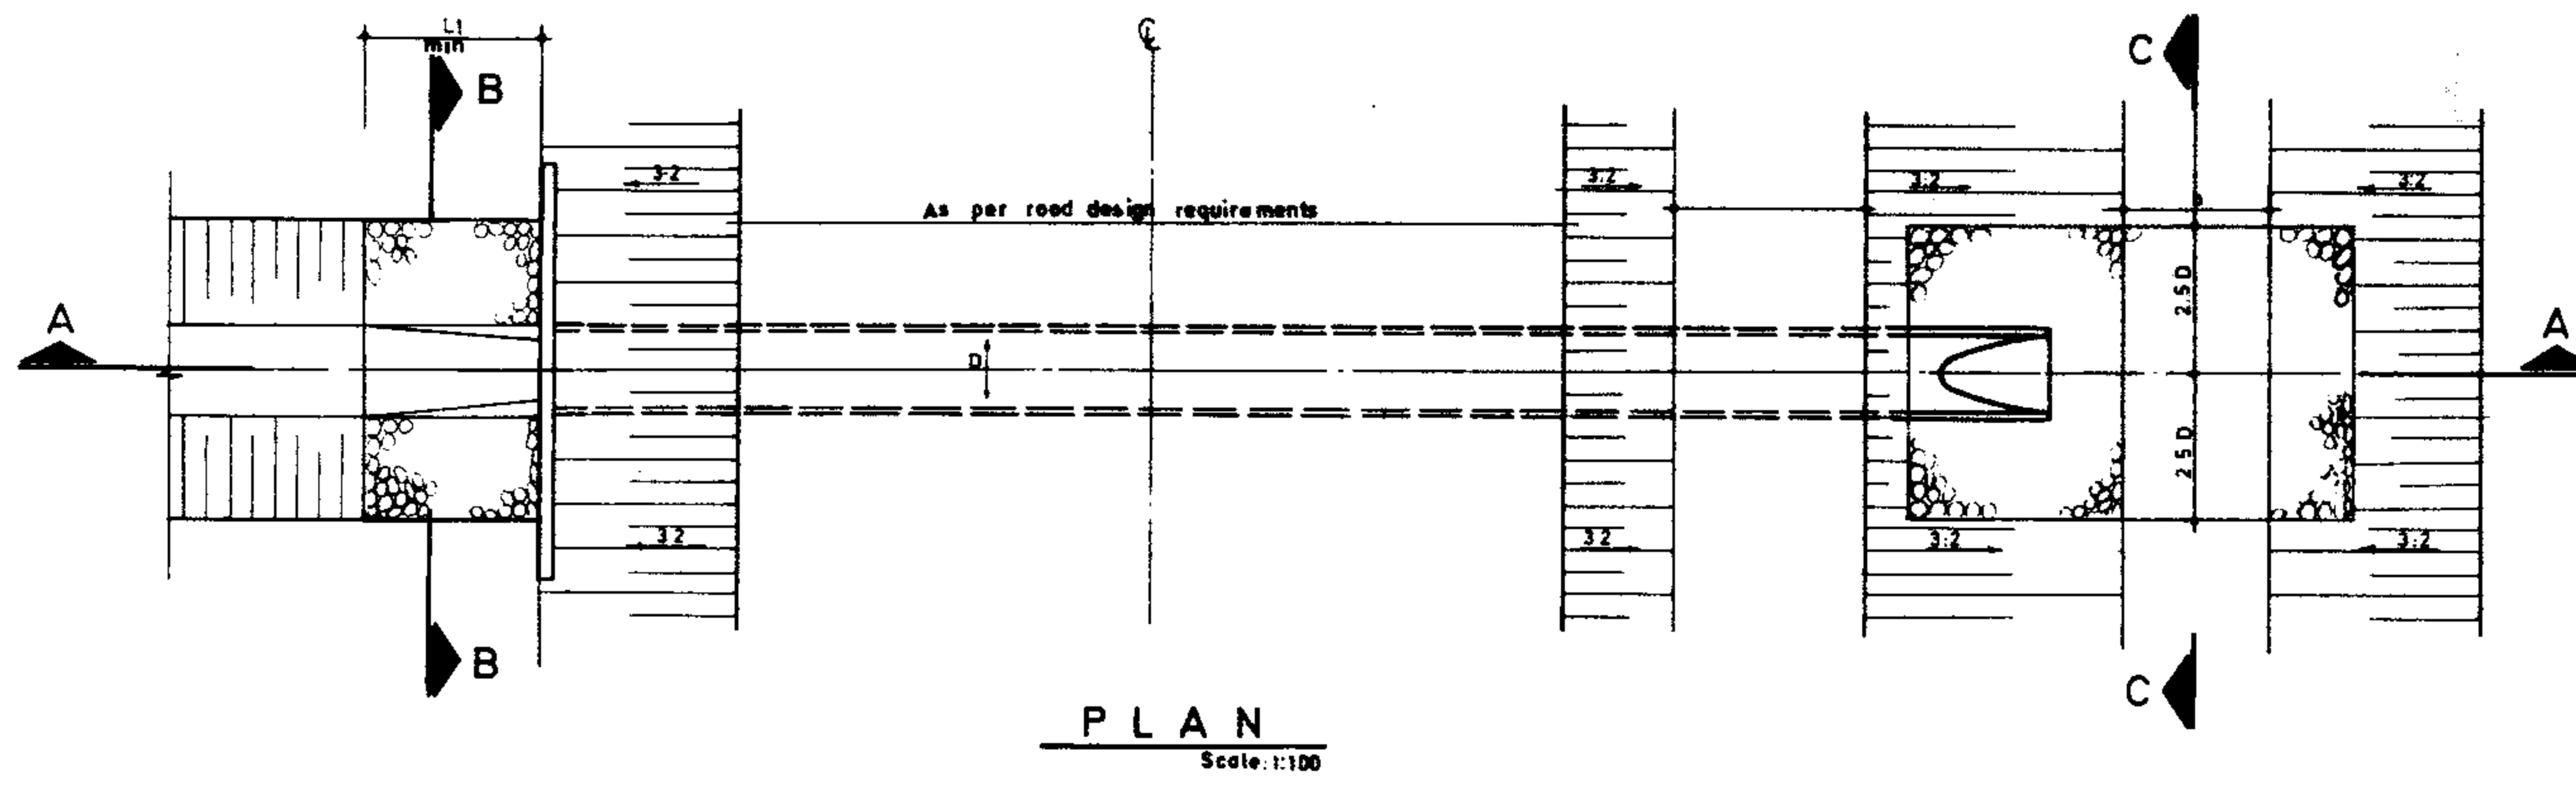


CONCRETE HEADWALL DIMENSION TABLE

D cm	a	b	In let c	Outlet c	d	e	f
0.30	1.10	2.45	0.60	0.40	0.60	0.30	0.35
0.40	1.20	2.65	0.70	0.55	0.60	0.30	0.40
0.50	1.30	2.85	0.80	0.70	0.60	0.30	0.45
0.60	1.40	3.05	0.90	0.80	0.60	0.30	0.50
0.70	1.50	3.25	1.00	0.95	0.80	0.50	0.55
0.80	1.60	3.45	1.10	1.10	0.80	0.50	0.60
0.90	1.70	3.65	1.20	1.20	0.80	0.50	0.65
1.00	1.80	3.85	1.30	1.30	0.80	0.50	0.70

EROSION PROTECTION DIMENSION TABLE

L ₁ m	type of protection	Q m ³ /Sec.
-	2	0-1
-	2	1-2
1.5	3	1
		2

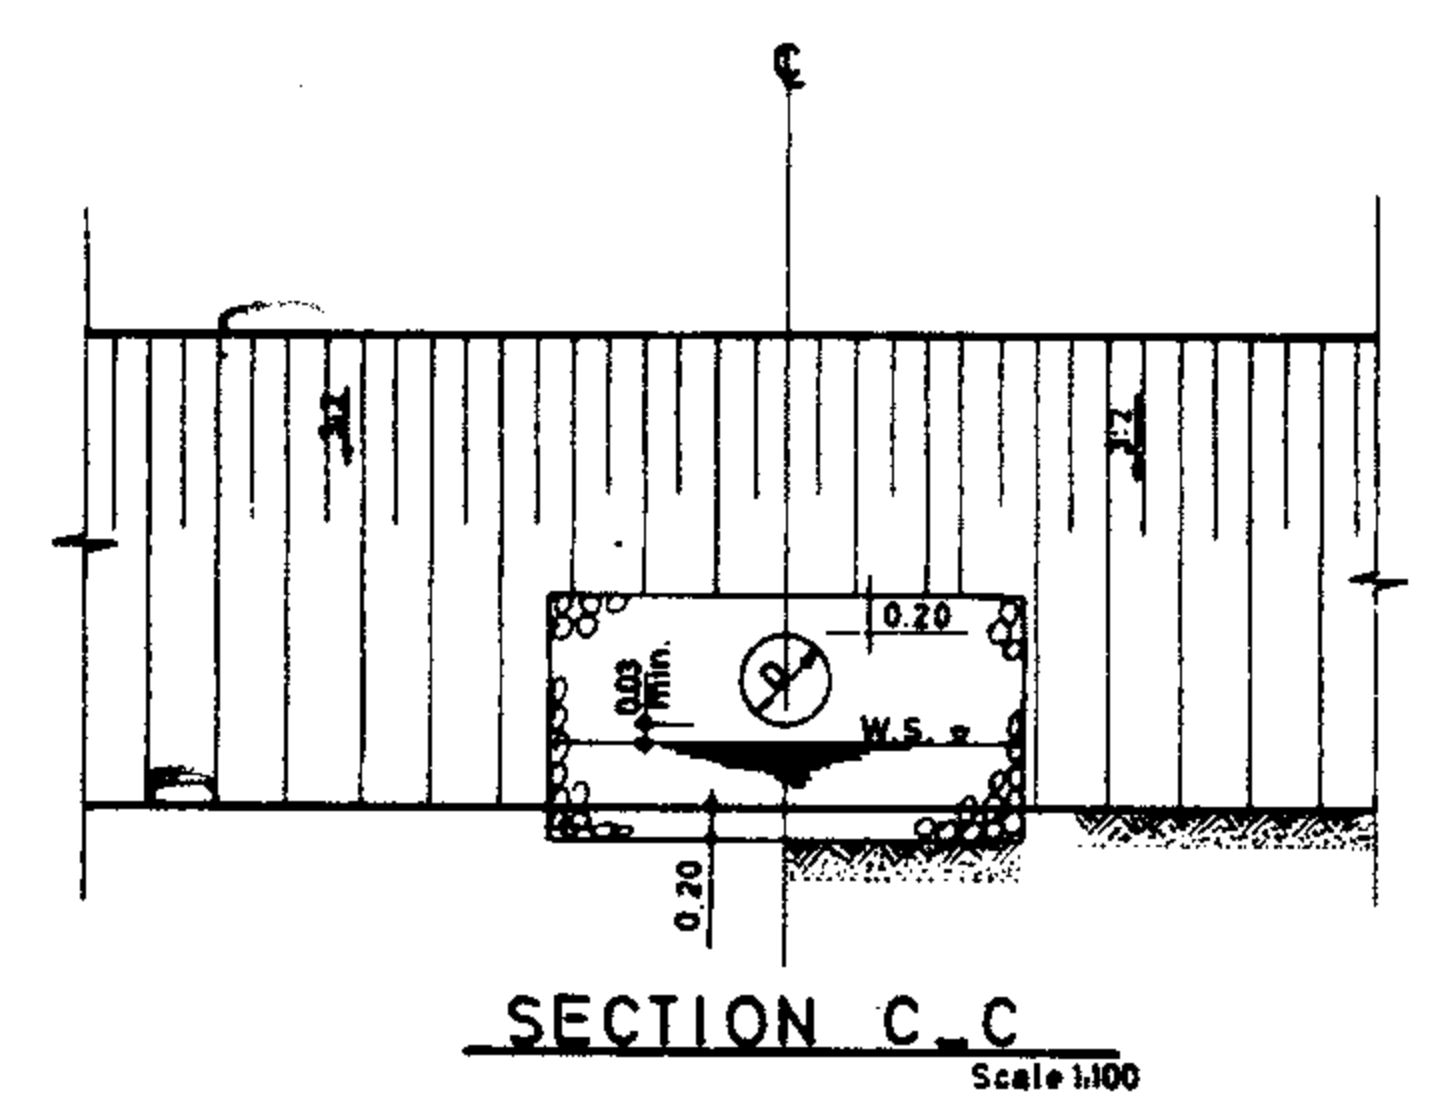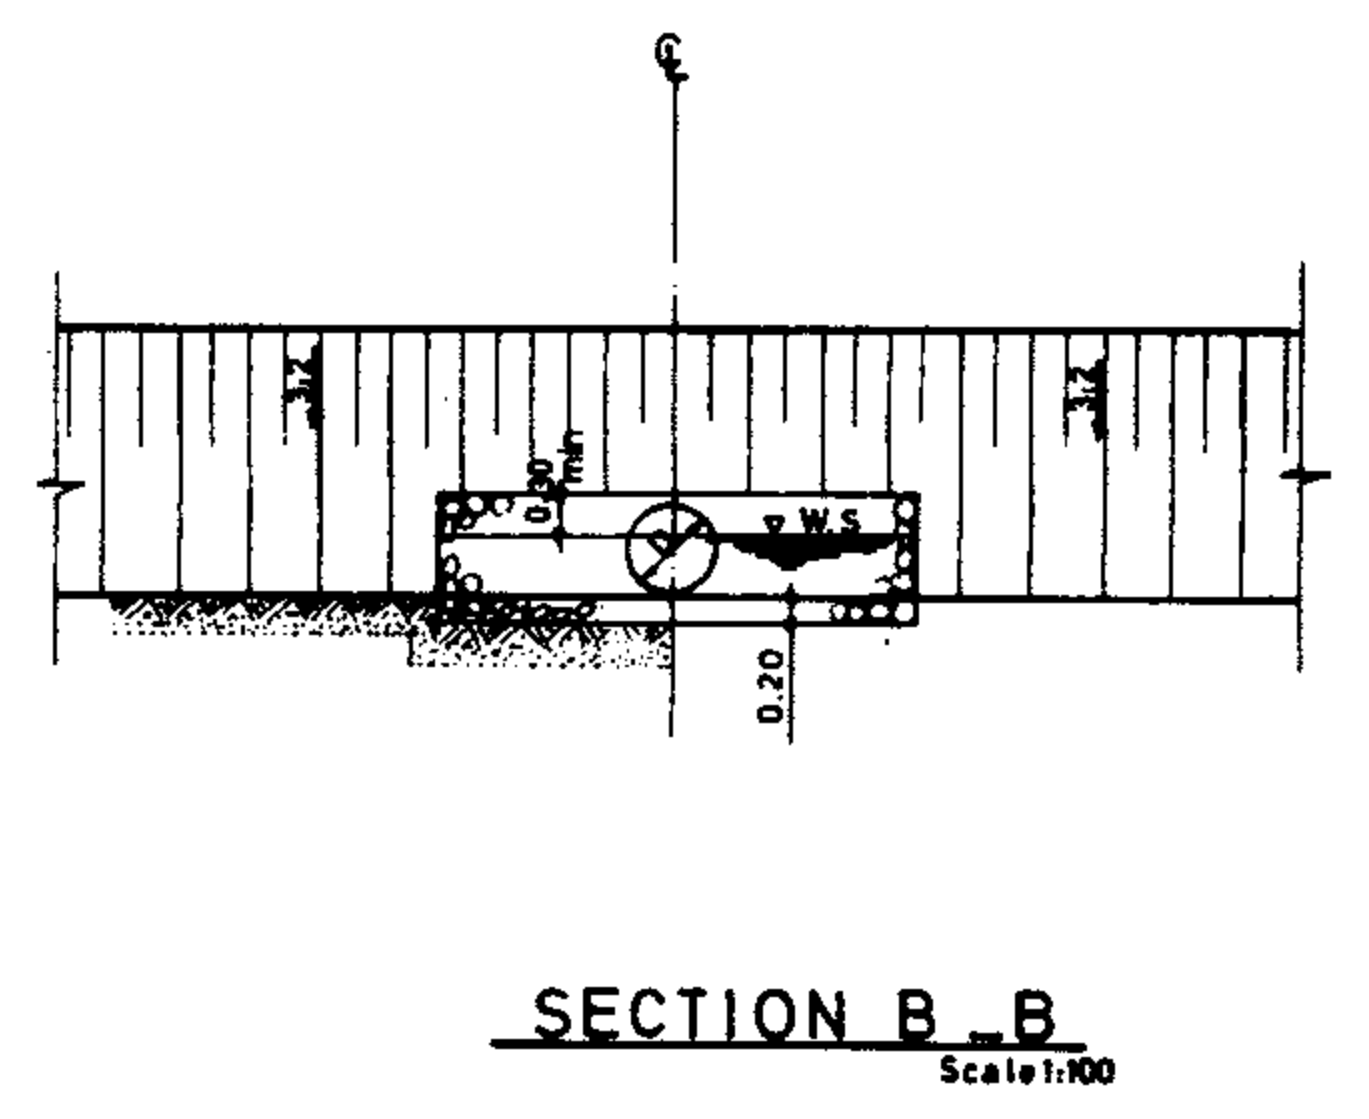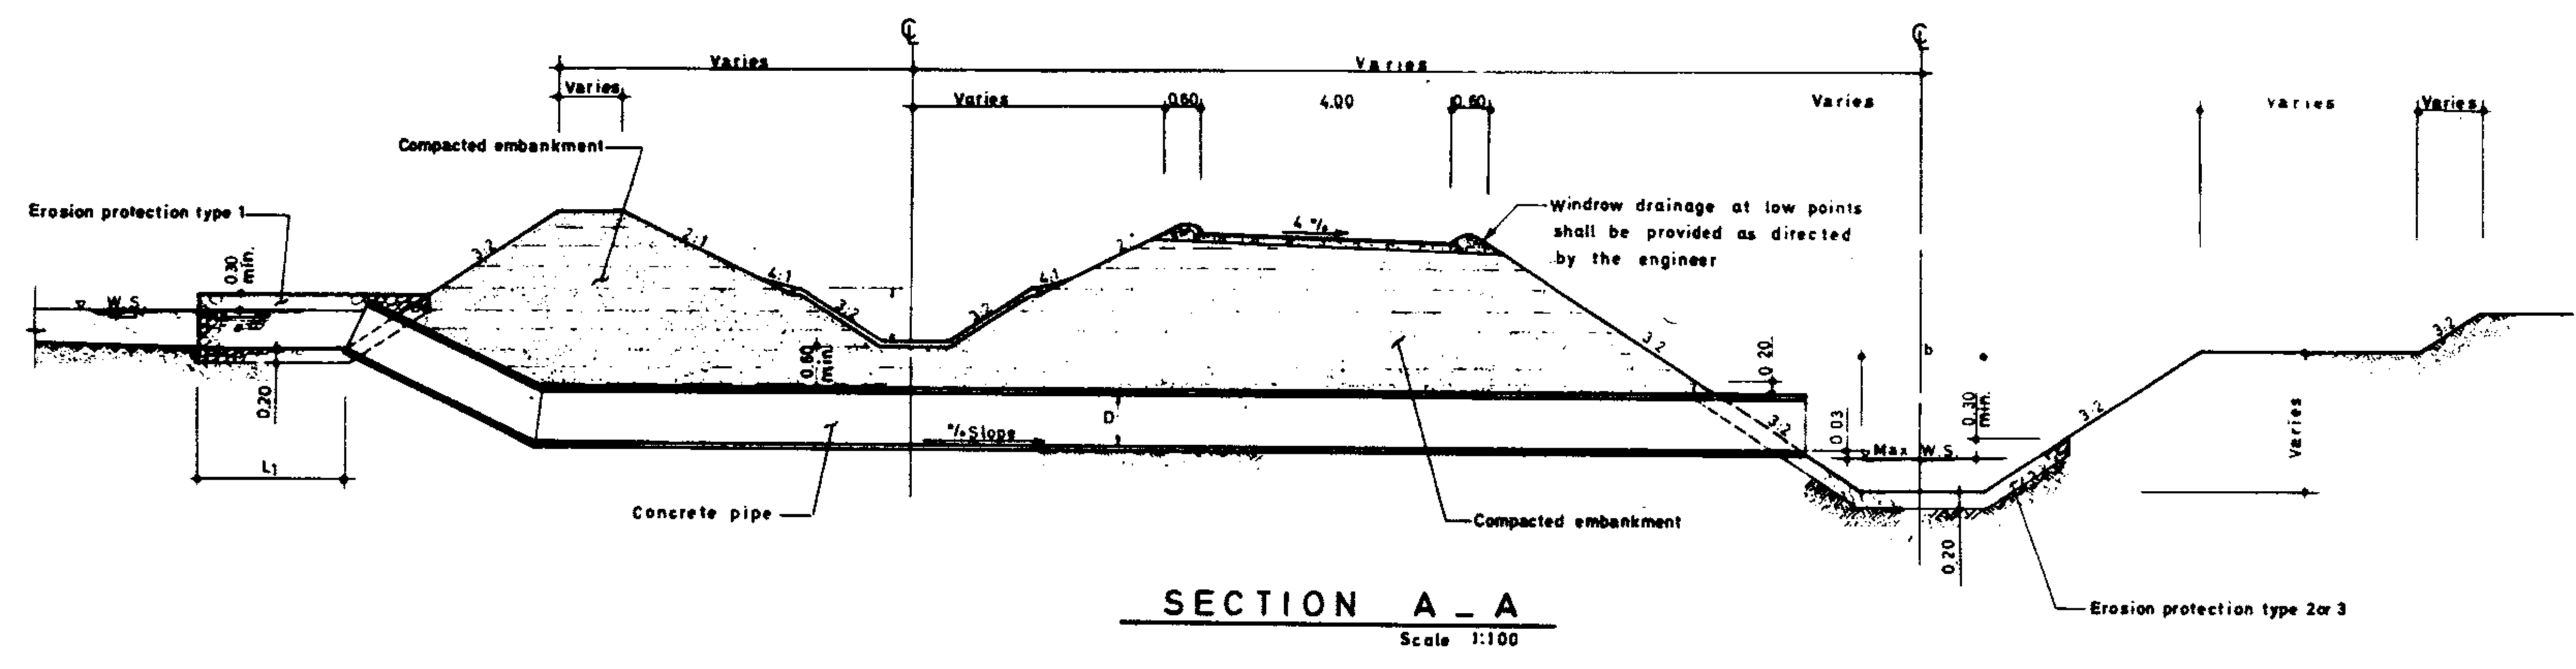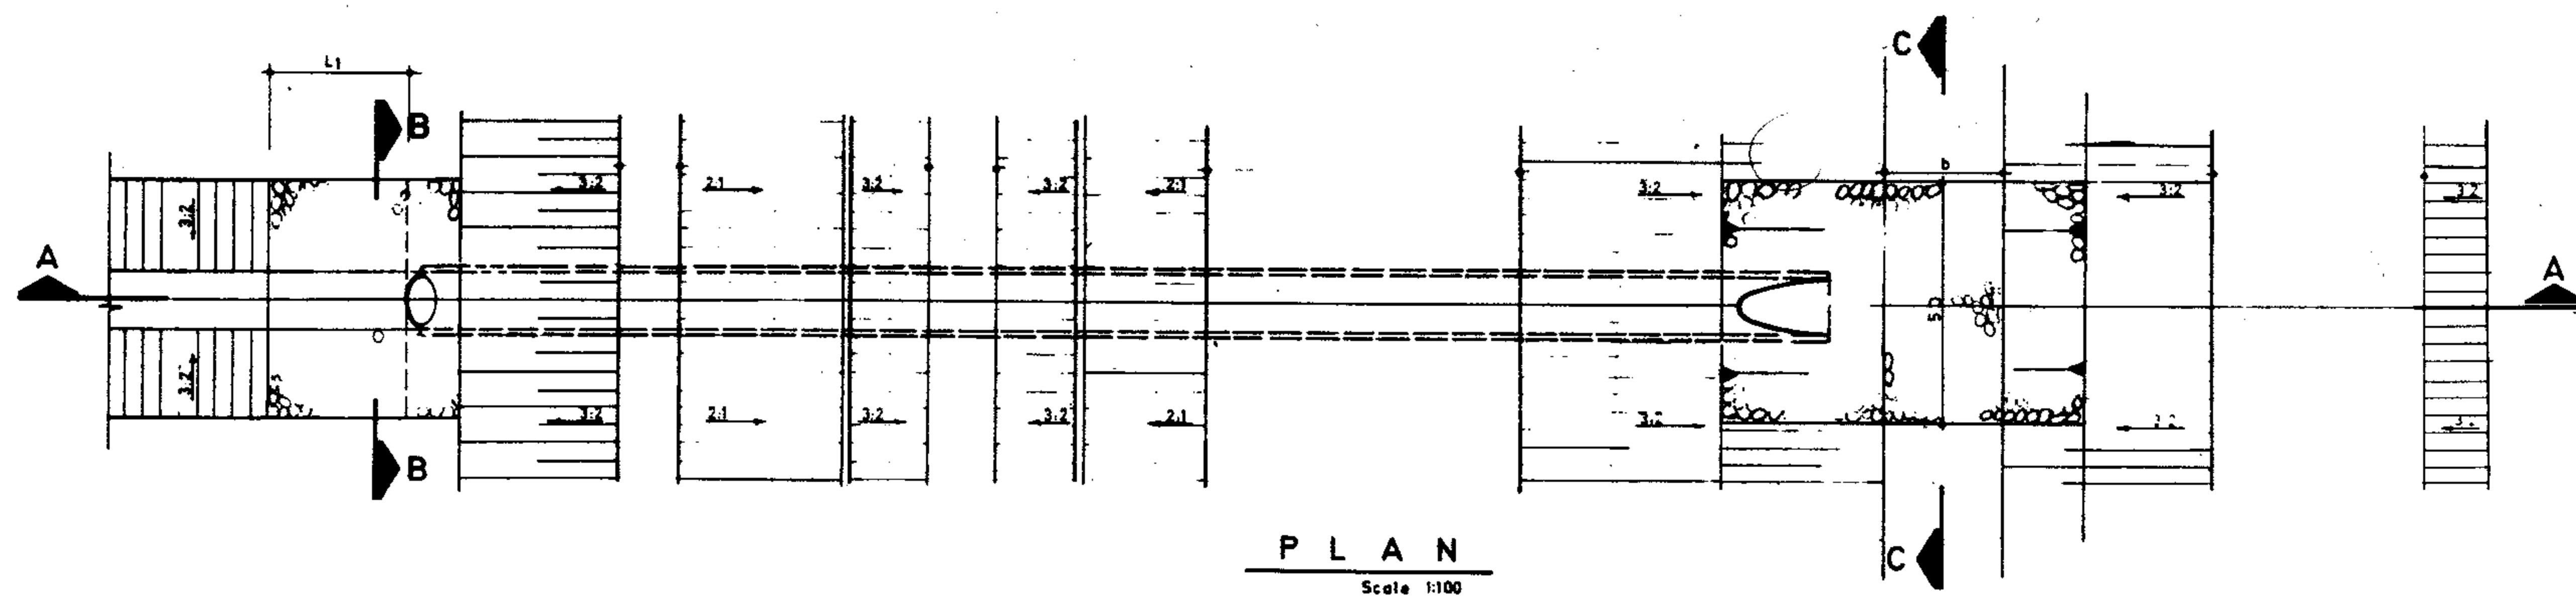

REFERENCE DWGS:

For erosion protection notes see dwg. No 13/4/1/01
 For pipe drain inlet see dwg. No 13/13/1/01
 For windrow dimension see dwg. No 19/2/1/01

Scale: 1:100

Date:

Approved:





DWG. No. 13/2/1/01

Sheet No. 1 of 1 Rev. No.

IRRIGATION & DRAINAGE STANDARDS

**EROSION PROTECTION
FOR CULVERT AND CANAL
CROSS DRAINAGE**

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

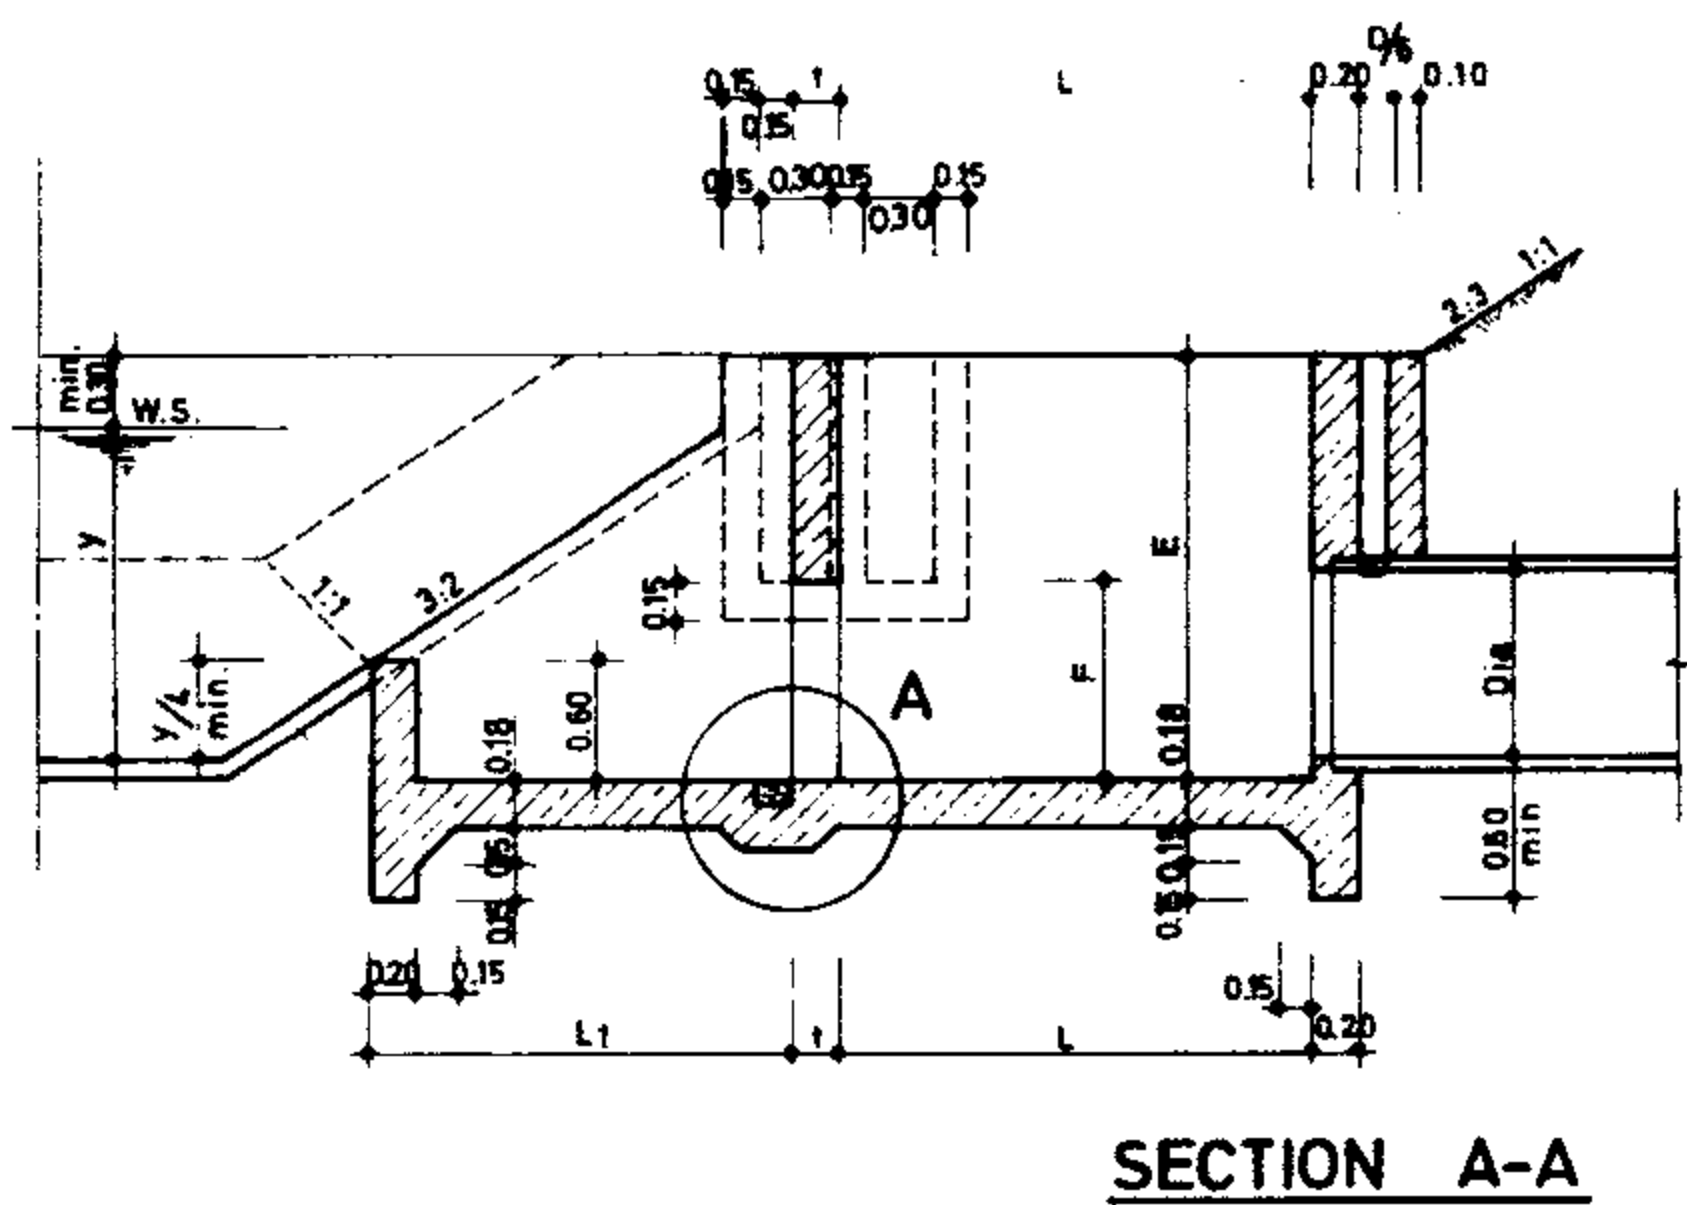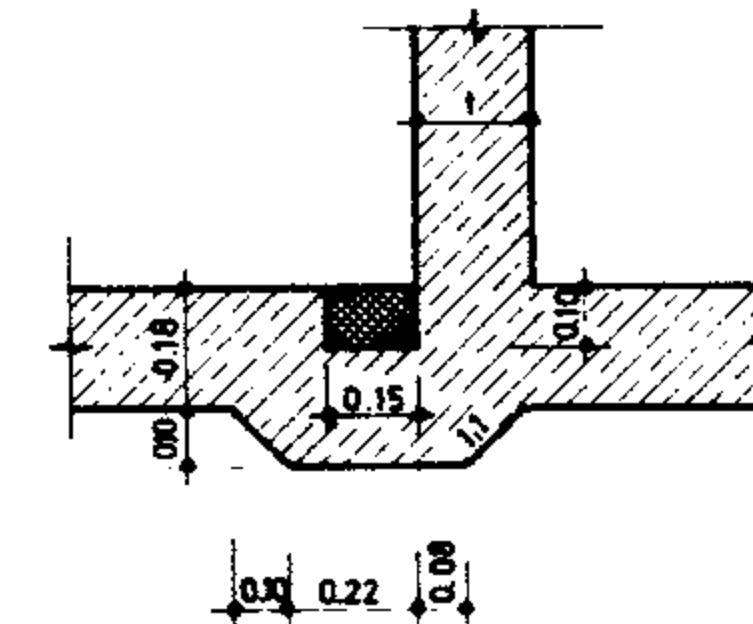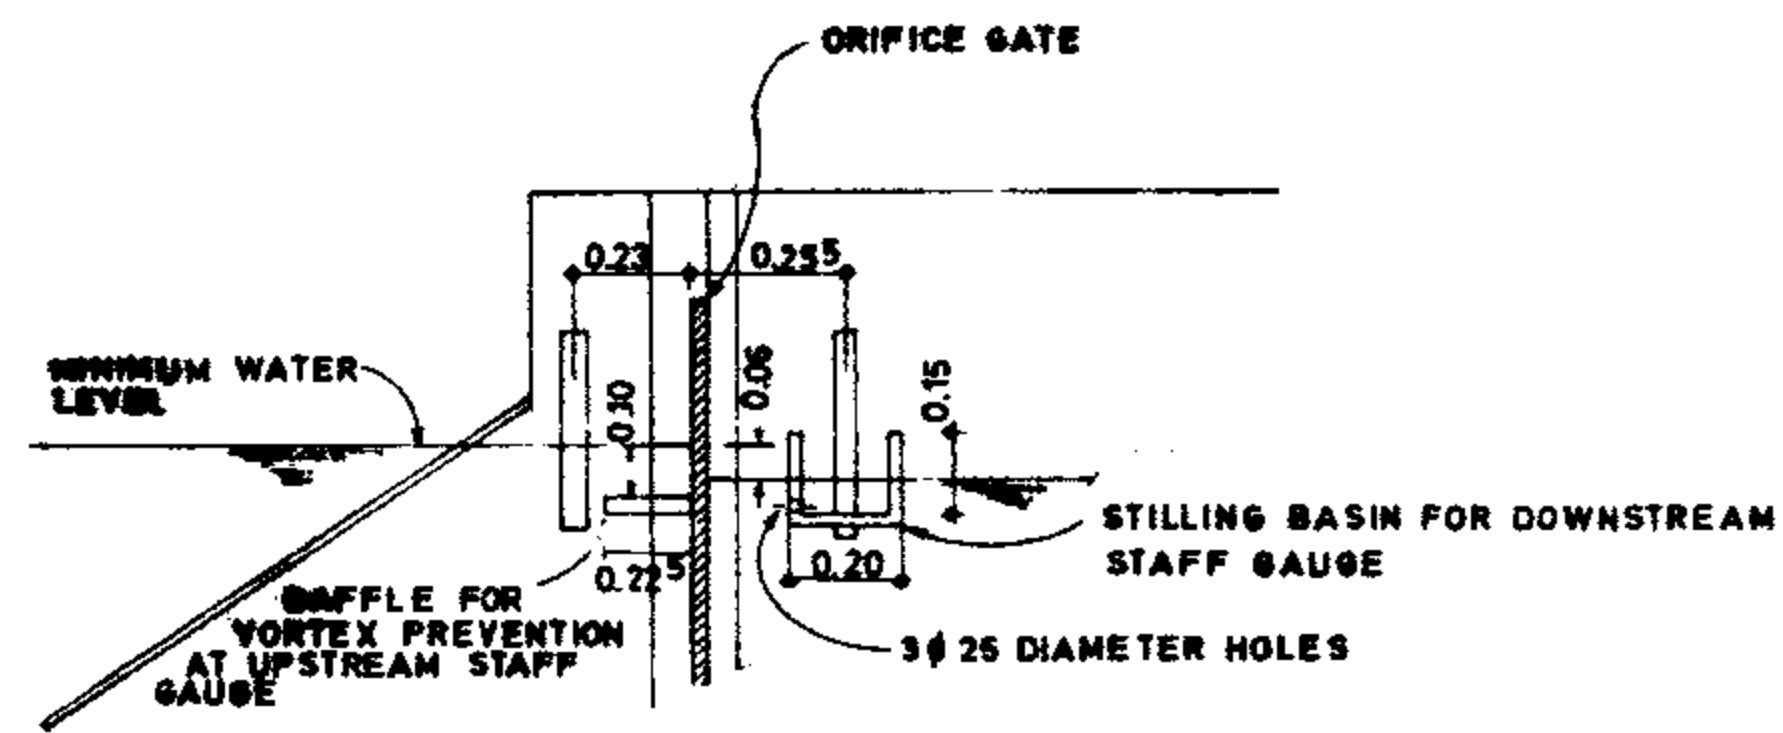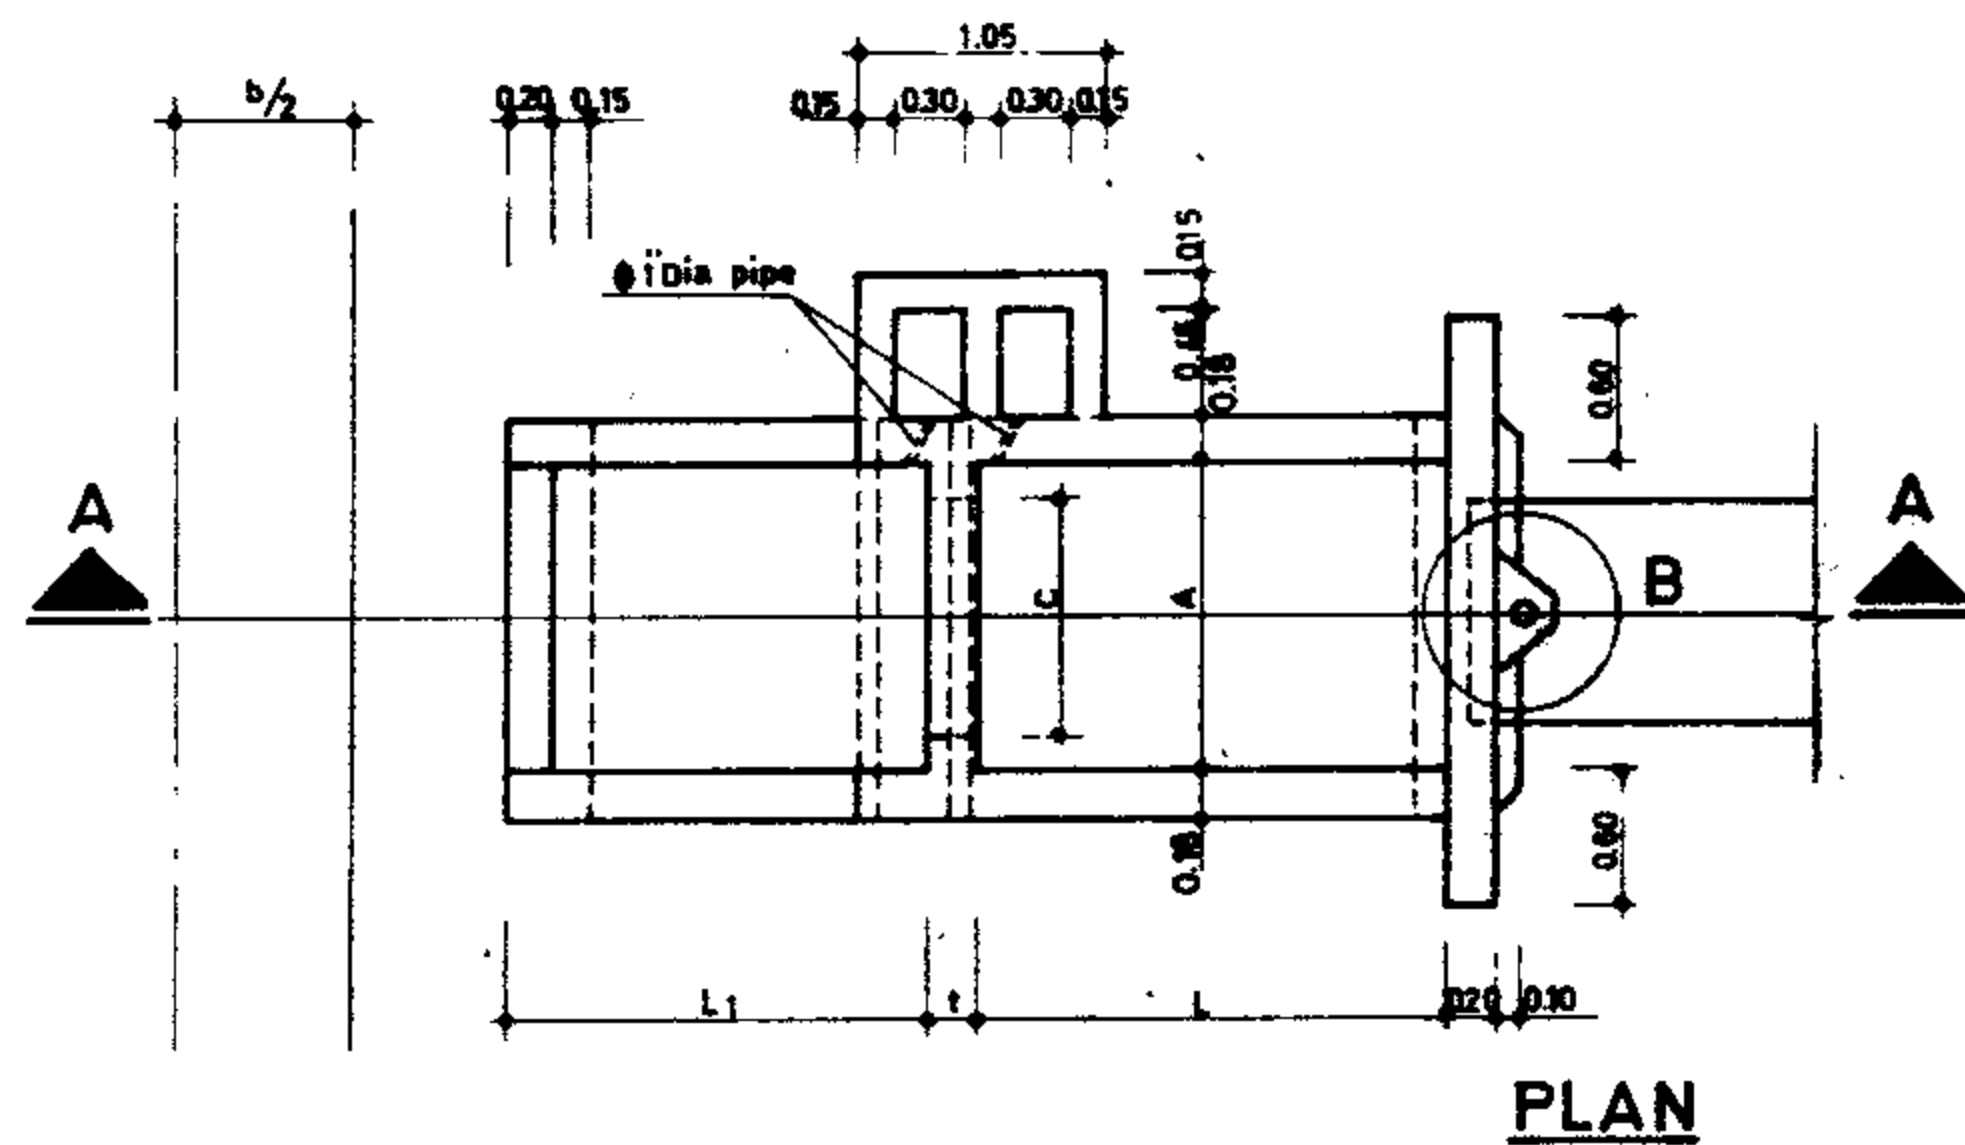


y_m = Max. gate opening = F
 y_t = Gate opening for Q max.
 S = Submergence.
 Δh = Differential head = 0.06 m.
 Design consideration:

$$0.75 < \frac{y_m}{y_t} < 0.80$$


$$S > y_m$$

$$X > t$$

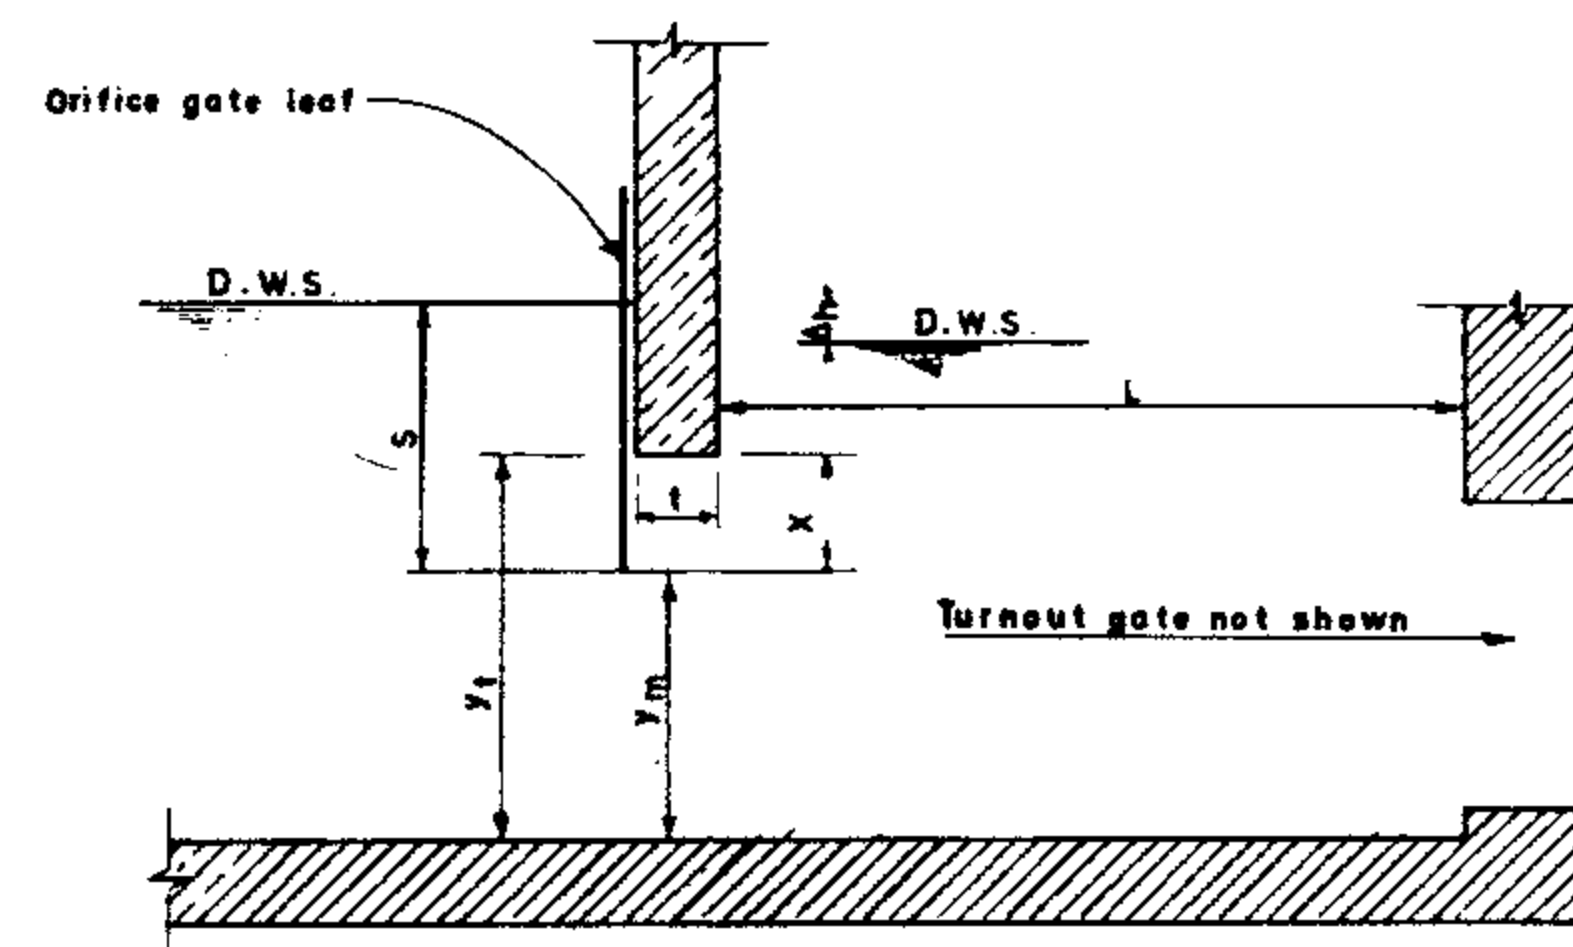

DIMENSION TABLE

Q m ³ /s	Dia mm	Orifice open		t m	L m	L ₁ m	A m	E m	R/Bar.	Conc. m ³	Form m ²
		Cm.	Fm.								
0.100	300	0.50	0.35	0.10	1.10	1.40	0.70	0.80	264.40	4.17	38.17
0.150	400	0.50	0.50	0.10	1.10	1.40	0.70	1.10	274.68	4.40	38.51
0.200	450	0.60	0.55	0.10	1.10	1.40	0.80	1.20	287.60	4.51	39.07
0.250	500	0.70	0.60	0.10	1.10	1.40	0.90	1.30	277.63	4.39	38.27
0.300	500	0.80	0.65	0.15	1.40	1.60	1.00	1.30	303.60	4.63	40.88
0.350	600	0.85	0.70	0.15	1.50	1.60	1.10	1.40	308.67	4.89	42.07
0.400	600	0.90	0.75	0.15	1.70	1.60	1.20	1.50	323.15	4.95	43.42
0.450	700	0.95	0.80	0.15	1.70	1.80	1.30	1.60	337.37	5.33	45.24
0.500	700	1.00	0.85	0.15	1.90	1.80	1.30	1.60	343.82	5.46	46.08
0.550	700	1.05	0.90	0.15	1.90	1.80	1.40	1.70	351.62	5.59	46.89
0.600	800	1.10	0.90	0.15	2.00	1.80	1.40	1.80	360.35	5.60	47.12
0.650	800	1.15	0.95	0.15	2.00	1.80	1.50	1.80	377.82	5.68	47.55
0.700	800	1.20	1.00	0.15	2.20	1.80	1.50	1.90	374.07	5.77	48.35
0.750	800	1.25	1.00	0.15	2.20	1.80	1.60	1.90	383.16	5.84	48.78
0.800	900	1.35	1.00	0.15	2.20	1.80	1.60	1.90	391.99	5.96	52.17
0.850	900	1.40	1.00	0.15	2.20	1.80	1.70	2.00	390.16	5.96	49.19

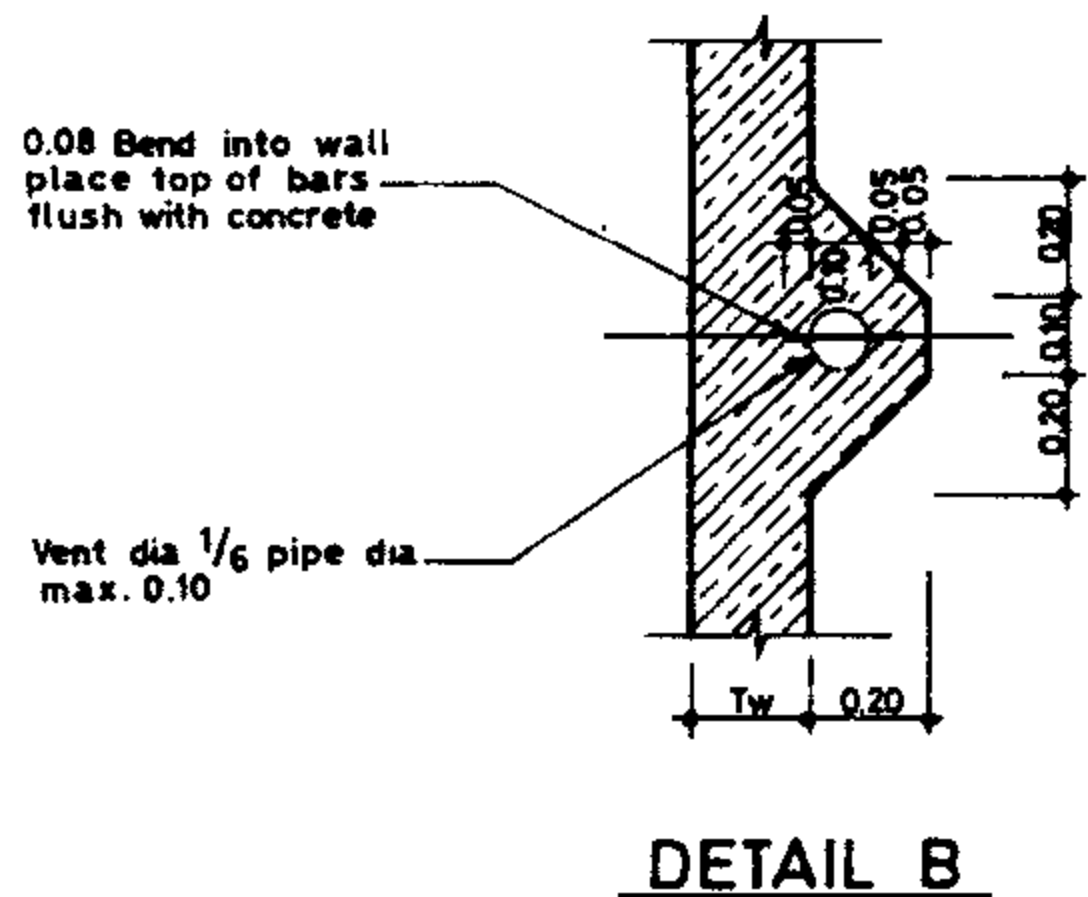

REFERENCE DWGS: For reinforcement DWG N° 12/9/3/01
 For general notes DWGS N° 20/2/1/01 TO 20/2/1/03


Scale: IRRIGATION & DRAINAGE STANDARDS

Date: DWG. N° 12/9/1/01


Approved: Sheet N° 1 of 6 Rev. N°

CONSTANT HEAD ORIFICE (CHO)
 PLAN & SECTIONS


ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND
 STANDARDS BUREAU

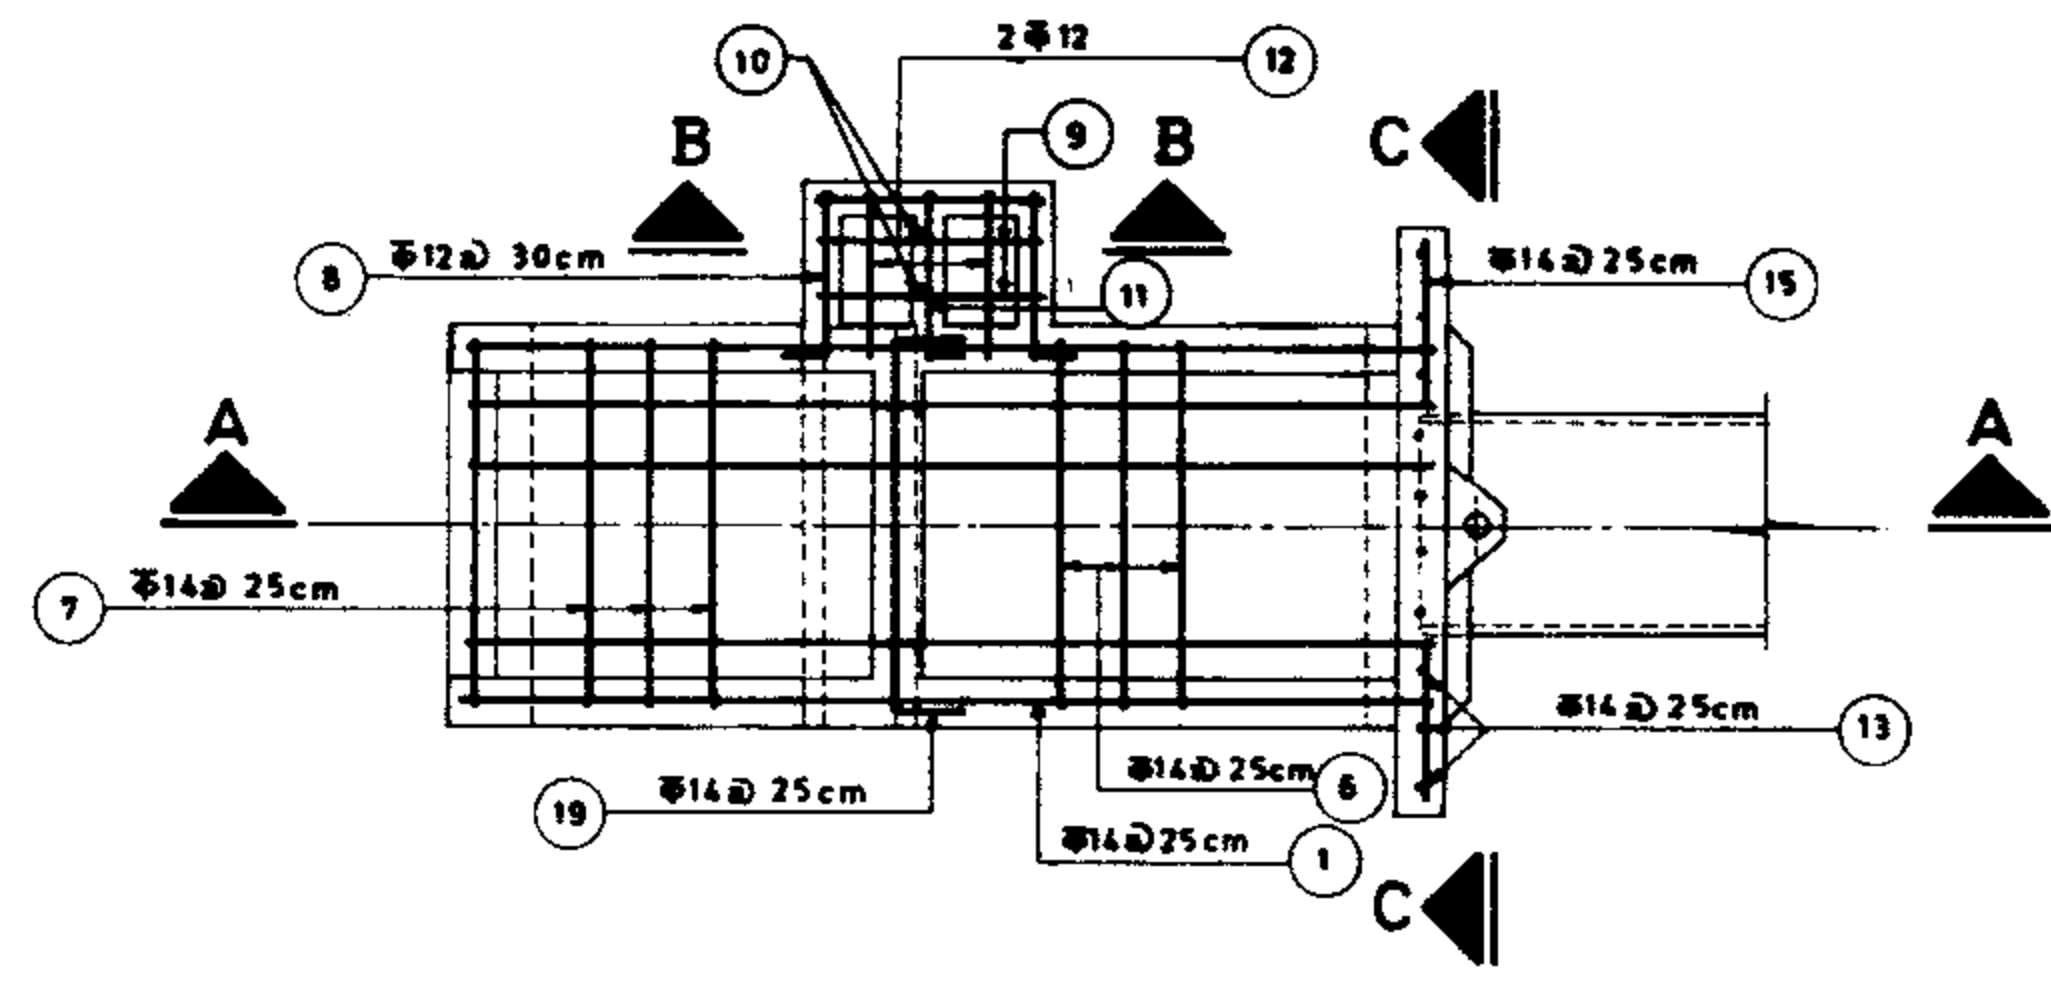


PLAN

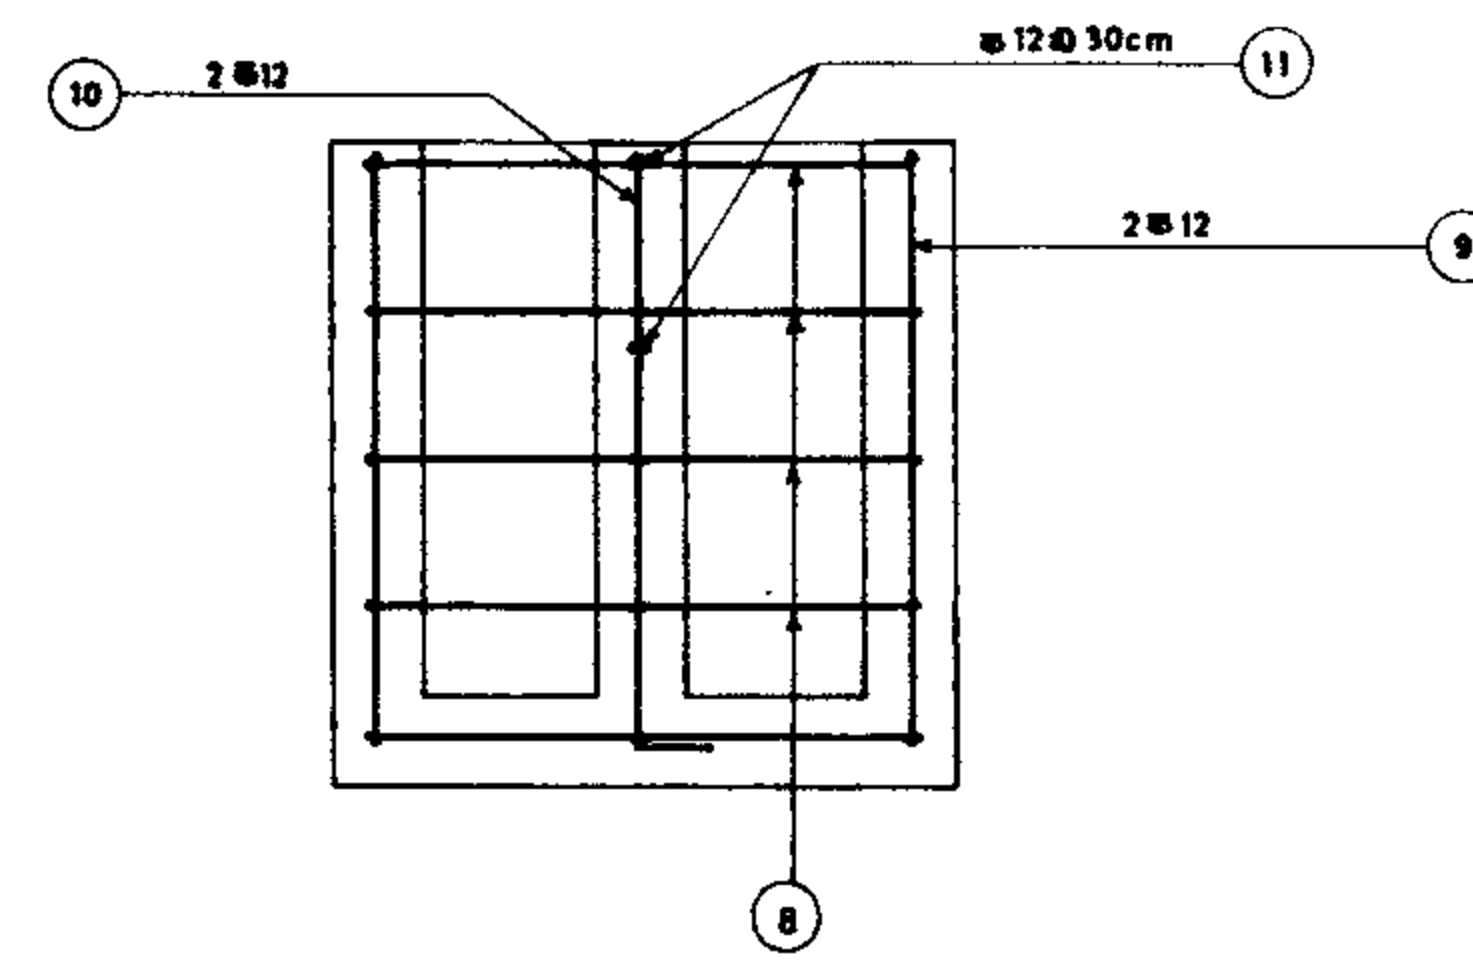

SECTION B-B

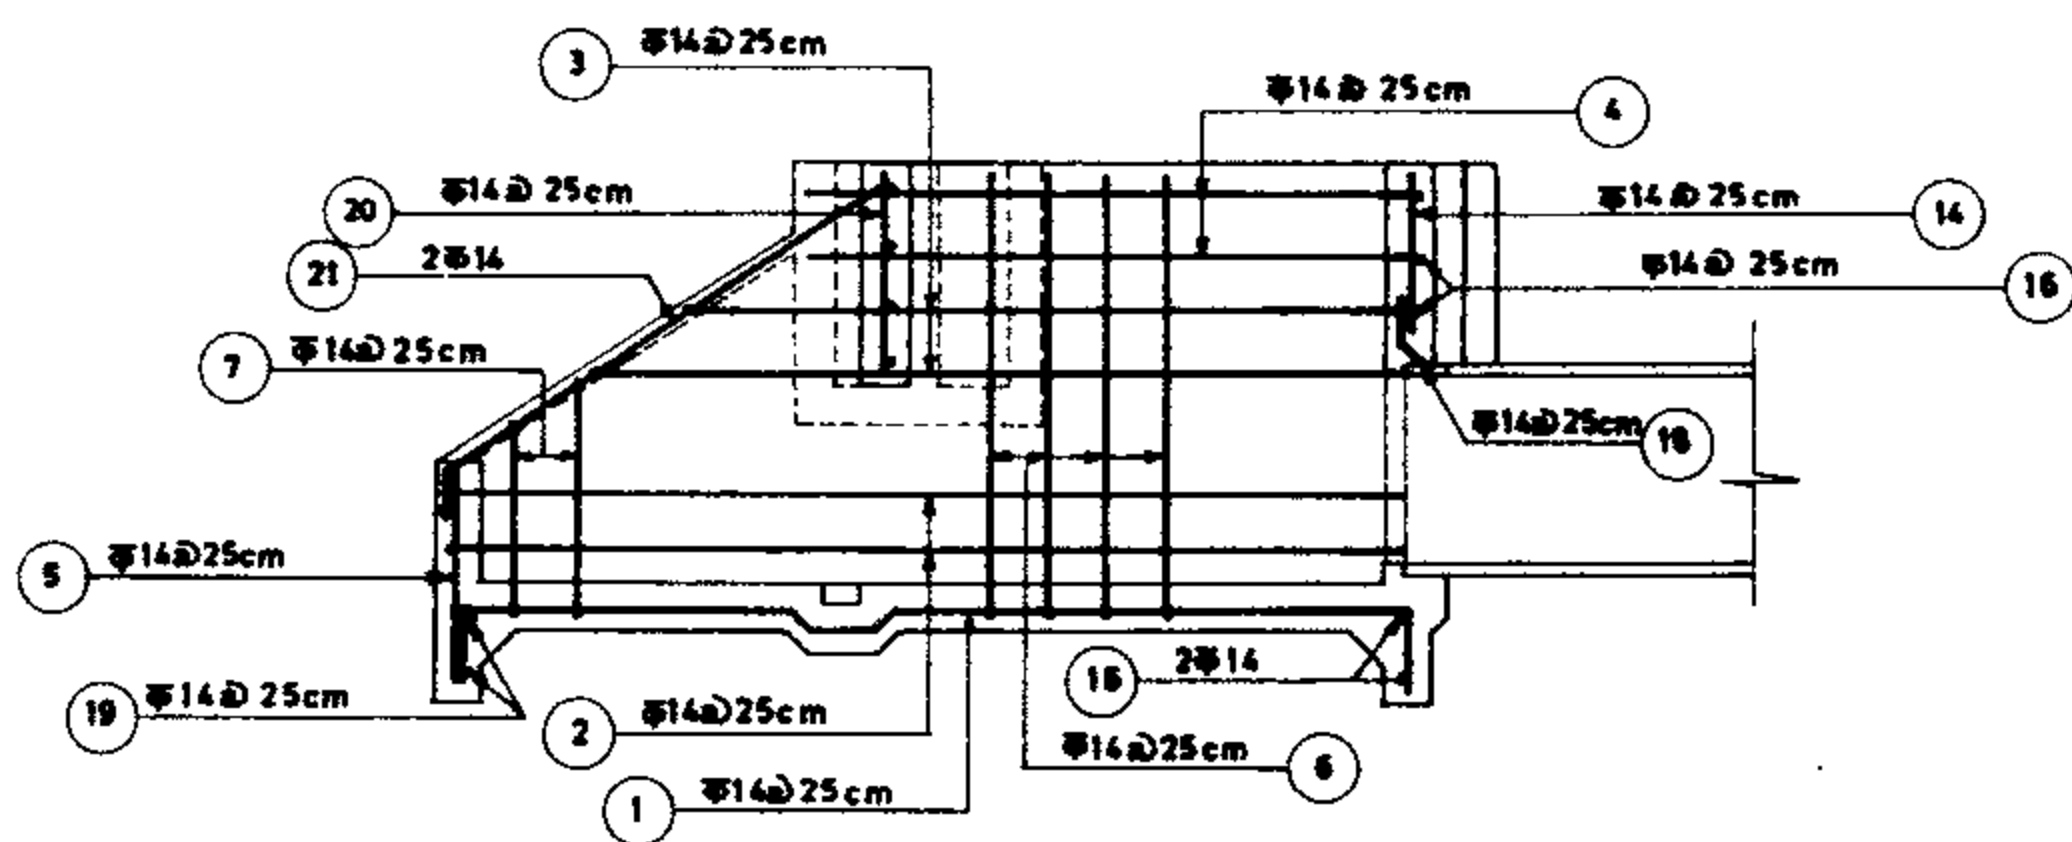

SECTION A-A

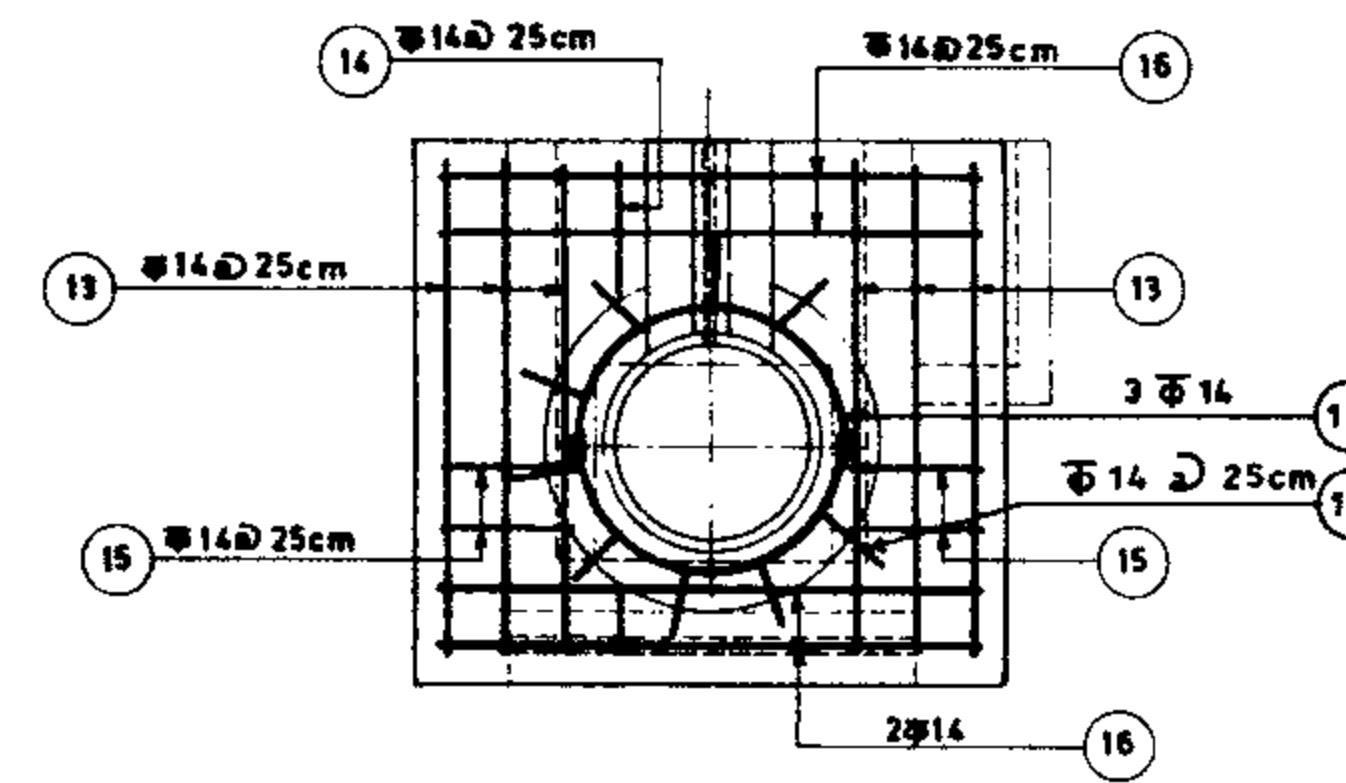

SECTION C-C

REFERENCE DWGS : For plan & section see dwg N° 12/9/1/01
For list reinforcement see dwgs N° 20/2/1/01 TO 20/2/1/03

Scale:	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG.N° 12/9/3/01	
Approved:	Sheet N° 2 of 6	Rev. N°

CONSTANT HEAD ORIFICE (C.H.O)
REINFORCEMENT
PLAN & SECTIONS

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARDS BUREAU

Dia = 300
Q = 0.100

Rd.	Φ	Nº	FORM	UNIT LENG.	TOTAL LENG.	U.W.T kg.	TOTAL weight
1	14	6		3.60	21.60	1.21	26.14
2	14	4		3.30	13.20	1.21	15.97
3	14	2x5		2.45	24.50	1.21	29.65
4	14	2x2		1.80	7.20	1.21	8.71
5	14	6		1.10	6.60	1.21	7.99
6	14	5		4.61	23.05	1.21	27.89
7	14	6		3.11	18.66	1.21	22.58
8	12	6		2.70	16.20	0.888	14.39
9	12	2		3.88	7.76	0.888	6.89
10	12	2		1.74	3.48	0.888	3.09
11	12	6		1.10	6.60	0.888	5.86
12	12	2		3.55	7.10	0.888	6.30
13	14	8		2.20	17.60	1.21	21.30
14	14	2		1.28	2.56	1.21	3.10
15	14	2		0.81	1.62	1.21	1.96
16	14	6		1.80	10.80	1.21	13.07
17	14	3		2.99	8.96	1.21	10.86
18	14	8		0.50	4.00	1.21	4.84
19	14	12		1.48	17.76	1.21	21.49
20	14	4		1.35	5.40	1.21	6.53
21	14	2		2.40	4.80	1.21	5.81
						264.40 kg	

Dia = 400
Q = 0.150

Rd.	Φ	Nº	FORM	UNIT LENG.	TOTAL LENG.	U.W.T kg.	TOTAL weight
1	14	6		3.60	21.60	1.21	26.14
2	14	4		3.30	13.20	1.21	15.97
3	14	2x5		2.45	24.50	1.21	29.65
4	14	2x2		1.80	7.20	1.21	8.71
5	14	6		1.10	6.60	1.21	7.99
6	14	7		4.71	32.97	1.21	39.89
7	14	6		3.21	19.26	1.21	23.30
8	12	5		2.70	13.50	0.888	11.99
9	12	2		3.68	7.36	0.888	6.54
10	12	2		1.64	3.28	0.888	2.91
11	12	5		1.10	5.50	0.888	4.88
12	12	2		3.35	6.70	0.888	5.95
13	14	8		2.20	17.60	1.21	21.30
14	14	2		1.28	2.56	1.21	3.10
15	14	2		0.86	1.72	1.21	2.08
16	14	6		1.90	11.40	1.21	13.79
17	14	3		3.10	9.30	1.21	11.25
18	14	8		0.50	4.00	1.21	4.84
19	14	11		1.58	17.38	1.21	21.03
20	14	5		1.25	6.25	1.21	7.56
21	14	2		2.40	4.80	1.21	5.81
						274.68 kg	

Dia = 450
Q = 0.200

Rd.	Φ	Nº	FORM	UNIT LENG.	TOTAL LENG.	U.W.T kg.	TOTAL weight
1	14	6		3.60	21.60	1.21	26.14
2	14	4		3.30	13.20	1.21	15.97
3	14	2x5		2.45	24.50	1.21	29.65
4	14	2x2		1.80	7.20	1.21	8.71
5	14	6		1.10	6.60	1.21	7.99
6	14	7		4.81	33.67	1.21	40.74
7	14	6		3.31	19.86	1.21	24.03
8	12	5		2.70	13.50	0.888	11.99
9	12	2		3.58	7.16	0.888	6.36
10	12	2		1.59	3.18	0.888	2.82
11	12	5		1.10	5.50	0.888	4.88
12	12	2		3.25	6.10	0.888	5.77
13	14	8		2.20	17.60	1.21	21.30
14	14	2		1.21	2.42	1.21	2.93
15	14	2		0.86	1.78	1.21	2.15
16	14	5		2.00	12.00	1.21	14.52
17	14	3		3.42	10.26	1.21	12.43
18	14	11		0.50	5.00	1.21	6.05
19	14	11		1.68	18.48	1.21	22.36
20	14	5		1.18	5.90	1.21	7.14
21	14	2		2.40	4.80	1.21	5.81
						287.60 kg	

Dia = 500
Q = 0.250

Rd.	Φ	Nº	FORM	UNIT LENG.	TOTAL LENG.	U.W.T kg.	TOTAL weight
1	14	6		3.60	24.60	1.21	26.14
2	14	4		3.30	13.20	1.21	15.97
3	14	2x5		2.45	24.50	1.21	29.65
4	14	2x2		1.80	7.20	1.21	8.71
5	14	6		1.10	6.60	1.21	7.99
6	14	7		4.81	33.67	1.21	40.74
7	14	6		3.31	19.86	1.21	24.03
8	12	5		2.70	13.50	0.888	11.99
9	12	2		3.38	6.76	0.888	6.00
10	12	2		1.49	2.98	0.888	2.65
11	12	5		1.10	5.50	0.888	4.88
12	12	2		3.05	6.10	0.888	5.42
13	14	8		2.20	17.60	1.21	21.30
14	14	2		1.13	2.26	1.21	2.73
15	14	2		0.86	1.72	1.21	2.08
16	14	5		2.00	10.00	1.21	12.10
17	14	3		3.79	11.37	1.21	13.76
18	14	11		0.50	5.50	1.21	6.66
19	14	11		1.68	18.48	1.21	22.36
20	14	5		1.10	5.50	1.21	6.66
21	14	2		2.40	4.80	1.21	5.81
						277.63 kg	

REFERENCE DWGS: For reinforcement == dwg. Nº 12/9/3/01
For bars with variable unit length see note under the same title at dwg. Nº 20/2/1/10

Scale:

Date:

Approved:

IRRIGATION & DRAINAGE STANDARDS

DWG. Nº 12/9/3/02

Sheet. Nº 3 of 6 Rev. Nº

CONSTANT HEAD ORIFICE (CHO)
LIST OF REINFORCEMENT
Dia 300 TO Dia 500

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU

Dia = 500
Q = 0.300

Pos	Φ	Nº	FORM	UNIT LENG.	TOTAL LENG.	U.W.T kg	TOTAL weight
1	14	7		3.90	27.30	1.21	33.03
2	14	4		3.60	14.40	1.21	17.42
3	14	2x5		2.75	27.50	1.21	33.28
4	14	2x2		2.10	8.40	1.21	10.16
5	14	7		1.10	7.70	1.21	9.32
6	14	8		4.91	39.28	1.21	47.53
7	14	8		3.41	20.46	1.21	24.76
8	12	5		2.70	13.50	0.888	11.99
9	12	2		3.28	6.56	0.888	5.83
10	12	2		1.44	2.88	0.888	2.56
11	12	5		1.10	5.50	0.888	4.88
12	12	2		2.95	5.90	0.888	5.24
13	14	8		2.20	15.40	1.21	18.63
14	14	3		1.03	3.09	1.21	3.74
15	14	3		0.33	2.64	1.21	3.19
16	14	5		2.10	10.50	1.21	12.71
17	14	3		4.30	12.90	1.21	15.61
18	14	13		0.50	6.50	1.21	7.87
19	14	11		1.78	19.58	1.21	23.69
20	14	5		1.05	5.25	1.21	6.35
21	14	2		2.40	4.80	1.21	5.81
						303.60 kg	

Dia = 600
Q = 0.350

Pos	Φ	Nº	FORM	UNIT LENG.	TOTAL LENG.	U.W.T kg	TOTAL weight
1	14	7		3.90	27.30	1.21	33.03
2	14	4		3.60	14.40	1.21	17.42
3	14	2x5		2.75	27.50	1.21	33.28
4	14	2x2		2.10	8.40	1.21	10.16
5	14	7		1.10	7.70	1.21	9.32
6	14	8		5.01	40.08	1.21	48.50
7	14	6		3.51	21.06	1.21	25.48
8	12	5		2.70	13.50	0.888	11.99
9	12	2		3.28	6.56	0.888	5.83
10	12	2		1.44	2.88	0.888	2.56
11	12	5		1.10	5.50	0.888	4.88
12	12	2		2.95	5.90	0.888	5.24
13	14	7		2.20	15.40	1.21	18.63
14	14	3		1.03	3.09	1.21	3.74
15	14	3		0.93	2.79	1.21	3.38
16	14	5		2.20	15.40	1.21	13.31
17	14	3		4.30	12.90	1.21	15.60
18	14	13		0.50	6.50	1.21	7.87
19	14	11		1.88	20.68	1.21	25.02
20	14	6		1.05	6.30	1.21	7.62
21	14	2		2.40	4.80	1.21	5.81
						308.67 kg	

Dia = 600
Q = 0.400

Pos	Φ	Nº	FORM	UNIT LENG.	TOTAL LENG.	U.W.T kg	TOTAL weight
1	14	7		4.20	29.40	1.21	35.57
2	14	4		3.90	15.60	1.21	18.88
3	14	2x5		3.05	30.50	1.21	36.91
4	14	2x2		2.40	9.60	1.21	11.62
5	14	7		1.10	7.70	1.21	9.32
6	14	9		5.01	45.09	1.21	54.56
7	14	6		3.51	21.06	1.21	25.48
8	12	5		2.70	13.50	0.888	11.99
9	12	2		3.08	6.16	0.888	5.47
10	12	2		1.34	2.68	0.888	2.38
11	12	4		1.10	4.40	0.888	3.91
12	12	2		2.75	5.50	0.888	4.88
13	14	8		2.20	17.60	1.21	21.30
14	14	3		0.95	2.85	1.21	3.45
15	14	3		0.90	2.70	1.21	3.27
16	14	5		2.20	11.00	1.21	13.31
17	14	3		4.66	13.98	1.21	16.92
18	14	14		0.50	7.00	1.21	8.47
19	14	10		1.88	18.80	1.21	22.75
20	14	6		0.95	5.70	1.21	6.90
21	14	2		2.40	4.80	1.21	5.81
						323.15 kg	

Dia = 700
Q = 0.450

Pos	Φ	Nº	FORM	UNIT LENG.	TOTAL LENG.	U.W.T kg	TOTAL weight
1	14	8		4.20	33.60	1.21	40.66
2	14	4		3.90	15.60	1.21	18.88
3	14	2x5		3.05	30.50	1.21	36.91
4	14	2x2		2.40	9.60	1.21	11.62
5	14	8		1.10	8.80	1.21	10.65
6	14	9		5.21	46.89	1.21	56.74
7	14	6		3.71	22.26	1.21	26.93
8	12	4		2.70	10.80	0.888	9.59
9	12	2		3.08	6.16	0.888	5.47
10	12	2		1.34	2.68	0.888	2.38
11	12	4		1.10	4.40	0.888	3.91
12	12	2		2.75	5.50	0.888	4.88
13	14	8		2.20	17.60	1.21	21.30
14	14	3		0.95	2.85	1.21	3.45
15	14	3		1.00	3.00	1.21	3.63
16	14	5		2.40	12.00	1.21	14.52
17	14	3		4.30	12.90	1.21	15.60
18	14	13		0.50	6.50	1.21	7.87
19	14	11		2.08	22.88	1.21	27.68
20	14	7		1.05	7.35	1.21	8.89
21	14	2		2.40	4.80	1.21	5.81
						337.37 kg	

REFERENCE DWGS: For reinforcement see dwg. N2.12/9/3/01
For bars with variable unit length see note under the same title at dwg. N2.20/3/00

Scale:	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. N2 12/9/3/03	
Approved:	Sheet N2 4 of 6	Rev. N2
CONSTANT HEAD ORIFICE (CHO) LIST OF REINFORCEMENT Dia 500D Dia 700		

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU

Dia = 700
Q = 0.500

Pos	Φ	Nº	FORM	UNIT LENG.	TOTAL LENG.	U.W.T Kg.	TOTAL weight
1	14	8		4.40	35.20	1.21	42.59
2	14	4		4.10	14.40	1.21	19.84
3	14	2x5		3.25	32.50	1.21	39.33
4	14	2x2		2.60	10.40	1.21	12.58
5	14	8		1.10	8.80	1.21	10.65
6	14	10		5.21	52.10	1.21	63.04
7	14	6		3.71	22.26	1.21	26.93
8	12	4		2.70	10.80	0.888	9.59
9	12	2		2.88	5.76	0.888	5.11
10	12	2		1.24	2.48	0.888	2.20
11	12	4		1.10	4.40	0.888	3.91
12	12	2		2.55	5.10	0.888	4.53
13	14	8		2.20	17.60	1.21	21.30
14	14	3		0.95	2.85	1.21	3.45
15	14	3		1.00	3.00	1.21	3.63
16	14	5		2.40	12.00	1.21	14.52
17	14	3		4.30	12.90	1.21	15.60
18	14	13		0.50	6.50	1.21	7.87
19	14	10		2.08	20.80	1.21	25.17
20	14	6		0.85	5.10	1.21	6.17
21	14	2		2.40	4.80	1.21	5.81
						343.82	kg

Dia = 700
Q = 0.550

Pos	Φ	Nº	FORM	UNIT LENG.	TOTAL LENG.	U.W.T Kg.	TOTAL weight
1	14	8		4.40	35.20	1.21	42.59
2	14	4		4.10	16.40	1.21	19.84
3	14	2x5		3.25	32.50	1.21	39.33
4	14	2x2		2.60	10.40	1.21	12.58
5	14	8		1.10	8.80	1.21	10.65
6	14	10		5.31	53.10	1.21	64.25
7	14	6		3.81	22.86	1.21	27.66
8	12	4		2.70	10.80	0.888	9.59
9	12	2		2.88	5.76	0.888	5.11
10	12	2		1.24	2.48	0.888	2.20
11	12	4		1.10	4.40	0.888	3.91
12	12	2		2.55	5.10	0.888	4.53
13	14	8		2.20	17.60	1.21	21.30
14	14	4		0.88	3.52	1.21	4.26
15	14	4		1.03	4.12	1.21	4.99
16	14	4		2.50	10.00	1.21	12.10
17	14	3		5.03	15.09	1.21	18.26
18	14	15		0.50	7.50	1.21	9.08
19	14	10		2.18	21.80	1.21	26.38
20	14	7		0.85	5.95	1.21	7.20
21	14	2		2.40	4.80	1.21	5.81
						351.62	kg

Dia = 800
Q = 0.800

Pos	Φ	Nº	FORM	UNIT LENG.	TOTAL LENG.	U.W.T kg	TOTAL weight
1	14	8		4.60	36.00	1.21	43.56
2	14	4		4.20	16.80	1.21	20.33
3	14	2x5		3.35	33.35	1.21	40.54
4	14	2x2		2.70	10.80	1.21	13.07
5	14	8		1.10	8.80	1.21	10.65
6	14	11		5.31	58.41	1.21	70.68
7	14	6		3.81	22.86	1.21	27.66
8	12	4		2.70	10.80	0.888	9.59
9	12	2		2.78	5.56	0.888	4.94
10	12	2		1.19	2.38	0.888	2.11
11	12	4		1.10	4.40	0.888	3.91
12	12	2		2.45	4.90	0.888	4.35
13	14	8		2.20	17.60	1.21	21.30
14	14	4		0.88	3.52	1.21	4.26
15	14	4		1.03	4.12	1.21	4.99
16	14			2.50	10.00	1.21	12.10
17	14	3		5.03	15.09	1.21	18.26
18	14	15		0.50	7.50	1.21	9.08
19	14	10		2.18	21.80	1.21	26.38
20	14	7		0.80	5.60	1.21	6.78
21	14	2		2.40	4.80	1.21	5.81
						360.35	kg

Dia = 800
Q = 650

Pos	Φ	Nº	FORM	UNIT LENG.	TOTAL LENG.	U.W.T kg	TOTAL weight
1	14	9		4.50	40.50	1.21	49.01
2	14	4		4.20	16.80	1.21	20.33
3	14	2x5		3.35	33.50	1.21	40.54
4	14	2x2		2.70	10.80	1.21	13.07
5	14	9		1.10	9.90	1.21	11.98
6	14	11		5.41	59.51	1.21	72.01
7	14	6		3.91	23.46	1.21	28.39
8	12	4		2.70	10.80	0.888	9.59
9	12	2		2.78	5.56	0.888	4.94
10	12	2		1.19	2.38	0.888	2.11
11	12	4		1.10	4.40	0.888	3.91
12	12	2		2.45	4.90	0.888	4.35
13	14	8		2.20	17.60	1.21	21.30
14	14	6		0.77	4.62	1.21	5.59
15	14	6		1.04	6.24	1.21	7.55
16	14	4		2.60	10.40	1.21	12.58
17	14	3		5.54	16.61	1.21	20.10
18	14	17		0.50	8.50	1.21	10.29
19	14	10		2.28	22.80	1.21	27.59
20	14	7		0.80	5.60	1.21	6.78
21	14	2		2.40	4.80	1.21	5.81
						377.82	kg

REFERENCE DWGS: For reinforcement see dwg N° 12/9/3/01
For bars with variable unit length see note under the same title at dwg. N° 20/2/1/01

Scale:	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. N° 12/9/3/04	
Approved:	Sheet. N° 5 of 6	Rev. N°
CONSTANT HEAD ORIFICE (CHO) LIST OF REINFORCEMENT Dia 700 TO Dia 800		

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU

Dia = 800
Q = 0.700

Pos	Φ	Nº	FORM	UNIT LENG.	TOTAL LENG.	U.W.T kg	TOTAL weight
1	14	9		4.70	42.30	1.21	51.18
2	14	4		4.40	17.60	1.21	21.30
3	14	2x5		3.35	33.50	1.21	40.54
4	14	2x2		2.90	11.60	1.21	14.04
5	14	9		1.10	9.90	1.21	11.98
6	14	11		5.41	59.51	1.21	72.01
7	14	6		3.91	23.46	1.21	28.39
8	12	3		2.70	8.10	0.888	7.19
9	12	2		2.58	5.16	0.888	4.58
10	12	2		1.09	2.18	0.888	1.94
11	12	3		1.10	3.30	0.888	2.93
12	12	2		2.25	4.50	0.888	4.00
13	14	8		2.20	17.60	1.21	21.30
14	14	6		0.77	4.62	1.21	5.59
15	14	6		1.04	6.24	1.21	7.55
16	14	4		2.60	10.40	1.21	12.58
17	14	3		5.54	16.61	1.21	20.10
18	14	17		0.50	8.50	1.21	10.29
19	14	9		2.28	20.52	1.21	24.83
20	14	7		0.70	4.90	1.21	5.93
21	14	2		2.40	4.80	1.21	5.81
						374.07 kg	

Dia = 800
Q = 0.750

Pos	Φ	Nº	FORM	UNIT LENG.	TOTAL LENG.	U.W.T kg	TOTAL weight
1	14	9		4.60	41.40	1.21	50.09
2	14	4		4.30	17.20	1.21	20.81
3	14	2x5		3.45	34.50	1.21	41.75
4	14	2x2		2.80	11.20	1.21	13.55
5	14	9		1.10	9.90	1.21	11.98
6	14	11		5.51	60.61	1.21	73.34
7	14	6		4.01	24.06	1.21	29.11
8	12	4		2.70	10.80	0.888	9.59
9	12	2		2.68	5.36	0.888	4.76
10	12	2		1.14	2.28	0.888	2.02
11	12	4		1.10	4.40	0.888	3.91
12	12	2		2.35	4.70	0.888	4.17
13	14	10		2.20	22.00	1.21	26.62
14	14	4		0.77	3.08	1.21	3.73
15	14	4		1.09	4.36	1.21	5.28
16	14	4		2.70	10.80	1.21	13.07
17	14	3		5.54	16.61	1.21	20.10
18	14	17		0.50	8.50	1.21	10.29
19	14	9		2.30	21.42	1.21	25.92
20	14	8		0.75	6.00	1.21	7.26
21	14	2		2.40	4.80	1.21	5.81
						383.16 kg	

Dia = 900
Q = 0.800

Pos	Φ	Nº	FORM	UNIT LENG.	TOTAL LENG.	U.W.T kg	TOTAL weight
1	14	9		4.80	43.20	1.21	52.27
2	14	4		4.50	18.00	1.21	21.78
3	14	2x5		3.65	36.50	1.21	44.17
4	14	2x2		3.00	12.00	1.21	14.52
5	14	9		1.10	9.90	1.21	11.98
6	14	12		5.51	66.12	1.21	80.01
7	14	6		4.01	24.06	1.21	29.11
8	12	3		2.70	8.10	0.888	7.19
9	12	2		2.58	5.16	0.888	4.58
10	12	2		1.09	2.18	0.888	1.94
11	12	3		1.10	3.30	0.888	2.93
12	12	2		2.25	4.50	0.888	4.00
13	14	10		2.20	22.00	1.21	26.62
14	14	4		0.77	3.08	1.21	3.73
15	14	4		1.09	4.36	1.21	5.28
16	14	4		2.70	10.80	1.21	13.07
17	14	3		5.54	16.61	1.21	20.10
18	14	17		0.50	8.50	1.21	10.29
19	14	9		2.38	21.42	1.21	25.92
20	14	8		0.70	5.60	1.21	6.78
21	14	2		2.40	4.80	1.21	5.81
						391.99 kg	


Dia = 900
Q = 0.850

Pos	Φ	Nº	FORM	UNIT LENG.	TOTAL LENG.	U.W.T kg	TOTAL weight
1	14	10		4.70	47.00	1.21	56.87
2	14	4		4.40	17.60	1.21	21.30
3	14	2x5		3.55	35.50	1.21	42.96
4	14	2x2		2.90	11.60	1.21	14.04
5	14	10		1.10	11.00	1.21	13.31
6	14	11		5.61	61.71	1.21	74.67
7	14	6		4.11	24.66	1.21	29.84
8	12	3		2.70	8.10	0.888	7.19
9	12	2		2.58	5.16	0.888	4.58
10	12	2		1.09	2.18	0.888	1.94
11	12	3		1.10	3.30	0.888	2.93
12	12	2		2.25	4.50	0.888	4.00
13	14	8		2.20	17.60	1.21	21.30
14	14	5		0.59	2.95	1.21	3.57
15	14	5		1.08	5.40	1.21	6.53
16	14	3		2.80	8.40	1.21	10.16
17	14	3		6.41	19.23	1.21	23.27
18	14	20		0.50	10.00	1.21	12.10
19	14	9		2.48	22.32	1.21	27.01
20	14	8		0.70	5.60	1.21	6.78
21	14	2		2.40	4.80	1.21	5.81
						390.16 kg	


REFERENCE DWGS: For reinforcement see dwg N° 12/9/3/01
For bars with variable unit length see note under the same title at dwg, N° 20/2/1/01

Scale:	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. N° 12/9/3/05	CONSTANT HEAD ORIFICE (CHO)
Approved:	Sheet. N° 6 of 6	Rev. N°
		LIST OF REINFORCEMENT Dia 800 TO Dia 900


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU

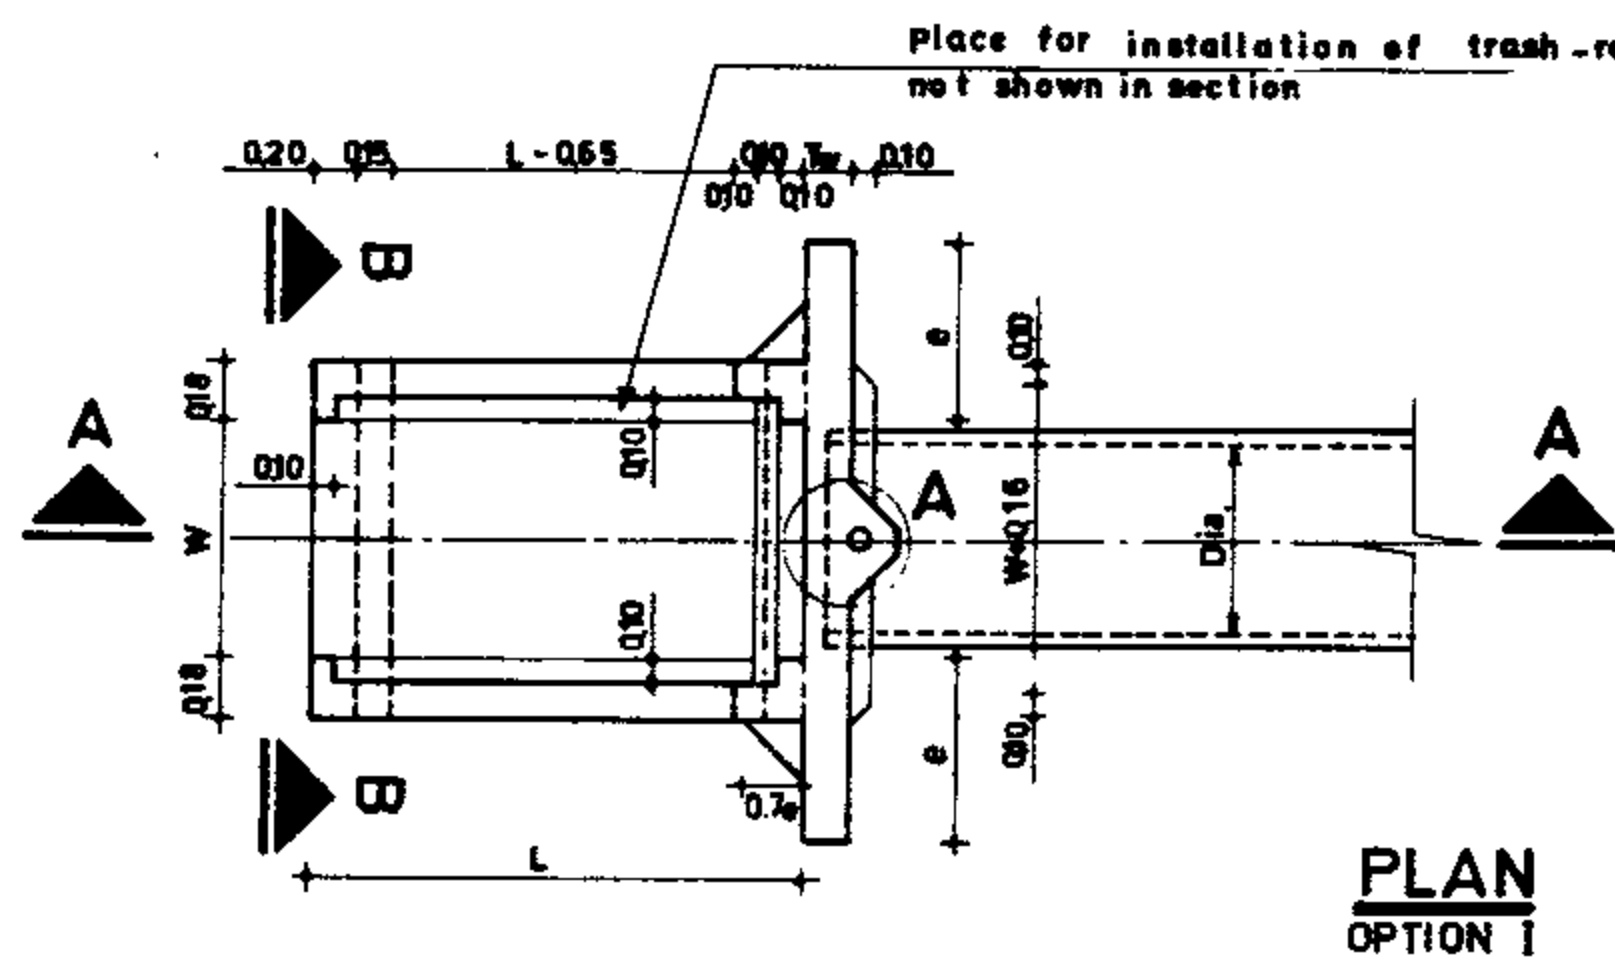


PLAN
OPTION I

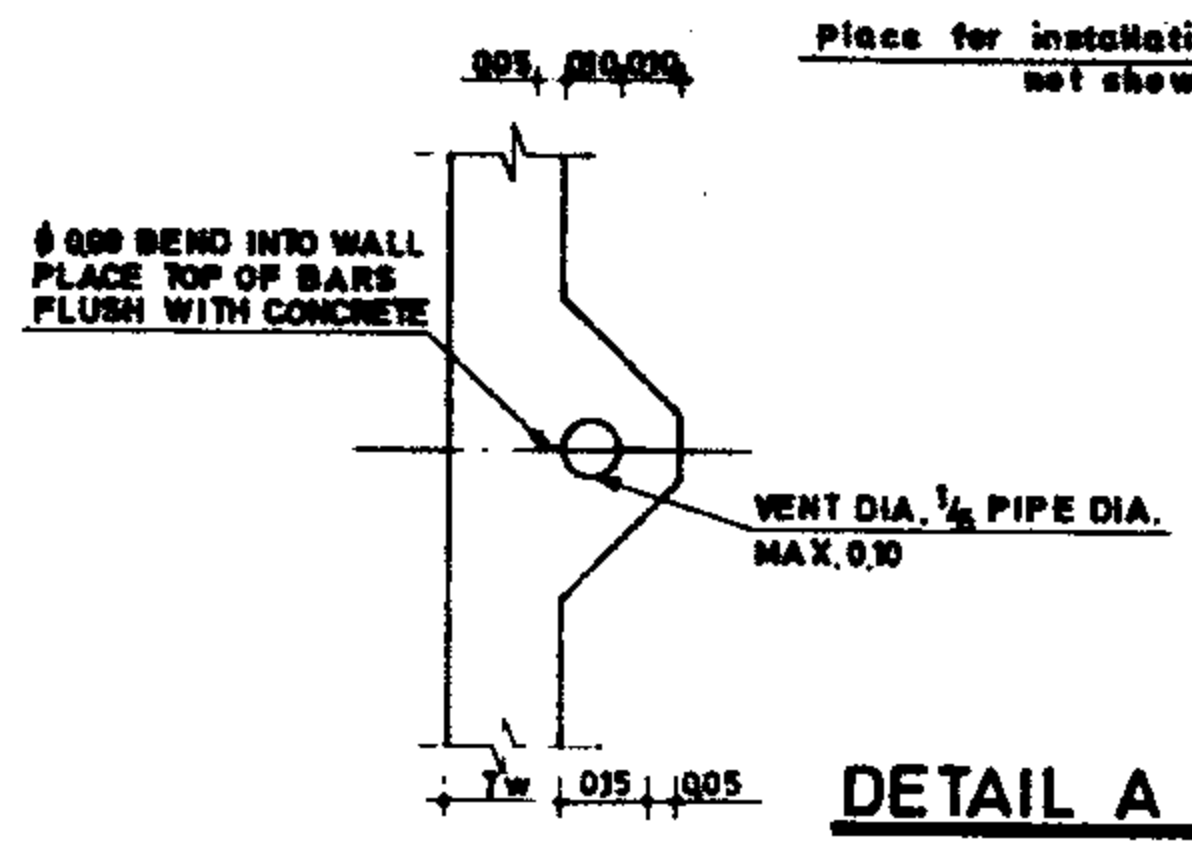


DETAIL A

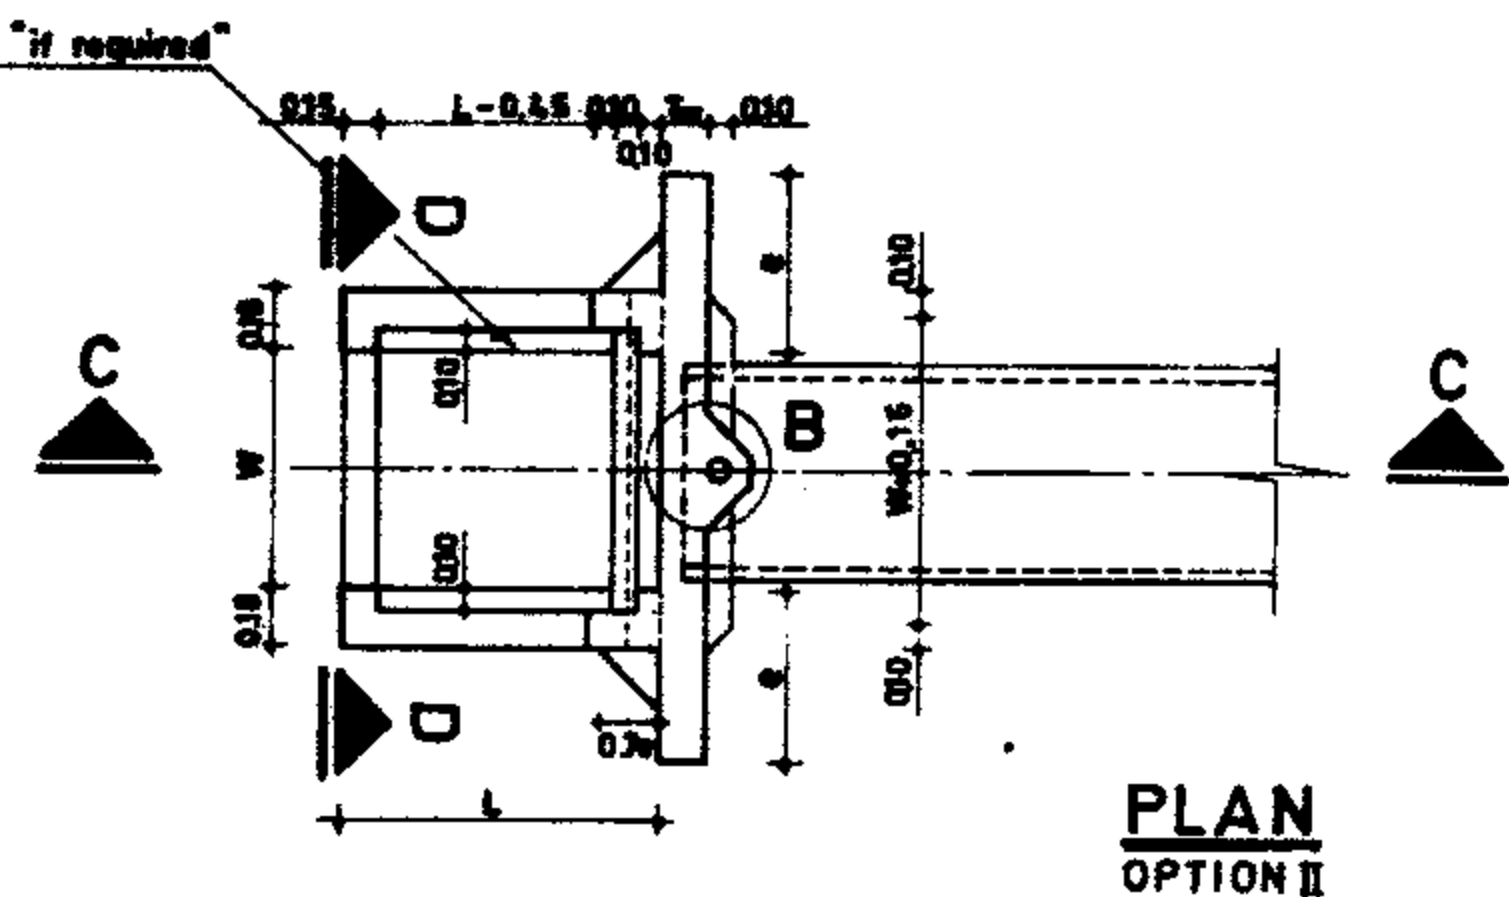


PLAN
OPTION II

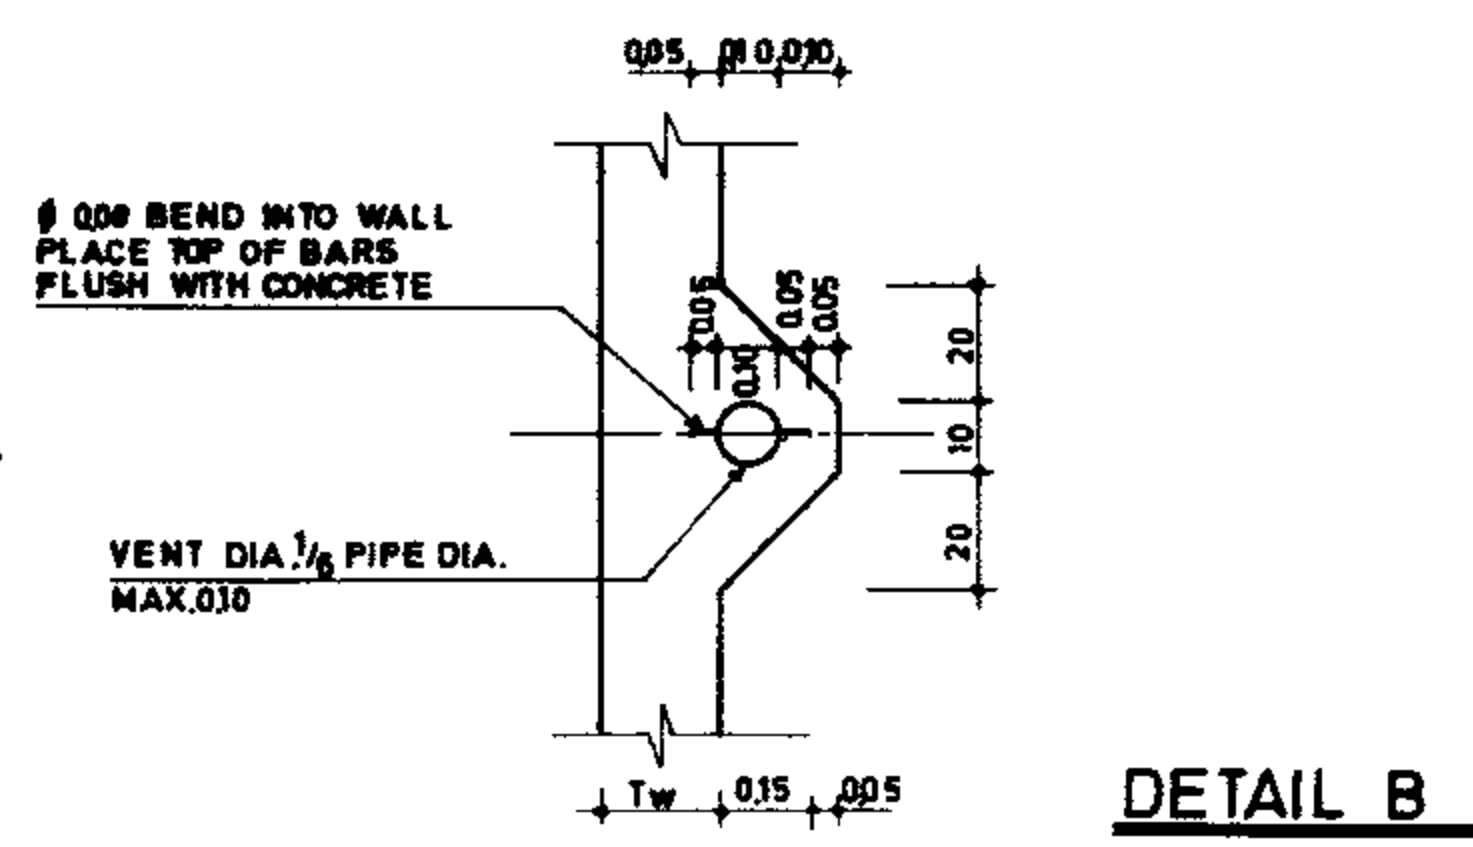


DETAIL B

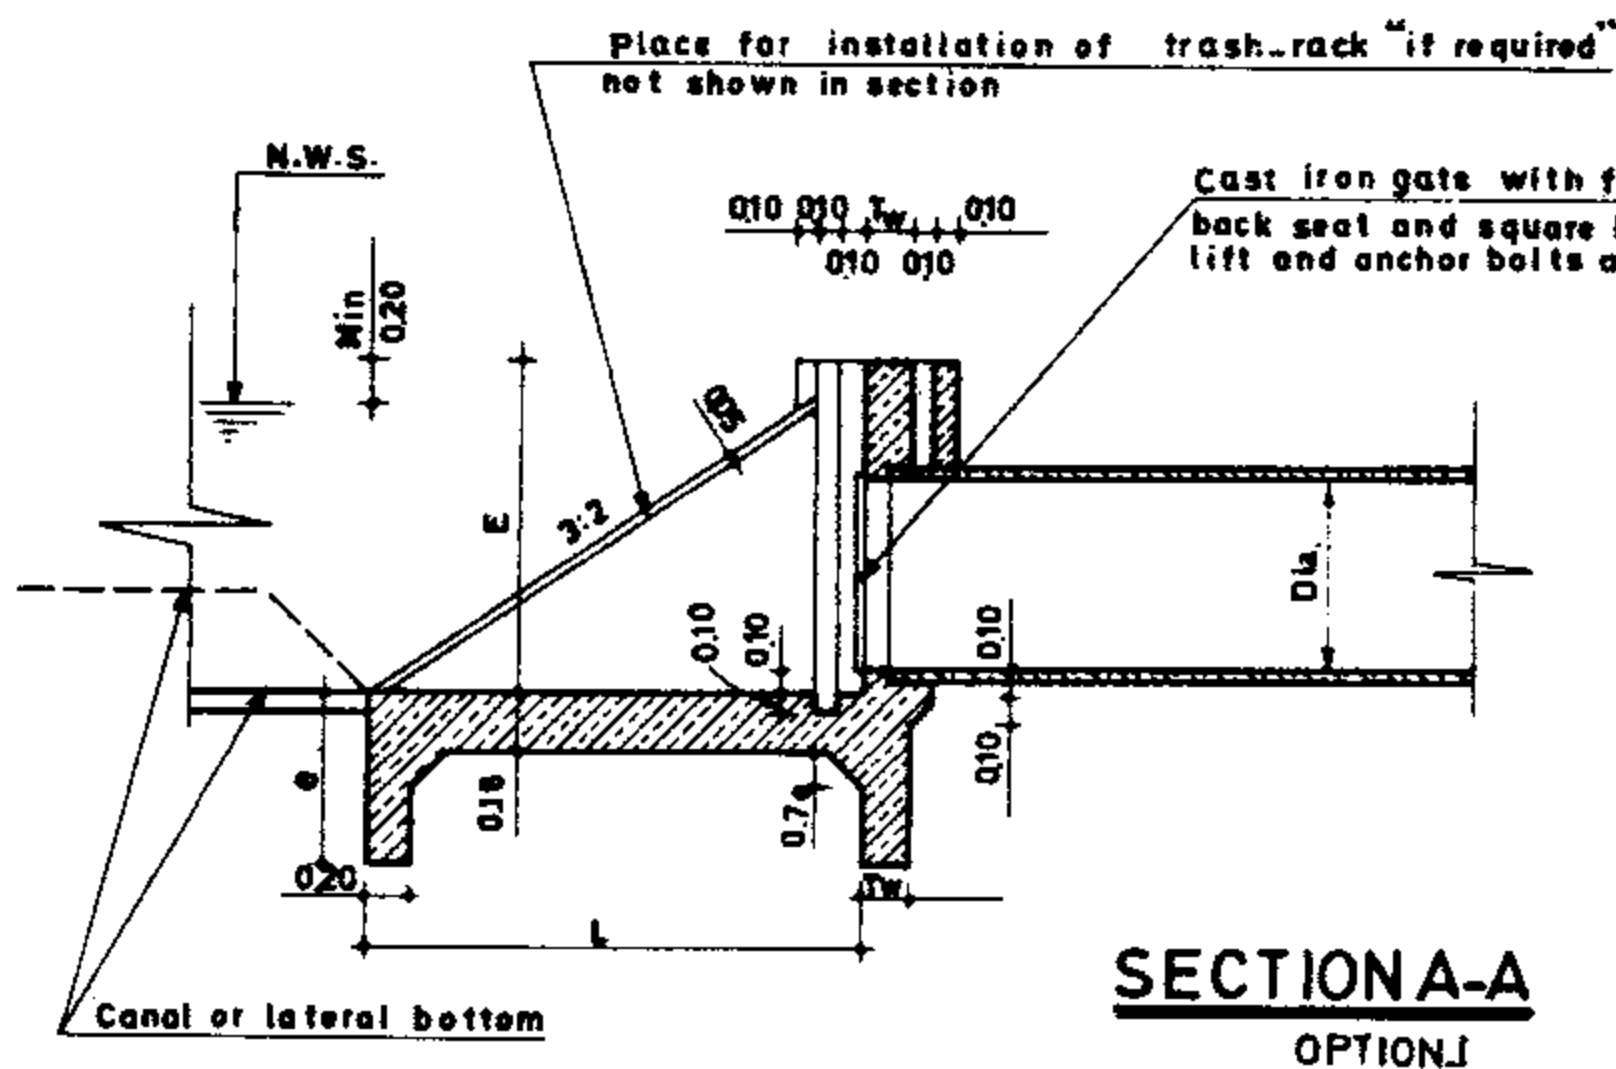


SECTION A-A
OPTION I

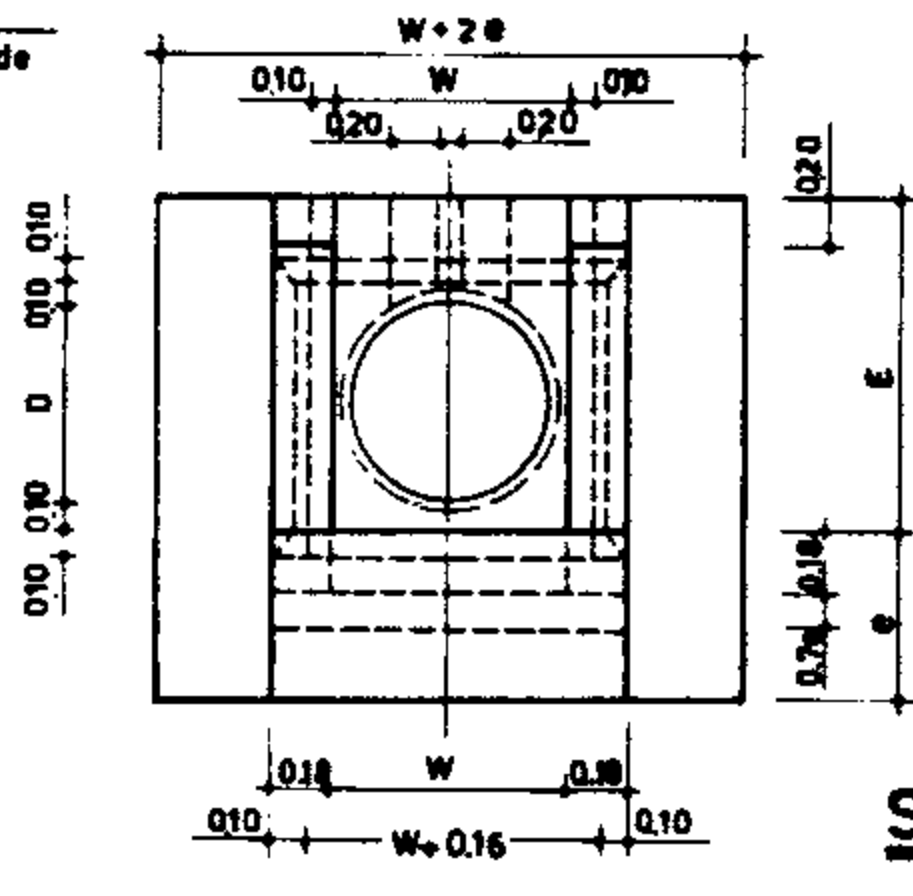

SECTION B-B
OPTION I

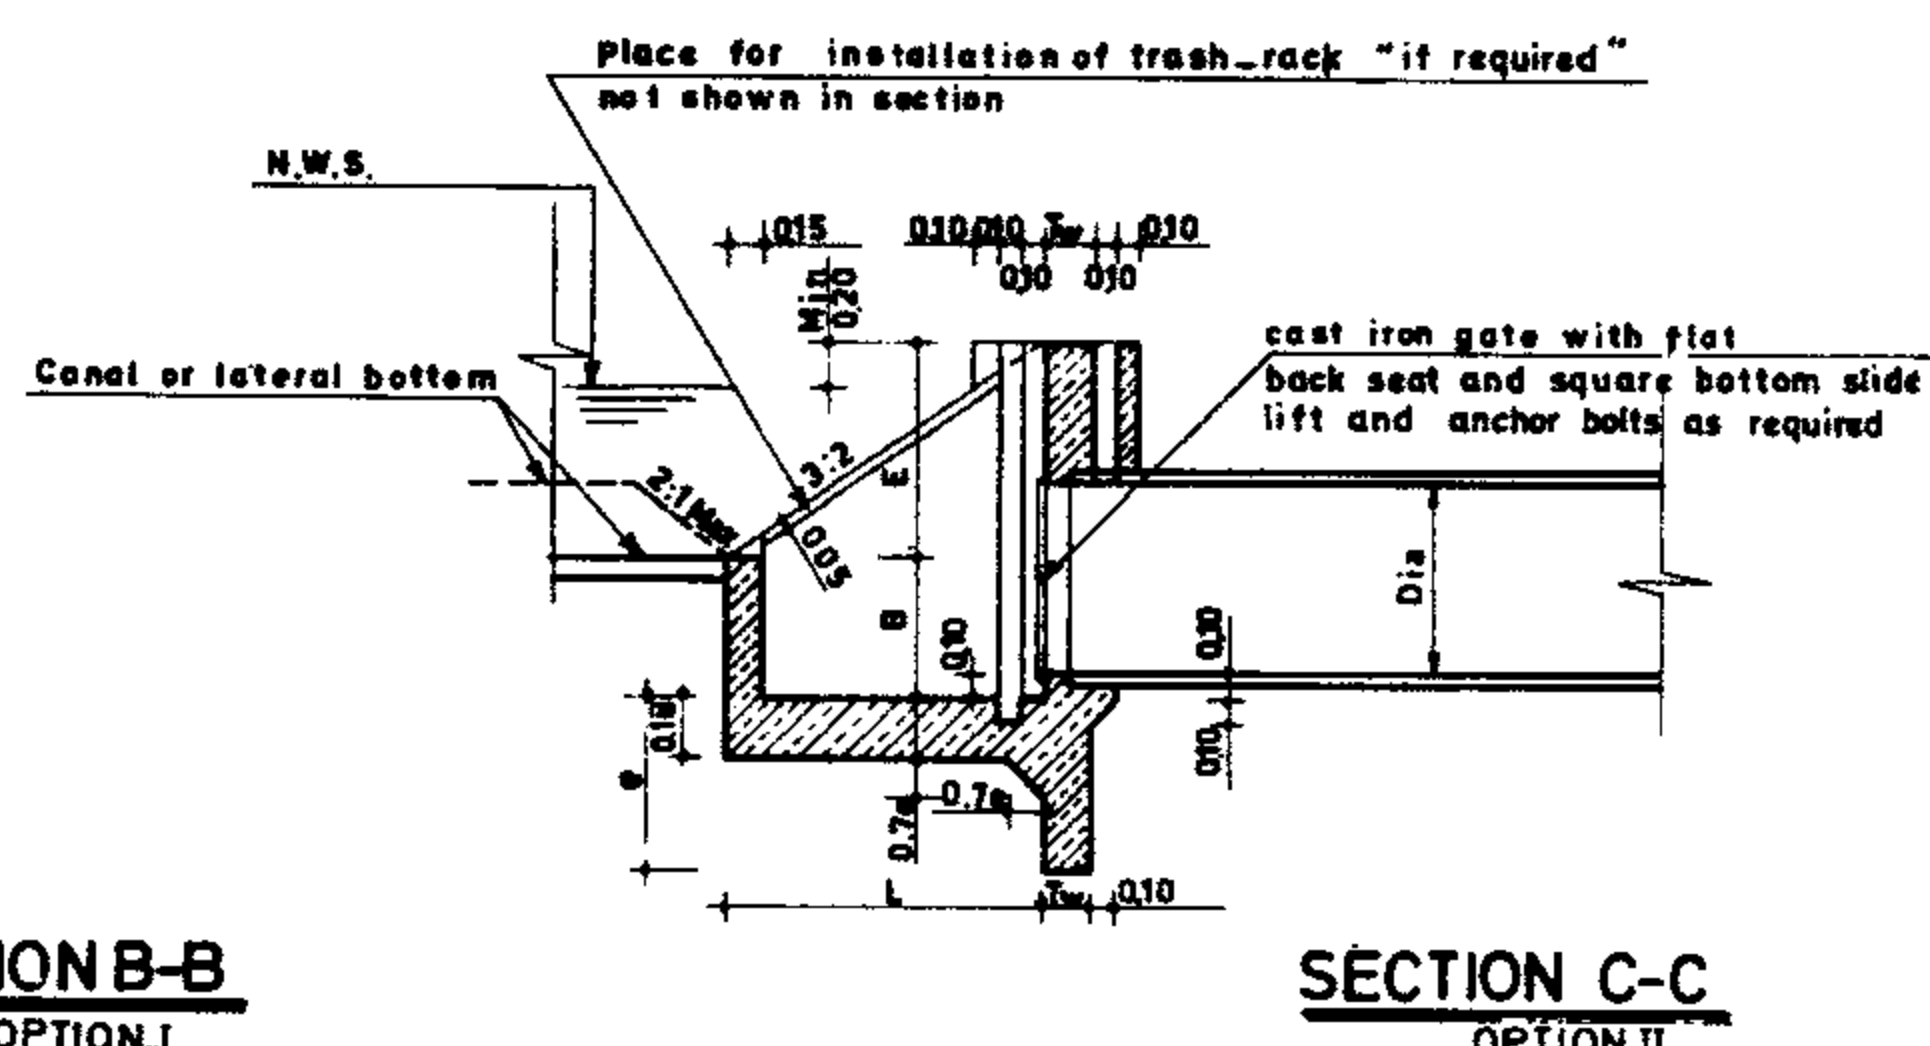

SECTION C-C
OPTION II

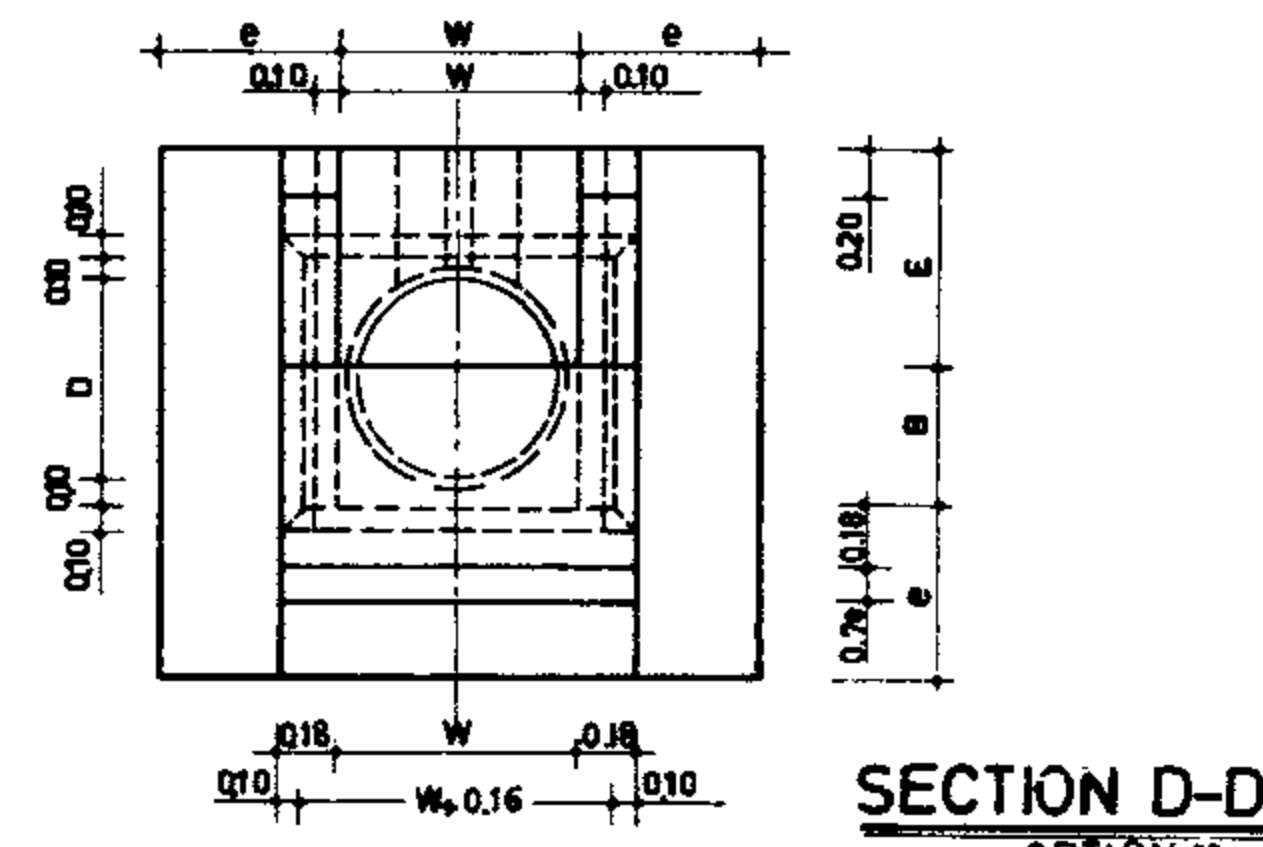

SECTION D-D
OPTION II

DIMENSION TABLE OPTION I

Dia	W	L	E	T _w	e	R/Bar	Conc. m ³	Form. m ²
0.60	0.80	1.90	1.25	0.15	0.60	150.25	1.91	16.30
0.70	0.90	1.95	1.30	0.15	0.60	162.12	2.09	17.22
0.80	1.00	1.40	2.10	0.20	0.75	213.88	3.49	27.46
0.90	1.10	1.50	2.25	0.20	0.75	230.77	3.75	29.90
1.00	1.20	1.60	2.40	0.20	0.75	249.49	4.11	32.40

DIMENSION TABLE OPTION II

STR	Dia.	W	L	E	B	T _w	e	R/Bar	Conc. m ³	Form. m ²
600-1	060	080	1125	075	045	015	060	120.36	1.60	14.76
600-2	060	080	1125	075	060	015	060	132.75	1.74	16.34
600-3	060	080	1125	075	075	015	060	140.98	1.91	18.16
600-4	060	080	1125	075	100	015	060	157.77	2.18	21.18
700-1	070	090	1125	075	090	015	060	159.07	2.18	20.46
700-2	070	090	1125	075	110	015	060	169.55	2.41	22.82
800-1	080	100	1350	090	060	020	075	166.64	2.87	22.32
800-2	080	100	1350	090	090	020	075	191.51	3.31	26.36
800-3	080	100	1350	090	110	020	075	202.60	3.61	29.74
900-1	090	110	1350	090	090	020	075	195.09	3.47	27.12
900-2	090	110	1350	090	110	020	075	212.58	3.67	30.18
900-3	090	110	1350	090	120	020	075	217.29	3.82	31.74
1000-1	100	120	150	100	110	020	075	228.94	4.22	32.76
1000-2	100	120	150	100	120	020	075	233.77	4.39	34.40

NOTES:

- 1-Turnouts are used to divert water from a supply channel to a smaller channel. Pipes are generally used to carry the water through the bank of the supply channel.
- 2-The conduit and outlet sections of the structure may be designed as part of another type of structure such as a siphon or a drop or they may connect to water measurement structure.
- 3-Design considerations: a) For velocity in the pipe and other hydraulic considerations see notes on dwg. No 11/6/1/02. b) Turnout inlet should be set so that they do not protrude into the canal prism, the slope of the sidewalls should be such that they will not interfere with clean-


ing and maintaining the canal.
c) The airvent shown on this dwg. is to prevent the formation of a vacuum downstream of the turnout gate and may be omitted when the turnout is submerged by the design delivery water surface.

REFERENCE DWGS: For reinforcement see dwg. No 12/8/3/01
For general notes see dwgs. No 20/2/1/01 TO 20/2/1/03


Scale: N.T.S	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. No 12/8/1/01	
Approved:	Sheet No 1 of 4	Rev. No

TURNOUTS (PLAN & SECTION)


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

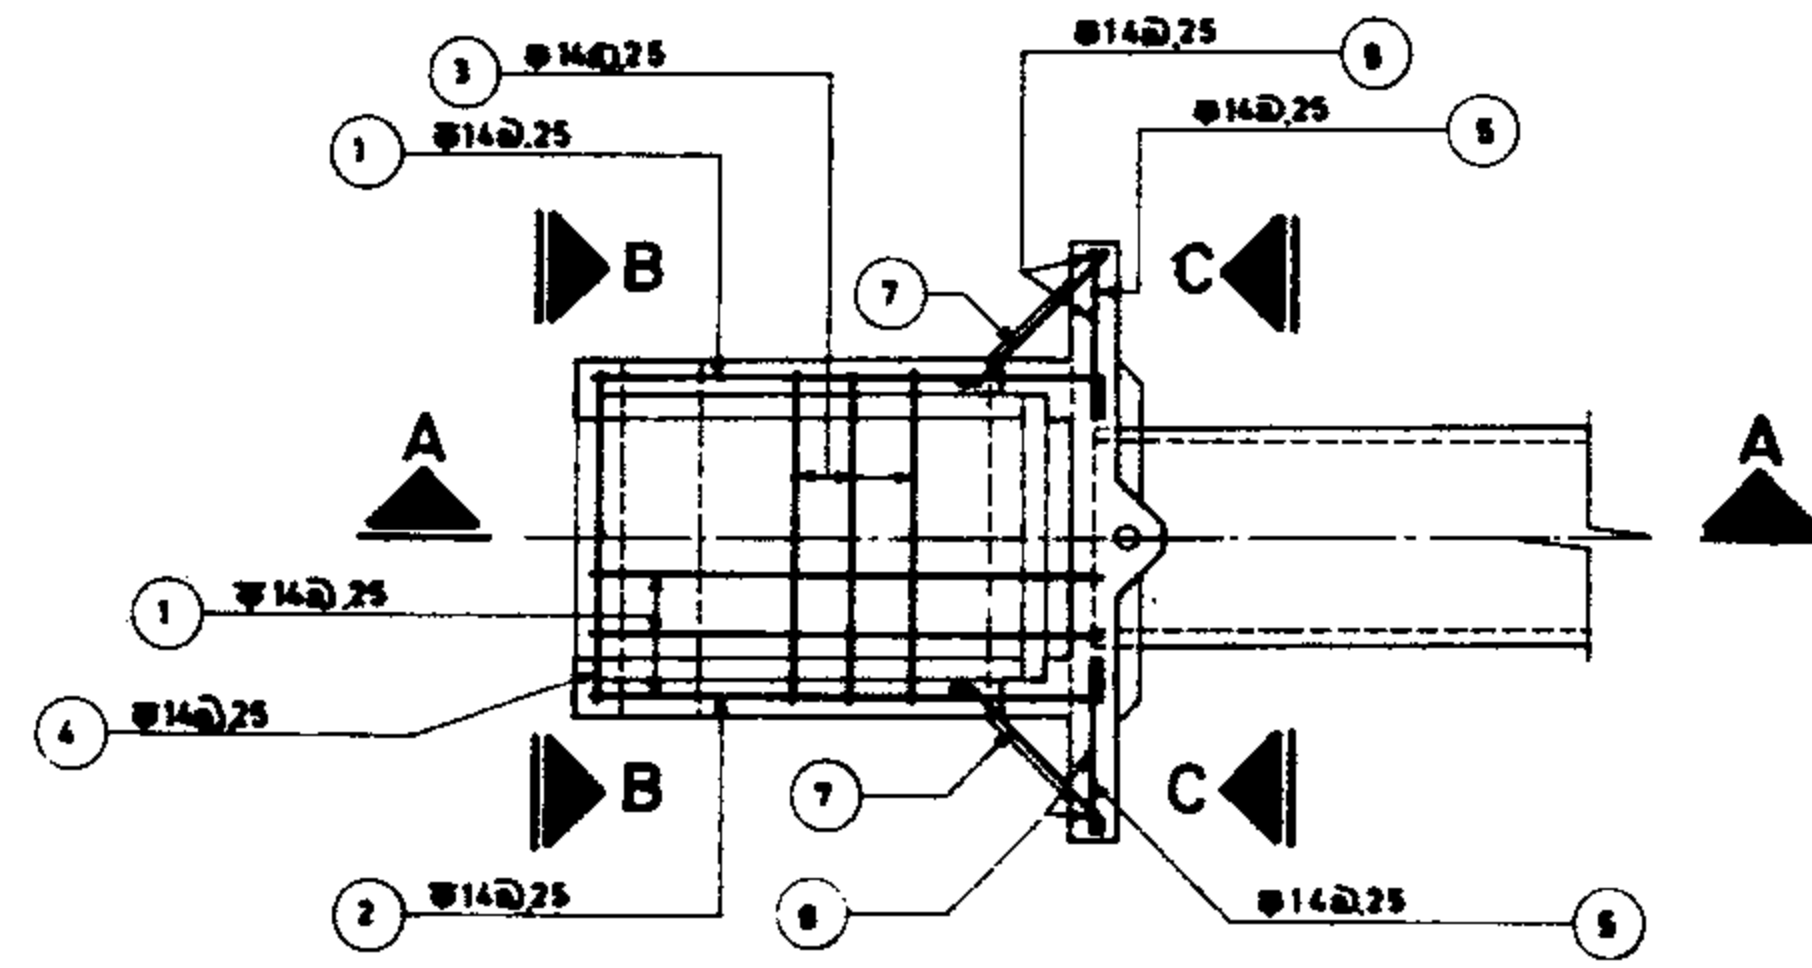


PLAN
Scale 1:50

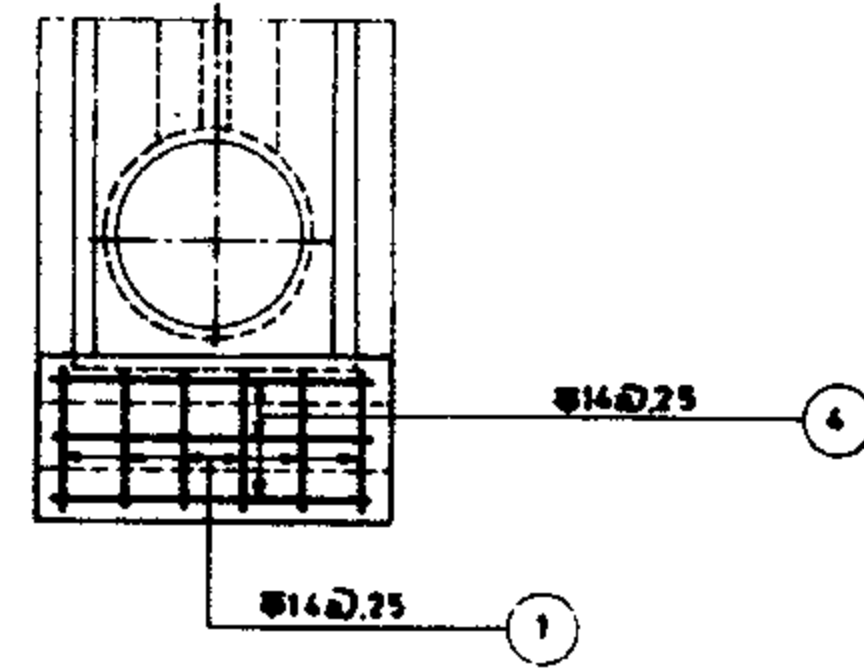




SECTION B-B
Scale 1:50

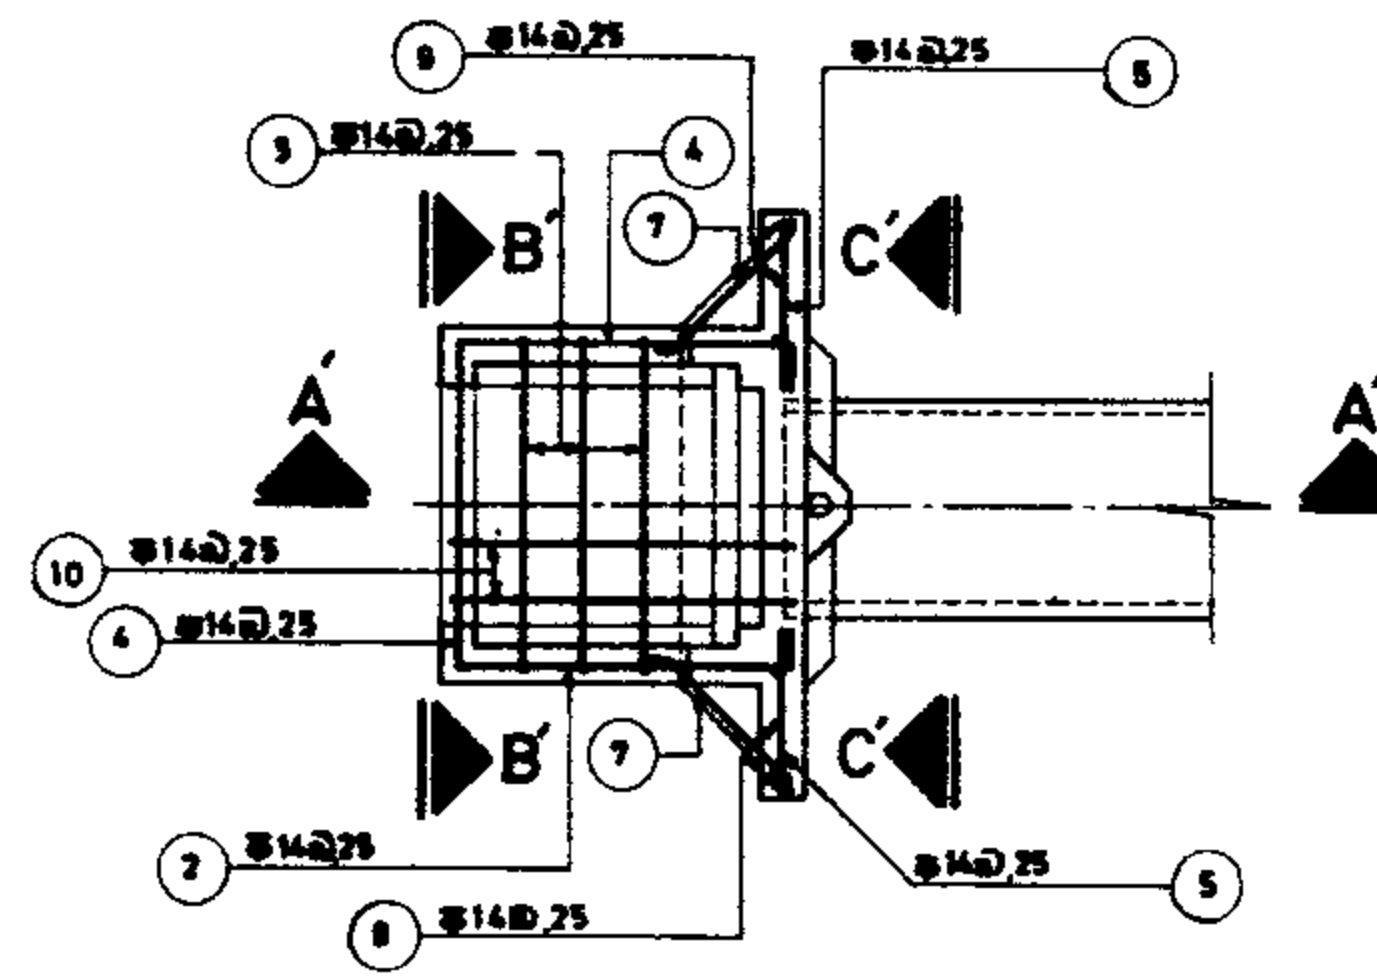


PLAN
Scale 1:50

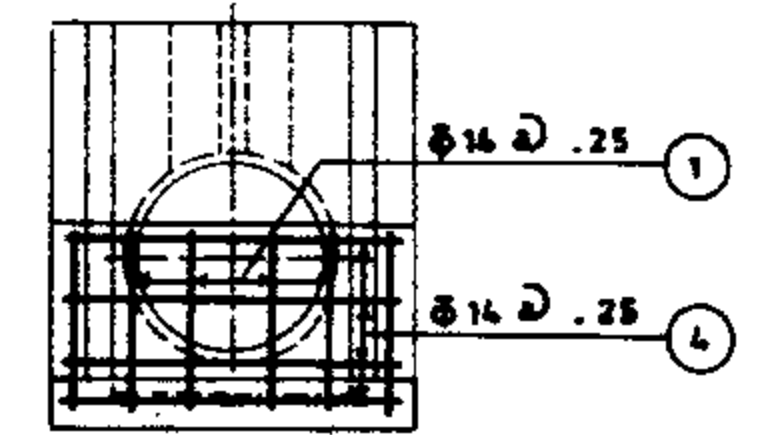


SECTION B'-B'
Scale 1:50

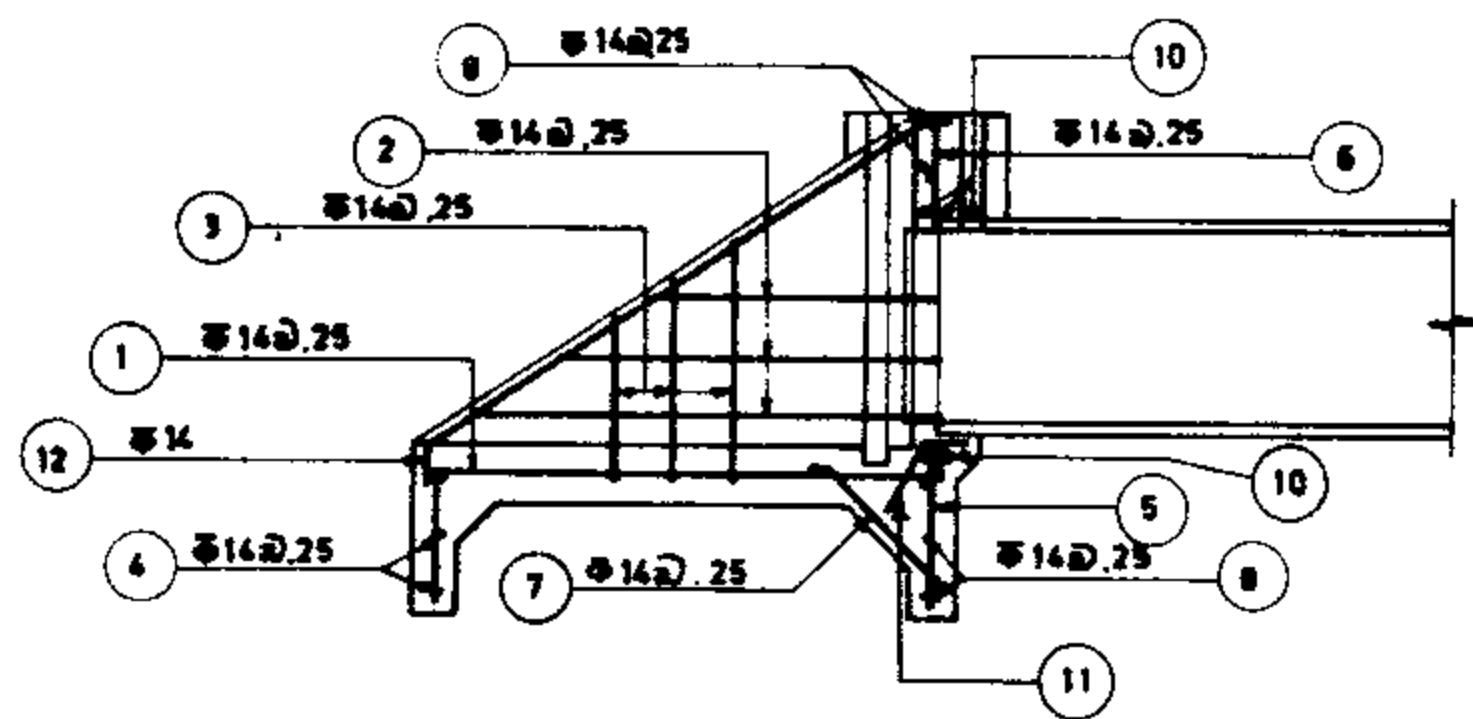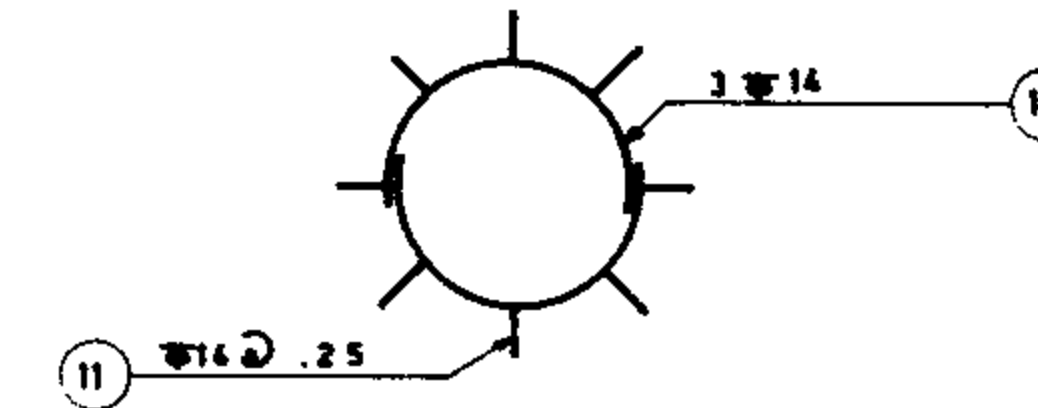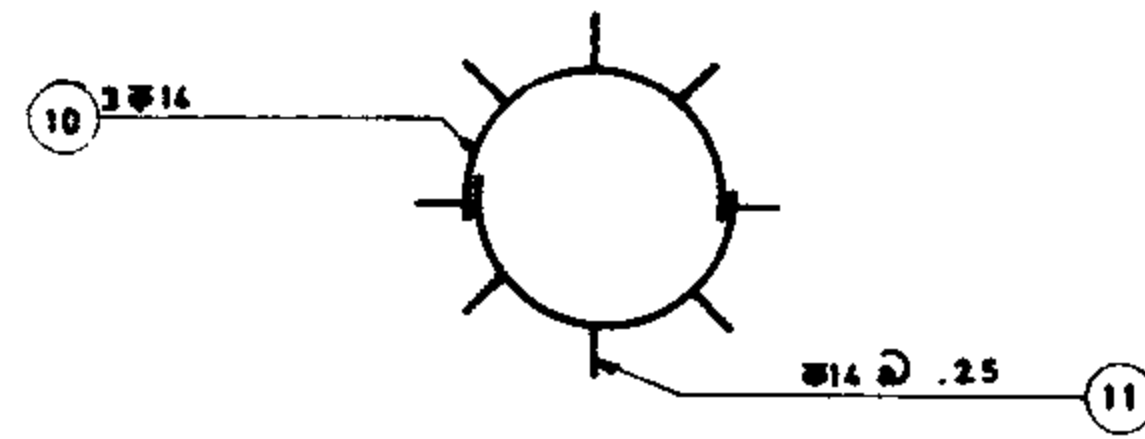


SECTION A-A
Scale 1:50

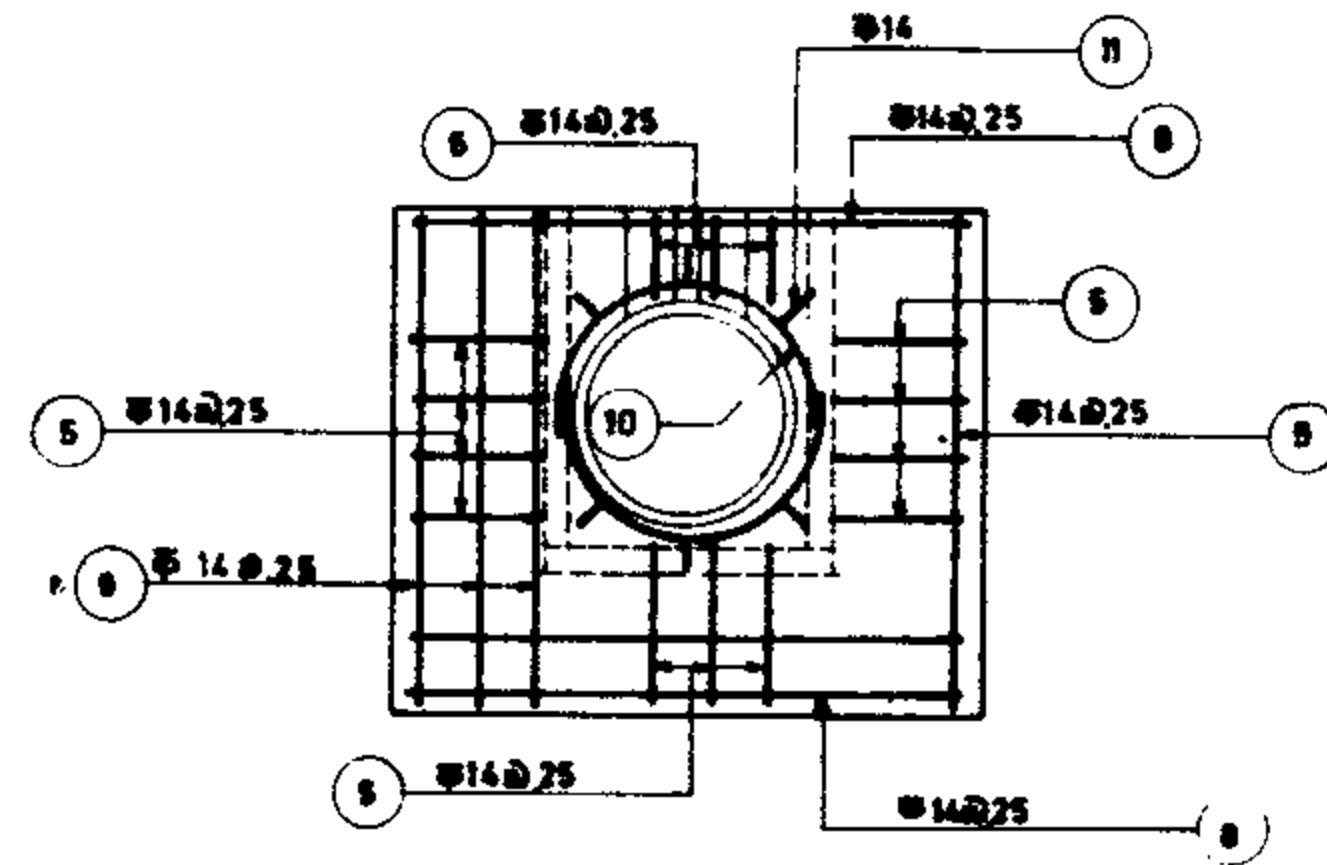

SECTION C-C
Scale 1:50

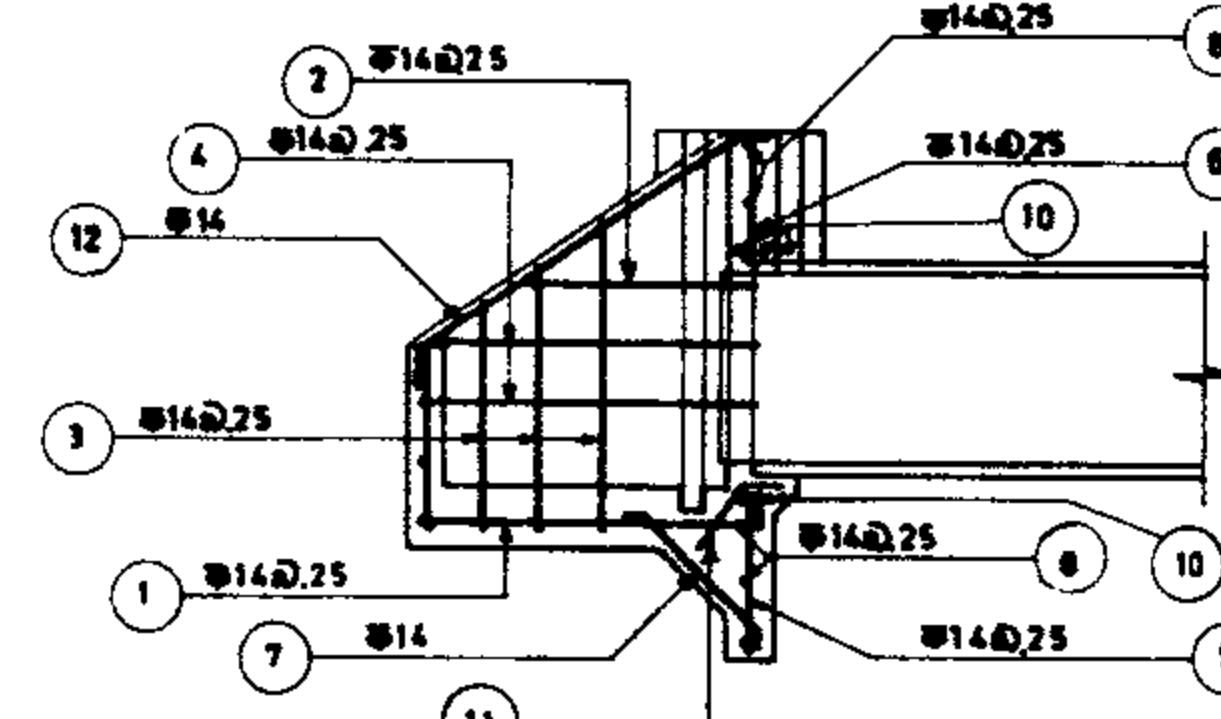

SECTION A'-A'
Scale 1:50

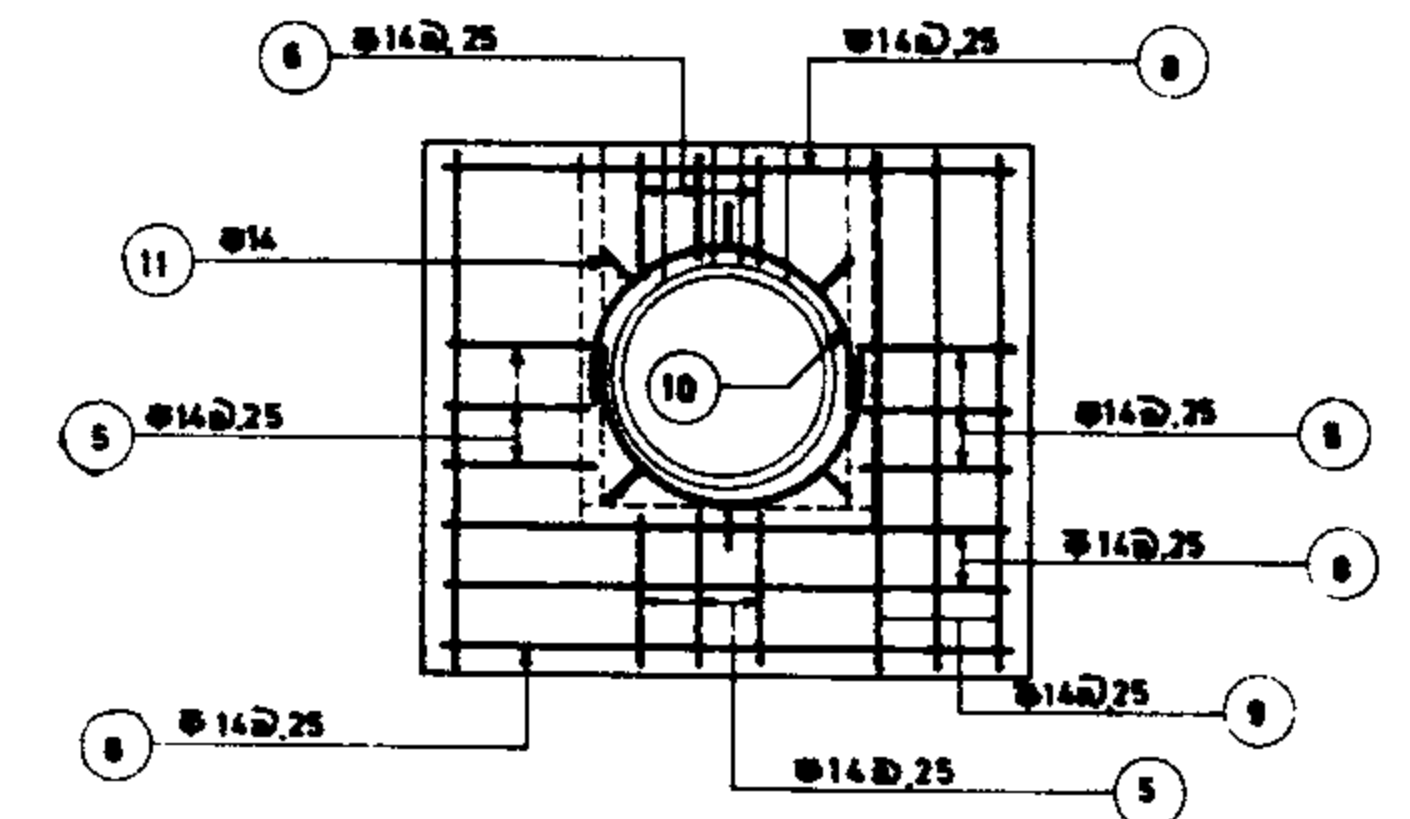

SECTION C'-C'
Scale 1:50

REFERENCE DWGS: For plan & section see dwg. No. 12/8/1/01.
For list of reinforcement see dwgs. No. 12/8/3/03 & 12/8/3/03

Scale: 1:50

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG. No. 12/8/3/01

Approved:

Sheet No 2 of 4

Rev. No

TURNOUTS REINFORCEMENT
PLAN & SECTION

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

DIA 60				
POS	No	FORM	UNIT LENG	TOTAL LENG
1	6		2.50	15.00
2	10		1.33	13.30
3	10		2.56	25.60
4	4		1.10	4.40
5	6		0.50	3.00
6	2		0.49	0.98
7	14		1.04	14.56
8	6		1.86	11.16
9	8		1.75	14.00
10	3		3.79	11.37
11	11		0.50	5.50
12	2		2.65	5.30
			124.17	
			124.17 x 1.21 =	150.25 kg

DIA 70				
POS	No	FORM	UNIT LENG	TOTAL LENG
1	6		2.55	15.30
2	12		1.35	16.20
3	10		2.71	27.10
4	4		1.20	4.80
5	9		0.50	4.50
6	3		0.40	1.20
7	15		1.04	15.60
8	5		2.00	10.00
9	8		1.80	14.40
10	3		4.30	12.90
11	13		0.50	6.50
12	2		2.74	5.48
			133.98	
			133.98 x 1.21 =	162.12 kg

DIA 80				
POS	No	FORM	UNIT LENG	TOTAL LENG
1	7		2.15	15.05
2	18		1.08	19.35
3	8		3.61	28.88
4	4		1.30	5.20
5	9		0.85	5.85
6	3		1.10	3.30
7	22		1.19	26.18
8	9		2.40	21.60
9	8		2.75	22.00
10	3		4.66	13.99
11	14		0.50	7.00
12	2		4.18	8.36
			176.76	
			176.76 x 1.21 =	213.88 kg

DIA 90				
POS	No	FORM	UNIT LENG	TOTAL LENG
1	7		2.25	15.75
2	18		1.13	20.34
3	8		3.86	30.88
4	4		1.40	5.60
5	12		0.65	7.80
6	4		1.15	4.60
7	24		1.19	28.56
8	9		2.50	22.50
9	8		2.90	23.20
10	3		5.03	15.09
11	15		0.50	7.50
12	2		4.45	8.90
			190.72	
			190.72 x 1.21 =	230.77 kg

DIA 100				
POS	No	FORM	UNIT LENG	TOTAL LENG
1	8		2.35	18.80
2	20		1.18	23.60
3	8		4.11	32.88
4	4		1.50	6.00
5	12		0.65	7.80
6	4		1.16	4.64
7	25		1.19	29.75
8	9		2.64	23.76
9	8		3.05	24.40
10	3		5.54	16.62
11	17		0.50	8.50
12	2		4.72	9.44
			206.19	
			206.19 x 1.21 =	249.49 kg

STR.600-1				
POS	No	FORM	UNIT LENG	TOTAL LENG
1	6		1.73	10.38
2	8		0.94	7.52
3	6		2.76	16.56
4	1		3.44	3.44
5	6		0.50	3.00
6	2		0.37	0.74
7	14		1.04	14.56
8	5		1.86	9.30
9	8		1.70	13.60
10	3		3.79	11.37
11	11		0.50	5.50
12	2		1.75	3.50
			99.47	
			99.47 x 1.21 =	120.36 kg

STR. 600-2				
POS	No	FORM	UNIT LENG	TOTAL LENG
1	6		1.88	11.28
2	8		0.94	7.52
3	6		3.06	18.36
4	2		3.44	6.88
5	6		0.50	3.00
6	2		0.37	0.74
7	15		1.04	15.60
8	6		1.86	11.16
9	8		1.85	14.80
10	3		3.79	11.37
11	11		0.50	5.50
12	2		1.75	3.50
			109.71	
			109.71 x 1.21 =	132.75 kg

STR. 600-3				
POS	No	FORM	UNIT LENG	TOTAL LENG
1	6		2.03	12.18
2	8		0.94	7.52
3	6		3.36	20.16
4	2		3.44	6.88
5	6		0.50	3.00
6	2		0.37	0.74
7	16		1.04	16.64
8	7		1.86	13.02
9	8		2.00	16.00
10	3		3.79	11.37
11	11		0.50	5.50
12	2		1.75	3.50
			116.51	
			116.51 x 1.21 =	140.98 kg

STR. 600-4				
POS	No	FORM	UNIT LENG	TOTAL LENG
1	6		2.28	13.68
2	8		0.94	7.52
3	6		3.86	23.16
4	3		3.44	10.32
5	6		0.50	3.00
6	2		0.37	0.74
7	18		1.04	18.72
8	8		1.86	14.88
9	8		2.25	18.00
10	3		3.79	11.37
11	11		0.50	5.50
12	2		1.75	3.50
			130.39	
			130.39 x 1.21 =	157.77 kg

STR. 700-1				
POS	No	FORM	UNIT LENG	TOTAL LENG
1	6		2.18	13.08
2	8		0.94	7.52
3	6		3.76	22.56
4	3		3.36	10.08
5	9		0.50	4.50
6	3		0.30	0.90
7	18		1.04	18.72
8	7		2.00	14.00
9	8		2.15	17.20
10	3		4.30	12.90
11	13		0.50	6.50
12	2		1.75	3.50
			131.46	
			131.46 x 1.21 =	159.07 kg

NOTES: List of reinforcement for turnouts without drop are shown with their dia

ALL BARS ARE $\Phi 14$ (1.21 kg/m)

REFERENCE DWGS: For reinforcement see dwg. No 12/8/3/01
For bars with variable unit length see note under the same title at dwg. No 20/2/1/01

Scale:	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. No 12/8/3/02	
Approved:	Sheet. No 3 of 4	Rev No

TURNOUTS
LIST OF REINFORCEMENT
DIA 60 TO 100
STR 600-1 TO 700-1

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

STR. 700_2

POS	Nº	FORM	UNIT LENG	TOTAL LENG
1	6		2.38	14.28
2	8		0.94	7.52
3	6		4.16	24.96
4	4		3.54	14.16
5	9		0.50	4.50
6	3		0.30	0.90
7	20		1.04	20.80
8	8		2.00	16.00
9	6		2.35	14.10
10	3		4.30	12.90
11	13		0.50	6.50
12	2		1.75	3.50
			140.12	
			140.12	$140.12 \times 1.21 = 169.55 \text{ kg}$

STR. 800_1

POS	Nº	FORM	UNIT LENG	TOTAL LENG
1	7		2.10	14.70
2	10		1.05	10.50
3	6		3.41	20.46
4	2		4.08	8.16
5	9		0.65	5.85
6	3		0.40	1.20
7	17		1.19	20.23
8	6		2.40	14.40
9	8		2.15	17.20
10	3		4.66	13.98
11	14		0.50	7.00
12	2		2.02	4.04
			137.72	
			137.72	$137.72 \times 1.21 = 166.64 \text{ kg}$

STR. 800_2

POS	Nº	FORM	UNIT LENG	TOTAL LENG
1	7		2.40	16.80
2	10		1.05	10.50
3	6		4.01	24.06
4	3		4.08	12.24
5	9		0.65	5.85
6	3		0.40	1.20
7	20		1.19	23.80
8	8		1.65	19.20
9	8		2.45	19.60
10	3		4.66	13.98
11	14		0.50	7.00
12	2		2.02	4.04
			158.27	
			158.27	$158.27 \times 1.21 = 191.51 \text{ kg}$

STR. 800_3

POS	Nº	FORM	UNIT LENG	TOTAL LENG
1	7		2.60	18.20
2	10		1.05	10.50
3	6		4.41	26.46
4	4		4.08	16.32
5	9		1.05	4.35
6	3		0.40	1.95
7	21		1.19	24.99
8	8		2.40	19.20
9	8		2.65	21.20
10	3		4.66	13.98
11	14		0.50	7.00
12	2		2.02	4.04
			167.44	
			167.44	$167.44 \times 1.21 = 202.60 \text{ kg}$

STR. 900_1

POS	Nº	FORM	UNIT LENG	TOTAL LENG
1	7		2.40	16.80
2	10		1.05	10.50
3	6		4.11	24.66
4	3		4.18	12.54
5	12		0.65	7.80
6	4		0.35	1.40
7	20		1.19	23.80
8	7		2.50	17.50
9	8		2.45	19.60
10	3		5.03	15.09
11	15		0.50	7.50
12	2		2.02	4.04
			161.23	
			161.23	$161.23 \times 1.21 = 195.09 \text{ kg}$

STR. 900_2

POS	Nº	FORM	UNIT LENG	TOTAL LENG
1	7		2.60	18.20
2	10		1.05	10.50
3	6		4.51	27.06
4	4		4.18	16.72
5	12		0.65	7.80
6	4		0.35	1.40
7	22		1.19	26.18
8	8		2.50	20.00
9	8		2.60	21.20
10	3		5.03	15.09
11	15		0.50	7.50
12	2		2.02	4.04
			175.69	
			175.69	$175.69 \times 1.21 = 212.58 \text{ kg}$

STR. 900_3

POS	Nº	FORM	UNIT LENG	TOTAL LENG
1	7		2.70	18.90
2	10		1.05	10.50
3	6		4.71	28.26
4	4		4.18	16.72
5	12		0.65	7.80
6	4		0.35	1.40
7	23		1.19	27.37
8	8		2.50	20.00
9	8		2.75	22.00
10	3		5.03	15.09
11	15		0.50	7.50
12	2		2.02	4.04
			179.58	
			179.58	$179.58 \times 1.21 = 217.29 \text{ kg}$

STR. 1000_1

POS	Nº	FORM	UNIT LENG	TOTAL LENG
1	8		2.75	22.00
2	10		1.13	11.30
3	6		4.71	28.26
4	4		4.58	18.32
5	12		0.65	7.80
6	4		0.38	1.52
7	23		1.19	27.37
8	8		2.64	21.12
9	8		2.75	22.00
10	3		5.54	16.62
11	17		0.50	8.50
12	2		2.20	4.40
			189.21	
			189.21	$189.21 \times 1.21 = 228.94 \text{ kg}$

STR. 1000_2

POS	Nº	FORM	UNIT LENG	TOTAL LENG
1	8		2.85	22.80
2	10		1.13	11.30
3	6		4.91	29.46
4	4		4.58	18.32
5	12		0.65	7.80
6	4		0.38	1.52
7	24		1.19	28.56
8	8		2.64	21.12
9	8		2.85	22.80
10	3		5.54	16.62
11	17		0.50	8.50
12	2		2.20	4.40
			193.20	
			193.20	$193.20 \times 1.21 = 233.77 \text{ kg}$


ALL BARS ARE $\Phi 14$ (1.21 kg/m)

REFERENCE DWGS: For reinforcement see dwg. Nº 12/8/3/01
For bars with variable unit length see note under the same title at dwg. Nº 20/2/1/01

Scale:	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. Nº 12/8/3/03	
Approved:	Sheet. Nº 4 of 4	Rev Nº

TURNOUTS
LIST OF REINFORCEMENT
STR. 700_2 TO 1000_2





ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU

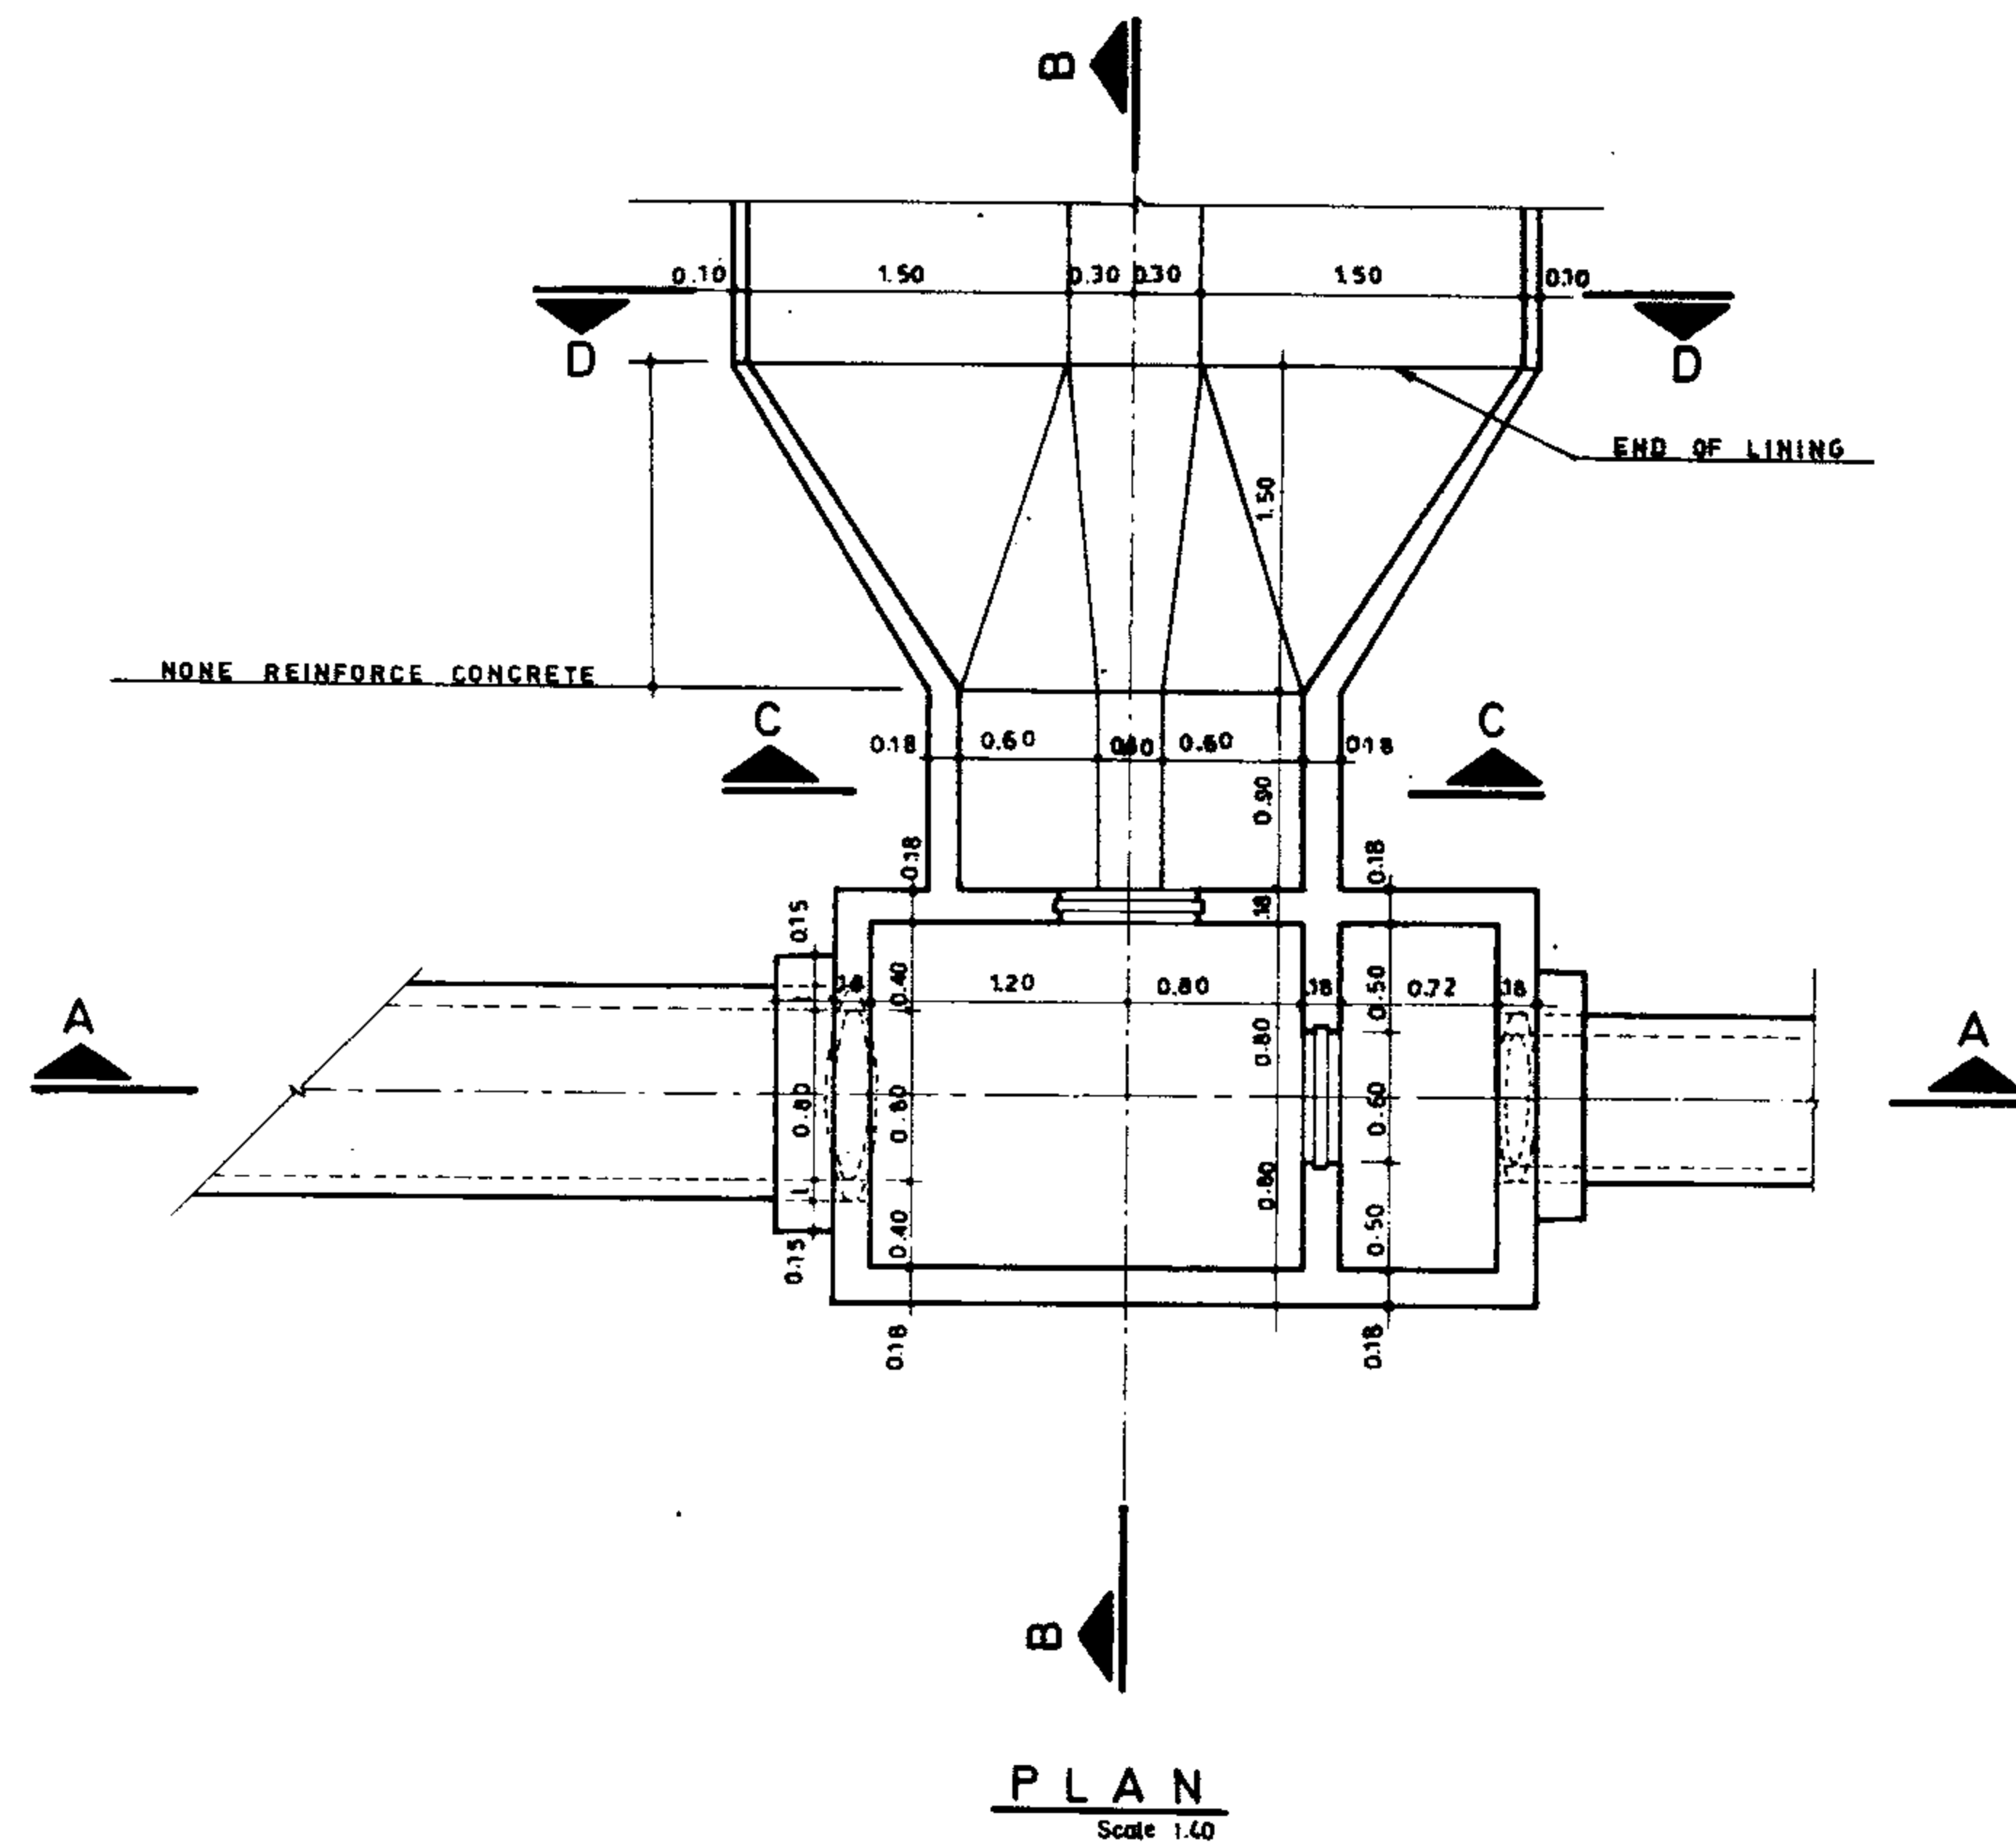

NOTES:

- ① Division structures are used to divide the flow from a supply pipe or channel into two or more channels or pipes.
- ② Division structures may be an operating structure or it may be the outlet of a siphon, a drop, or a turnout from which further diversion is required.
- ③ Adjustable gates used to provide a means of control and measurement of flow.
- ④ Various combinations of supply and delivery are shown on dwgs. No 12/7/1/01 to 12/7/1/09. In practice any of the possible combinations may be encountered.

- ⑤ Design considerations:
 - (a) water must be delivered to the division structure at an elevation that will provide enough head on the gates to furnish the required flow at the required delivery water surface elevation.
 - (b) when delivery to the division structure is through a pipe, the velocity in the pipe is kept to about 0.45 m/s. to reduce turbulence ahead of the weir.

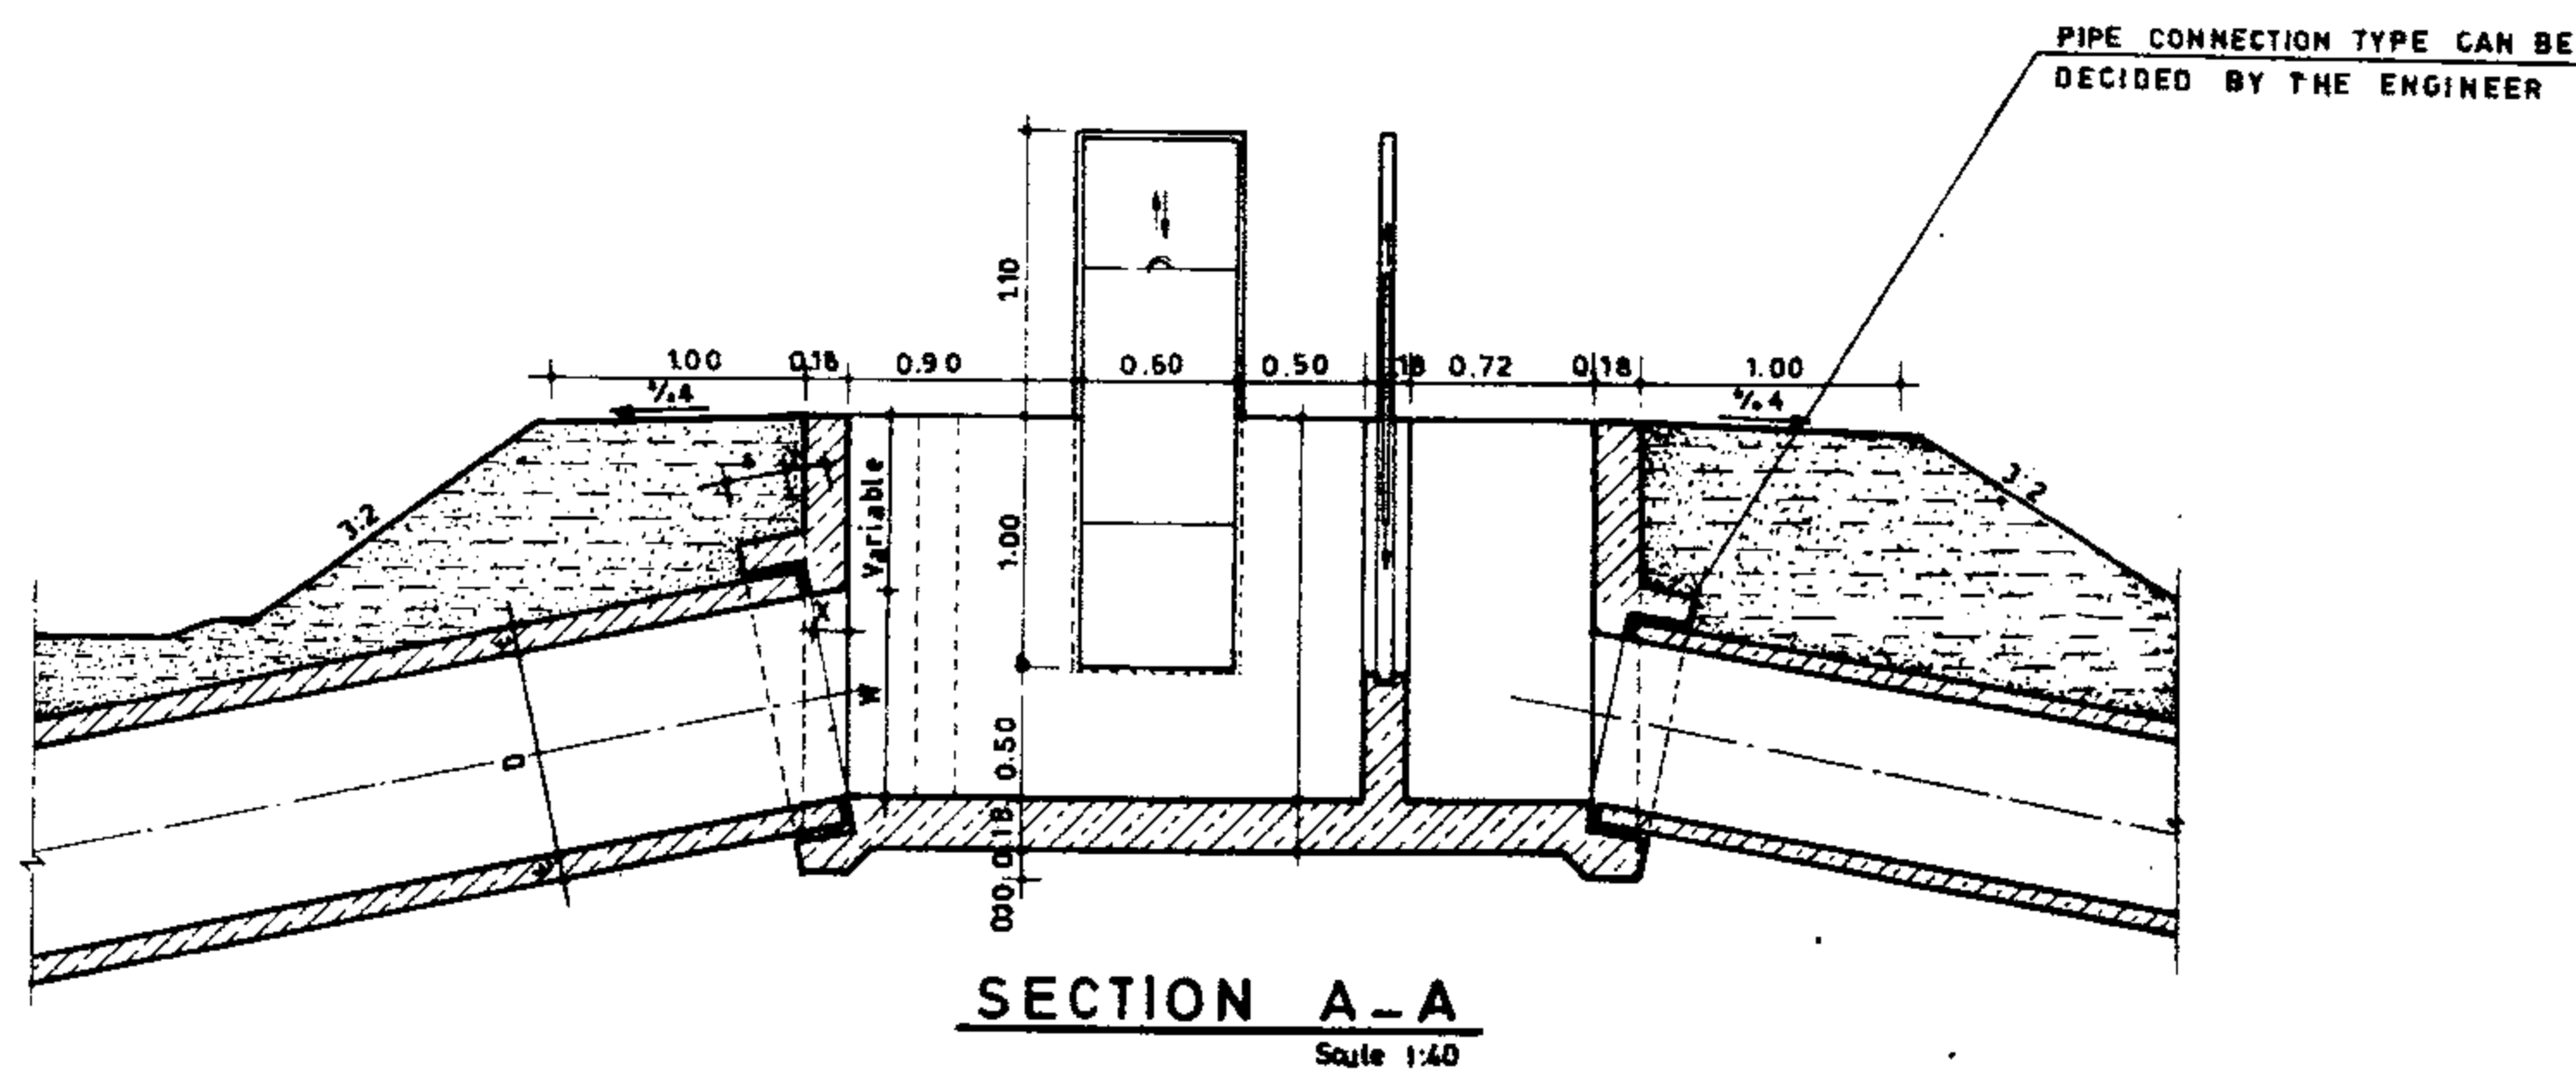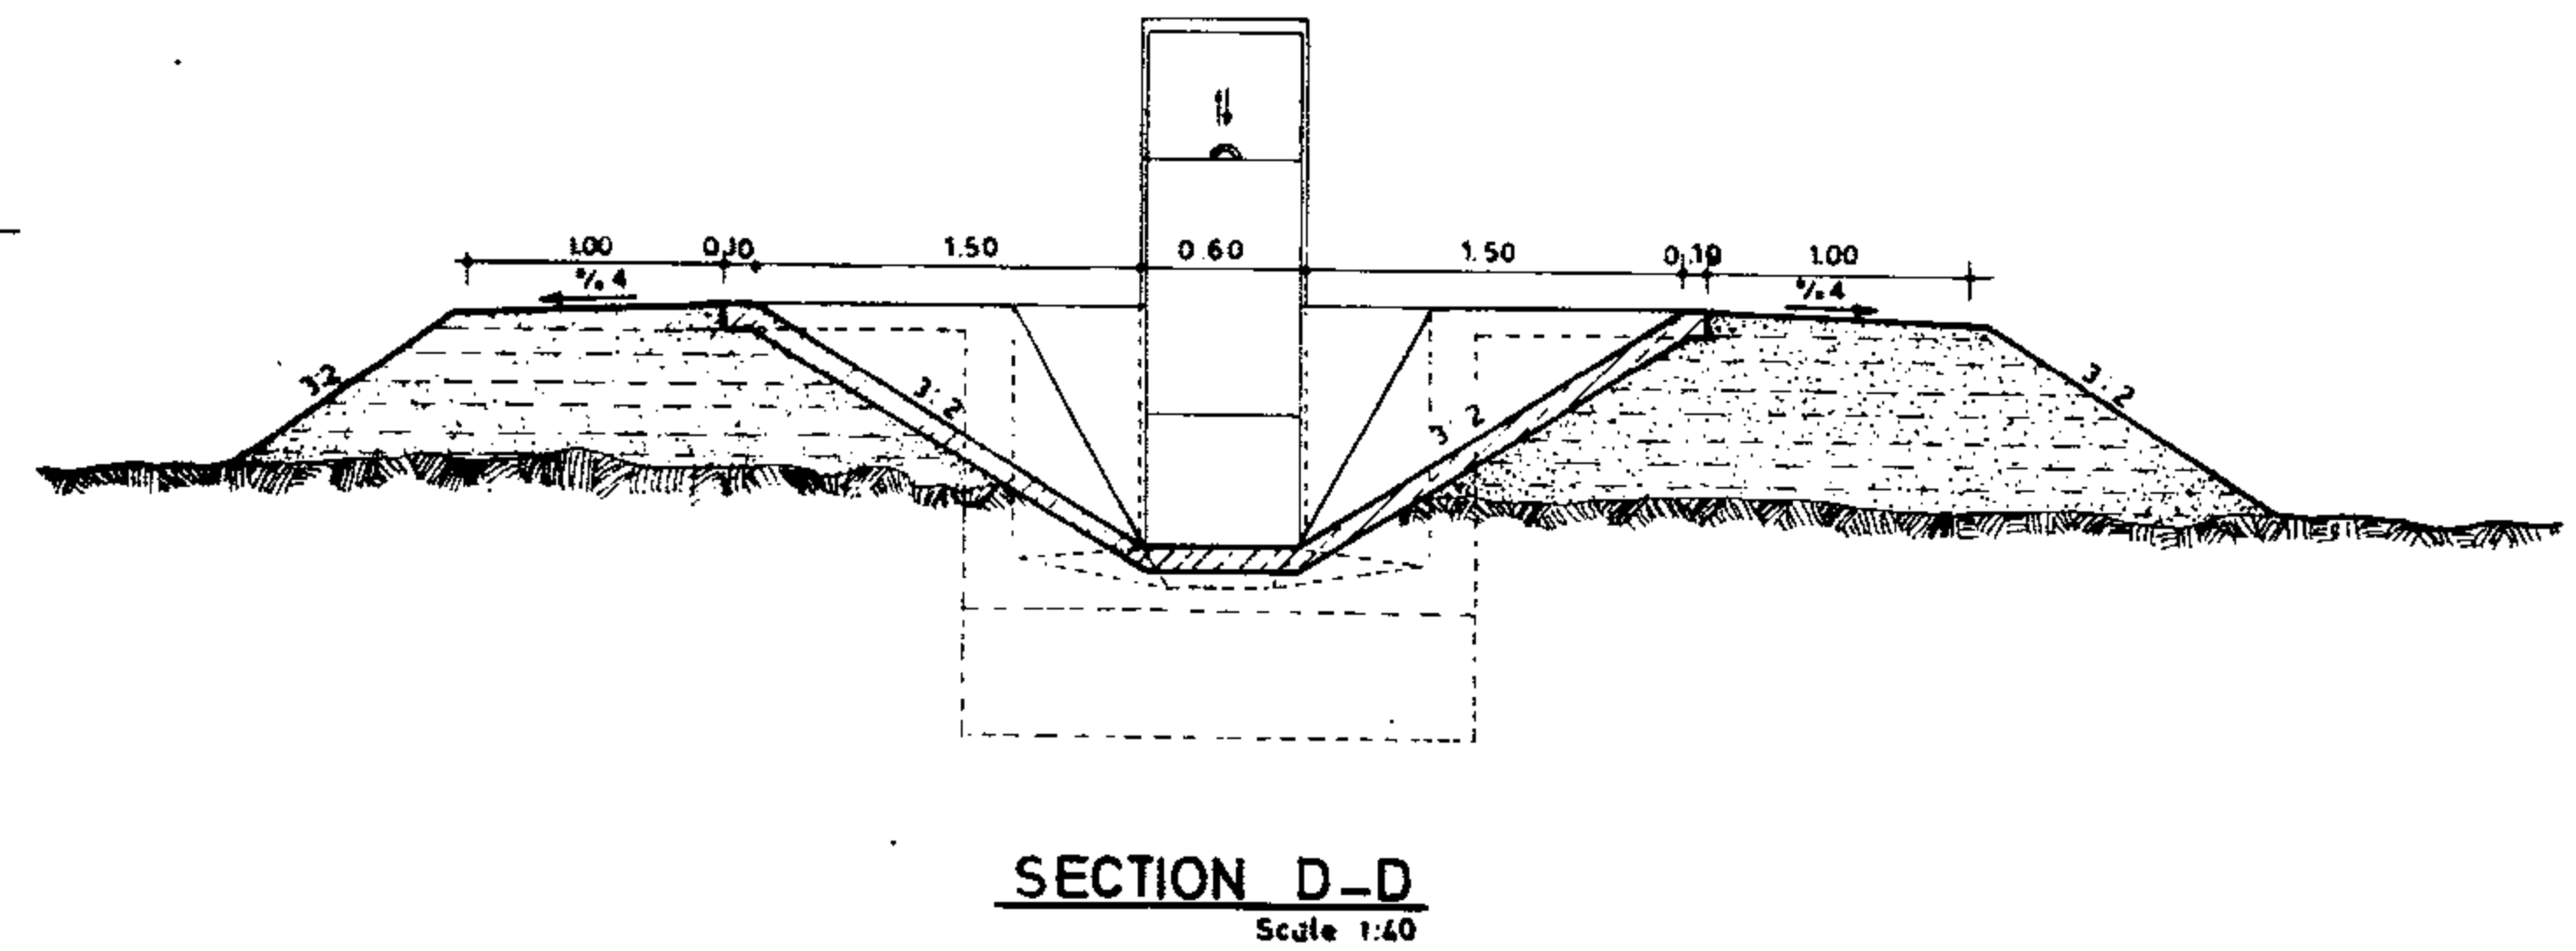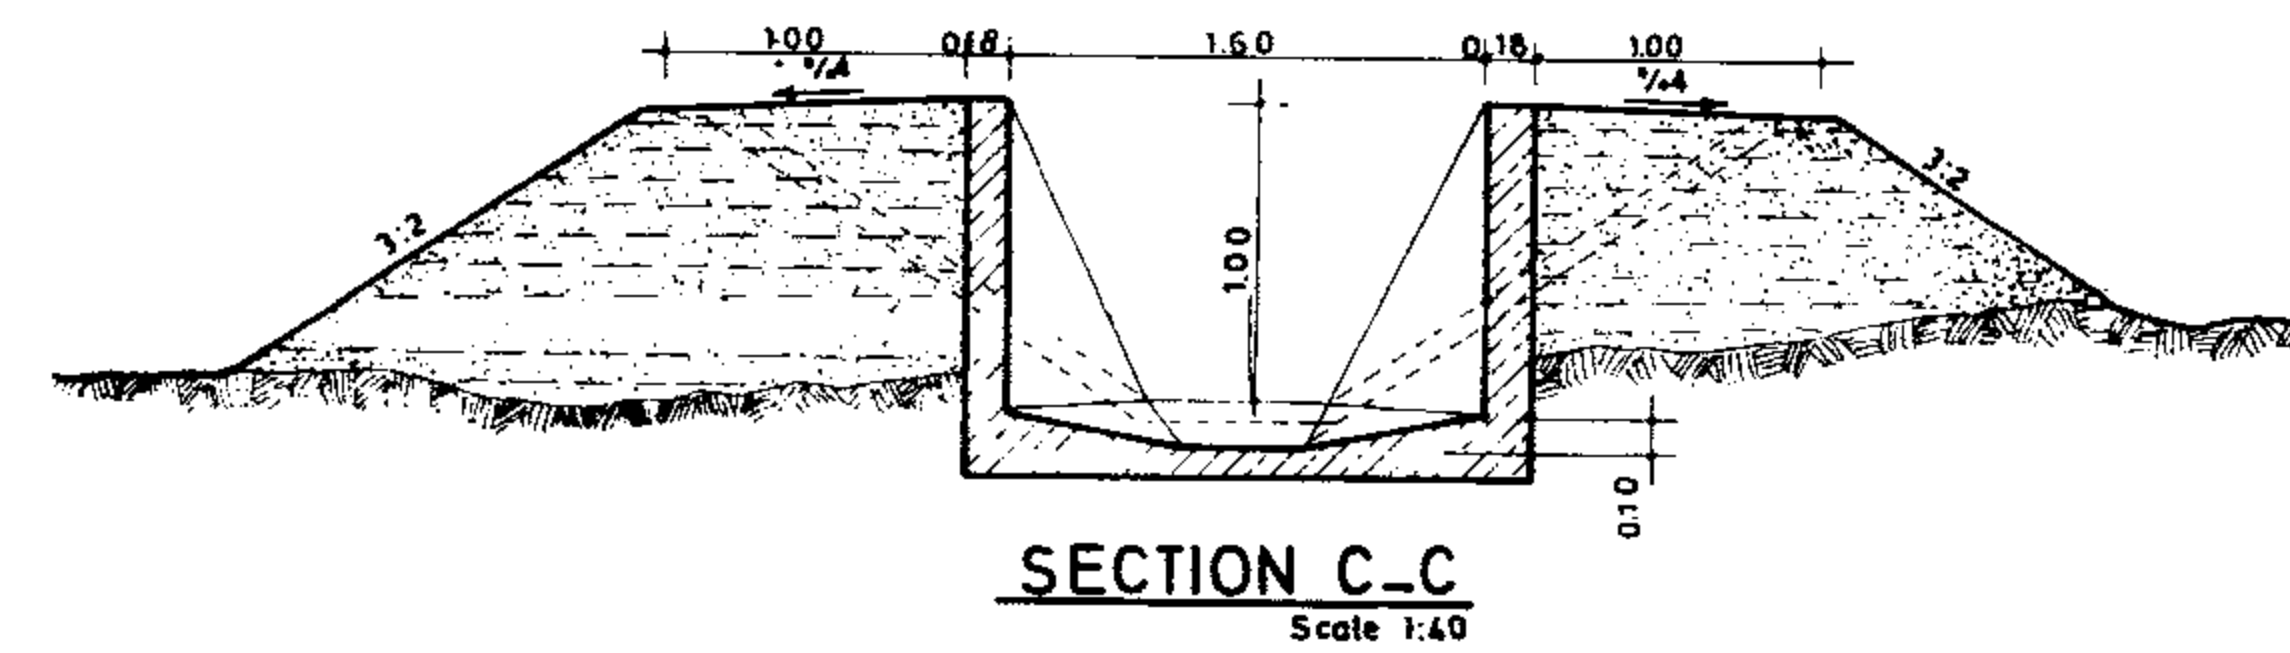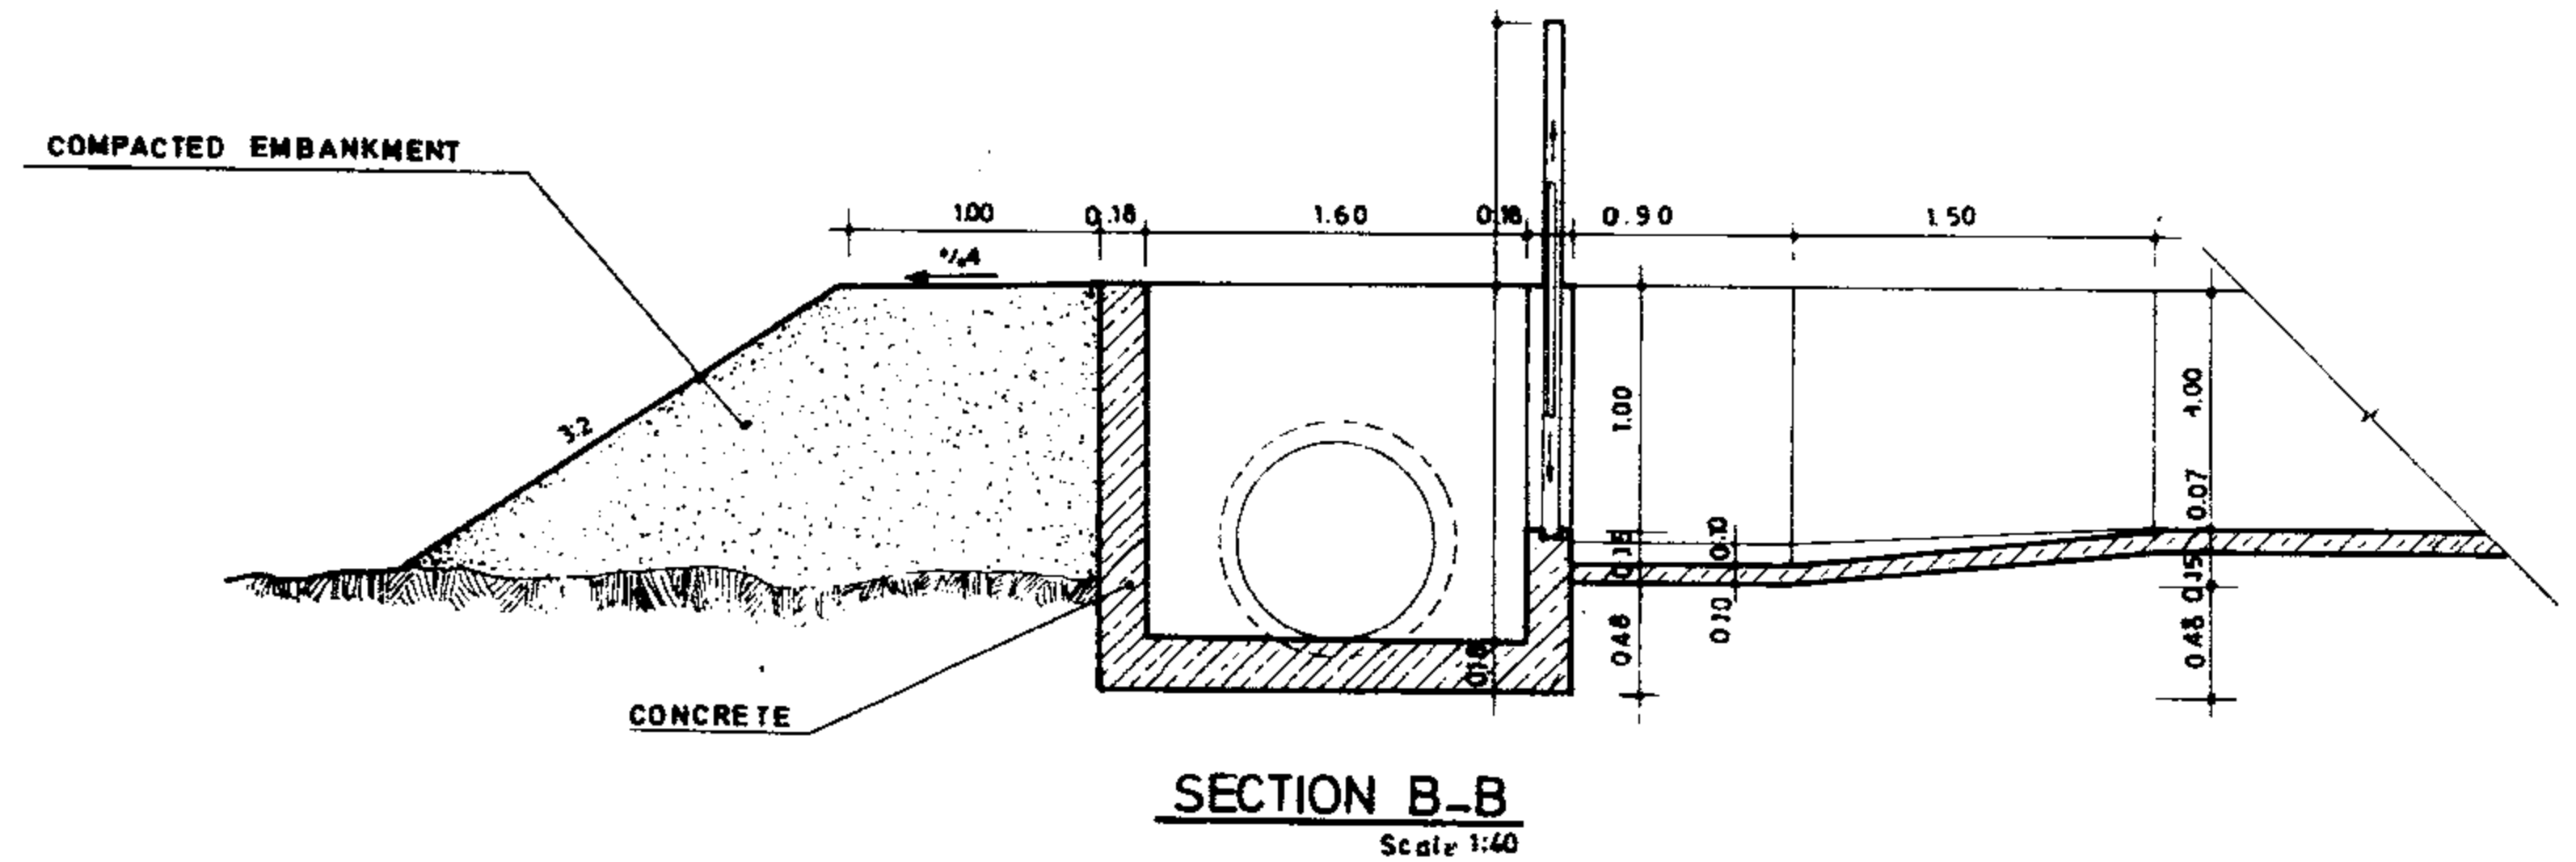

R/Bar. Kg	Conc. m ³	Form. m ²
352.99	3.96	25.82

SLIDE GATE	0.40x0.80	0.50x0.80	0.60x0.80	0.70x0.80	0.80x0.80
Q ^m (l/s)	320	400	480	560	640

* For V=100 m/s

REFERENCE DWGS.

- 1-FOR REINFORCEMENT SEE DWG. NO. 12/7/1/01
- 2-FOR DETAIL AND DIMENSION OF PIPE CONNECTION SEE DWGS. NO. 17/1/1/01 TO 17/1/1/03
- 3-FOR GENERAL NOTES SEE DWGS. NO. 20/1/1/01 TO 20/2/1/03

Scale: 1:40

IRRIGATION & DRAINAGE STANDARDS

Date:


DWG. NO 12/7/1/01

Approved:

Sheet No 1 of 18 Rev. No

DIVISION BOX (TYPE 1)

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

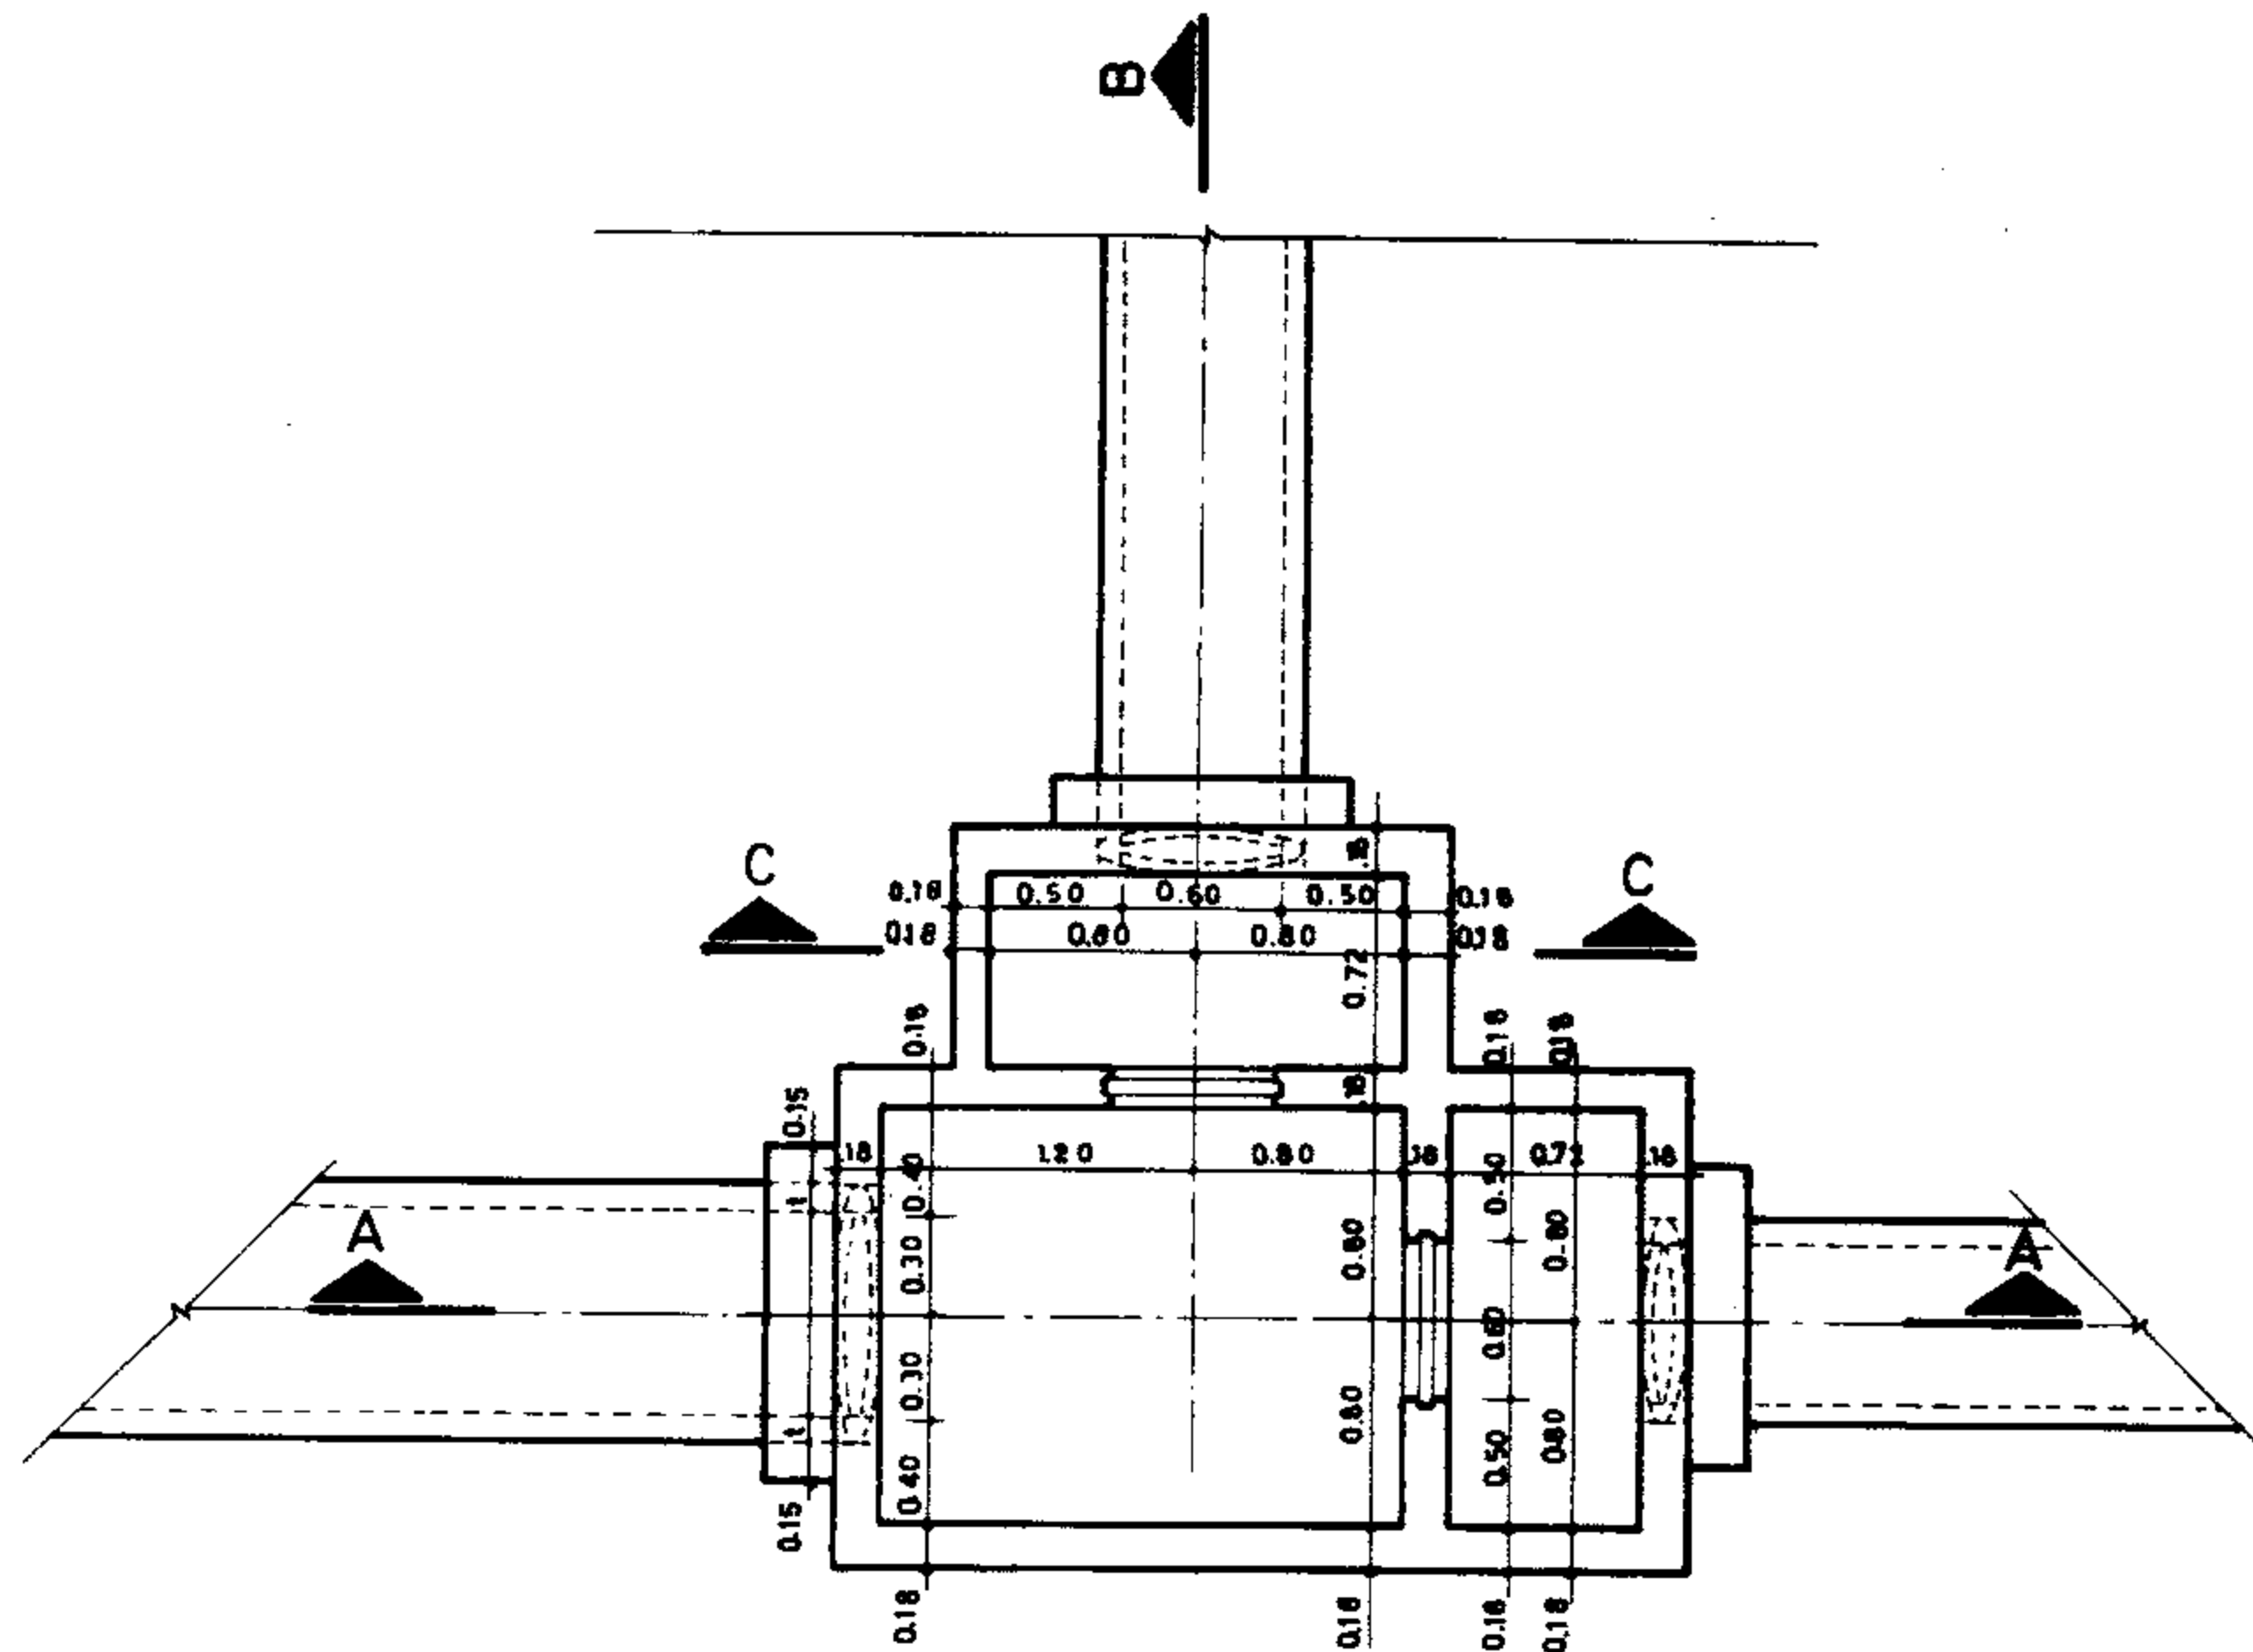


PLAN
Scale 1:40


R/Bar. kg.	Conc. m ³	Form. m ²
423.16	4.55	34.88

SLIDE GATE	0.40×0.80	0.50×0.80	0.60×0.80	0.70×0.80	0.80×0.80
Q ^m (l/s)	320	400	480	560	640


* FOR V=1.00 m/s

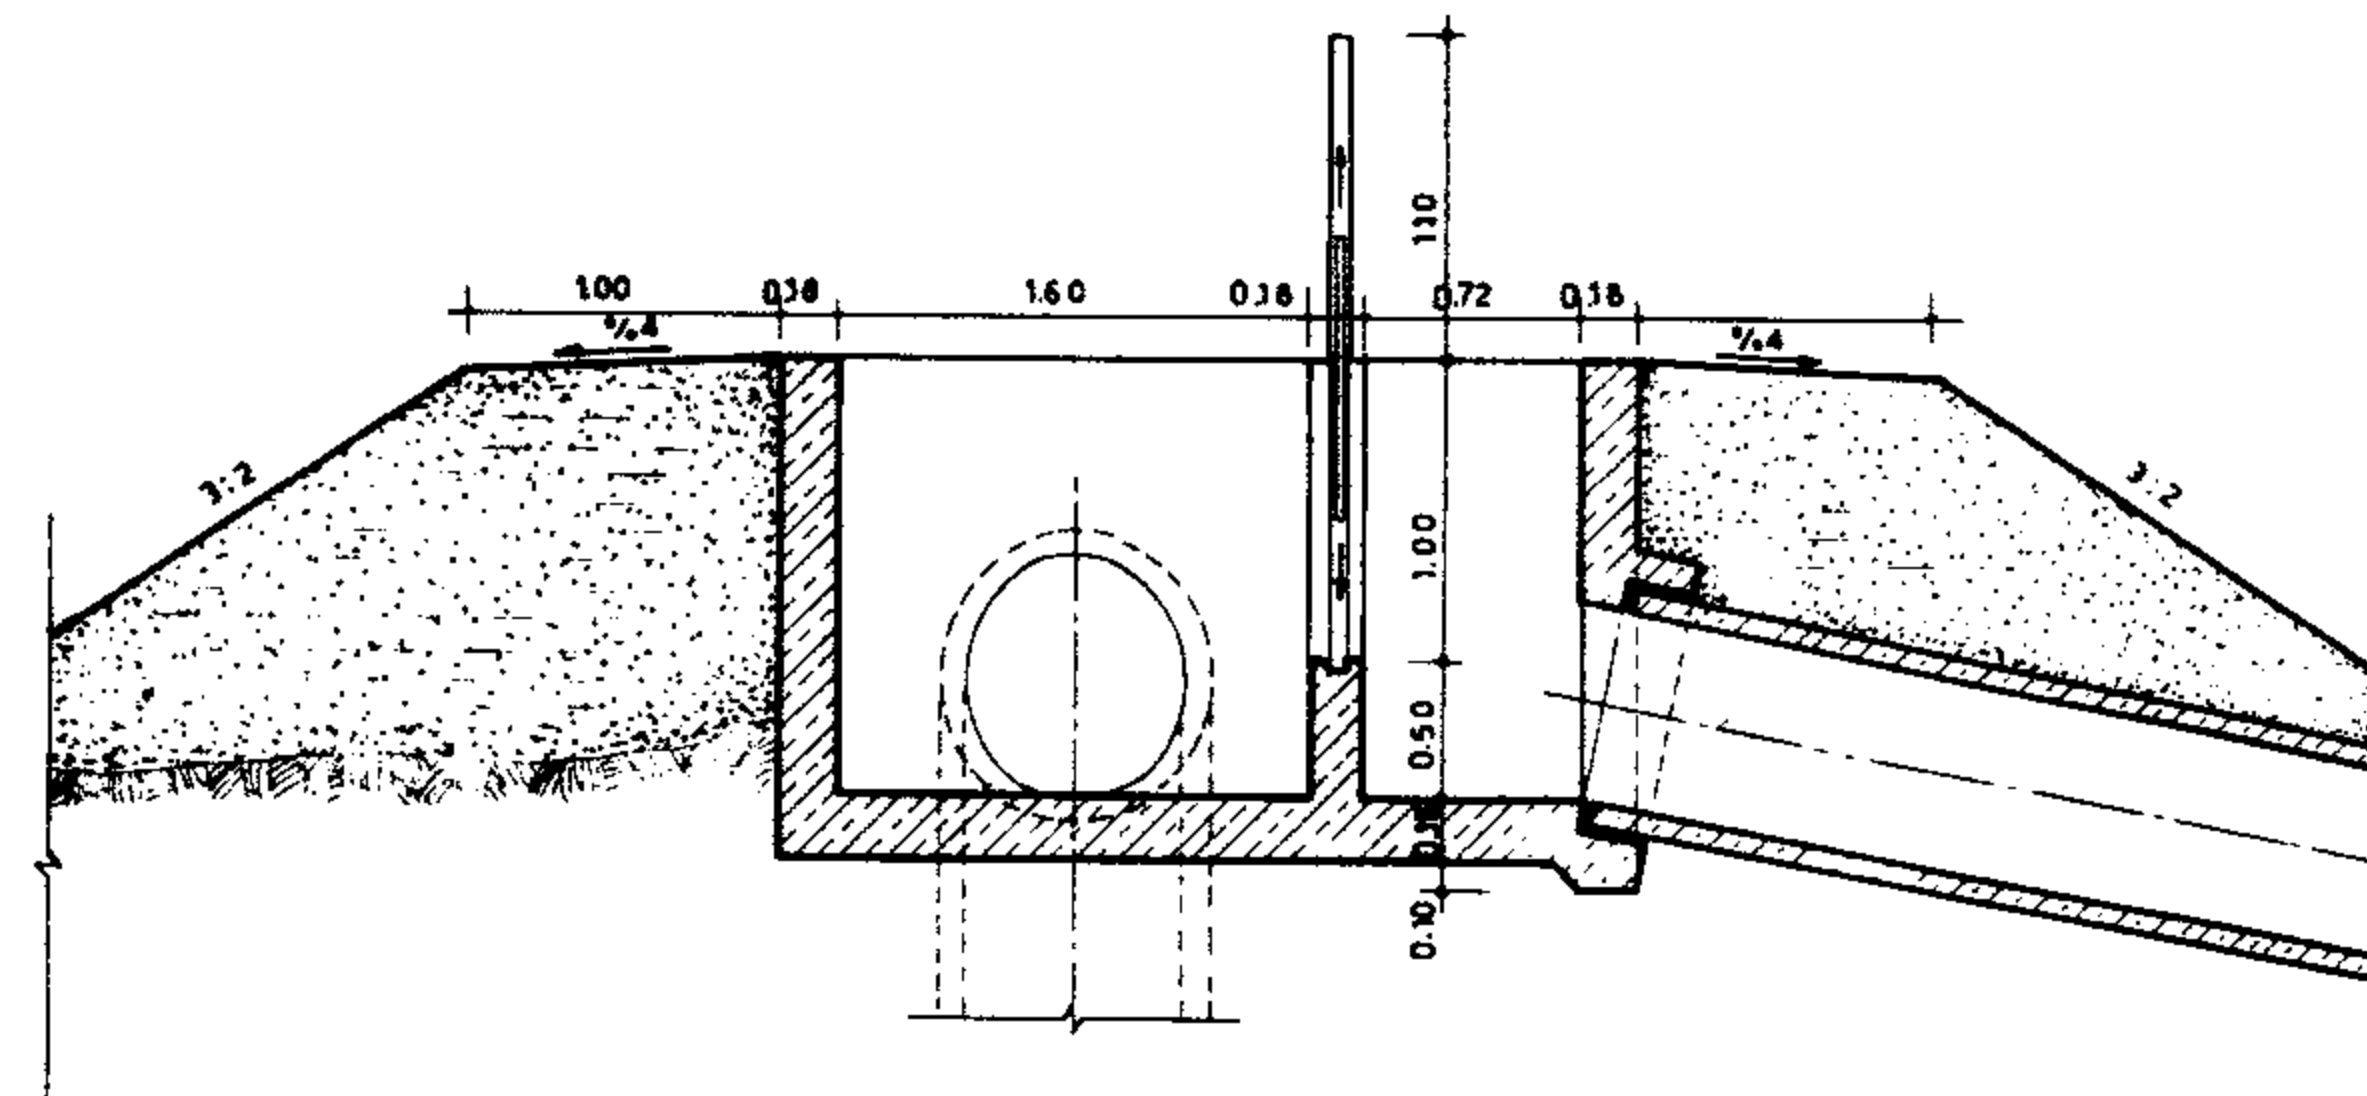

SECTION B-B
Scale 1:40

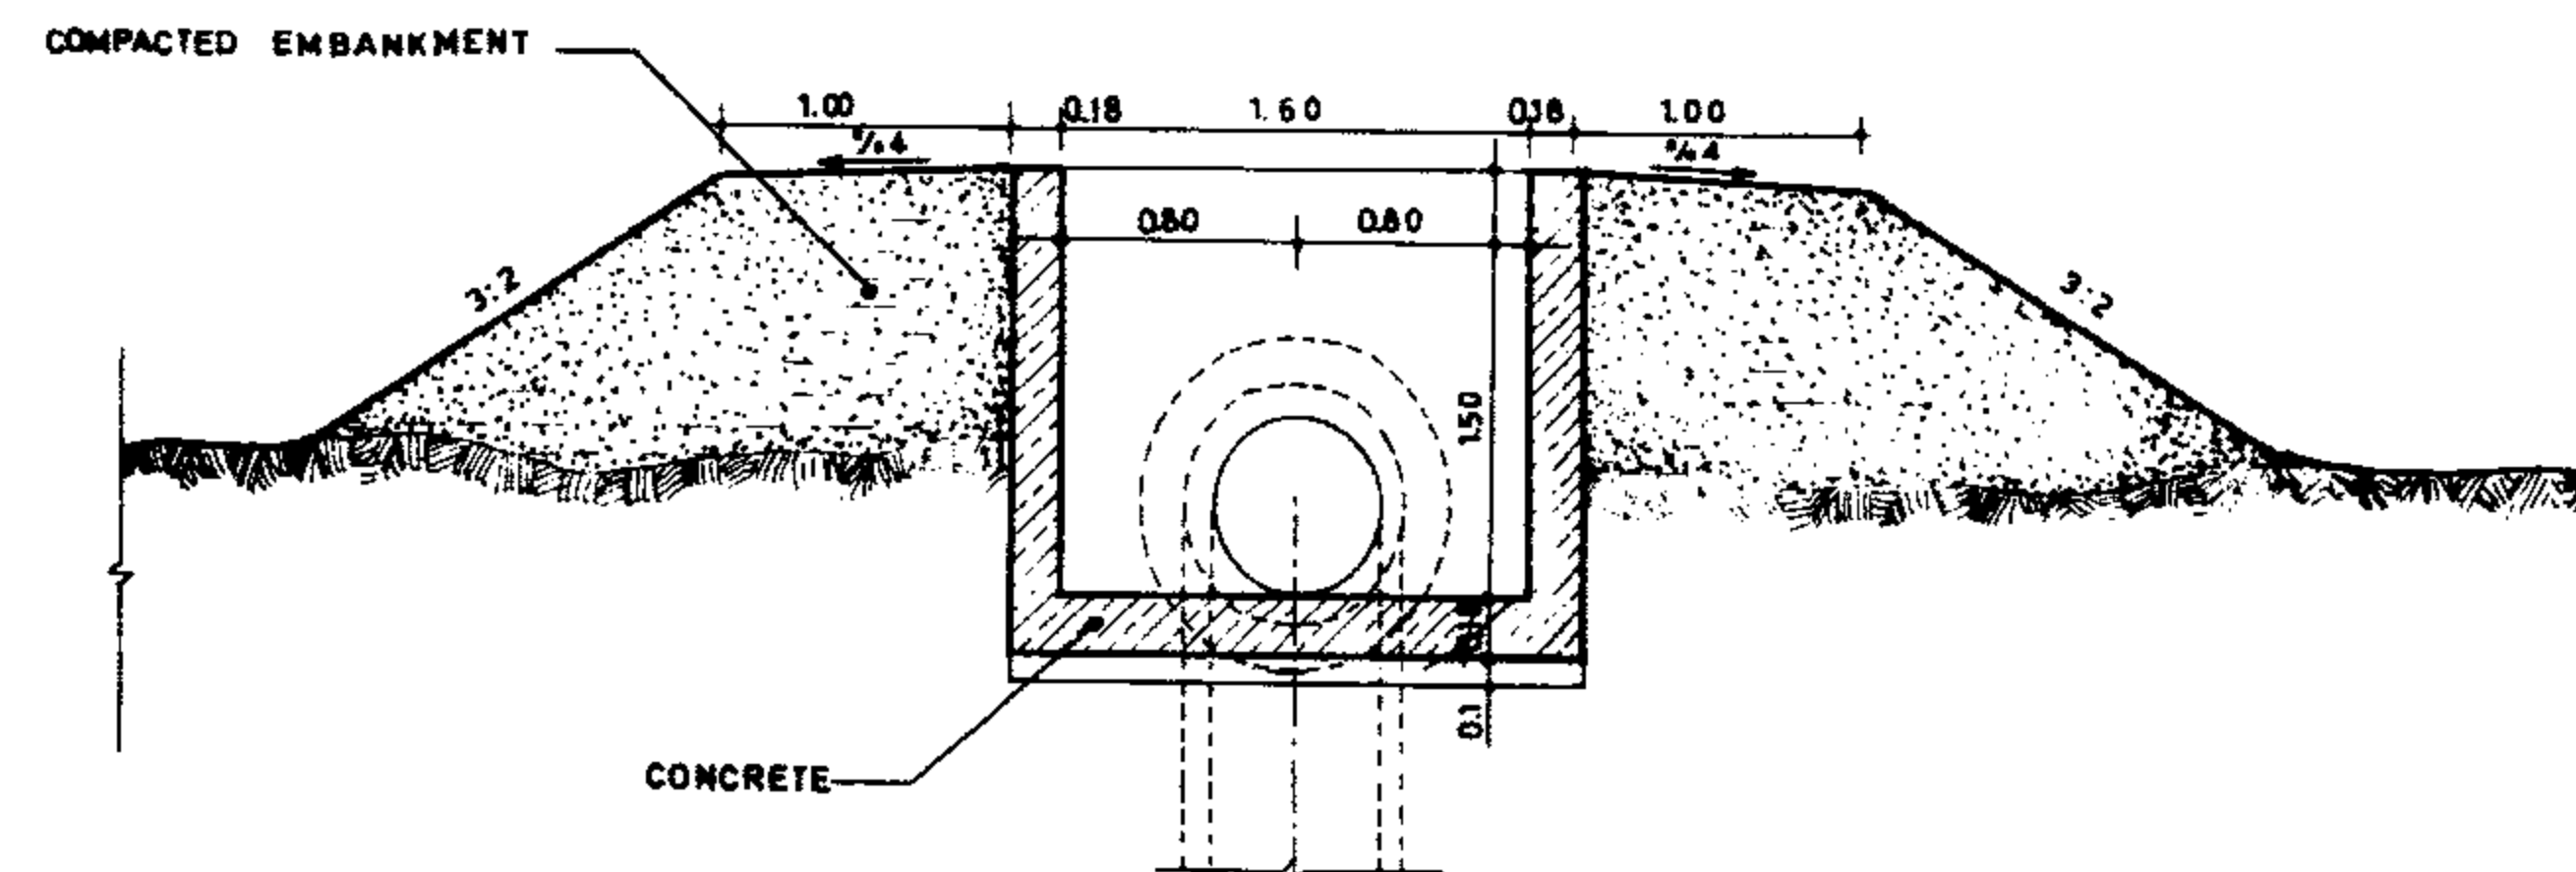

SECTION C-C
Scale 1:40

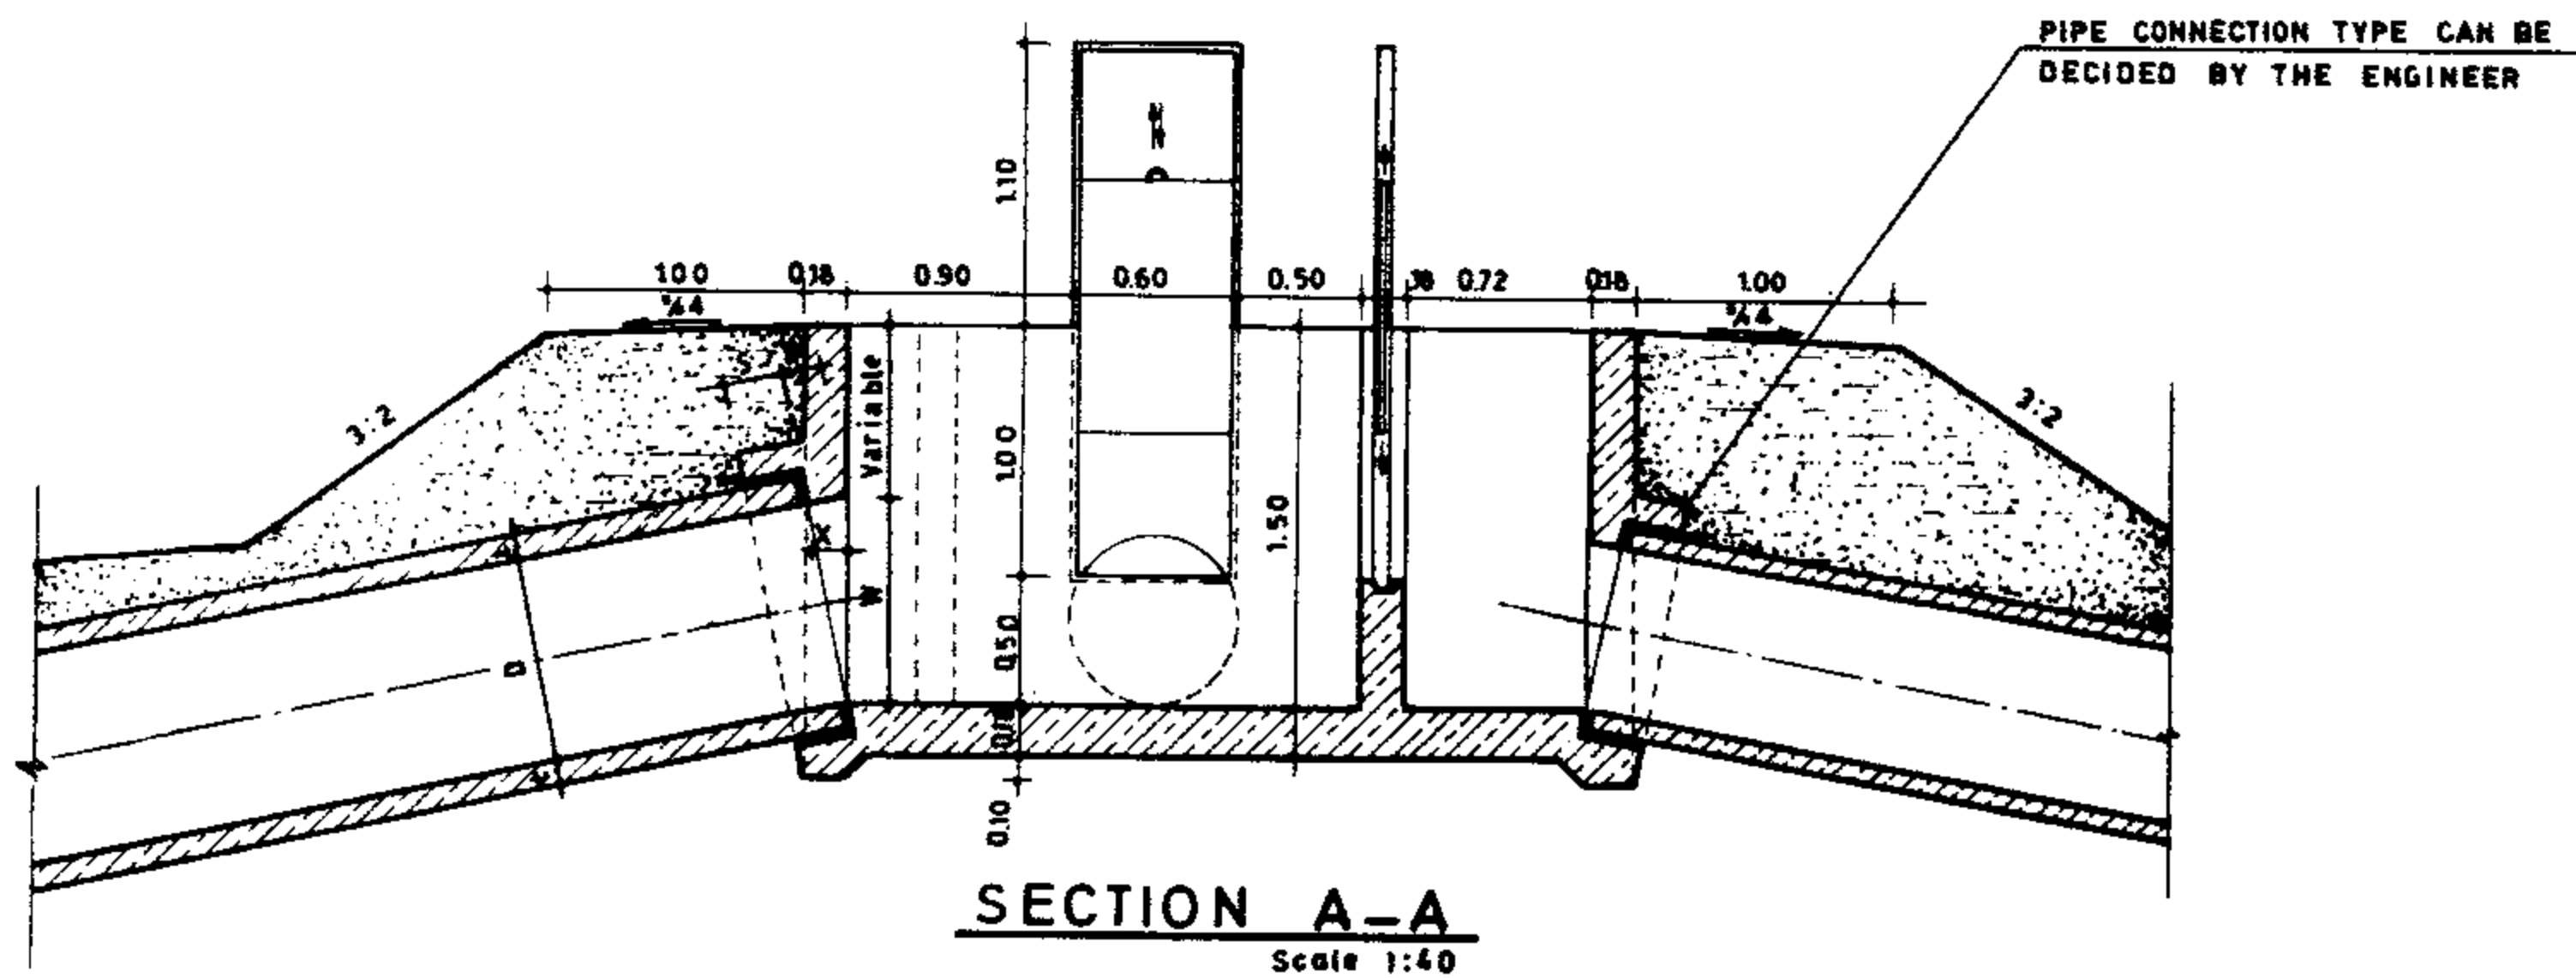

SECTION A-A
Scale 1:40

NOTE:

See notes on dwg. No 12/7/1/01

REFERENCE DWGS

- 1-FOR REINFORCEMENT SEE DWG. No. 12/7/3/02
- 2-FOR DETAIL AND DIMENSION OF PIPE CONNECTION SEE DWGS.No. 17/1/1/01 TO 17/1/1/03
- 3-FOR GENERAL NOTES SEE DWGS.No. 17/1/1/01 TO 2/2/1/03

Scale: 1:40

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG. No 12/7/1/02

Approved:

Sheet No 2 of 18 Rev.No






DIVISION BOX (TYPE 2)

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

R/Bar kg.	Conc. m ³	Form. m ²
330.00	5.31	41.60

SLIDE GATE	0.40x0.80	0.50x0.80	0.60x0.80	0.70x0.80	0.80x0.80
Q ^m (l/s)	320	400	480	560	640

* FOR V=1.00 m/s

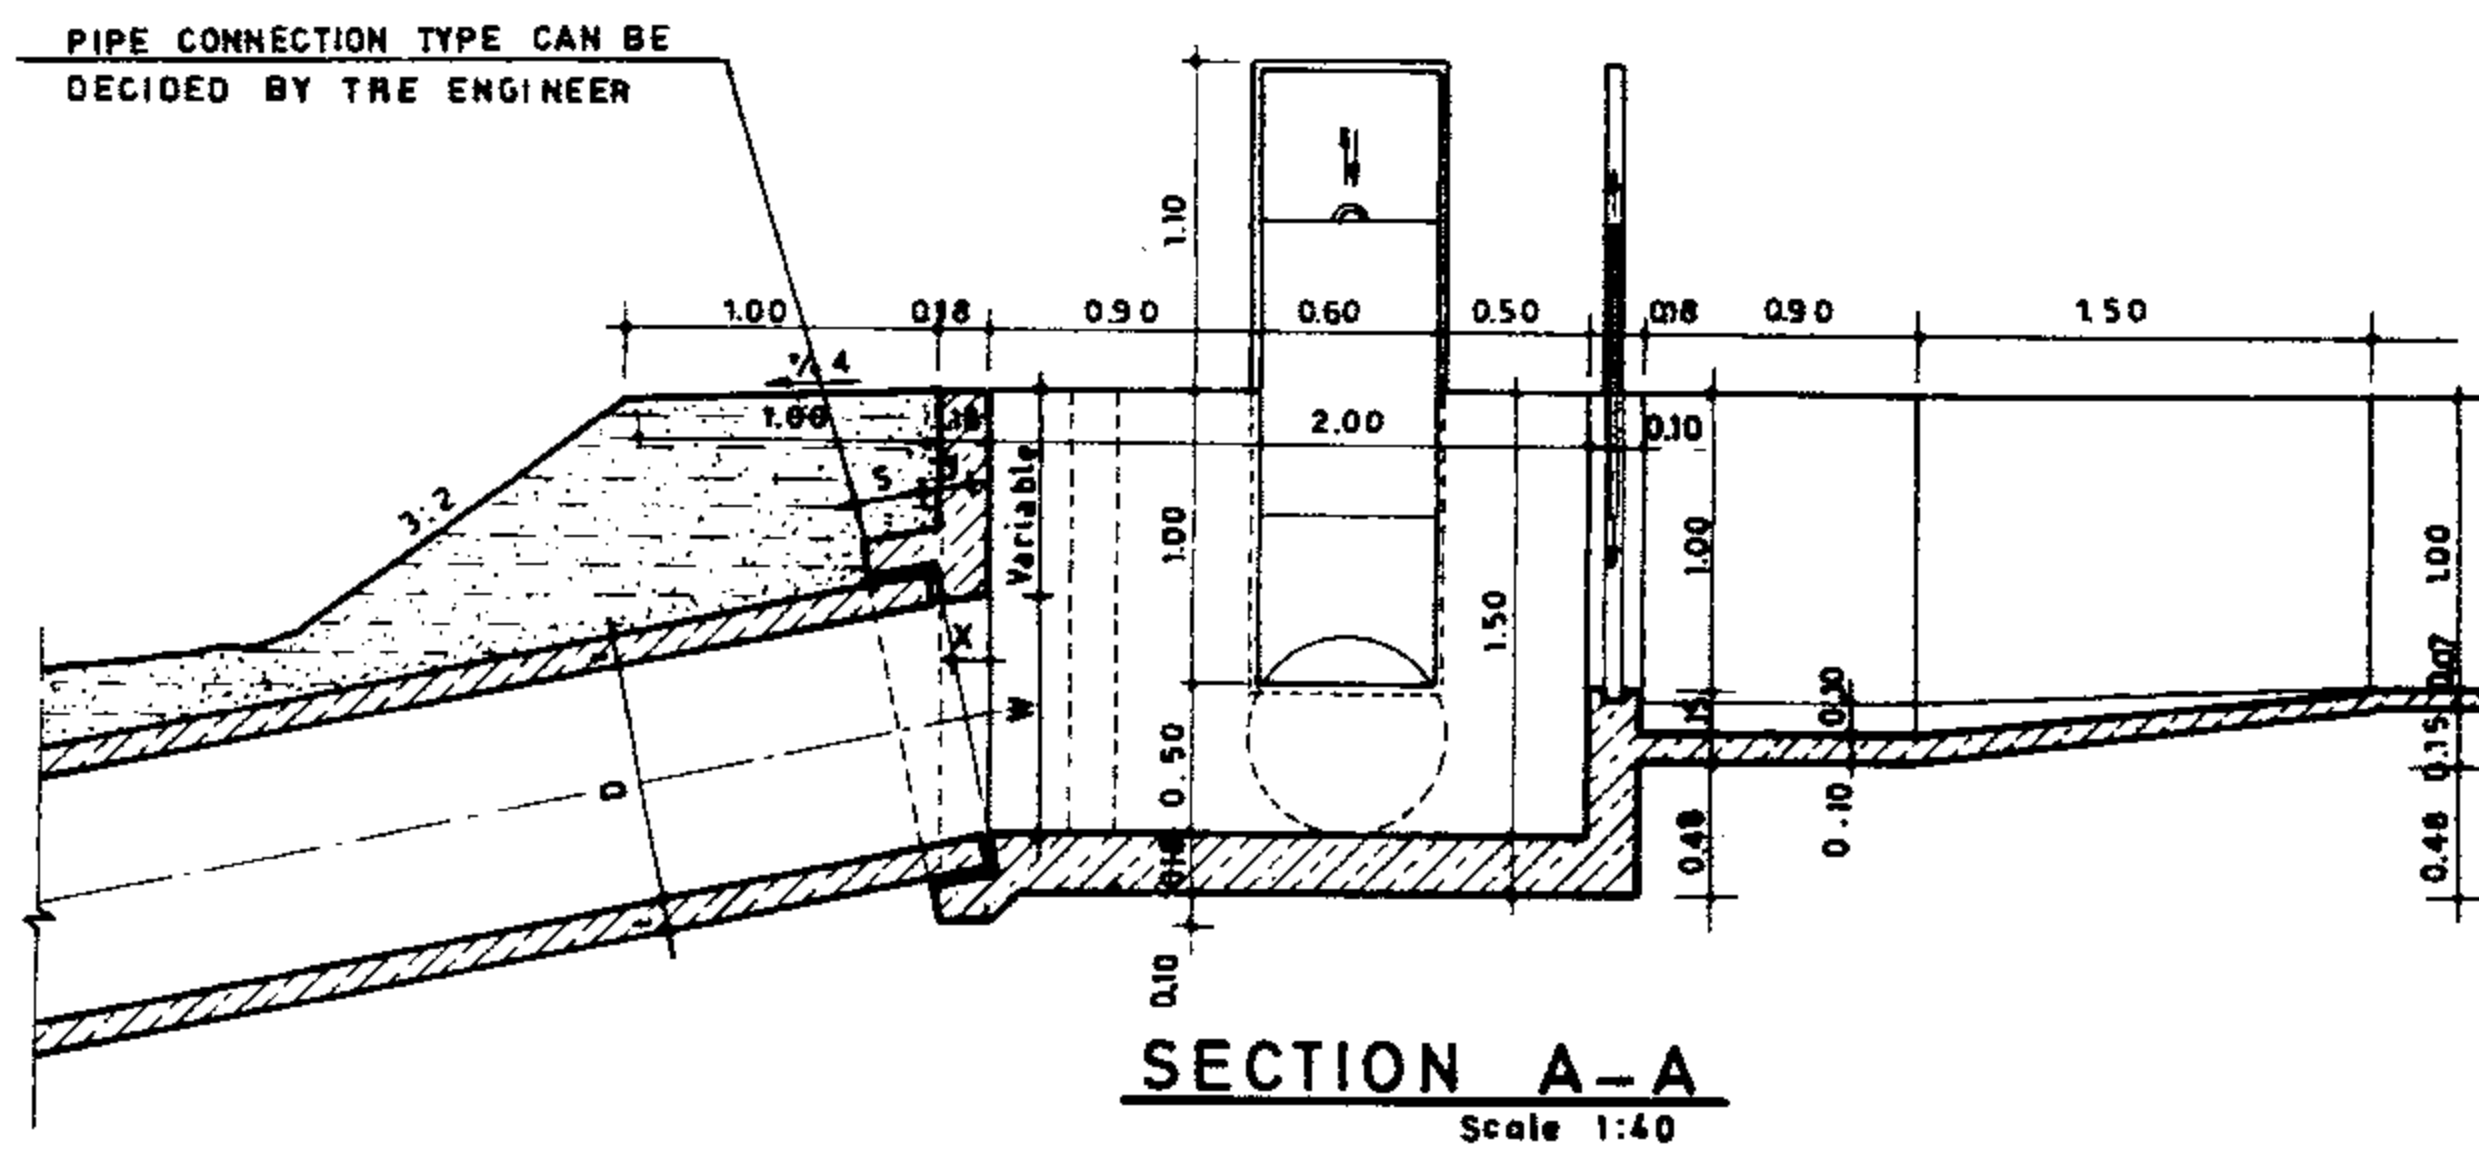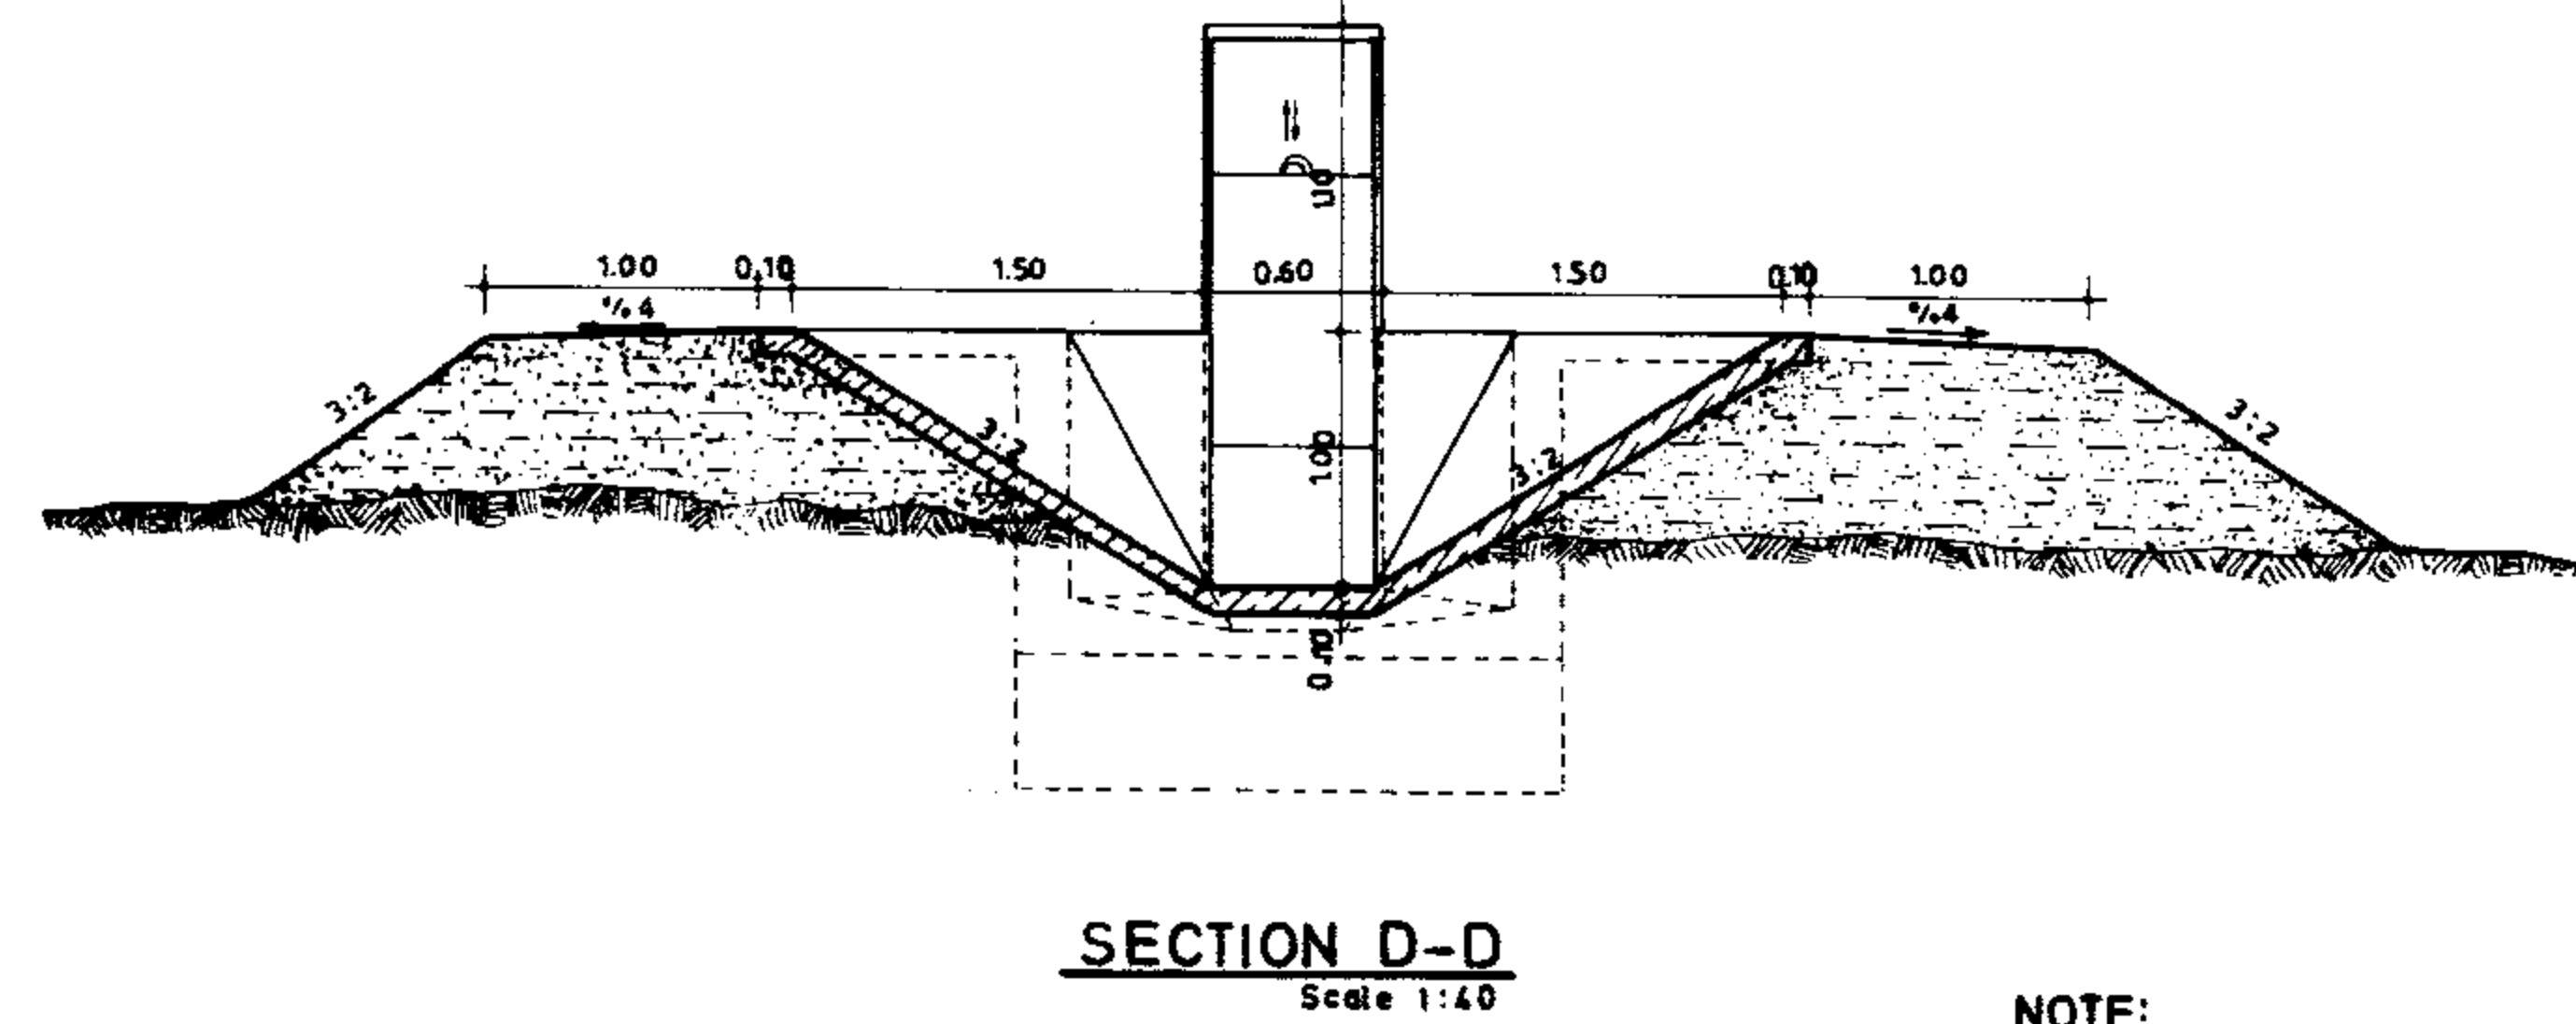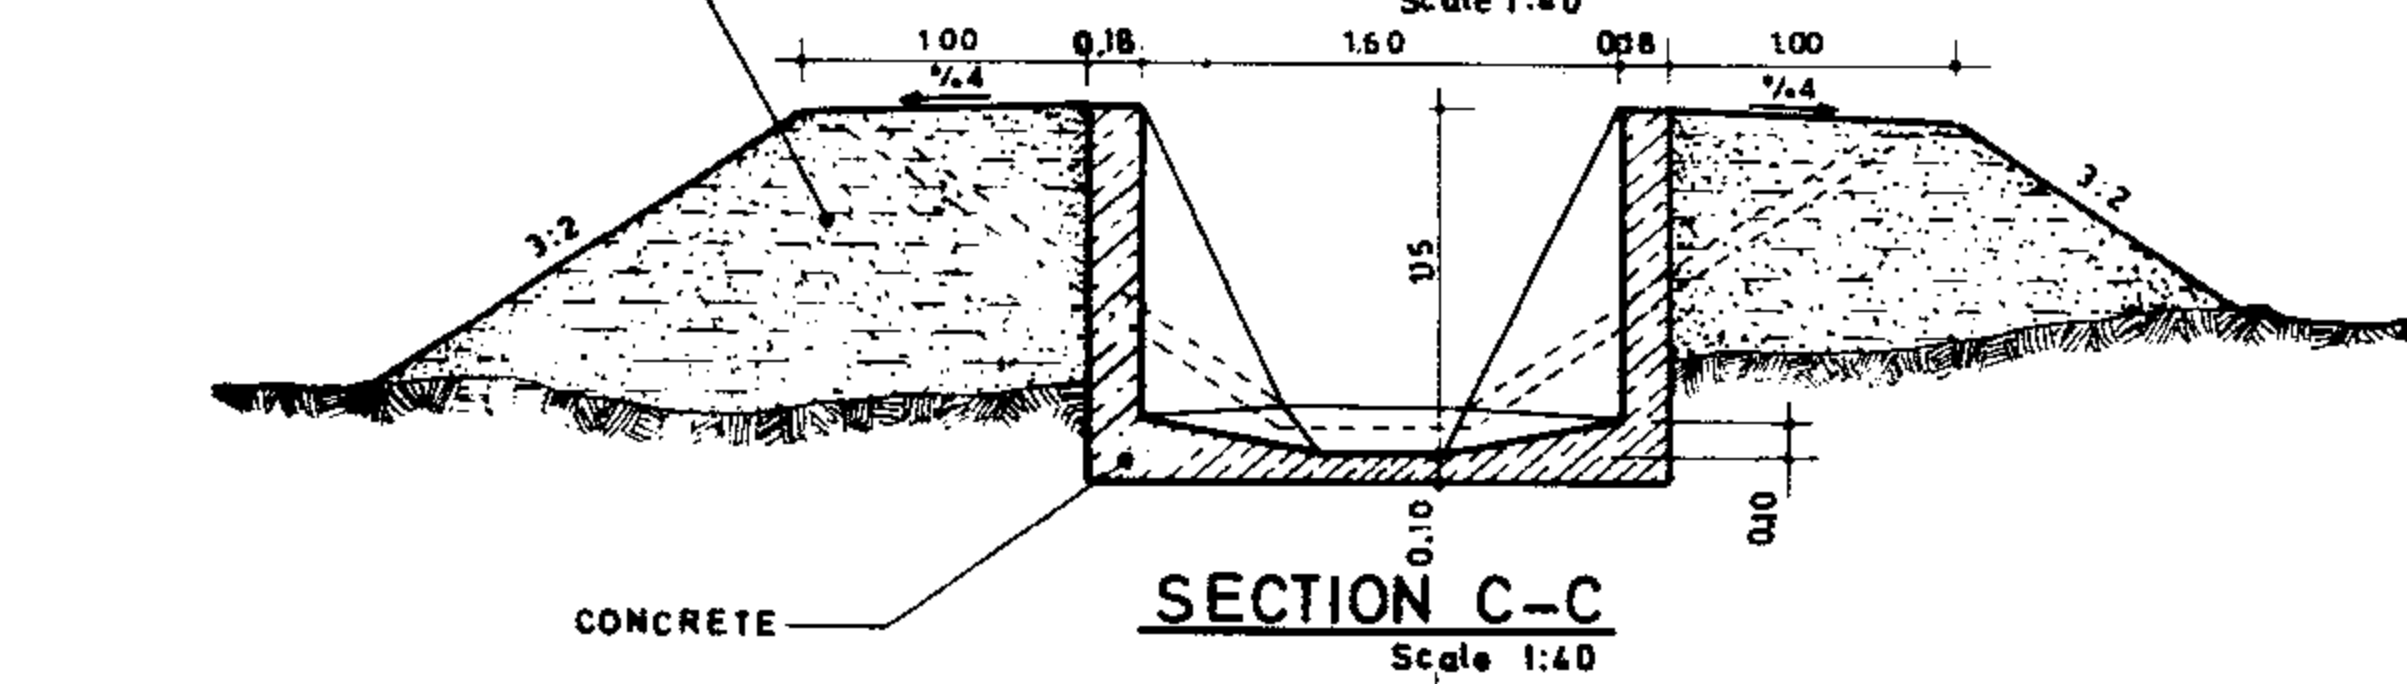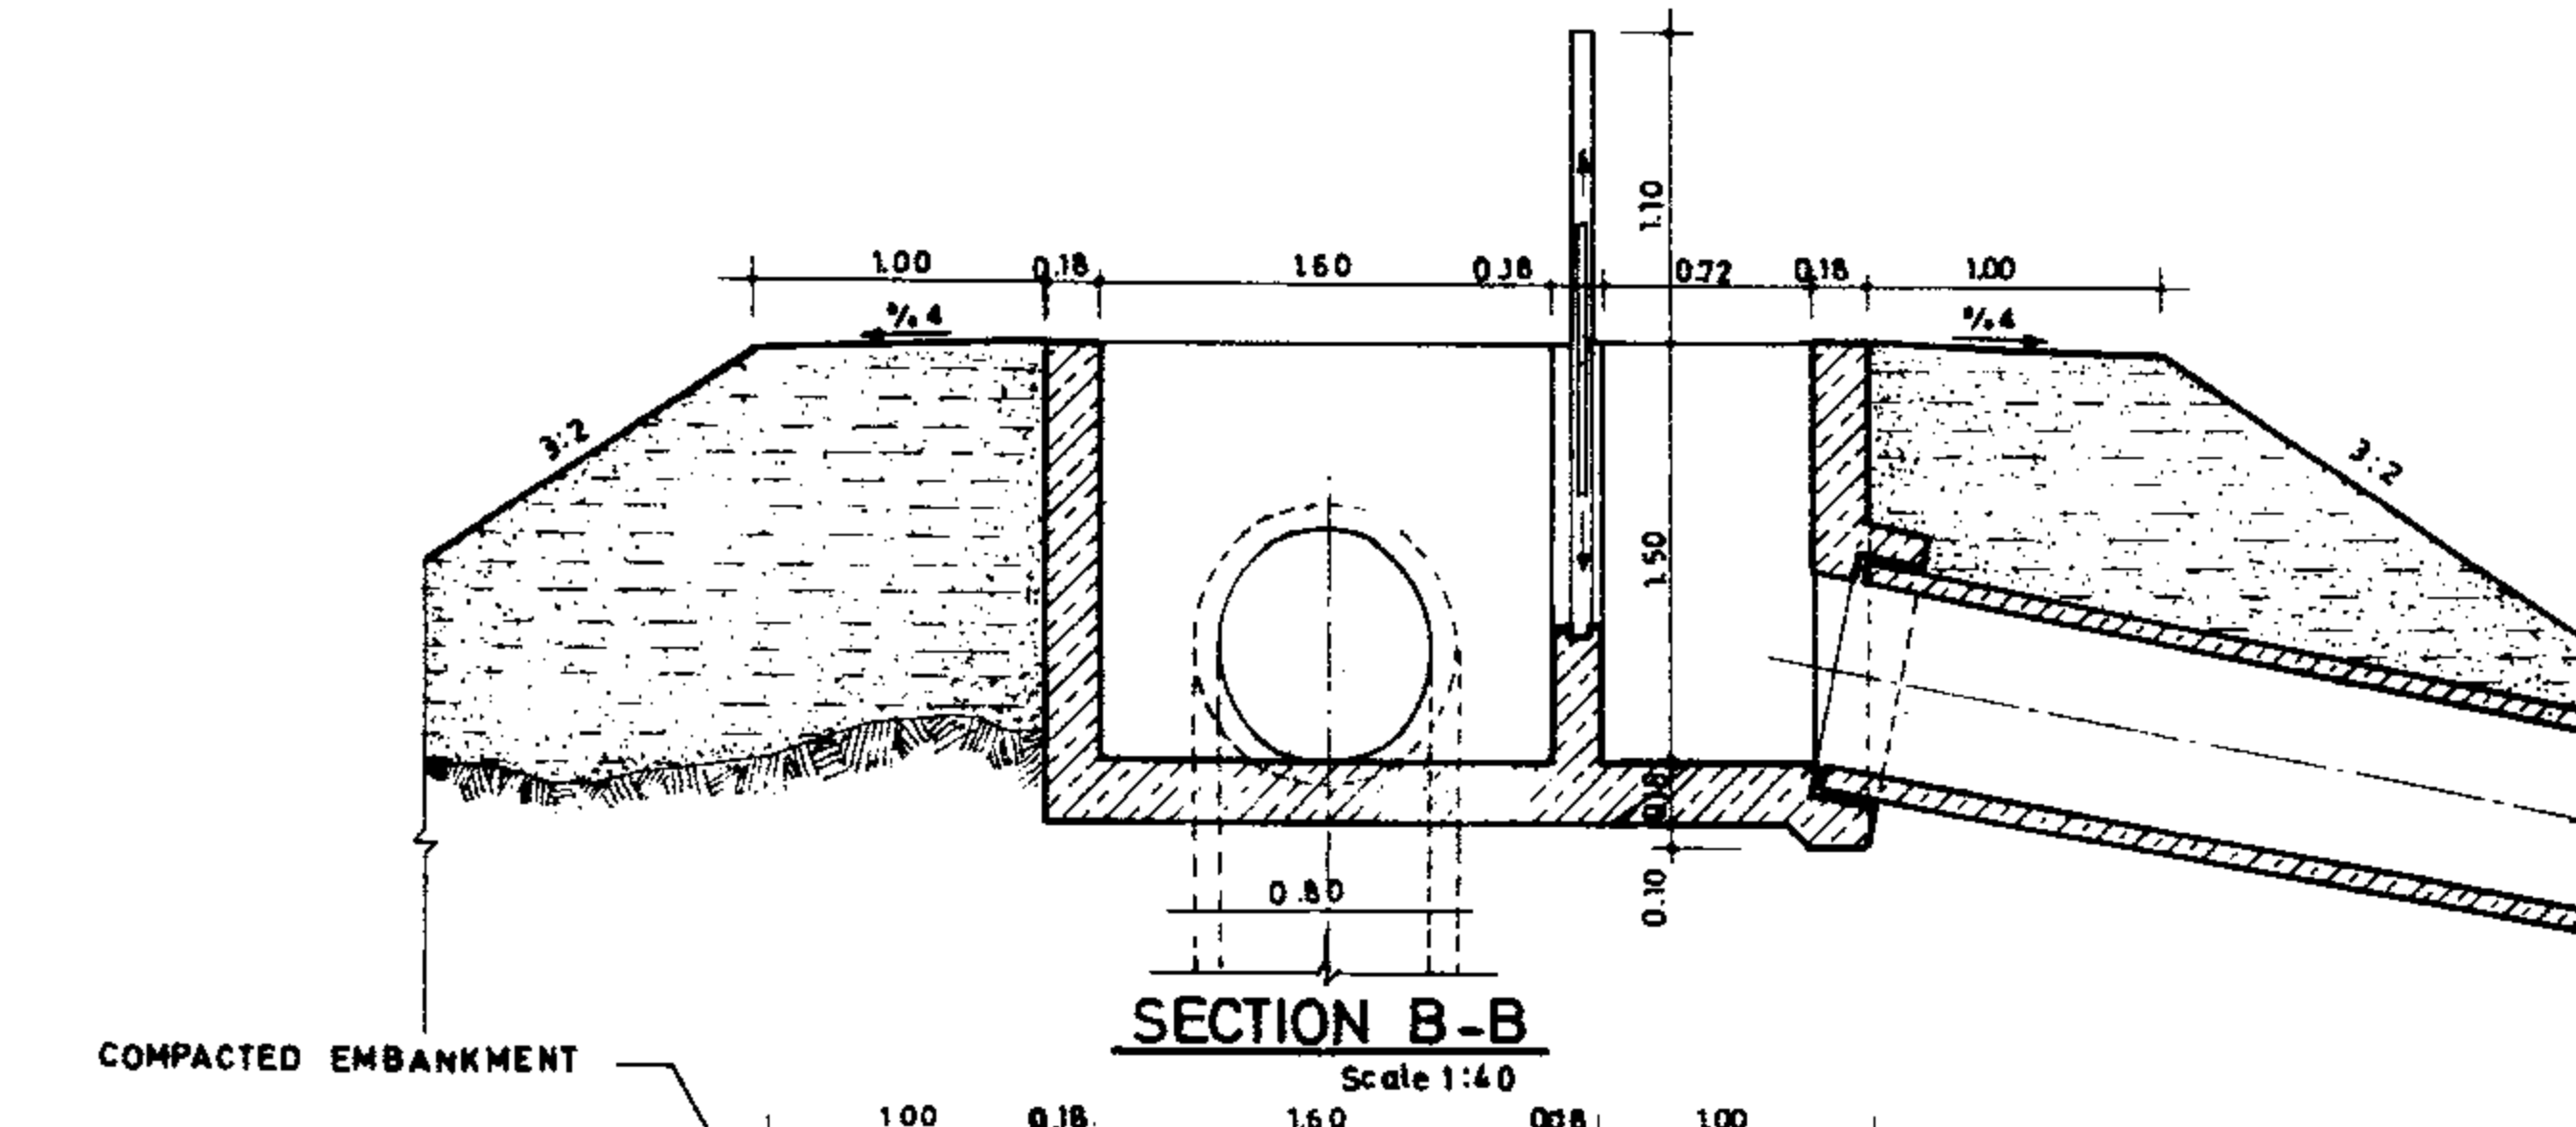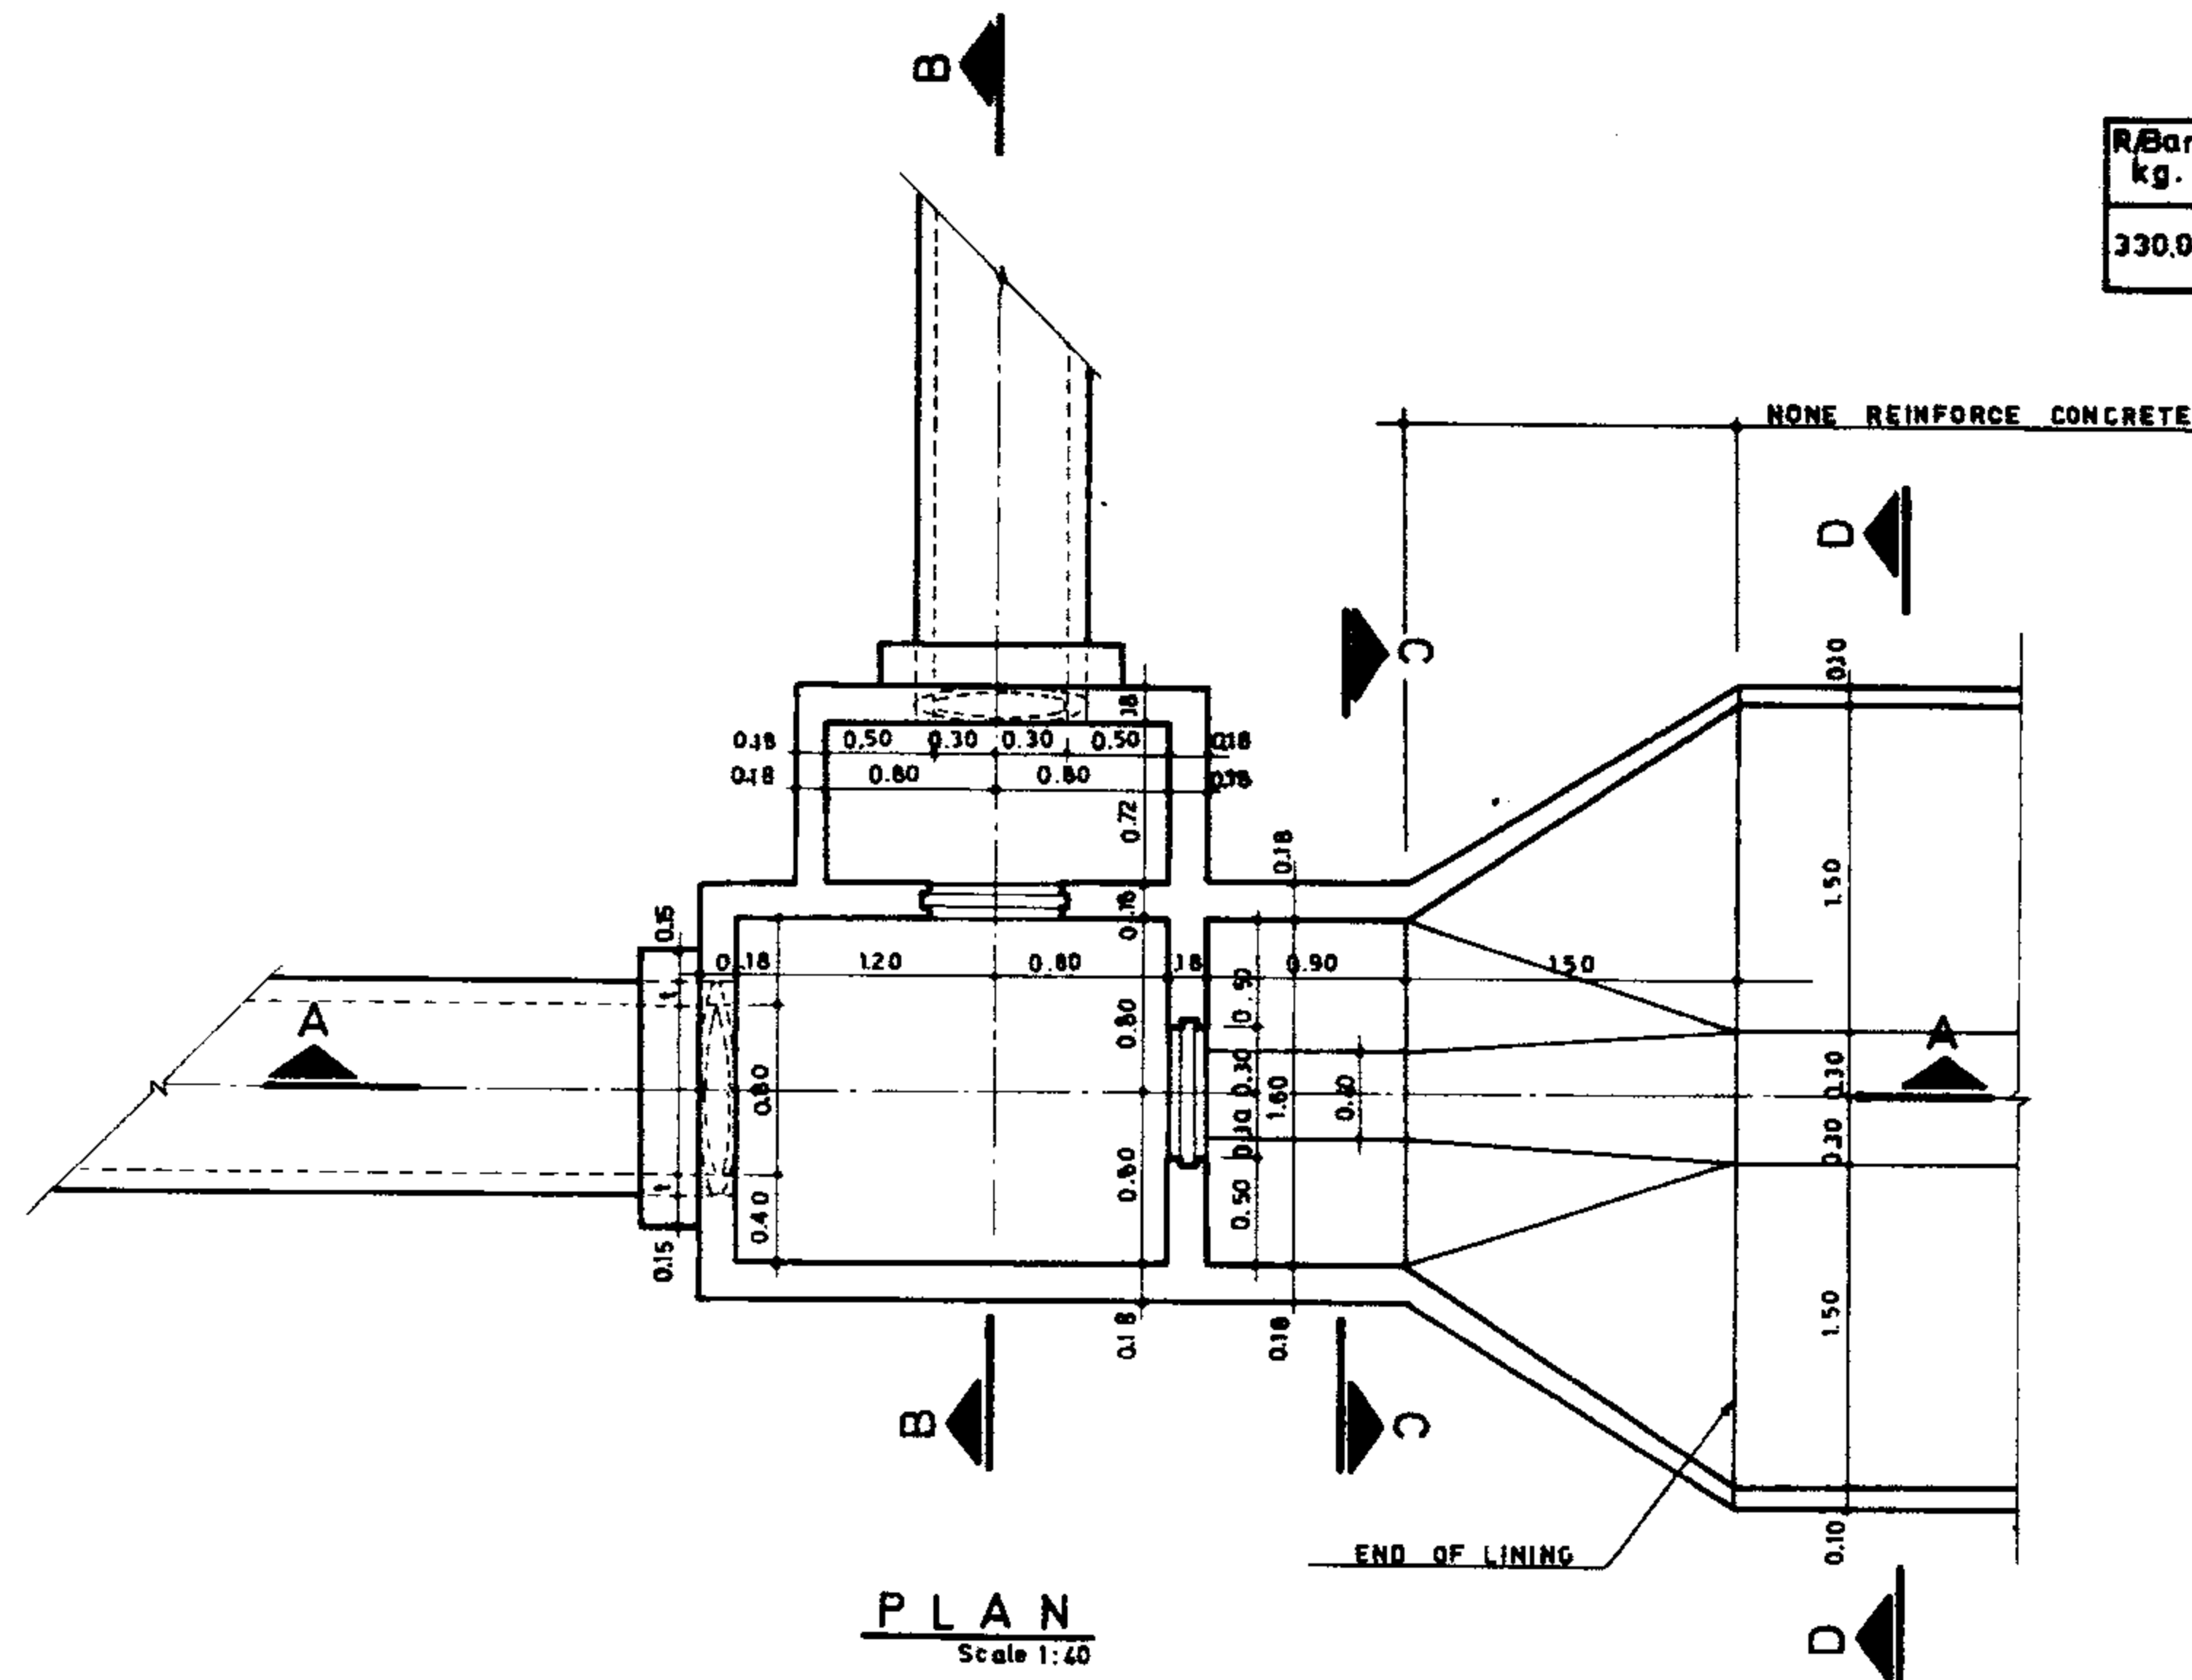

PIPE CONNECTION TYPE CAN BE DECIDED BY THE ENGINEER

NOTE:

See notes on dwg. No 12/7/1/01

REFERENCE DWGS.

- 1-FOR REINFORCEMENT SEE DWG. No. 17/3/03
- 2-FOR DETAIL AND DIMENSION OF PIPE CONNECTION SEE DWGS.No. 17/1/1/01 TO 17/1/1/03
- 3-FOR GENERAL NOTES SEE DWGS.No. 20/2/1/01 TO 20/2/1/03

Scale: 1:40

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG. No 12/7/1/03


Approved:

Sheet No 3 of 18

Rev.No

DIVISION BOX (TYPE 3)


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU

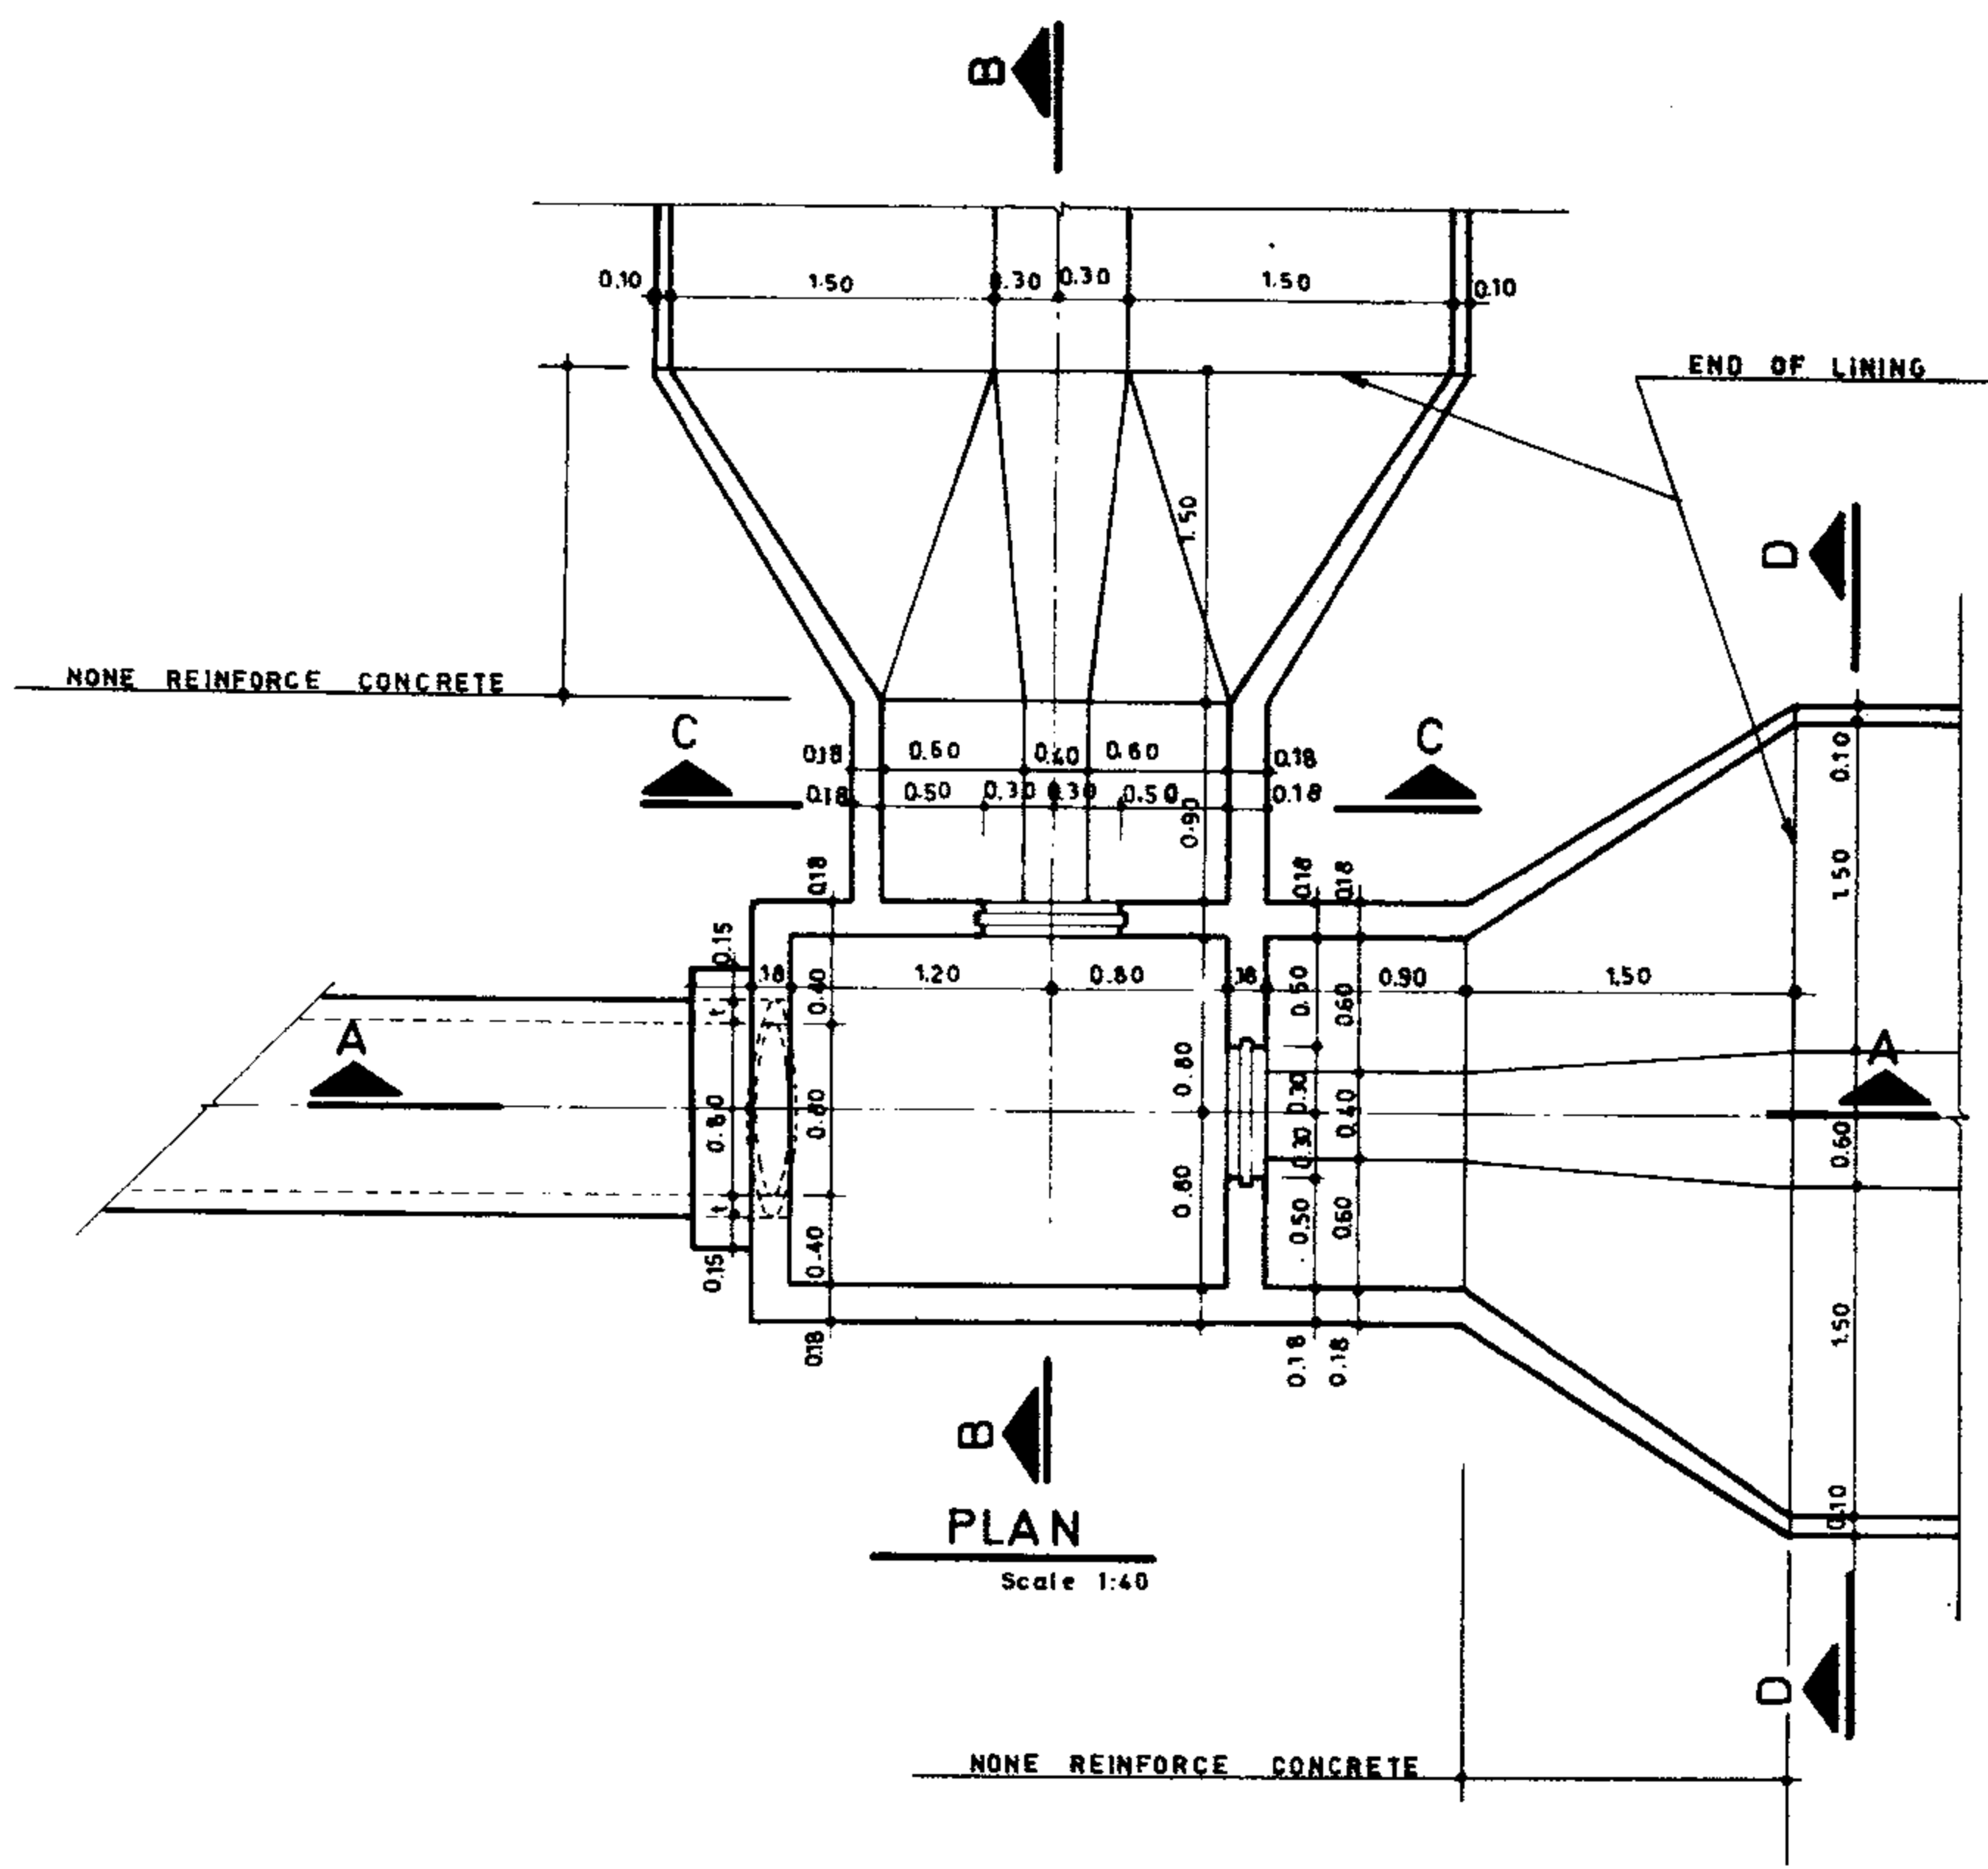


R/Bar. kg.	Conc. m ³	Form. m ²
268.43	4.54	34.52

SLIDE GATE	0.40×0.80	0.50×0.80	0.60×0.80	0.70×0.80	0.80×0.80
Q ^m (l/s)	320	400	480	560	640


* FOR V=1.00 m/s

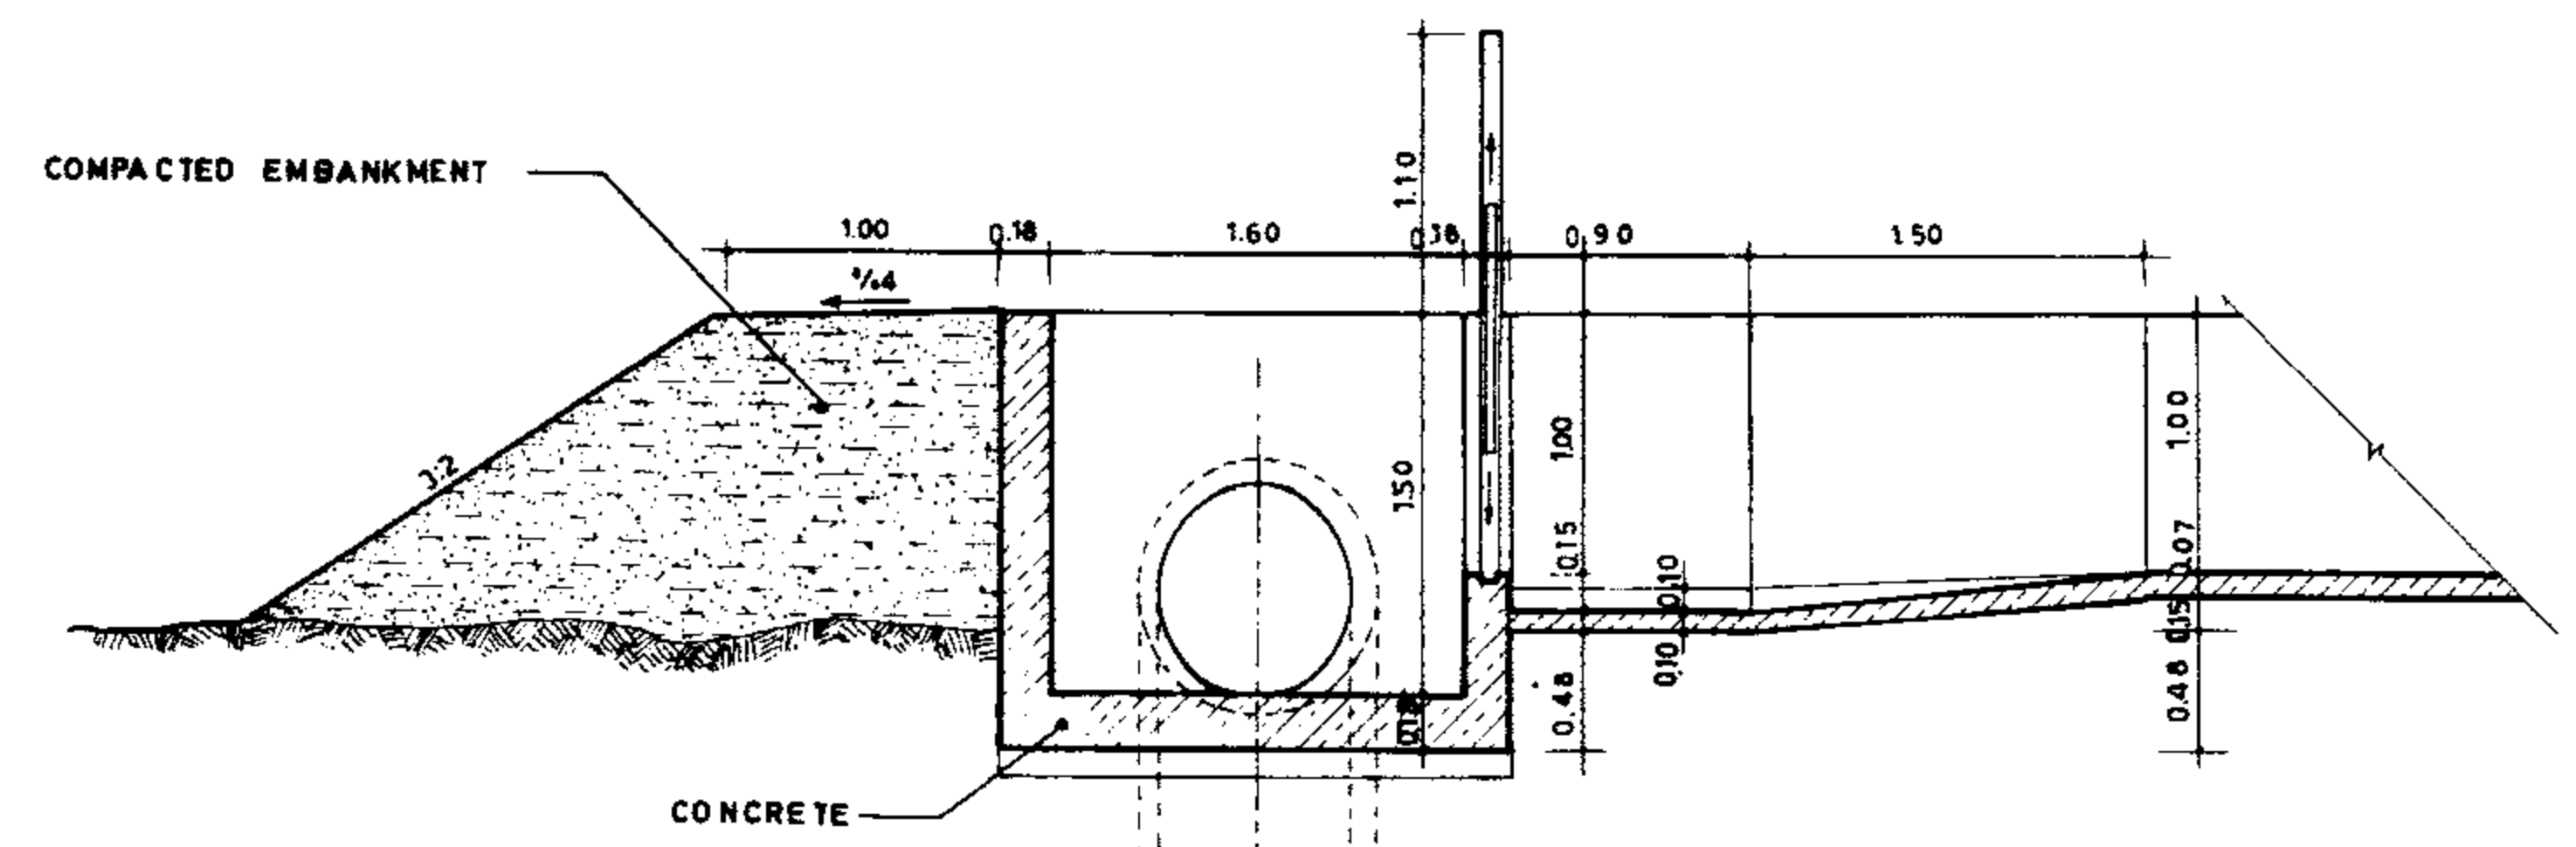

SECTION B_B
Scale 1:40

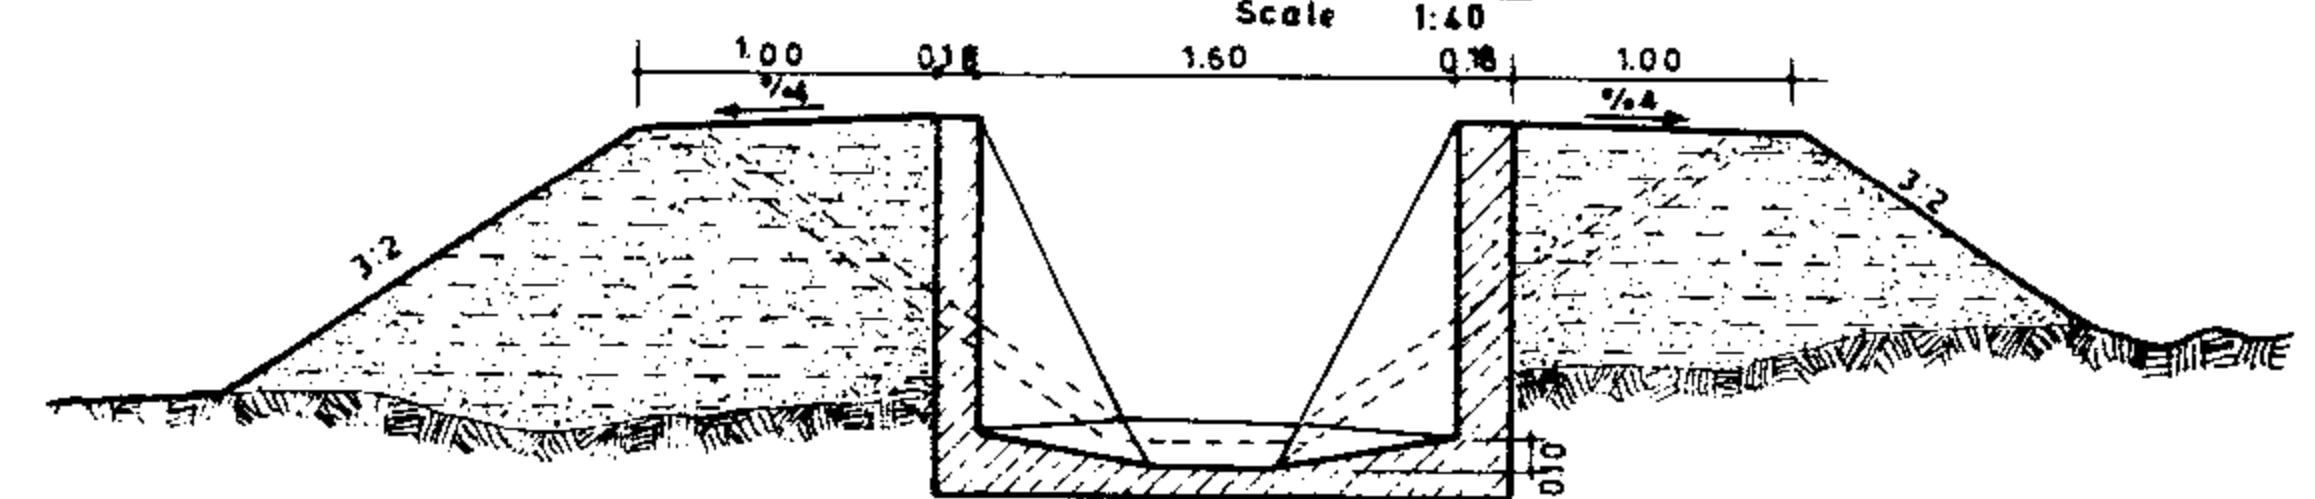


SECTION C_C
Scale 1:40

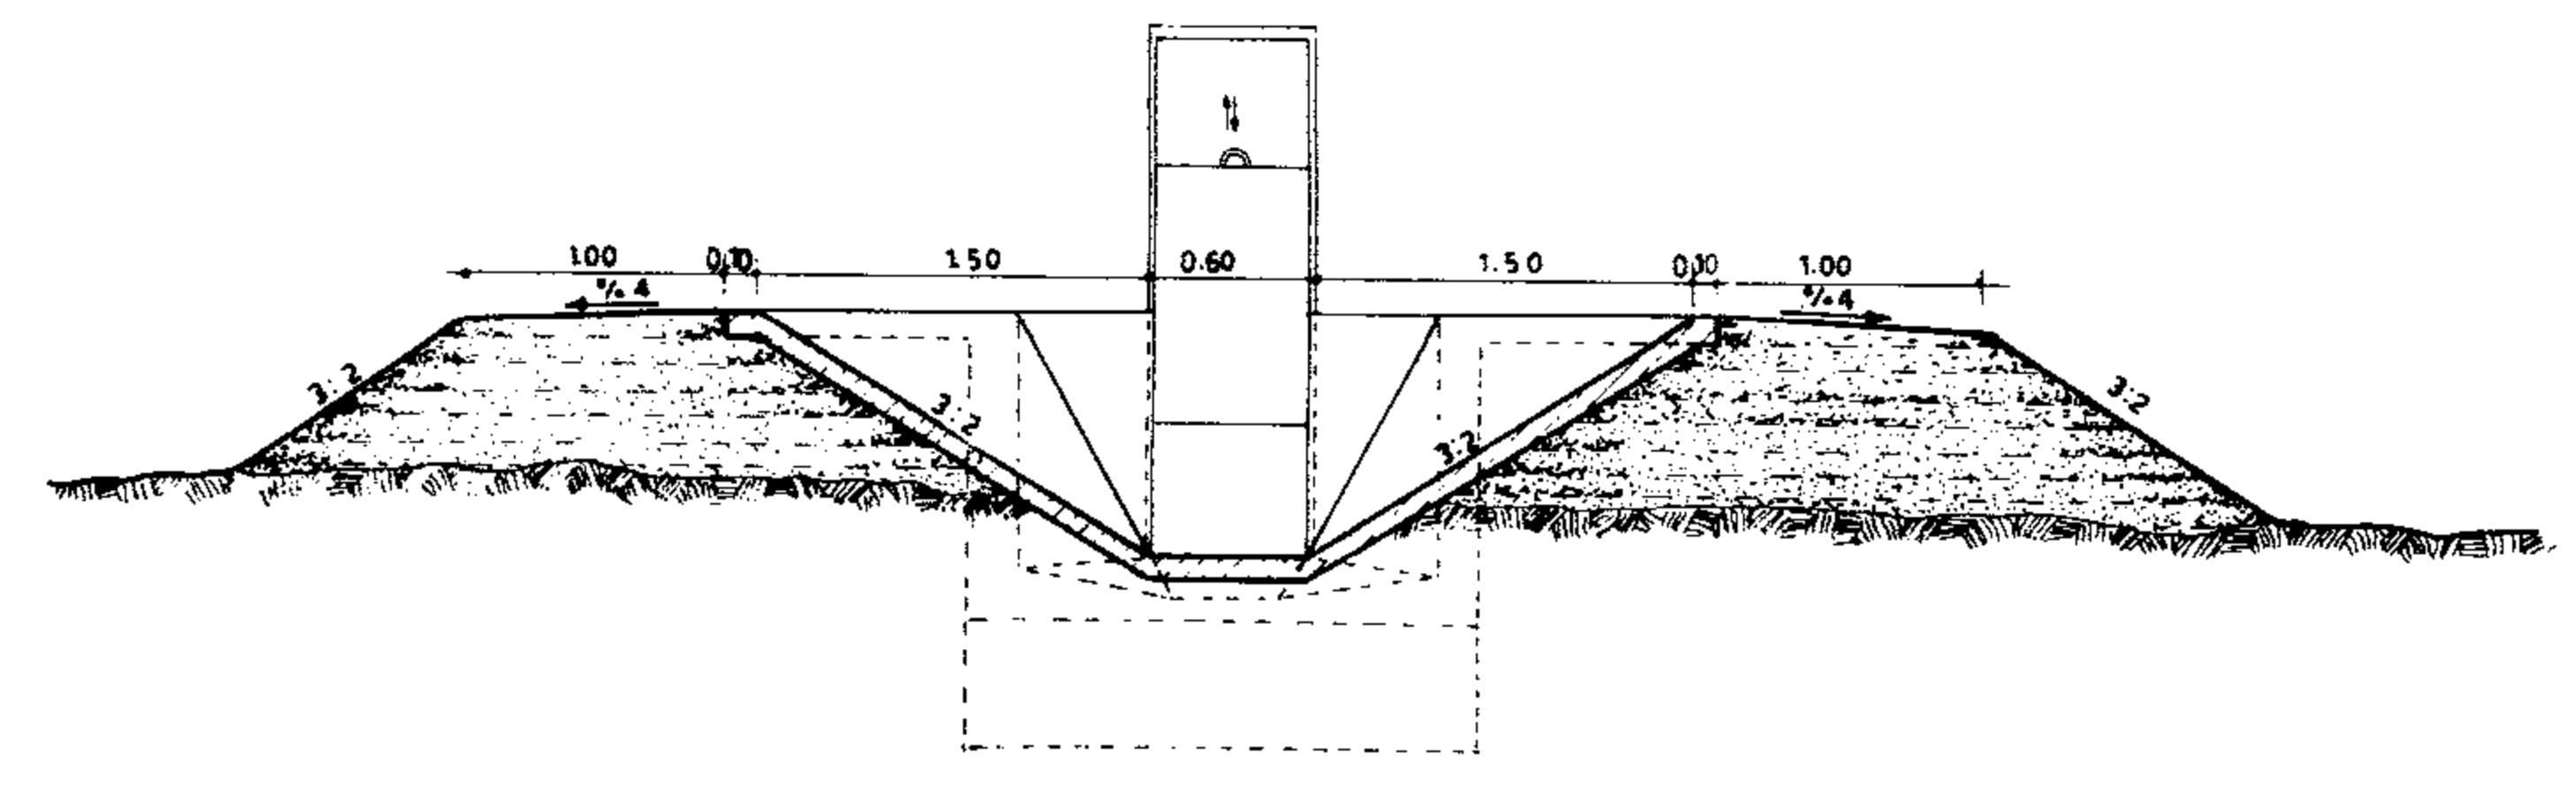

SECTION D_D
Scale 1:40

NOTE:
See notes on dwg. No 12/7/1/01

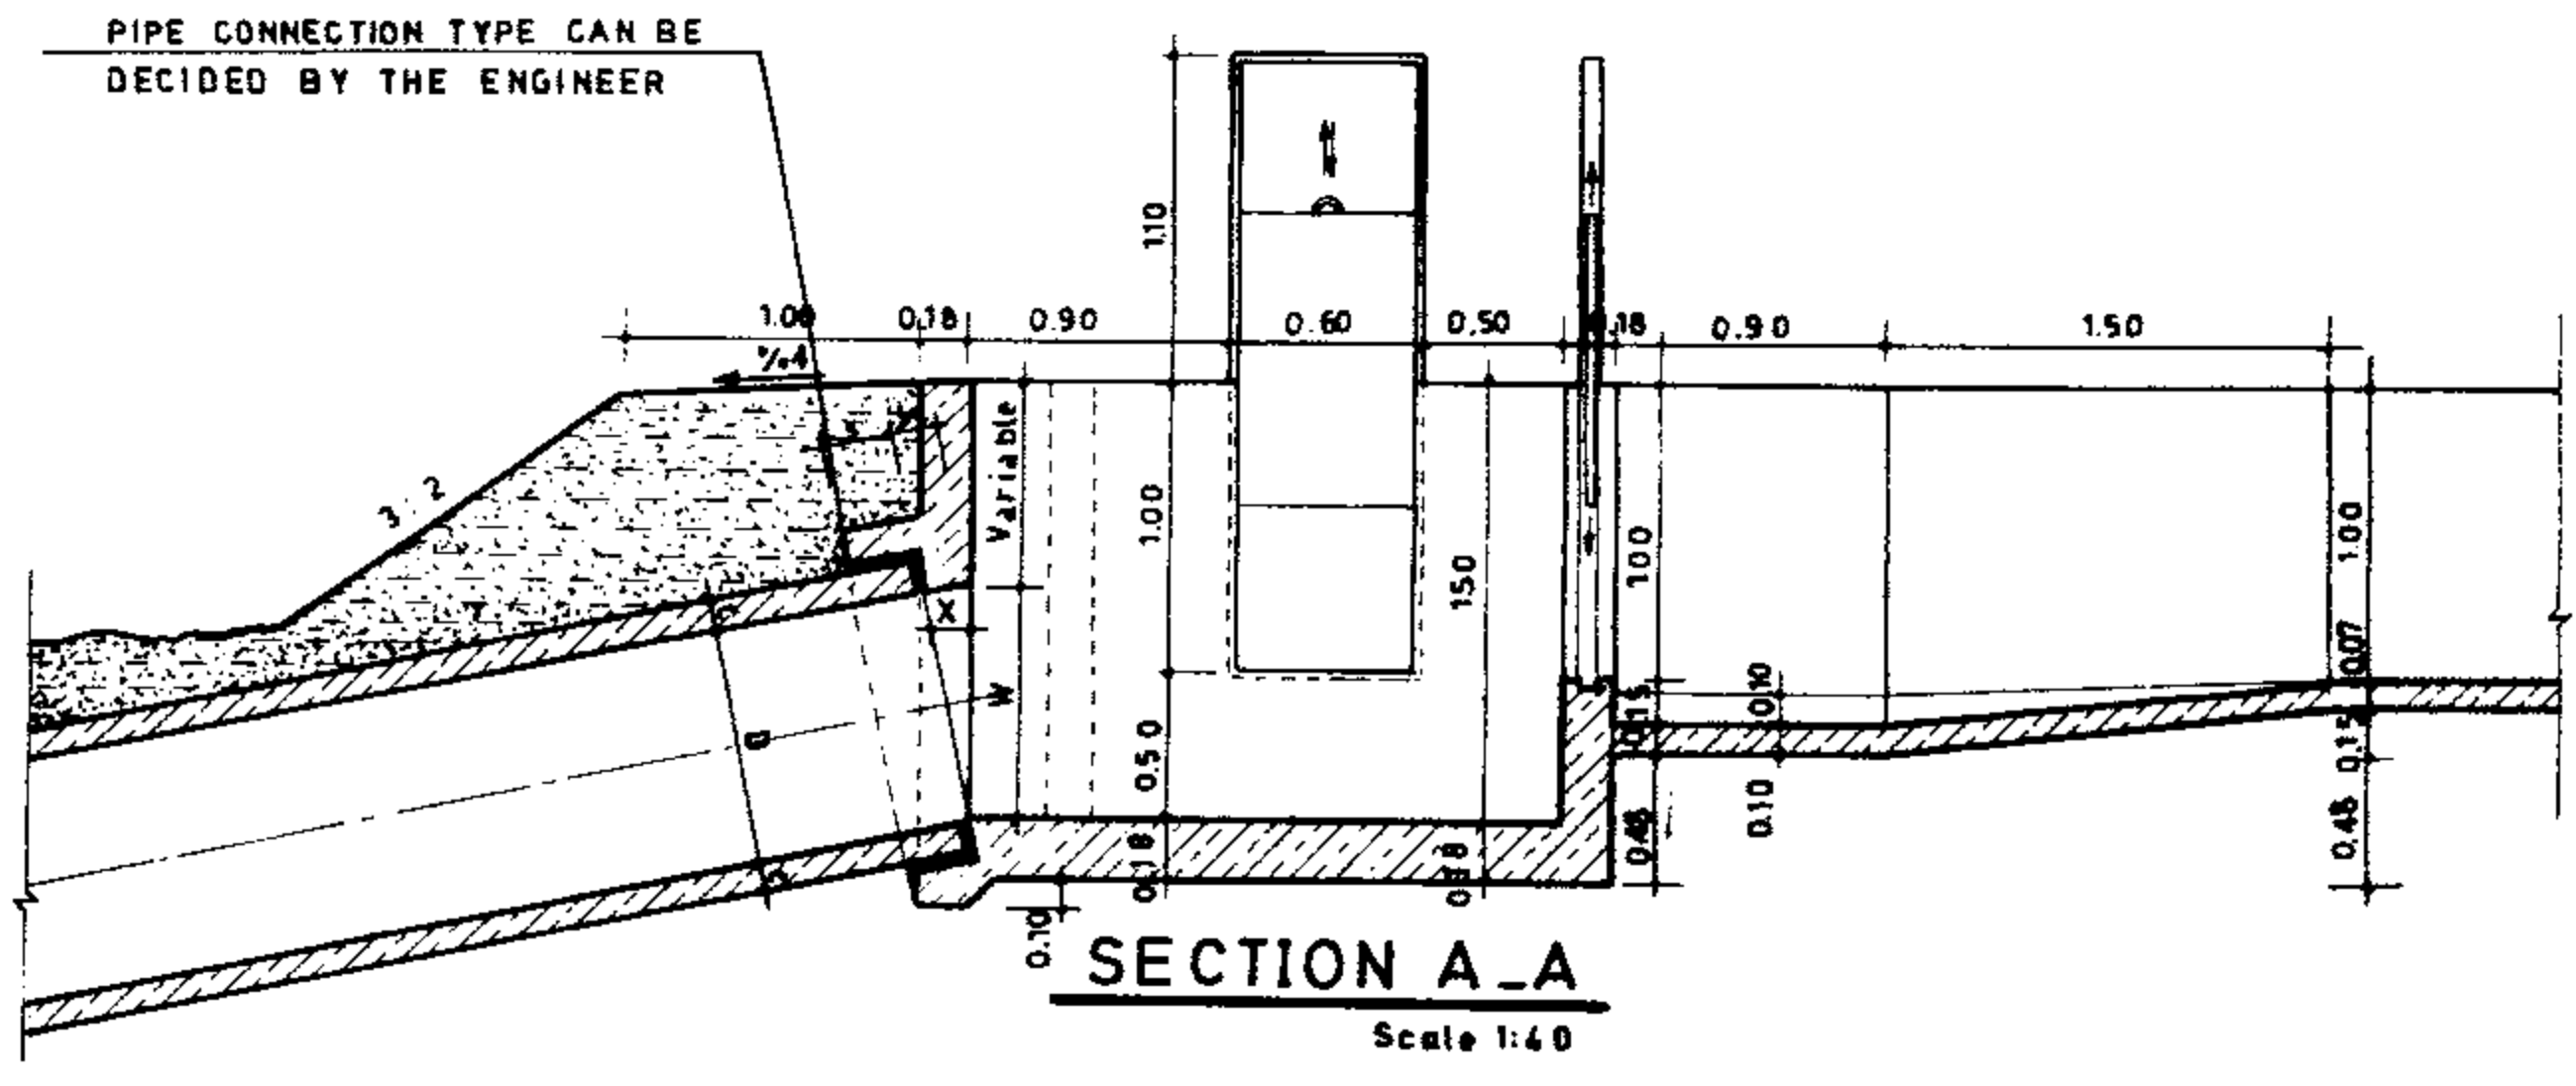

SECTION A_A
Scale 1:40

REFERENCE DWGS
 1- FOR REINFORCEMENT SEE DWG. No 17/1/1/04
 2- FOR DETAIL AND DIMENSION OF PIPE CONNECTION SEE DWGS. No 17/1/1/01 TO 17/1/1/03
 3- FOR GENERAL NOTES SEE DWGS. No 22/1/01 TO 20/2/1/03


Scale 1:40
 Date: DWG. No 12/7/1/04
 Approved: Sheet No 4 of 18 Rev No
 IRRIGATION & DRAINAGE STANDARDS
 DIVISION BOX (TYPE 4)

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU


R/Bar	Cm ²	Form
kg	m ²	m ²
499.69	3.84	29.07

SLIDE GATE	0.40×0.80	0.50×0.80	0.60×0.80	0.70×0.80	0.80×0.80
Q ² (l/s)	320	400	480	560	640

* FOR V=1.00 m/s

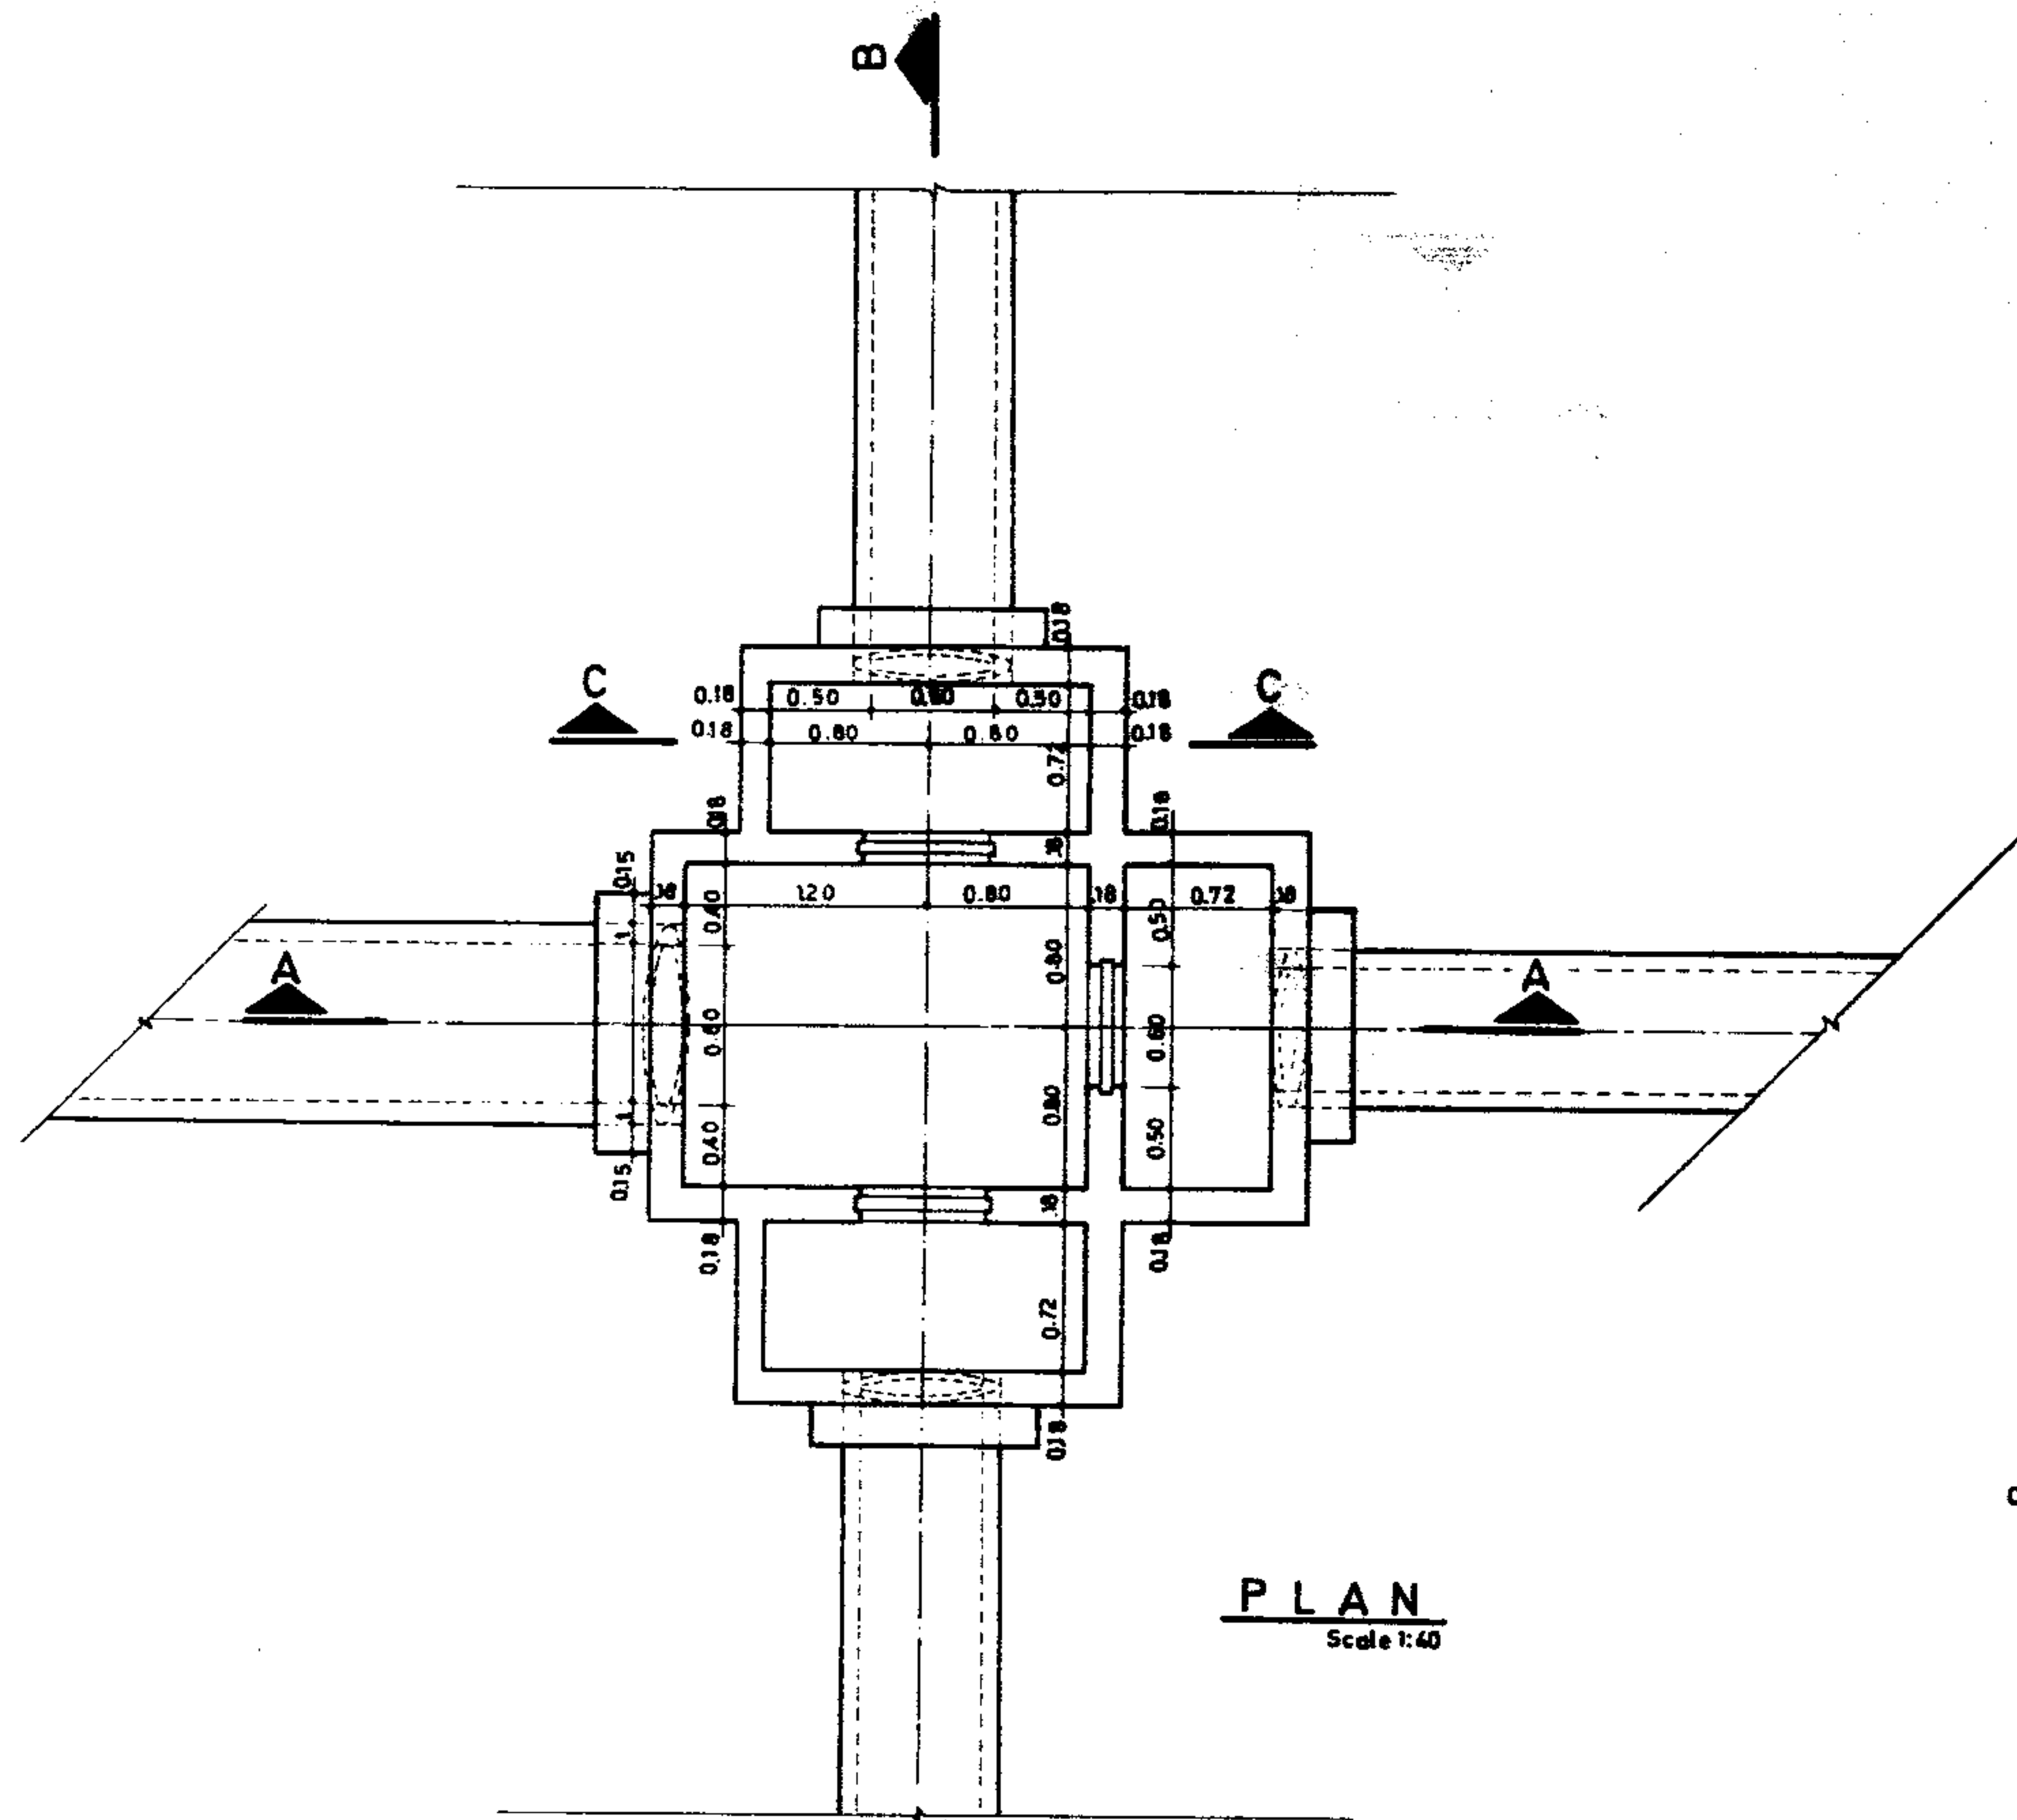


PLAN
Scale 1:40

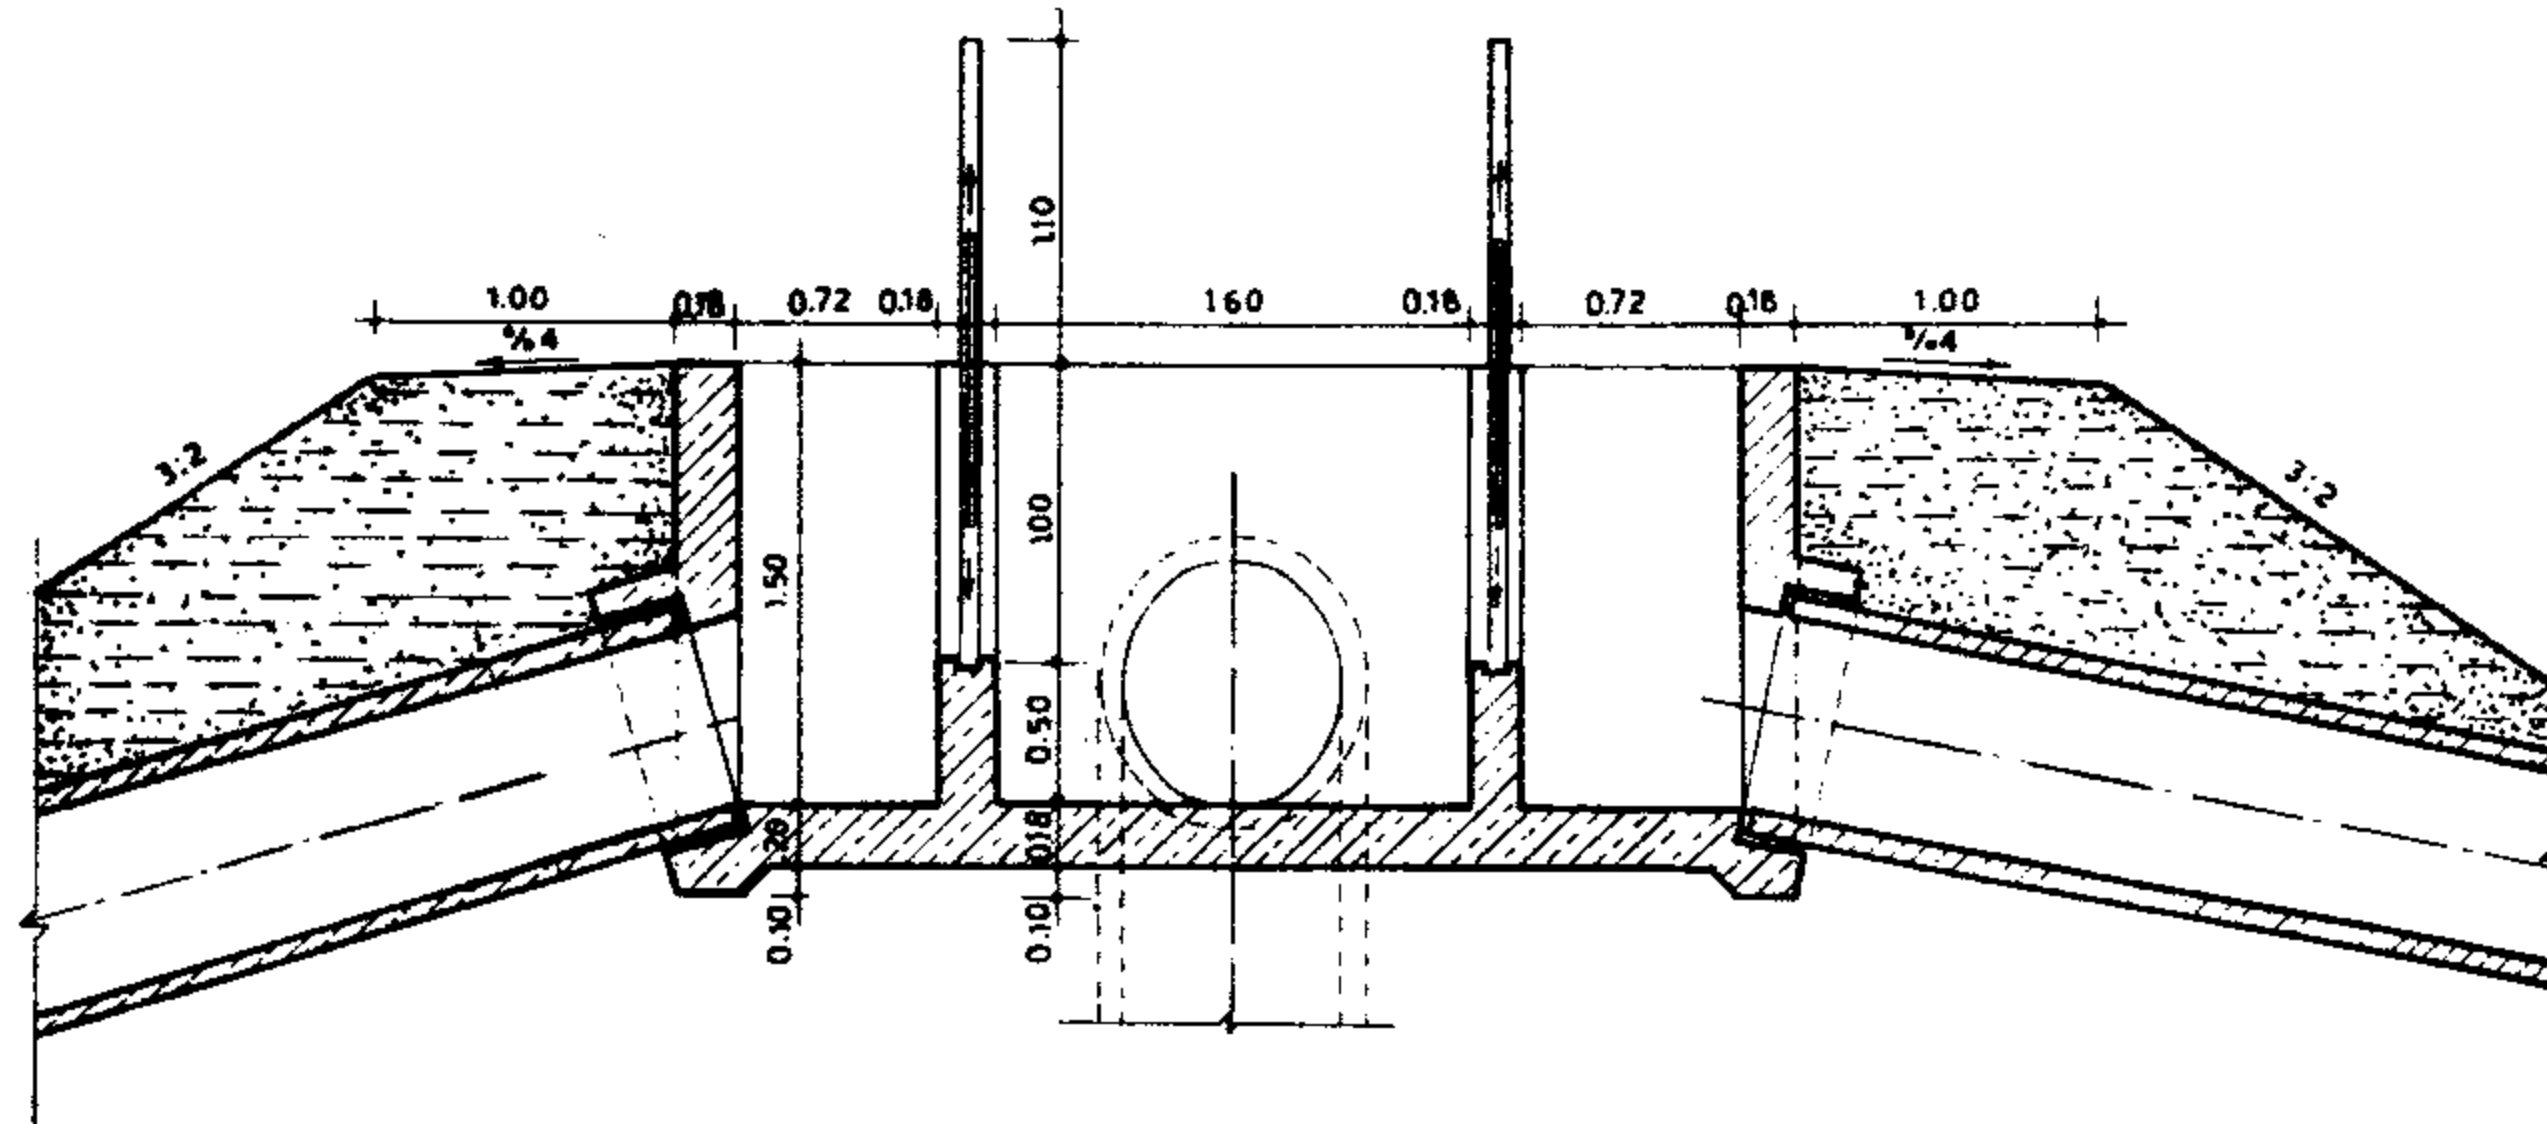


SECTION B-B
Scale 1:40

COMPACTED EMBANKMENT

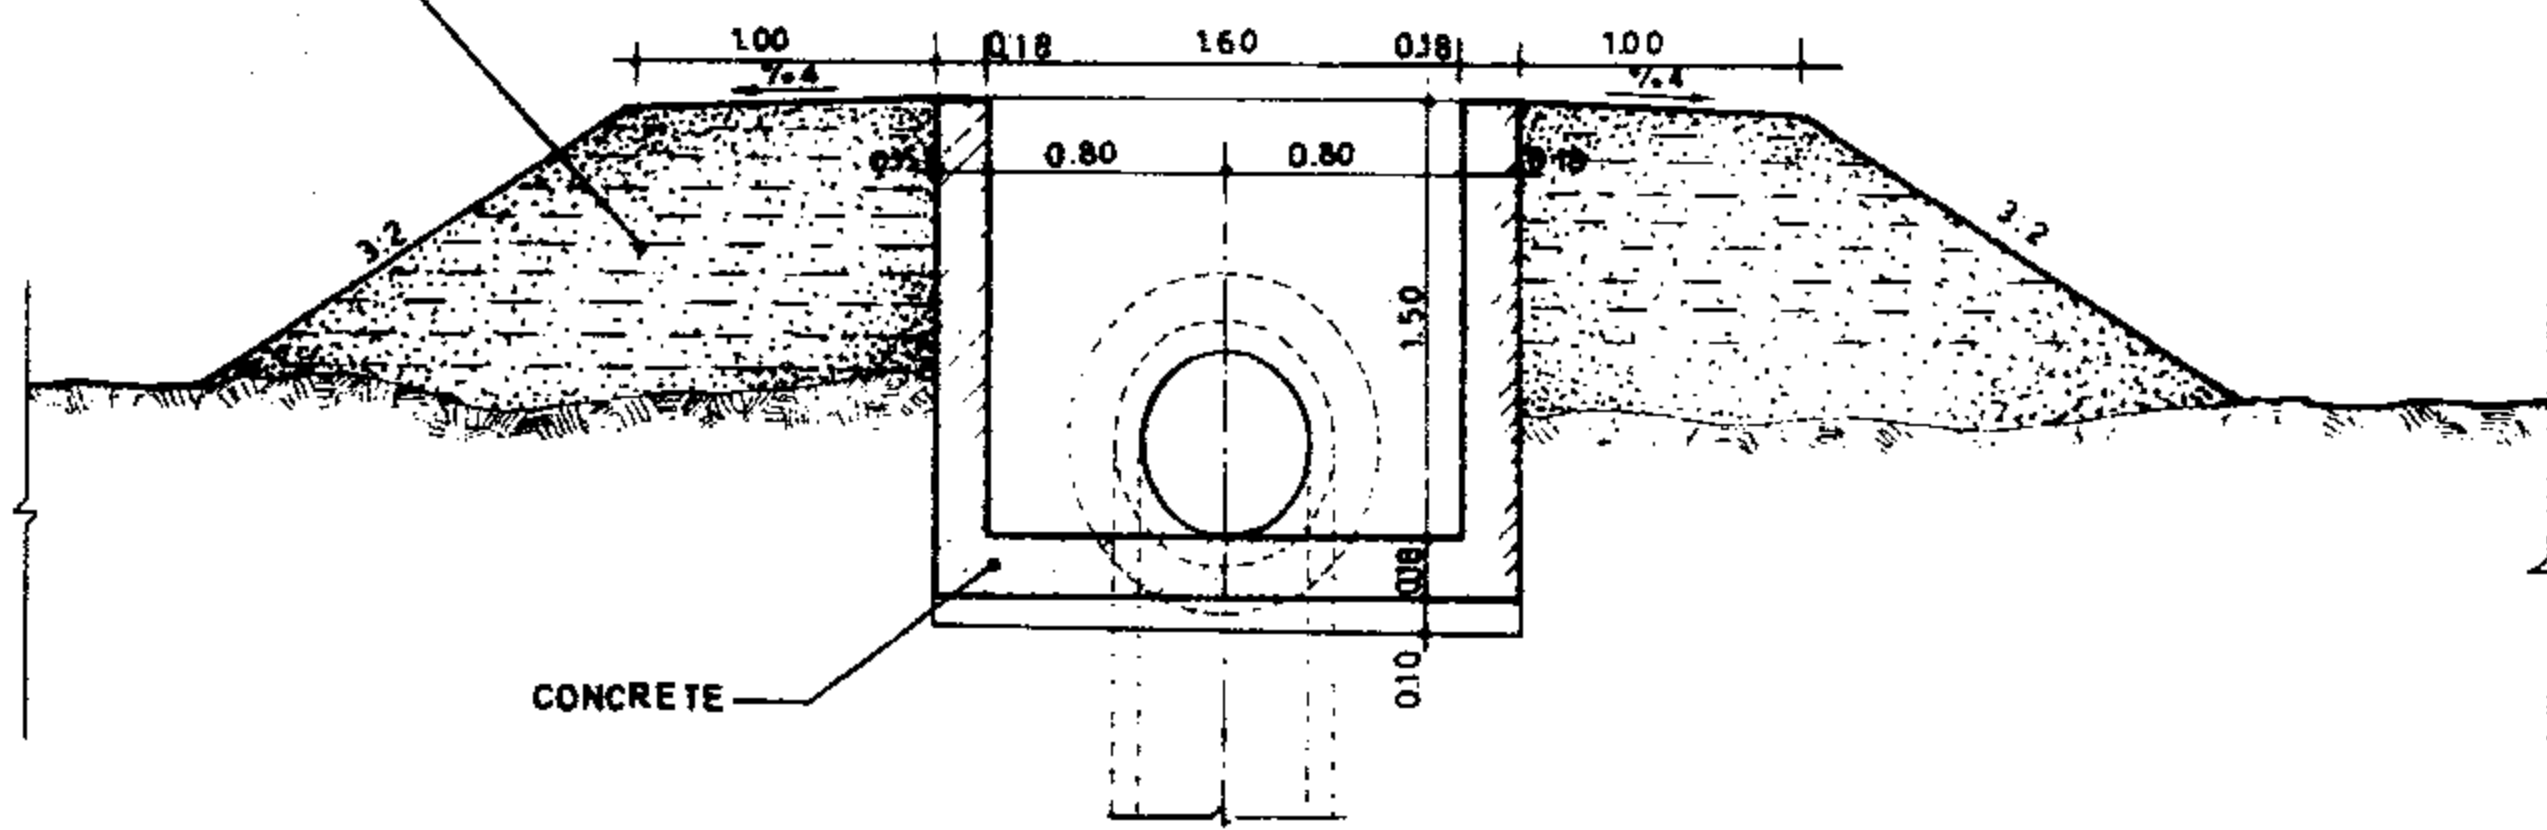

SECTION C-C
Scale 1:40

CONCRETE

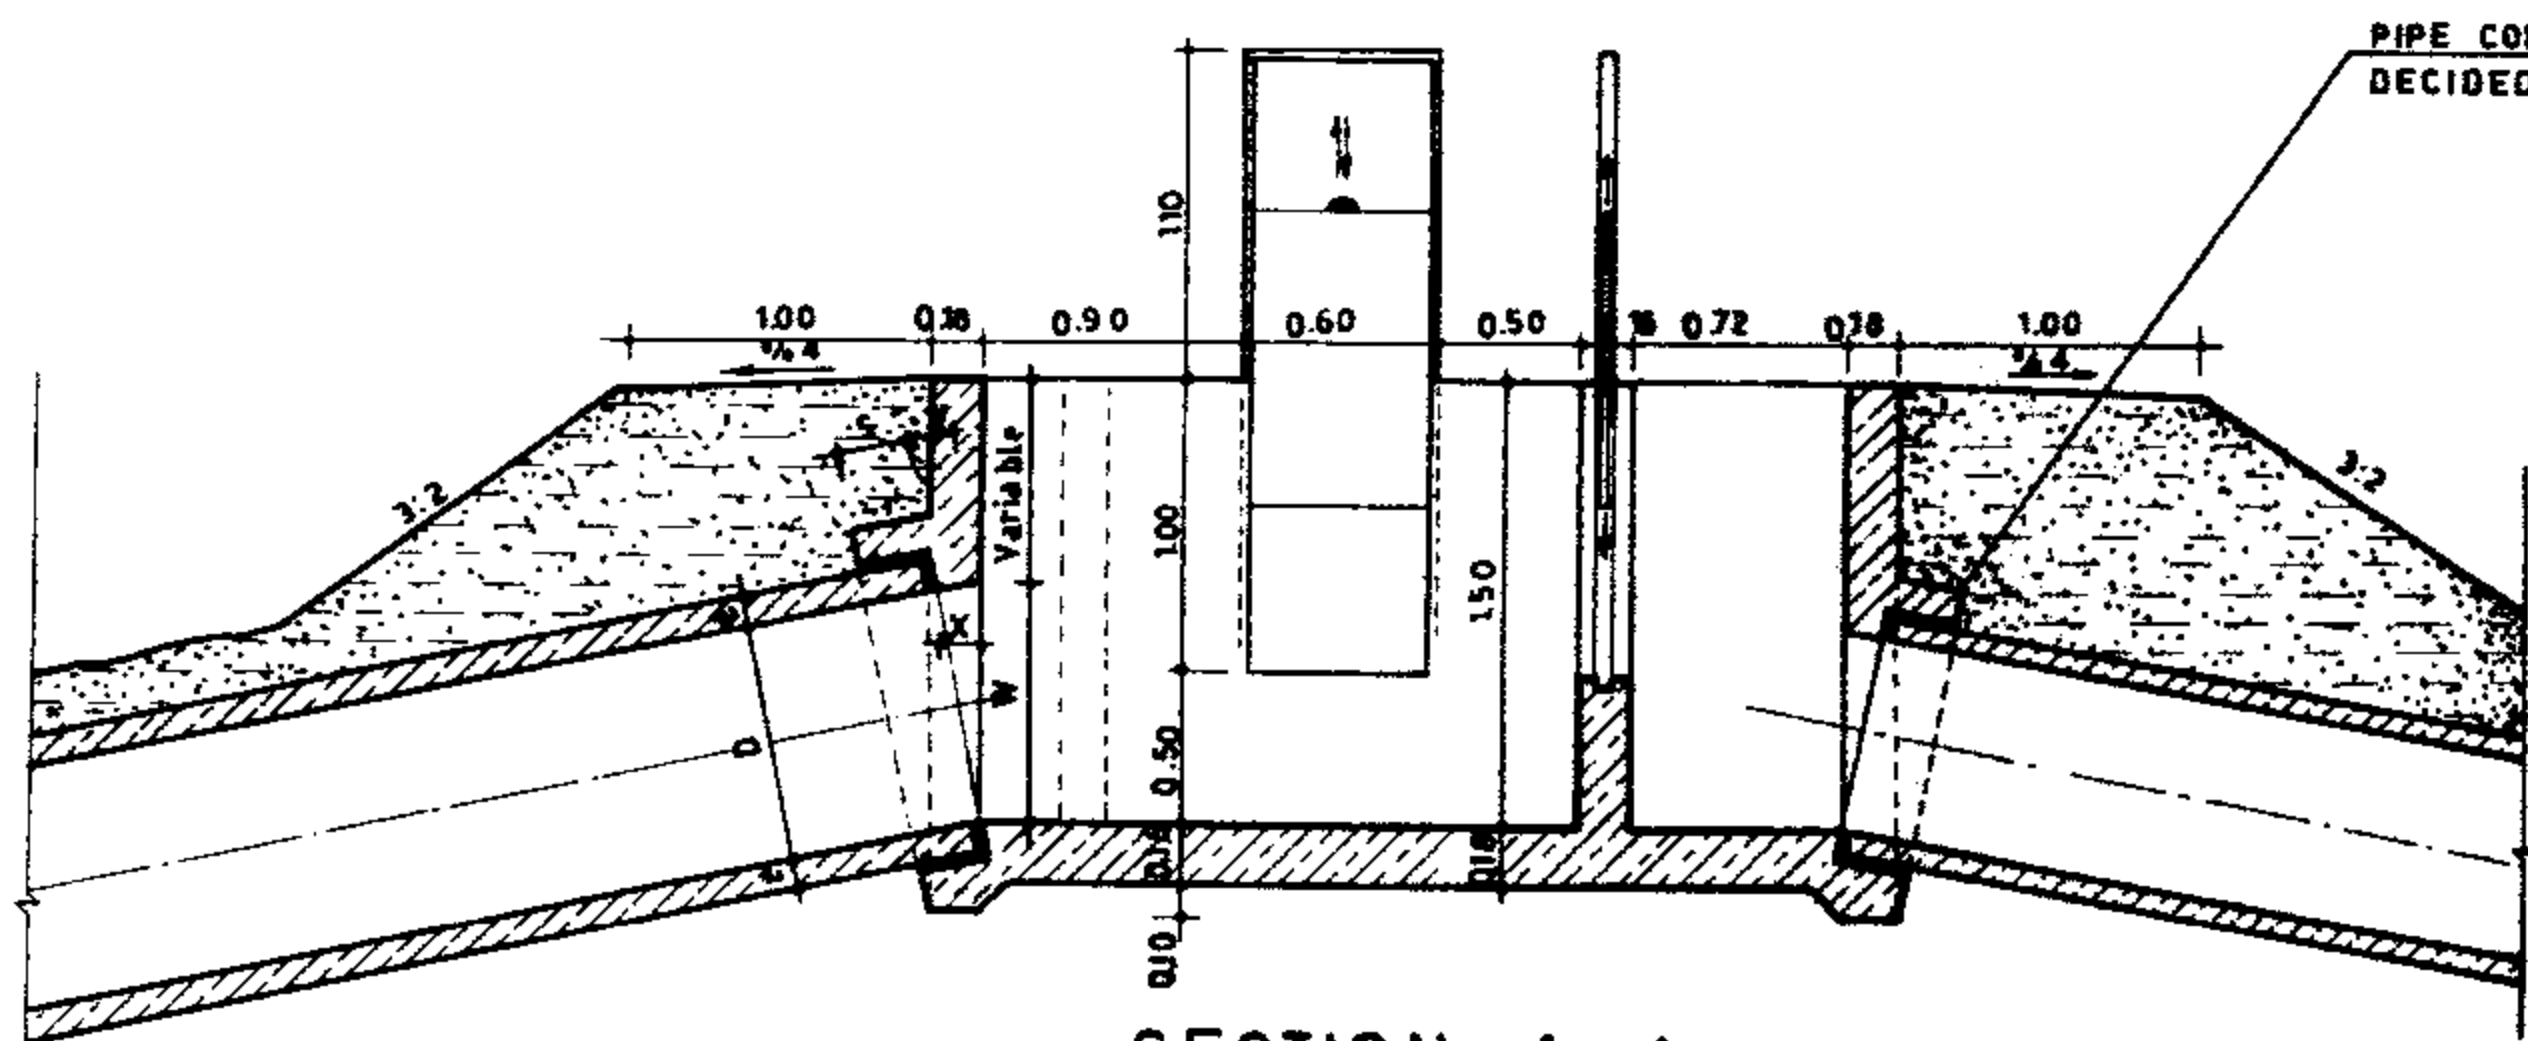

SECTION A-A
Scale 1:40

PIPE CONNECTION TYPE CAN BE DECIDED BY THE ENGINEER

NOTE:
See notes on dwg. N° 12/7/1/01

REFERENCE DWGS.

- 1-FOR REINFORCEMENT SEE DWG. N° 12/7/3/05
- 2-FOR DETAIL AND DIMENSION OF PIPE CONNECTION SEE DWGS. N° 17/1/1/01 TO 17/1/1/03
- 3-FOR GENERAL NOTES SEE DWGS. N° 20/2/1/01 TO 20/2/1/03

Scale: 1:40

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG. N° 12/7/1/05

Approved:


Sheet N° 5 of 18 Rev. N°

DIVISION BOX (TYPE 5)

ISLAMIC REPUBLIC OF IRAN

MINISTRY OF PLAN & BUDJET





TECHNICAL RESEARCH AND
STANDARD BUREAU

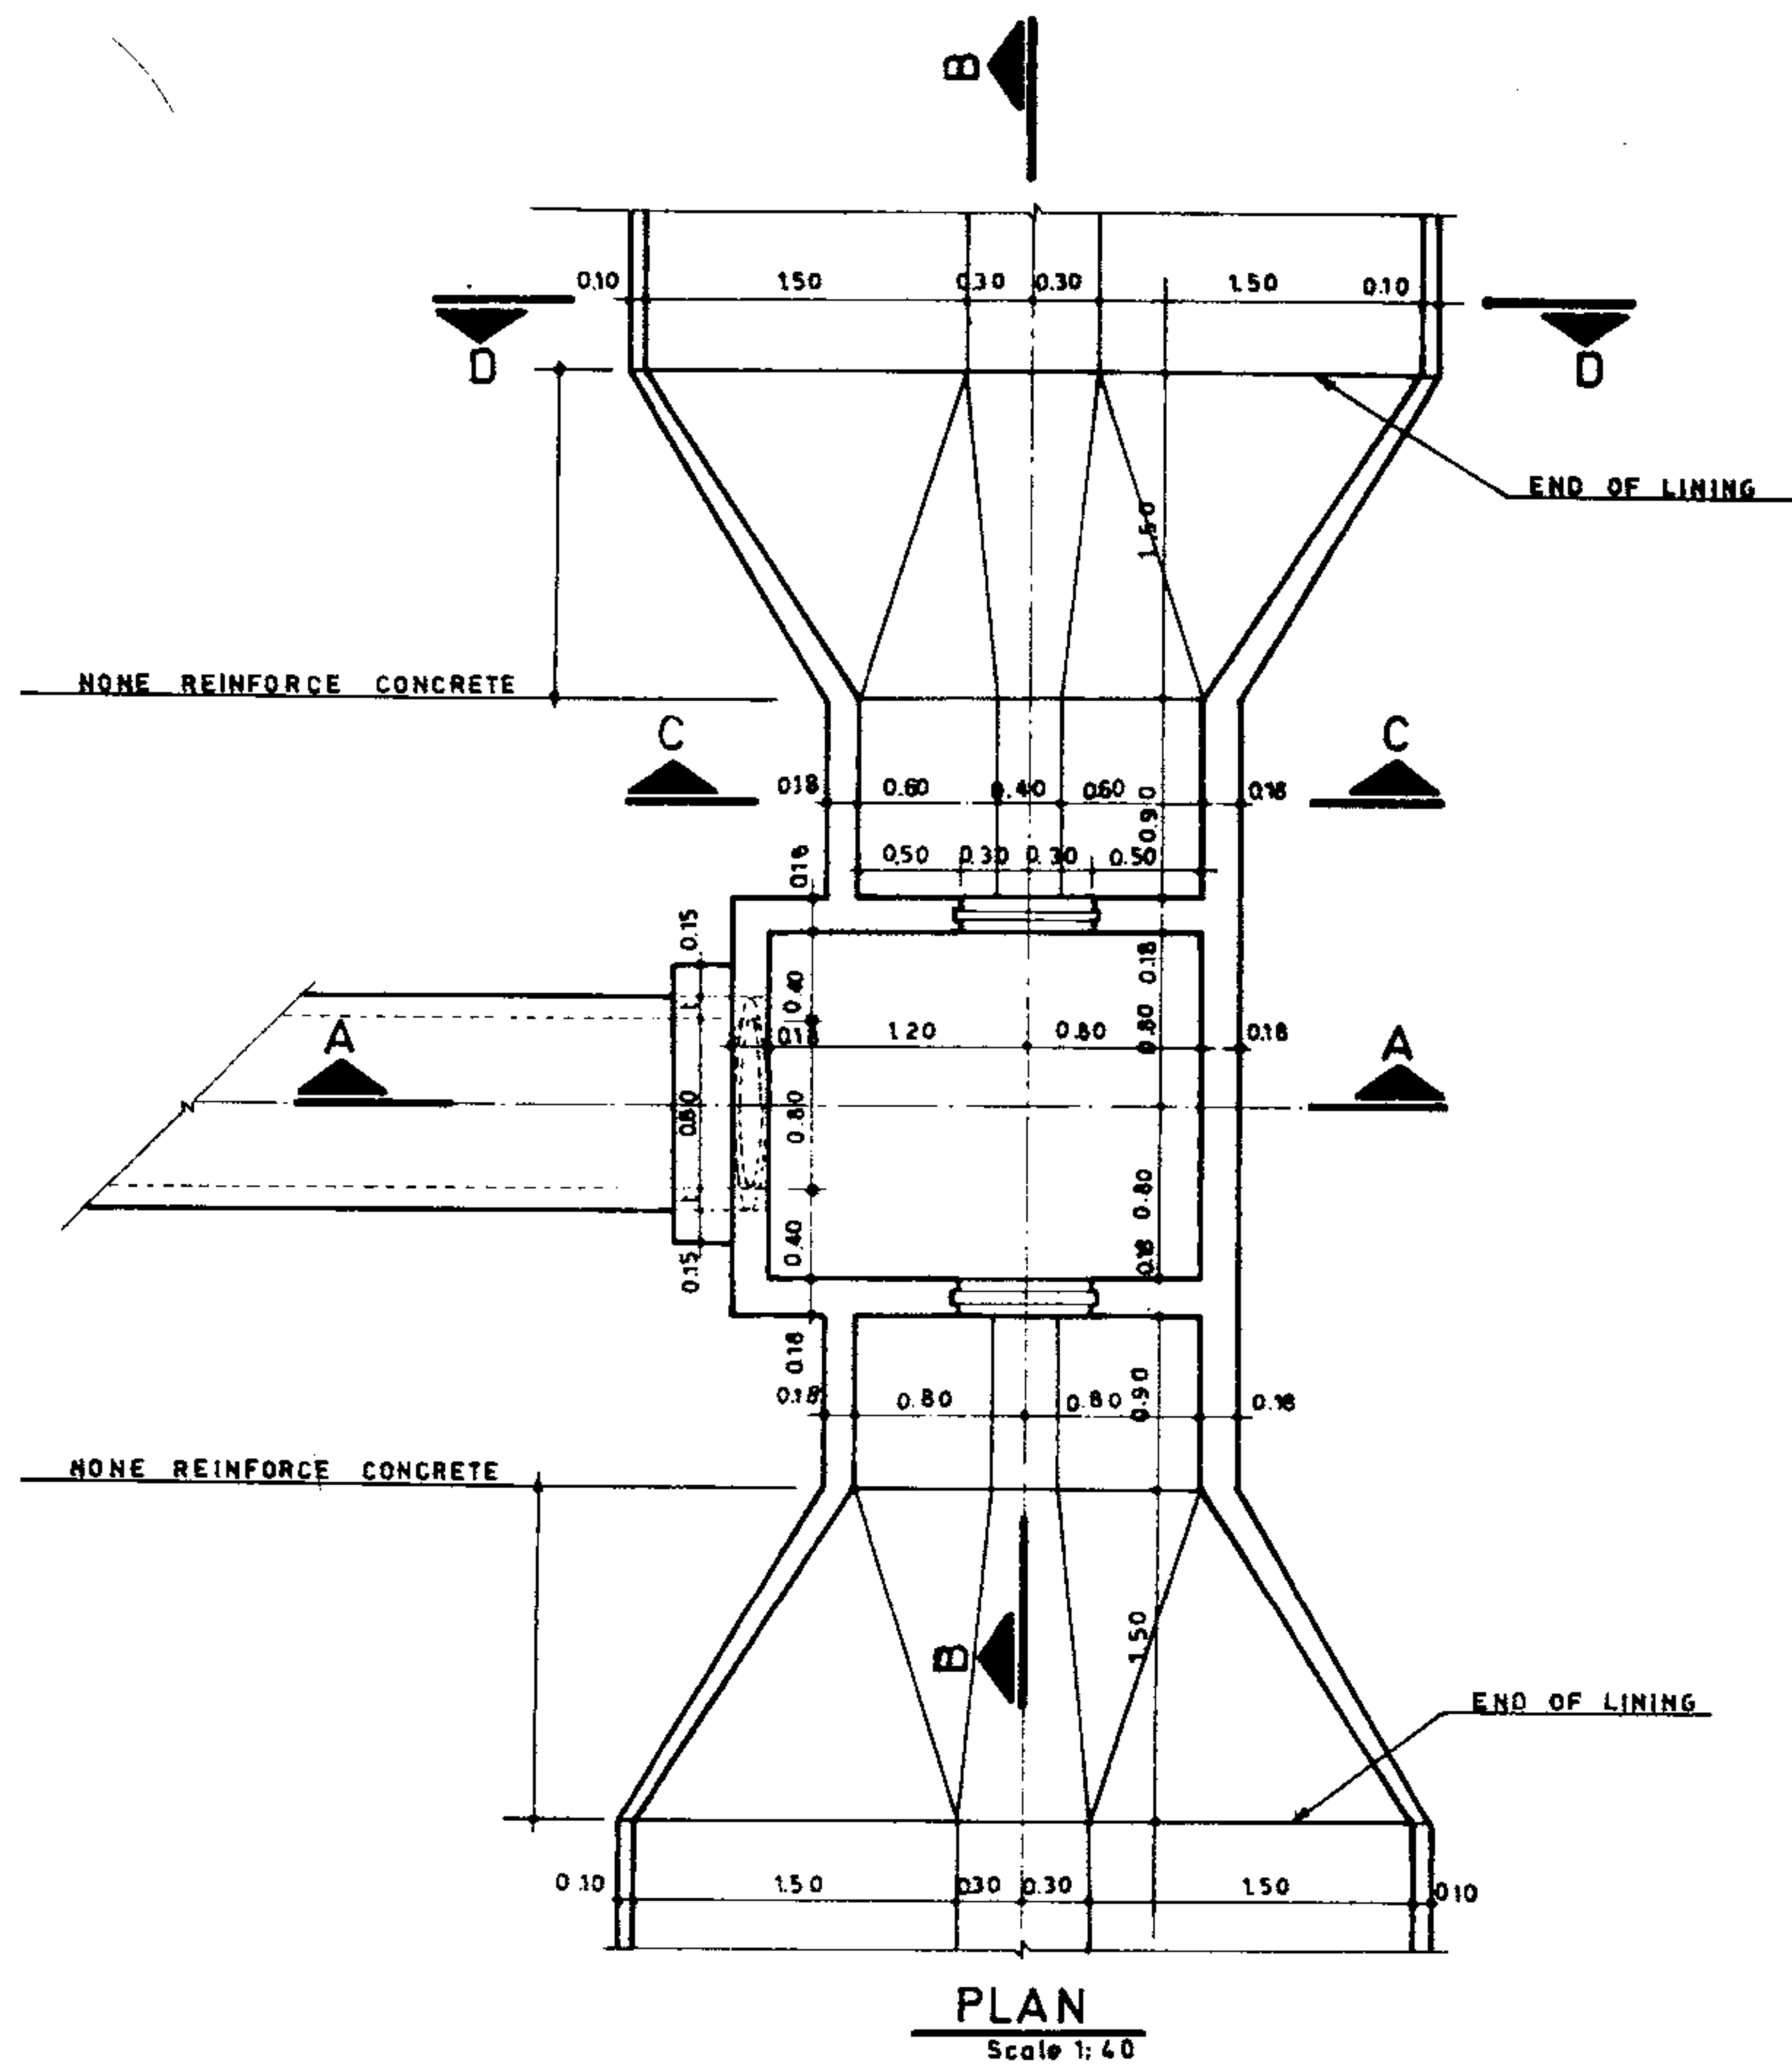

R/Bar. kg.	Conc. m ³	Form. m ²
284.04	5.75	45.89

SLIDE GATE	0.40×0.80	0.50×0.80	0.60×0.80	0.70×0.80	0.80×0.80
Q [*] (l/s)	320	400	480	560	640

* FOR V=1.00 m/s

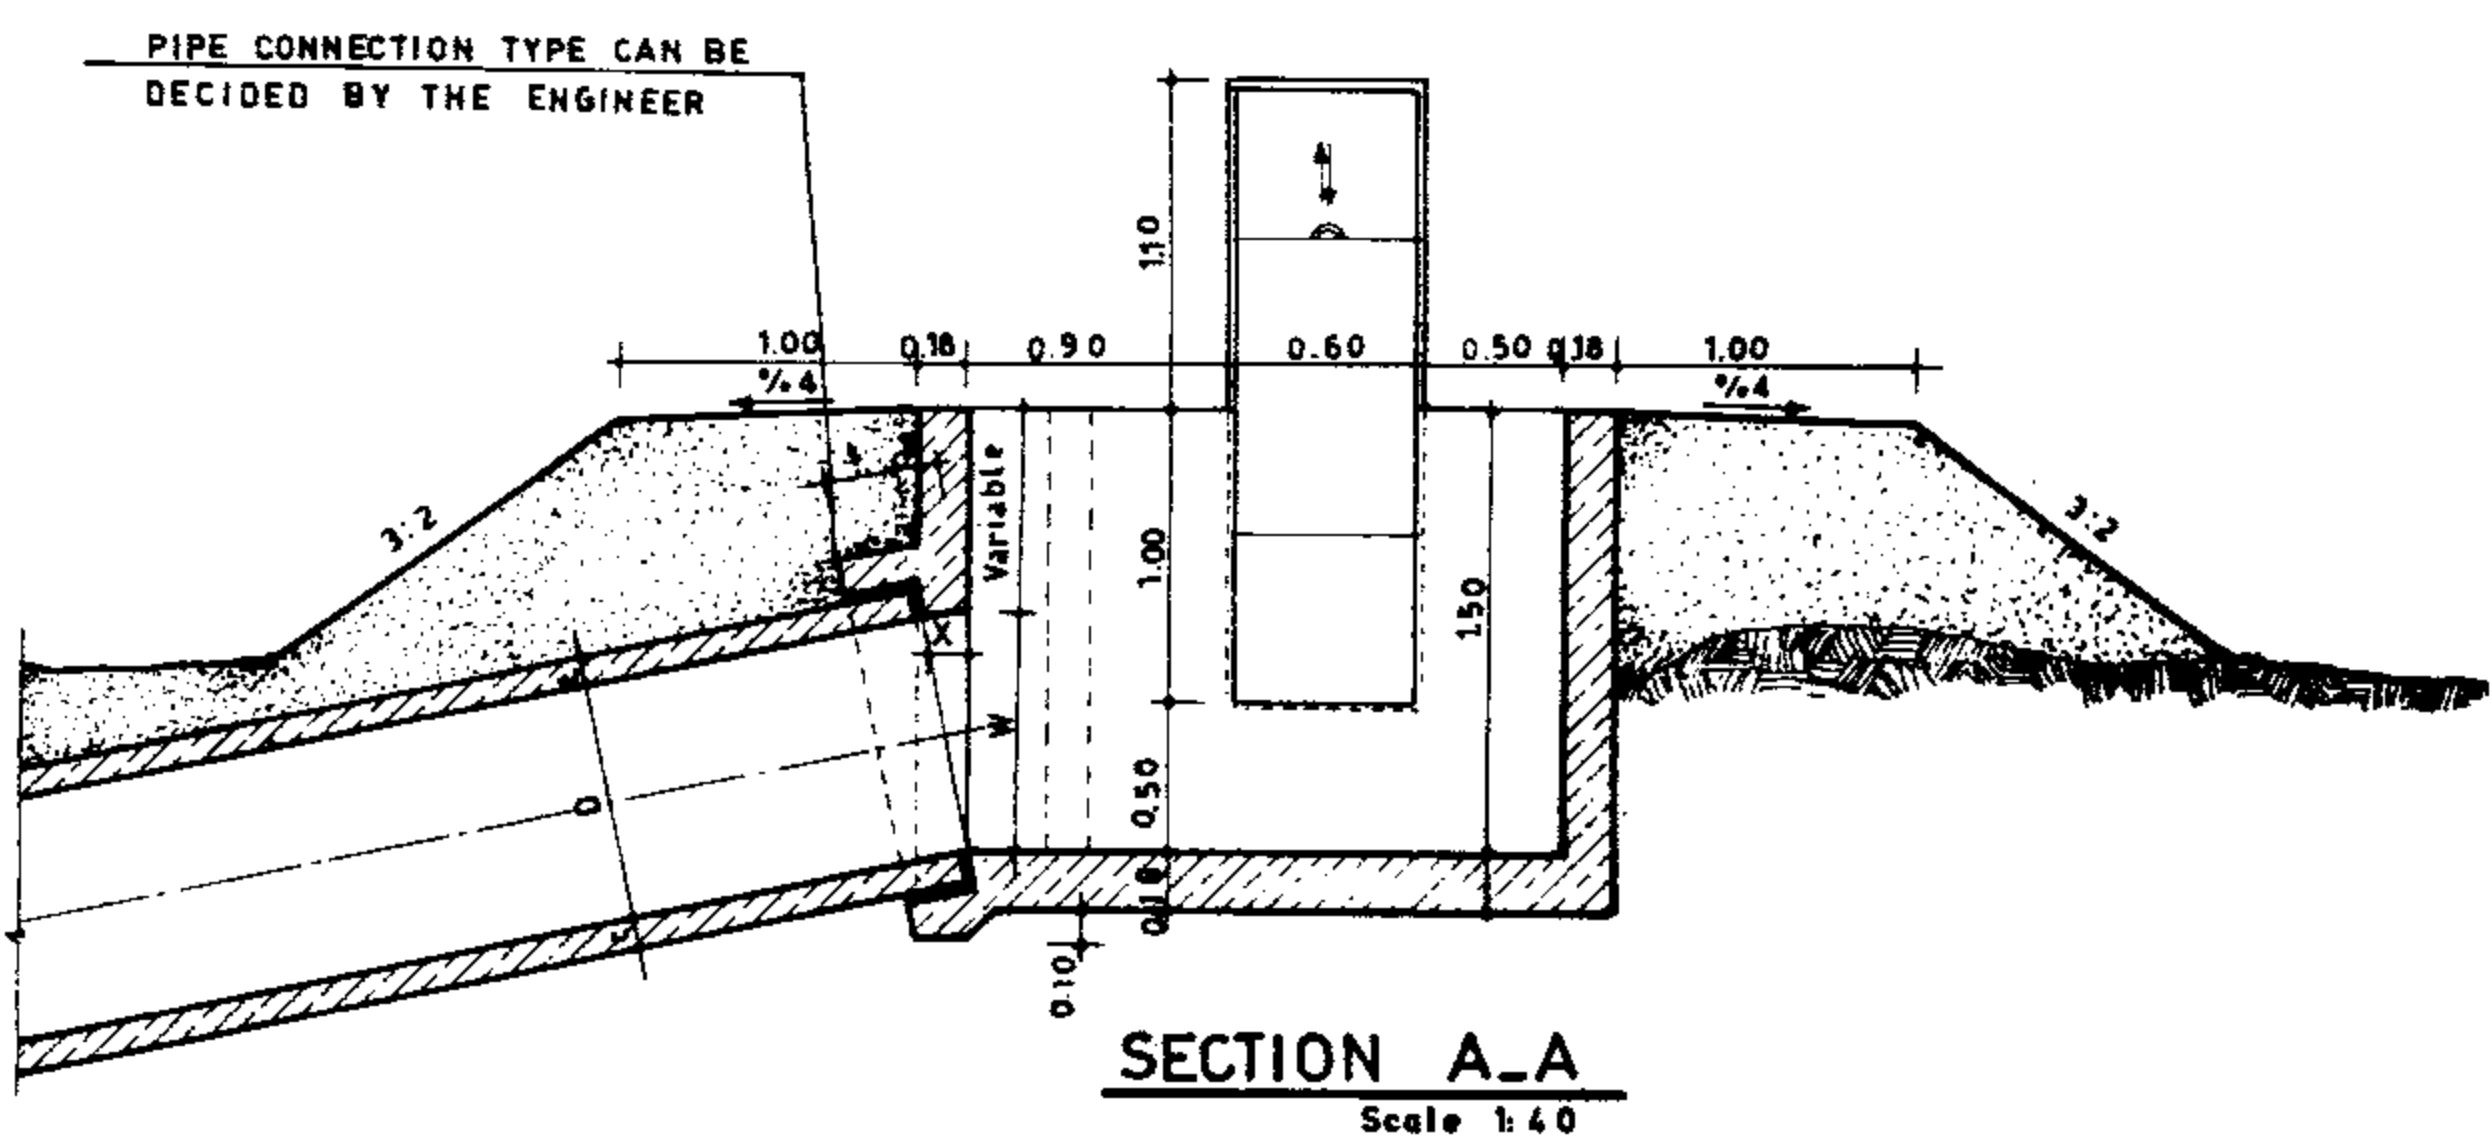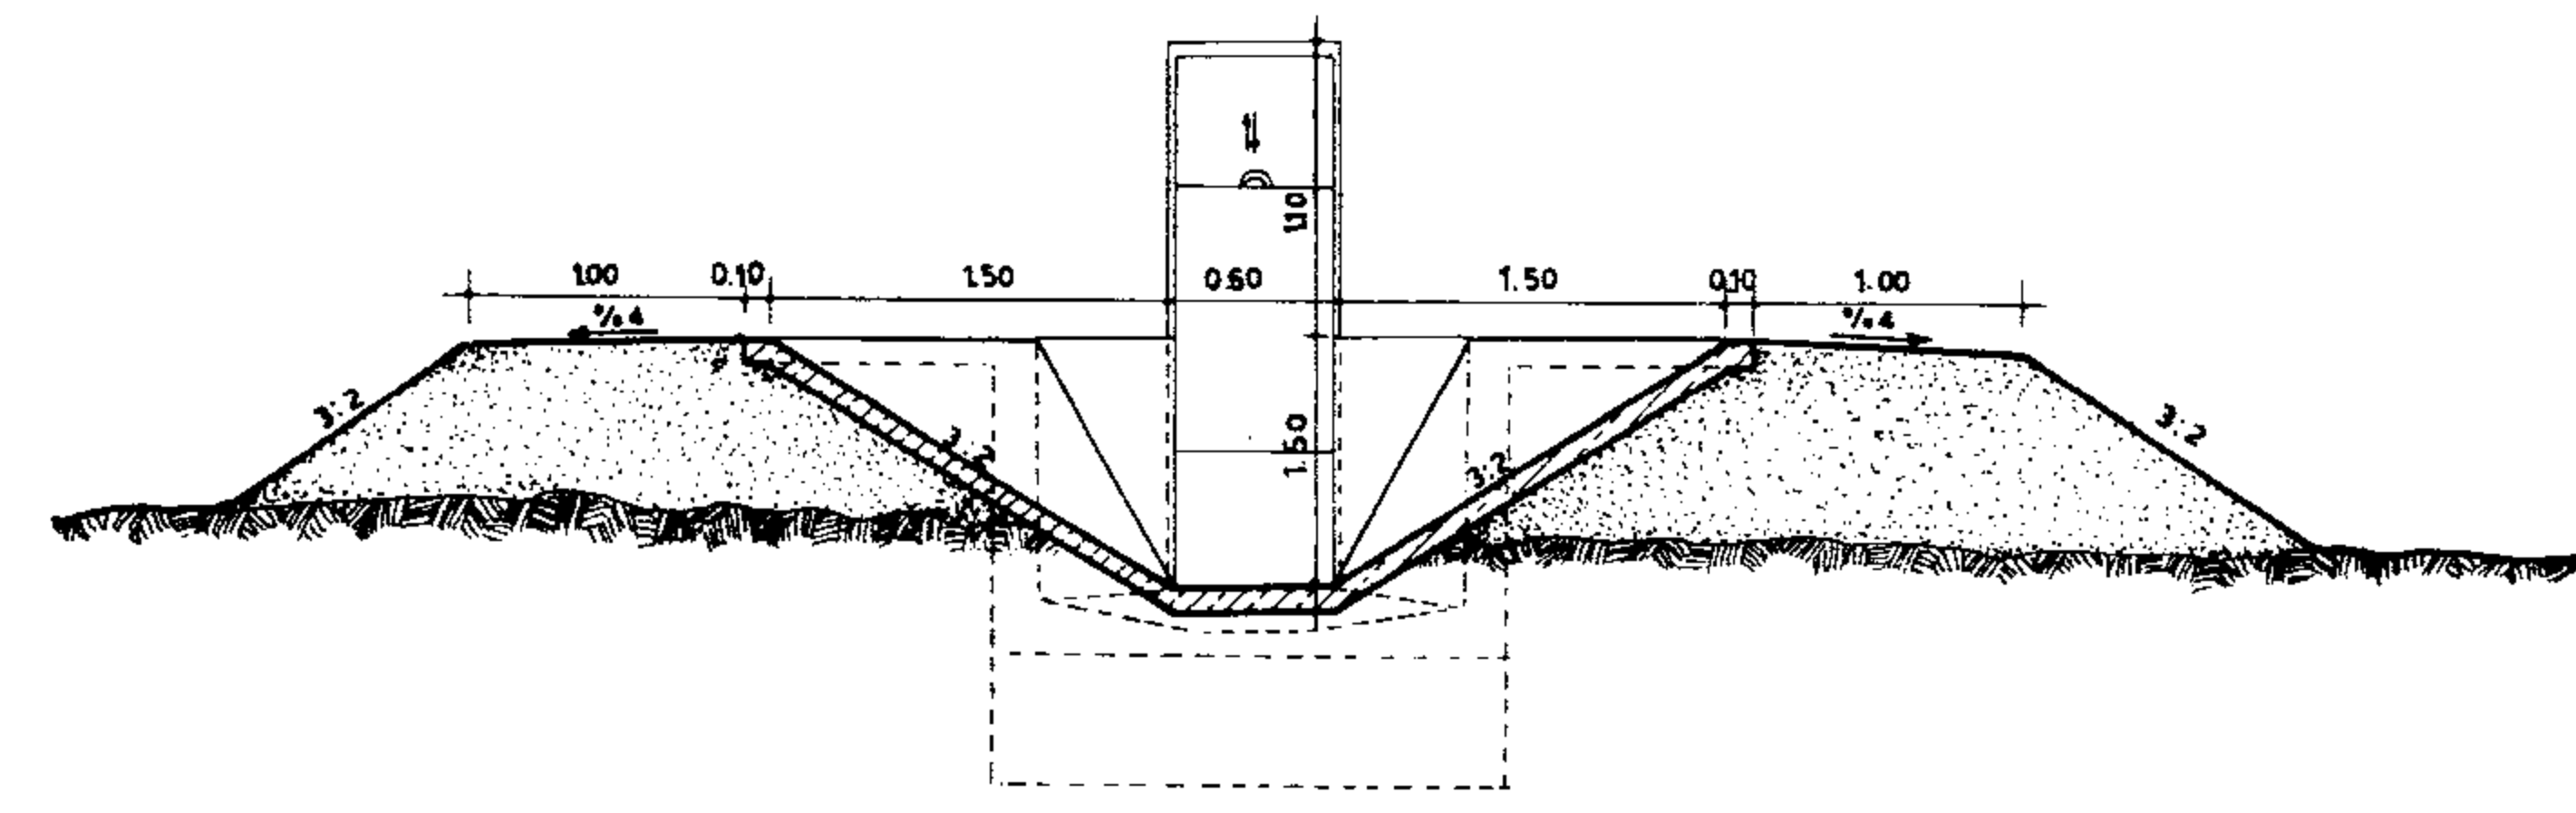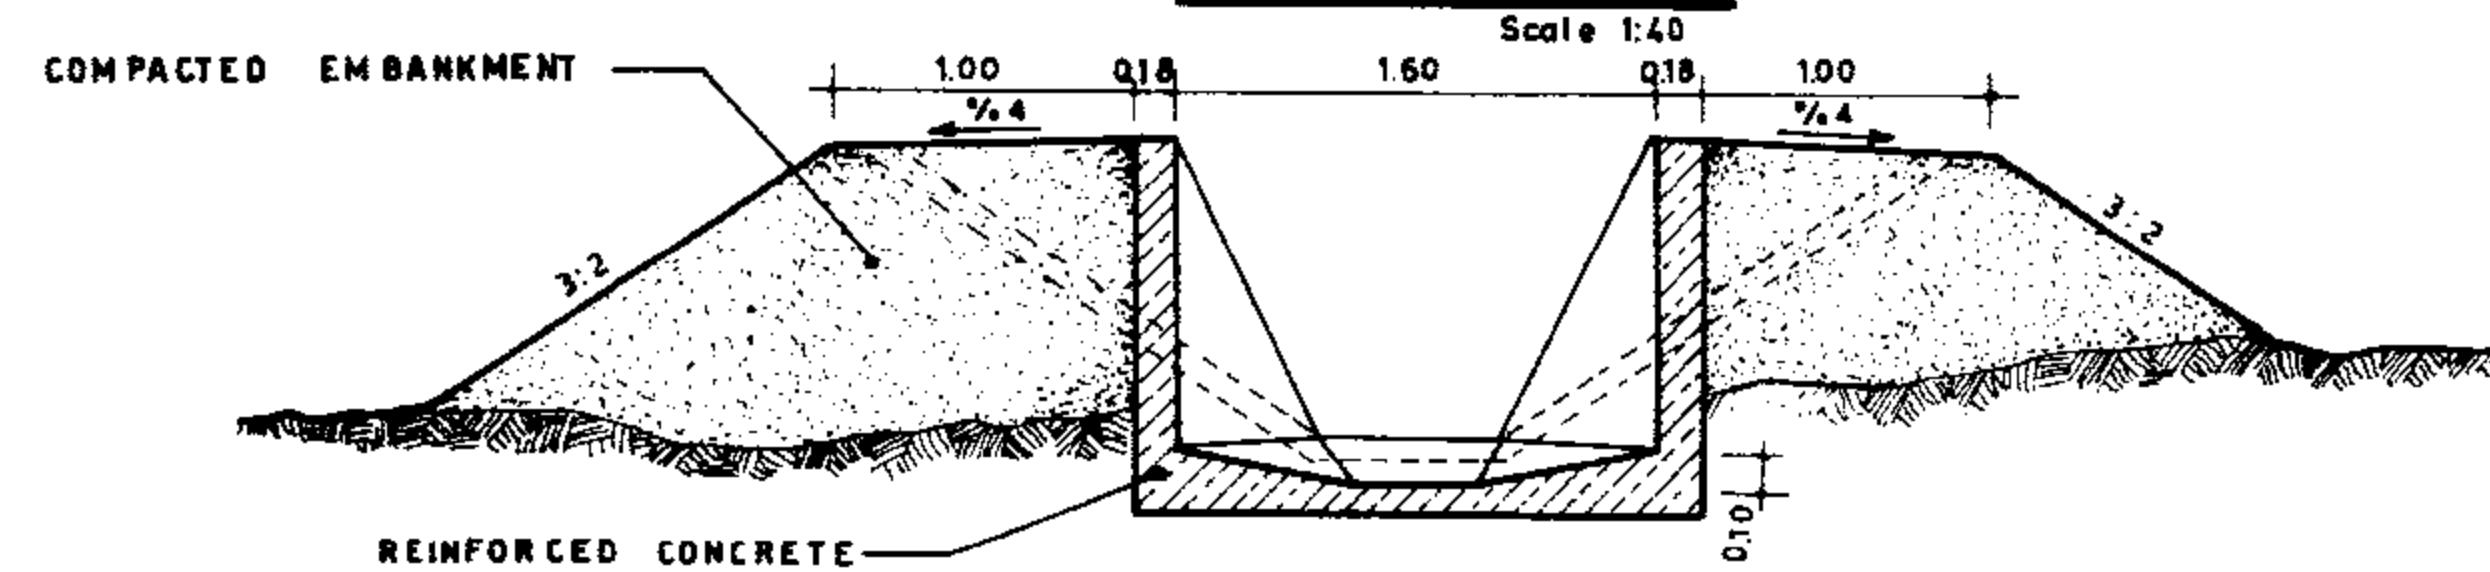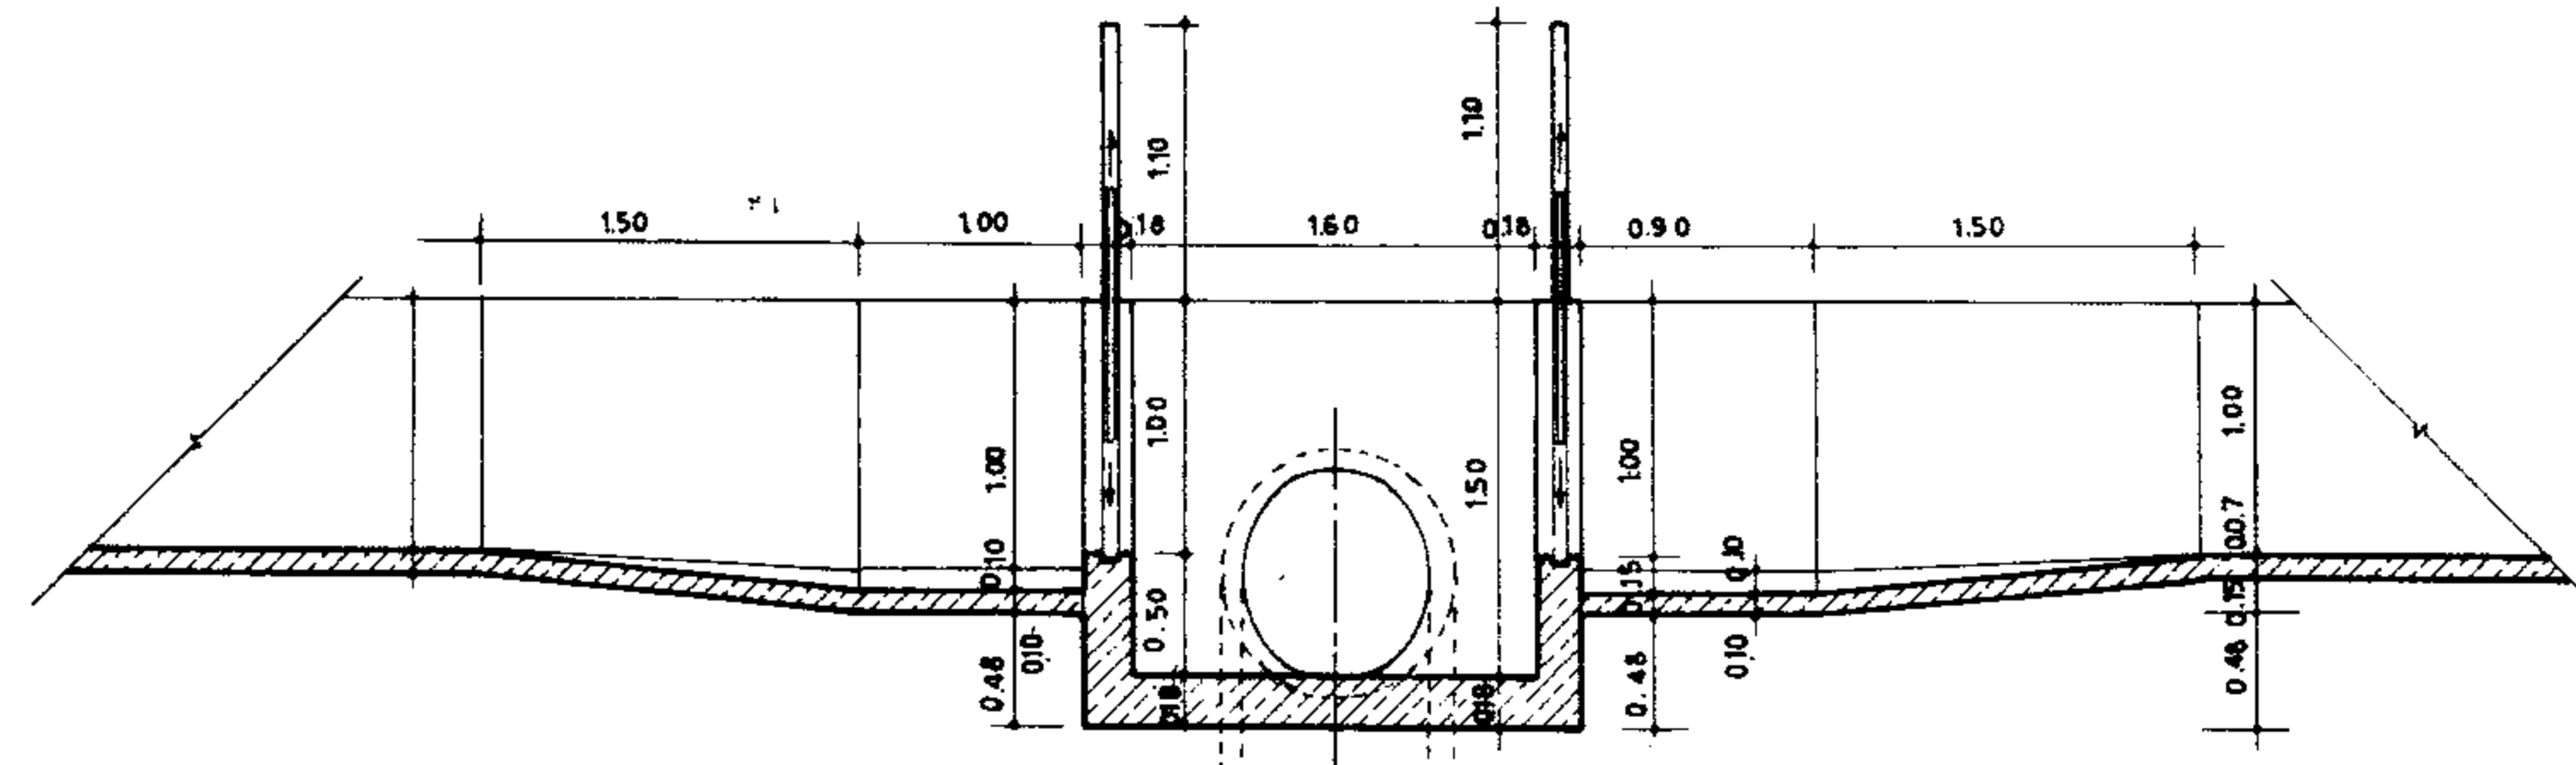





NOTE
See notes on dwg. N^o 12/7/1/01

<p>REFERENCE DWGS.</p> <p>1- FOR REINFORCEMENT SEE DWG. N^o 17/1/1/06</p> <p>2- FOR DETAIL AND DIMENSION OF PIPE CONNECTION SEE DWGS. N^o 17/1/1/01 TO 17/1/1/03</p> <p>3- FOR GENERAL NOTES SEE DWGS. N^o 20/2/1/01 TO 20/2/1/03</p>	<p>Scale 1:40</p> <p>IRRIGATION & DRAINAGE STANDARDS</p> <p>Date: DWG N^o 12/7/1/06</p> <p>Approved: Sheet N^o 6 of 18 Rev N^o</p>	<p>ISLAMIC REPUBLIC OF IRAN</p> <p>MINISTRY OF PLAN & BUDGET</p> <p>TECHNICAL RESEARCH AND STANDARD BUREAU</p> <p>DIVISION BOX (TYPE 6)</p>
--	---	--

R/Bar kg	Conc. m ³	Form. m ²
426.83	4.52	34.22

SLIDE GATE	0.40×0.80	0.50×0.80	0.60×0.80	0.70×0.80	0.80×0.80
Q ² (l/s)	320	400	480	560	640

* FOR V = 1.00 m/s

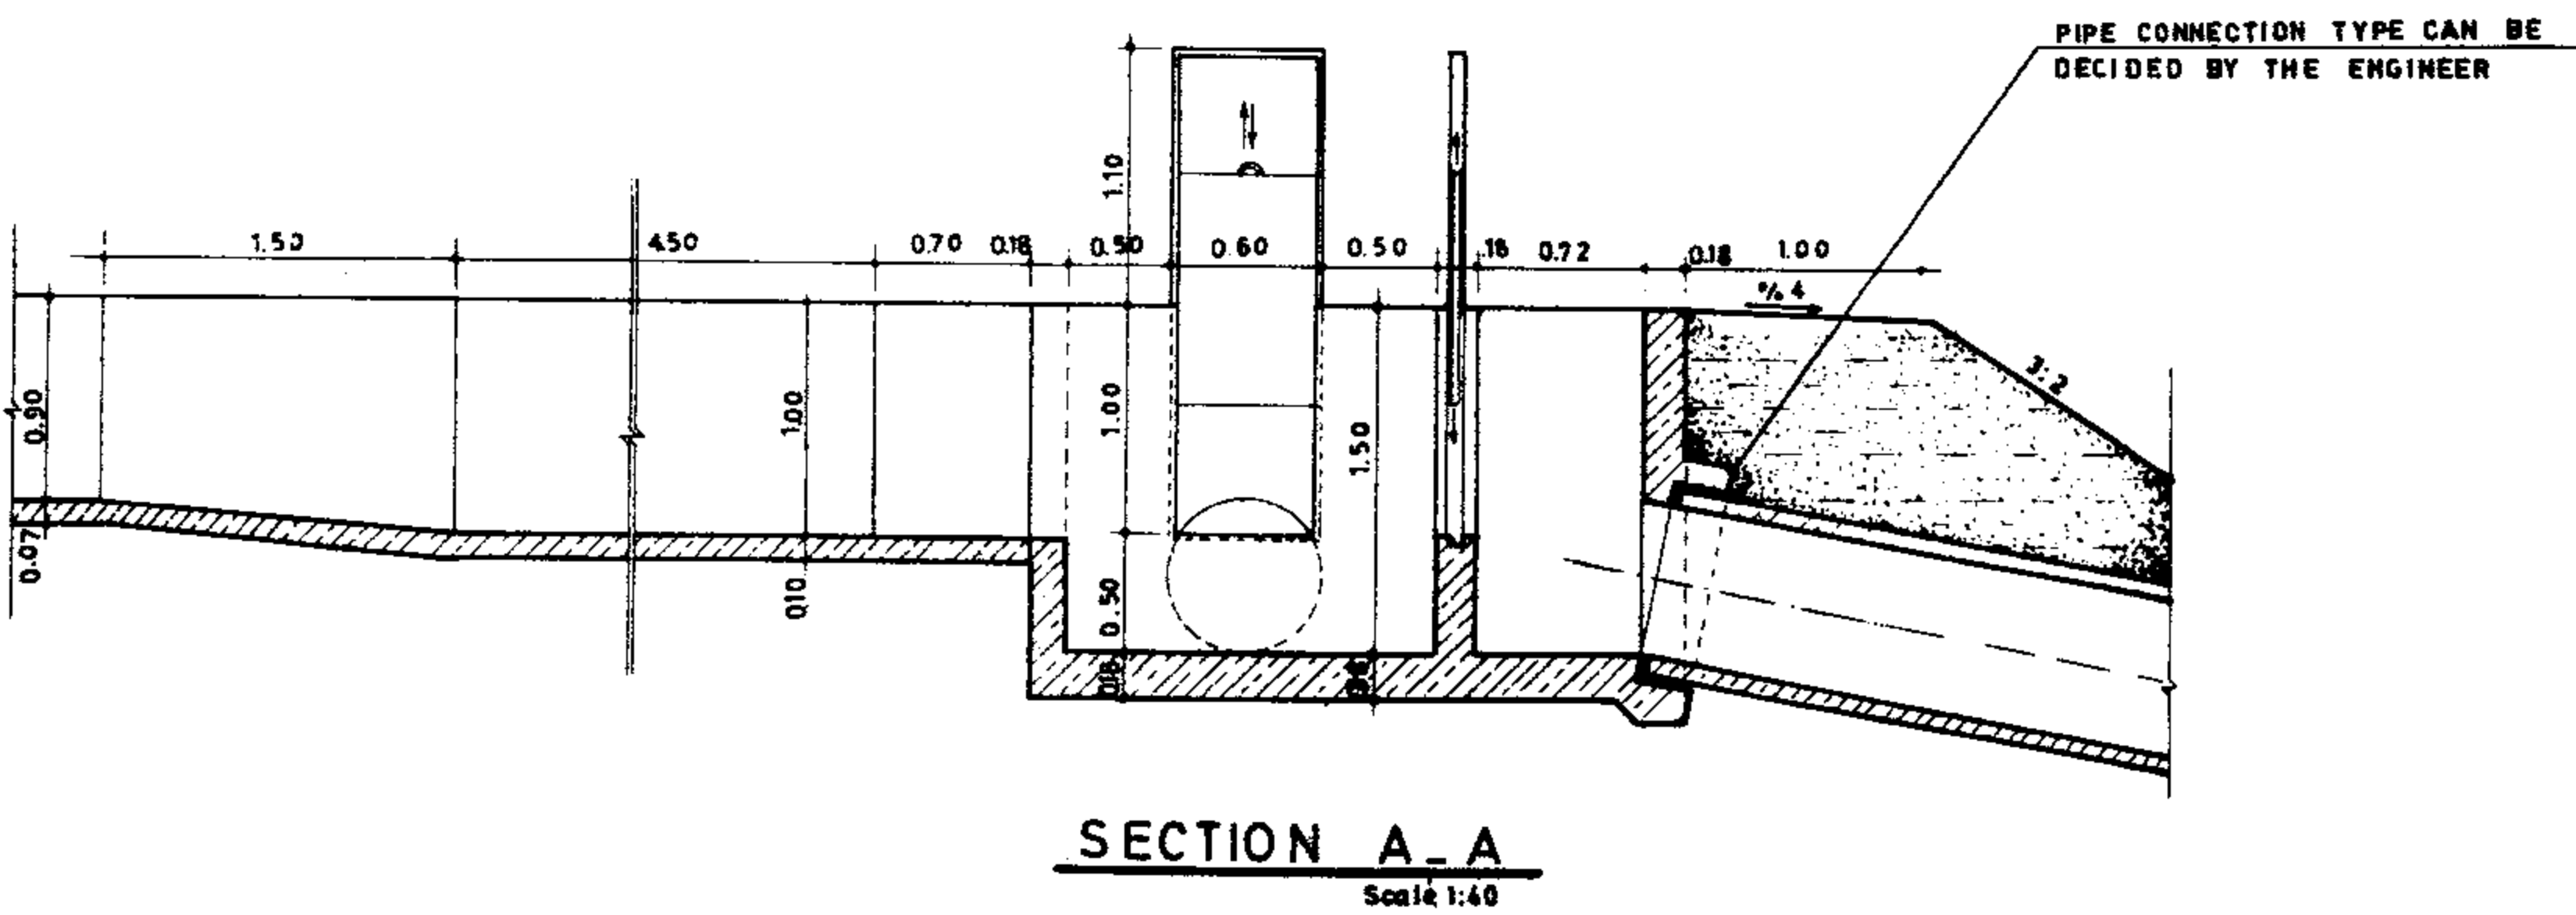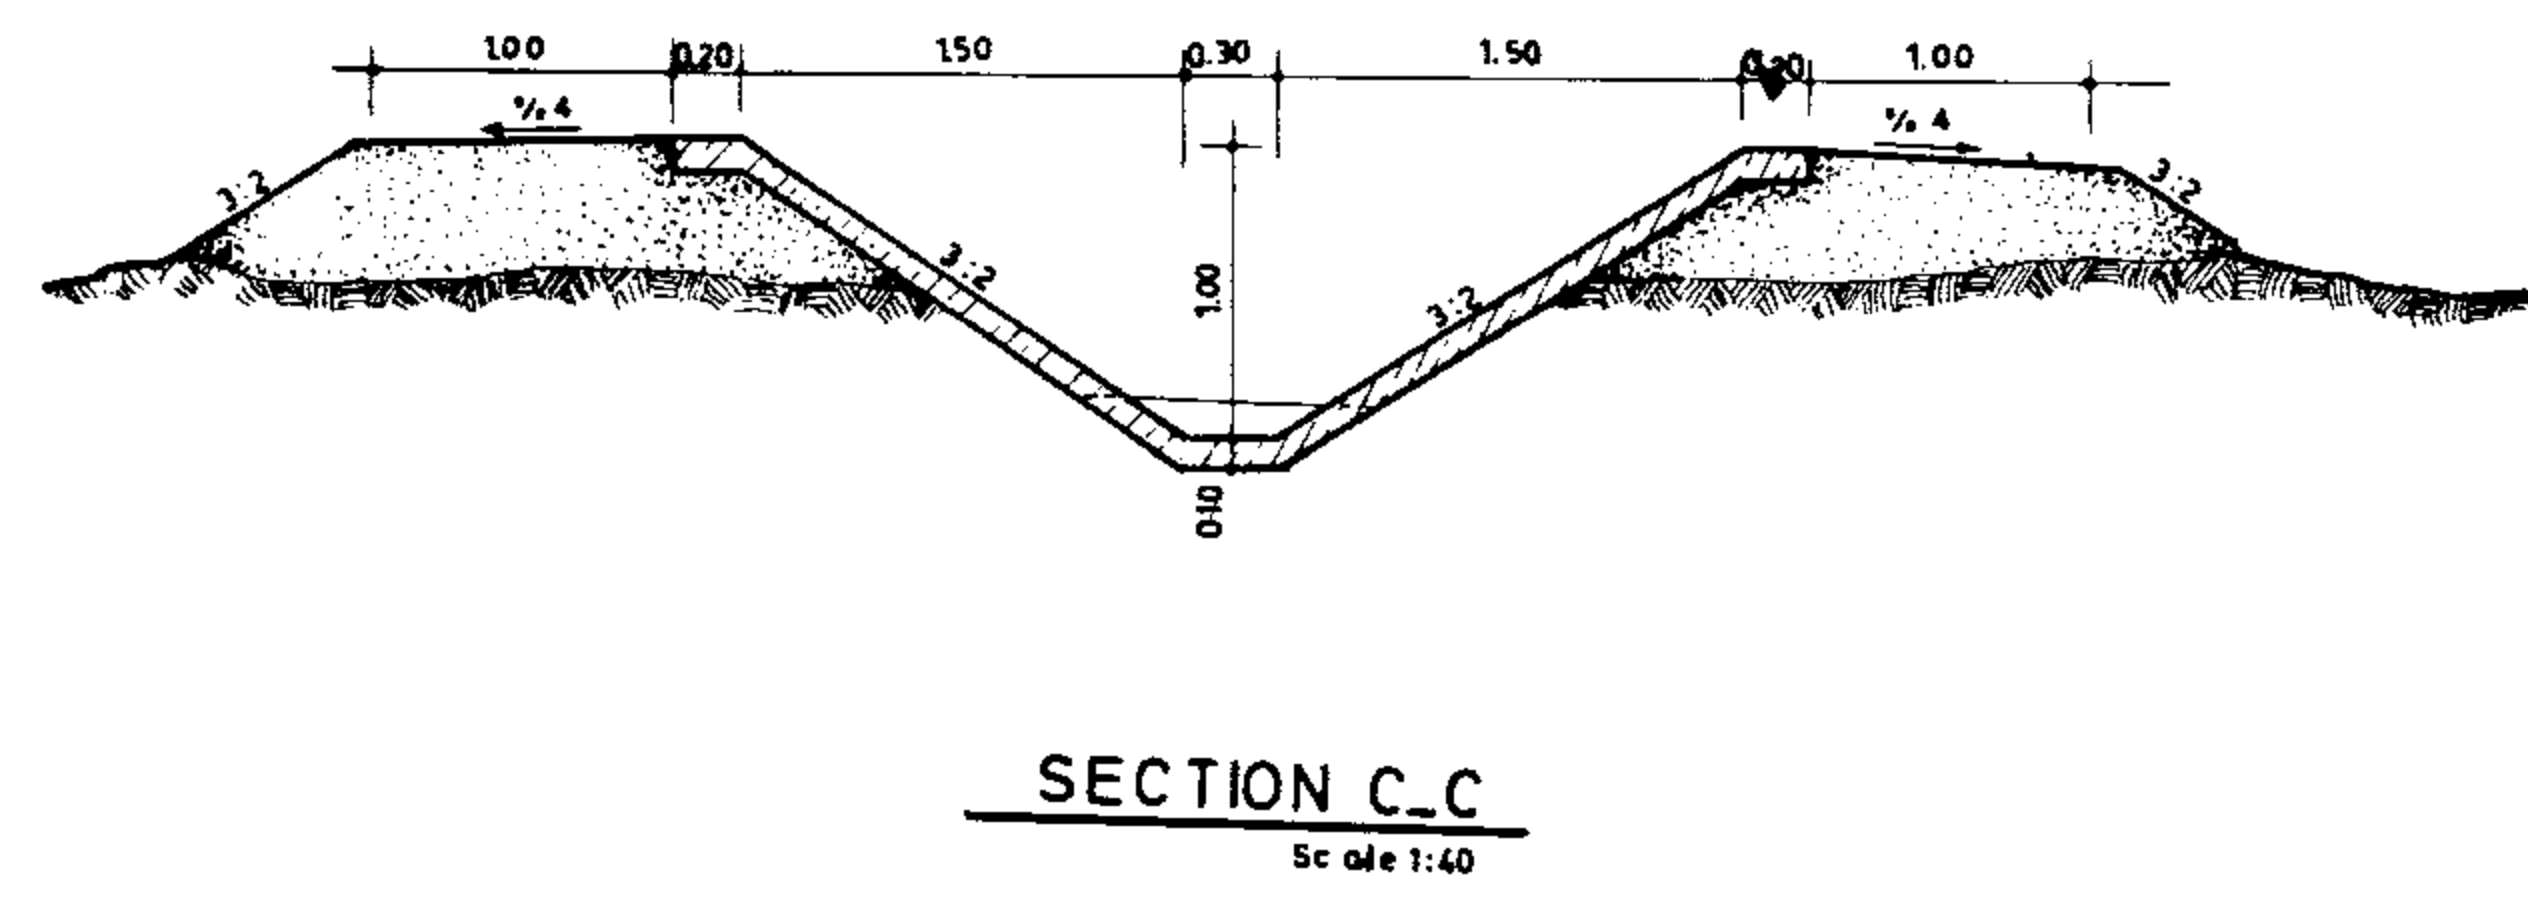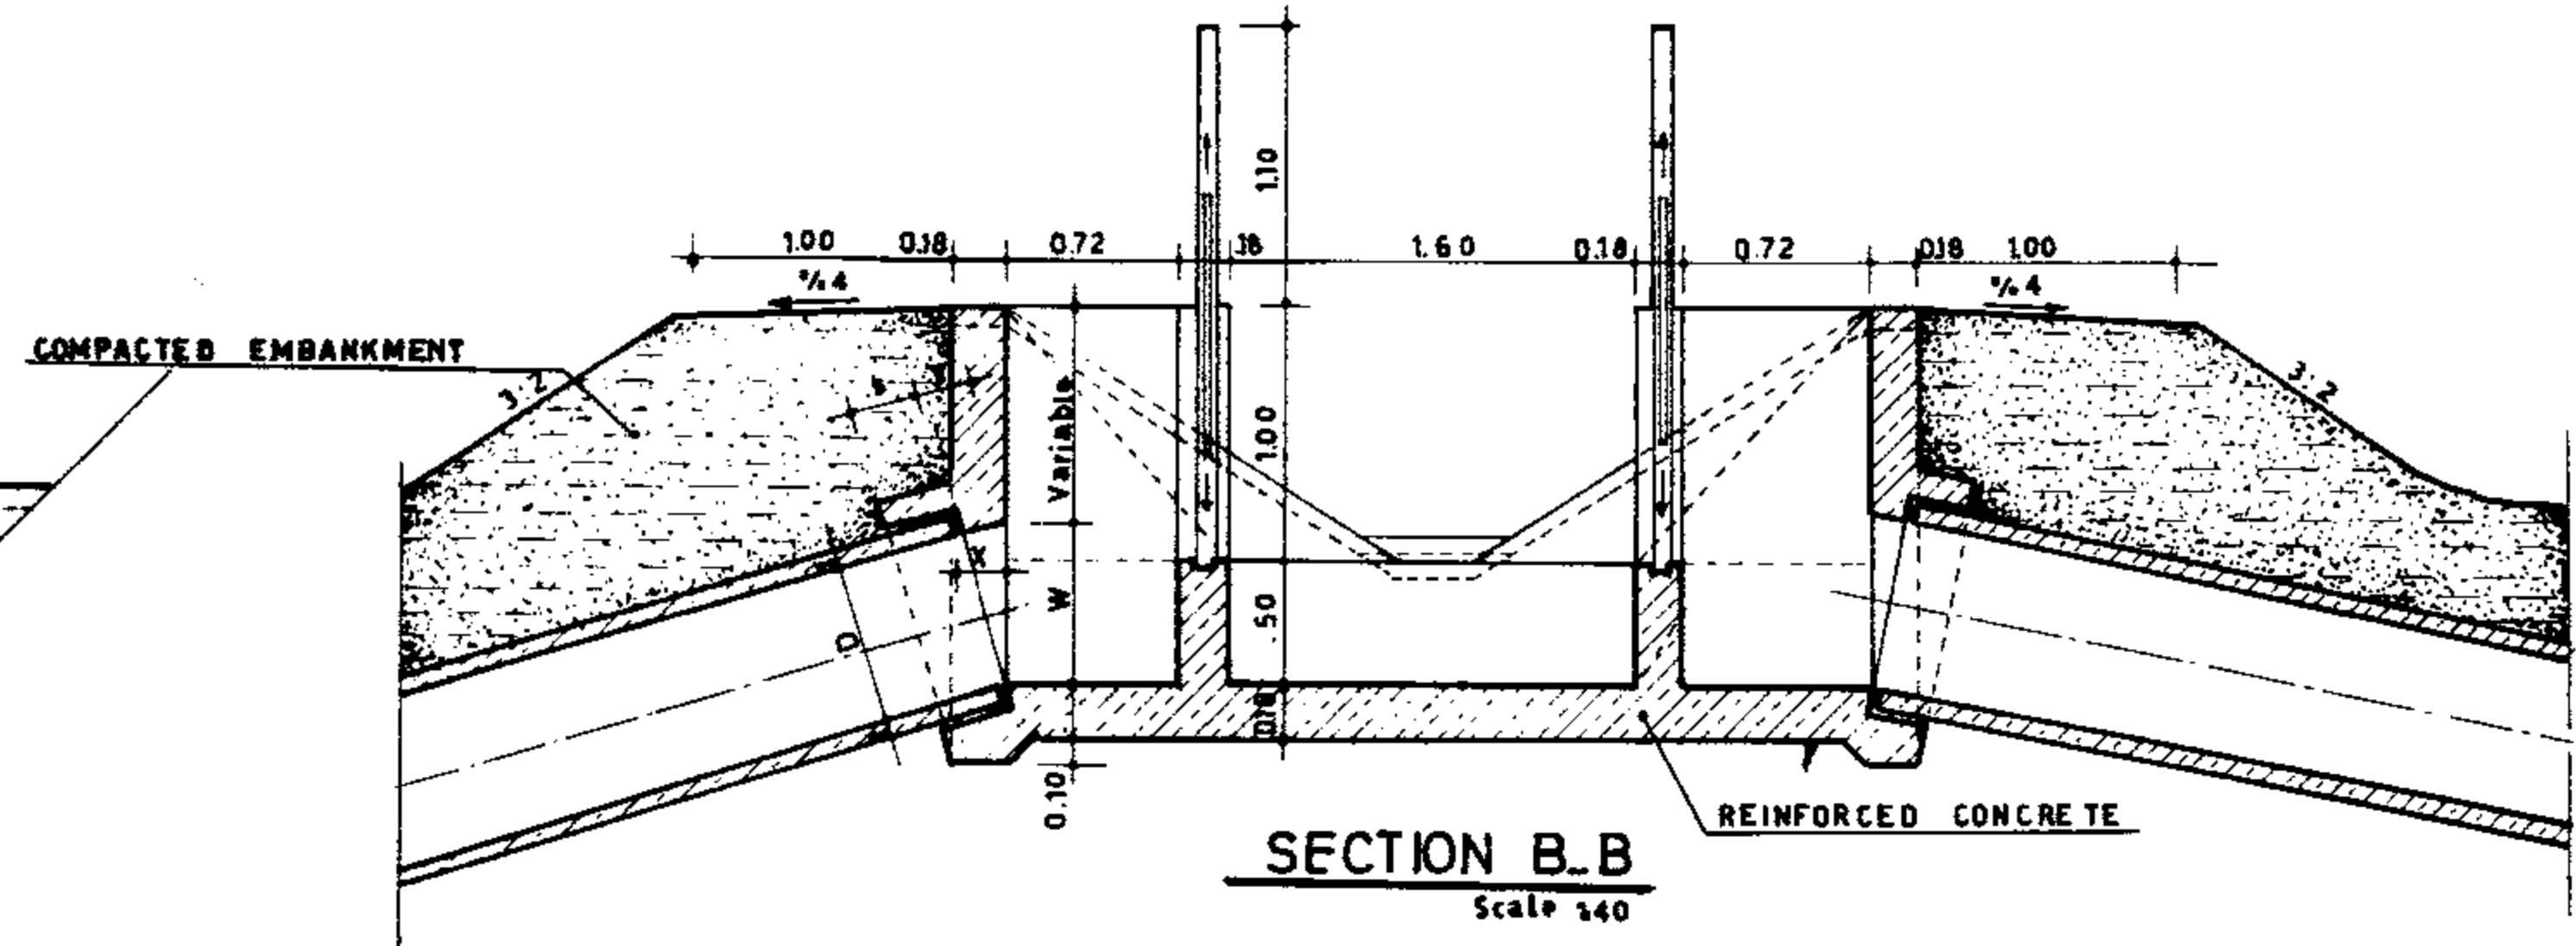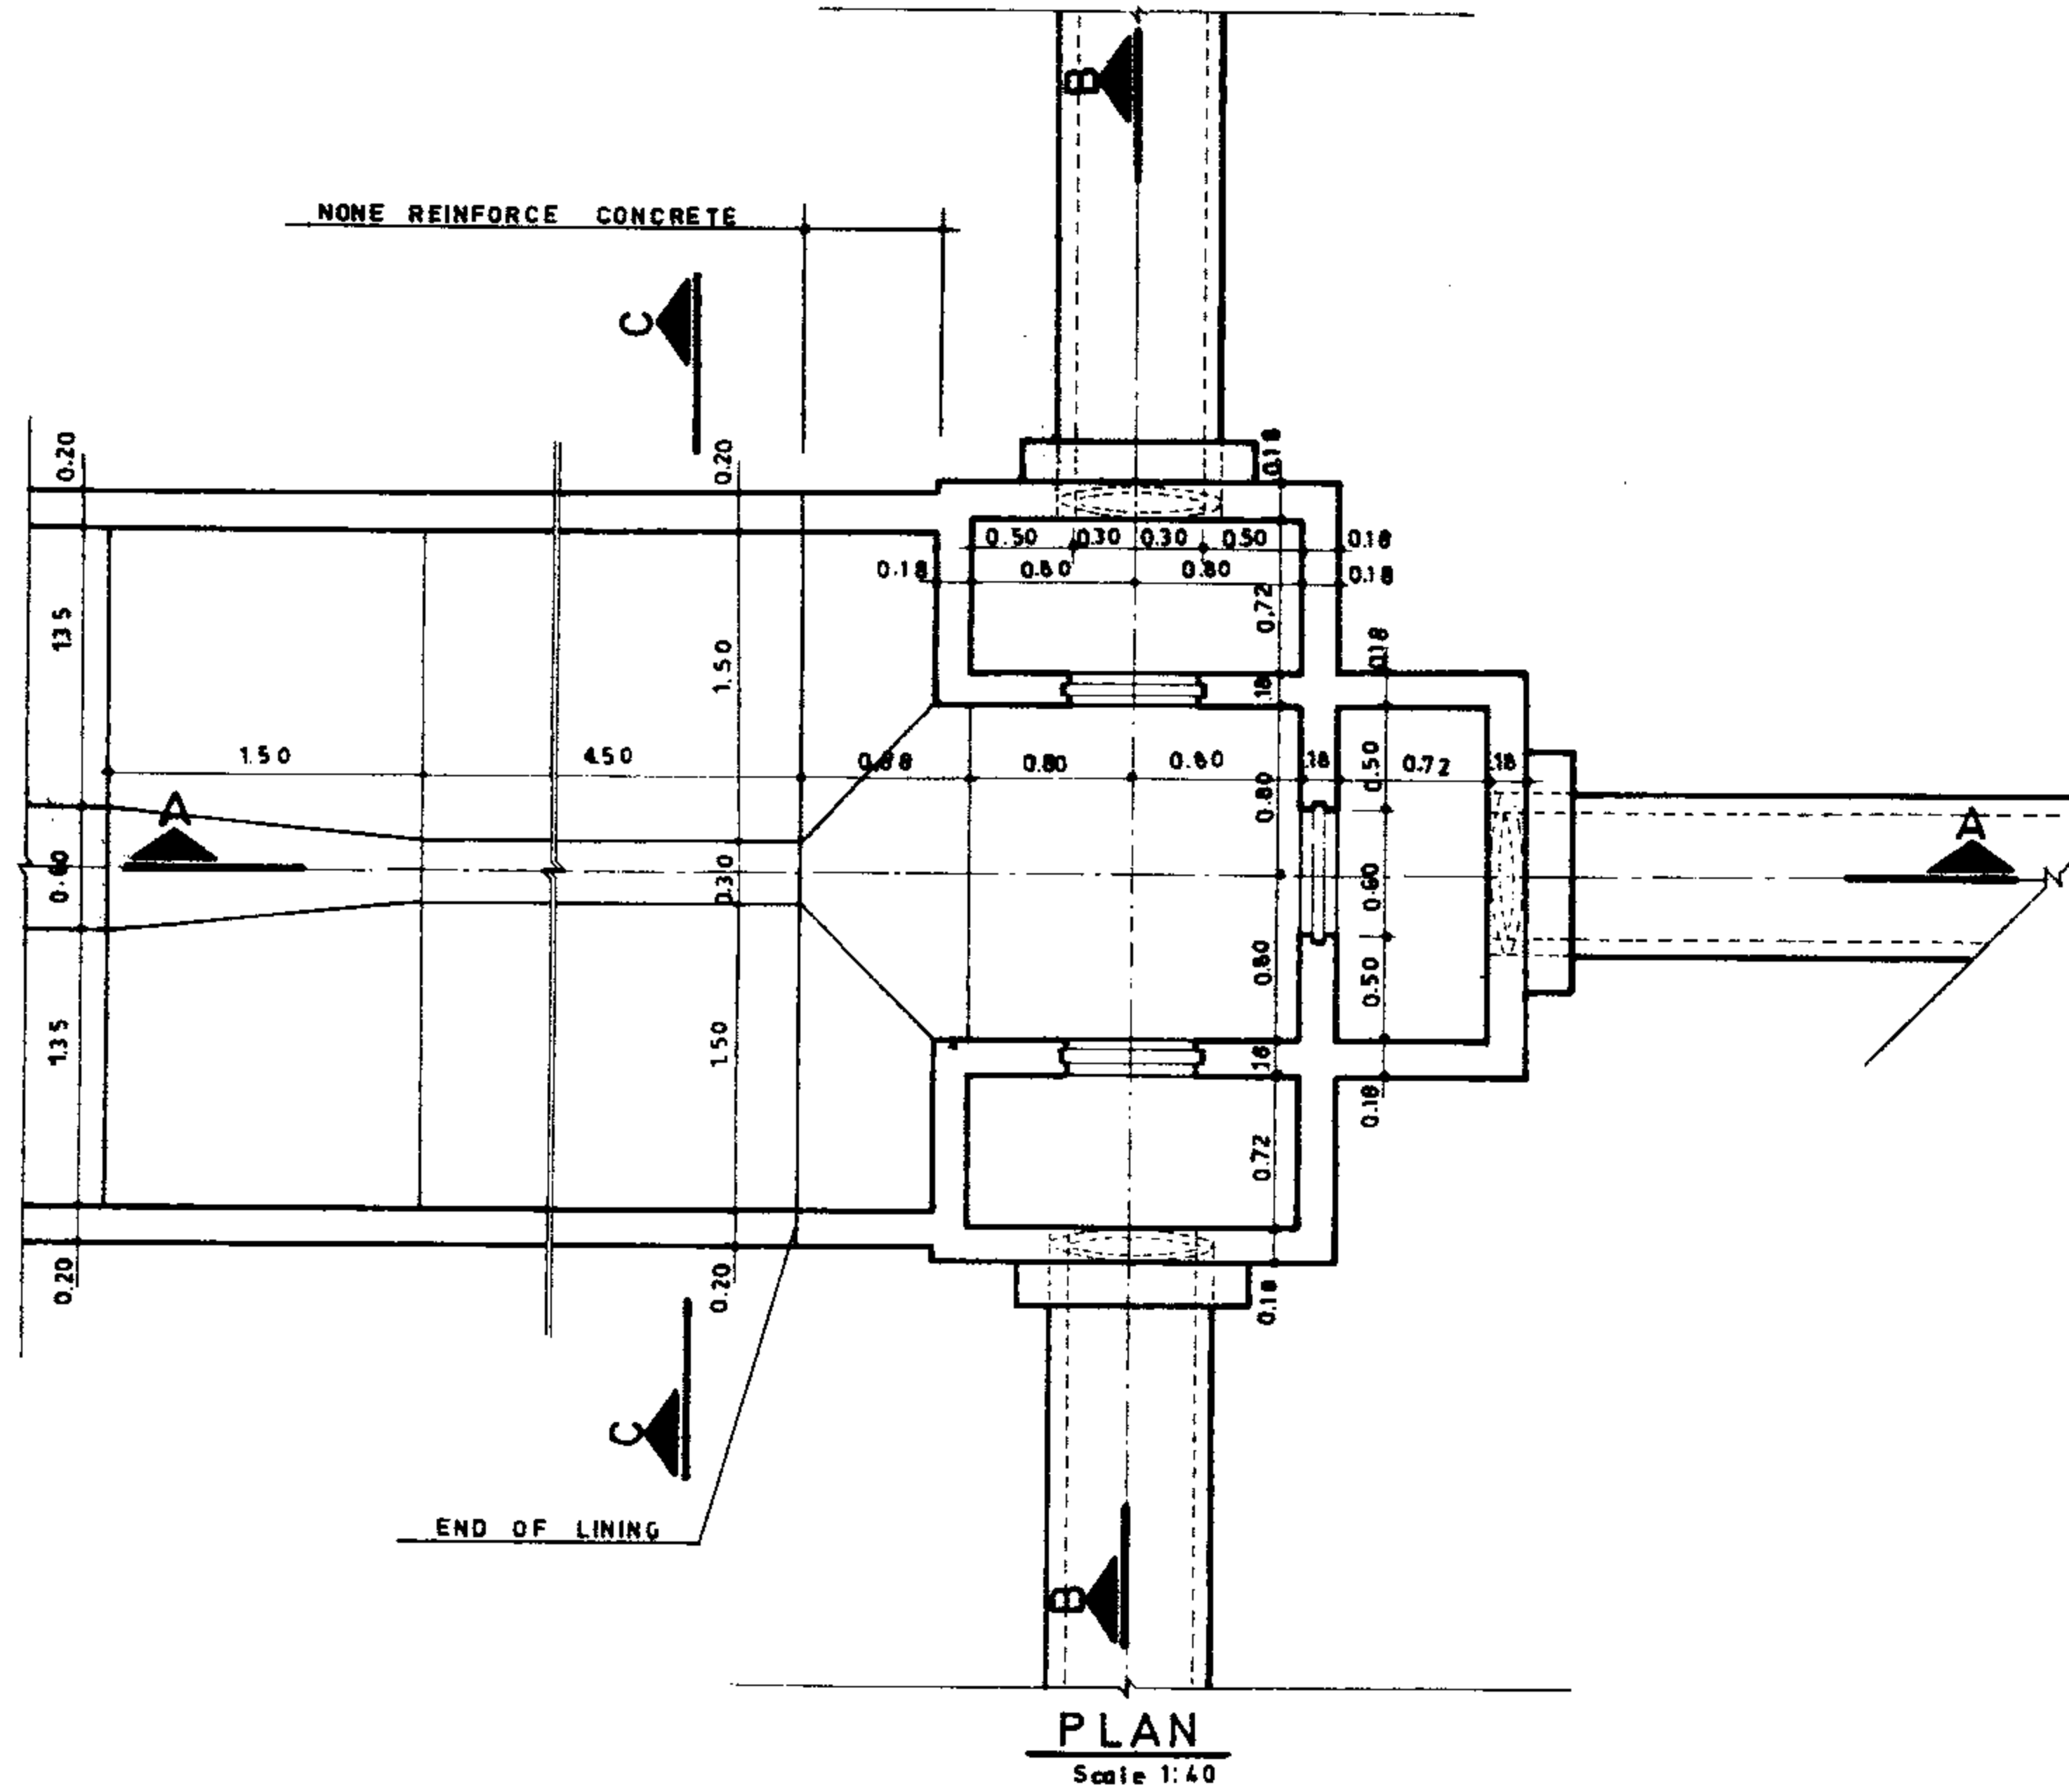


NOTE
See notes on dwg. N^o 12/7/1/01

REFERENCE DWGS. 1- FOR REINFORCEMENT SEE DWG. N ^o 17/1/1/07 2- FOR DETAIL AND DIMENSION OF PIPE CONNECTION SEE DWGS. N ^o 17/1/1/01 TO 17/1/1/03 3- FOR GENERAL NOTES SEE DWGS. N ^o 20/2/1/01 TO 20/2/1/03	Scale: 1:40	IRRIGATION & DRAINAGE STANDARDS		ISLAMIC REPUBLIC OF IRAN MINISTRY OF PLAN & BUDJET TECHNICAL RESEARCH AND STANDARD BUREAU
	Date:	DWG. N ^o 12/7/1/07		
	Approved:	Sheet N ^o 7 of 18	Rev. N ^o	

R/Bar. kg.	Conc. m ³	Form. m ²
284.26	6.46	49.12


SLIDE GATE	0.40×0.80	0.50×0.80	0.60×0.80	0.70×0.80	0.80×0.80
Q ^m (l/s)	320	400	480	560	540

* FOR V = 1.00 m/s

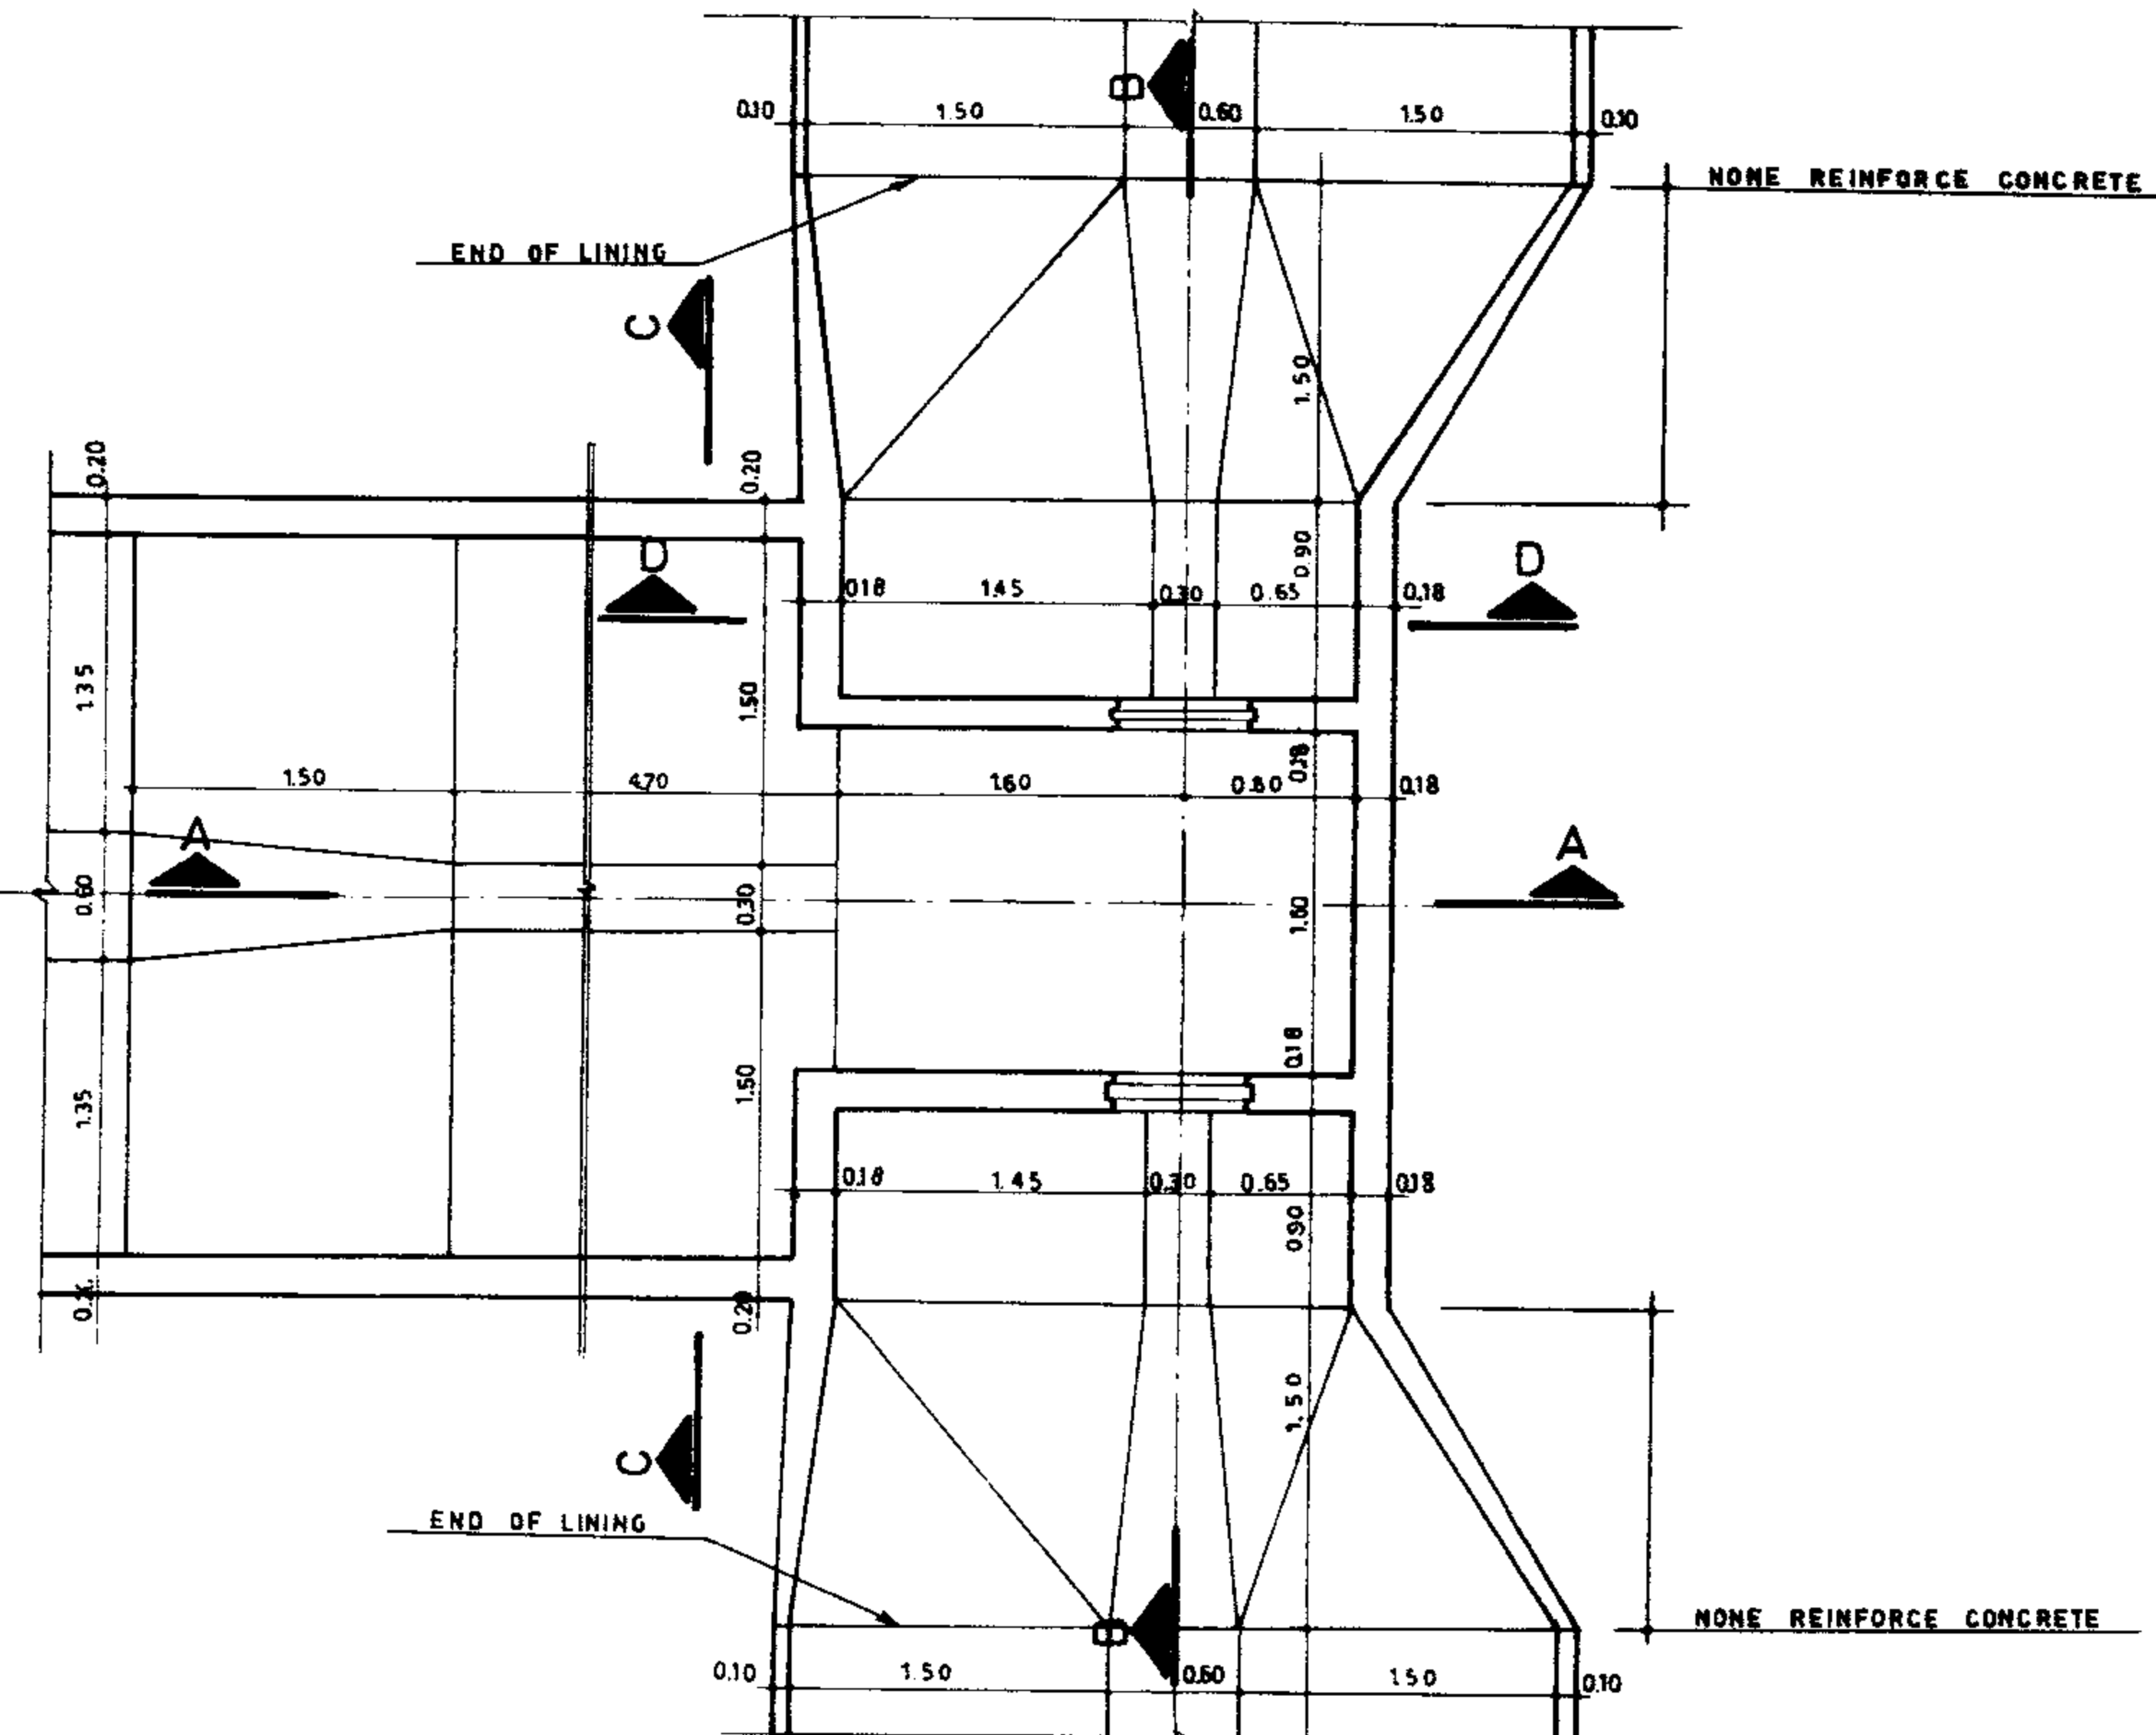


PLAN

Scale: 1:40

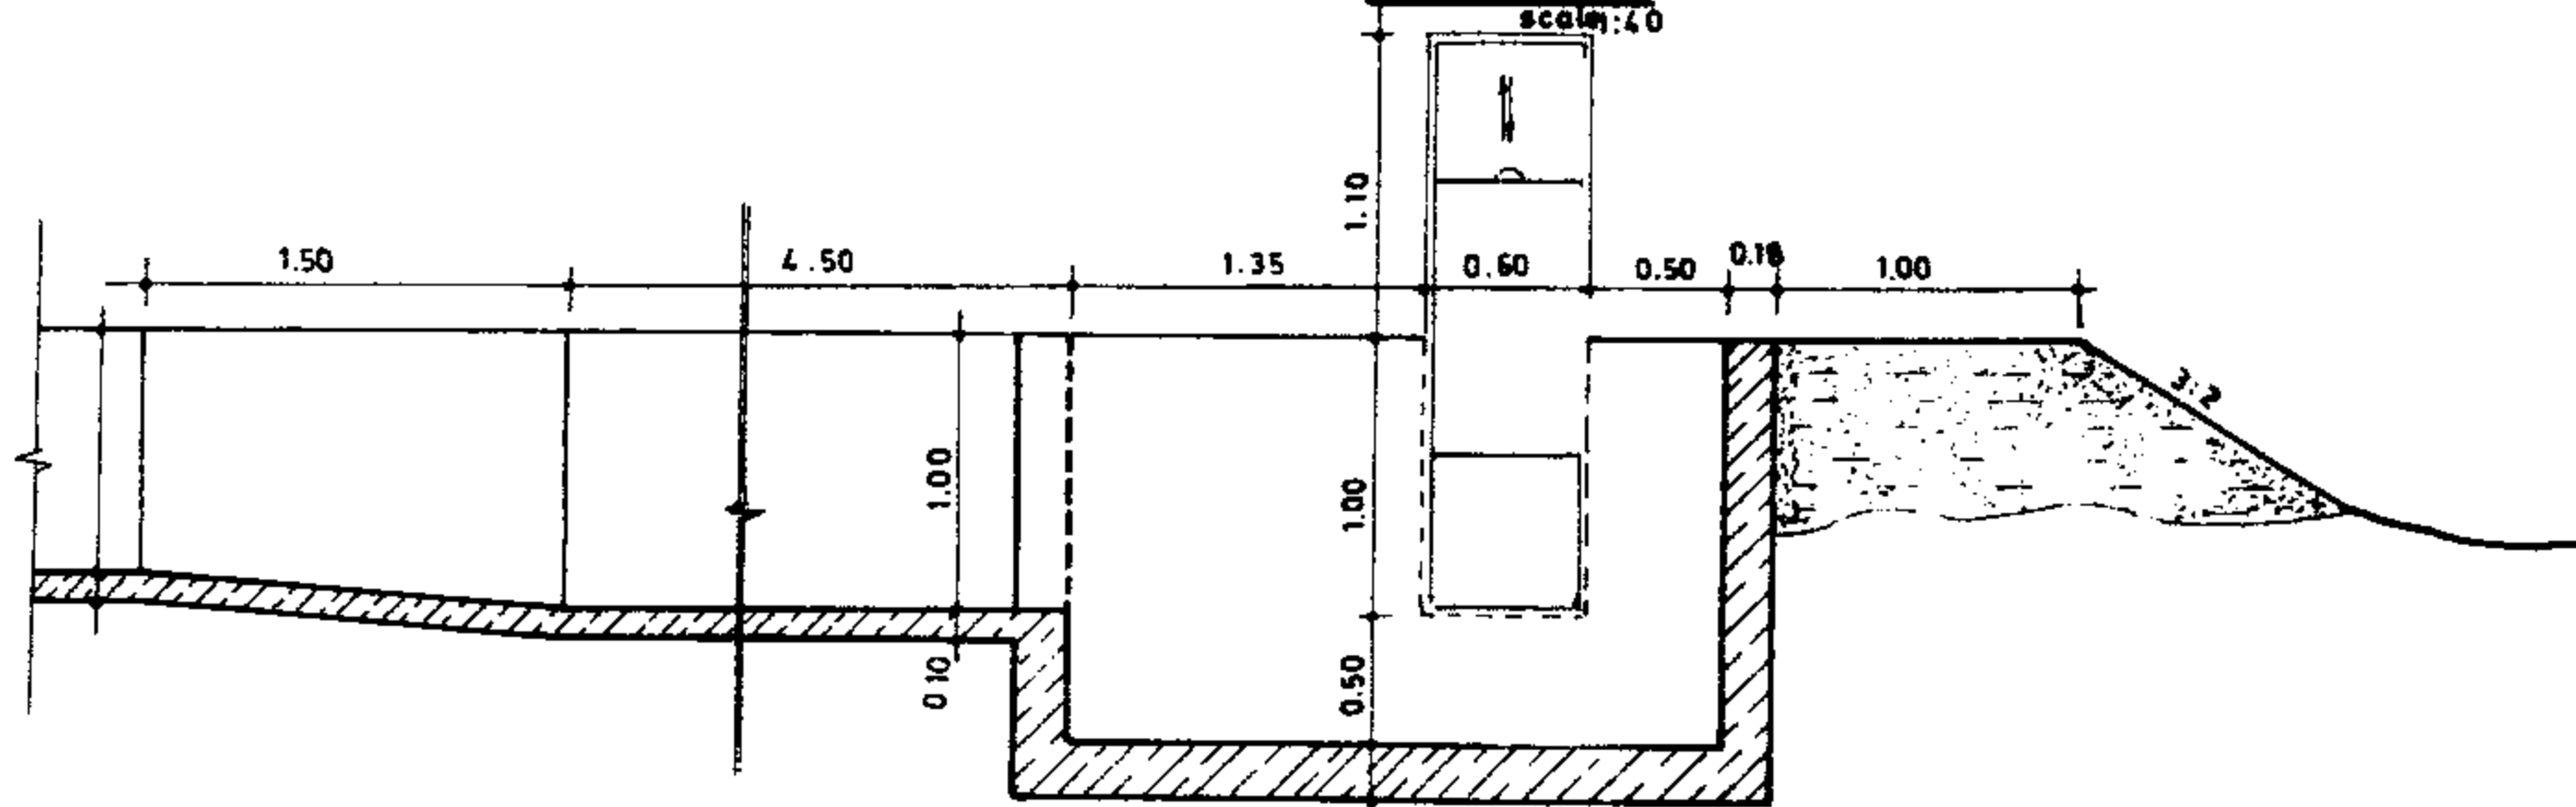


SECTION A-A

Scale: 1:40

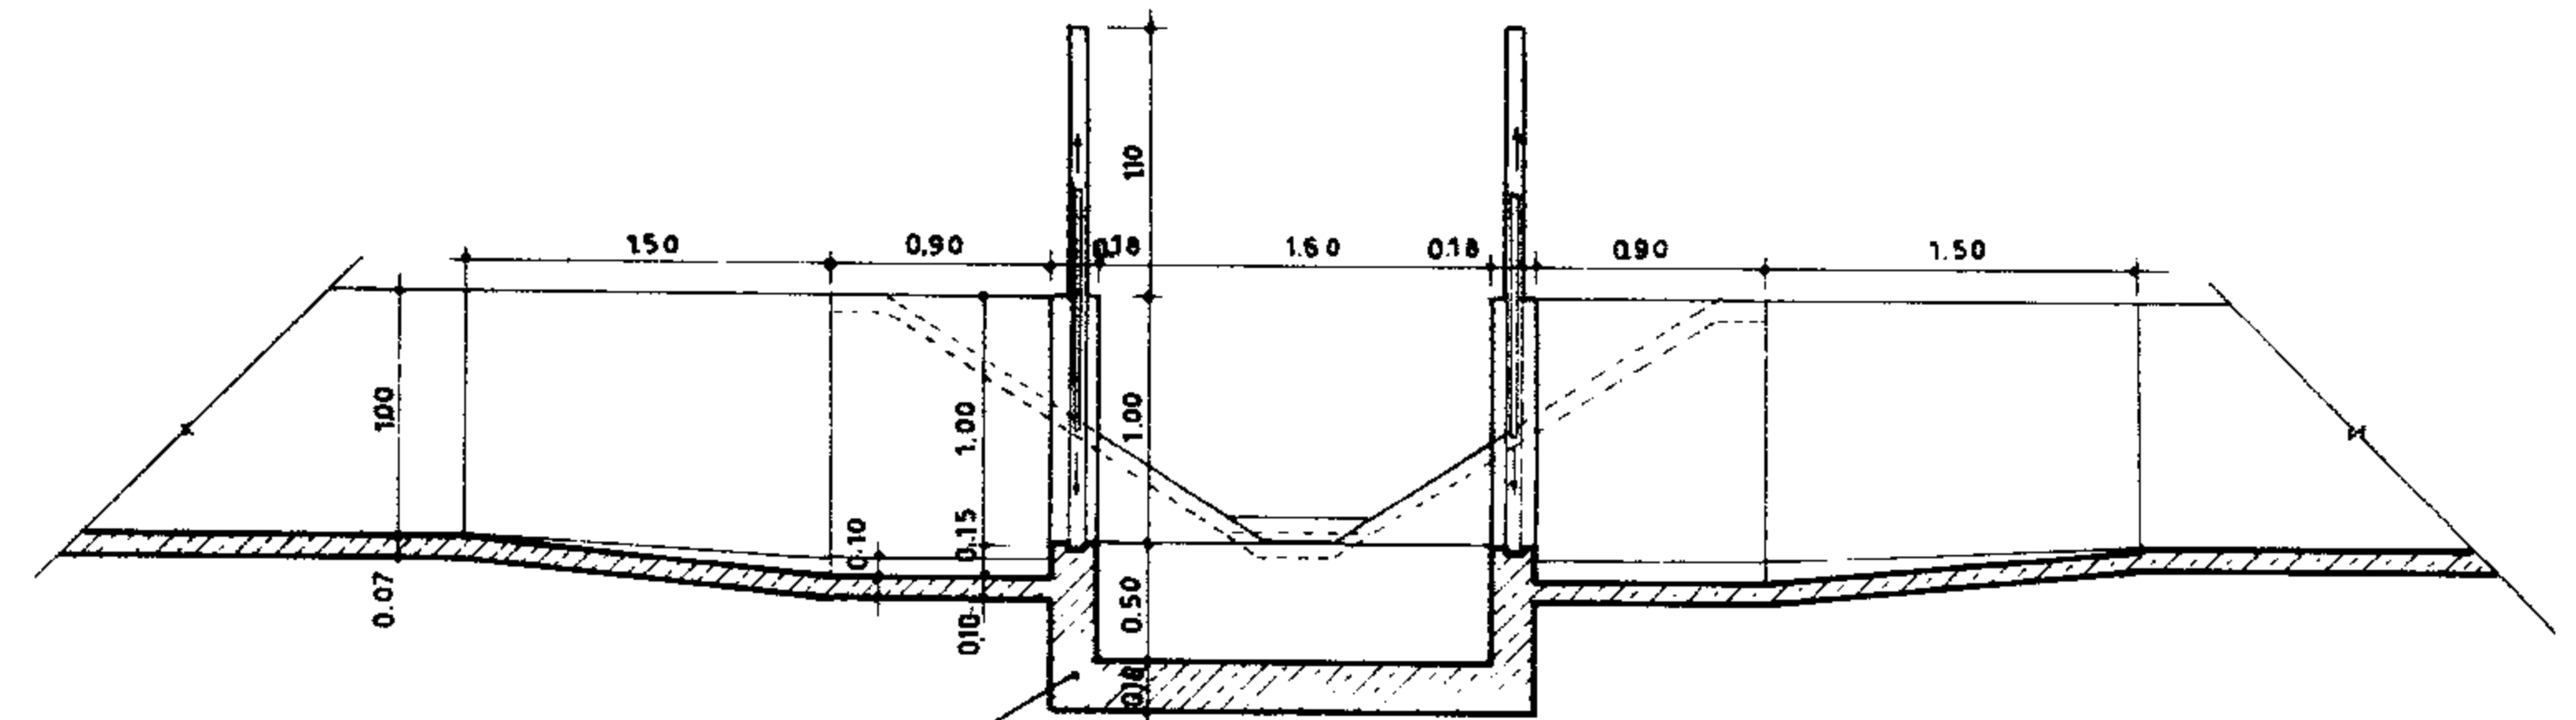


SECTION B-B

Scale 1:40

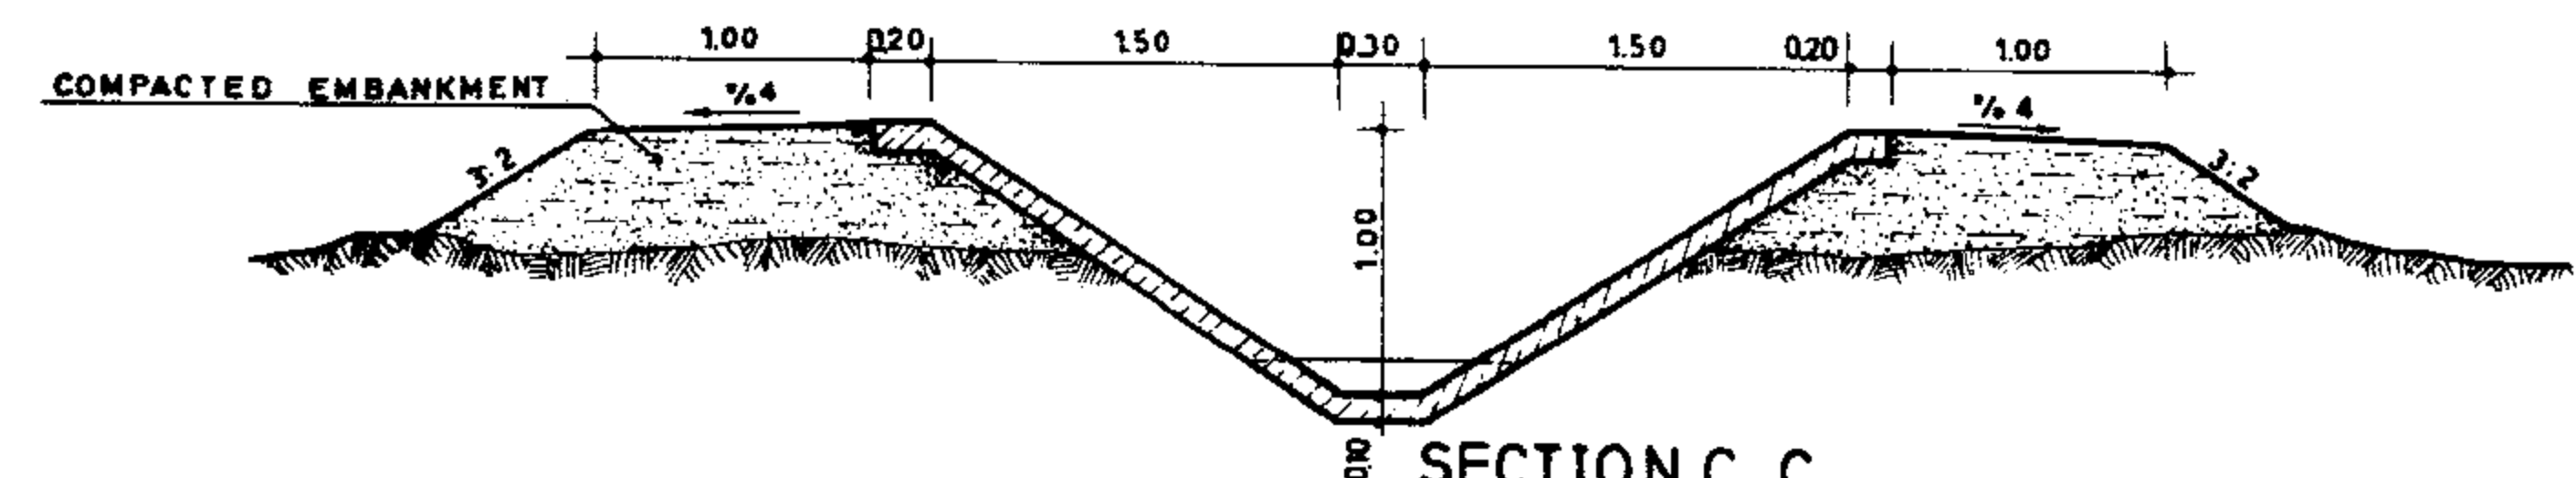

SECTION C-C

Scale 1:40

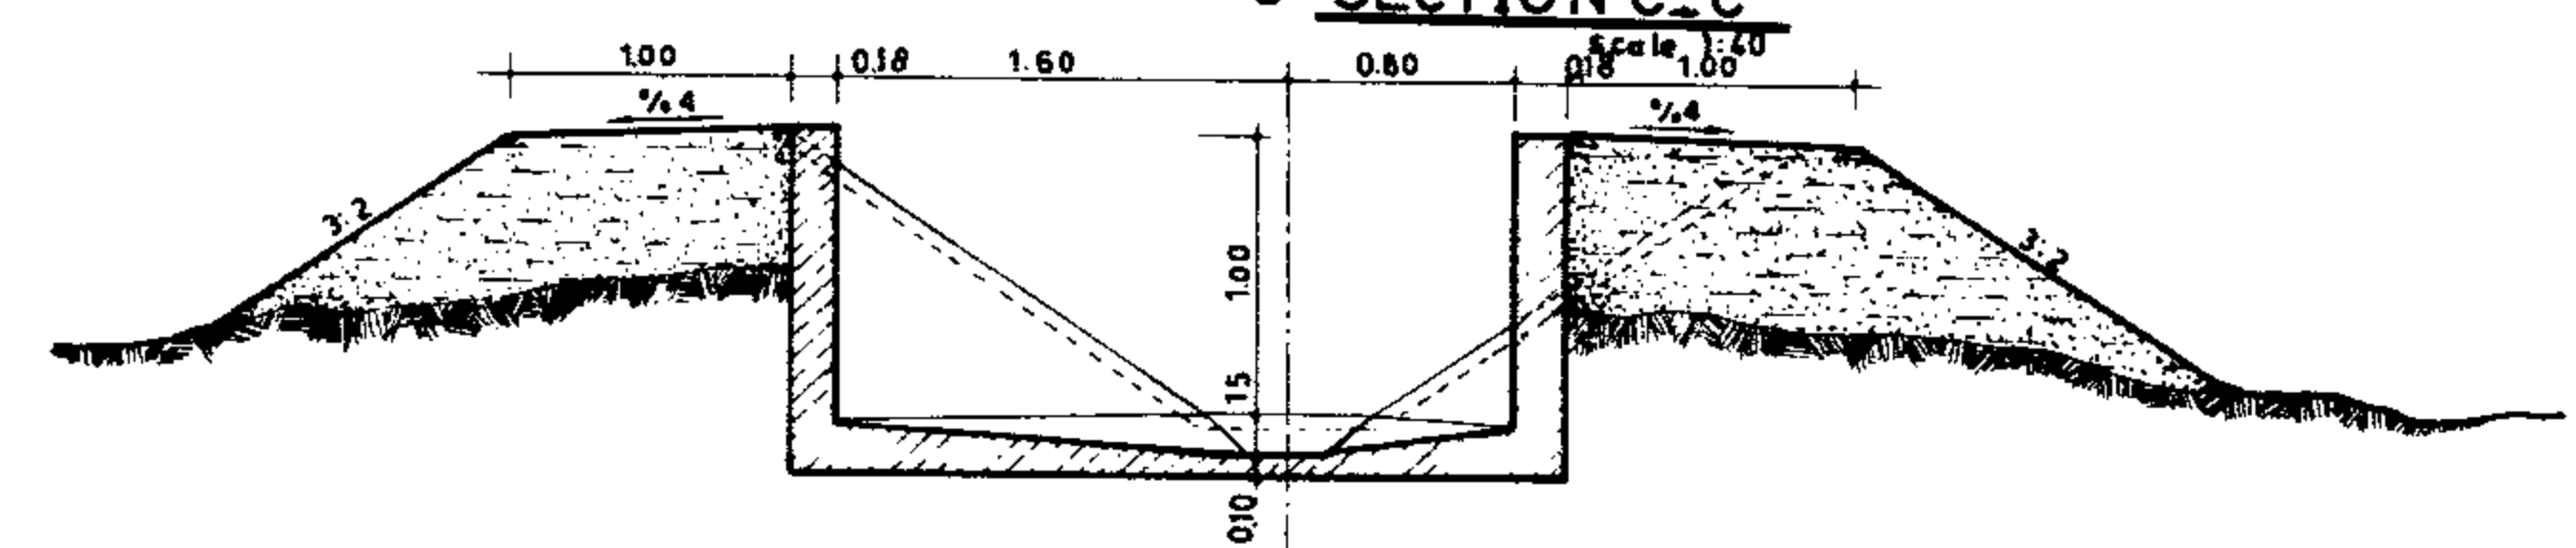

SECTION D-D

Scale 1:40

NOTE

See notes on dwg. No 12/7/1/01

REFERENCE DWGS.

- 1-FOR REINFORCEMENT SEE DWG. No. 12/7/1/08
- 2-FOR DETAIL AND DIMENSION OF PIPE CONNECTION SEE DWGS. No. 17/1/1/01 TO 17/1/1/03
- 3-FOR GENERAL NOTES SEE DWGS. No. 19/2/1/01 TO 20/2/1/03

Scale: 1:40

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG No 12/7/1/08

Approved:

Sheet No 8 of 18




Rev. No

DIVISION BOX (TYPE 8)


ISLAMIC REPUBLIC OF IRAN

MINISTRY OF PLAN & BUDJET



TECHNICAL RESEARCH AND
STANDARD BUREAU

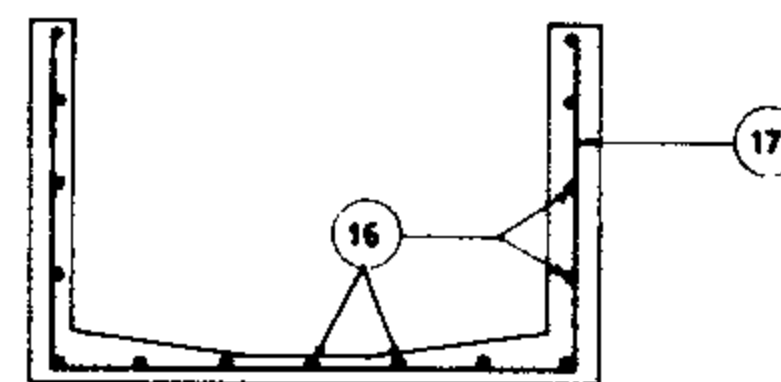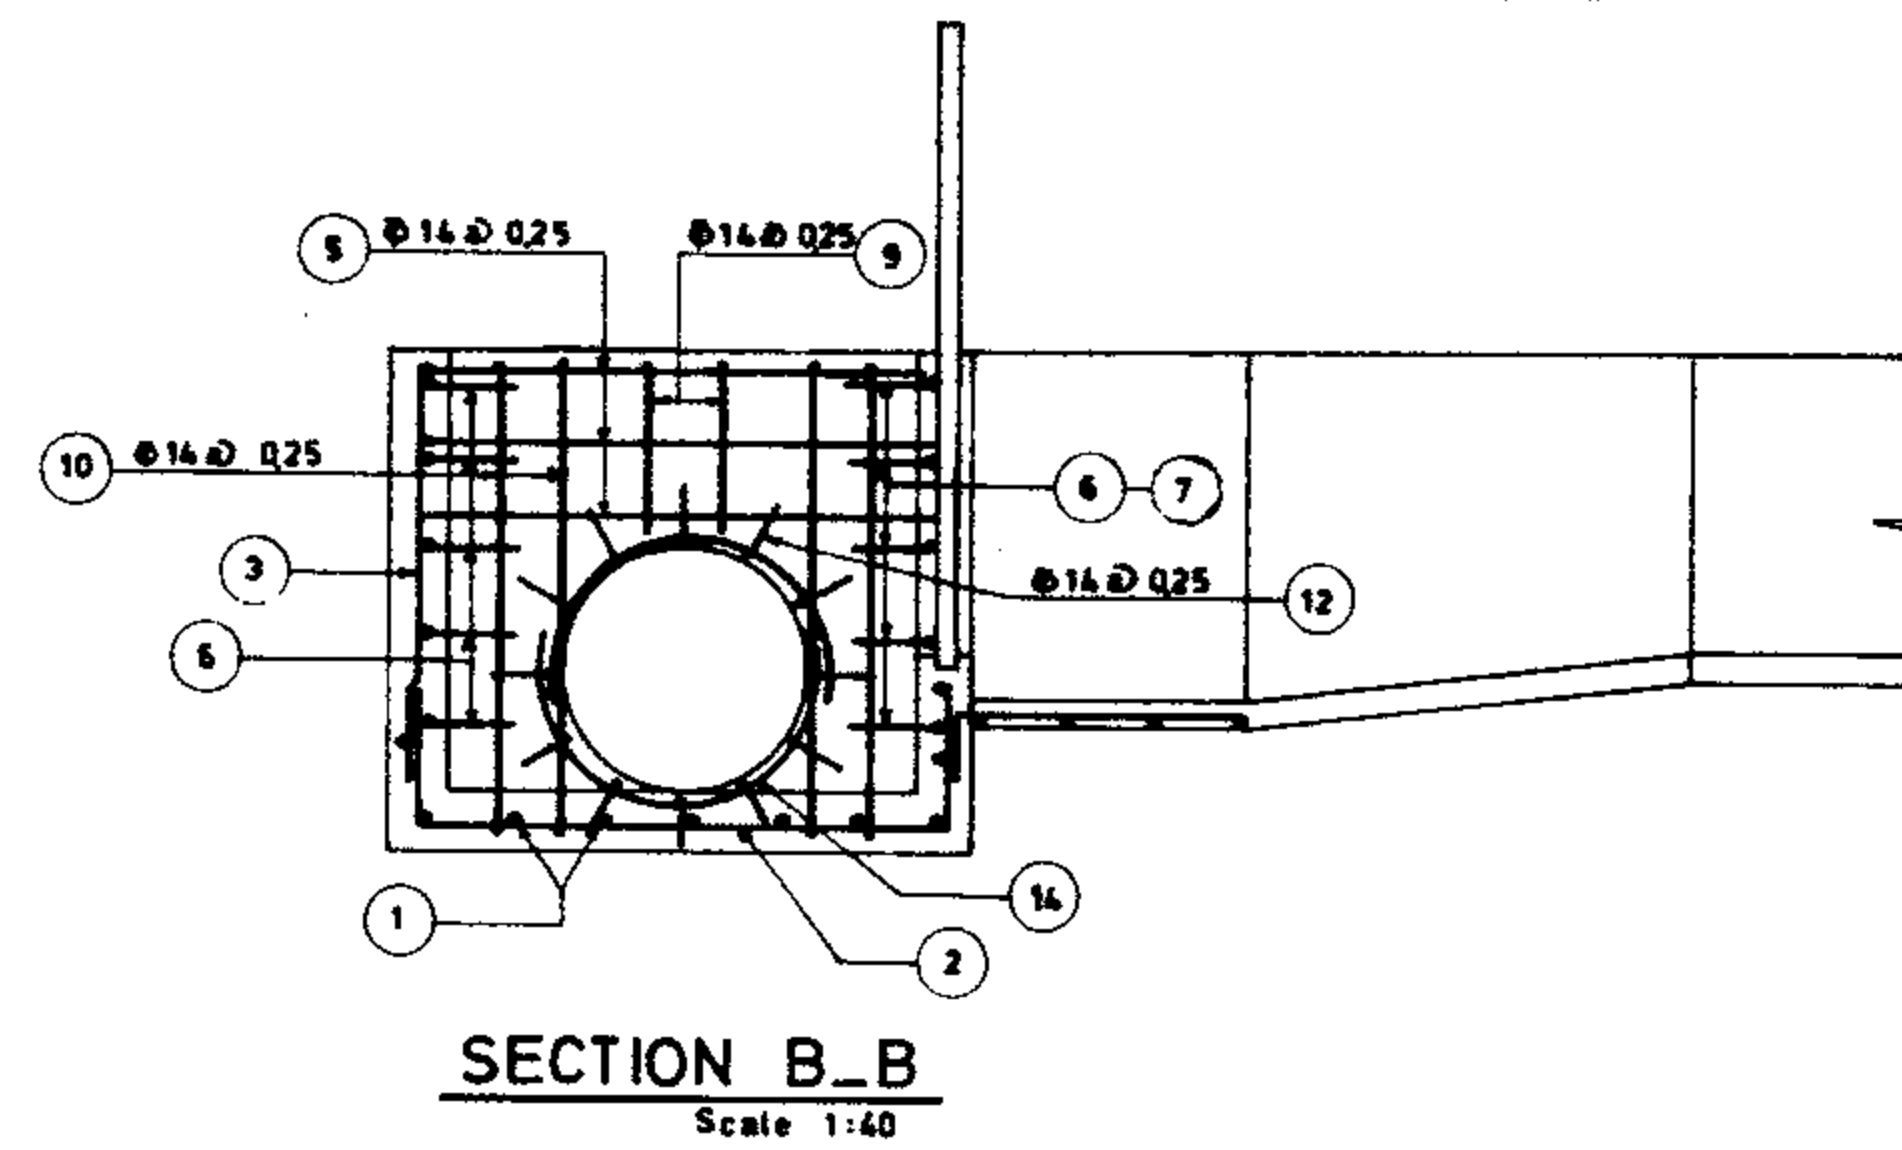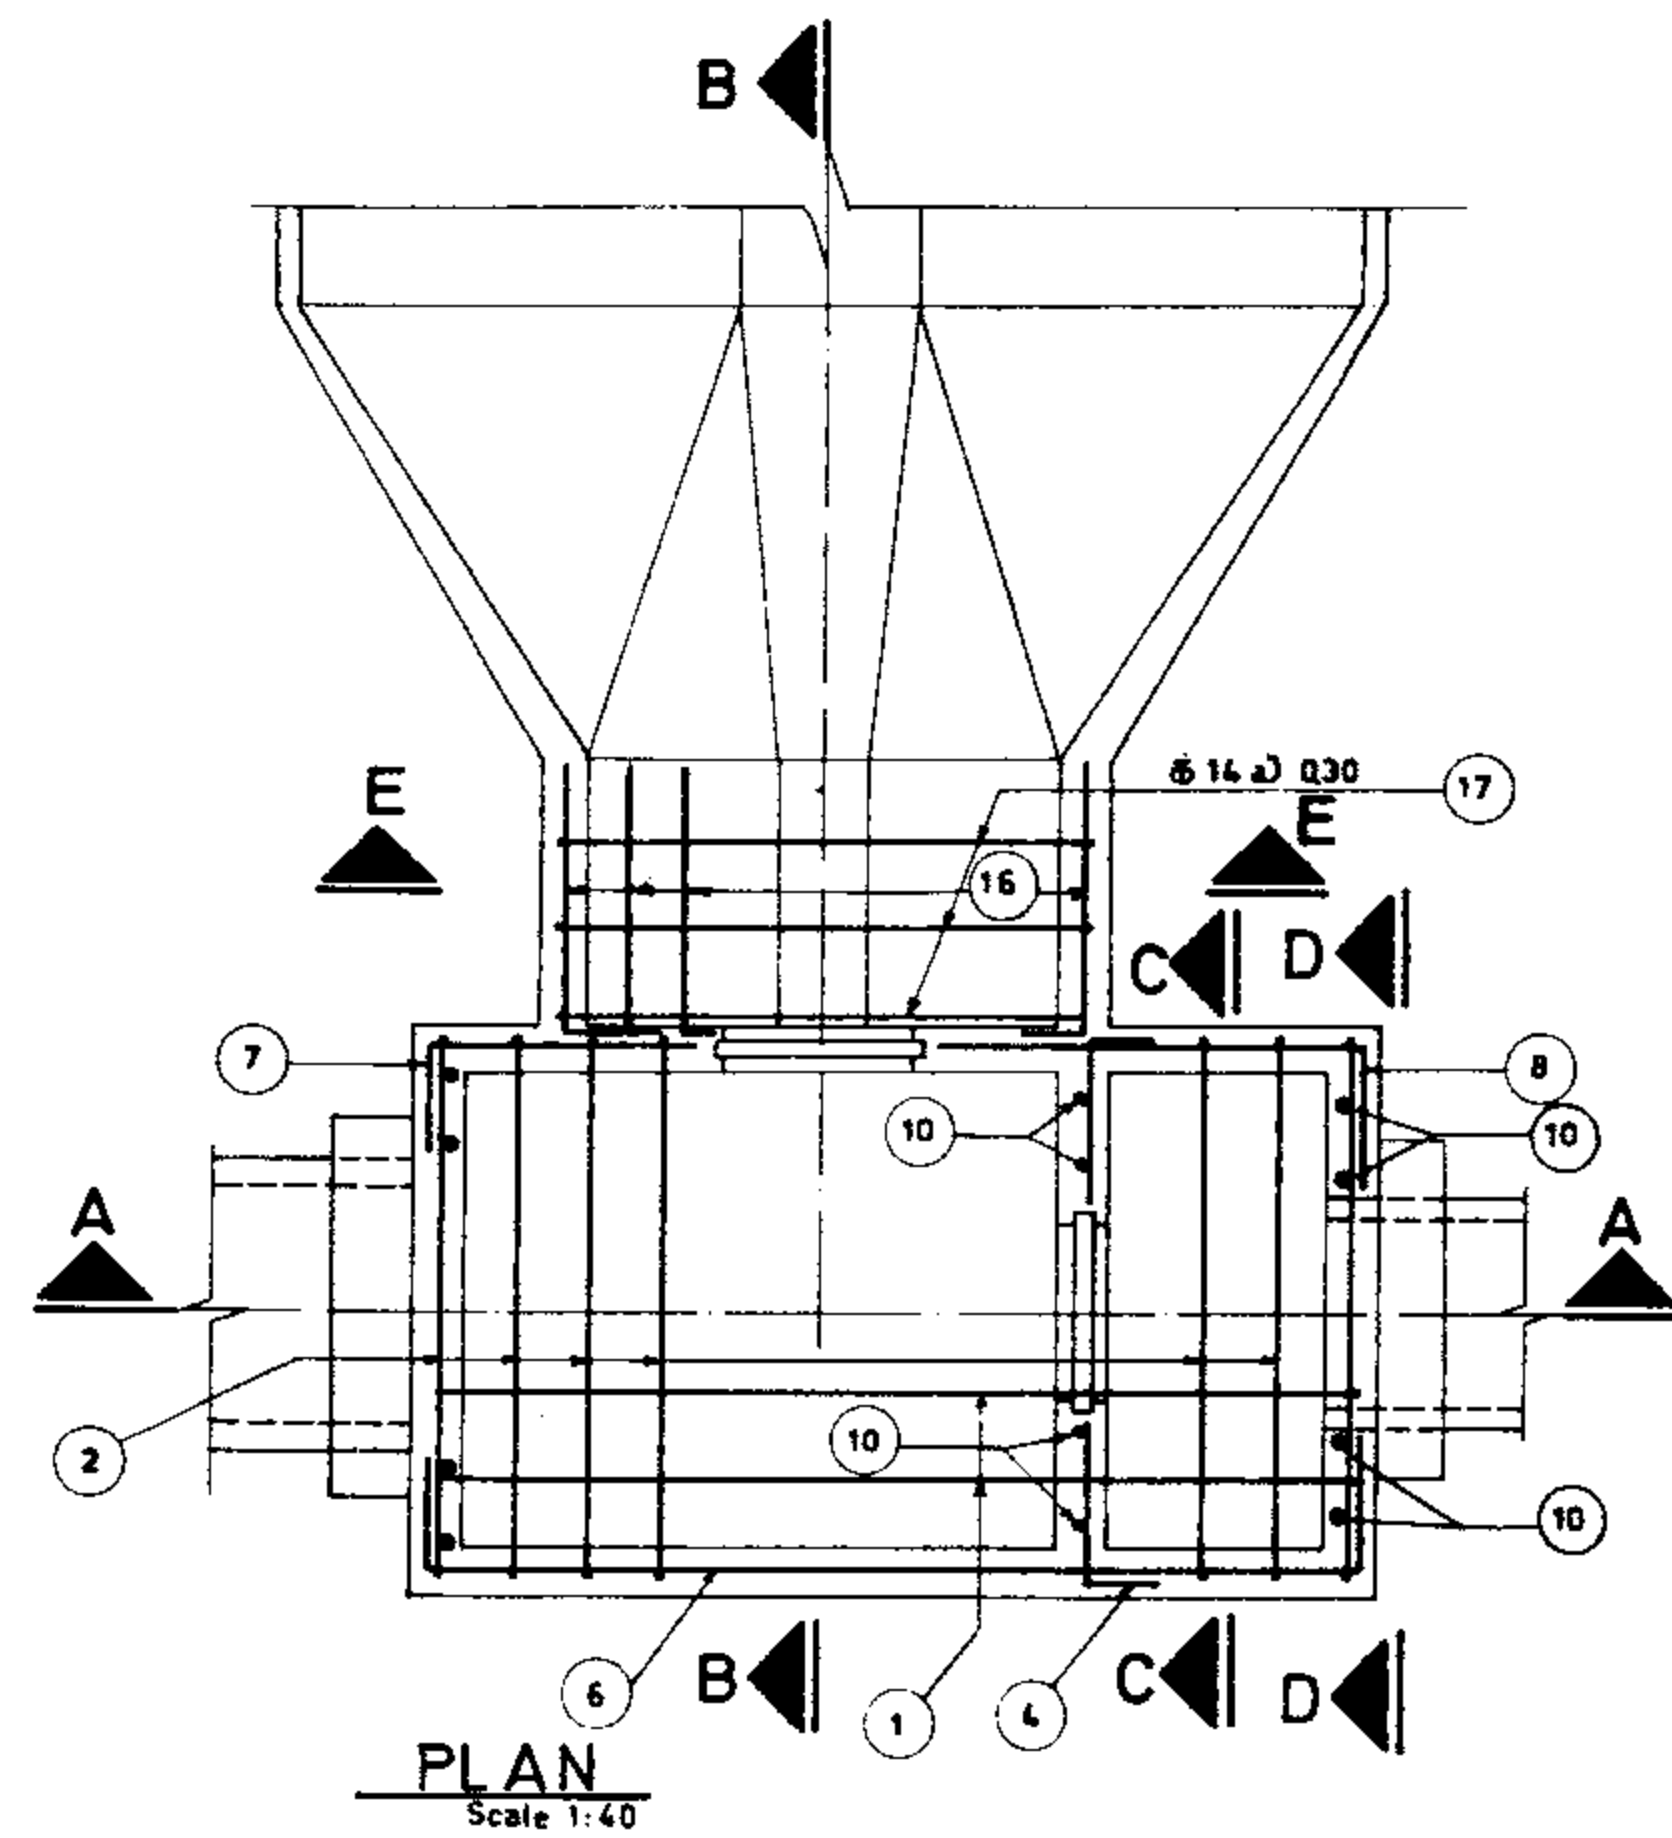


SECTION E-E
Scale 1:40

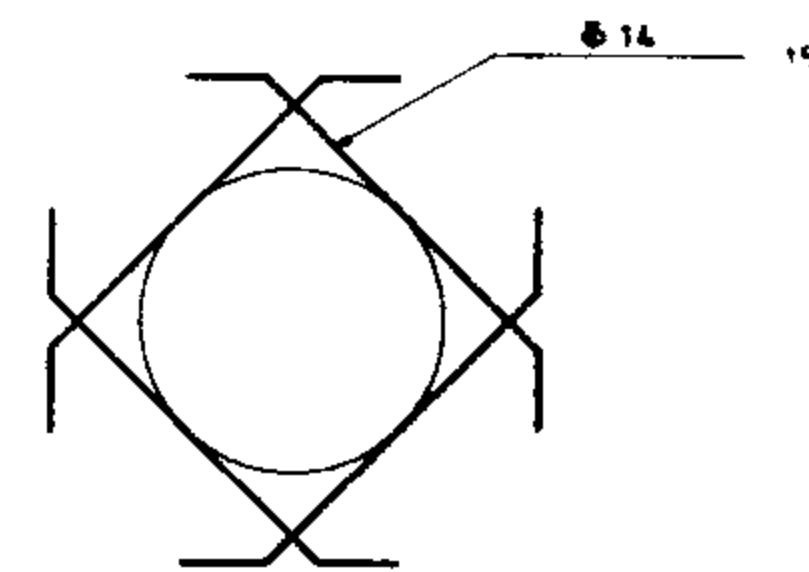

SECTION D-D
Scale 1:40

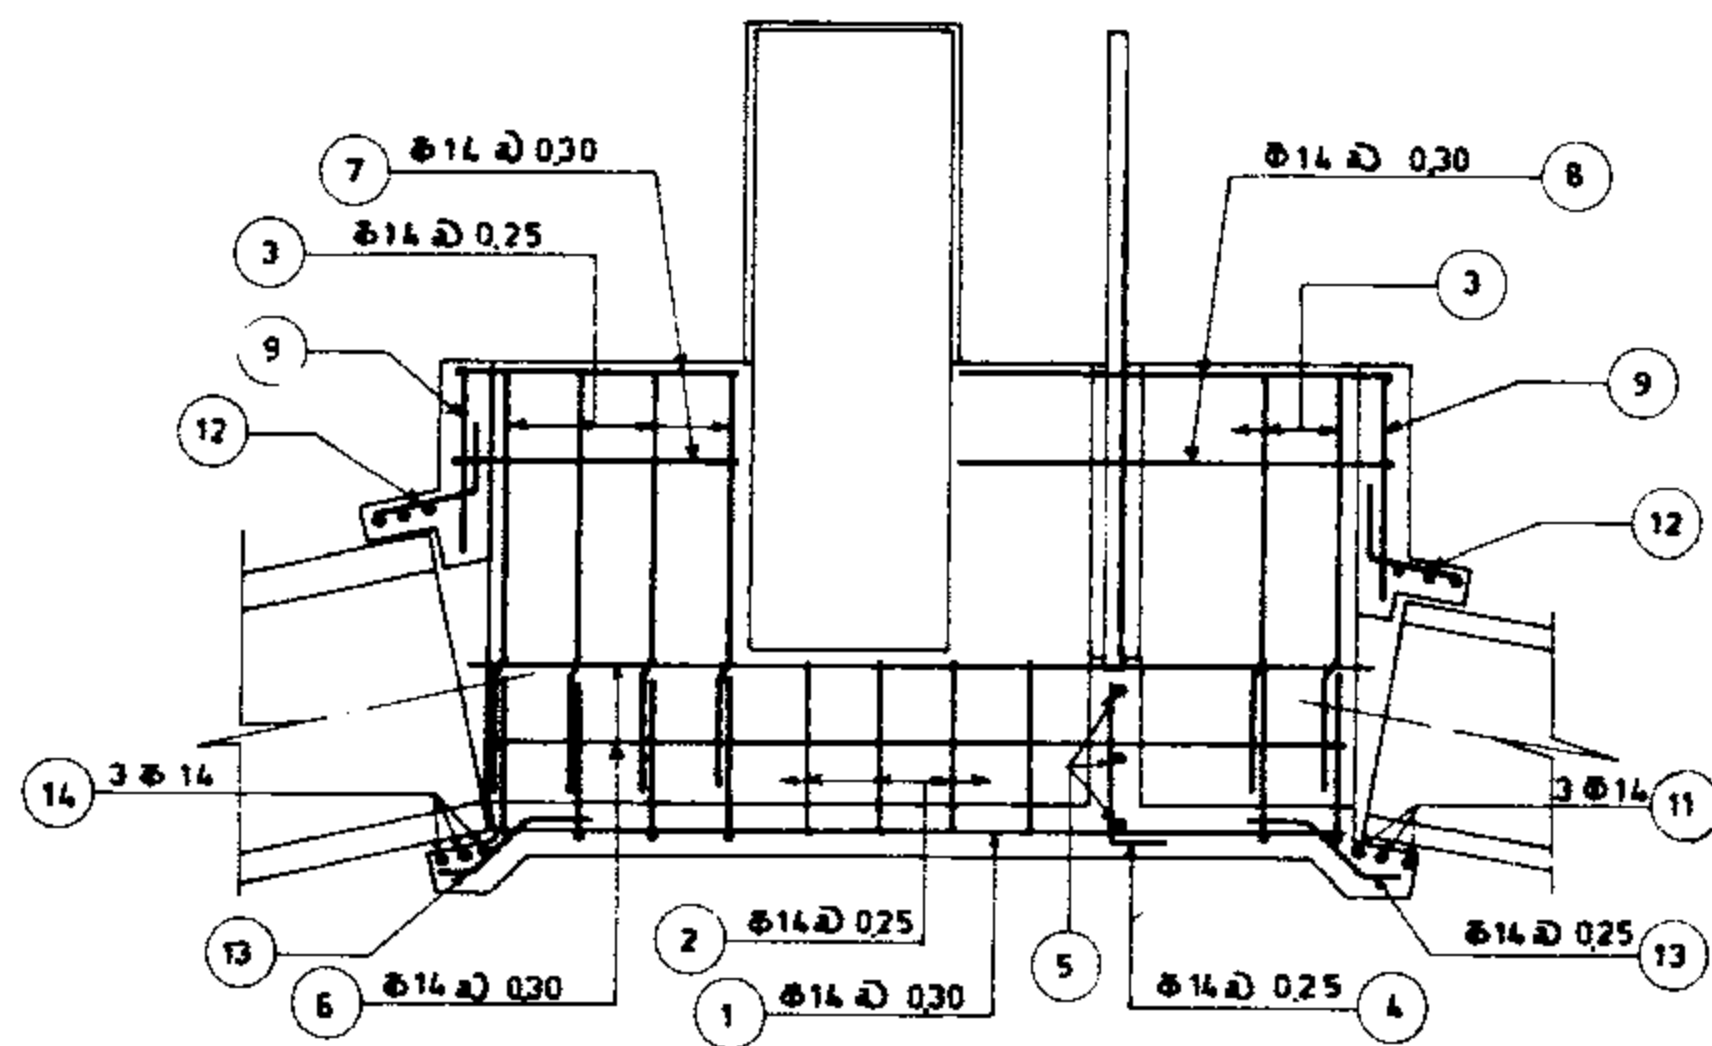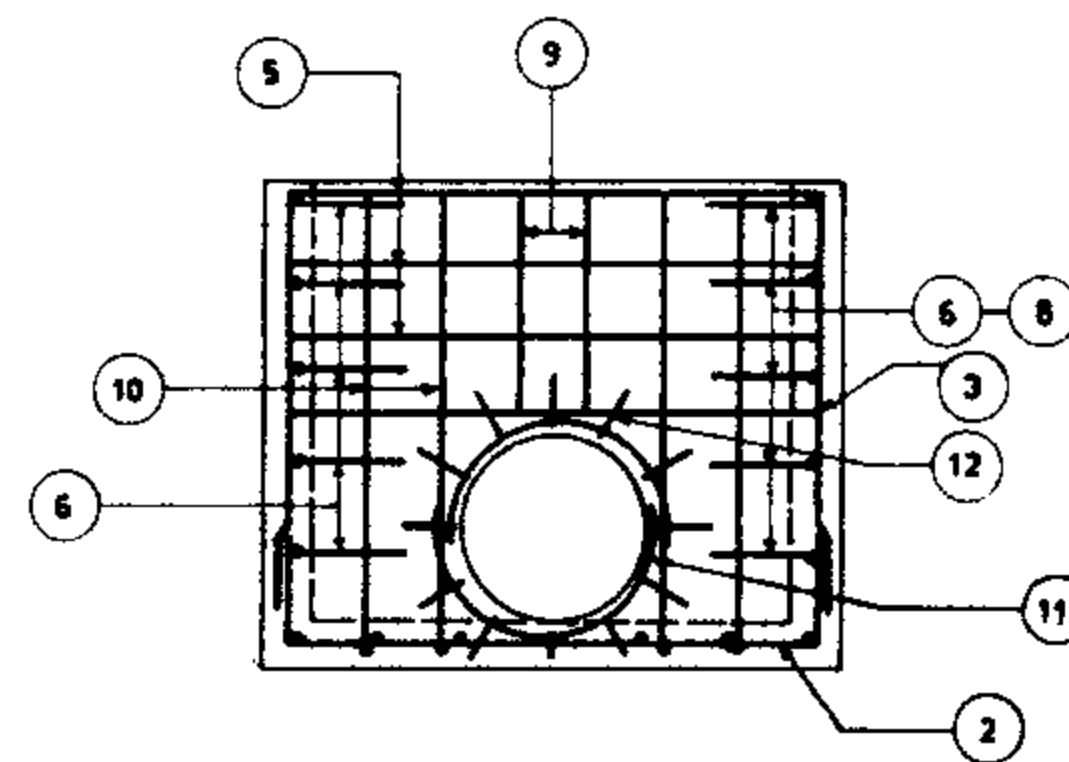

SECTION A-A
Scale 1:40

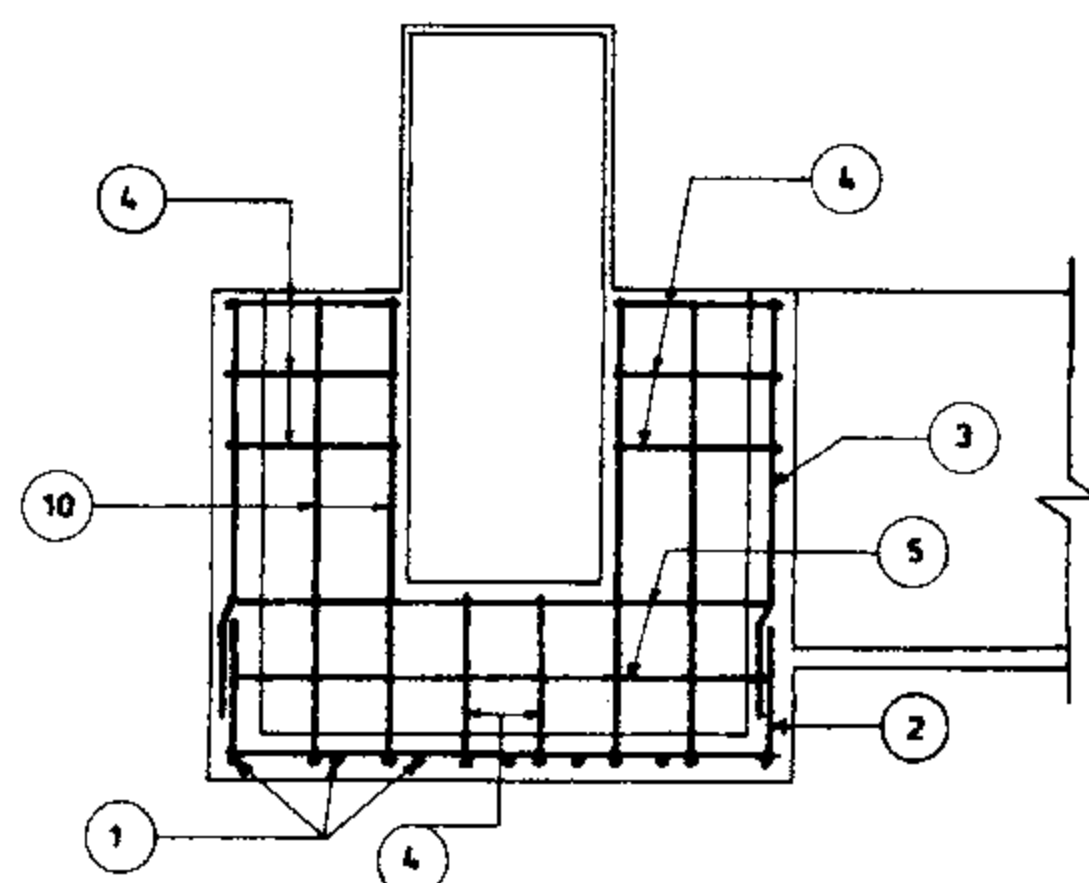

SECTION C-C
Scale 1:40

ALL BARS ARE $\phi 14 (1.21 \text{ kg/m})$

POS.	Nº	FORM	UNIT LENG.	TOTAL LENG.
1	8	2.80	2.80	2240
2	13	0.55 1.81 0.55	2.91	3783
3	24	1.45	1.45	3480
4	12	0.55 0.20	0.75	900
5	10	0.20 1.81 0.20	2.21	22.10
6	8	0.35 3.08 0.45	3.88	31.04
7	4	0.92	1.27	508
8	4	0.45 1.45	1.90	7.60
9	8	0.50	0.50	4.00
10	12	0.20 1.55	1.75	21.00
11	3	0.40 0.40	0.80	3.79
12	24	0.50 0.30	0.80	19.20
13	8	0.75	0.75	6.00
14	3	0.40 0.40	0.80	4.66
15	8	0.20 1.15 0.20	1.55	12.40
16	16	0.30 1.05	1.35	21.60
17	3	1.15 1.81 1.15	4.11	12.33
			291.73	
291.73		x	121	= 352.99 kg

REFERENCE DWGS. FOR PLAN & SECTION SEE DWG. Nº 12/7/1/01

Scale: 1:40

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG. Nº 12/7/3/01


Approved:

Sheet Nº 10 of 18


Rev. Nº

DIVISION BOX (TYPE 1)
REINFORCEMENT


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU

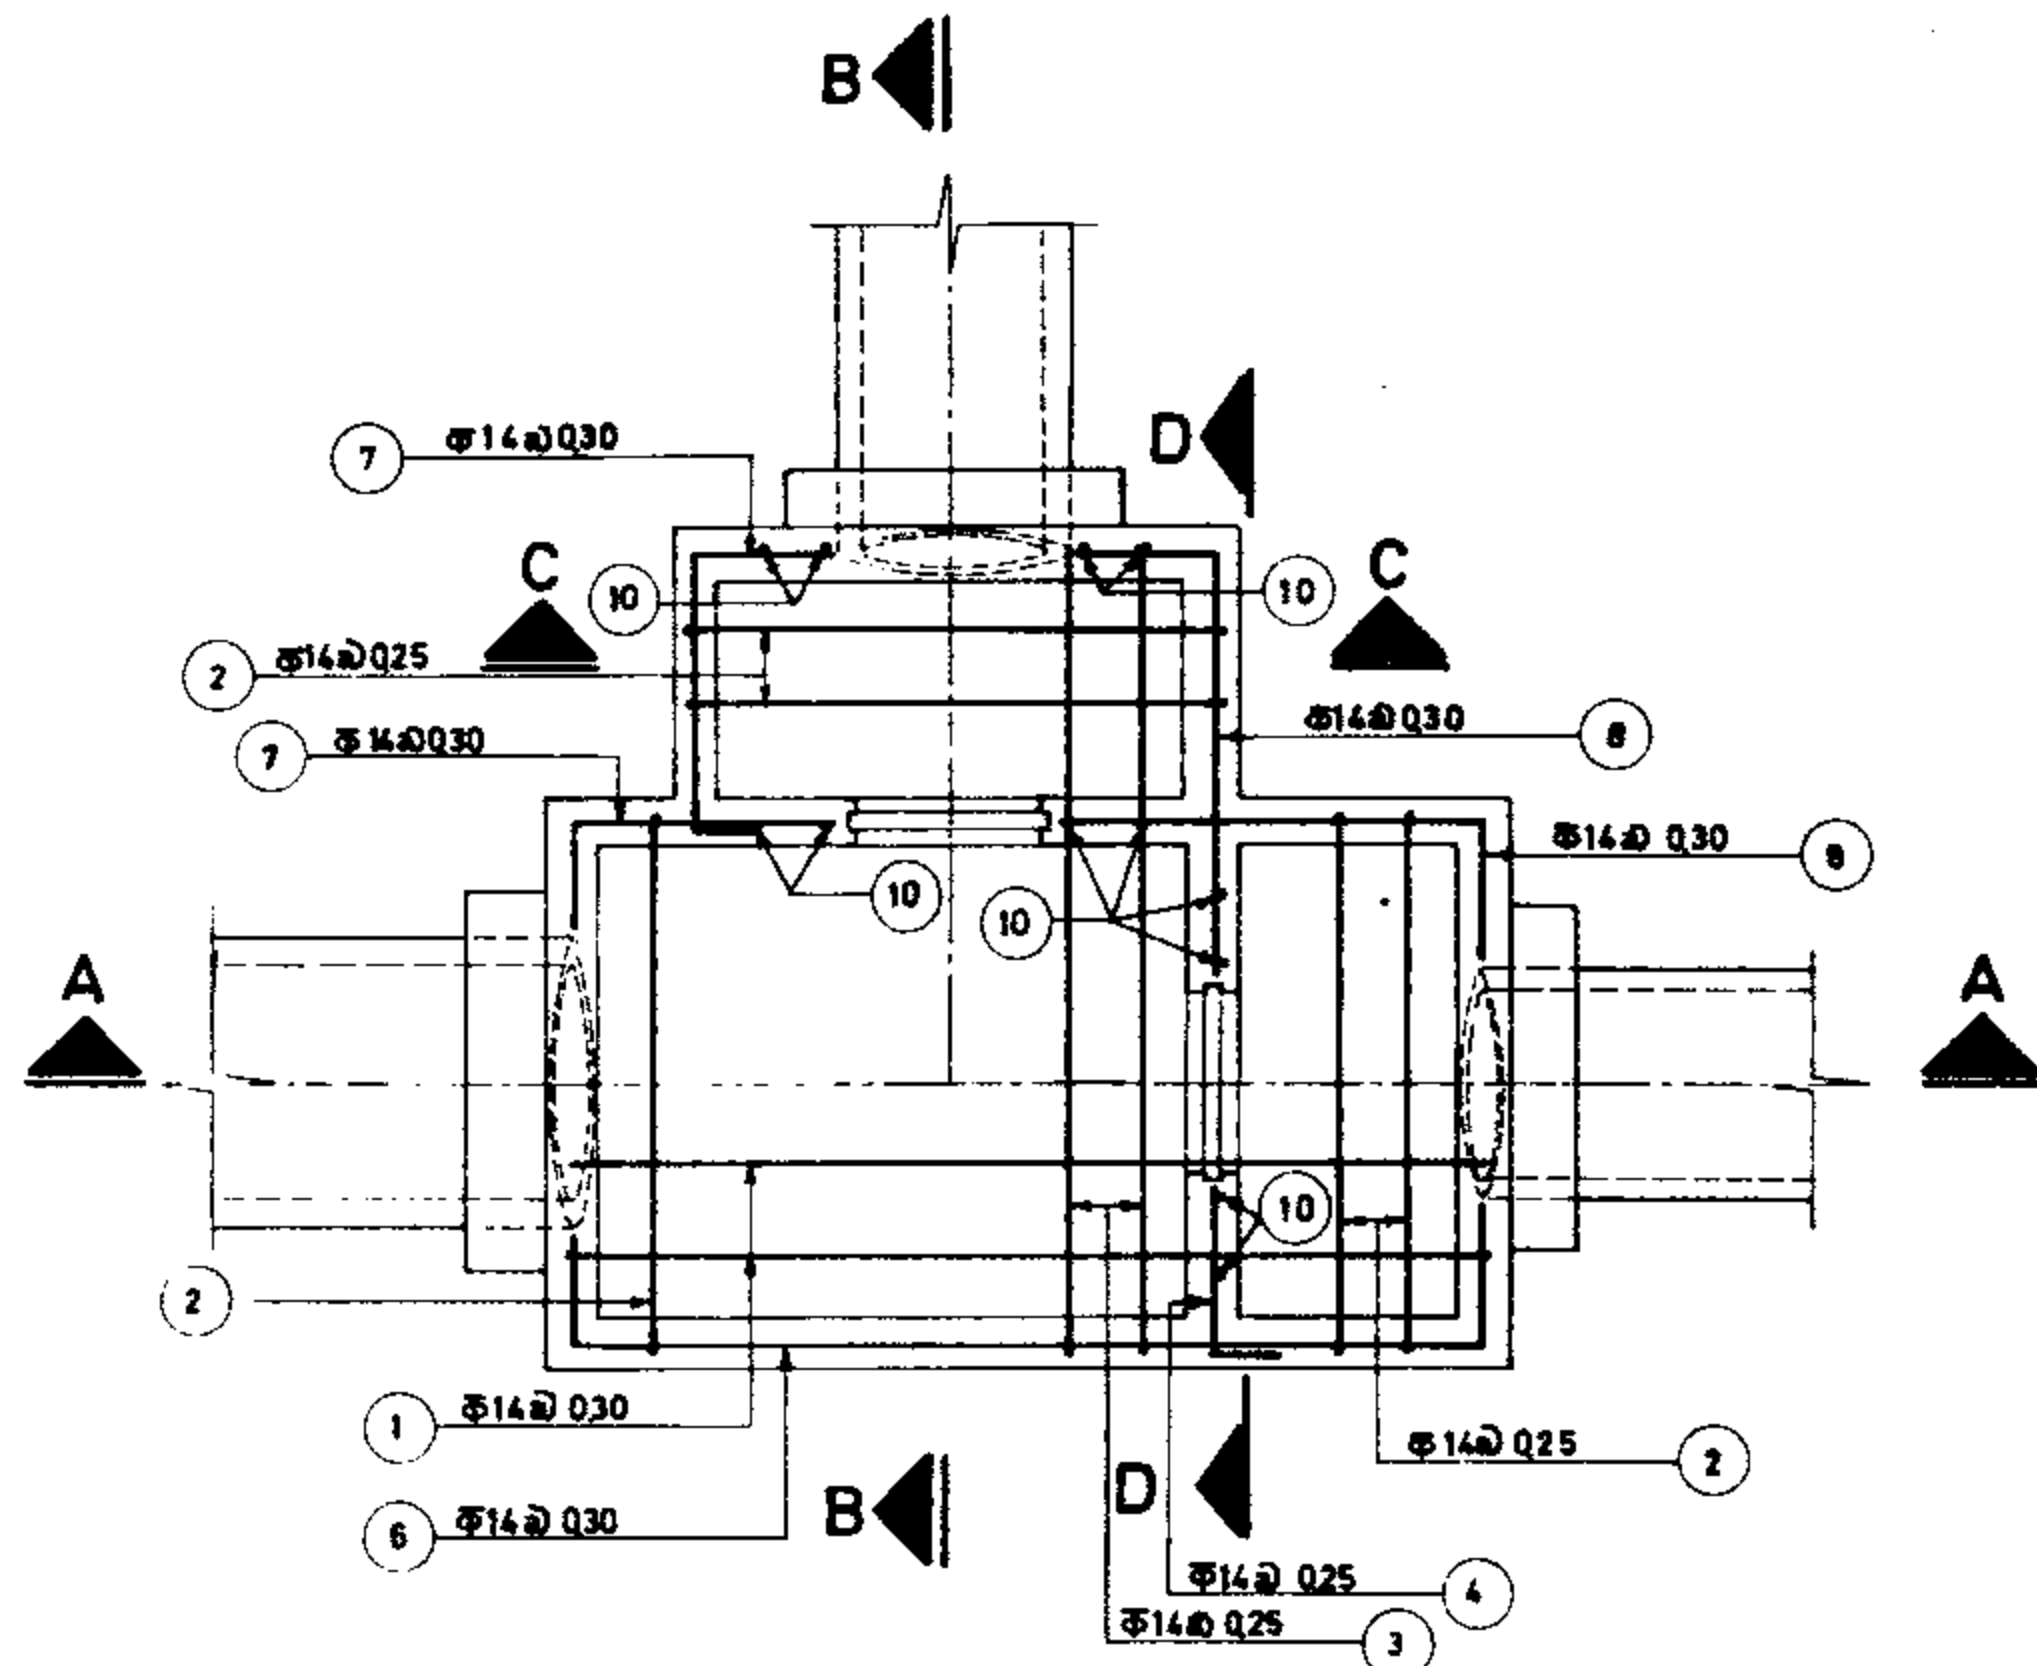


PLAN
Scale 1:40

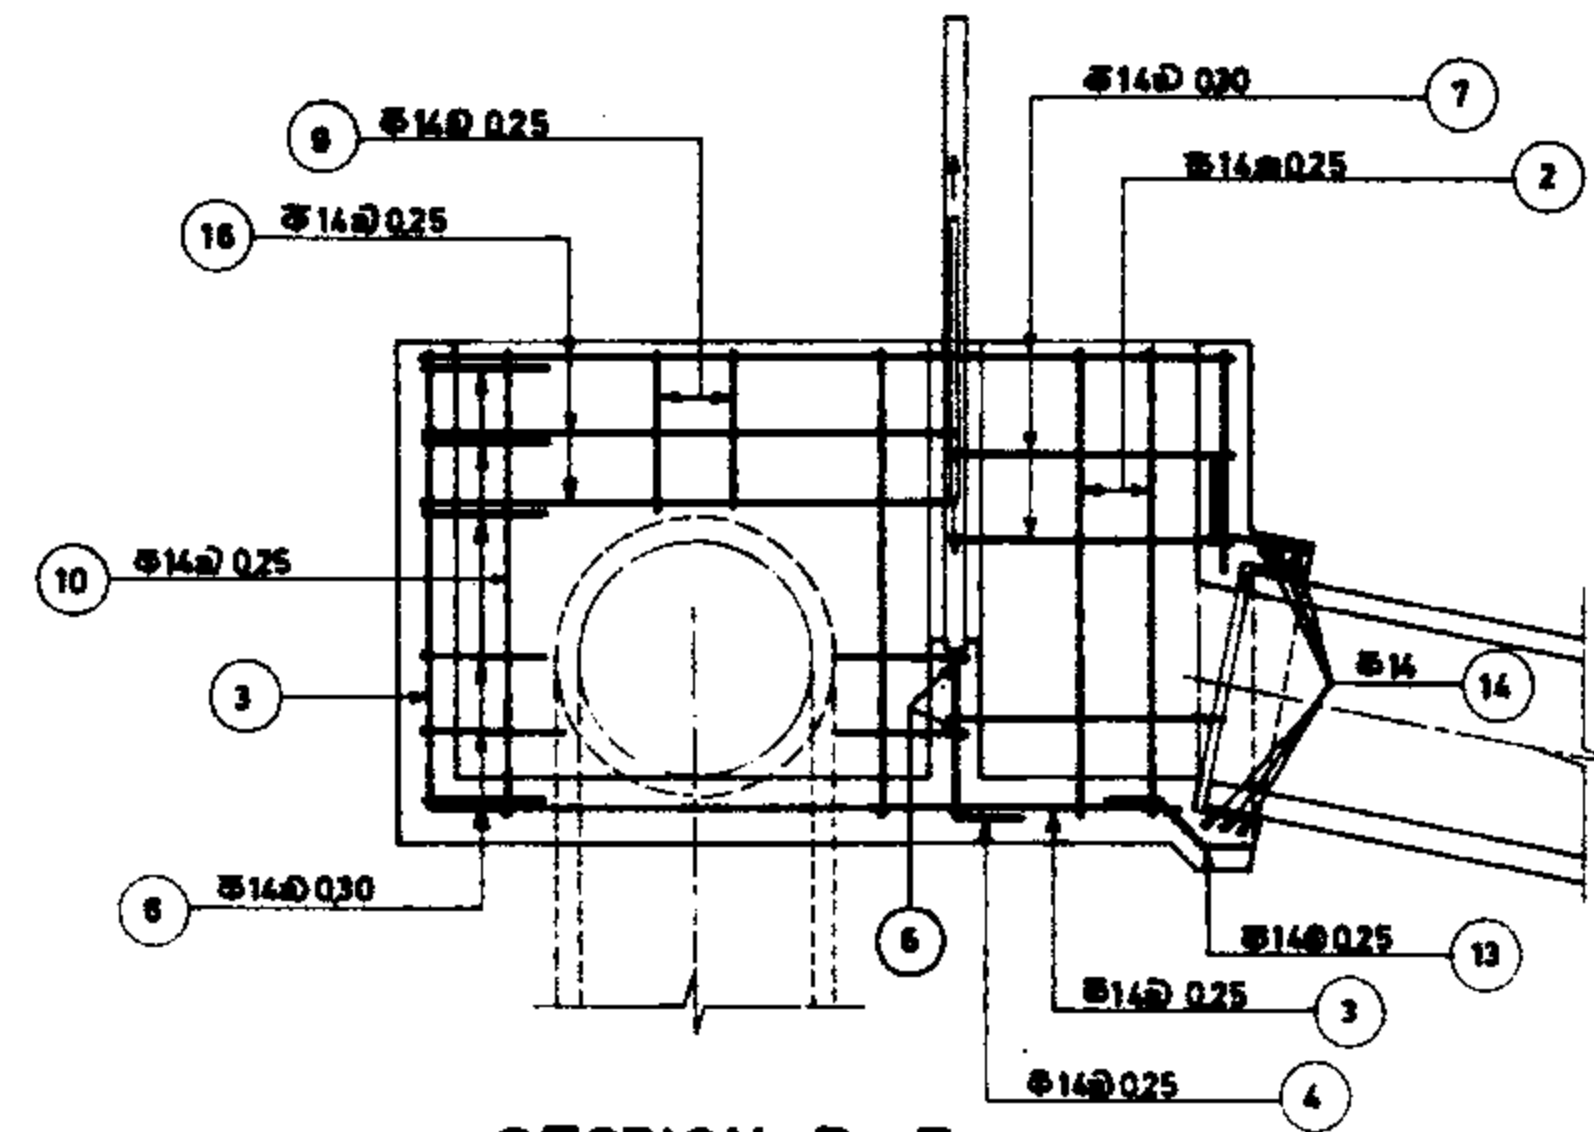


SECTION B-B
Scale 1:40

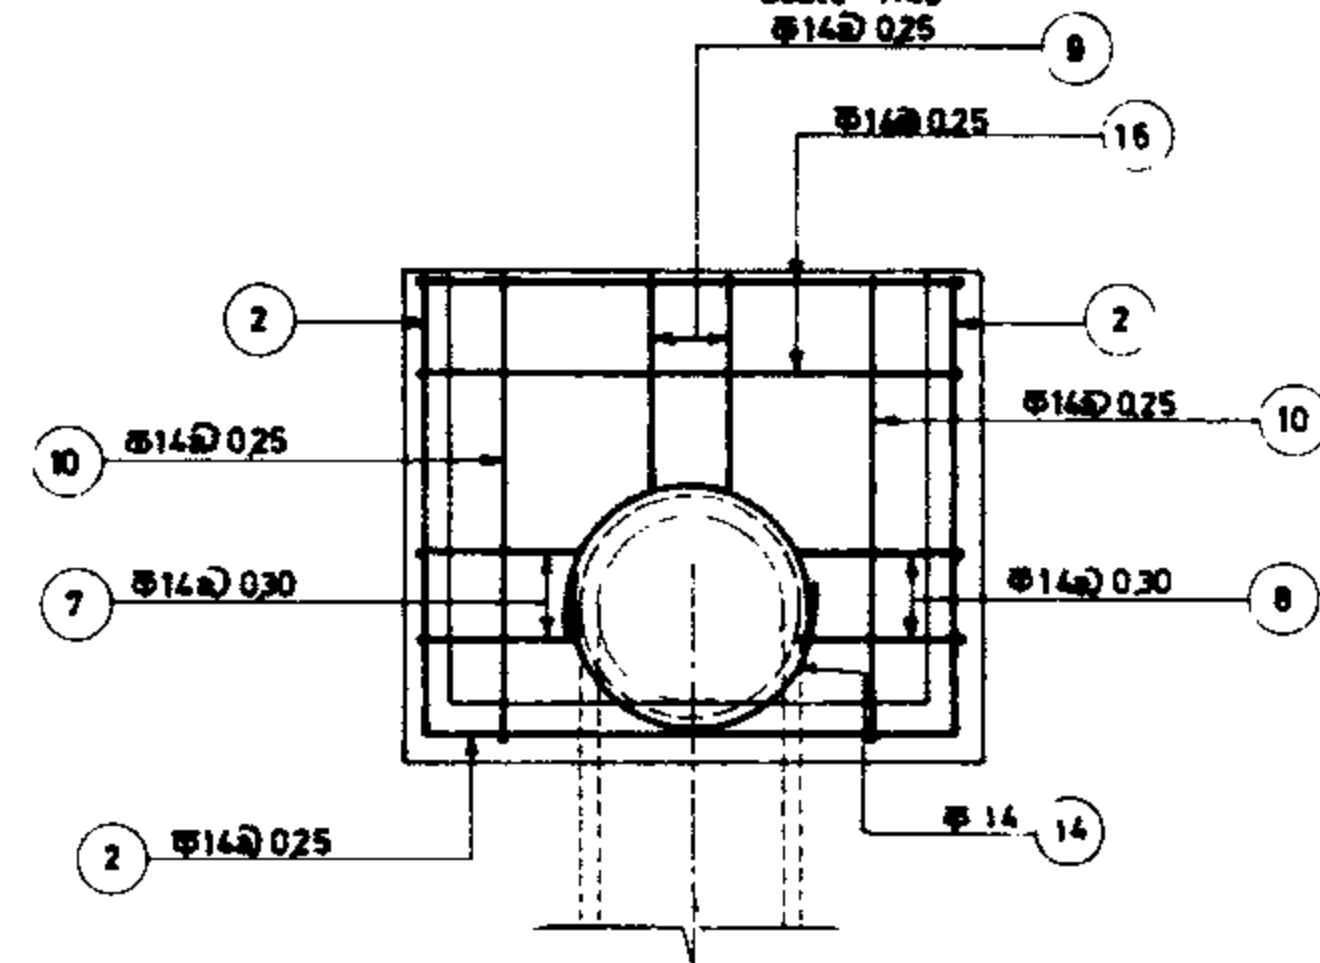

SECTION C-C
Scale 1:40

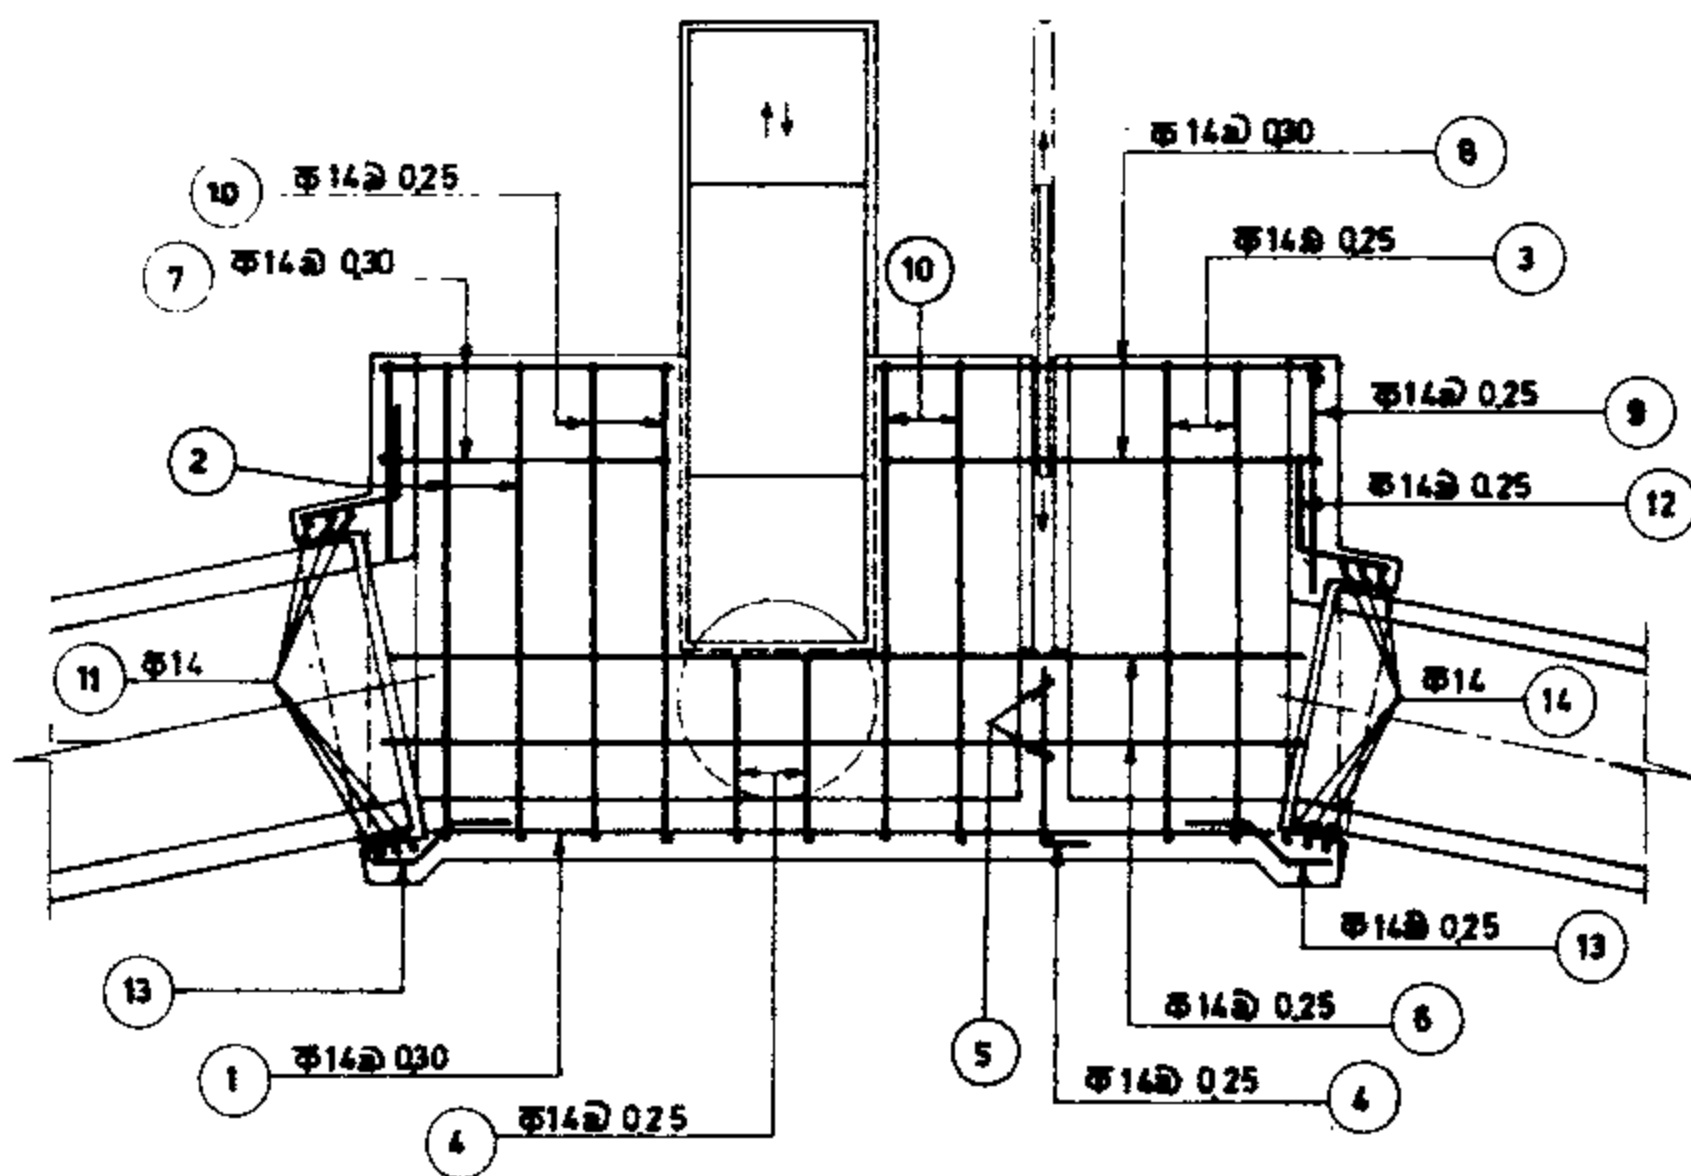


SECTION A-A
Scale 1:40

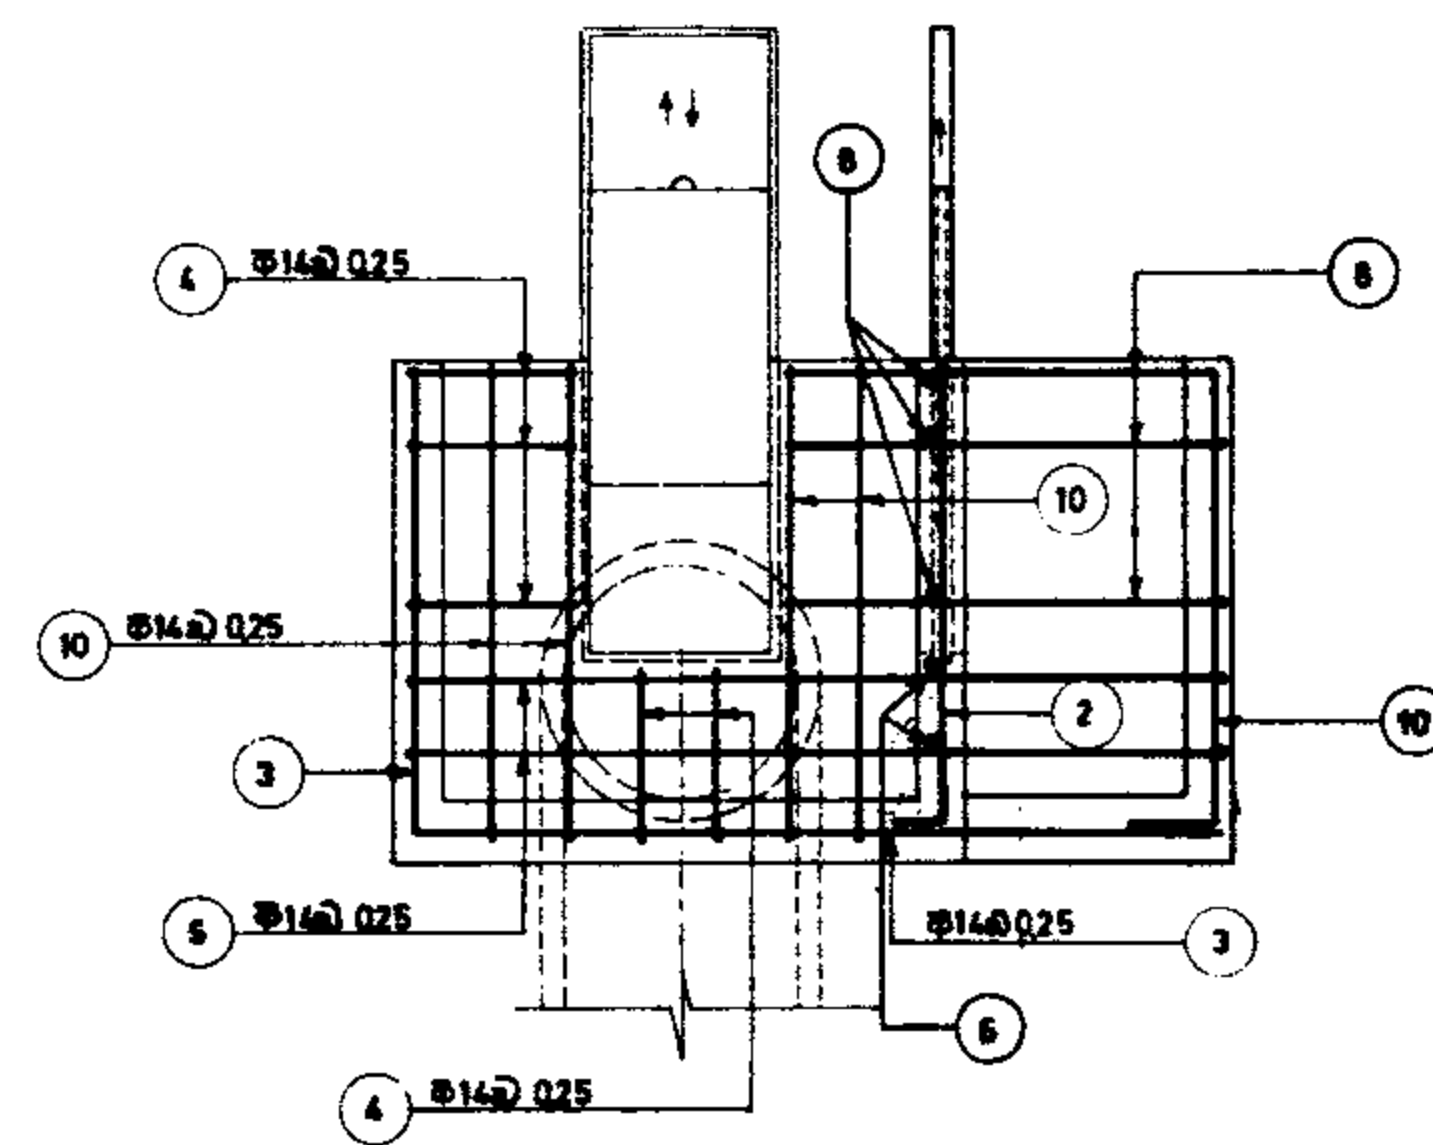

SECTION D-D
Scale 1:40

POS	Nº	FORM	UNIT LENG.	TOTAL LENG.	
1	8	308	308	2464	
2	11	155 181 155	491	5401	
3	8	155 271	426	3408	
4	8	0.95 0.20	0.75	600	
5	2	0.45 2.70 0.20	3.35	670	
6	10	0.35 3.08 0.45	3.88	3880	
7	8	0.35 0.95 0.20	1.50	1200	
8	8	1.65 0.45	1.90	1520	
9	9	0.50	0.50	450	
10	20	1.55 0.20	1.75	3500	
11	3	0.40 1.040	4.66	1398	
12	34	0.40 0.40	0.80	2720	
13	13	0.75	0.75	975	
14	6	0.40 1.040	3.79	2274	
15	12	0.20 1.15 0.20	1.55	18.60	
16	12	0.20 1.81 0.20	2.21	2652	
			349.72		
349.72		X	121	=	42316 kg

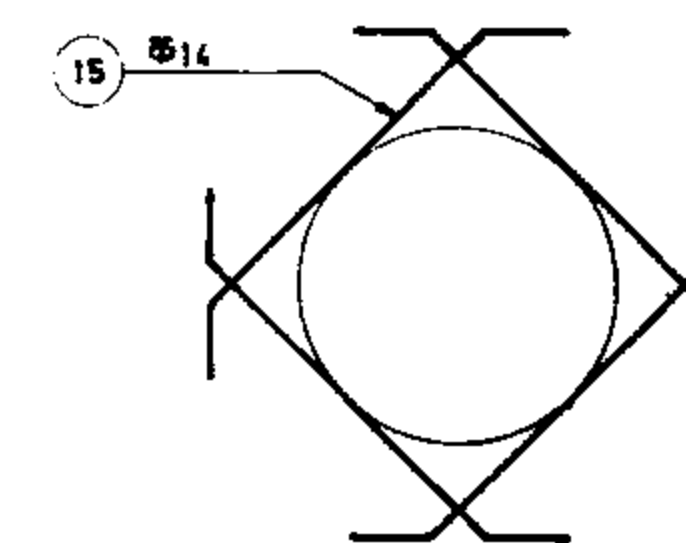

ALL BARS ARE $\Phi 14$ (1.21 kg/m)

REFERENCE DWGS. FOR PLAN & SECTION SEE DWG. Nº 12/7/1/02

Scale 1:40

IRRIGATION & DRAINAGE STANDARDS

Date

DWG. Nº 12/7/3/02


DIVISION BOX (TYPE 2)
REINFORCEMENT

Approved:


Sheet Nº 11 of 18

Rev. Nº


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU

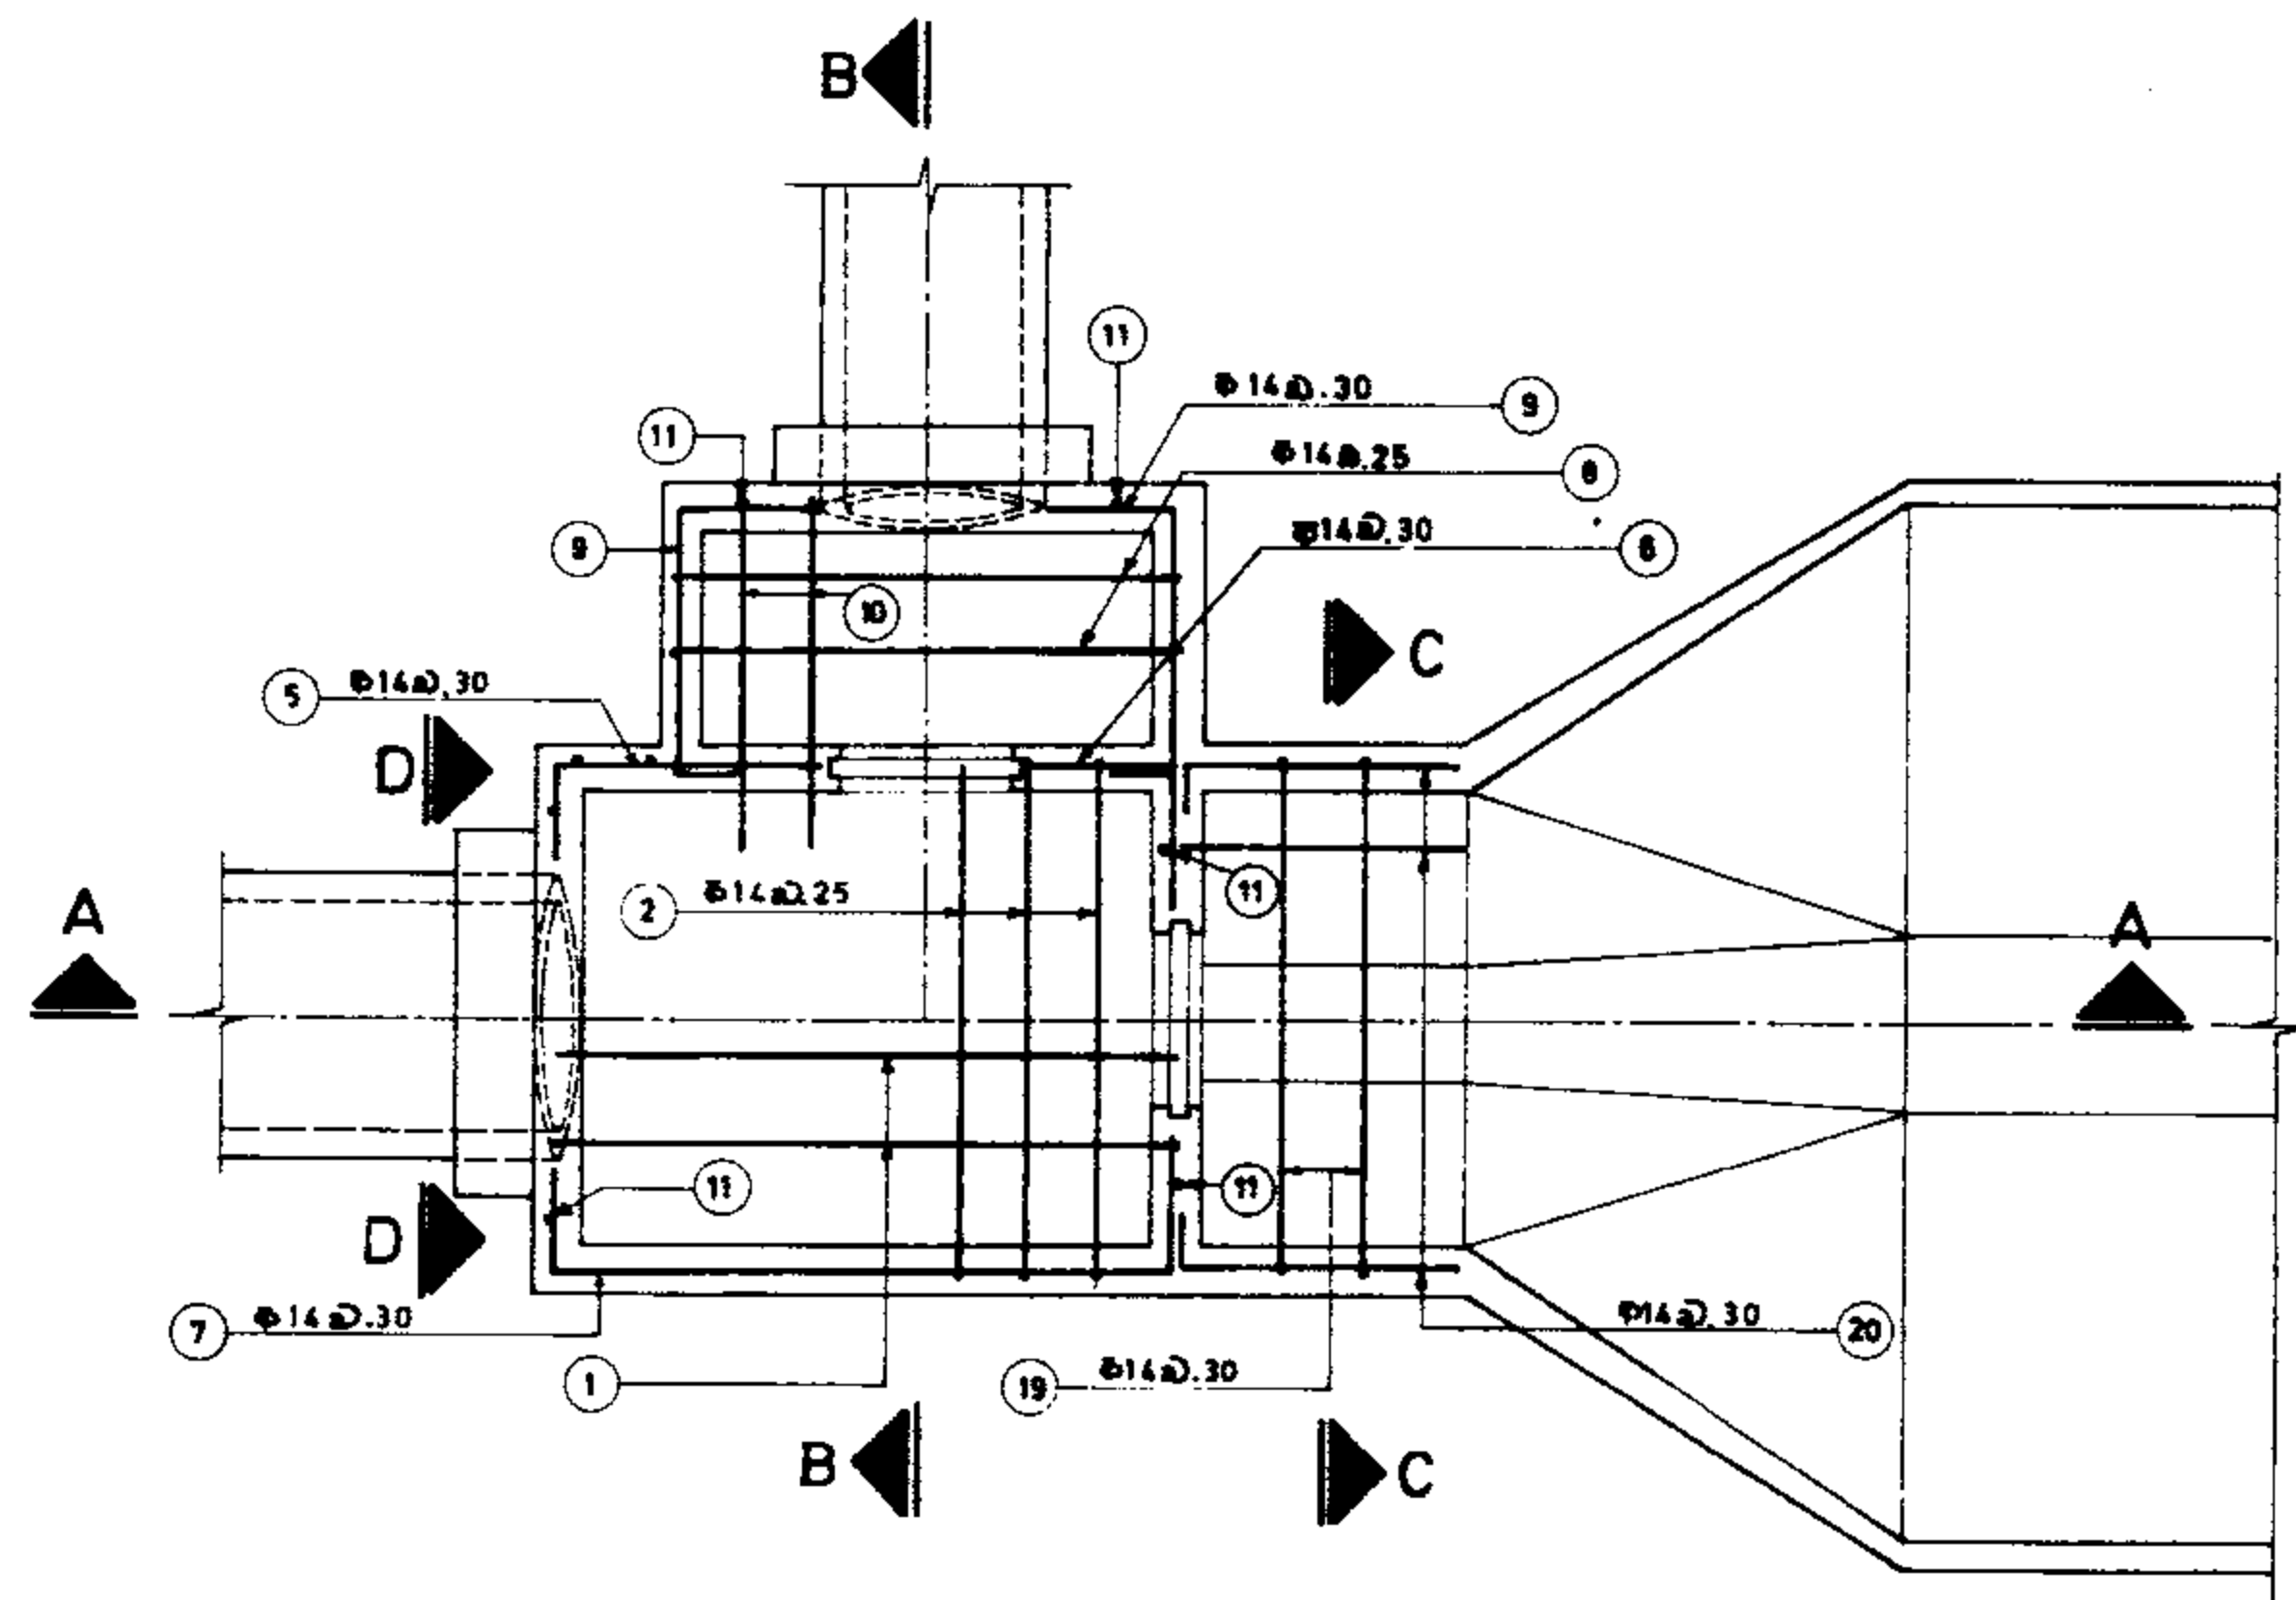


PLAN
Scale 1:40

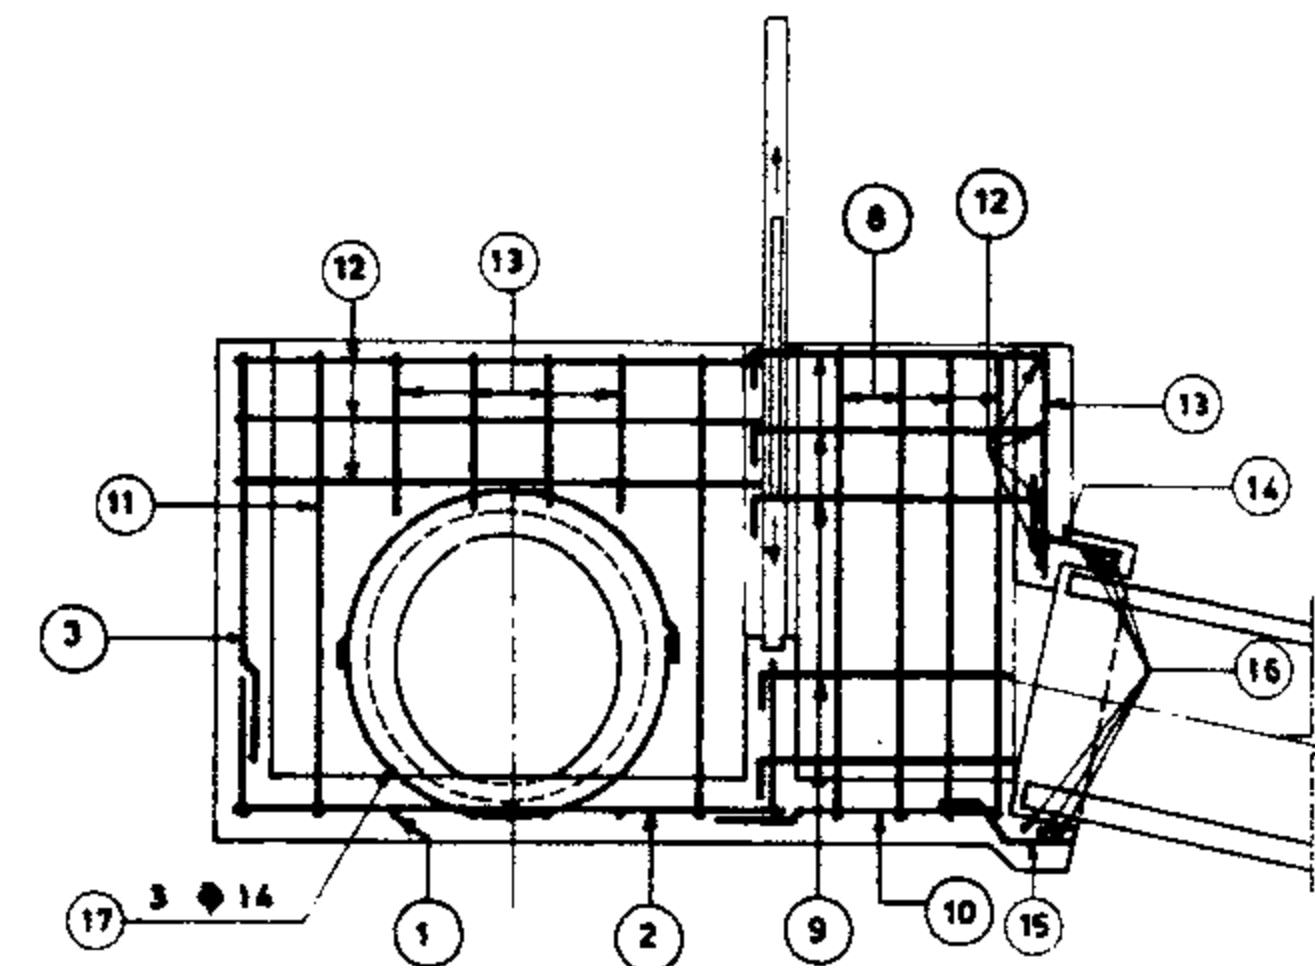


SECTION B_B
Scale 1:40

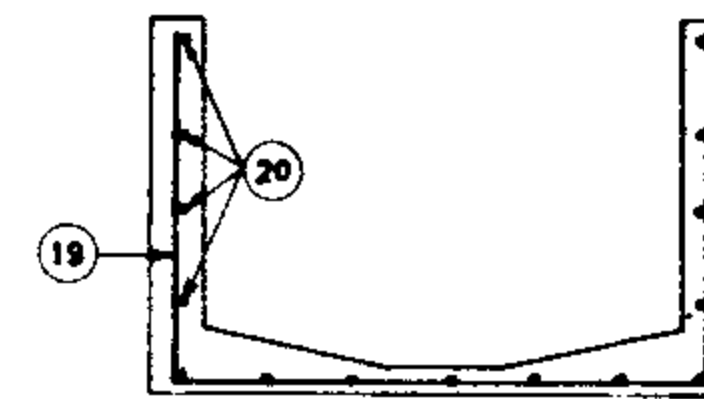

SECTION C_C
Scale 1:40

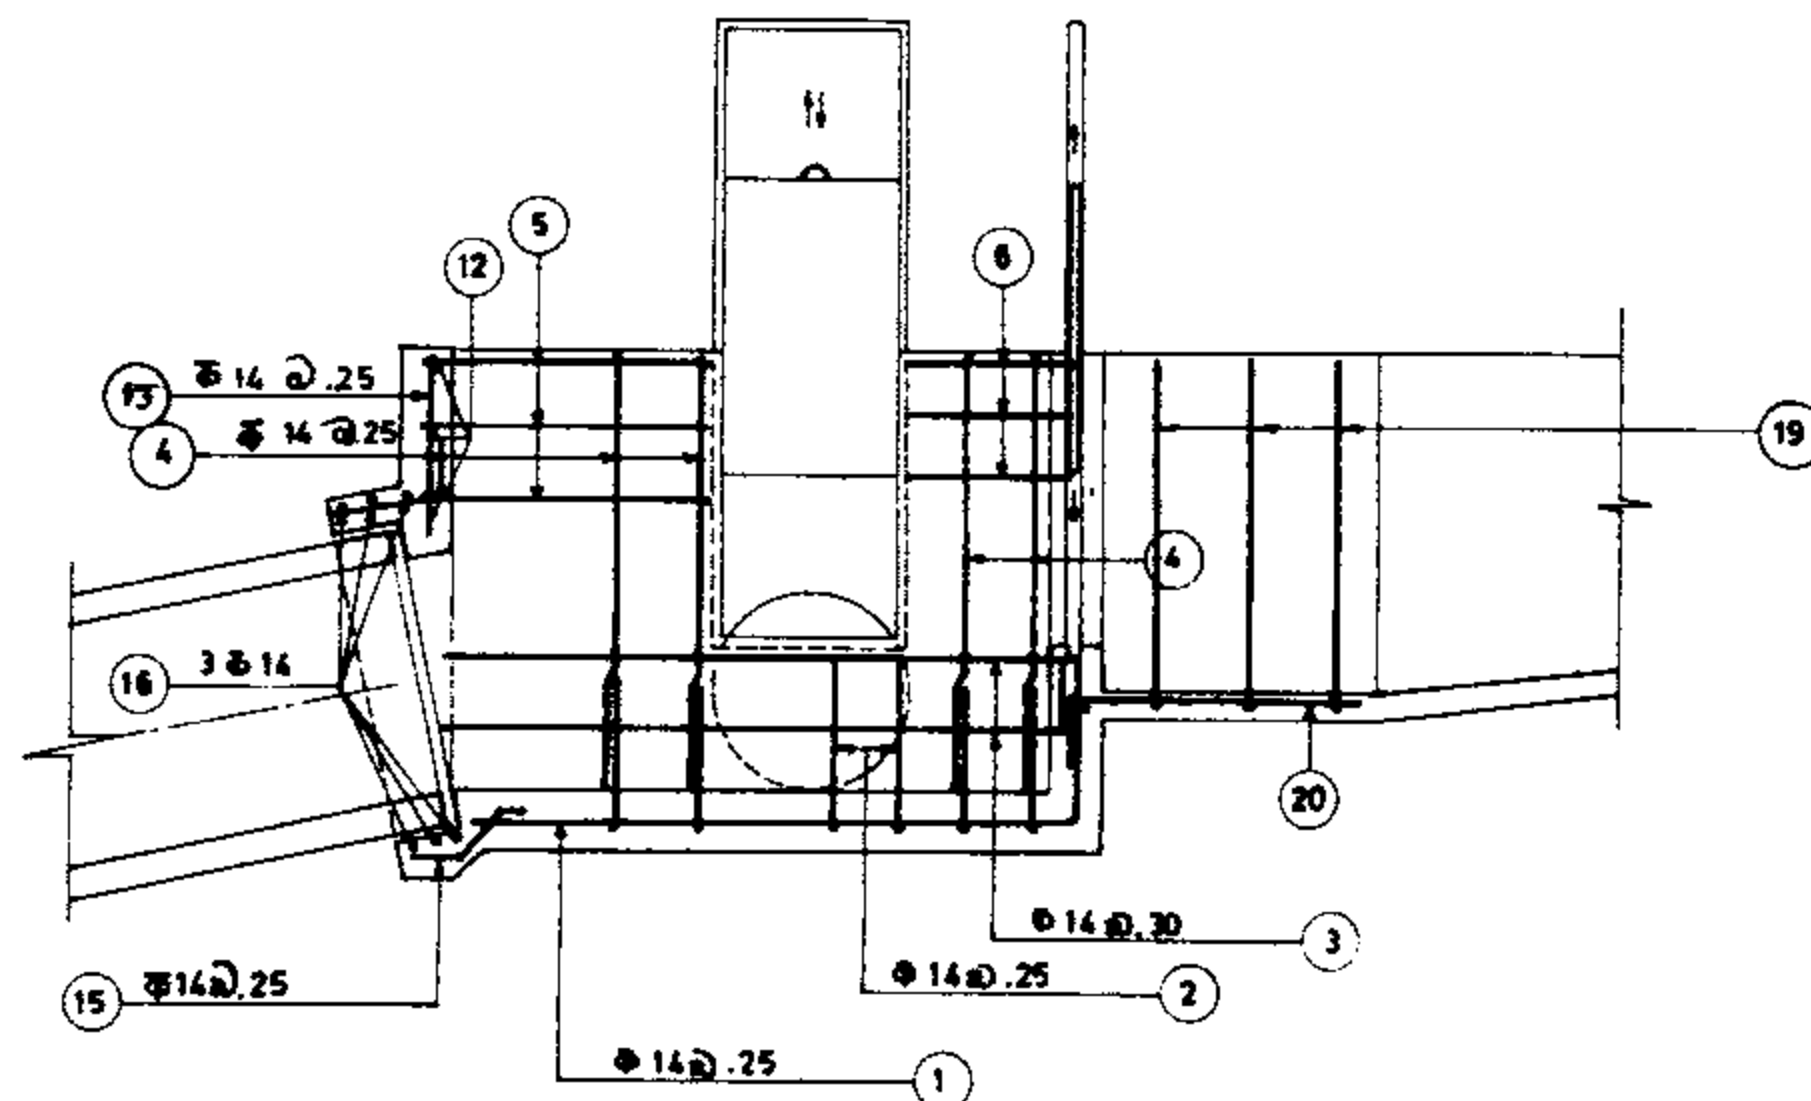


SECTION A_A
Scale 1:40

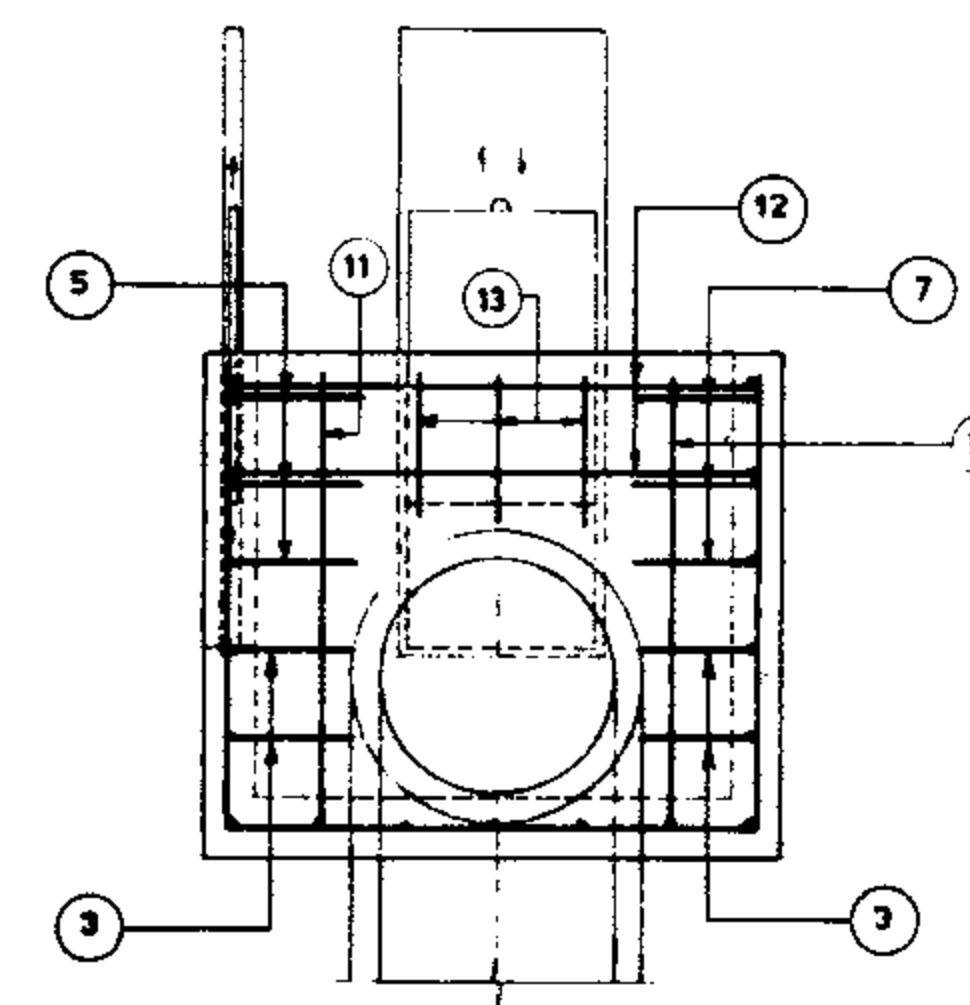

SECTION D_D
Scale 1:40

POS	Nº	FORM	UNIT LENG.	TOTAL LENG.		
1	8	205	055	260	2080	
2	9	055	181	055	291	2619
3	2	025	218	178	664	1328
4	16	145		145	23.20	
5	4	035	095	130	520	
6	4	055	055	110	440	
7	4	035	218	055	308	1232
8	4	155	181	155	491	1964
9	12	025	095	045	165	1980
10	7	120		120	840	
11	6	155	025	180	1080	
12	7	180		180	1260	
13	9	055		055	495	
14	20	050	030	080	1600	
15	9	075		075	675	
16	3	040	040	466	1398	
17	3	040	040	379	1137	
18	8	020	115	020	155	1240
19	3	115	181	115	411	1233
20	16	0.25	1.05	130	20.80	
			275.21			
275.21		X	121	=	333.00 kg	

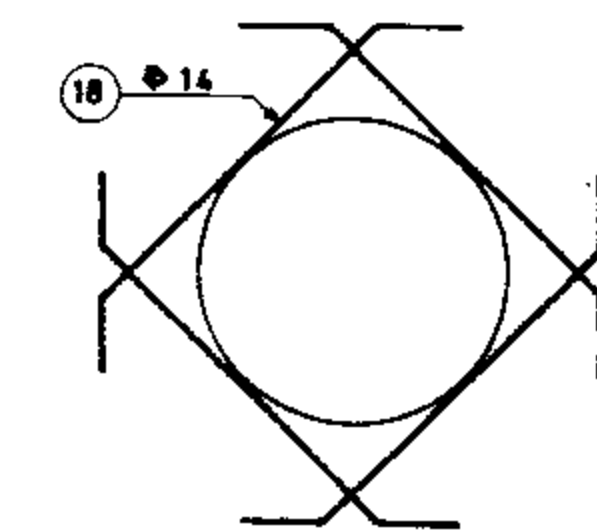

ALL BARS ARE $\Phi 14$ (1.21 kg/m)

REFERENCE DWGS. FOR PLAN & SECTION SEE DWG. Nº-12/7/1/03

Scale: 1:40

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG. Nº 12/7/3/03


Approved:

Sheet Nº 12 of 18


Rev. Nº

DIVISION BOX (TYPE 3)
REINFORCEMENT



ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU

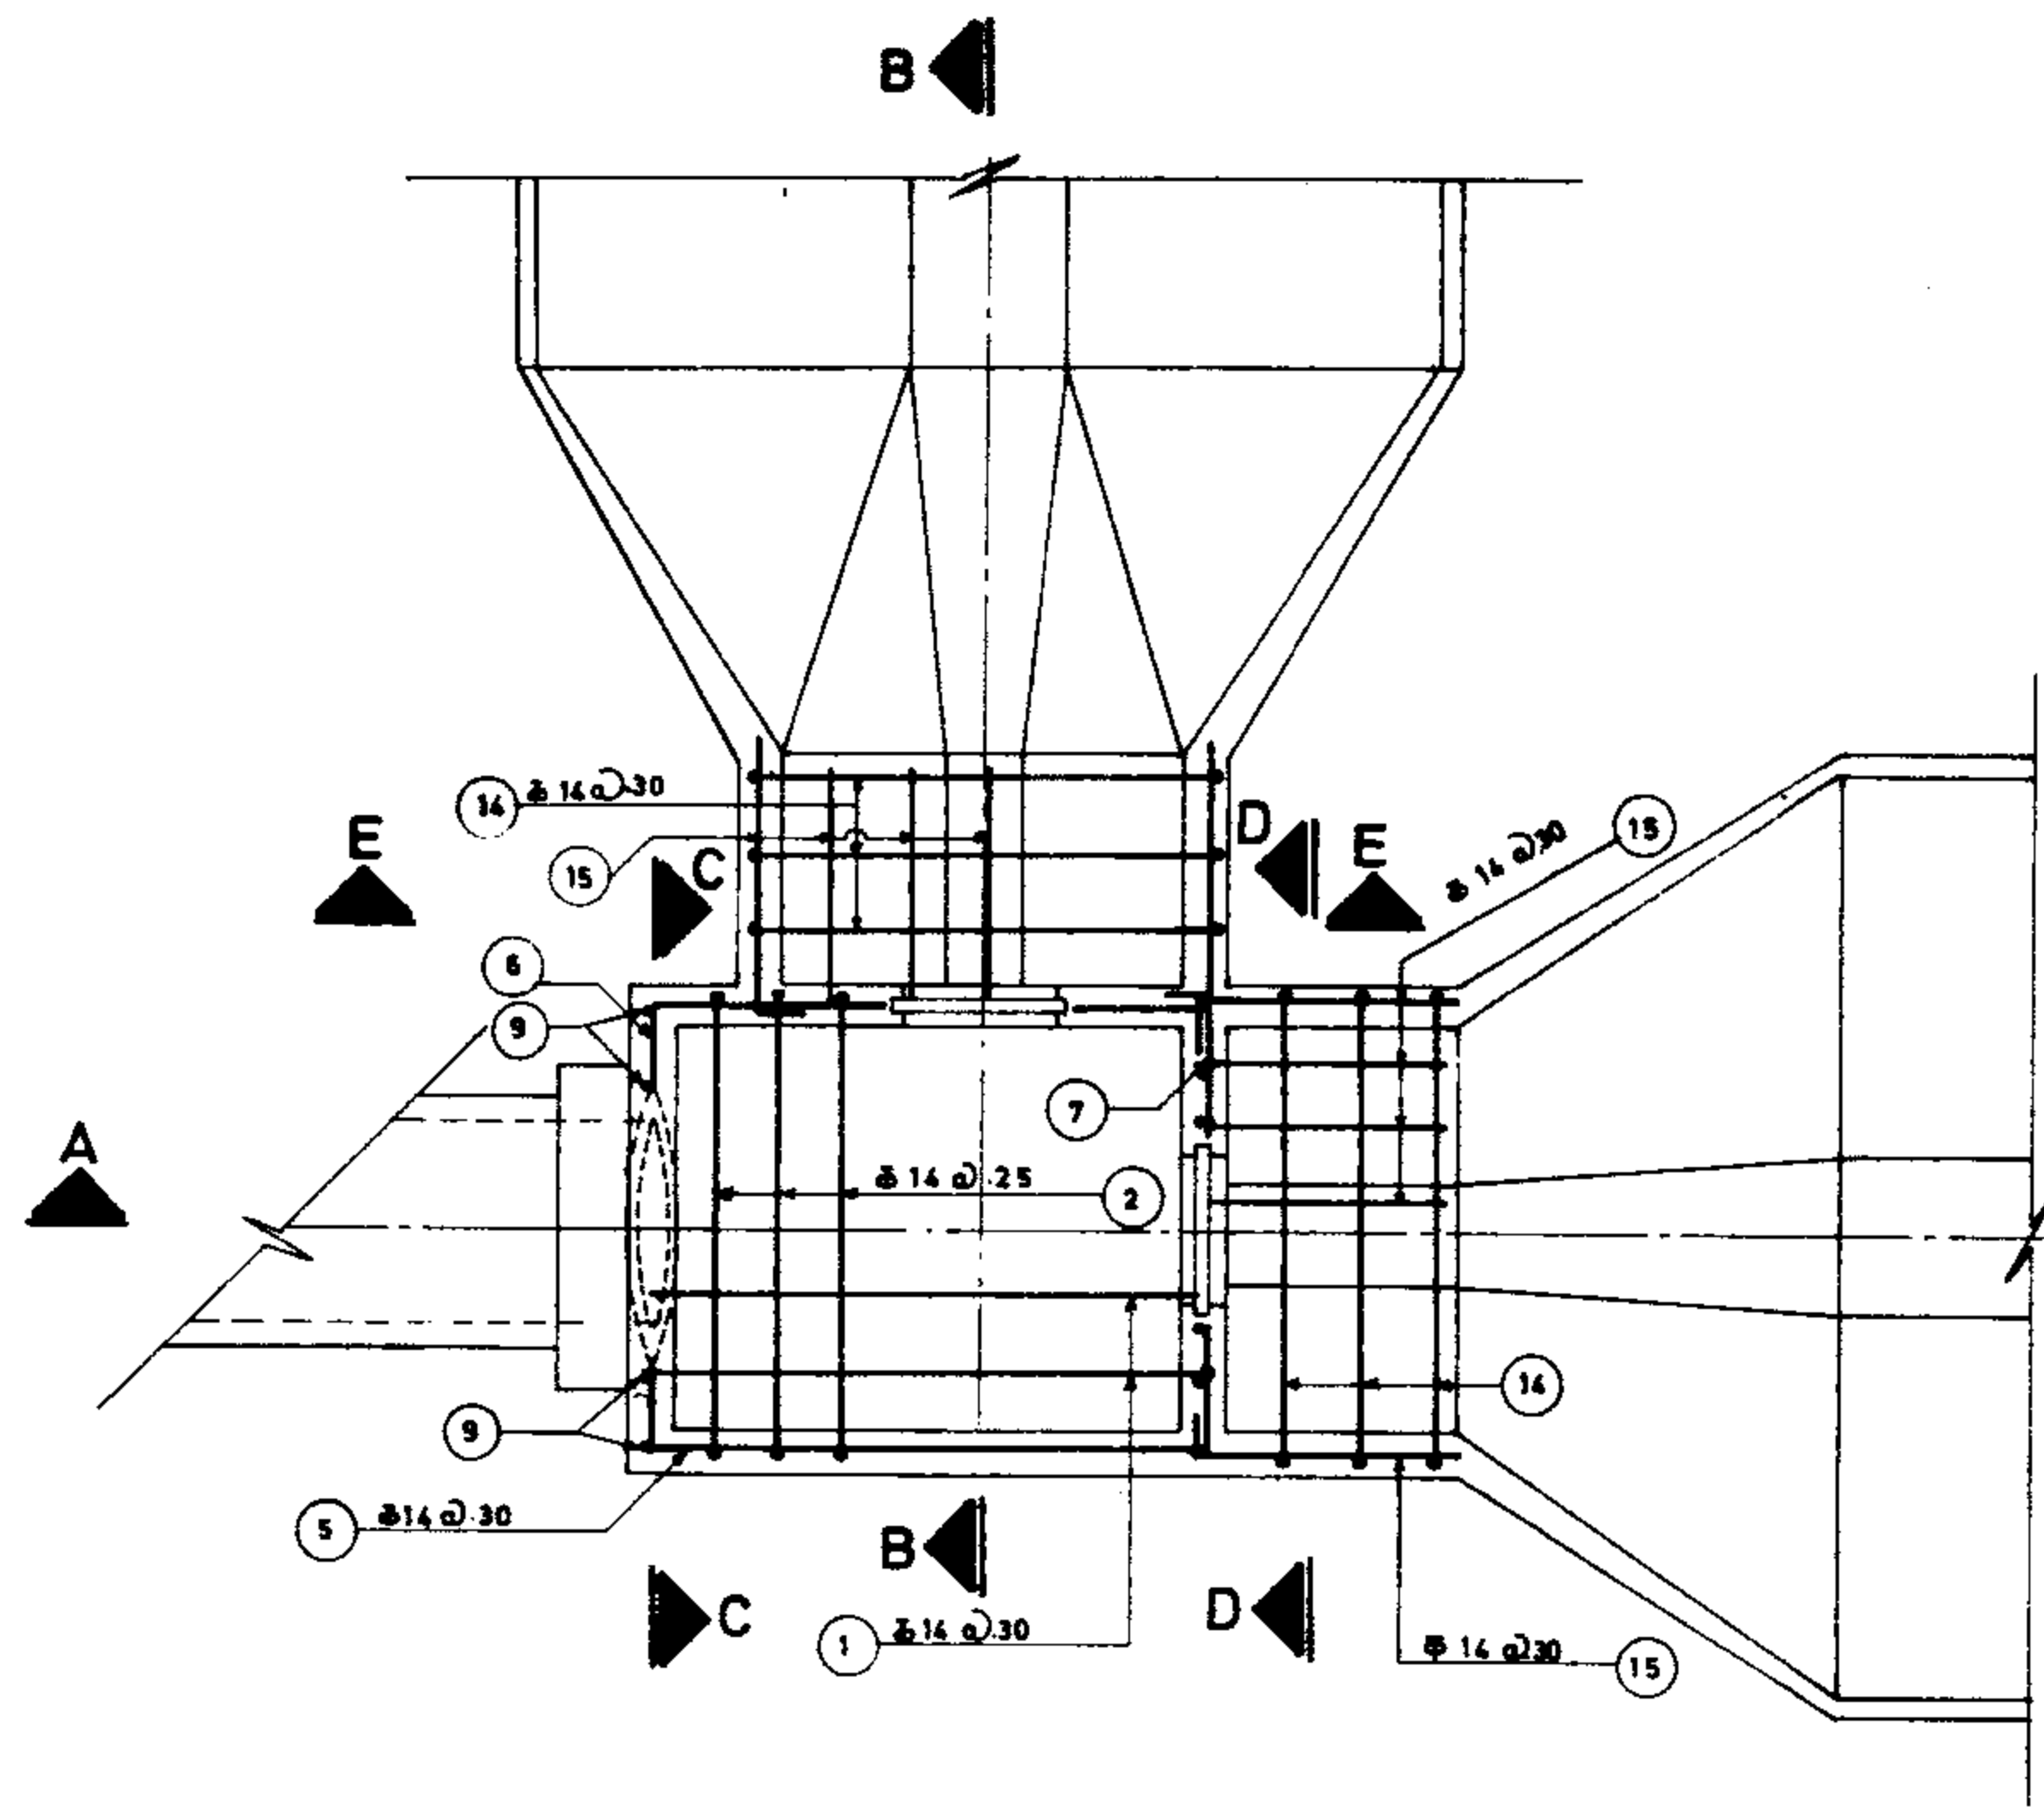


PLAN
Scale 1:40

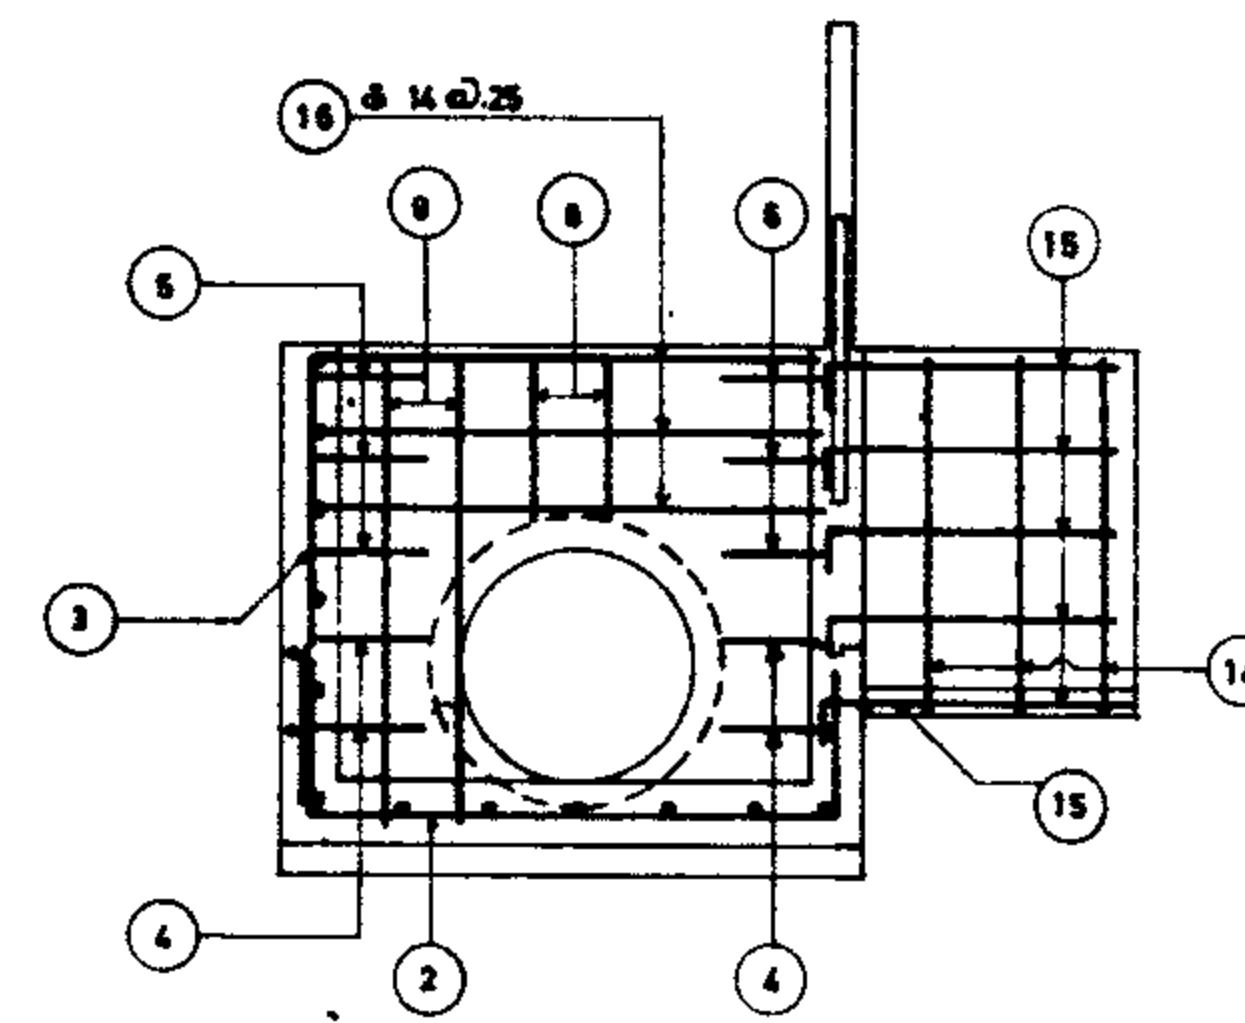


SECTION B-B
Scale 1:40

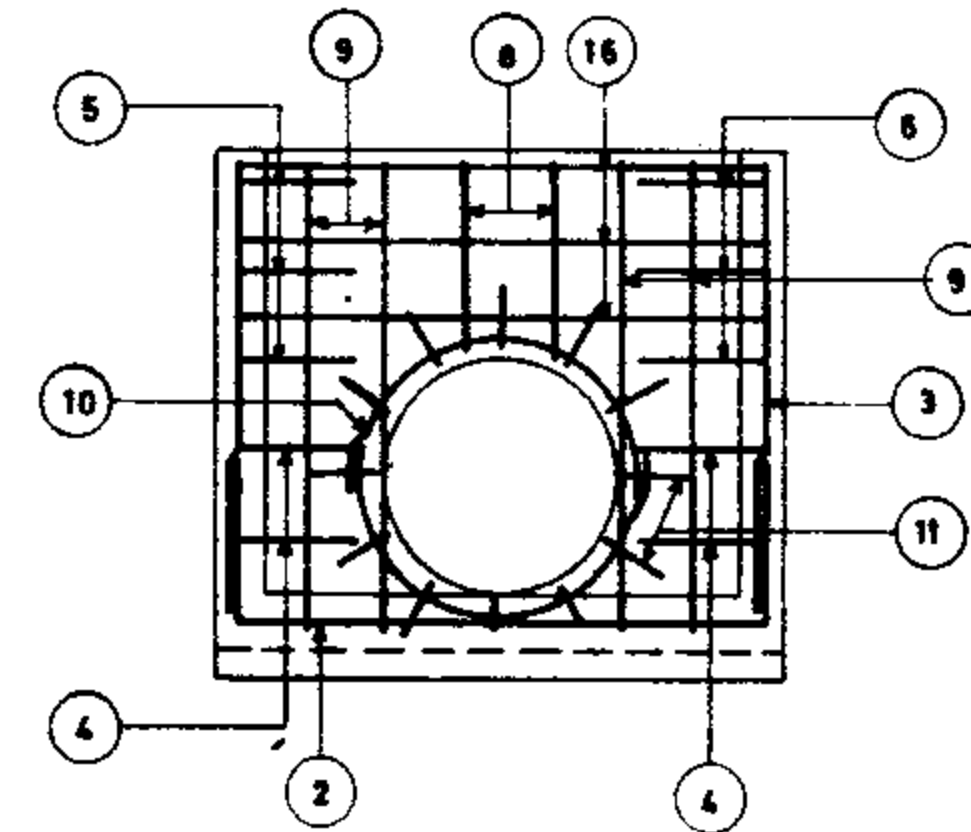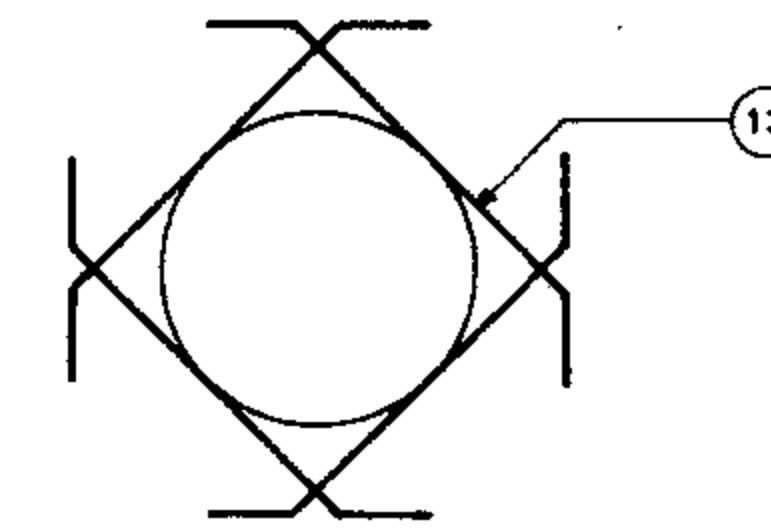


SECTION C-C
Scale 1:40

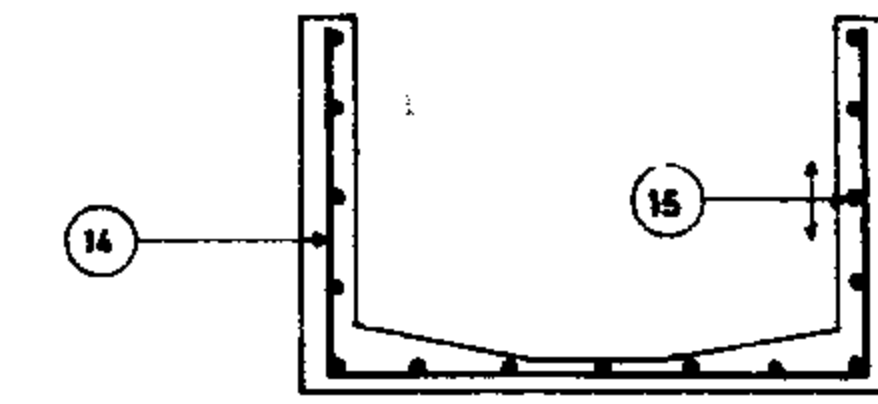

SECTION E-E
Scale 1:40

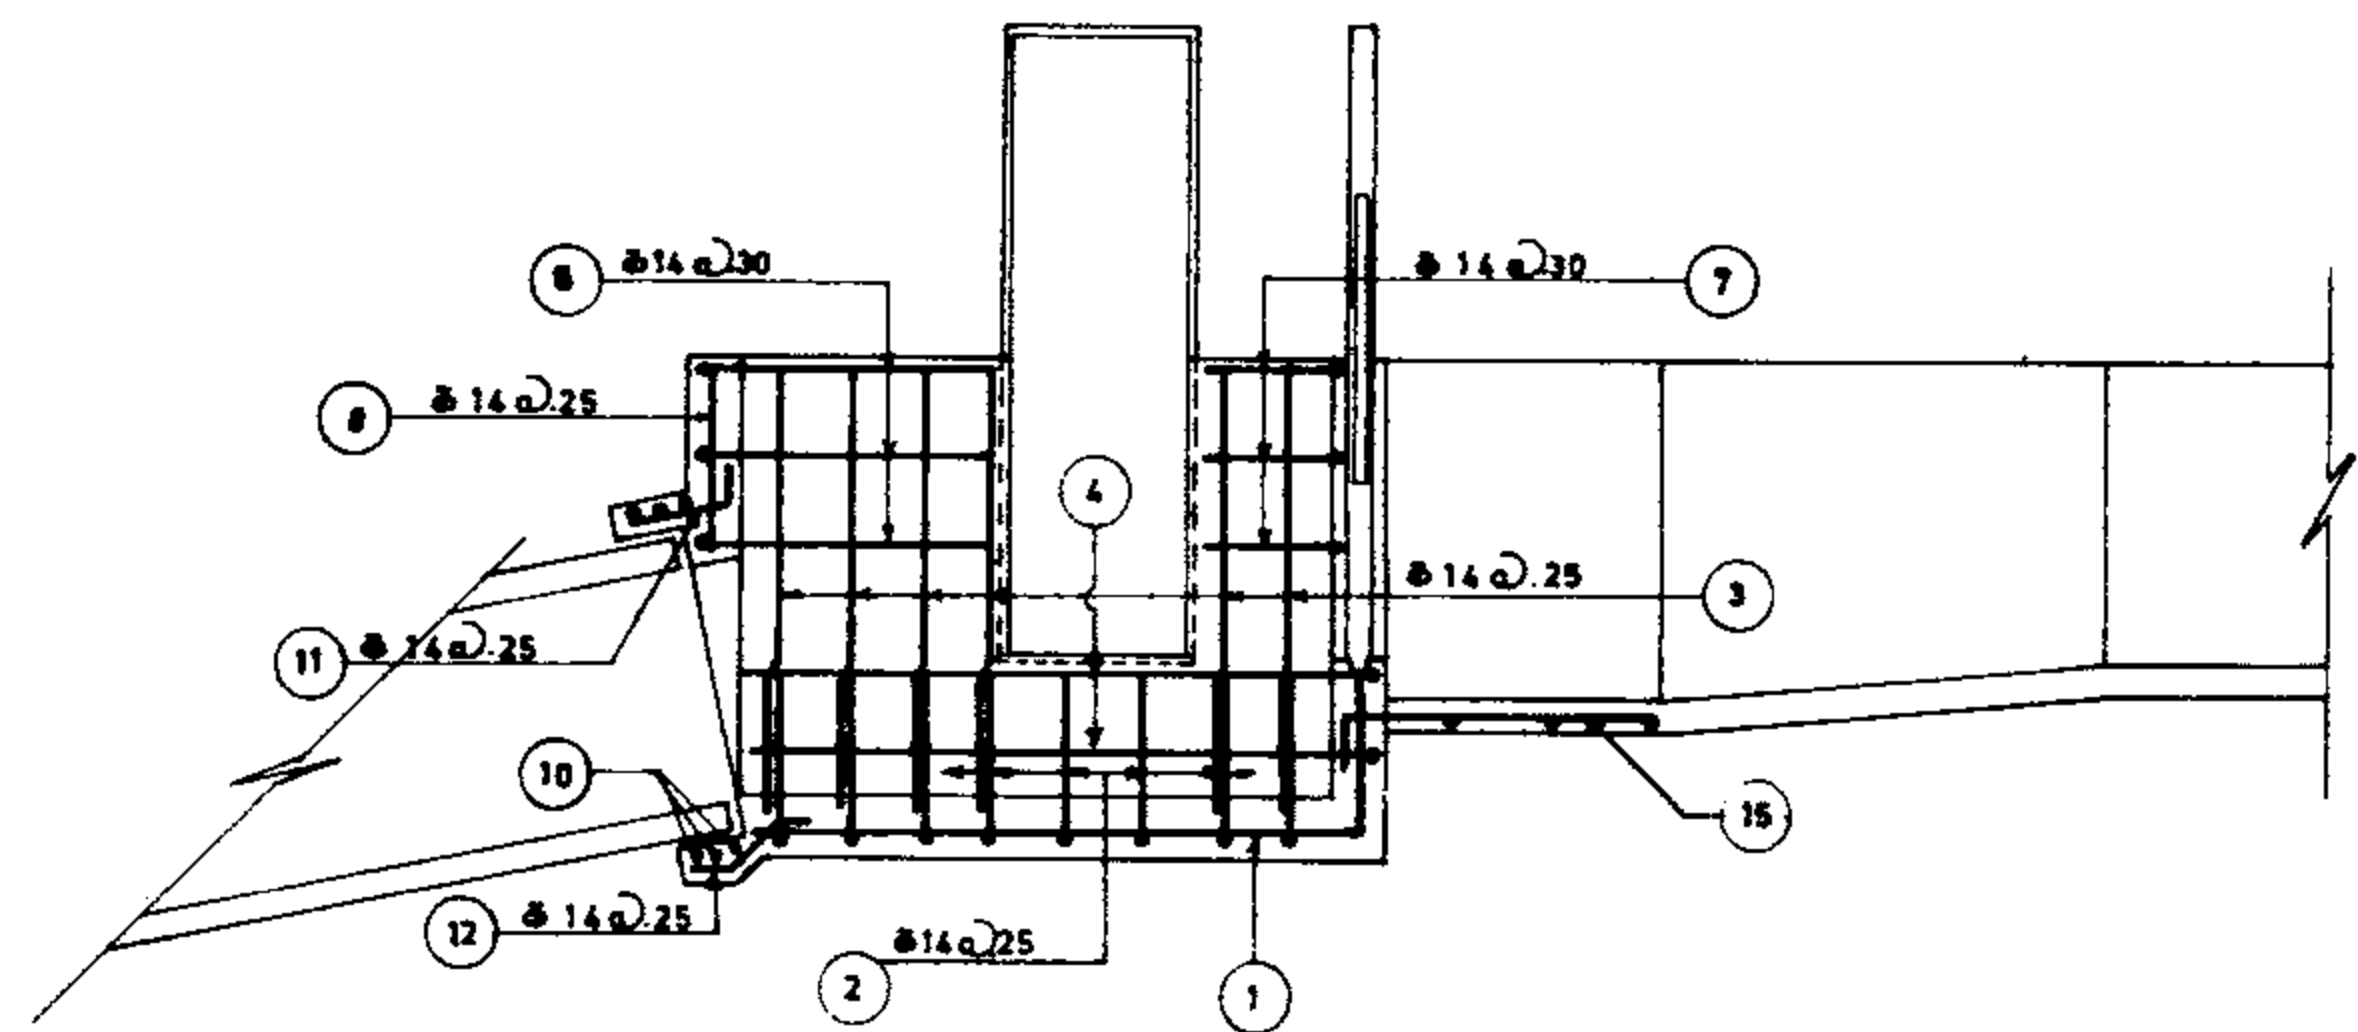

SECTION A-A
Scale 1:40

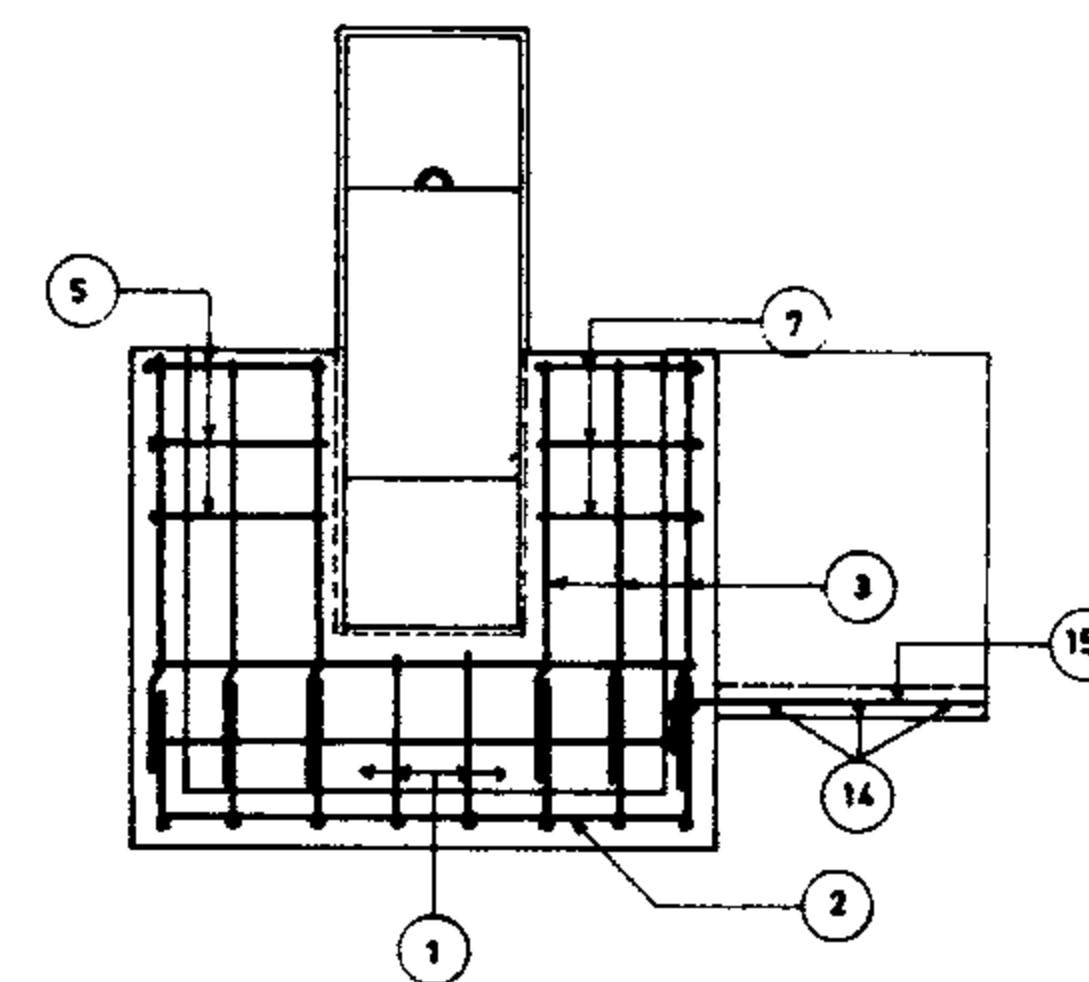

SECTION D-D
Scale 1:40

POS.	Nº	Form	UNIT LENG.	TOTAL LENG.
1	8	0.55 2.18	2.73	21.84
2	8	0.55 1.81 0.55	2.91	23.28
3	19	1.45	1.45	27.55
4	2	0.35 2.21 1.81 0.35 2.21	6.93	13.86
5	4	0.35 2.18 0.55	3.08	12.32
6	4	0.35 0.95	1.30	5.20
7	4	0.45 0.45	0.90	3.60
8	3	0.60	0.60	1.80
9	4	1.55 0.25	1.80	7.20
10	3	0.40 0.40	4.66	13.98
11	12	0.50 0.30	0.80	9.60
12	5	0.75	0.75	3.75
13	4	0.20 1.15 0.20	1.55	6.20
14	6	1.15 1.81 1.15	4.11	24.66
15	32	0.25 1.05	1.30	41.60
16	3	1.80	1.80	5.40
			221.84	
221.84		x 1.21	=	268.43 kg

REFERENCE DWGS. FOR PLAN & SECTION SEE DWG. Nº 12/7/1/04

Scale: 1:40

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG. Nº 12/7/3/04


Approved:

Sheet Nº 13 of 18


Rev Nº

**DIVISION BOX (TYPE 4)
REINFORCEMENT**


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU

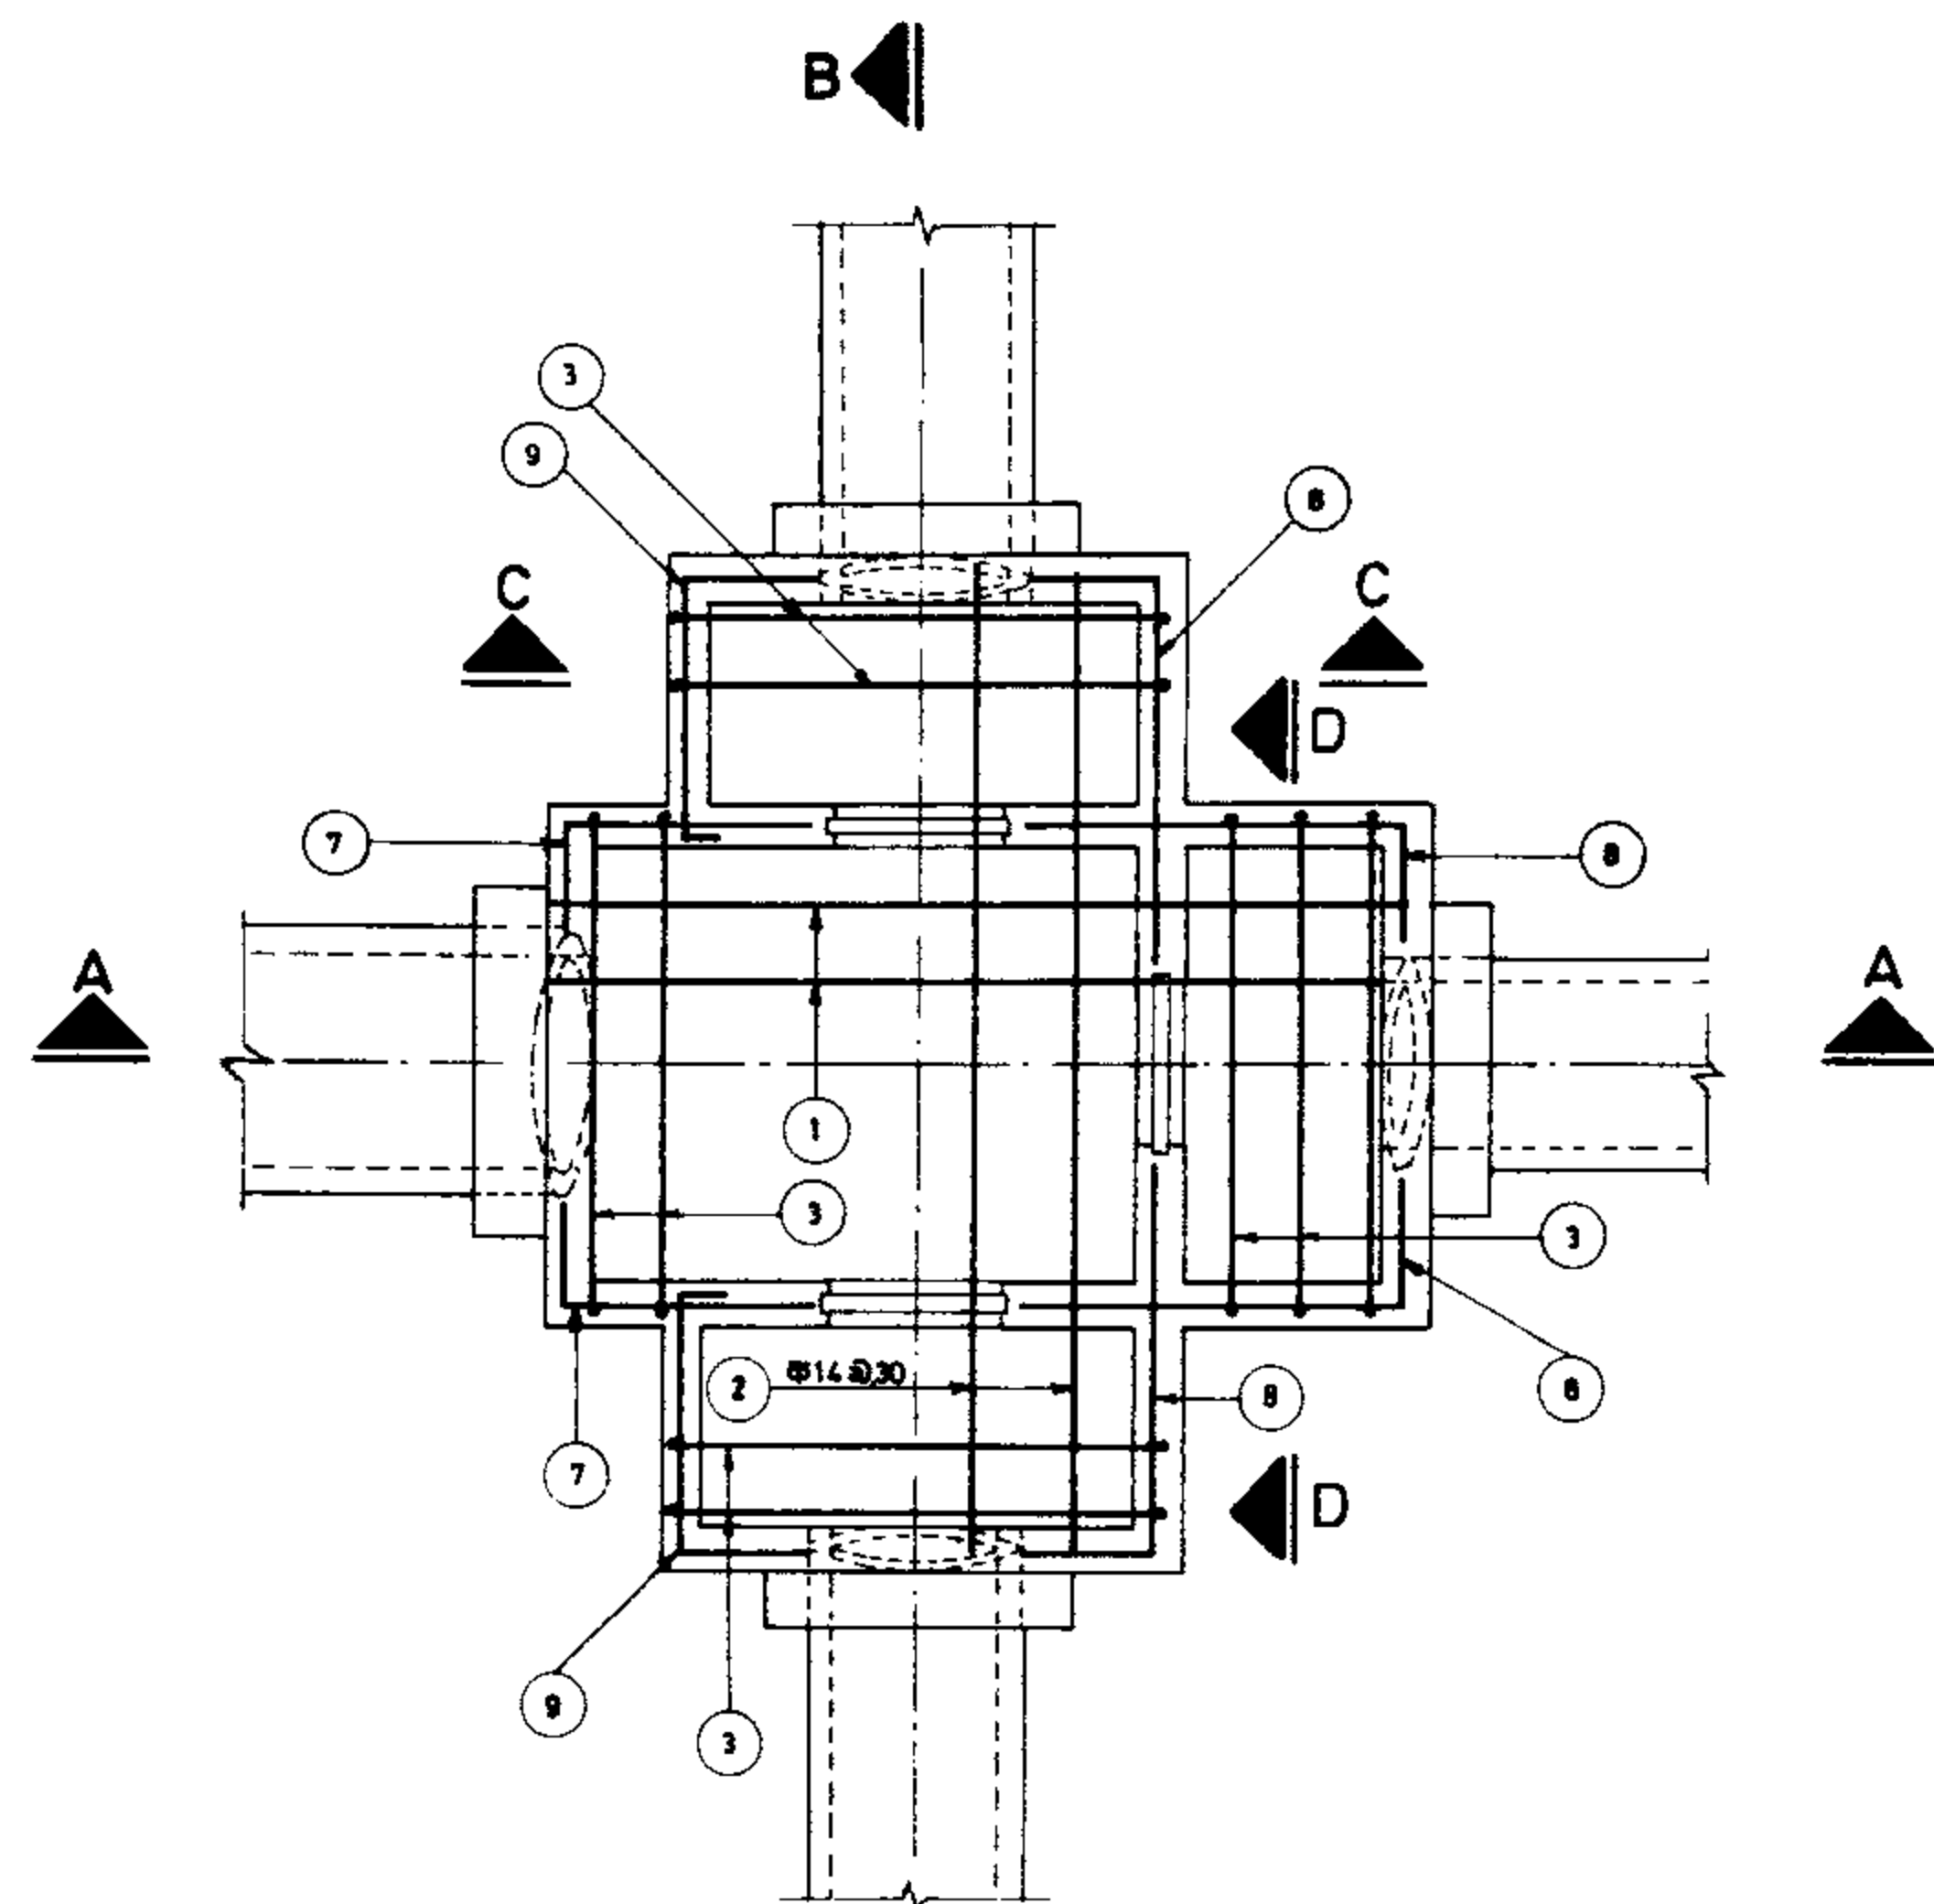


PLAN
Scale 1:40

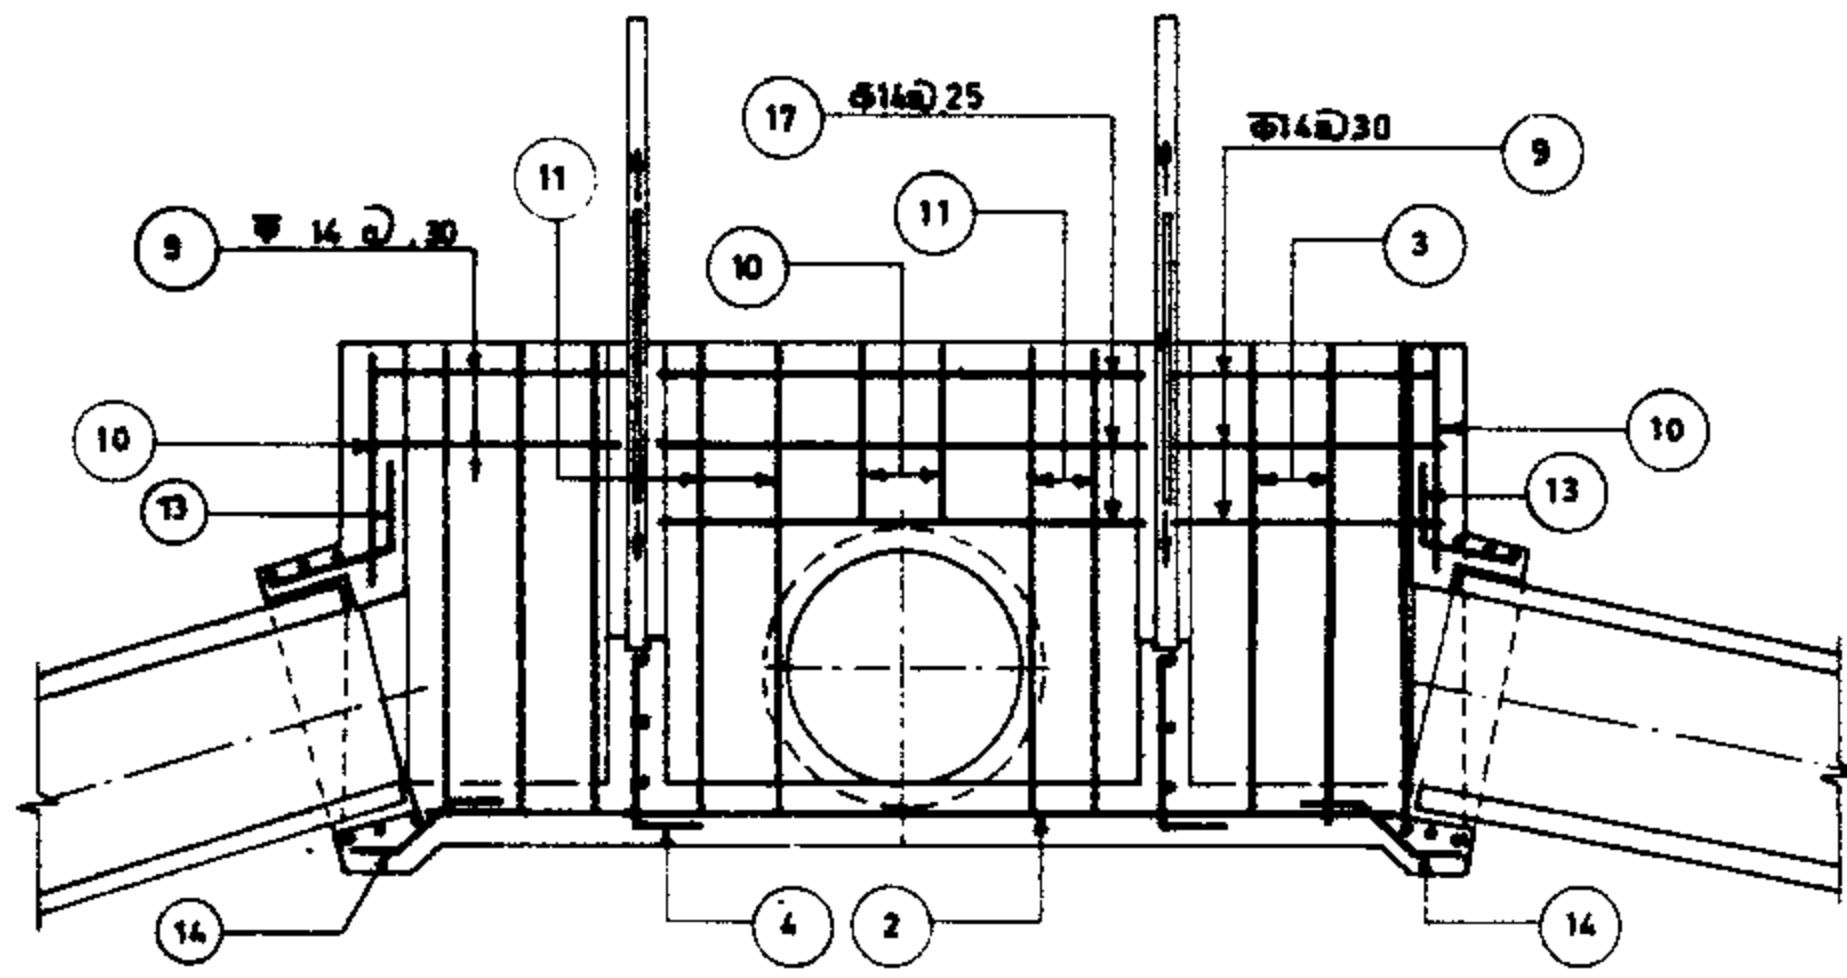


SECTION B_B
Scale 1:40

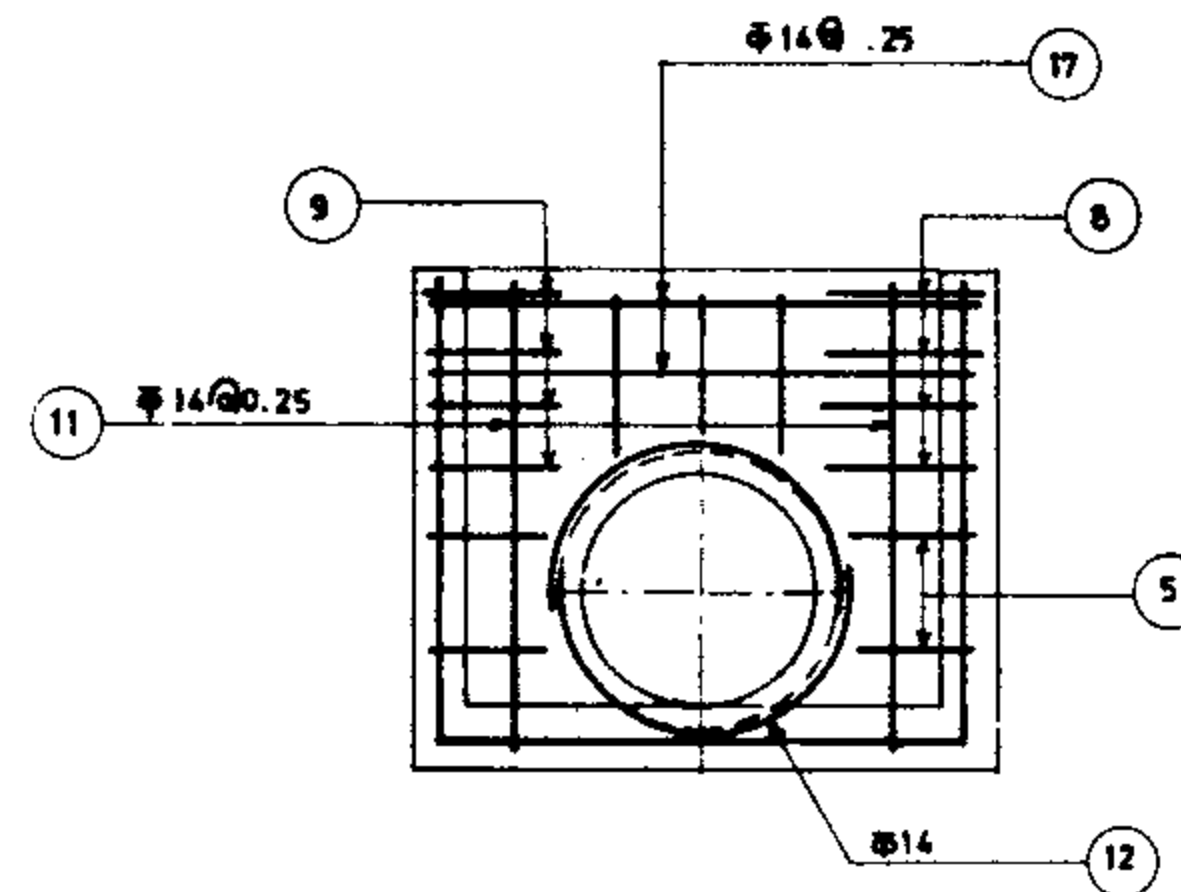

SECTION C_C
Scale 1:40

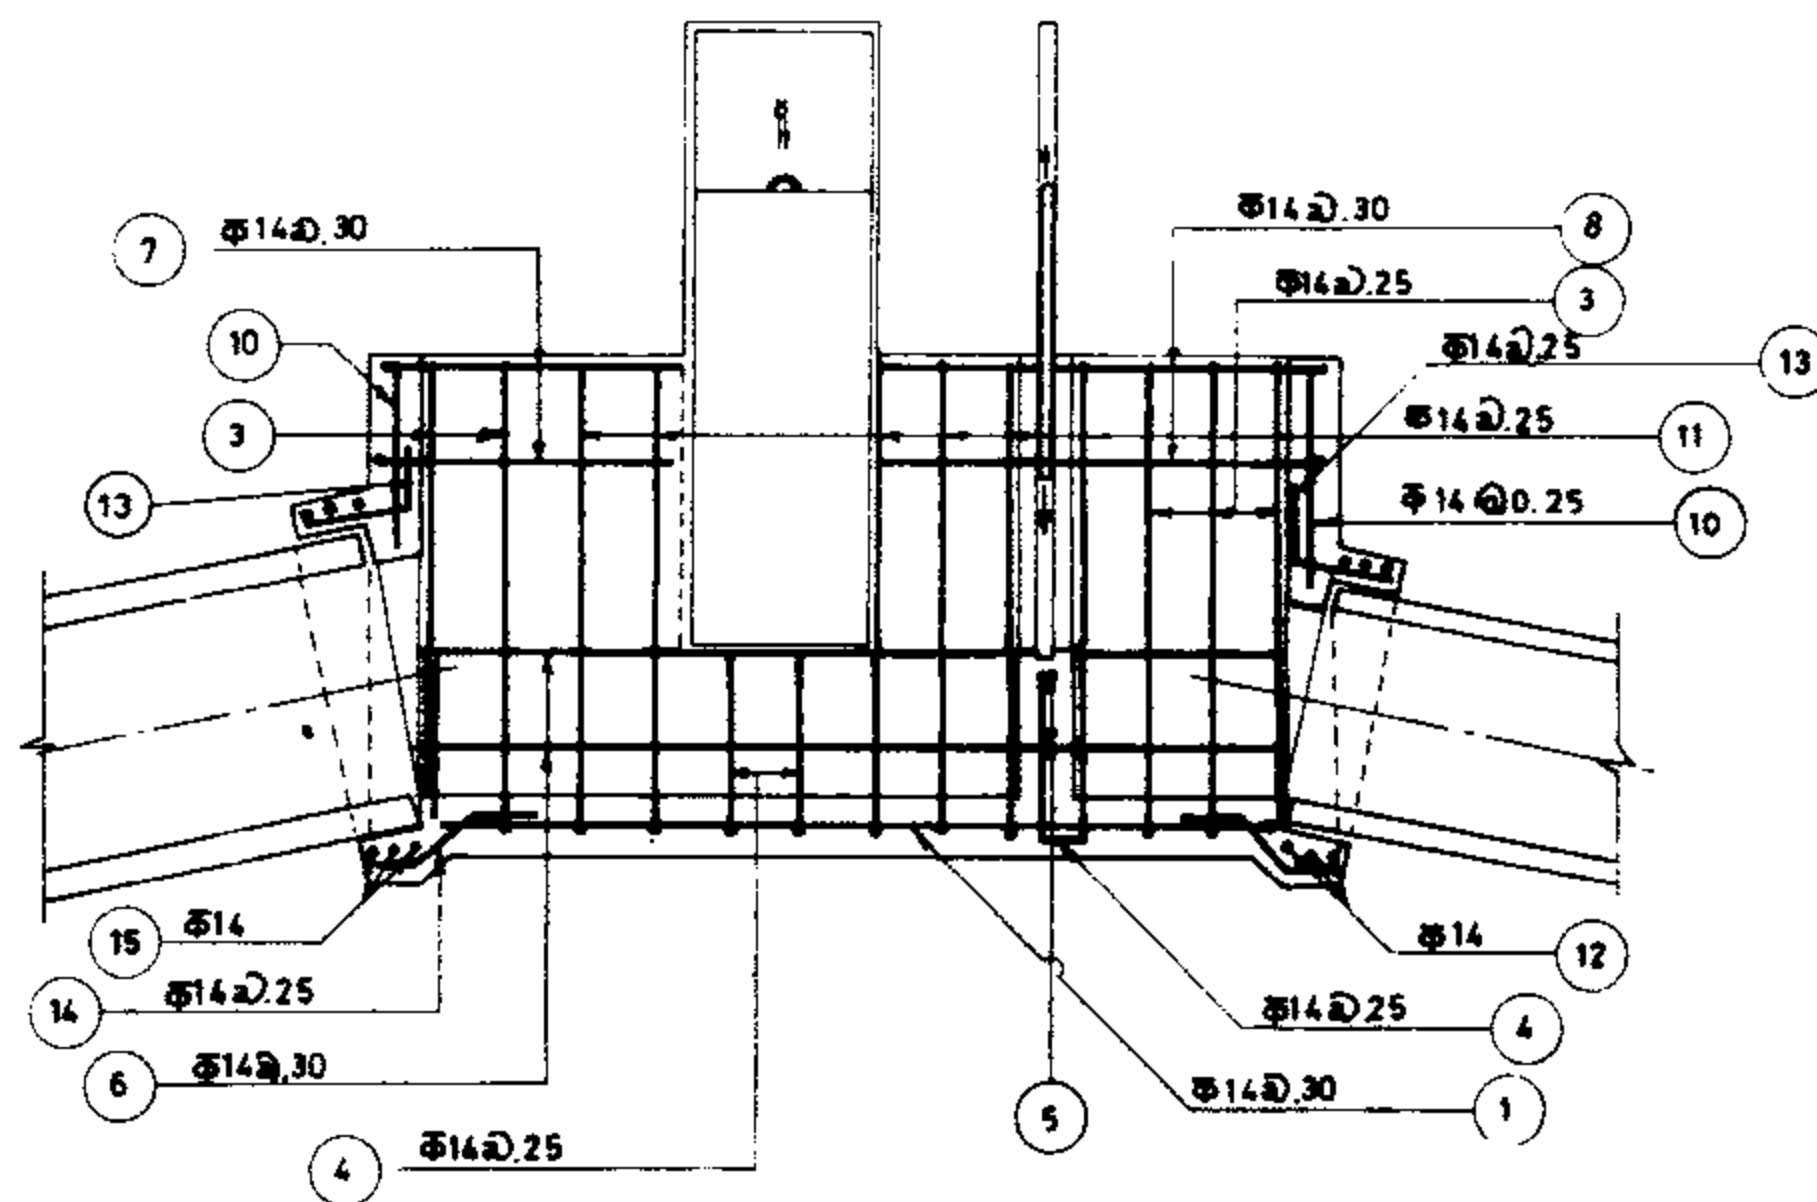


SECTION A_A
Scale 1:40

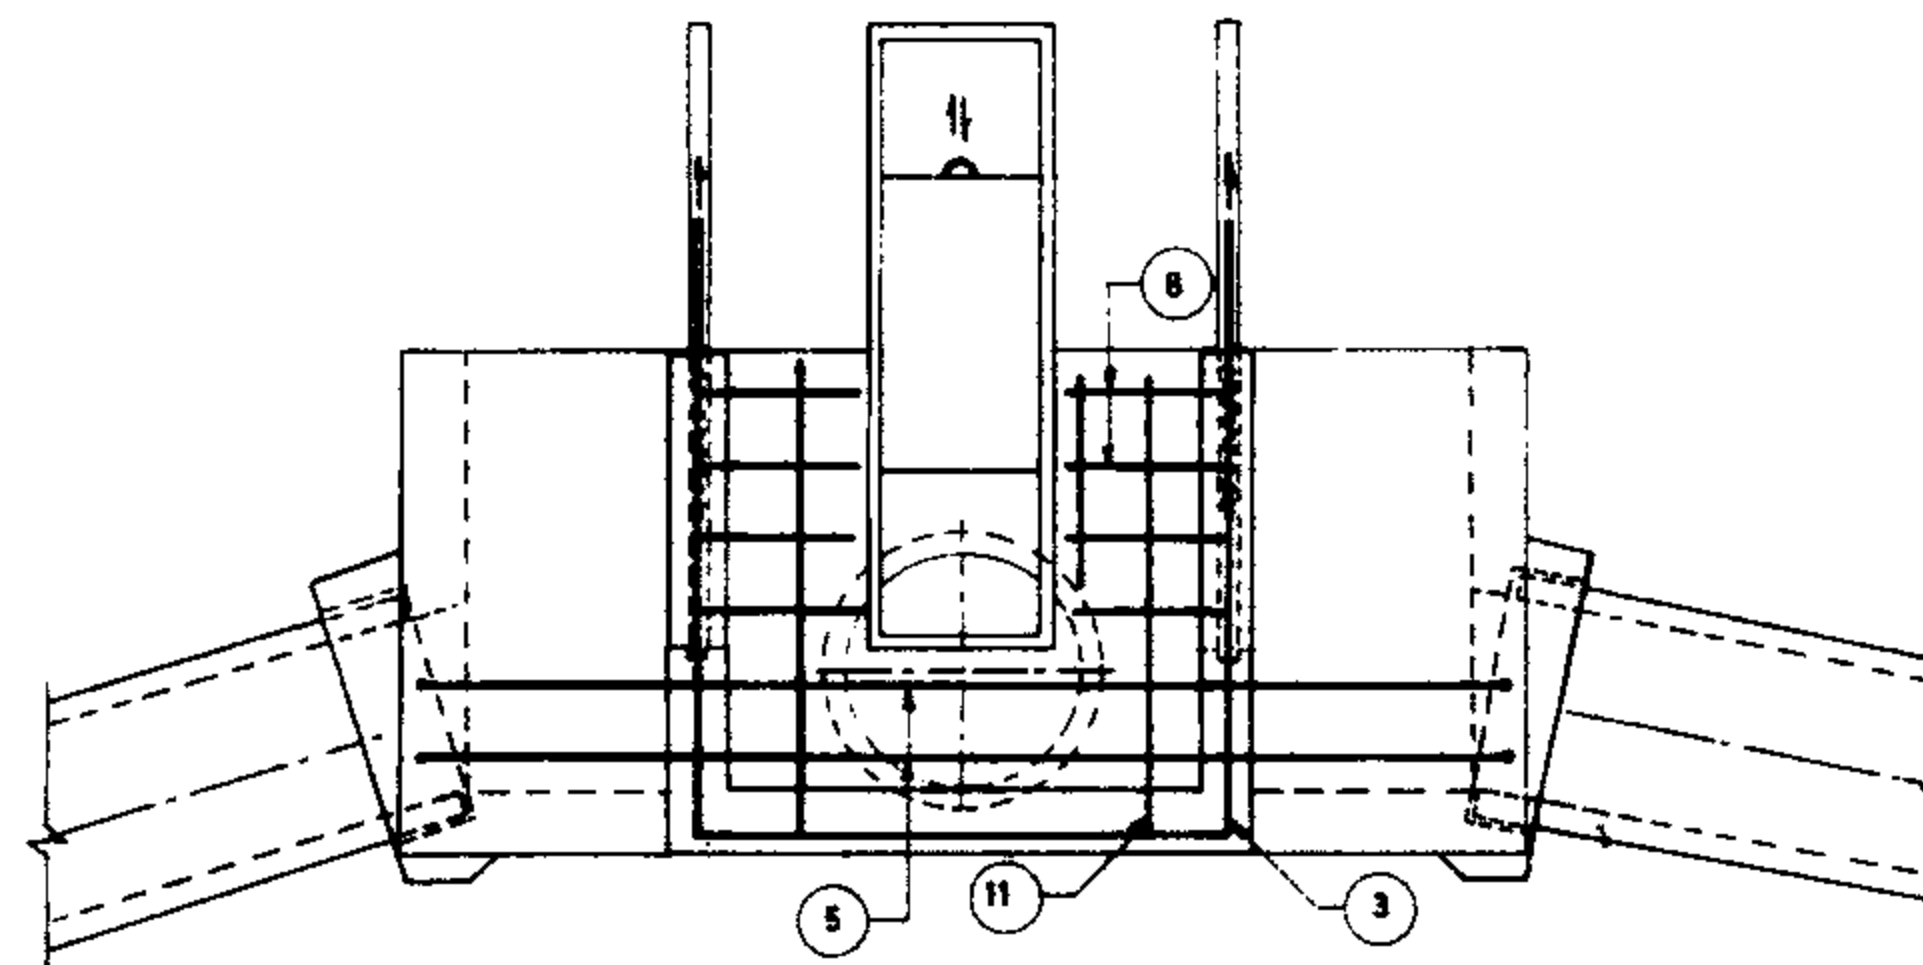

SECTION D_D
Scale 1:40

POS	Nº	FORM	UNIT LENG.	TOTAL LENG.
1	7	3.08	3.08	21.56
2	7	3.58	3.58	25.06
3	14	1.95 1.01 1.95	4.91	68.74
4	9	0.95 0.20	0.75	6.75
5	2	0.45 3.61 0.45	4.51	9.02
6	4	0.45 3.11 0.45	4.01	16.04
7	8	0.45 0.95	1.40	11.20
8	16	0.45 1.45	1.90	30.40
9	8	0.90 0.90 0.20	1.60	12.80
10	13	0.50	0.50	6.50
11	26	1.55 0.20	1.75	45.50
12	9	0.40 0.40	3.79	34.11
13	48	0.40 0.40	0.80	38.40
14	17	0.75	0.75	12.75
15	3	0.40 0.40	4.66	13.98
16	16	0.20 1.15 0.20	1.55	24.8
17	16	0.20 1.81 0.20	2.21	35.36
			412.97	
412.97		X	1.21	= 499.69 kg

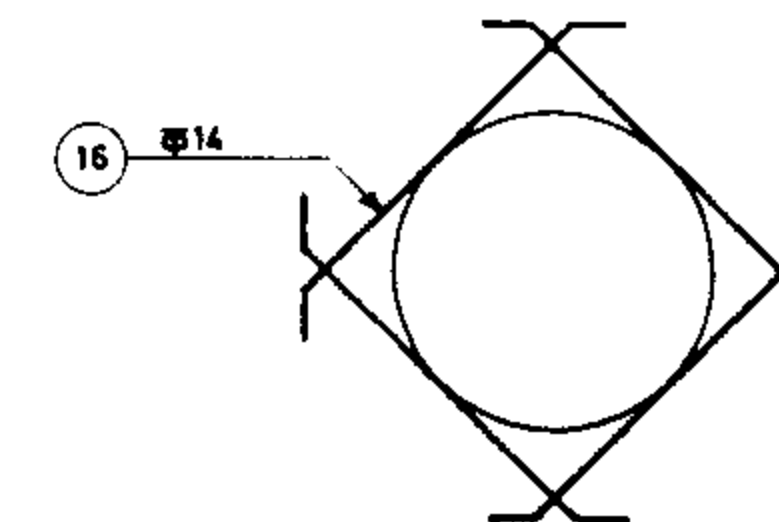

ALL BARS ARE $\phi 14$ (1.21 kg/m)

REFERENCE DWGS. FOR PLAN & SECTION SEE DWG. Nº 12/7/1/05

Scale: 1:40

IRRIGATION & DRAINAGE STANDARDS

Date:


DWG. Nº 12/7/3/05

Approved:


Sheet. Nº 14 of 18 Rev. Nº

DIVISION BOX (TYPE 5)
REINFORCEMENT


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

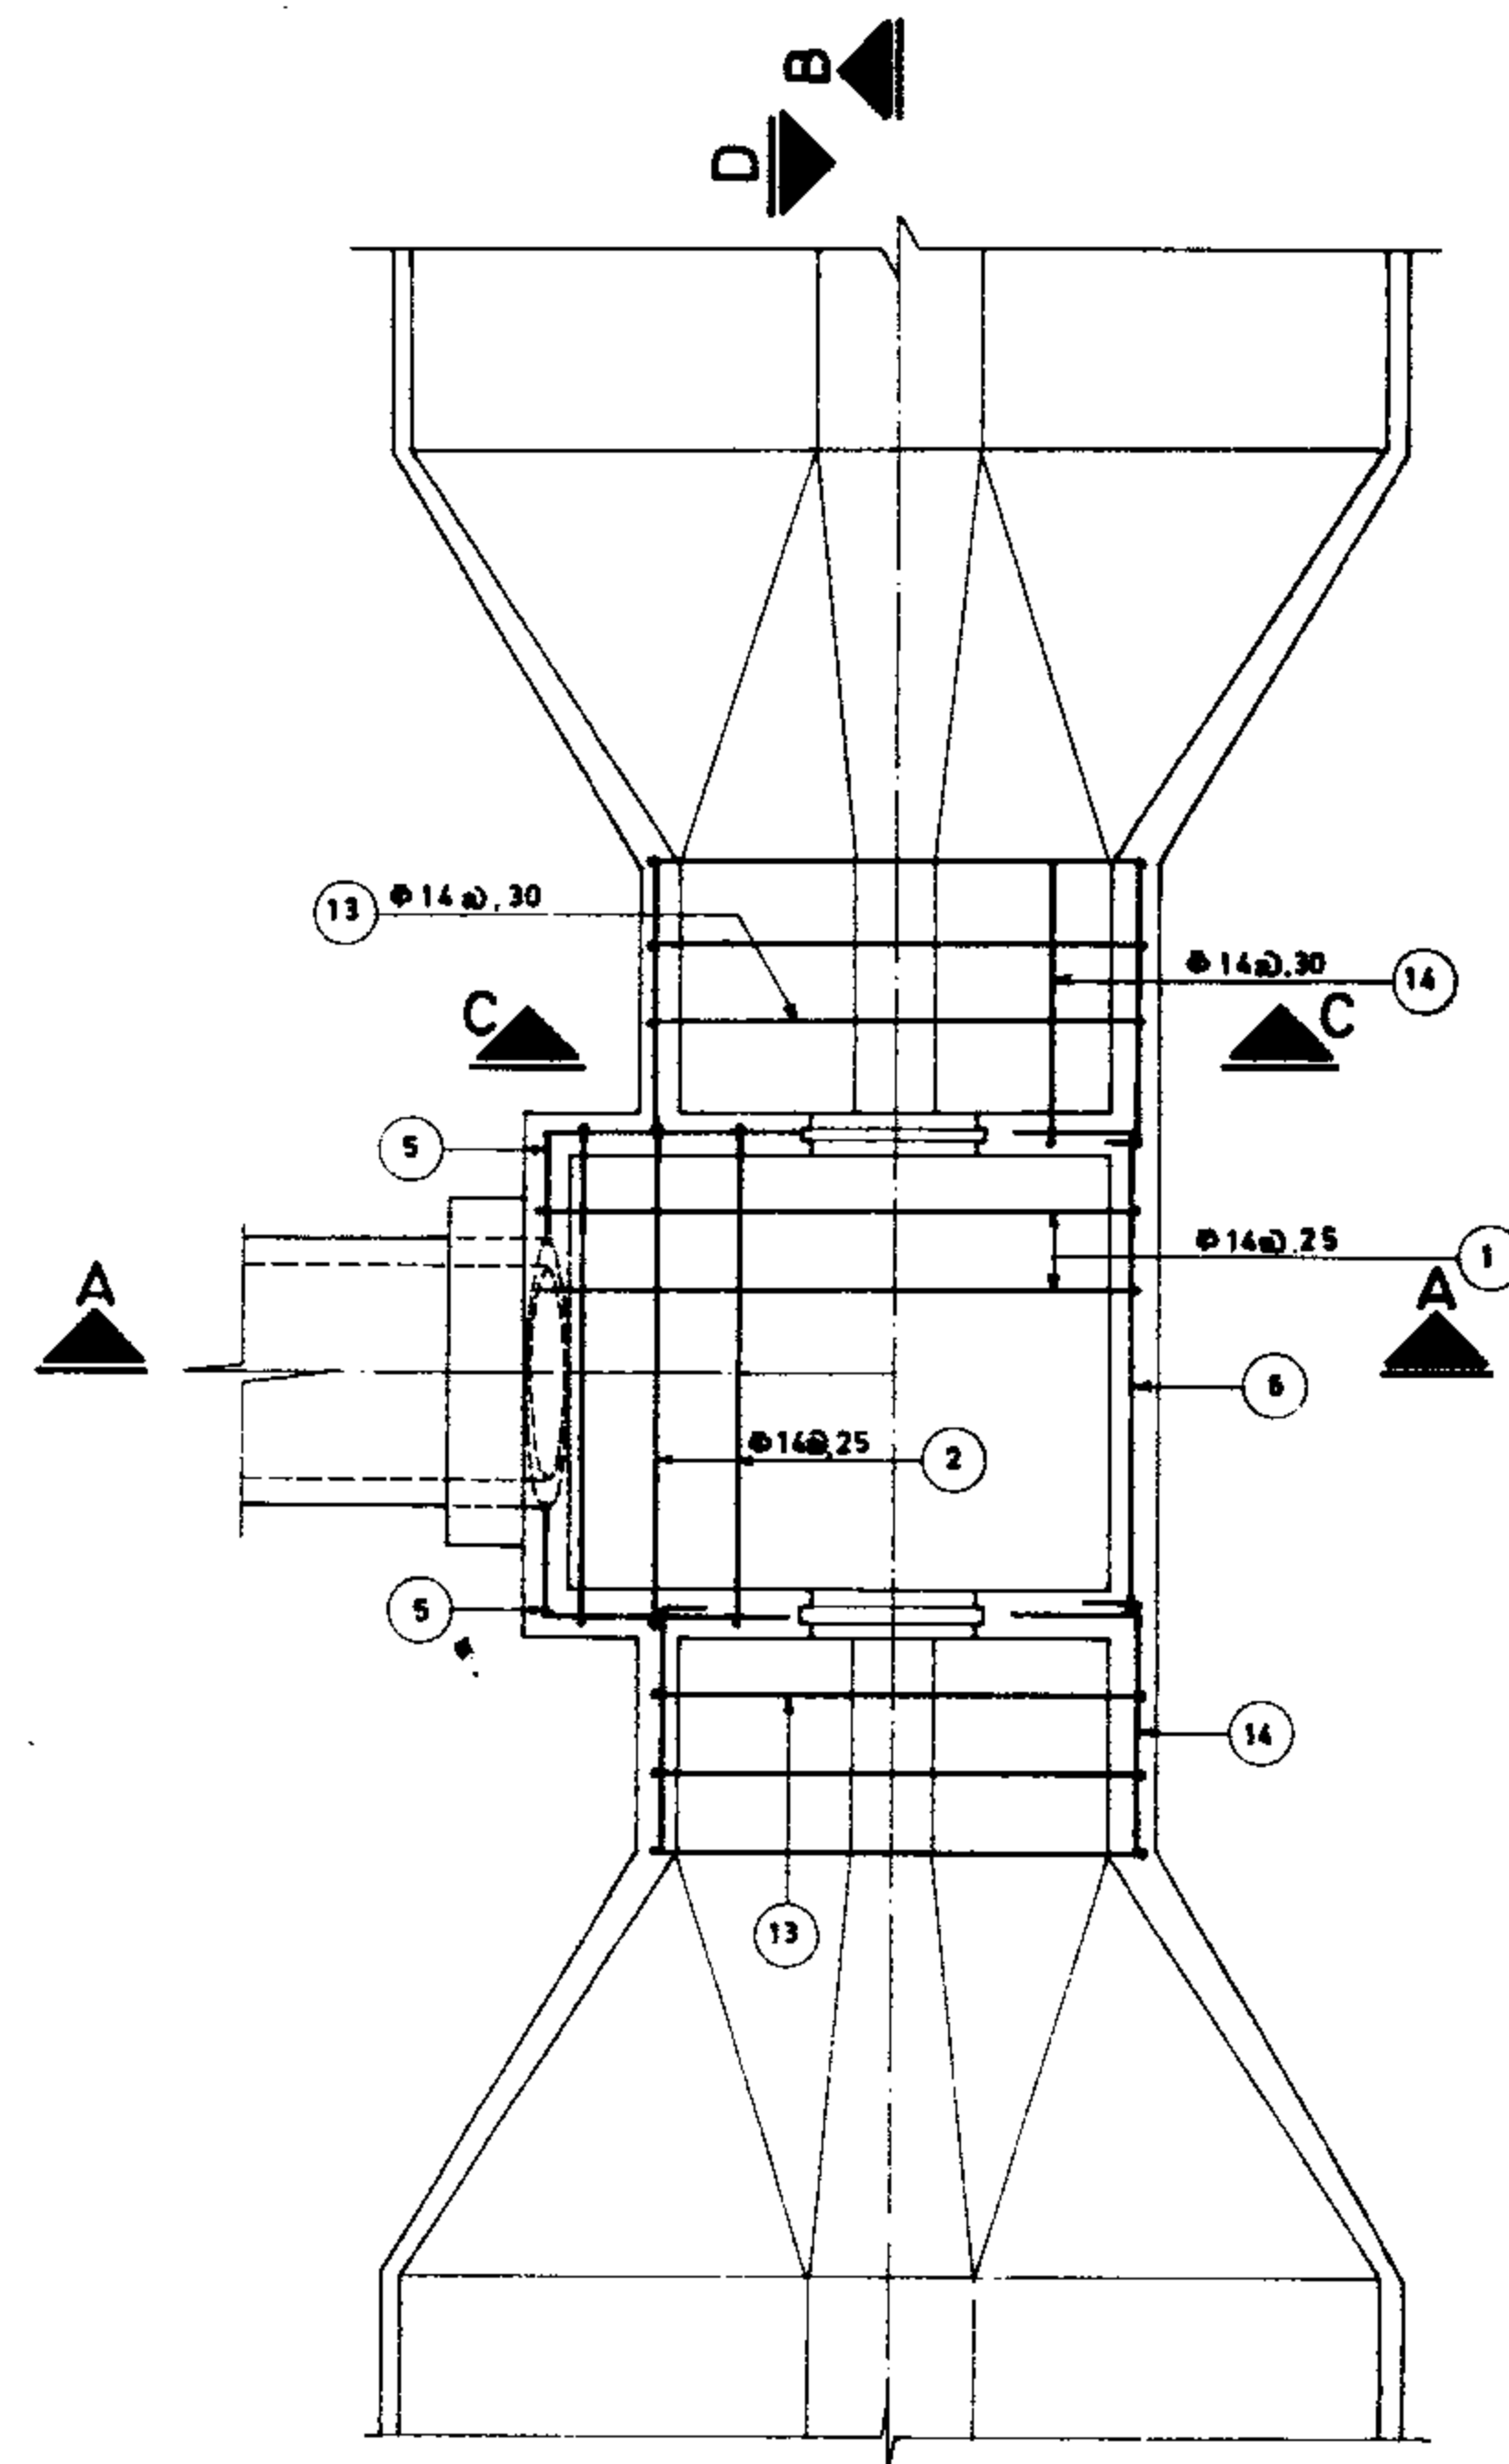


PLAN
Scale 1:40

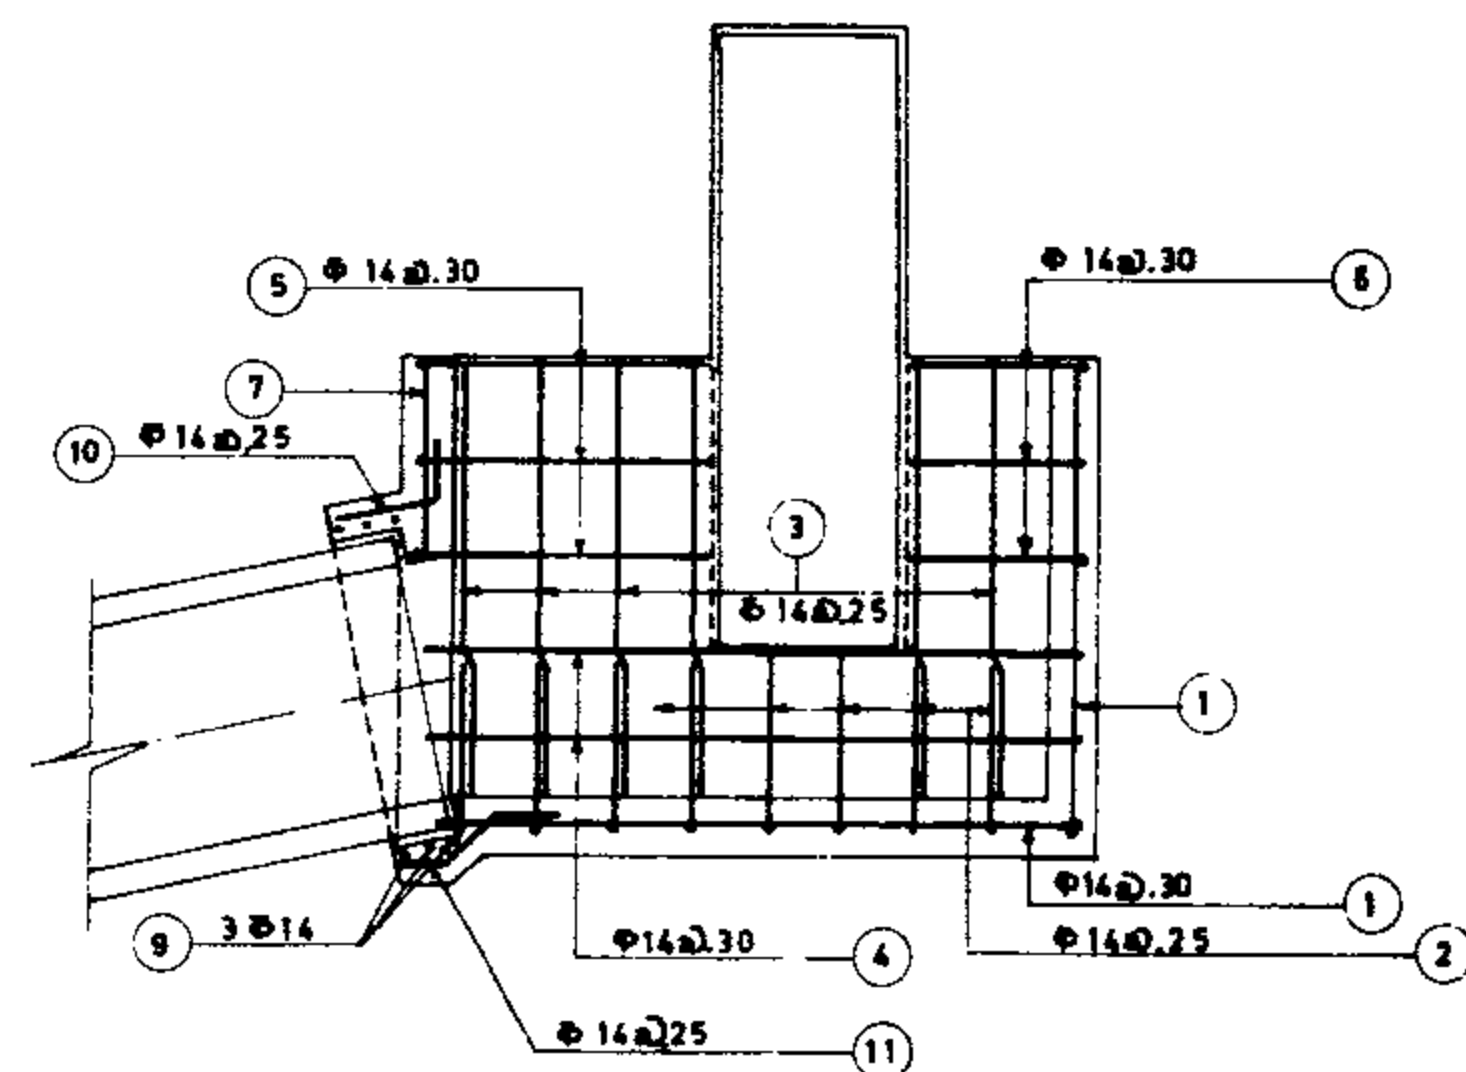


SECTION A-A
Scale 1:40

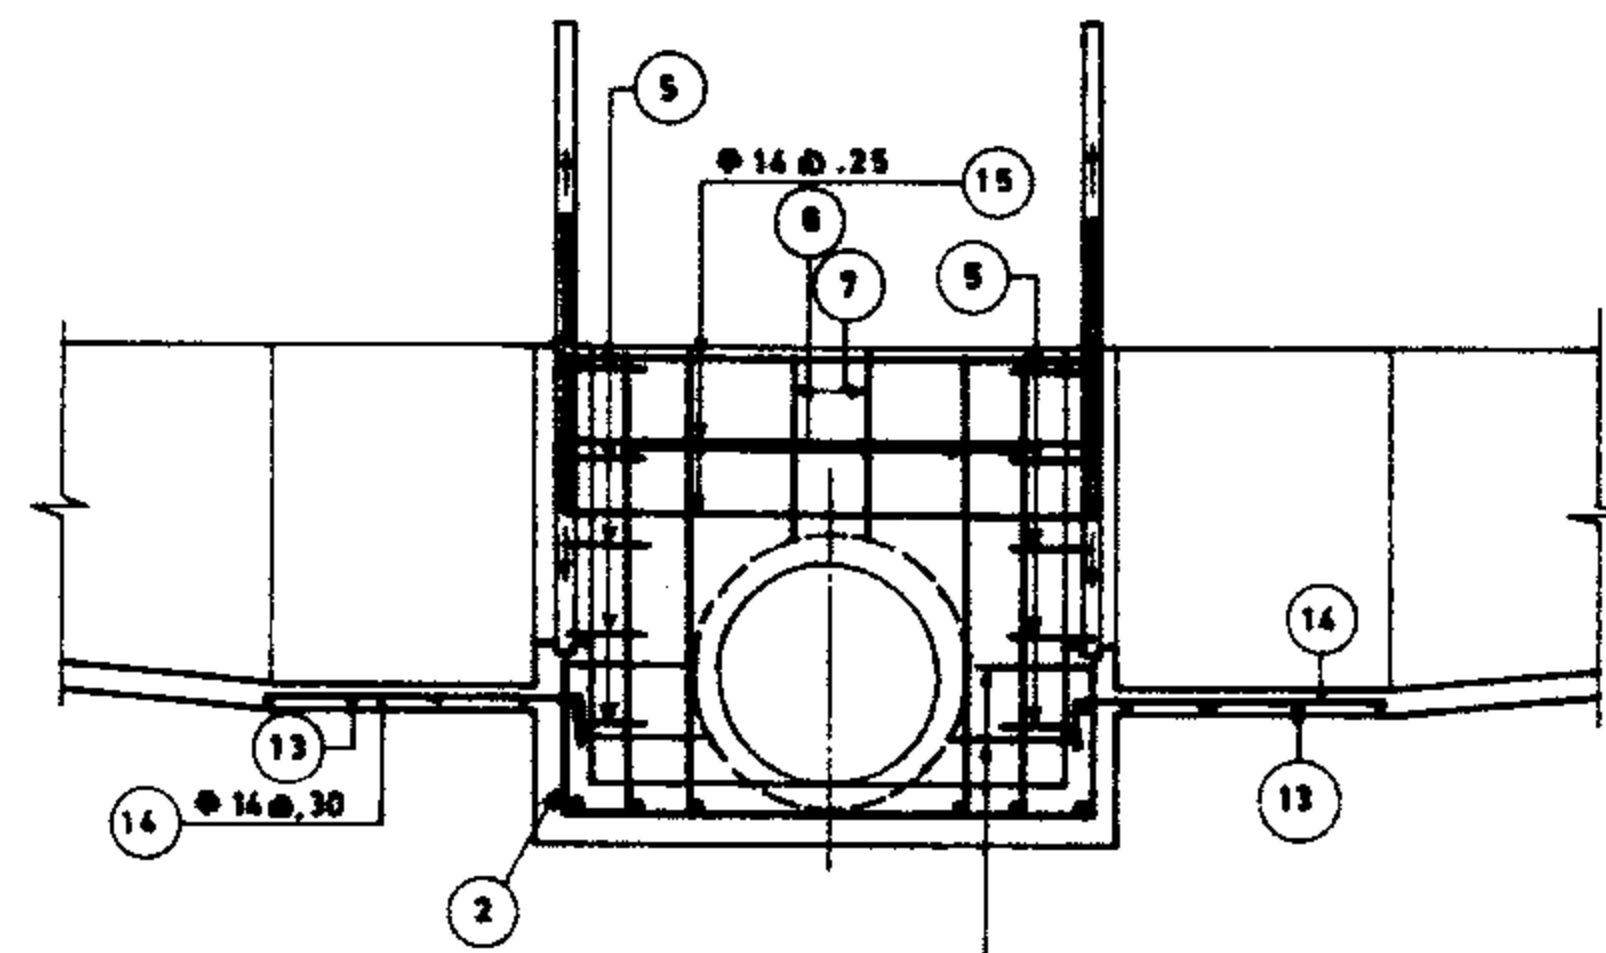


SECTION B-B
Scale 1:40

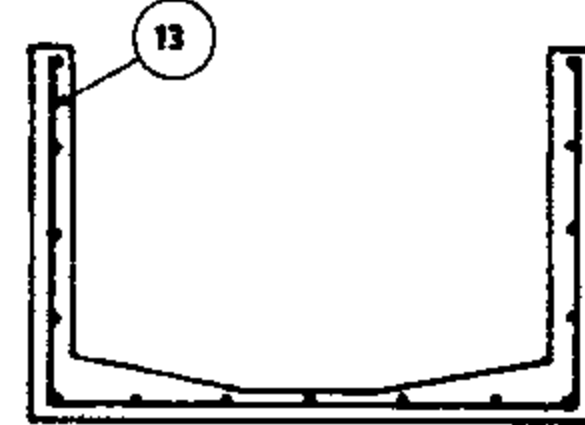

SECTION C-C
Scale 1:40

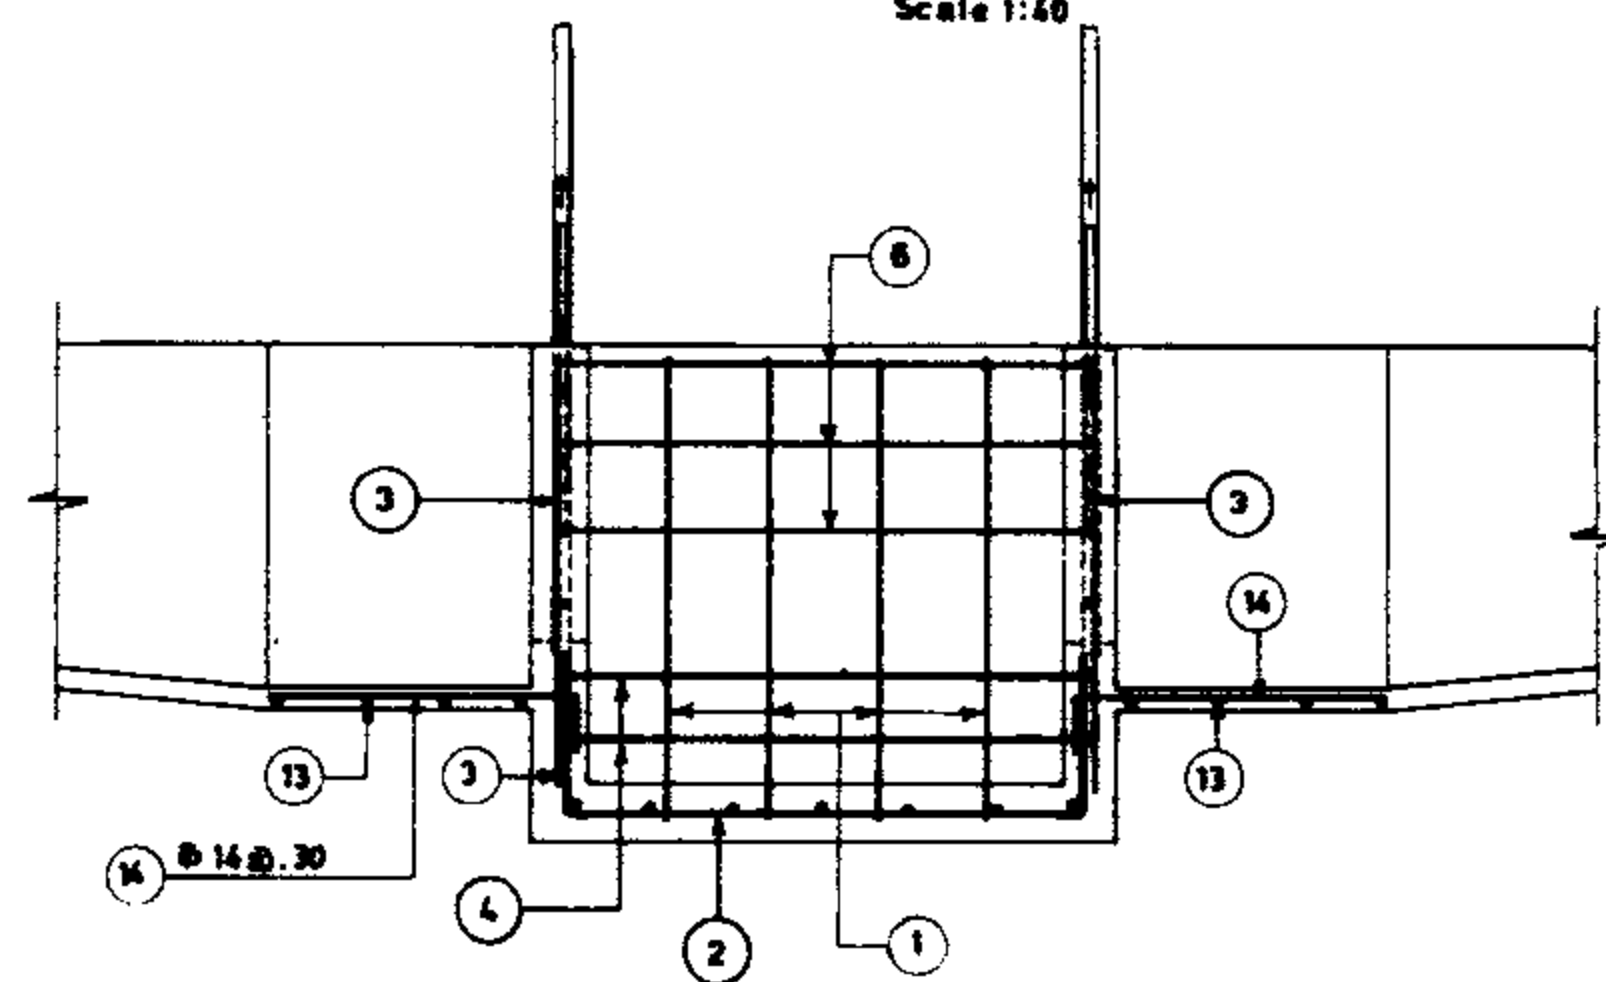

SECTION D-D
Scale 1:40

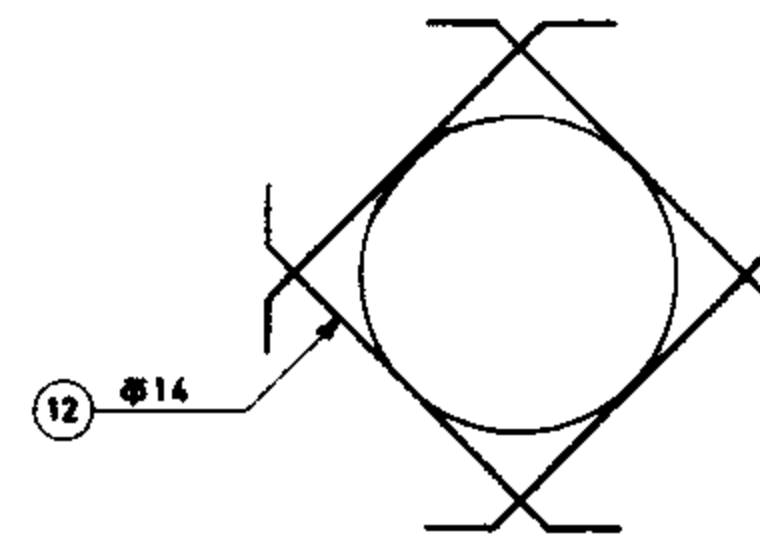

POS	Nº	FORM	UNIT LENG.	TOTAL LENG.	
1	9	155 230	3.65	3285	
2	10	055 181 055	2.91	29.10	
3	16	165	1.45	23.20	
4	2	035 278 035 278 178	6.84	1368	
5	8	035 095	1.30	1040	
6	4	055 176 055	2.88	1152	
7	3	080	0.60	180	
8	4	155 020	1.75	700	
9	3	040 040 040	4.66	1398	
10	12	050 030	0.80	9.60	
11	5	075	0.75	375	
12	4	020 135 020	1.55	620	
13	6	135 181 135	4.11	2466	
14	32	030 105	1.30	41.60	
15	3	180	1.80	540	
			234.74		
234.74		X	121	=	284.04 kg

ALL BARS ARE 14 (1.21 Kg/m)

REFERENCE DWGS. FOR PLAN & SECTION SEE DWG. Nº 12/71/06

Scale 1:40

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG. Nº 12/73/06






Approved:
















Sheet. Nº 15 of 18


Rev. Nº

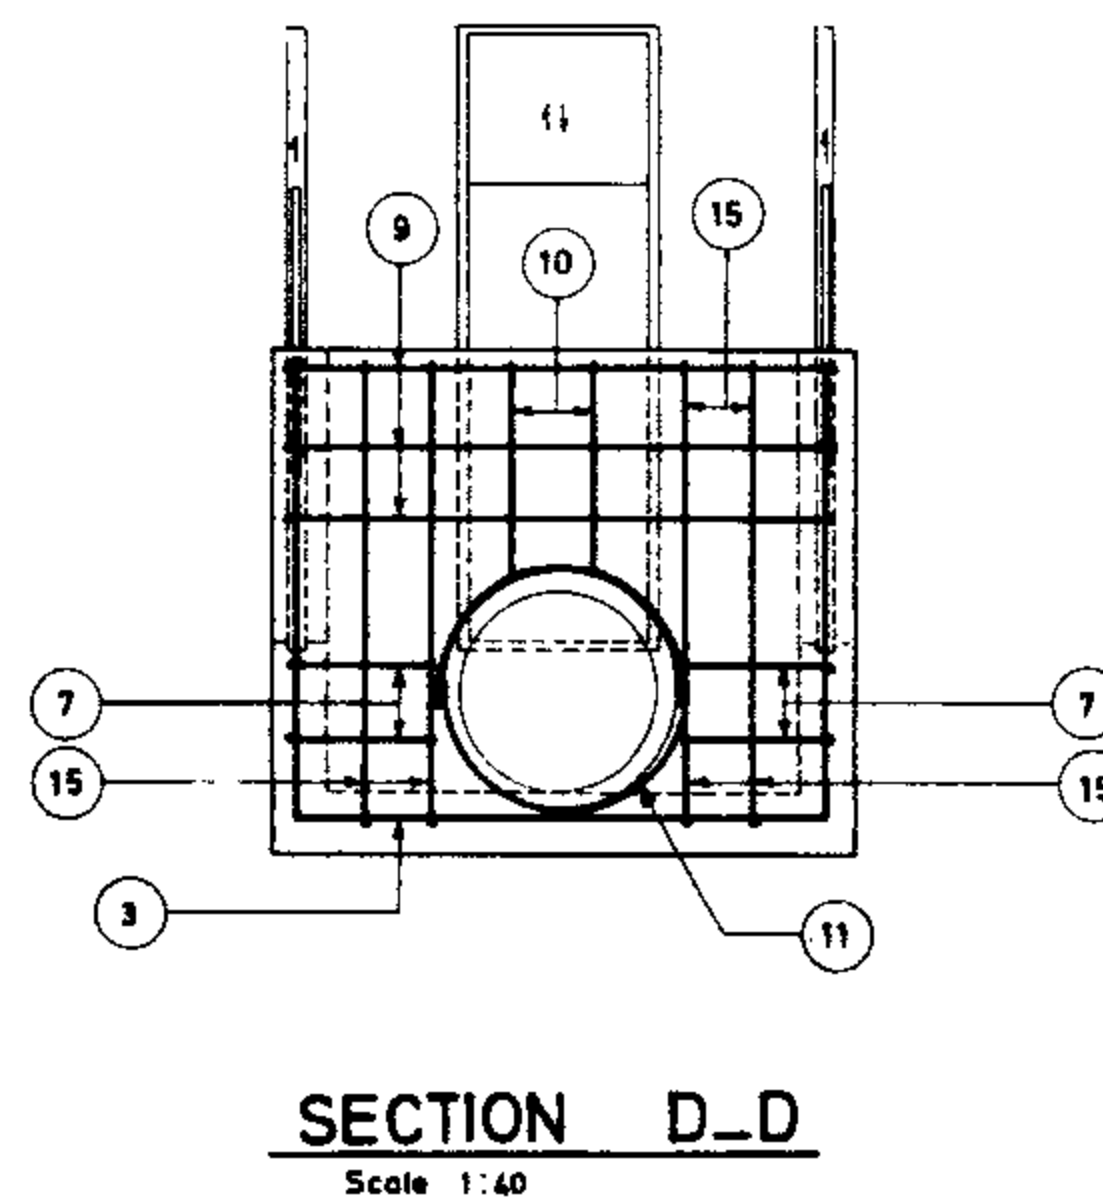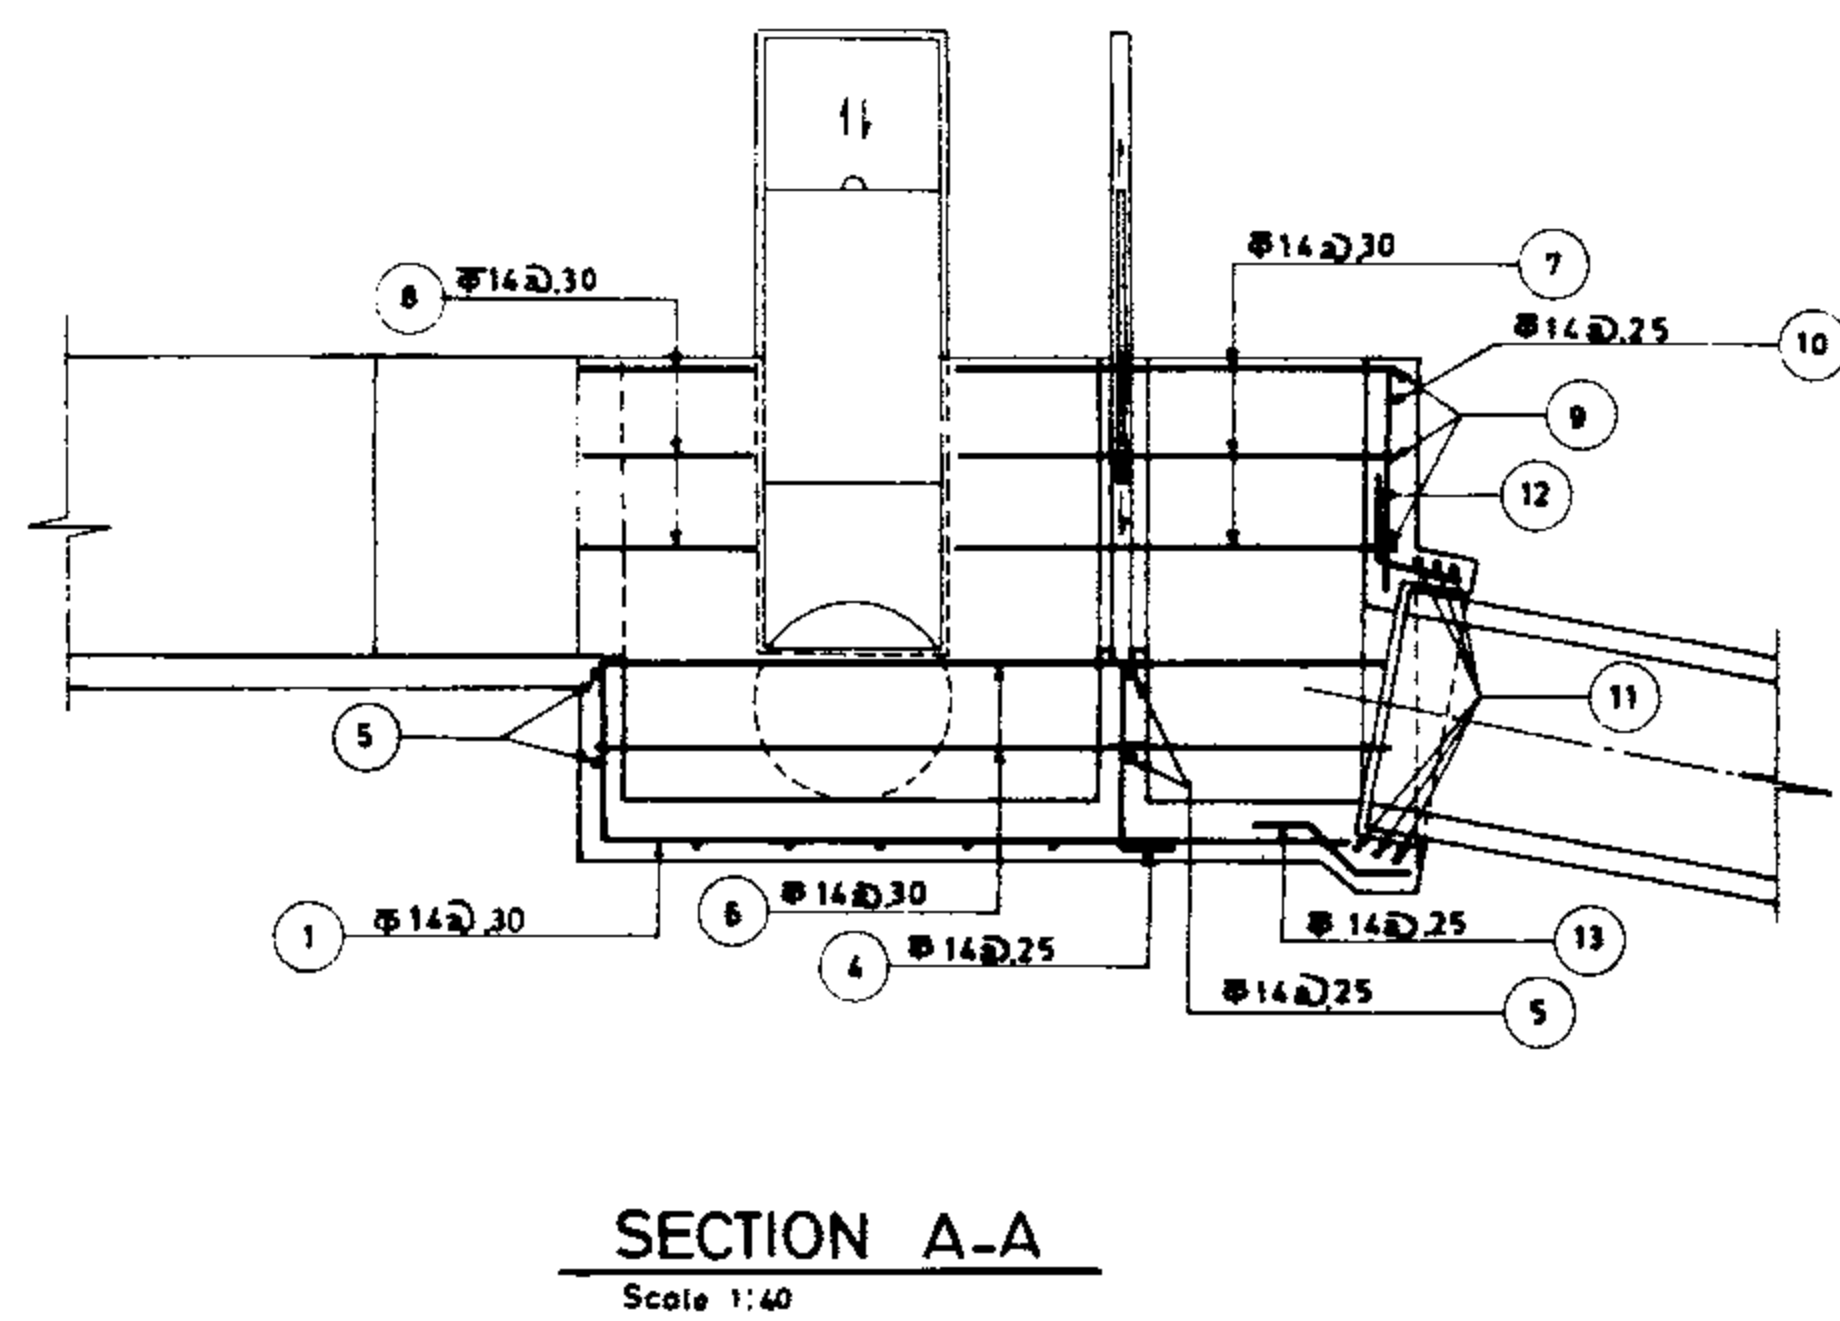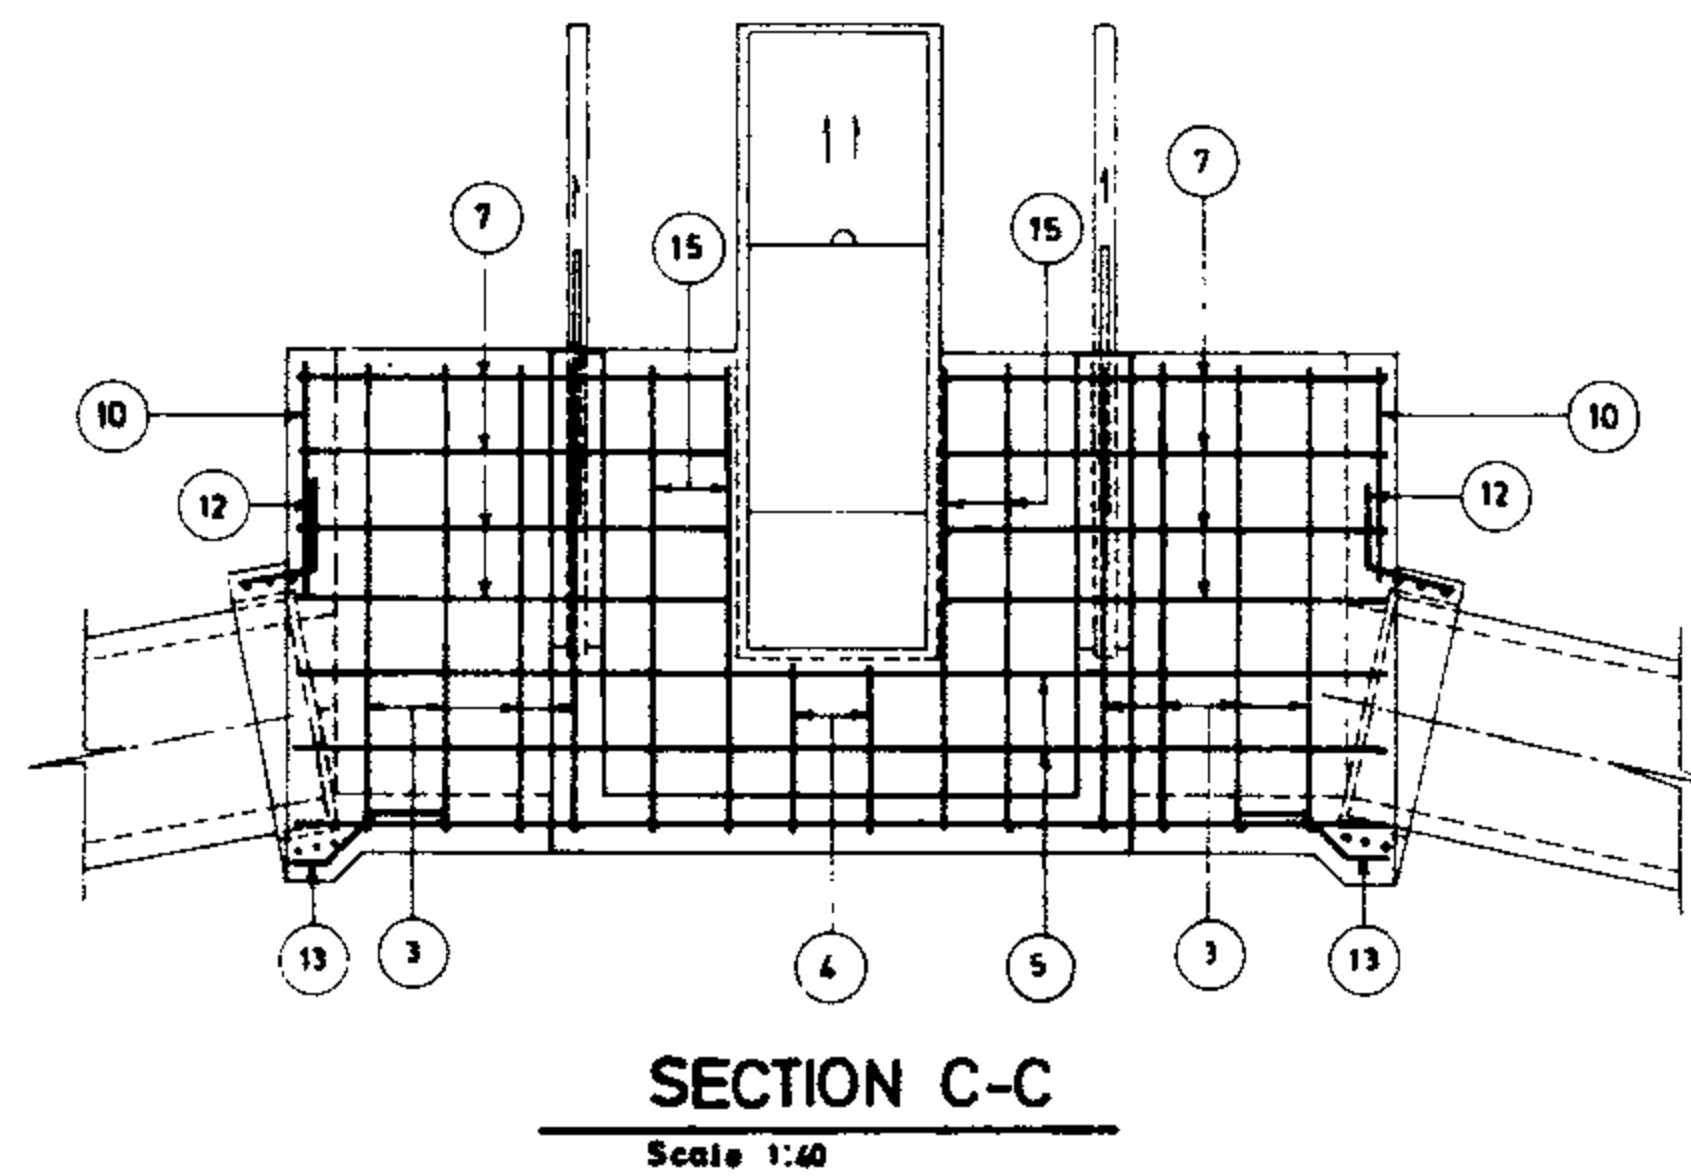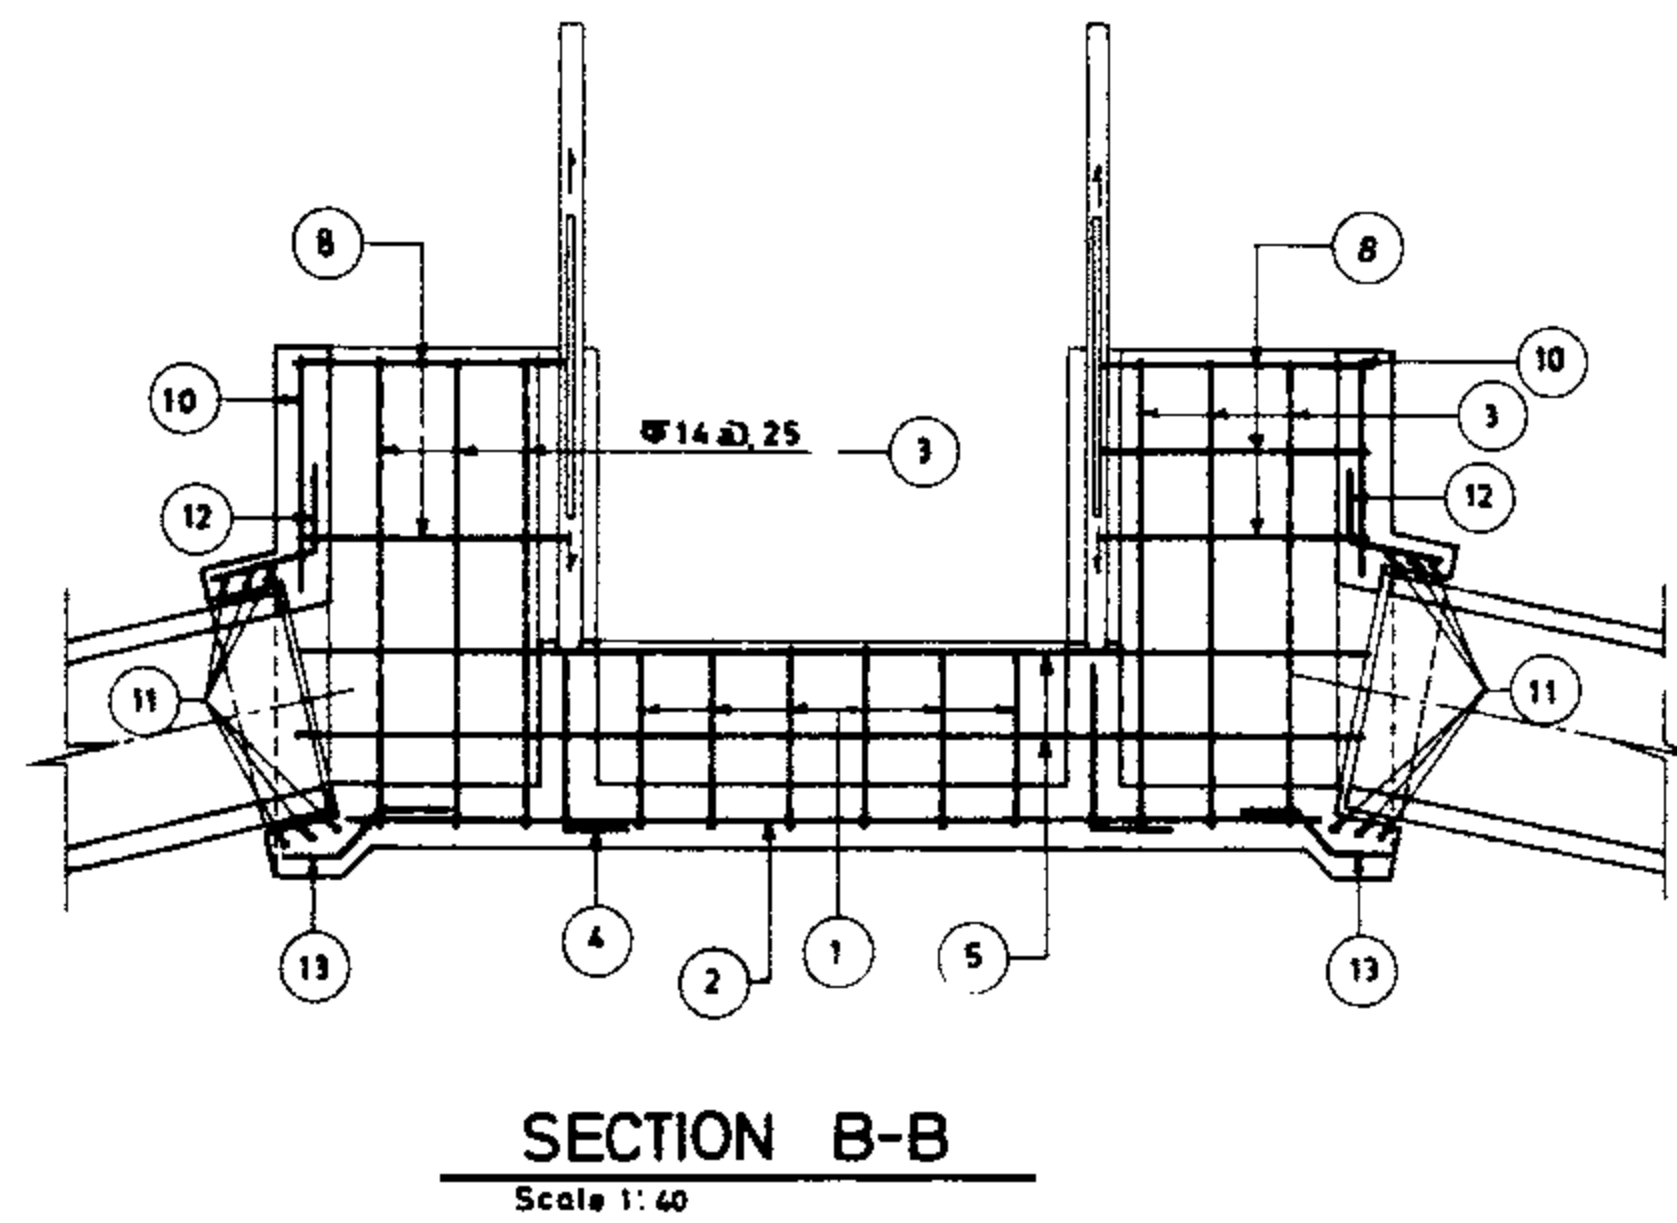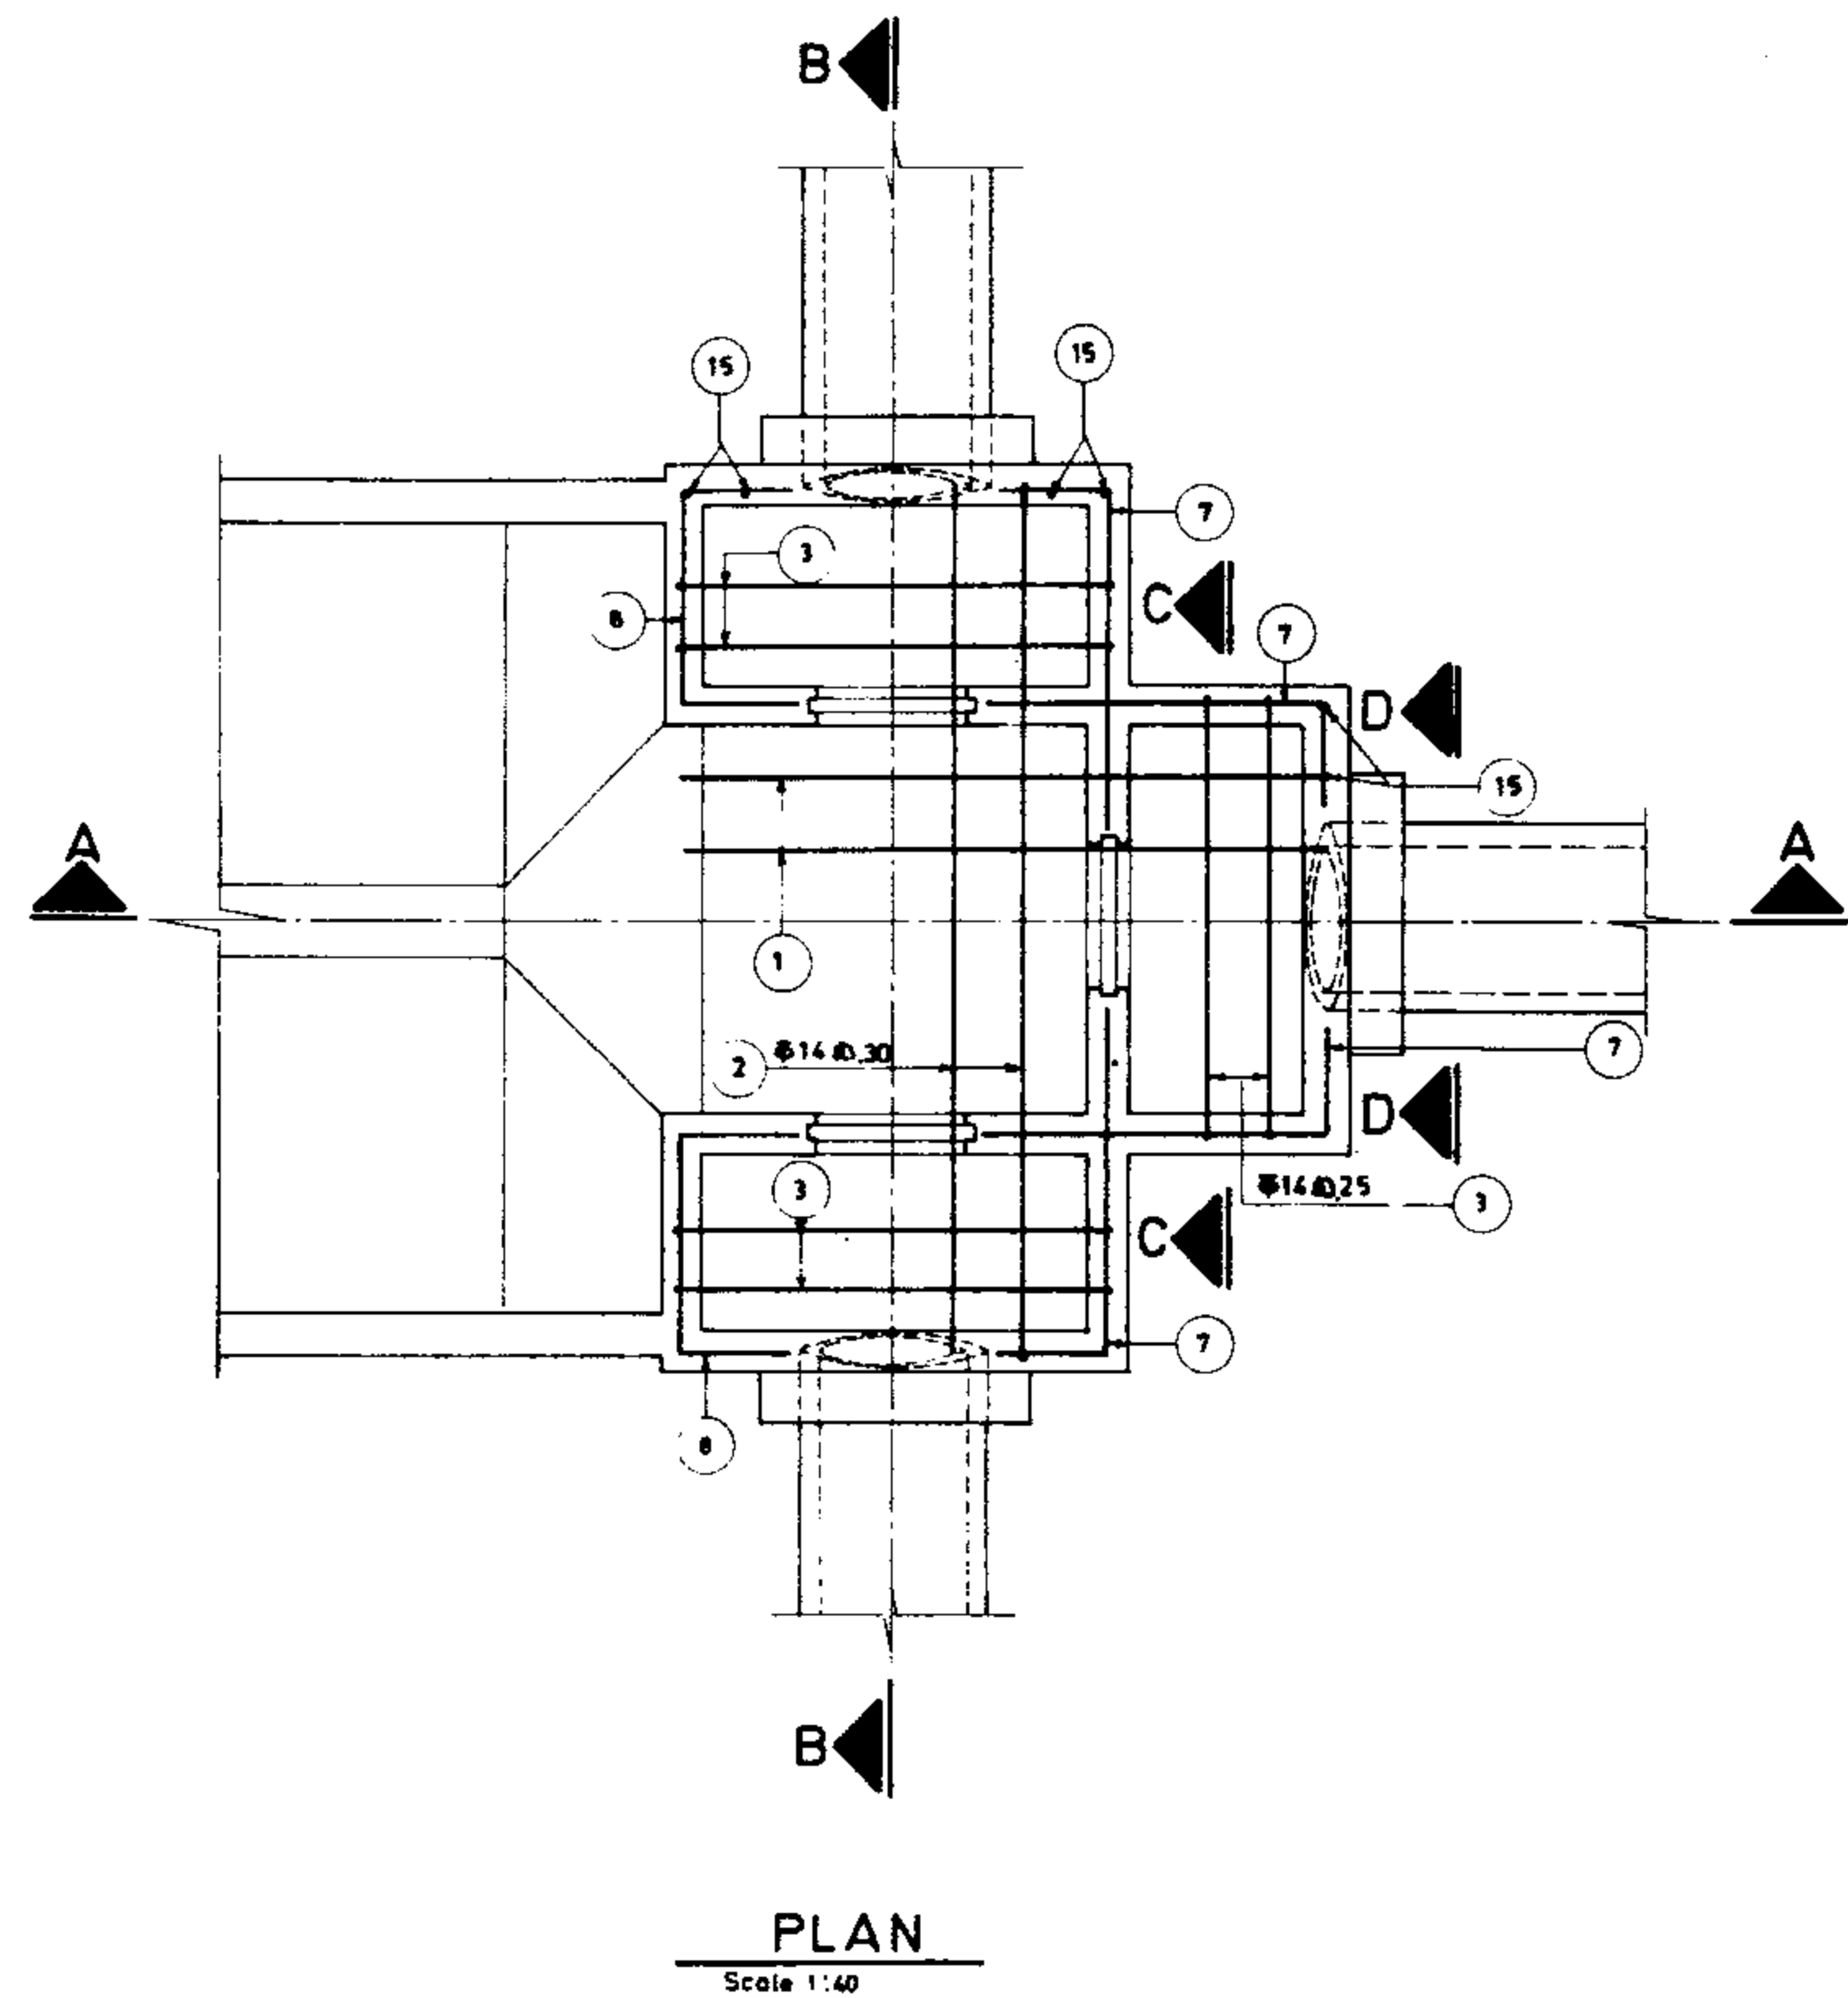DIVISION BOX (TYPE 6)
REINFORCEMENT

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU



POS	Nº	Form	UNIT LENG.	TOTAL LENG.
1	7	0,95  2,88	323	22,61
2	7	 3,58	358	2506
3	12	1,55  1,81 1,55	4,91	5892
4	9	 0,55 0,20	0,75	675
5	4	0,45  3,61 0,45	4,51	1804
6	4	0,30  2,70 0,45	3,45	1380
7	16	0,45  1,44	1,89	3024
8	8	0,45  0,90 0,45	1,80	1440
9	12	0,20  1,81 0,20	2,21	2652
10	9	 0,70	0,70	630
11	9	0,40  0,40	0,379	3411
12	33	0,40  0,40	0,80	2640
13	12	 0,75	0,75	900
14	12	0,20  1,15 0,20	1,55	1860
15	24	 1,55 0,20	1,75	4200
			352,75	
352,75	X	121	=	426,83kg

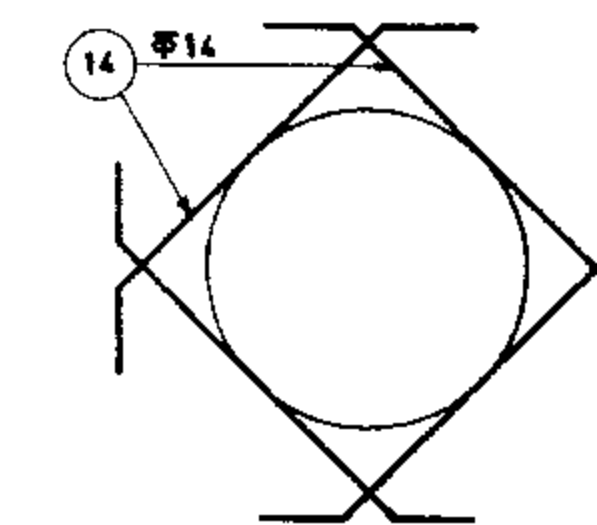

ALL BARS ARE Ø14(1,21 Kg/m)

REFERENCE DWGS. FOR PLAN & SECTION SEE DWG.Nº 12/7/1/07

Scale: 1:40

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG. Nº 12/7/3/07

Approved:

Sheet Nº 16 of 18


Rev.Nº

DIVISION BOX (TYPE 7)
REINFORCEMENT


ISLAMIC REPUBLIC OF IRAN

MINISTRY OF PLAN & BUDJET


TECHNICAL RESEARCH AND
STANDARD BUREAU

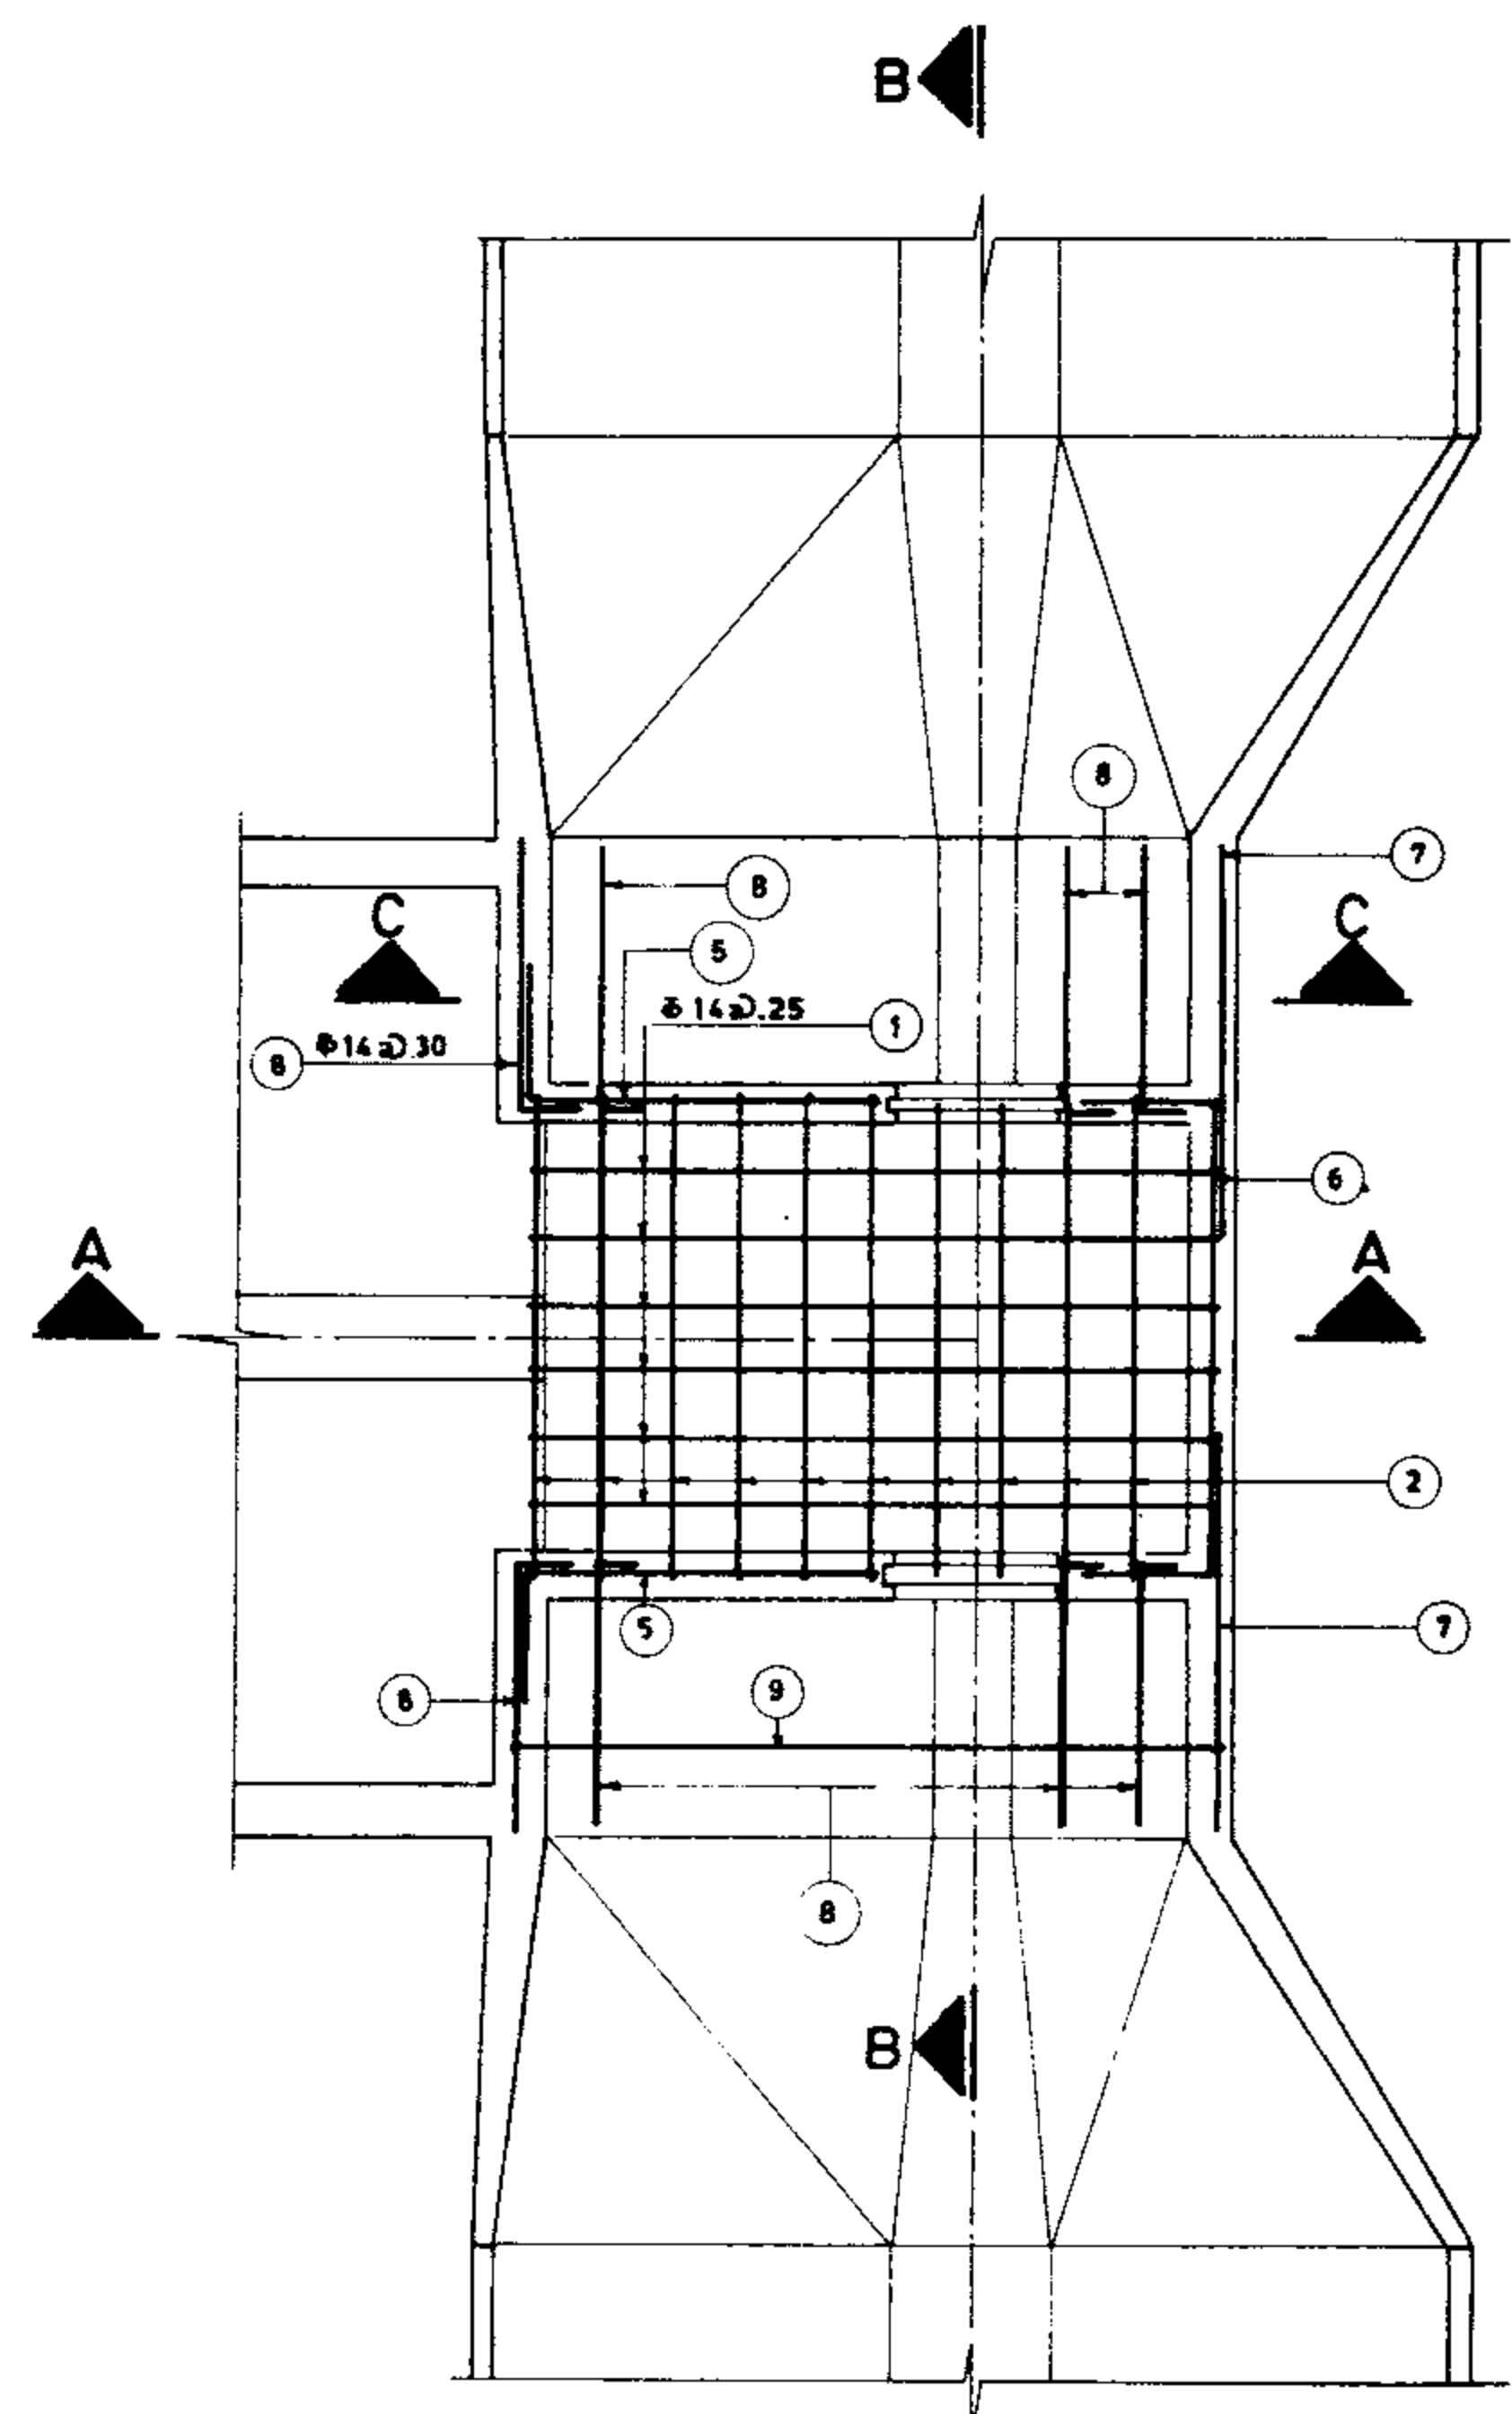


PLAN
Scale: 1:40

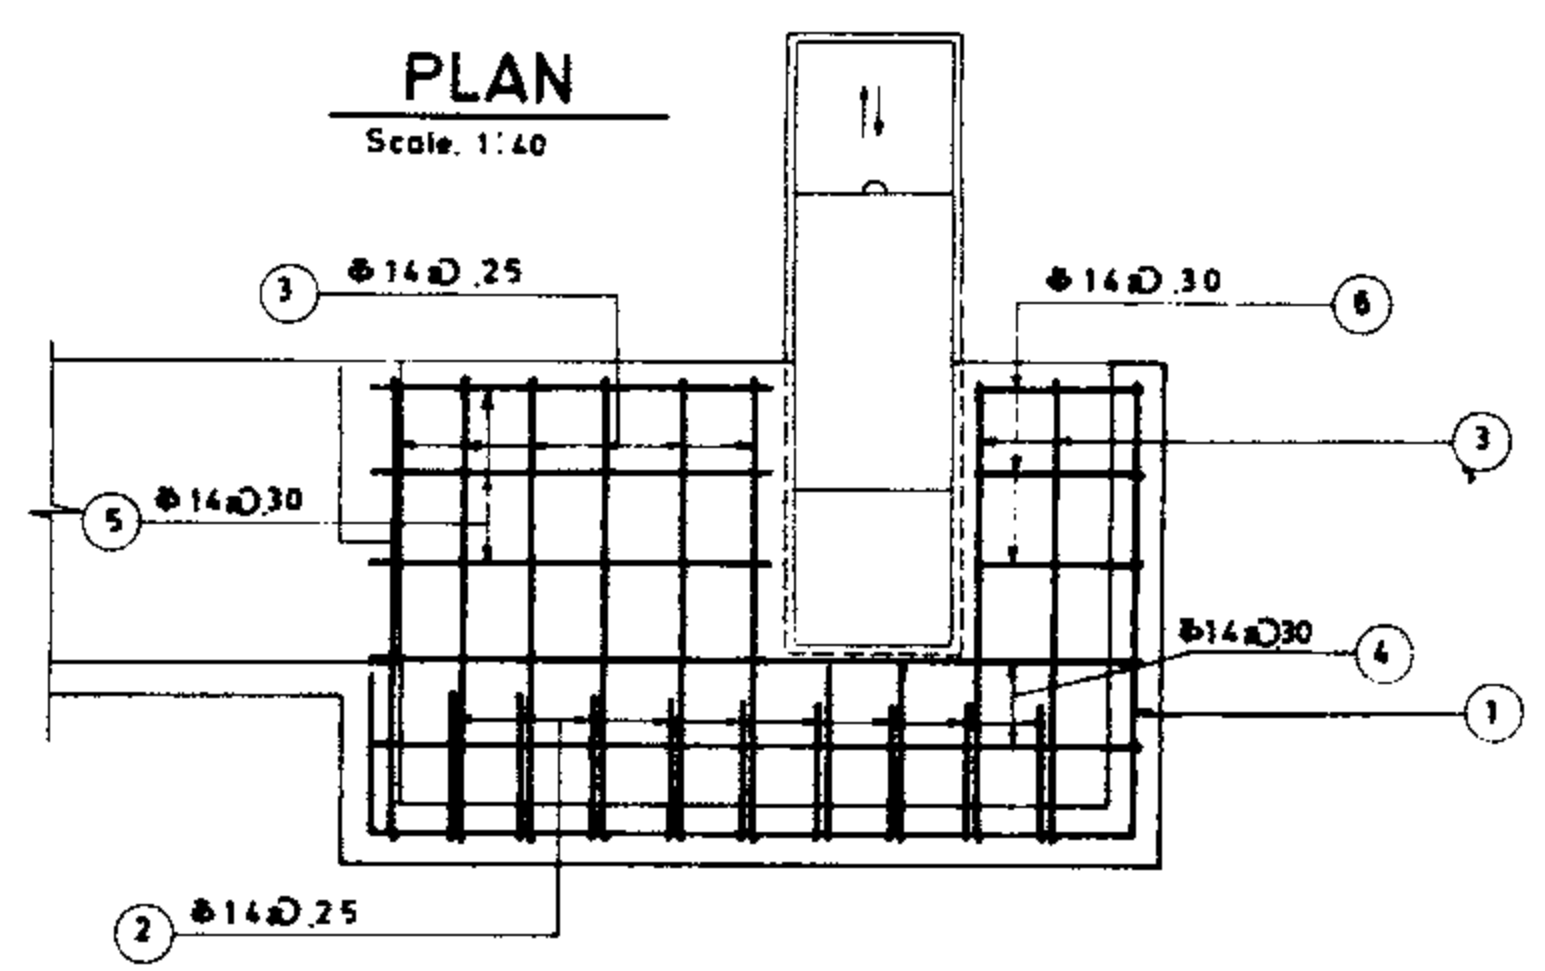

SECTION A-A
Scale: 1:40

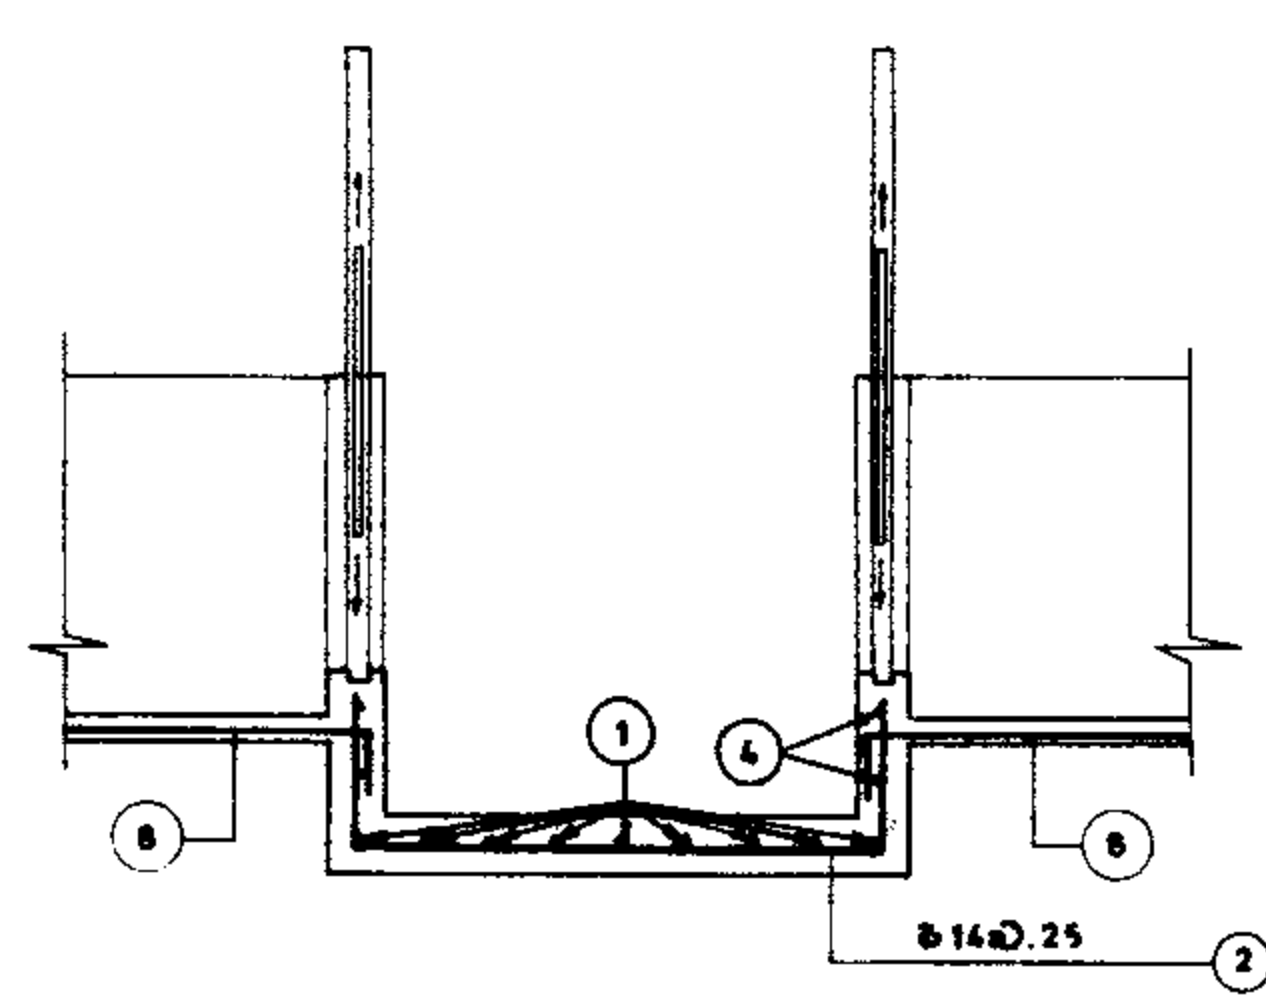

SECTION B-B
Scale: 1:40

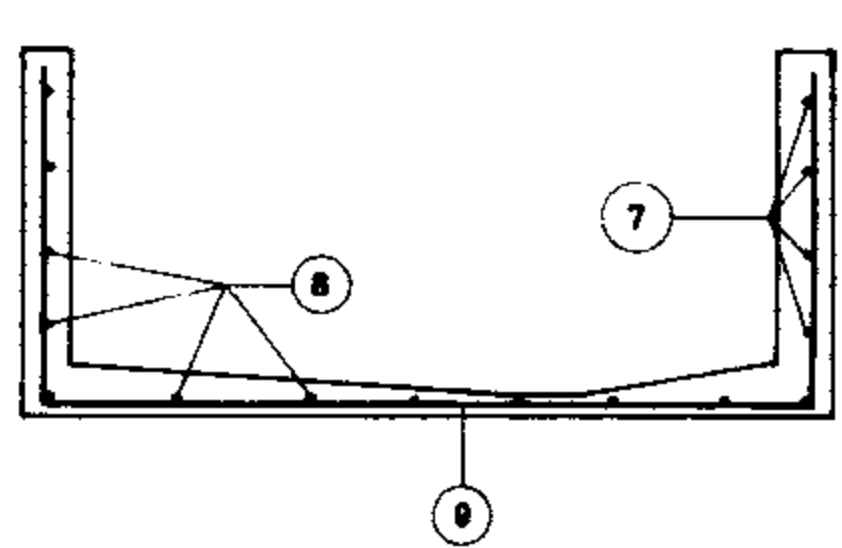

SECTION C-C
Scale: 1:40

POS	Nº	Form	UNIT LENG.	TOTAL LENG.
1	9	055 281 155	471	4239
2	11	055 181 055	291	3201
3	18	145	145	2610
4	2	178 258 178 050 258	922	1844
5	8	050 140	190	1520
6	4	056 178 056	290	1160
7	8	150	150	1200
8	26	020 100	120	3120
9	6	281 115	491	2946
			21840	
21840	X	121	=	26426 kg

ALL BARS ARE $\phi 14$ (1.21 Kg/m)

REFERENCE DWGS: FOR PLAN & SECTION SEE DWG. Nº 12/7/1/08

Scale: 1:40

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG. Nº 12/7/3/08

Approved:

Sheet Nº 17 of 18


Rev. Nº

**DIVISION BOX (TYPE 8)
REINFORCEMENT**


ISLAMIC REPUBLIC OF IRAN

MINISTRY OF PLAN & BUDGET


TECHNICAL RESEARCH AND
STANDARD BUREAU

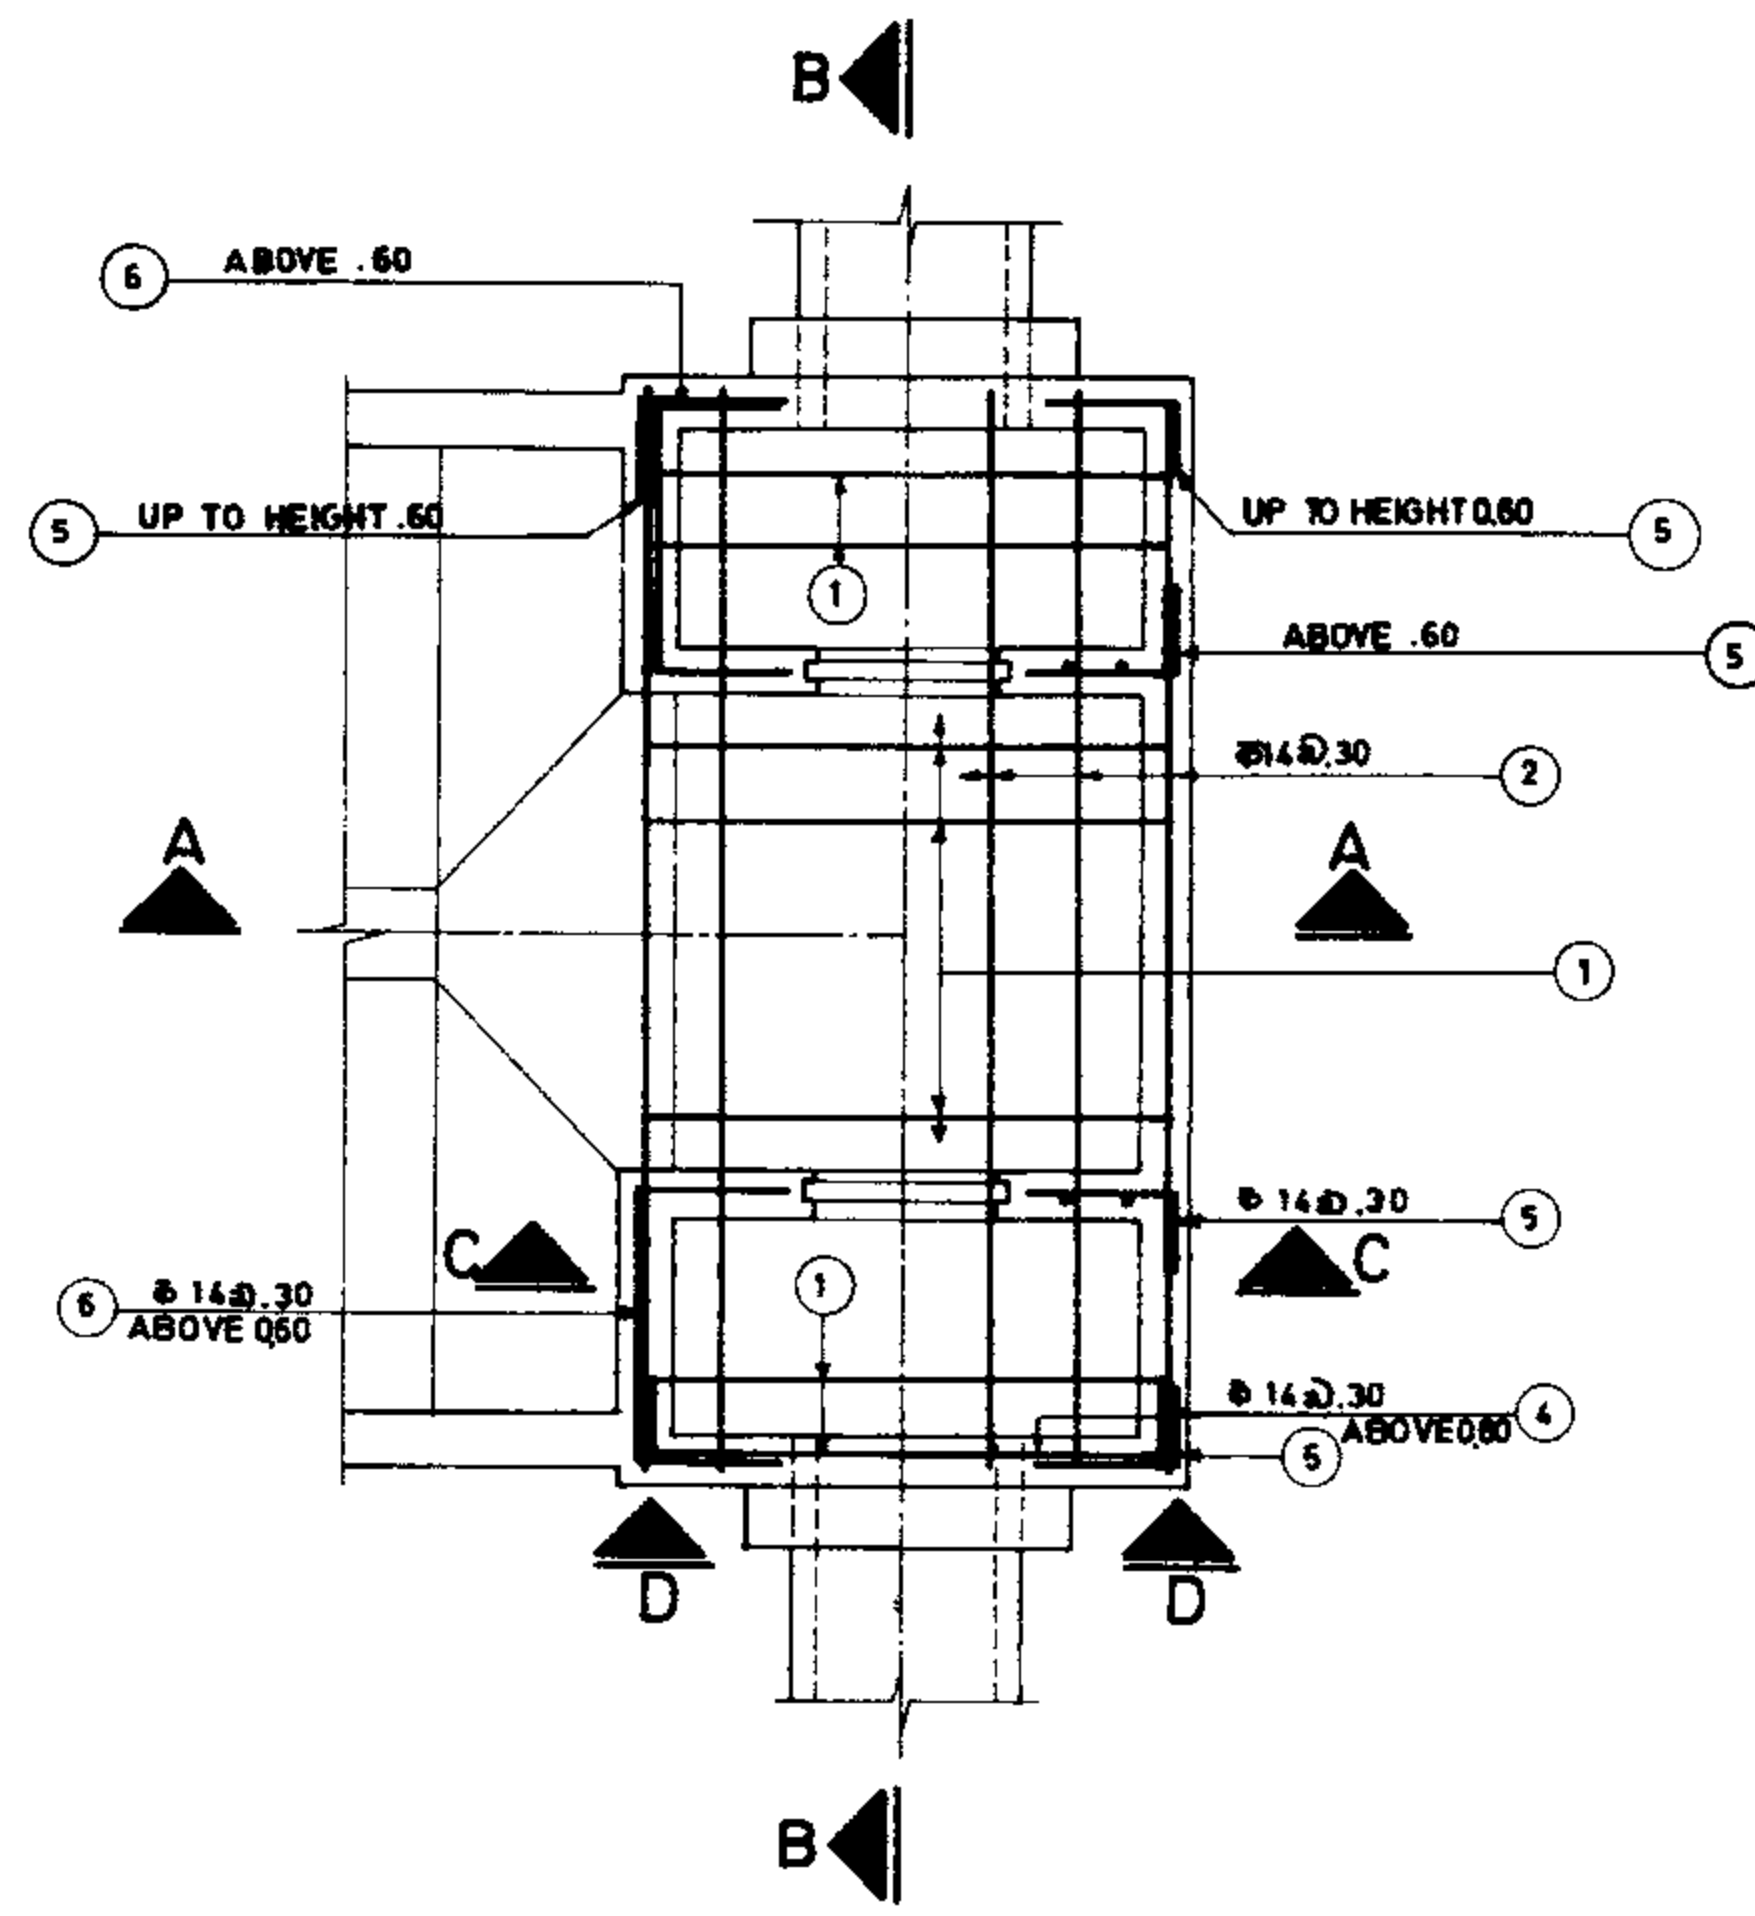


PLAN
Scale: 1:40

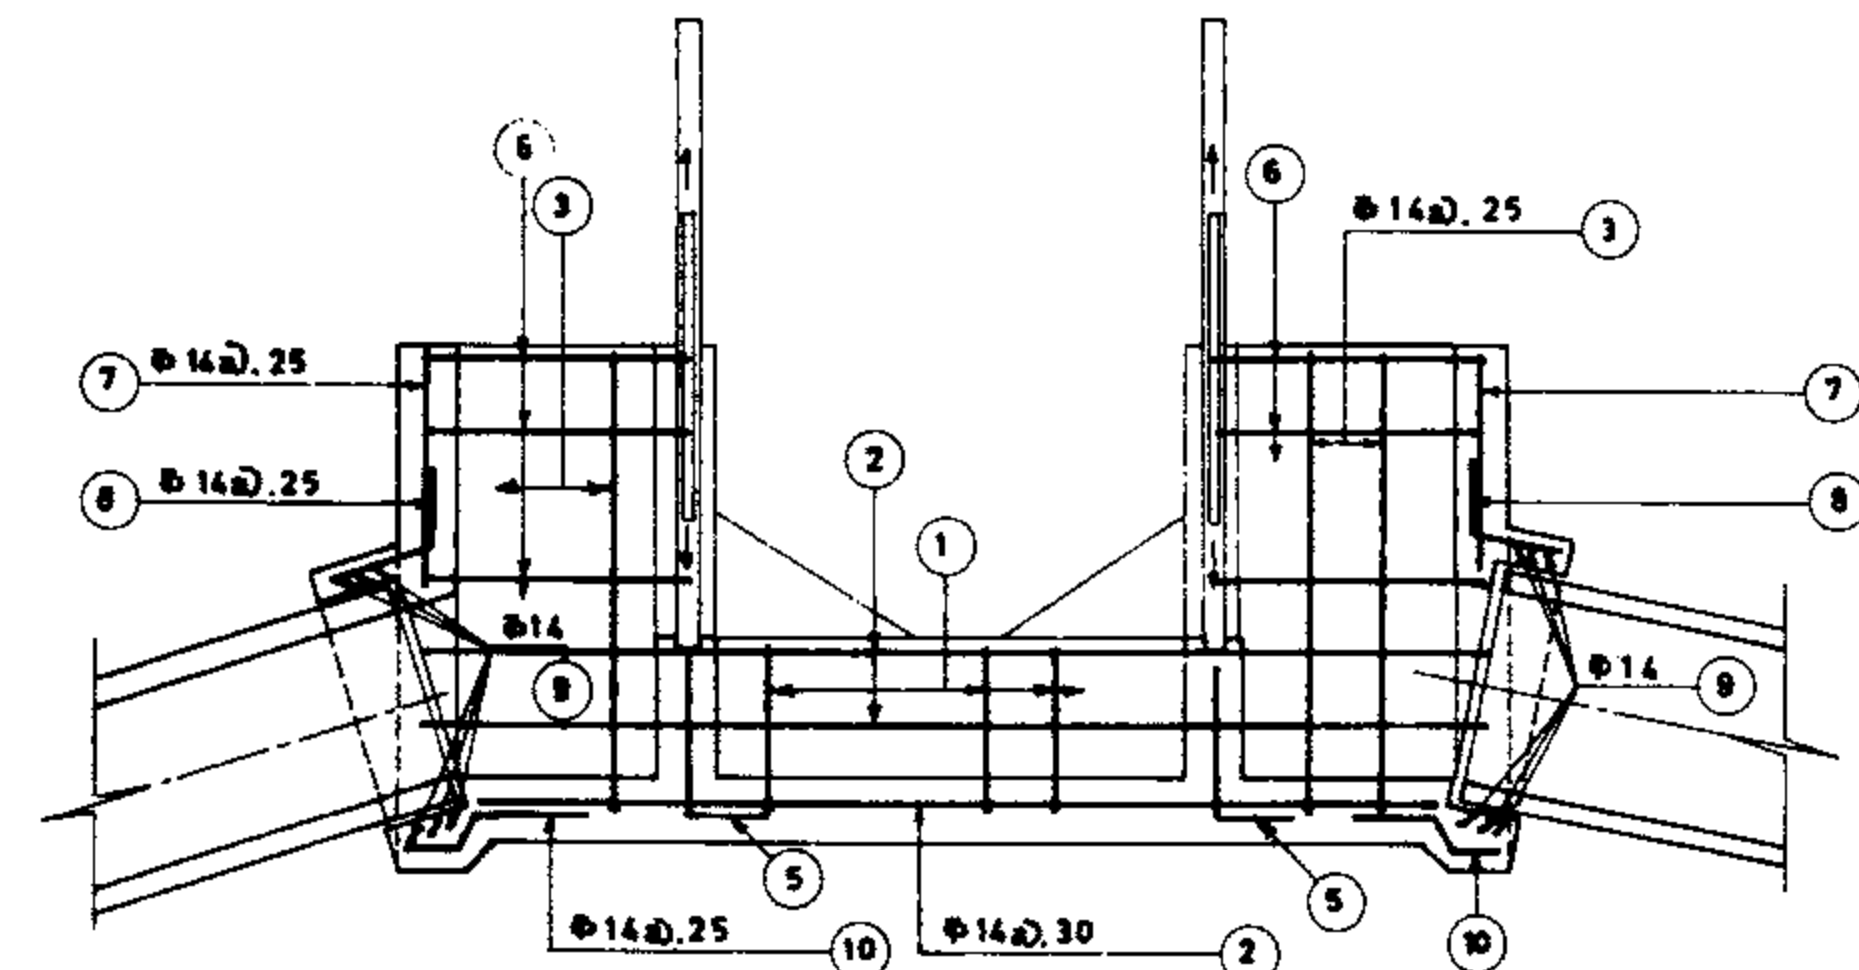


SECTION B-B
Scale: 1:40

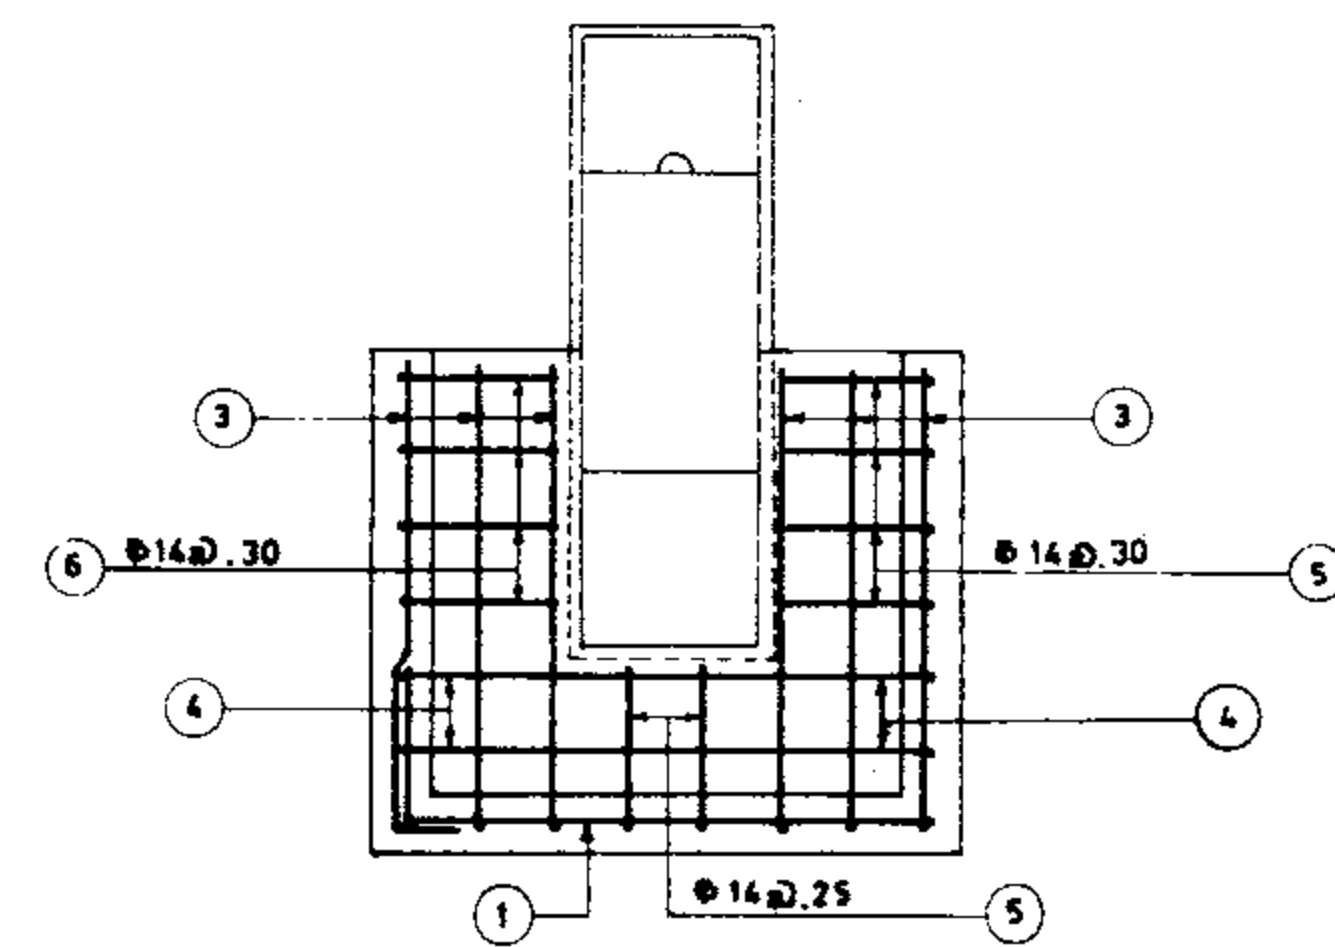

SECTION C-C
Scale: 1:40

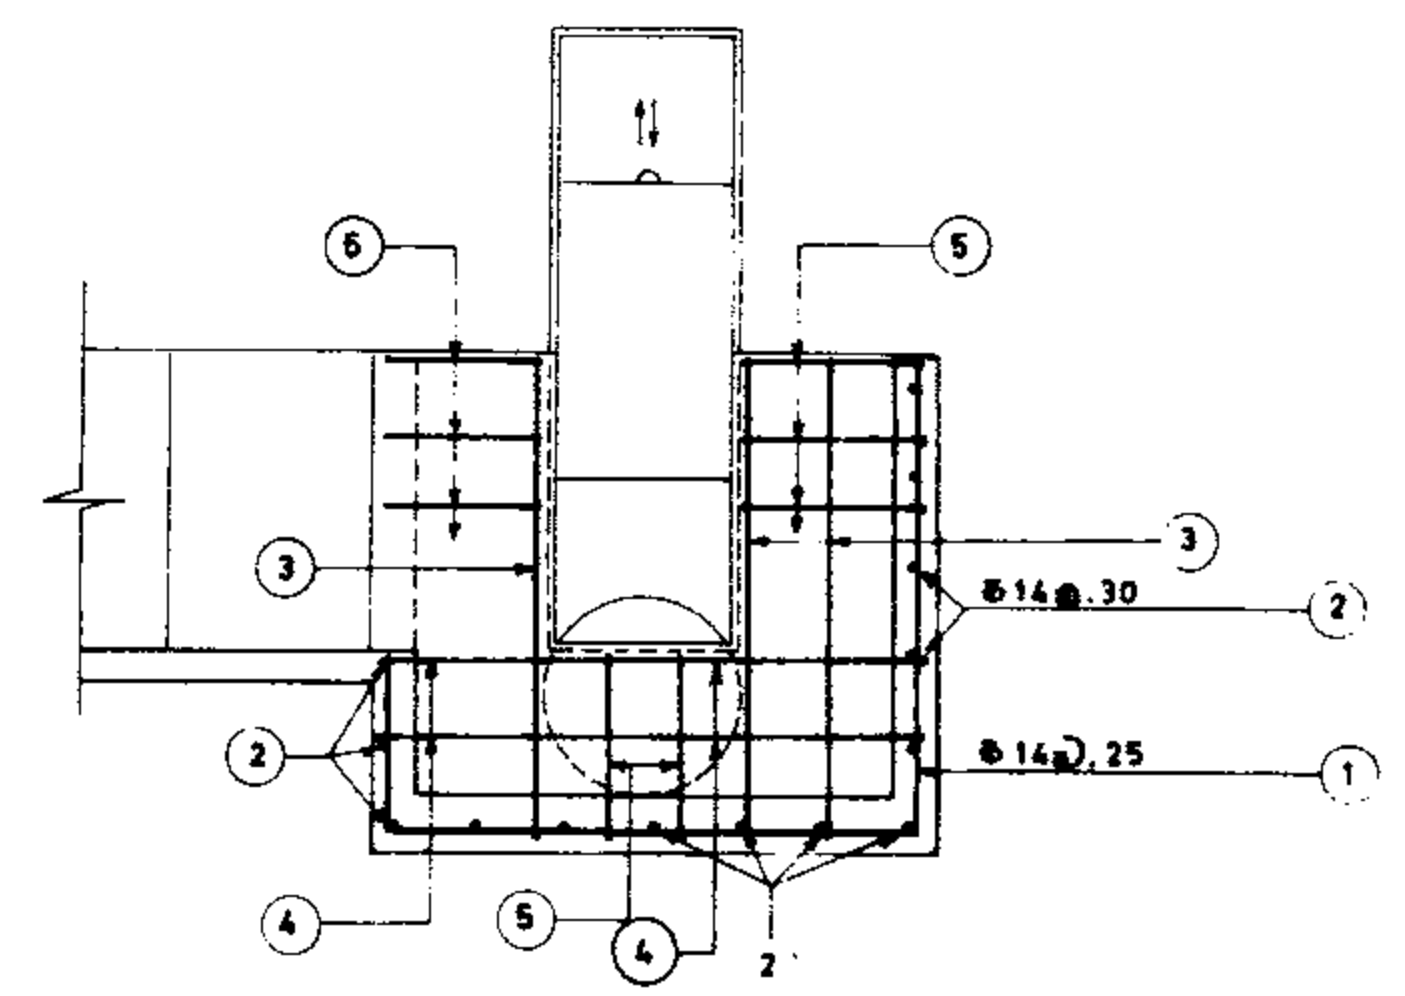


SECTION A-A
Scale: 1:40

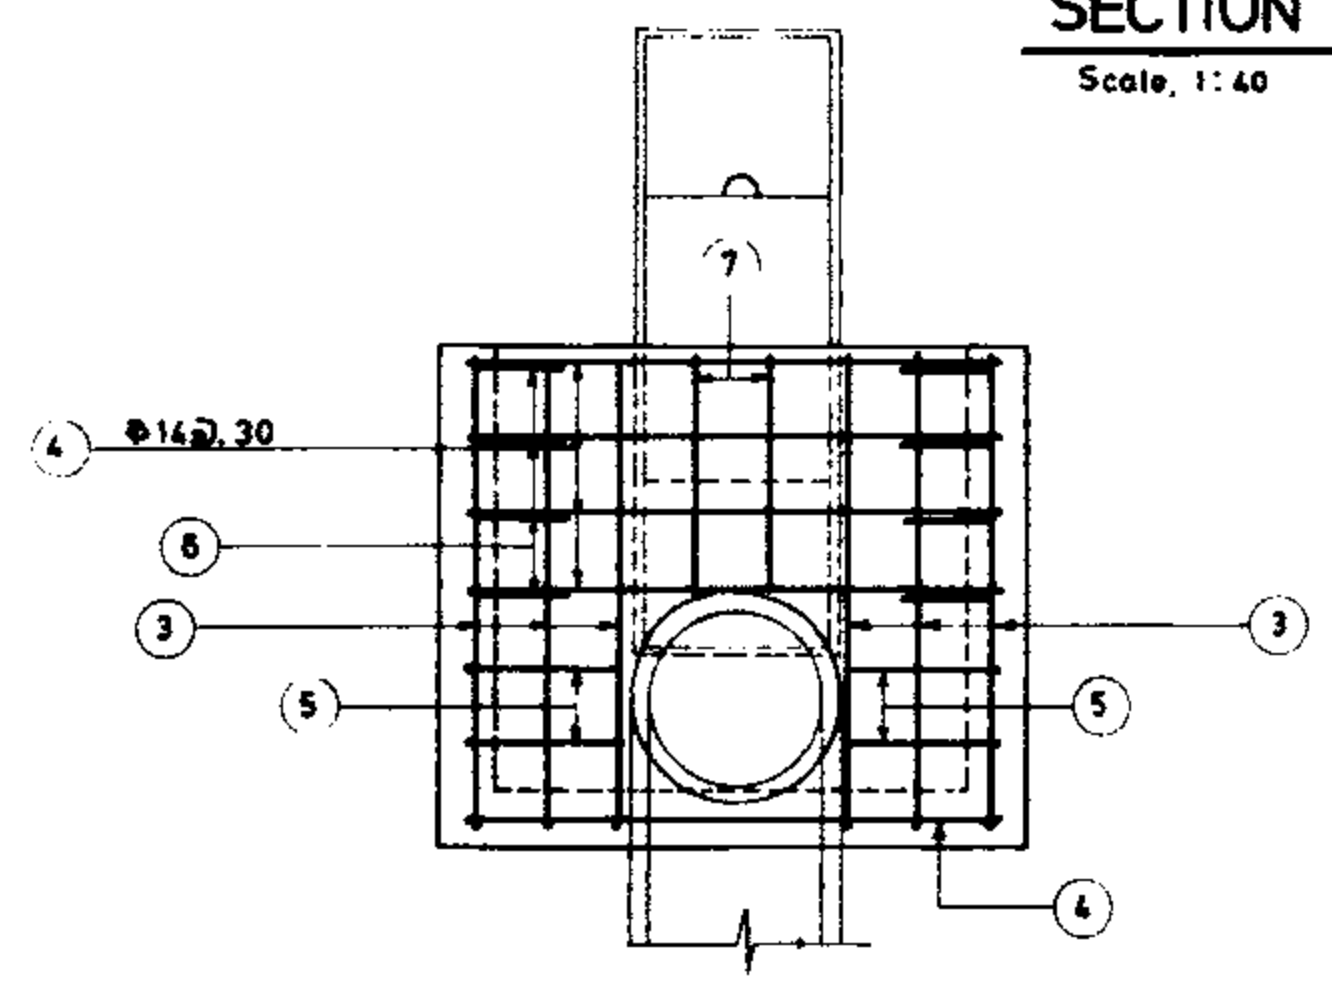

SECTION D-D
Scale: 1:40

POS	Nº	Form	UNIT LENG.	TOTAL LENG.
1	16	055 1.81 155	391	6256
2	15	358	358	5378
3	24	155 020	175	4200
4	12	051 178 051	280	3360
5	20	045 025	070	1400
6	8	045 080 045	180	1440
7	4	070	070	280
8	16	040 030	070	1120
9	6	040 040 075	379	2274
10	8	075	075	600
11	8	020 1.15 020	155	1240
			27548	
27548 X 121 =			33333	kg

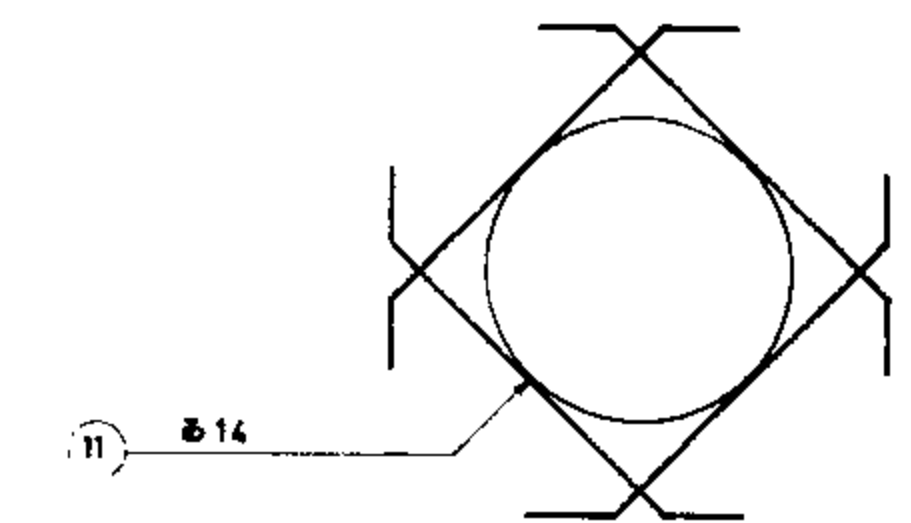


ALL BARS ARE $\phi 14$ (1.21 Kg/m)

REFERENCE DWGS: FOR PLAN & SECTION SEE DWG. N° 12/7/1/09


Scale: 1:40
Date: DWG. N° 12/7/3/09
Approved: Sheet N° 18 of 18 Rev N°

IRRIGATION & DRAINAGE STANDARDS
DIVISION BOX (TYPE 9)
REINFORCEMENT


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

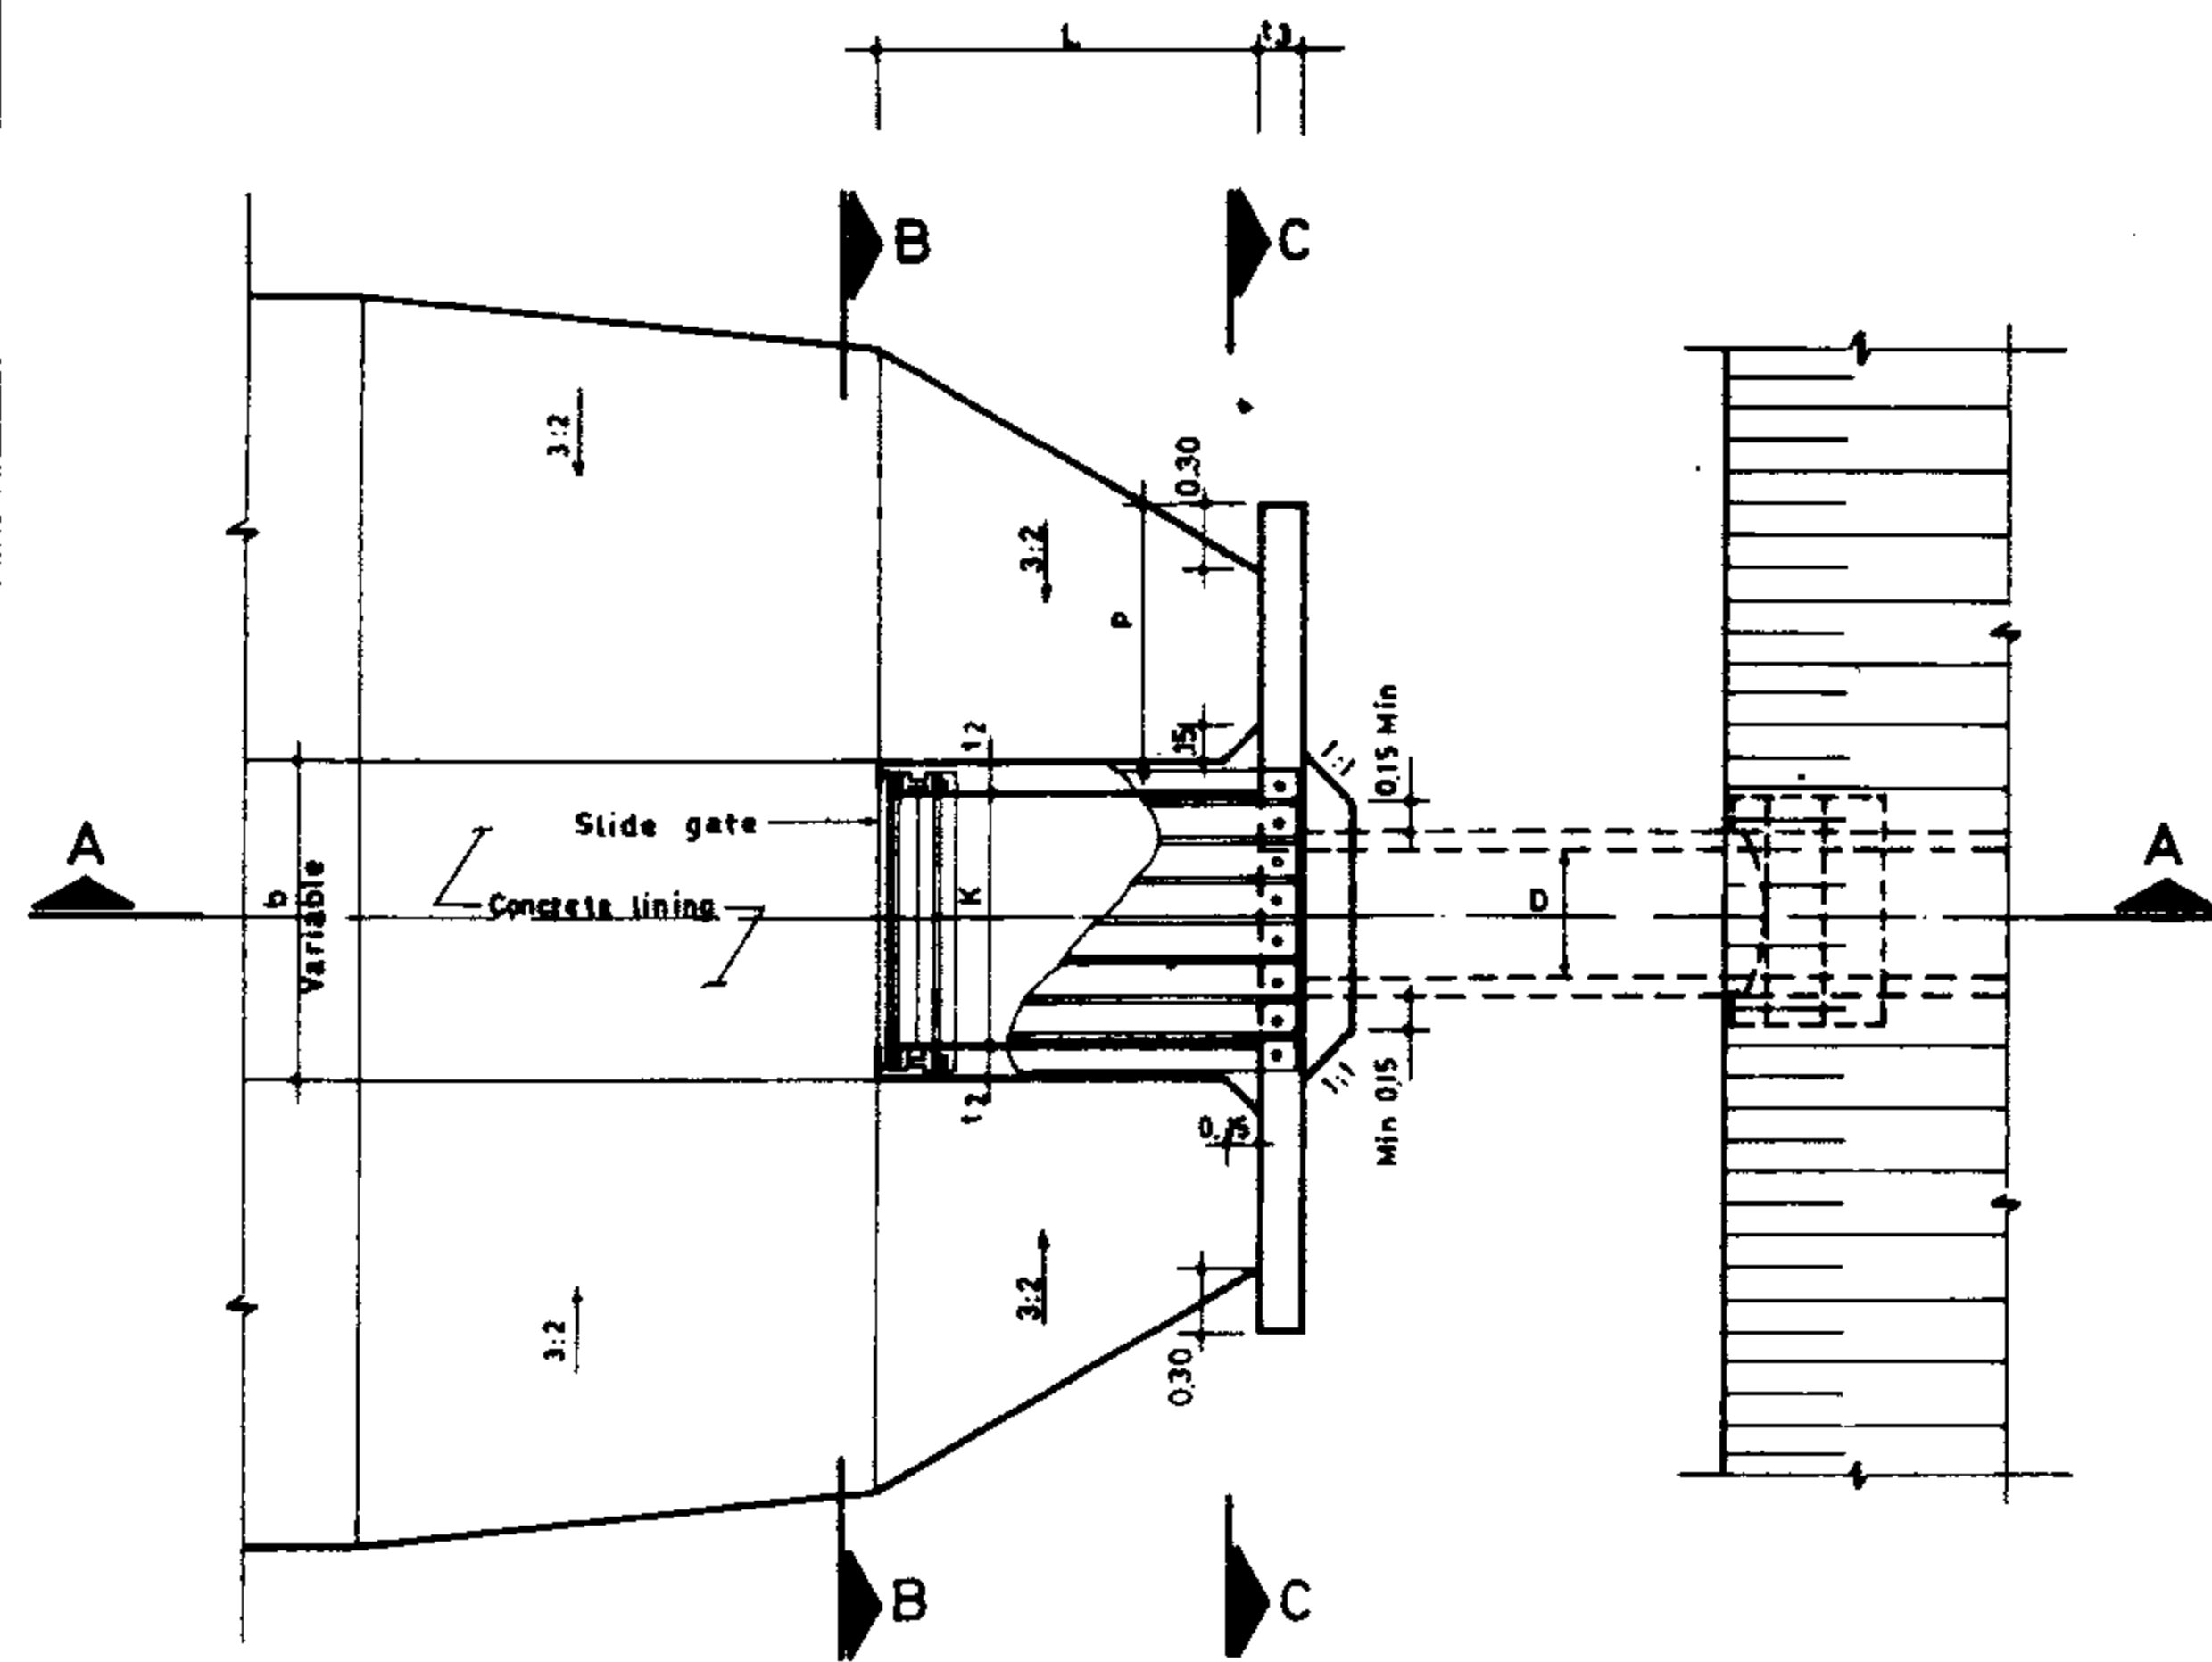


PLAN
SCALE 1:50

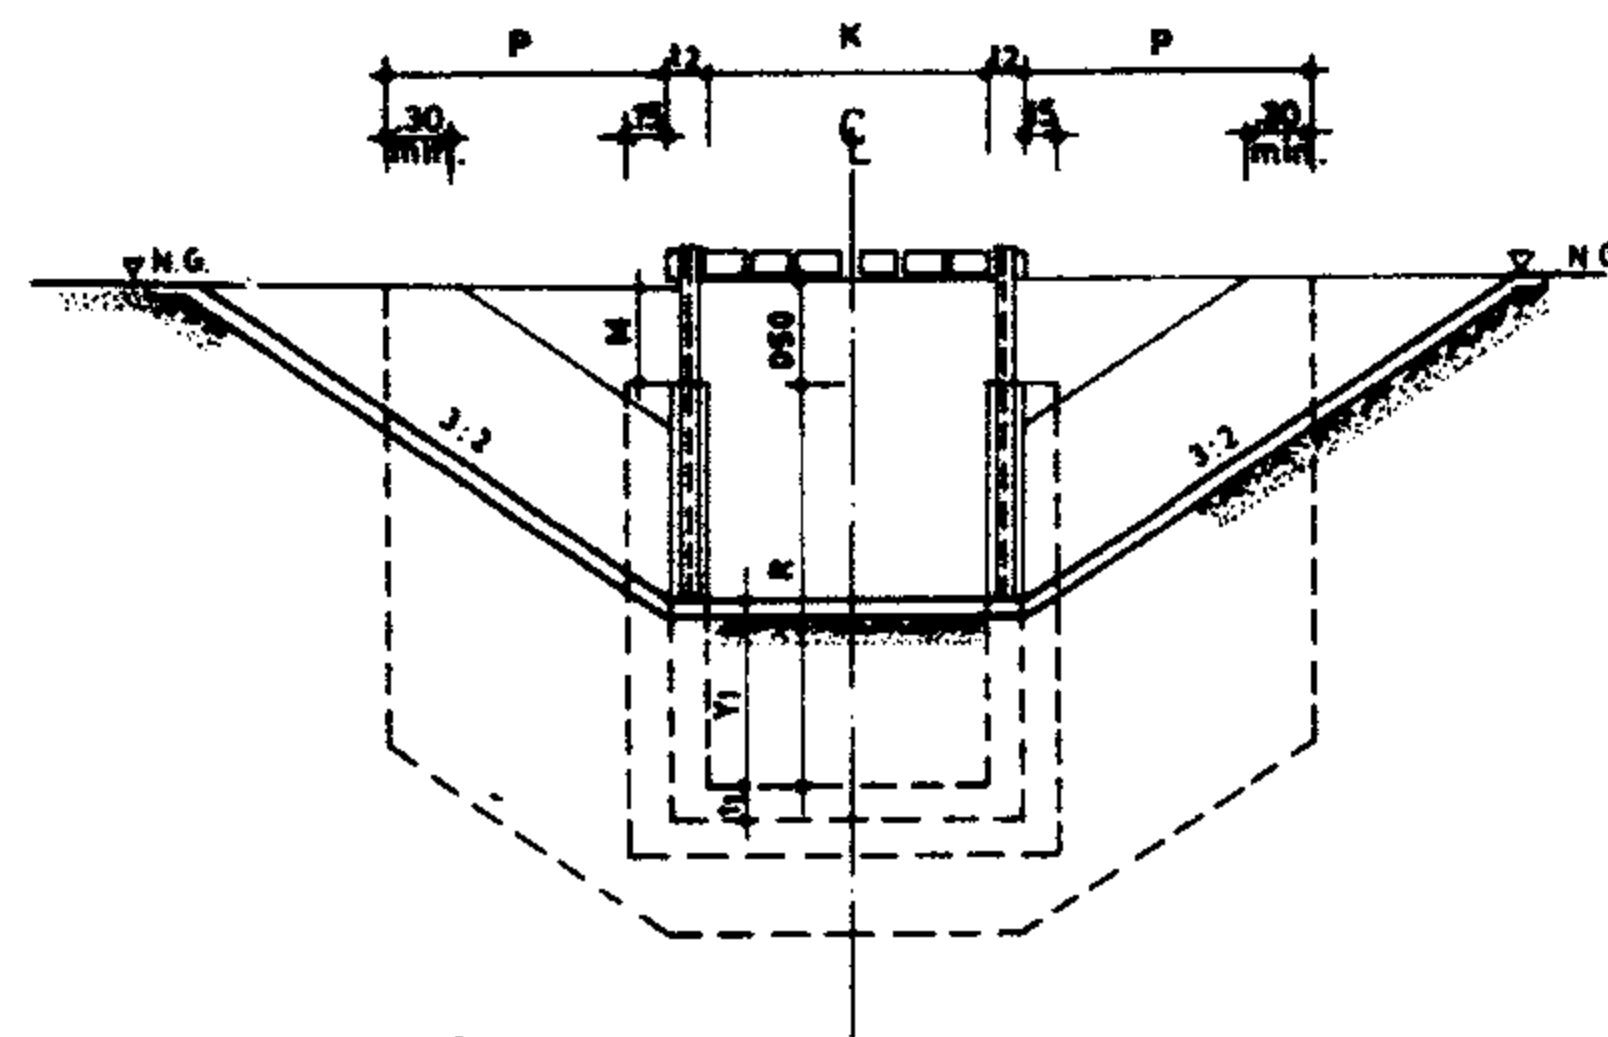


SECTION B-B
SCALE 1:50

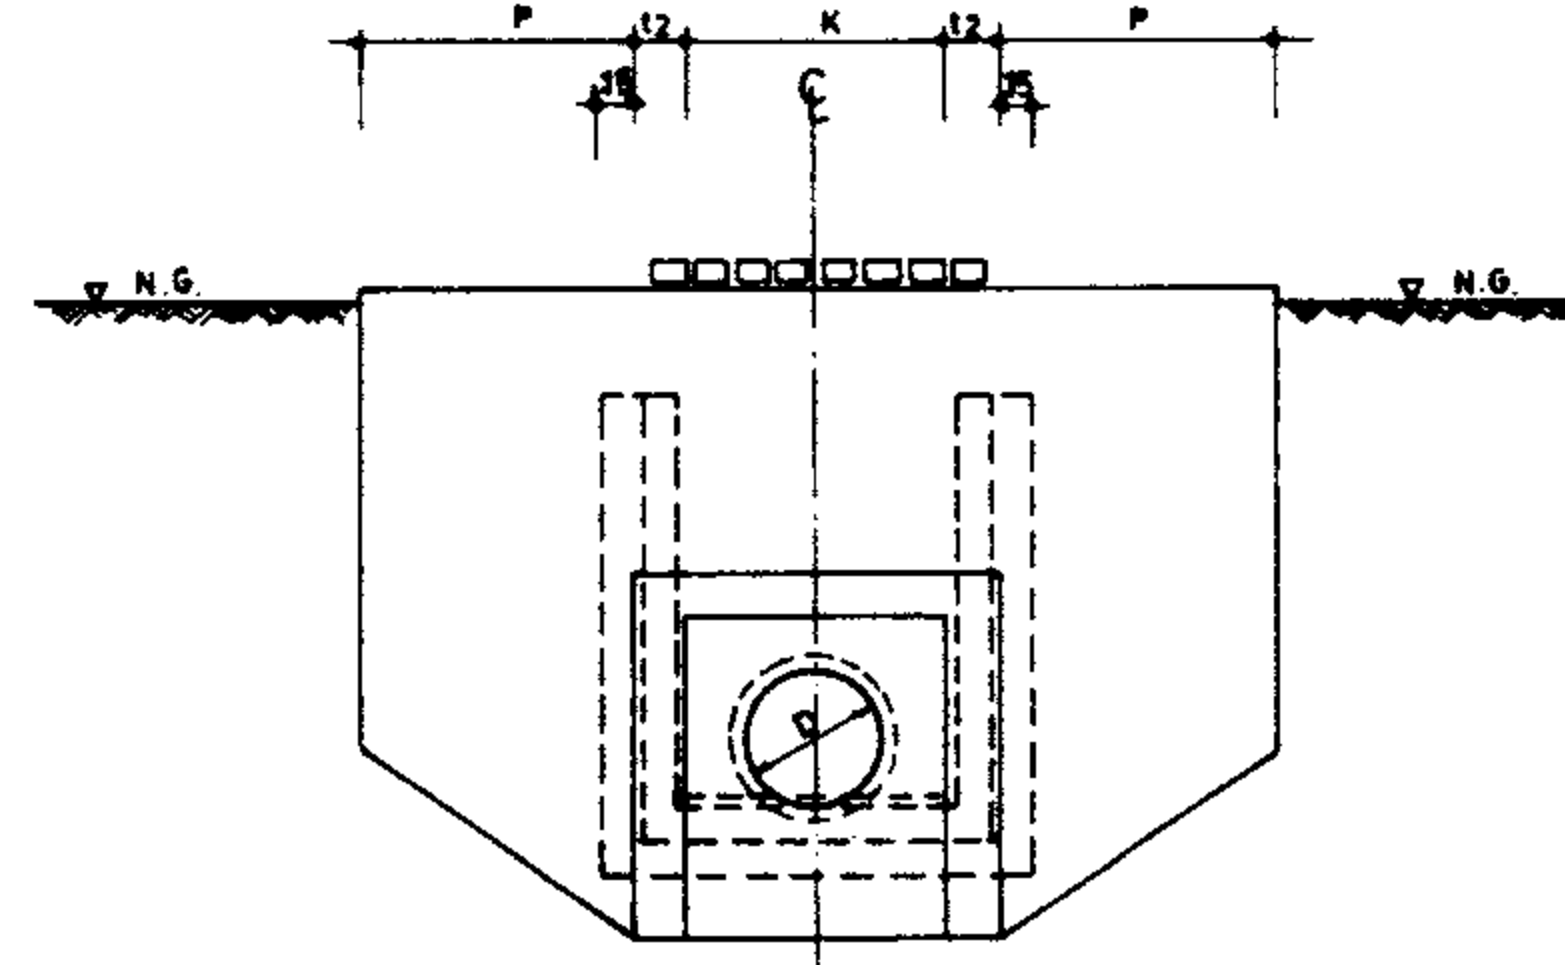


SECTION D-D
SCALE 1:50

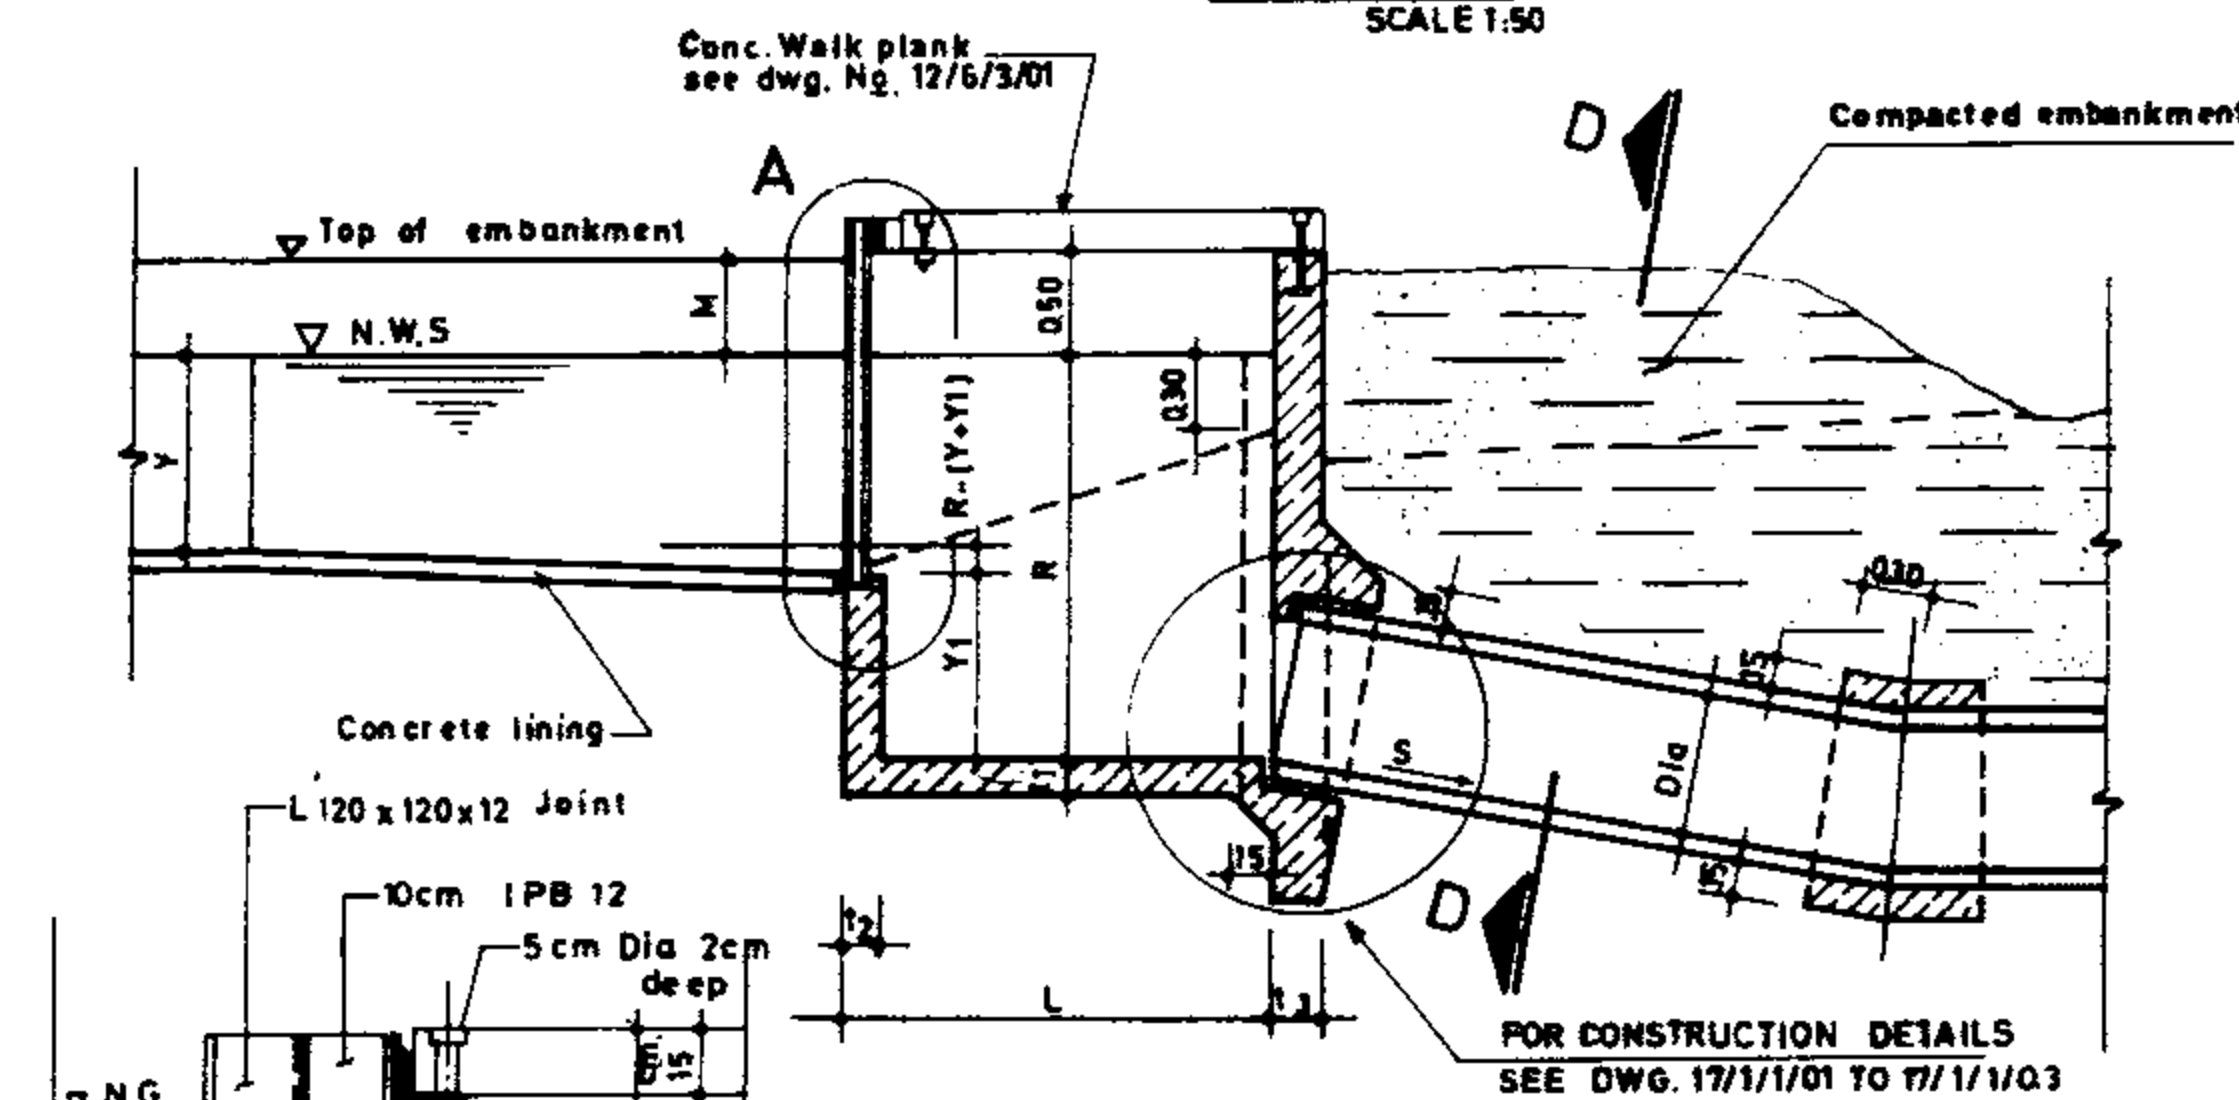


SECTION A-A
SCALE 1:50

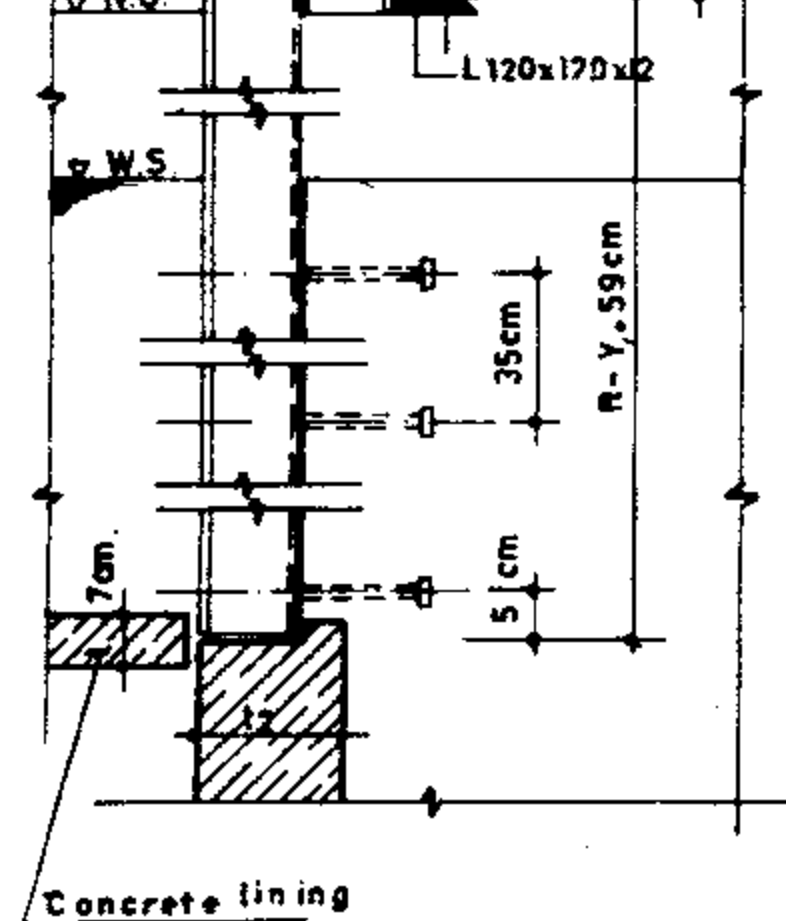

DETAIL A
SCALE 1:15

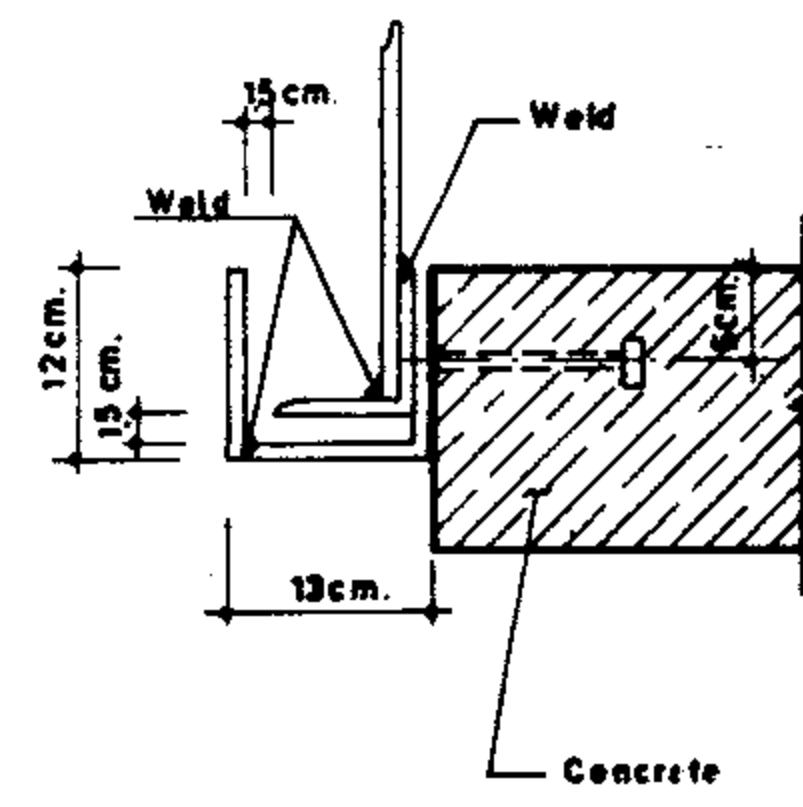

SLIDE GATE ASSEMBLY

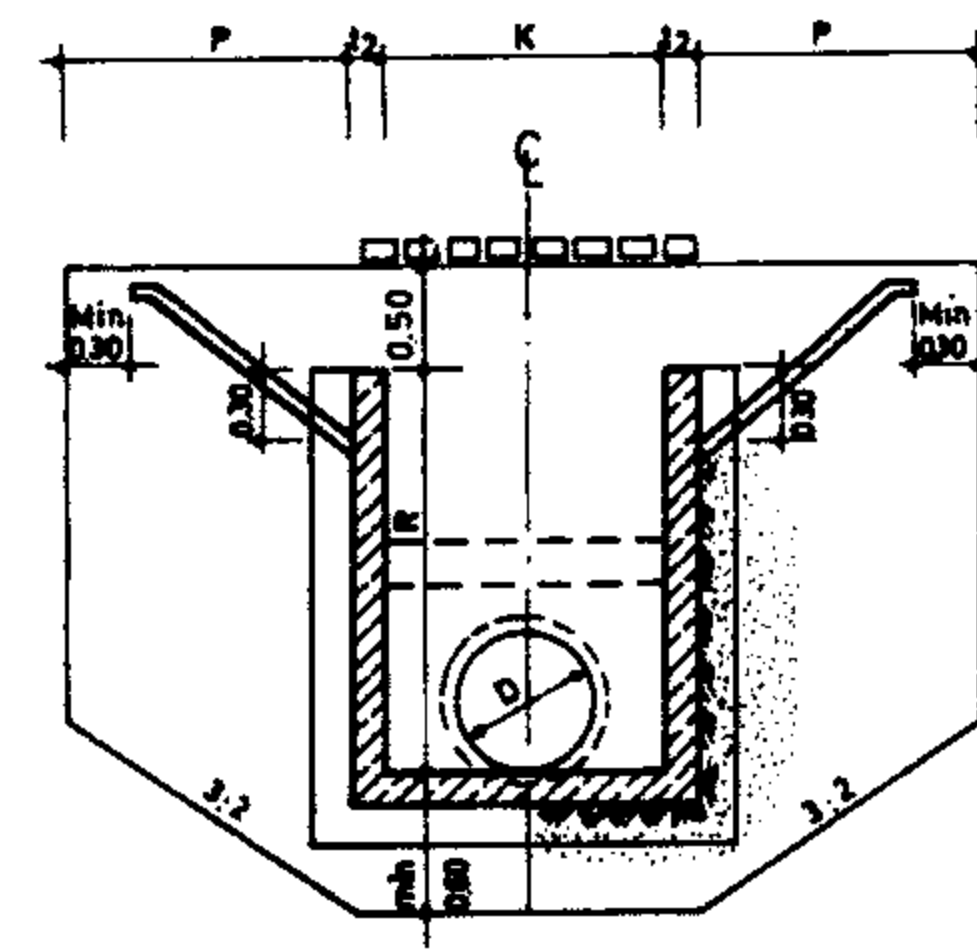

SECTION C-C
SCALE 1:50

STRUCTURE PURPOSE

The purpose of a check and pipe inlet is to maintain a water surface at a required elevation for turnout deliveries upstream with partial flows in the canal.

PIPE SELECTION

The criteria for determining a pipe size for a structure having a check and pipe inlet is based on providing a pipe with an adequate diameter so that the velocity in the pipe will not exceed the following:

1. 1.0 m per second for a pipe drop having only an earth transition at the outlet.
2. 1.5 m per second for a road crossing or a similar structure such as a short inverted siphon having a concrete outlet transition.
3. 3.0 m per second for a relatively long inverted siphon having a concrete outlet transition.
4. 3.5 m per second for a pipe drop having a baffled outlet or stilling pool outlet.

DESIGN PROCEDURE

1. Determine pipe size from Dwg. No. 11/6/1/02
2. Select structure number from the Dimension Table Dwg. No. 12/6/1/02
3. Determine:
 - a) Standard check and pipe inlet dimension K R Y₁ and L from the Dimension Table.
 - b) Pipe velocity head for selected pipe diameter from equation $h_{vp} = \frac{V^3}{2g}$
 - c) Determine elevation D:
 - El. D = NWS El. at Sta. A - R
 - NWS El. at Sta. A = El. A + Y
 - Y is normal depth at Sta. A.
 - d) Drop and slope in transition:
 - Drop = R - (Y + Y₁)
 - Slope = Length of transition to drop that in earth transition must be flatter than 4 to 1.
4. Select gate size
 - e) Determine normal canal free board that is equal to El. canal bank - El. NWS in canal.
 - f) For extreme condition, when the gate is closed, canal bank free board must be adequate for the normal flow over flowing from the sidewalls and gate closure.
 - g) Check when gate is closed being at a higher elevation than the sidewalls.

REFERENCE DWGS: For general notes see dwgs. No. 20/2/1/01 TO 20/2/1/03
For reinforcement see dwg. No. 12/6/3/01
For operating platform see dwg. No. 12/6/3/01

Scale: 1:50 1:15

IRRIGATION DRAINAGE STANDARDS

Date:

DWG. No. 12/6/1/01

Approved:





Sheet No. 1 of 6

Rev No.

Pipe inlet with check structure (Conc. canal)
Plan & Section

ISLAMIC REPUBLIC OF IRAN

MINISTRY OF PLAN & BUDJE
TECHNICAL RESEARCH AND
STANDARD BUREAU

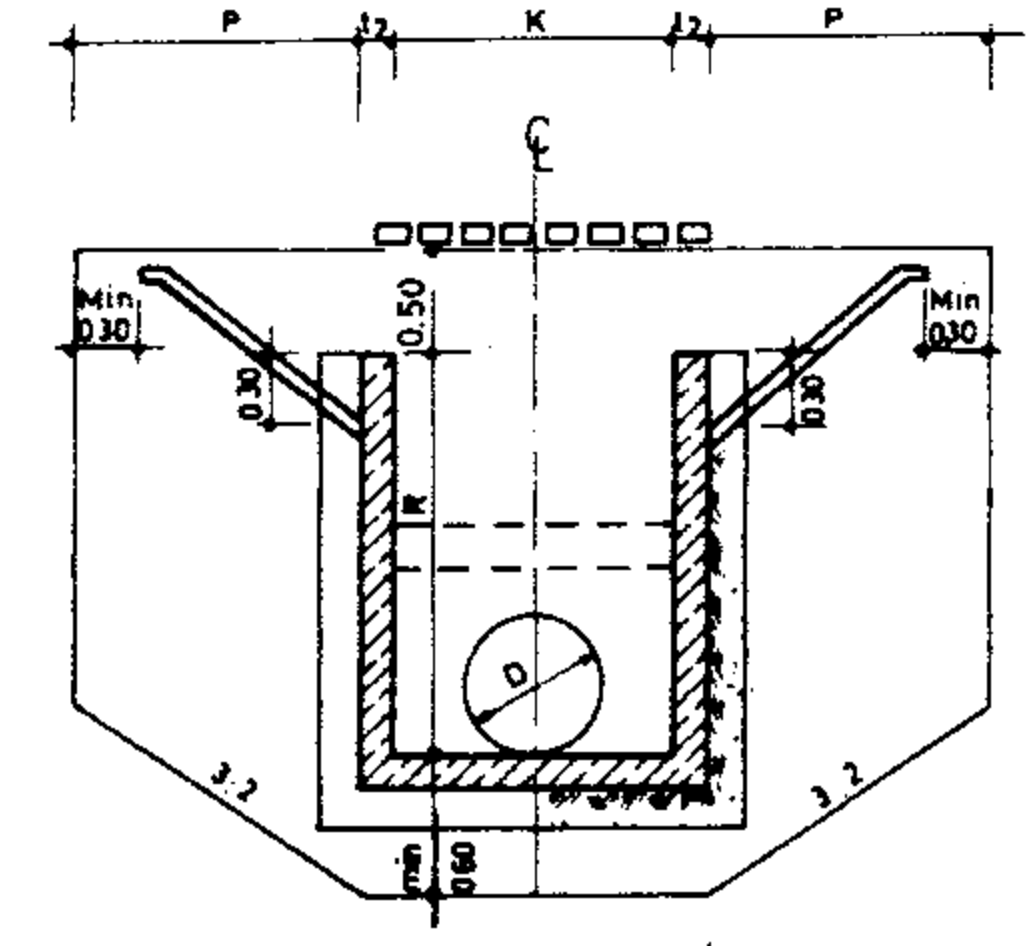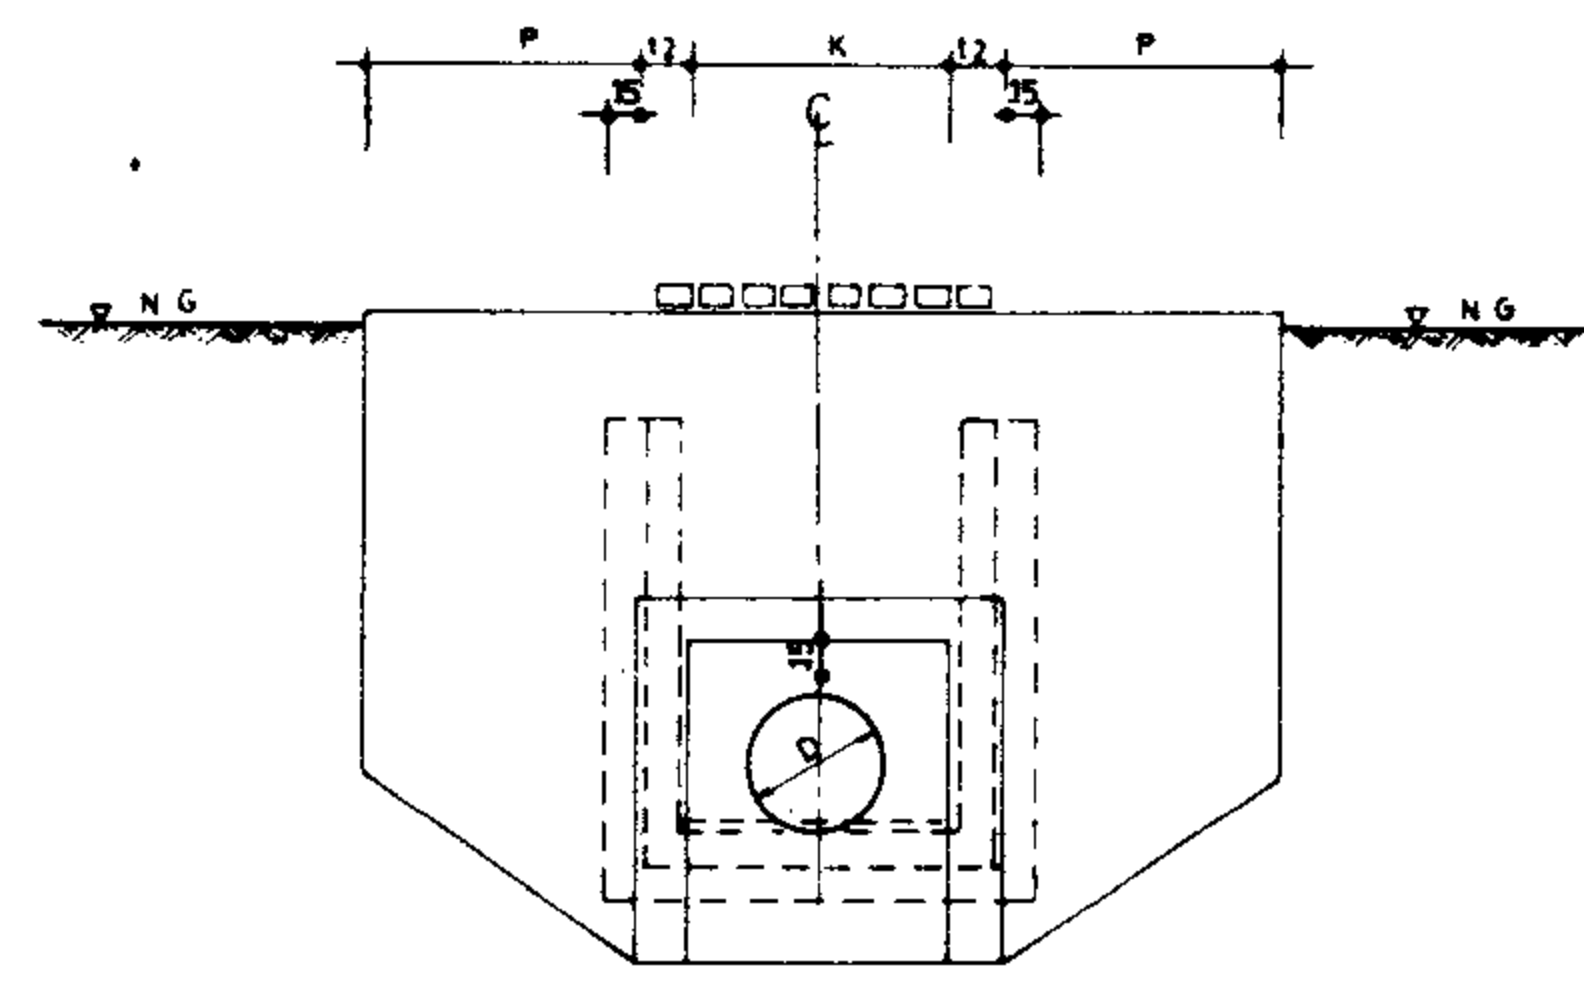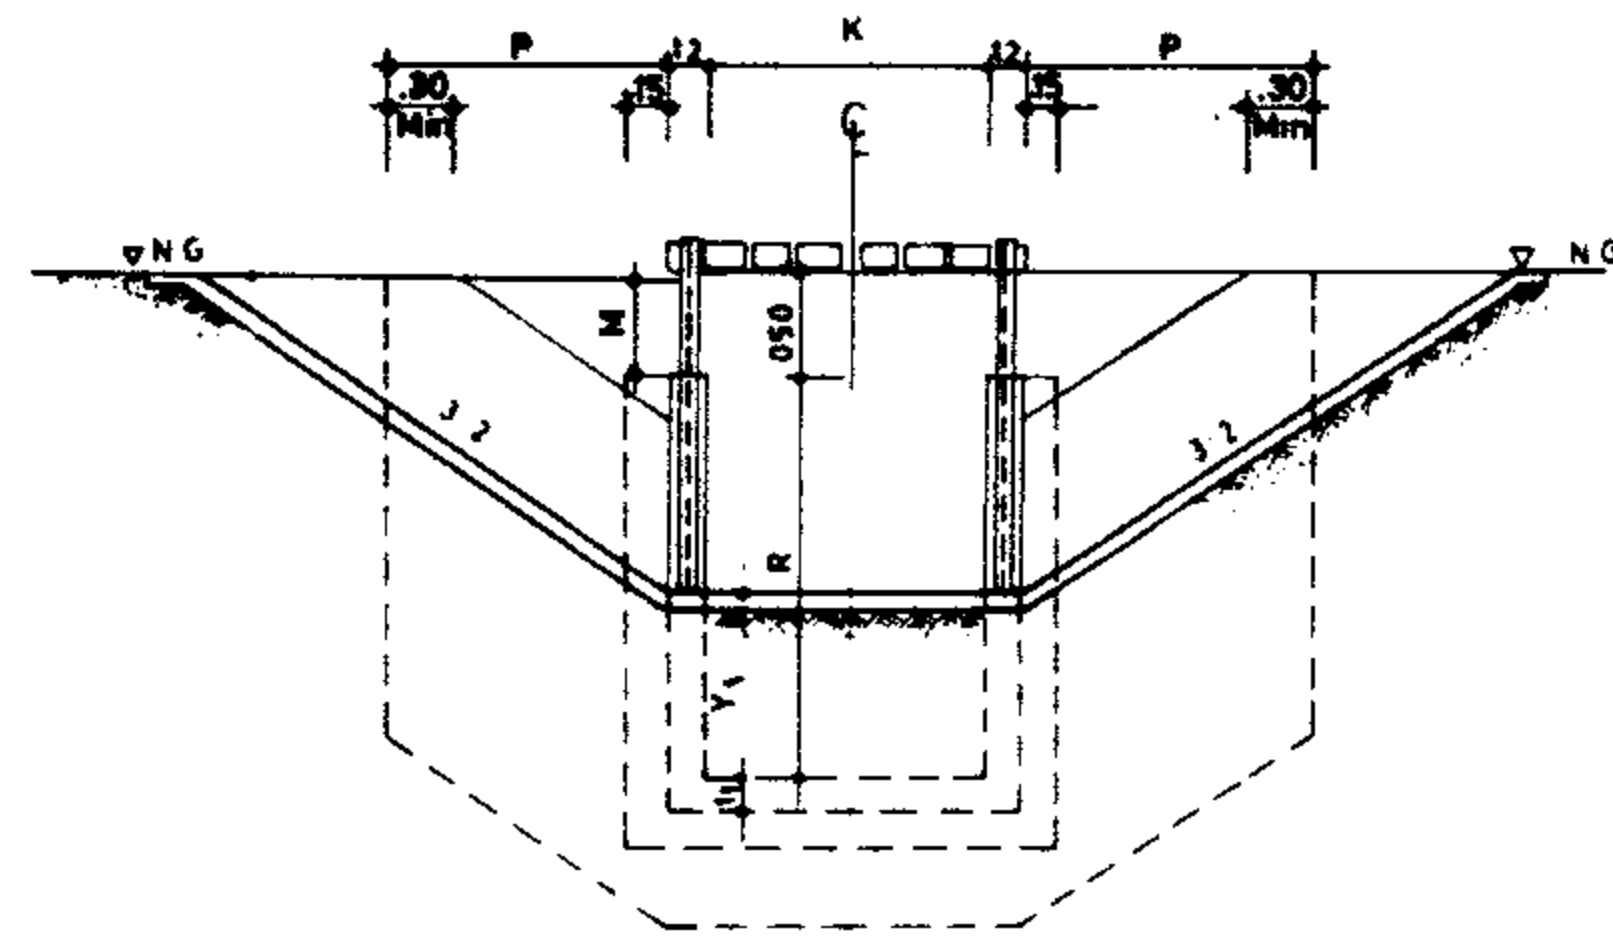
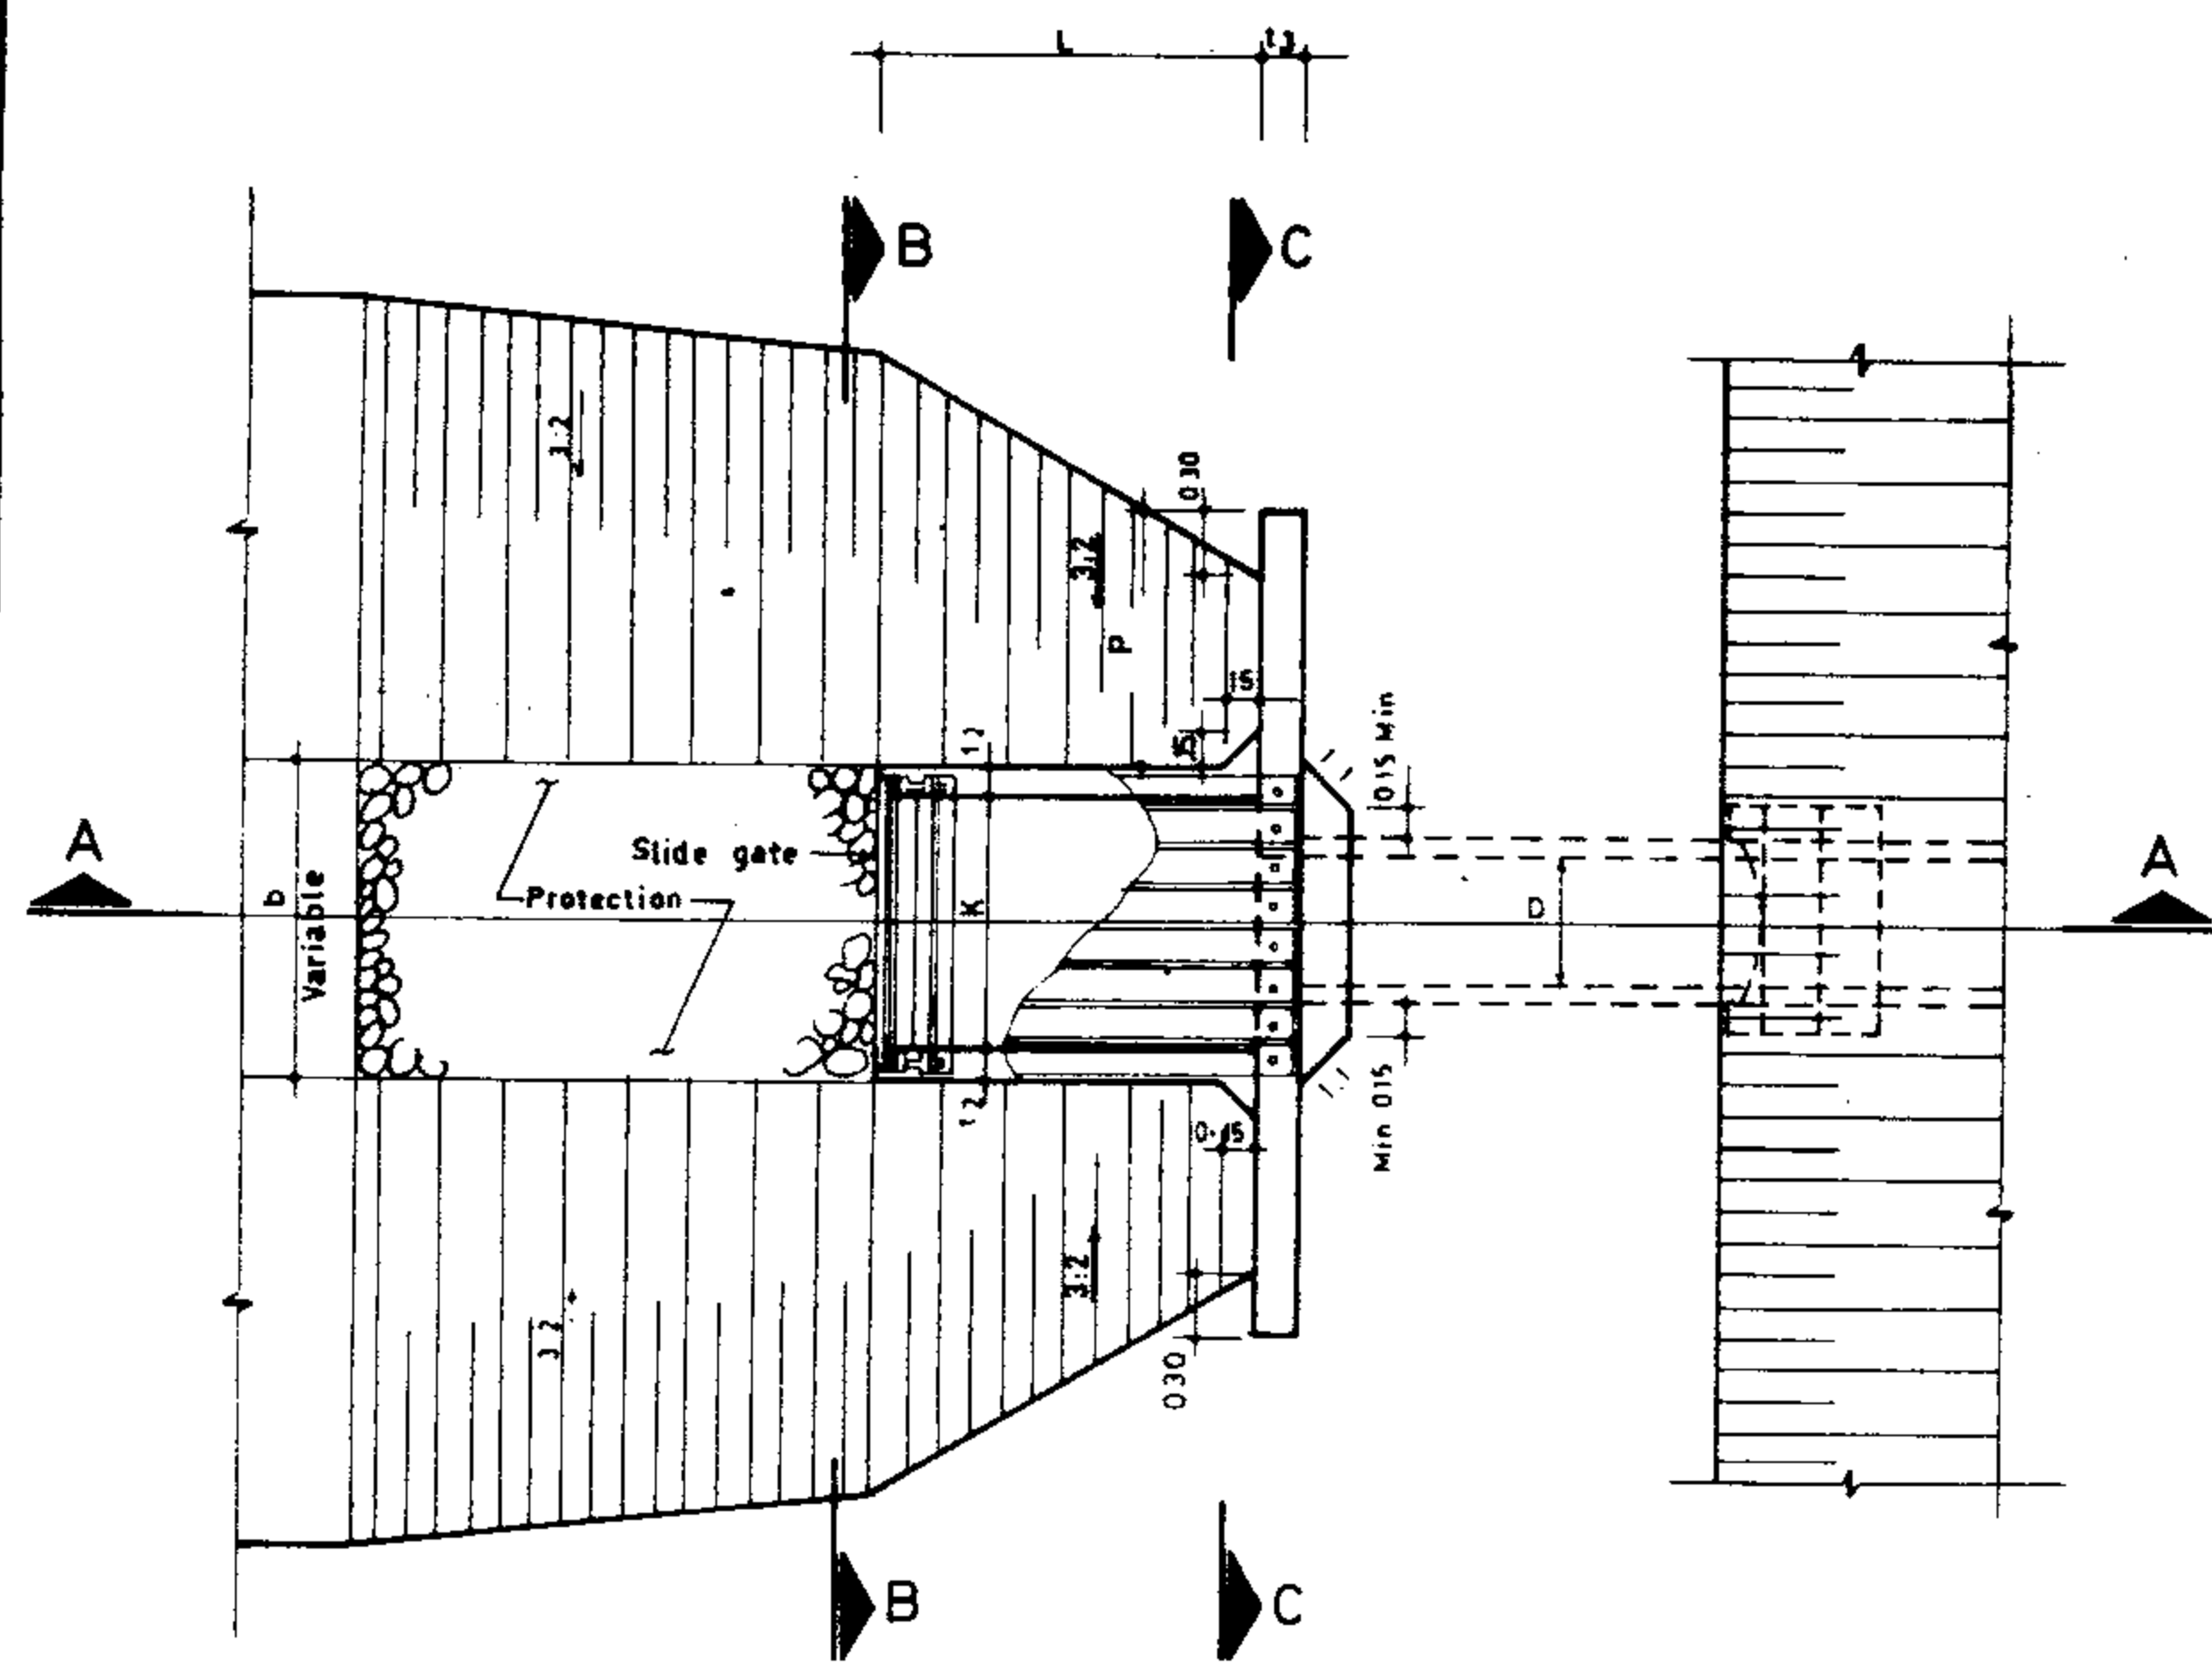


DIMENSION TABLE

STR.#	Dia. m.	K m.	R m.	L m.	Y ₁ m.	M m.	P m.	t ₁	t ₂	t ₃	R/Bar. Kg.	CONC. m ³	FORM. m ²
300_1	0.300	0.60	0.80	1.10	0.40	0.30	1.20	0.15	0.15	0.15	151.18	1.30	16.55
300_2	0.300	0.80	1.50	1.40	0.90	0.30	1.20	0.15	0.15	0.15	231.65	2.33	29.00
400_1	0.400	0.70	0.80	1.10	0.40	0.30	1.20	0.15	0.15	0.15	155.67	1.34	16.91
400_2	0.400	0.90	1.50	1.40	0.90	0.30	1.20	0.15	0.15	0.15	245.75	2.40	29.52
450_1	0.450	0.70	0.85	1.10	0.40	0.30	1.20	0.15	0.15	0.15	164.00	1.47	17.47
450_2	0.450	0.90	1.55	1.40	0.90	0.30	1.20	0.18	0.15	0.15	250.57	2.48	30.34
500_1	0.500	0.90	0.90	1.25	0.40	0.30	1.20	0.15	0.15	0.15	188.94	1.61	19.62
500_2	0.500	1.10	1.60	1.70	0.90	0.30	1.20	0.18	0.15	0.20	306.72	3.38	34.76
600_1	0.600	0.90	1.00	1.25	0.40	0.30	1.20	0.15	0.15	0.15	187.02	1.69	20.77
600_2	0.600	1.20	1.70	1.85	0.80	0.30	1.20	0.18	0.15	0.20	320.70	3.65	37.70
700_1	0.700	1.10	1.10	1.40	0.40	0.40	1.30	0.18	0.15	0.15	235.55	2.01	24.62
700_2	0.700	1.50	1.80	2.00	0.80	0.40	1.30	0.18	0.15	0.20	268.77	4.35	43.76
800_1	0.800	1.20	1.20	1.40	0.40	0.45	1.45	0.15	0.15	0.15	242.04	2.22	27.27
800_2	0.800	1.80	1.90	2.15	0.80	0.45	1.45	0.18	0.15	0.20	454.02	5.12	50.15
900_1	0.900	1.50	1.30	1.55	0.40	0.45	1.45	0.15	0.15	0.15	306.24	2.62	31.30
900_2	0.900	1.80	2.00	2.30	0.70	0.45	1.45	0.18	0.18	0.20	508.53	5.73	53.57
1000_1	1.000	1.50	1.40	1.70	0.40	0.45	1.45	0.15	0.15	0.15	326.80	2.80	33.58
1000_2	1.000	2.10	2.10	2.60	0.60	0.45	1.45	0.18	0.18	0.20	571.17	6.52	59.29
1200_1	1.200	1.70	1.80	2.00	0.40	0.45	1.45	0.18	0.15	0.20	389.43	3.98	40.39
1400_1	1.400	1.90	1.80	2.15	0.40	0.45	1.45	0.18	0.15	0.20	452.27	4.55	45.60
1600_1	1.600	2.00	2.00	2.30	0.40	0.45	1.45	0.18	0.18	0.20	521.30	5.40	51.21

NOTES

Structures are numbered to designate pipe diameter in millimeters followed by a second number -1 or -2 which designate maximum allowable pipe velocities of 1.5 and 3.5 meter per second respectively. Structures -1 and -2 may also be used for maximum allowable pipe velocities of 1.00 and 3.00 meter per second respectively. Structure number 600_2 is for a 600 mm diameter pipe having a maximum allowable velocity of either 3.0 or 3.5 meter per second.





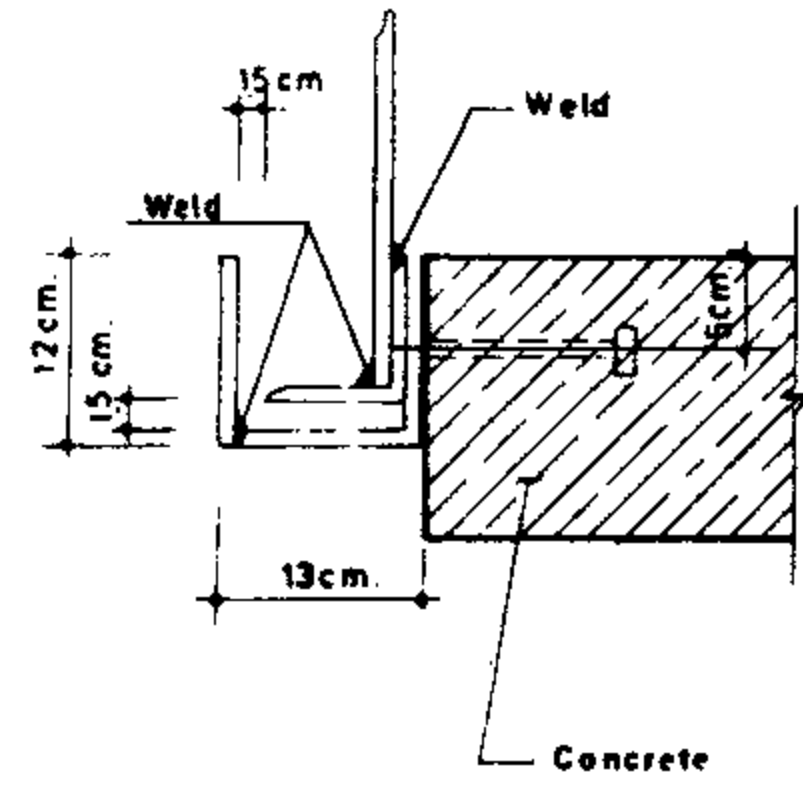
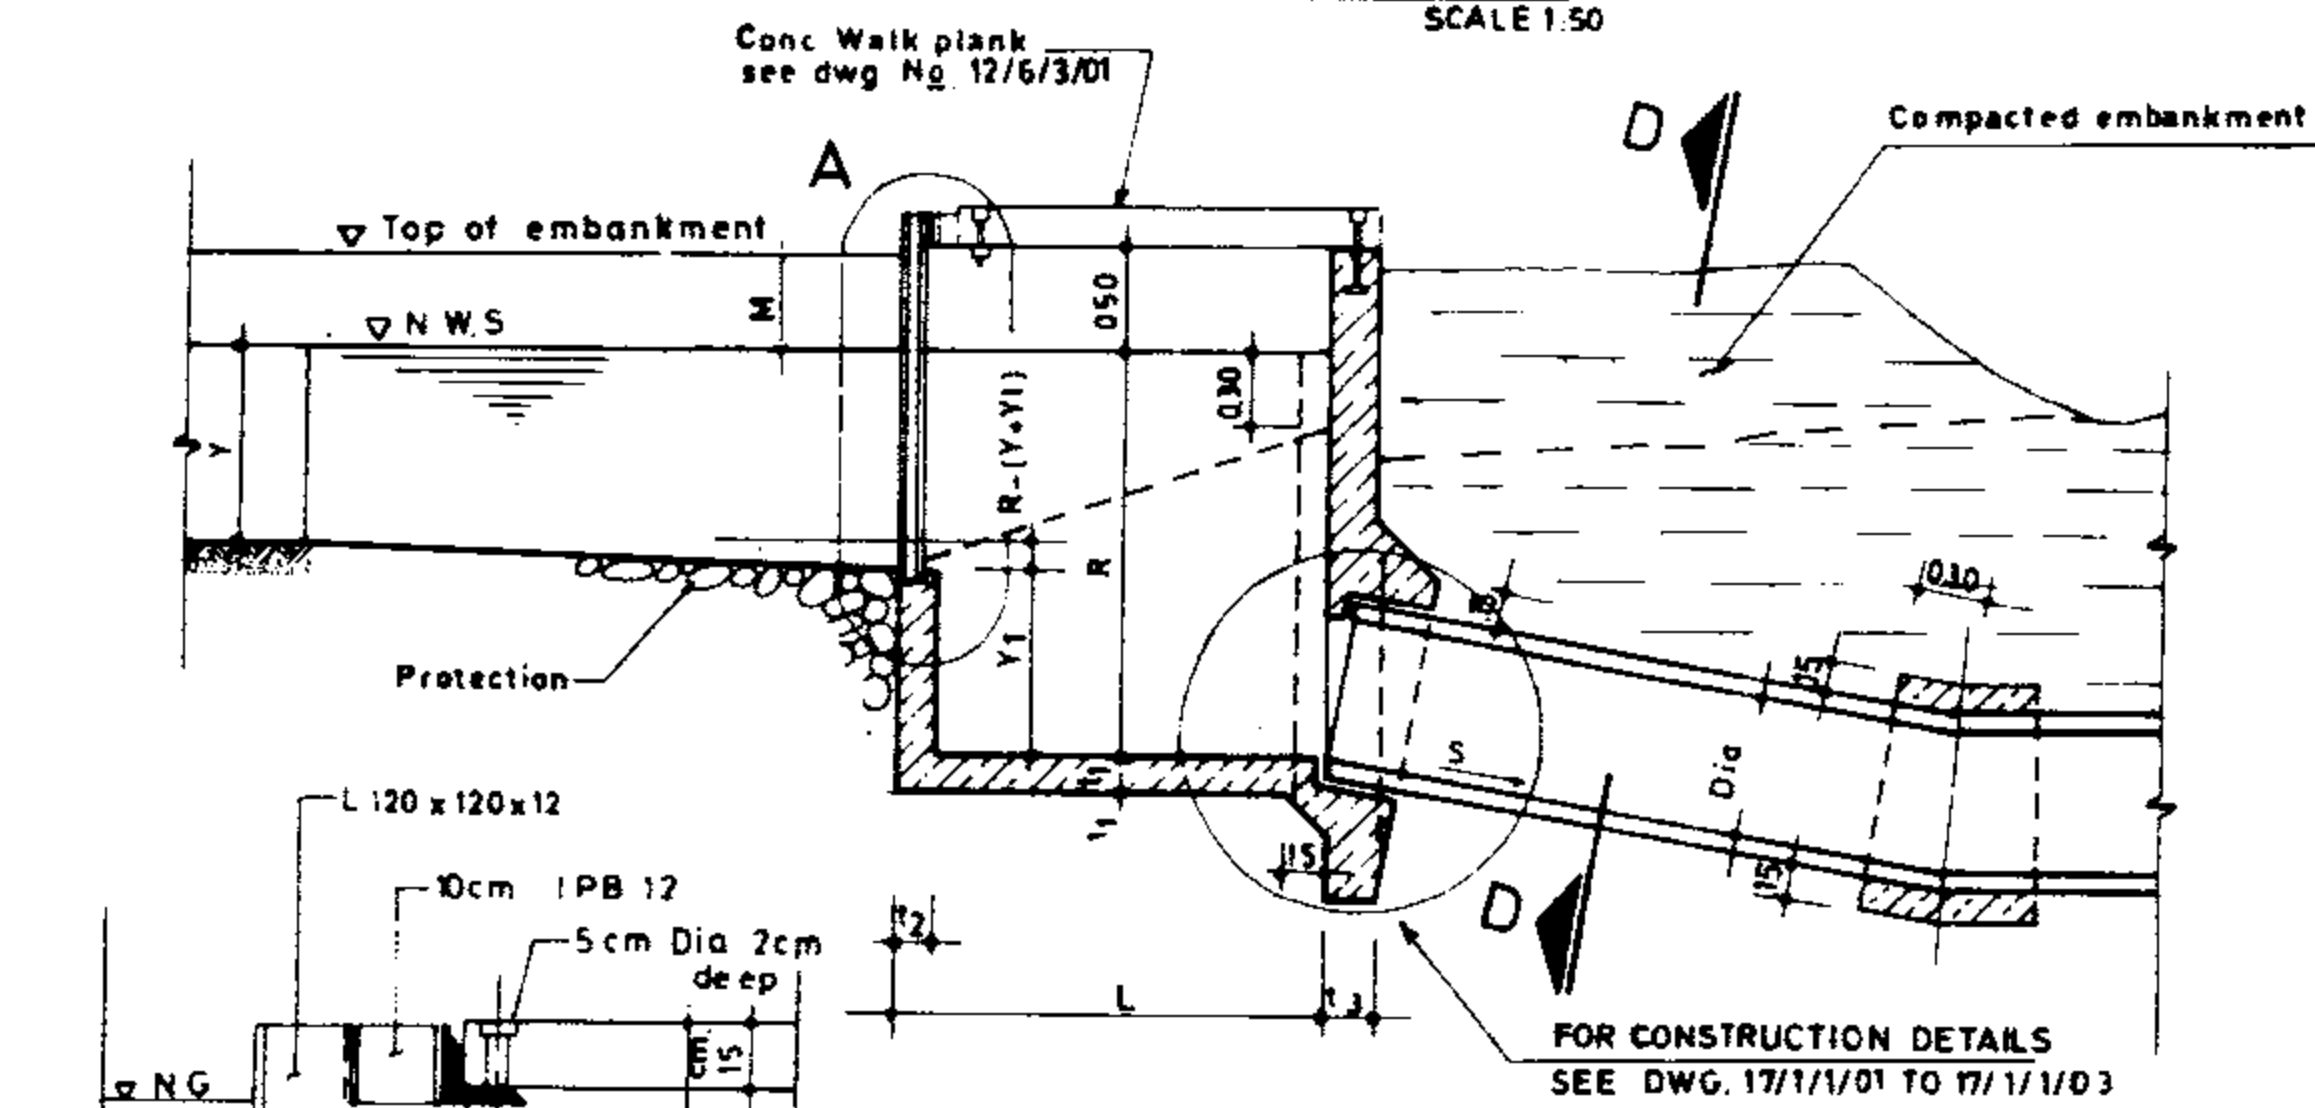


DETAIL A
SCALE 1:15

REFERENCE DWGS. For general notes see dwgs. No. 20/2/1/01 TO 20/2/1/03
 For reinforcement see dwg. No. 12/6/3/01
 For operating platform see dwg. No. 12/6/3/01
 For protection see dwg. No. 13/3/1/01 & 13/4/1/01

Scale: 1:50 1:15	IRRIGATION DRAINAGE STANDARDS	
Date:	DWG. N° 12/6/1/02	Pipe inlet with check structure (Earth canal)
Approved:	Sheet N° 2 of 6 Rev. N°.	
PLAN & SECTION		

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

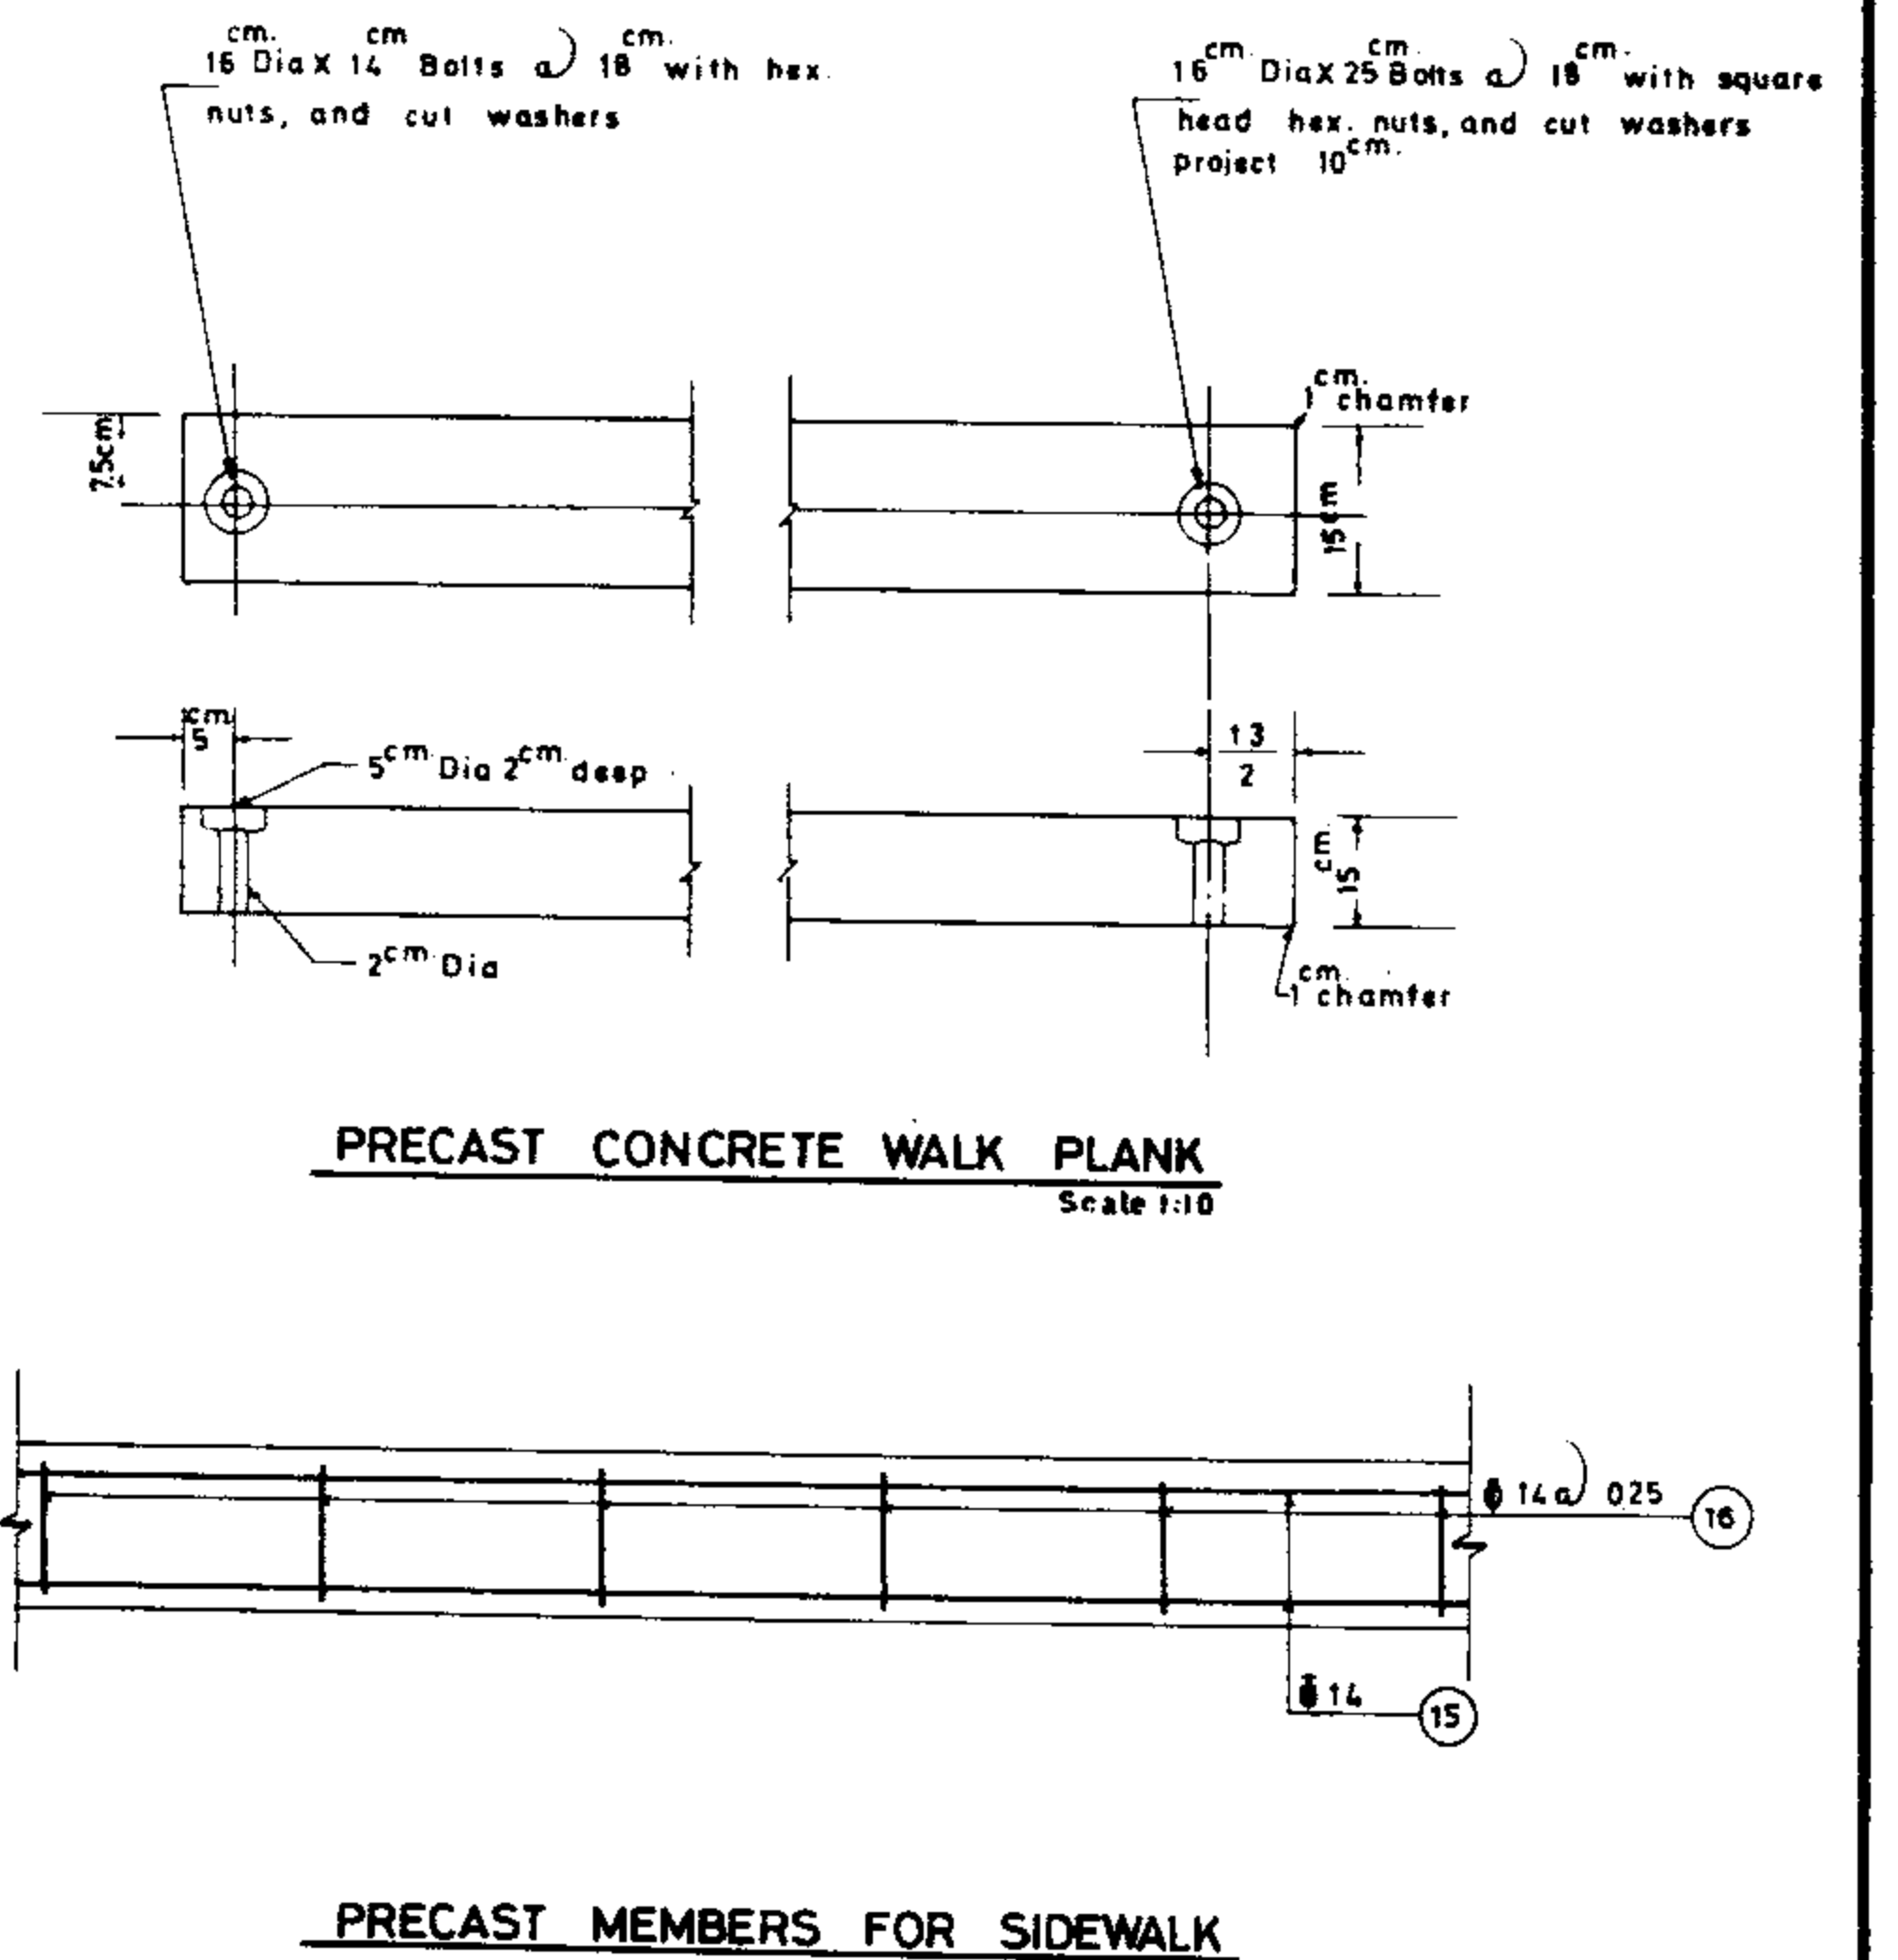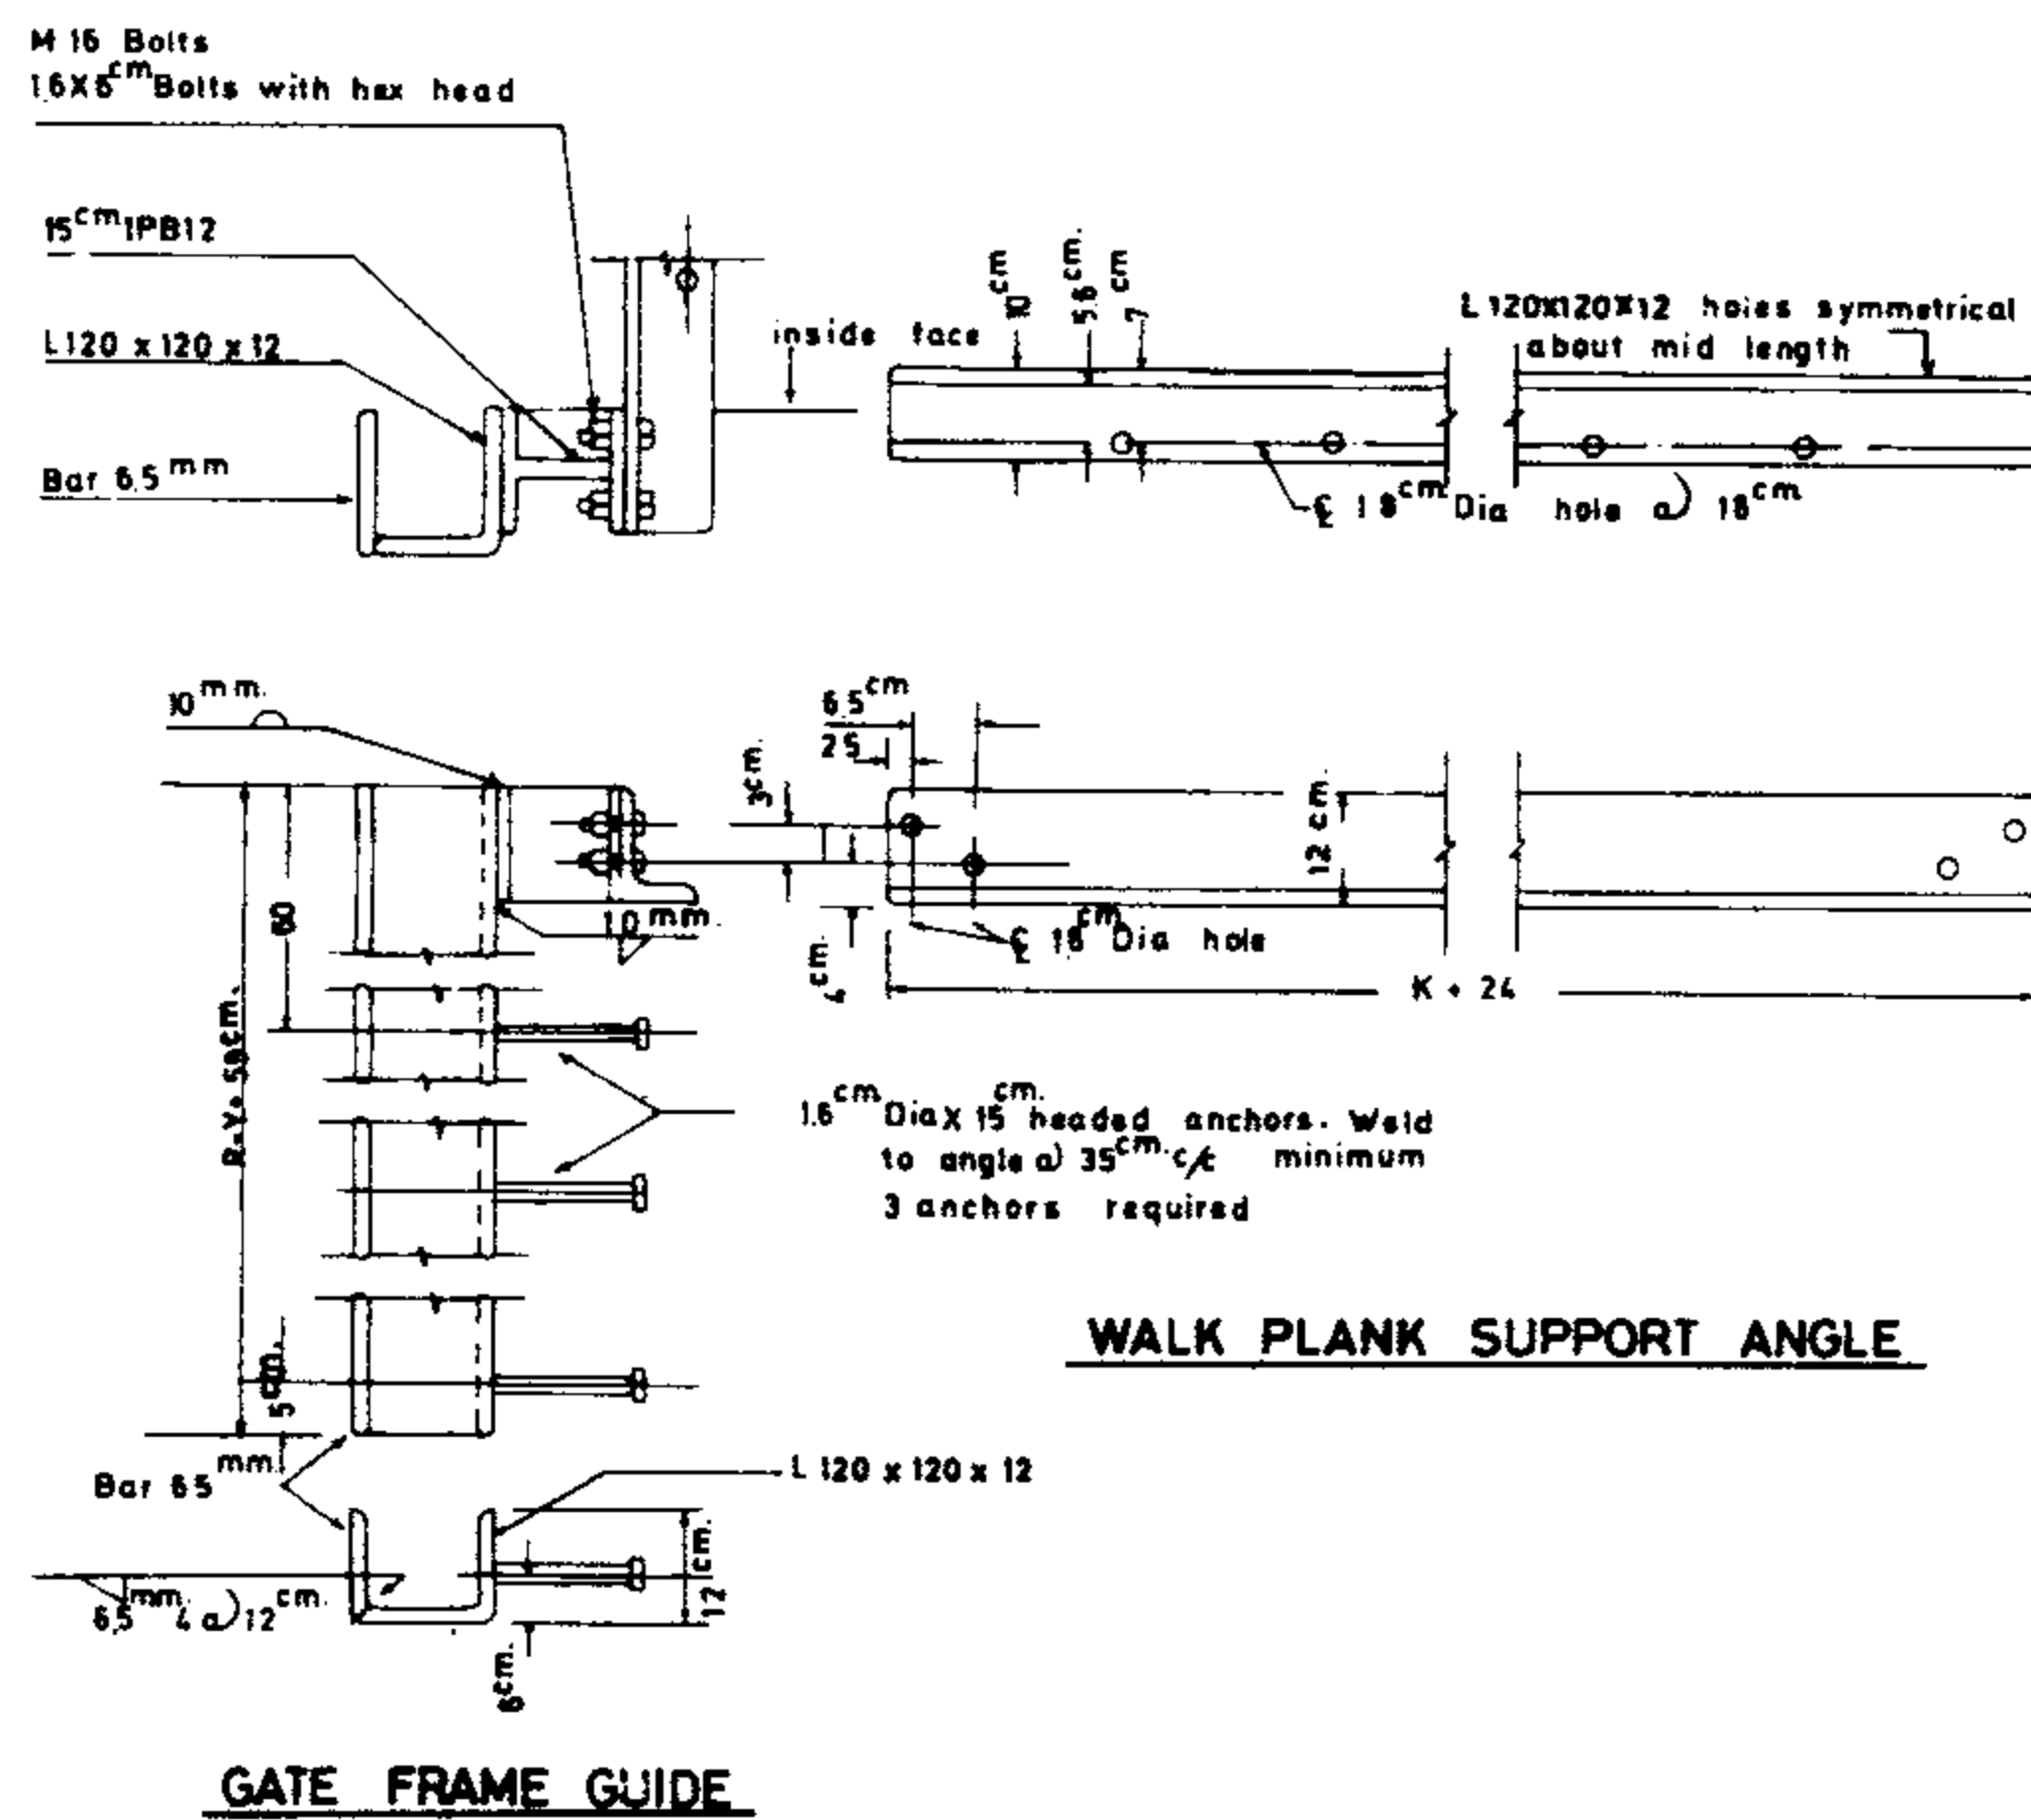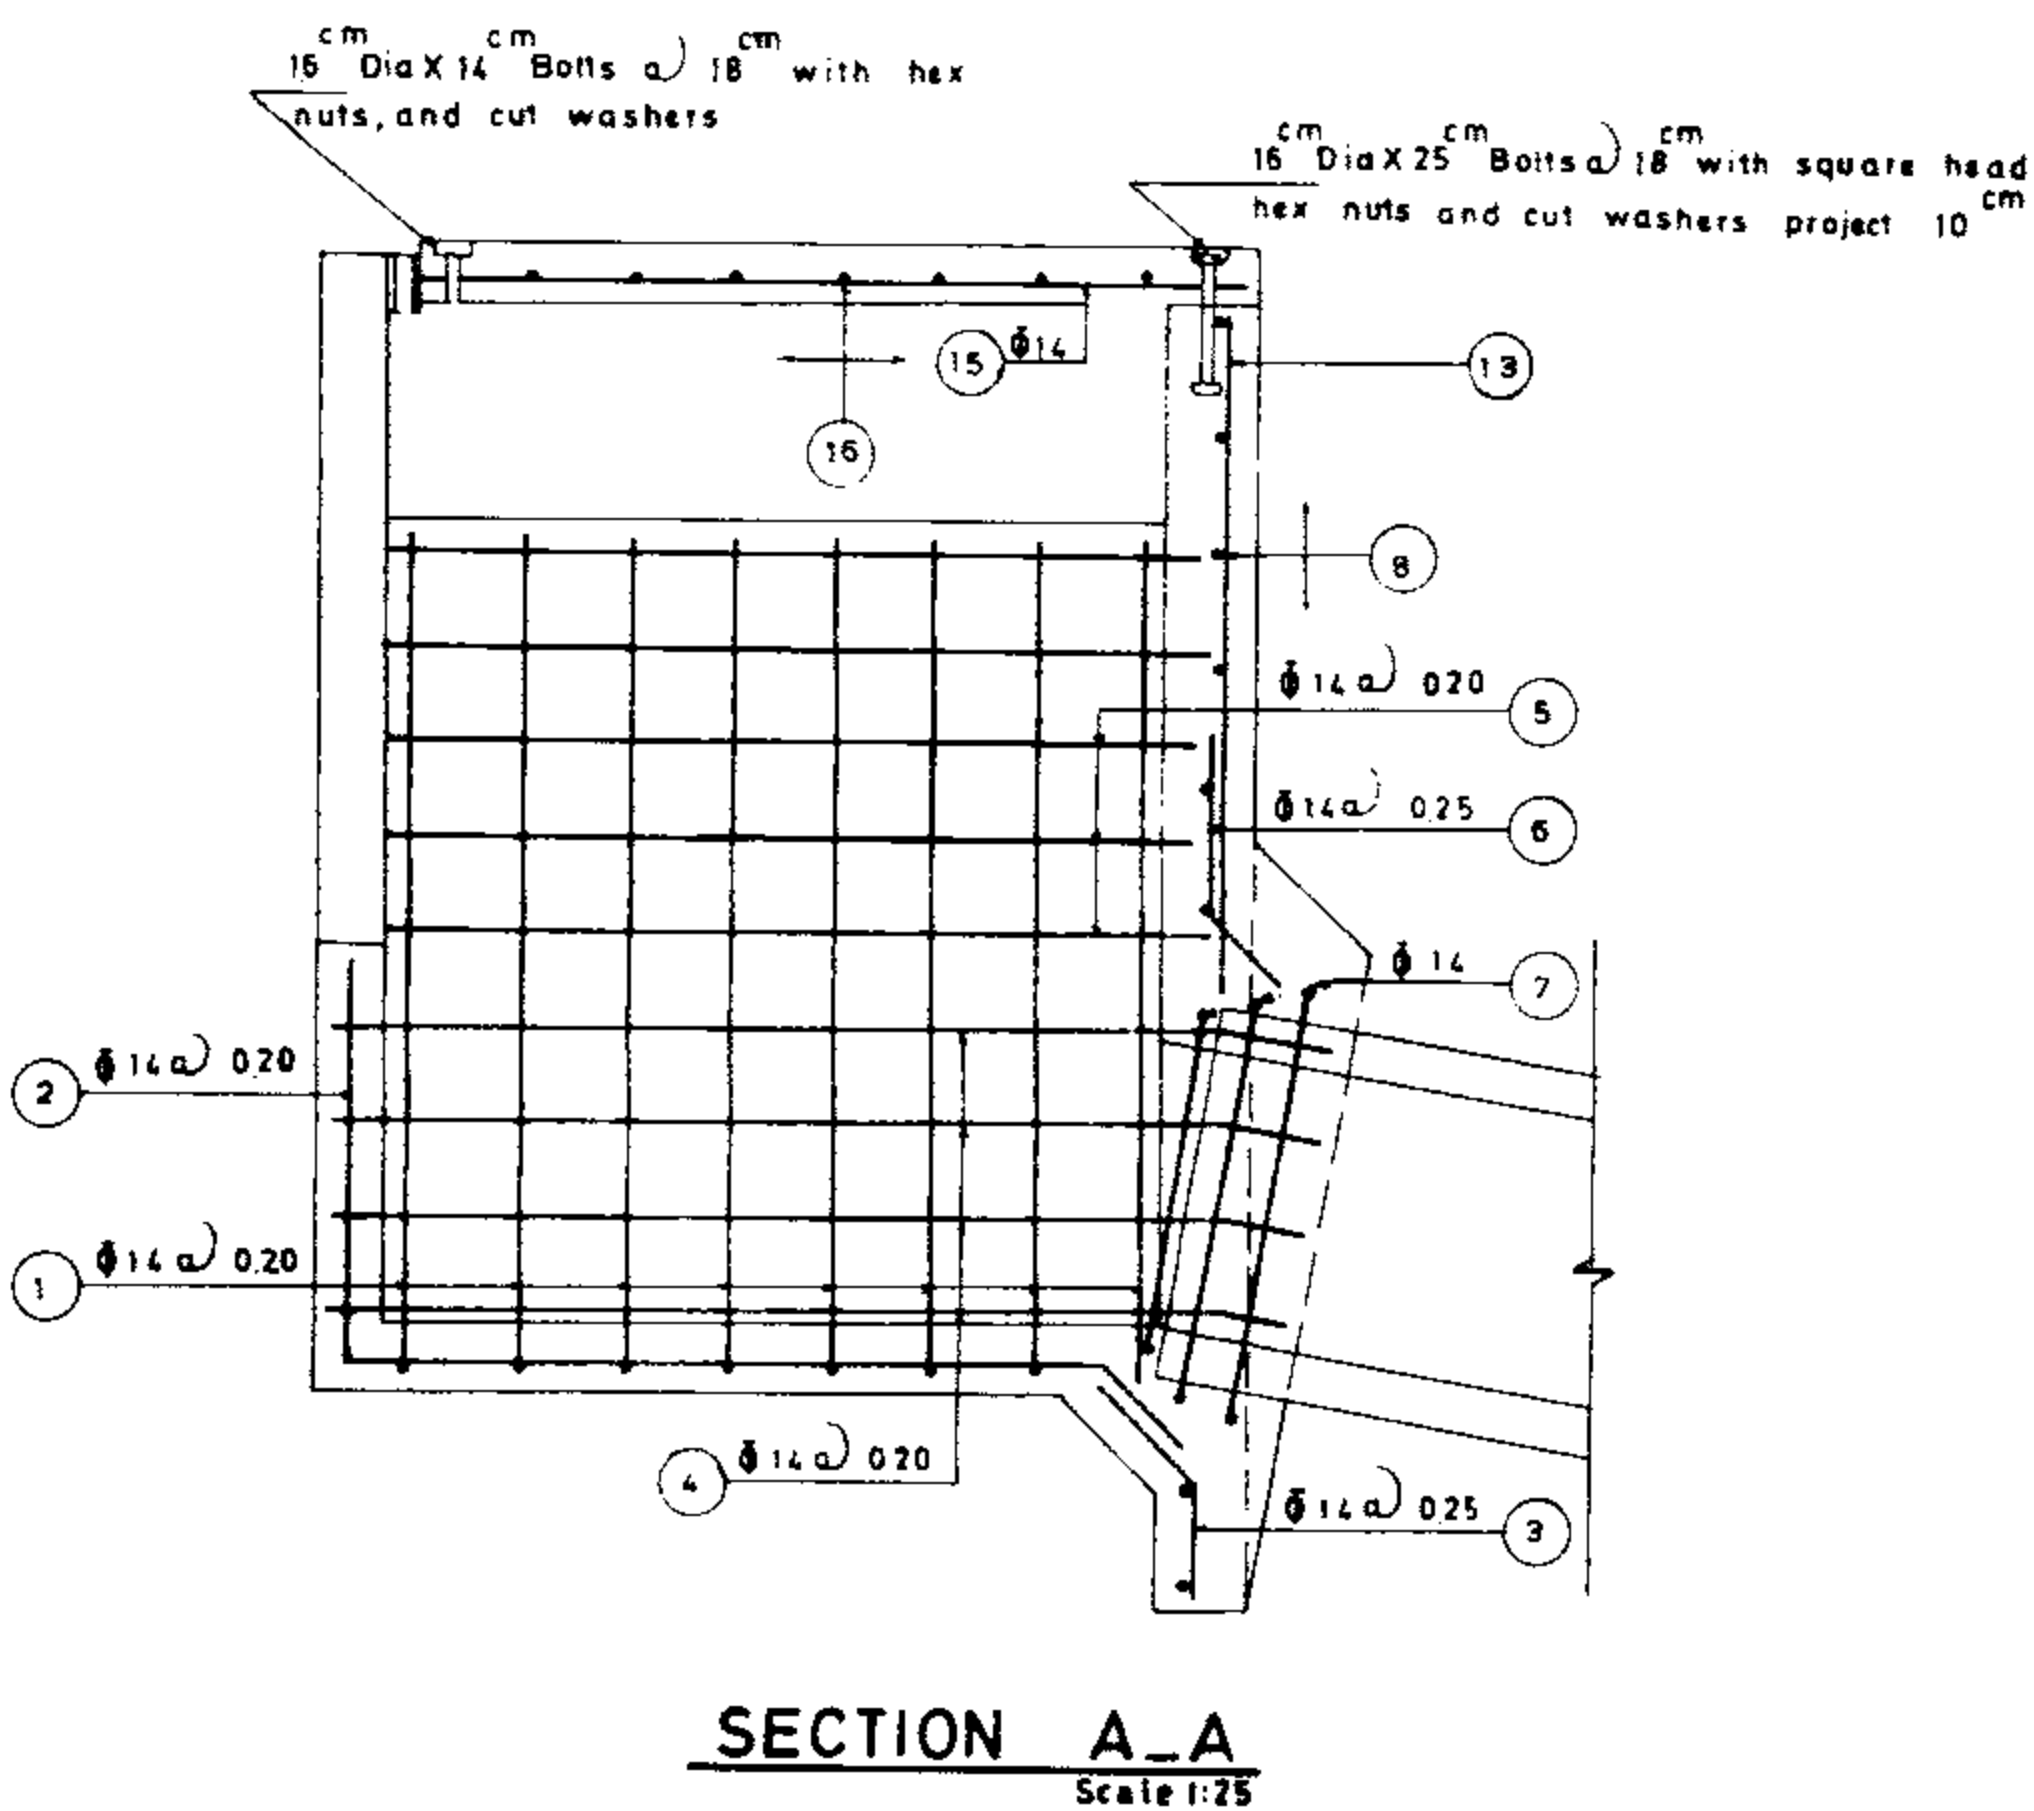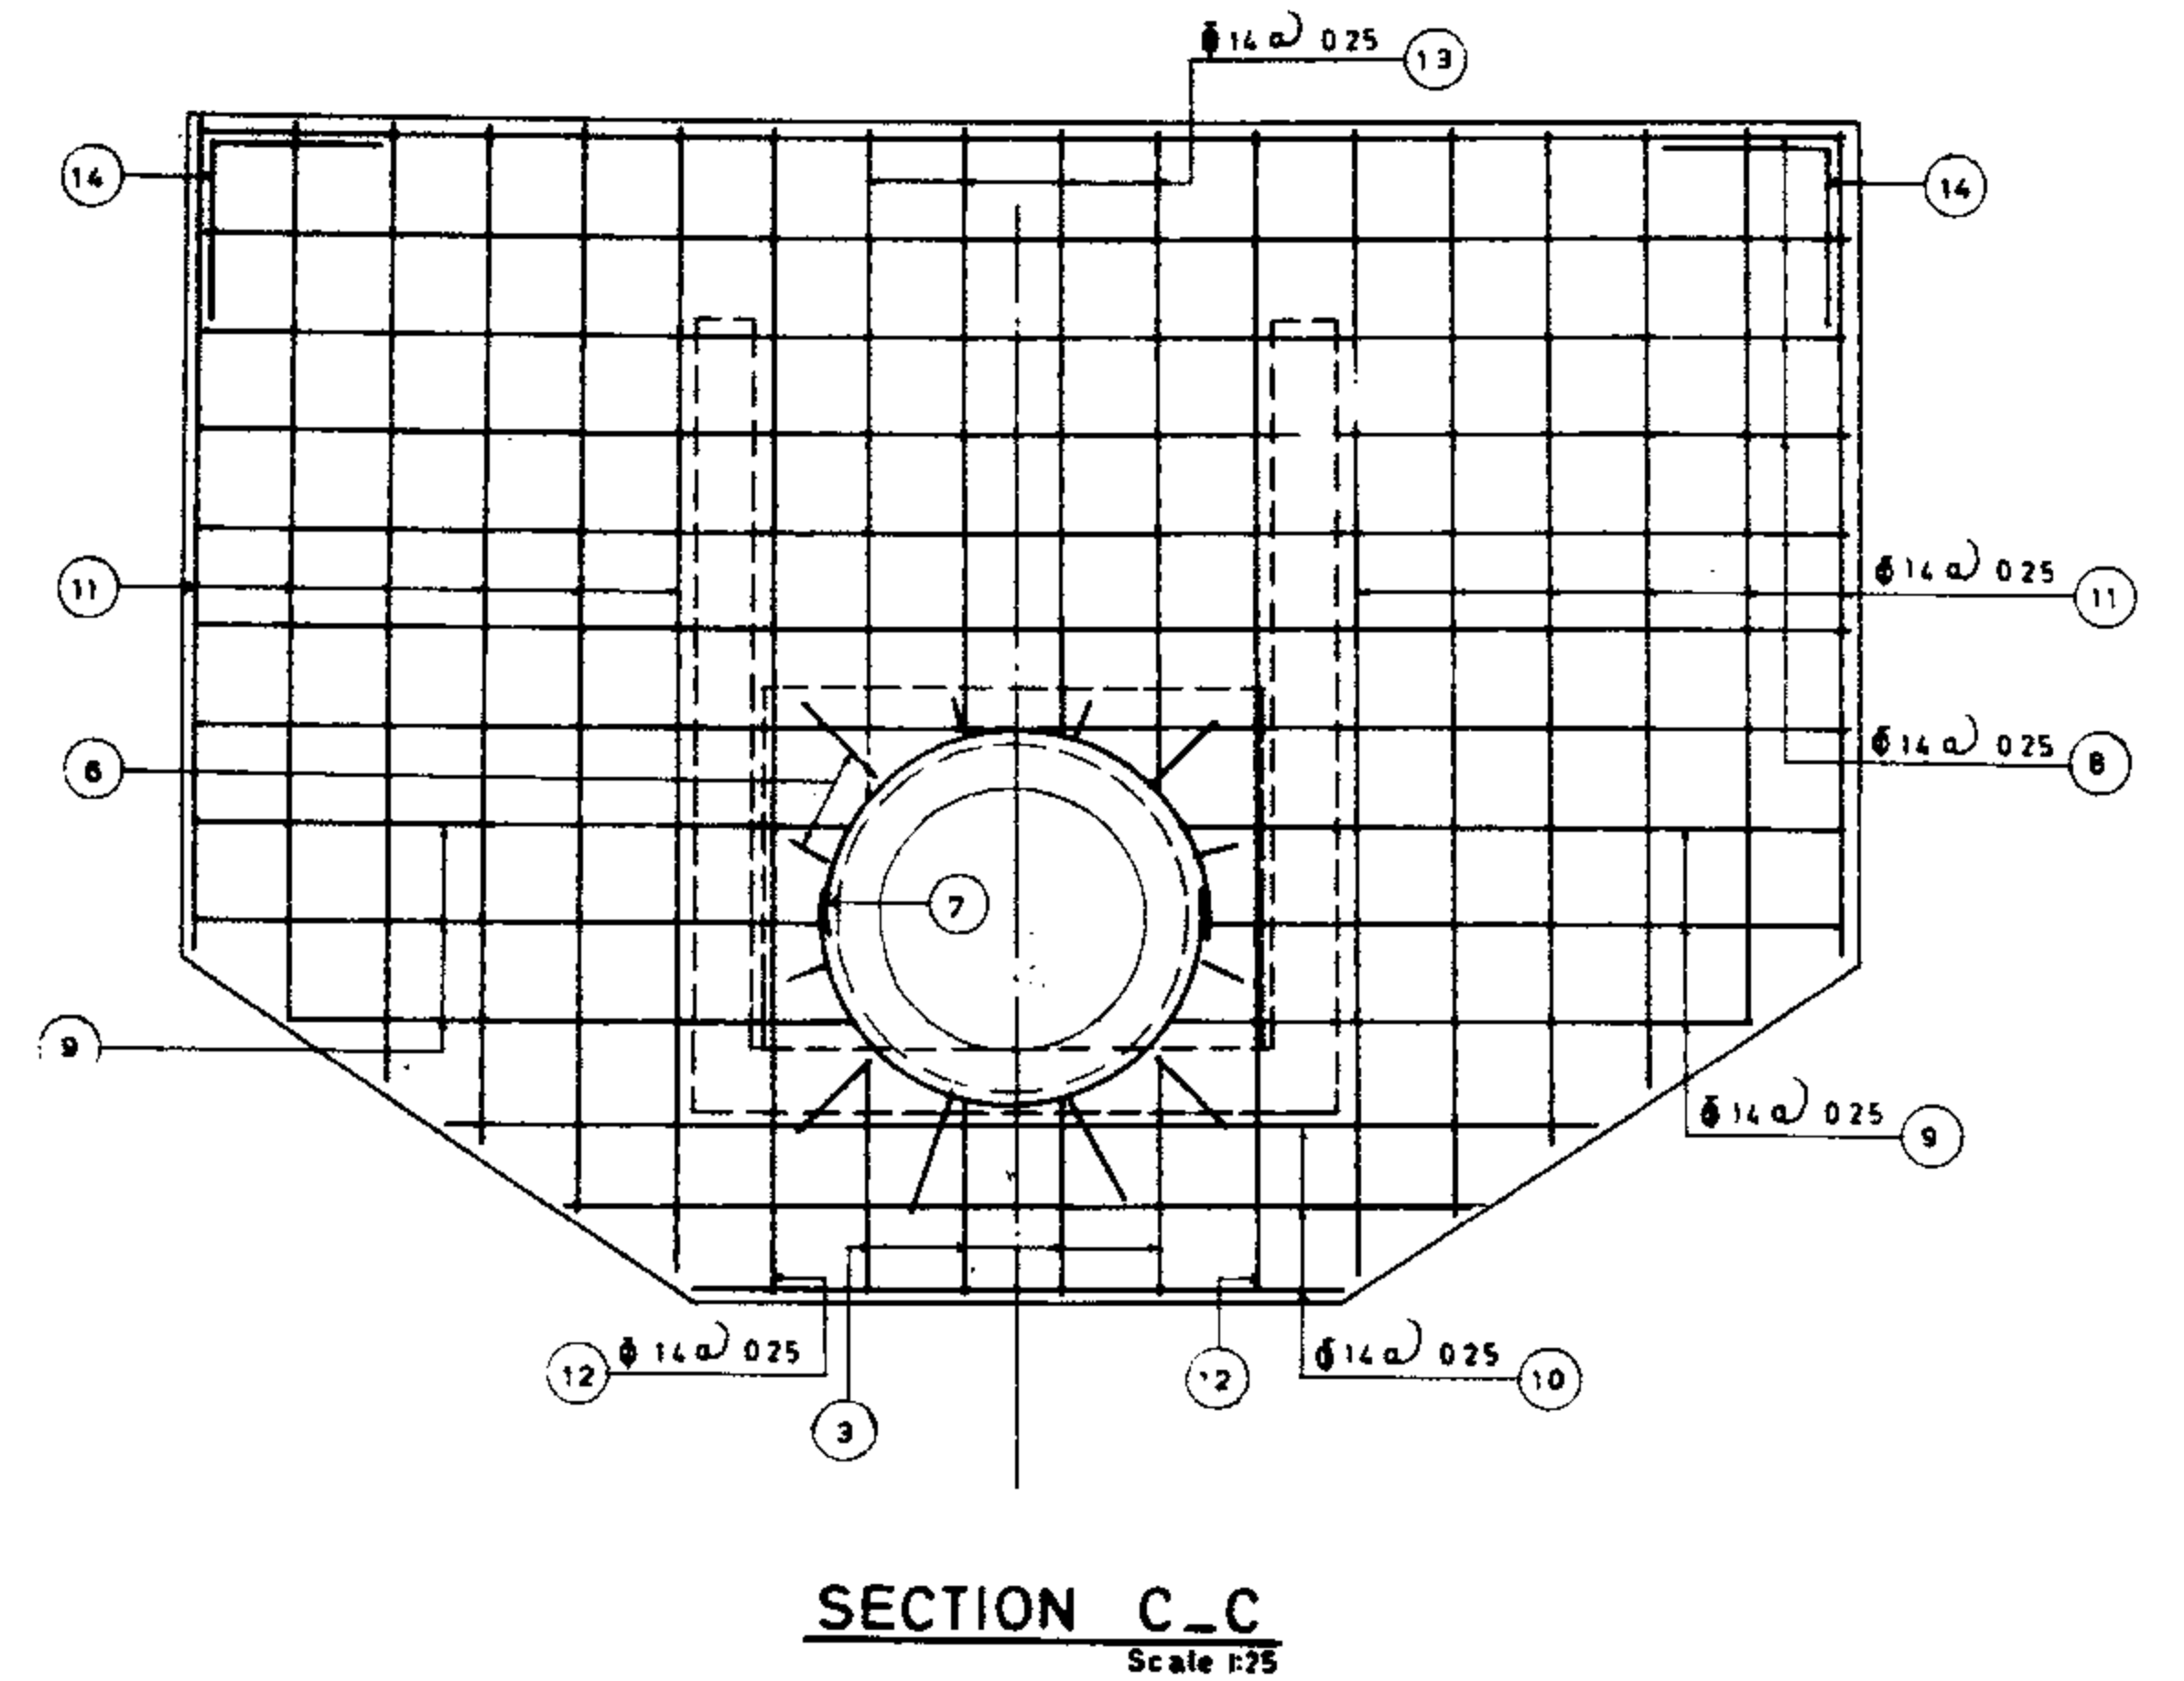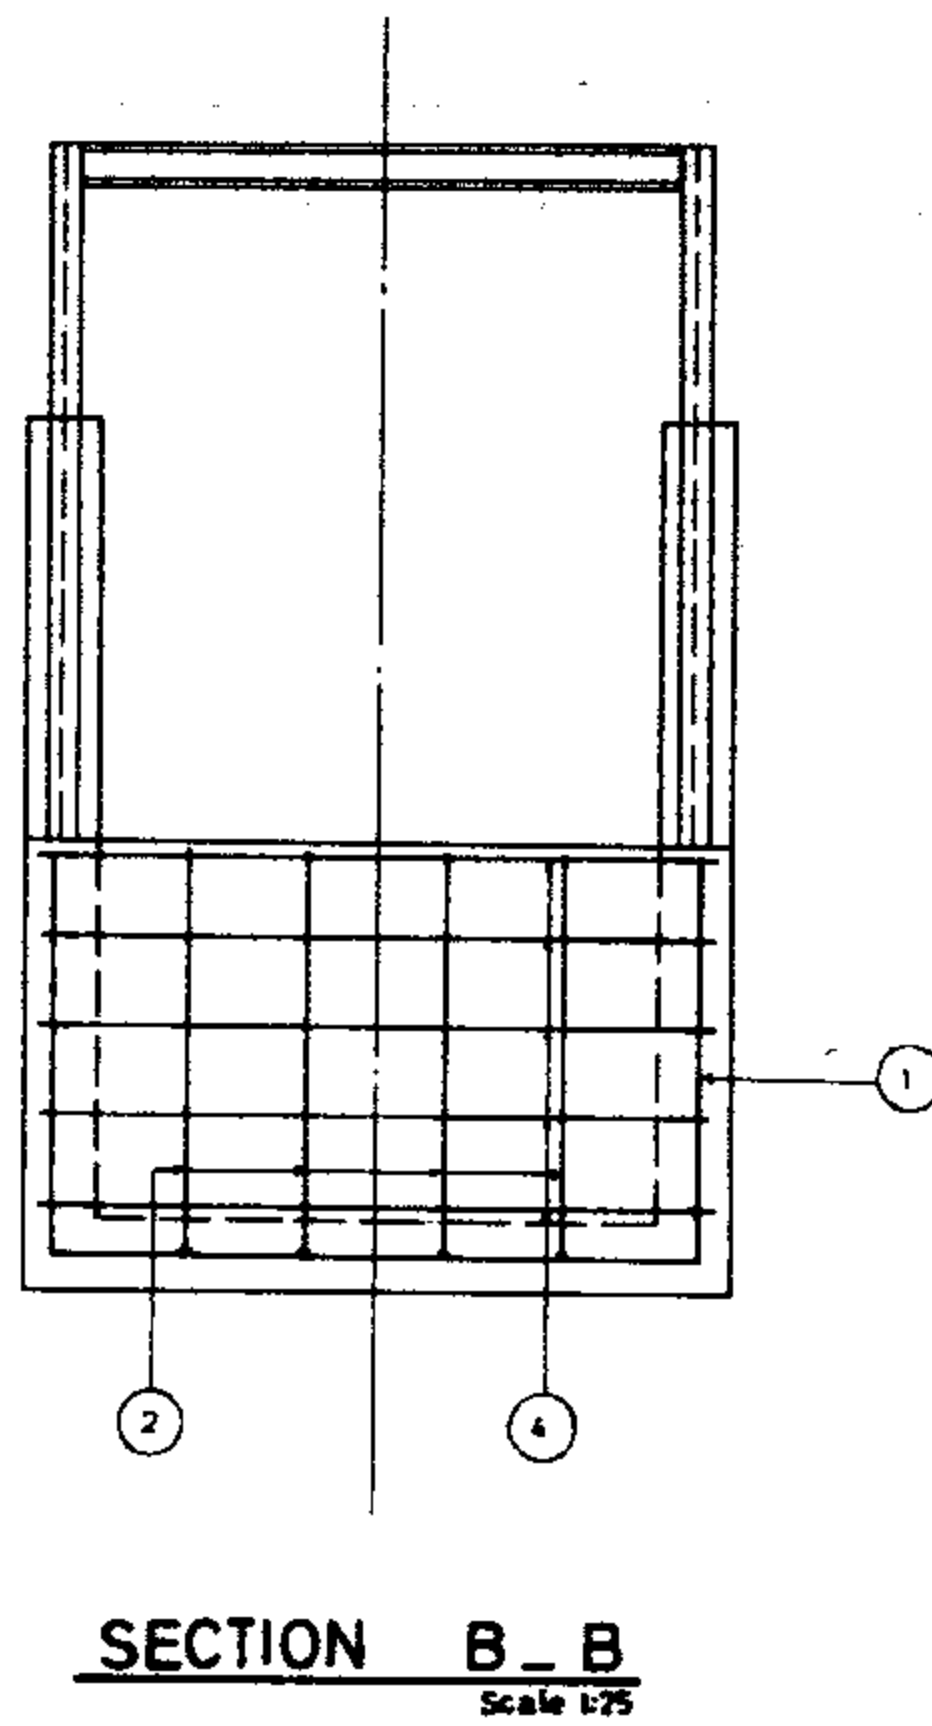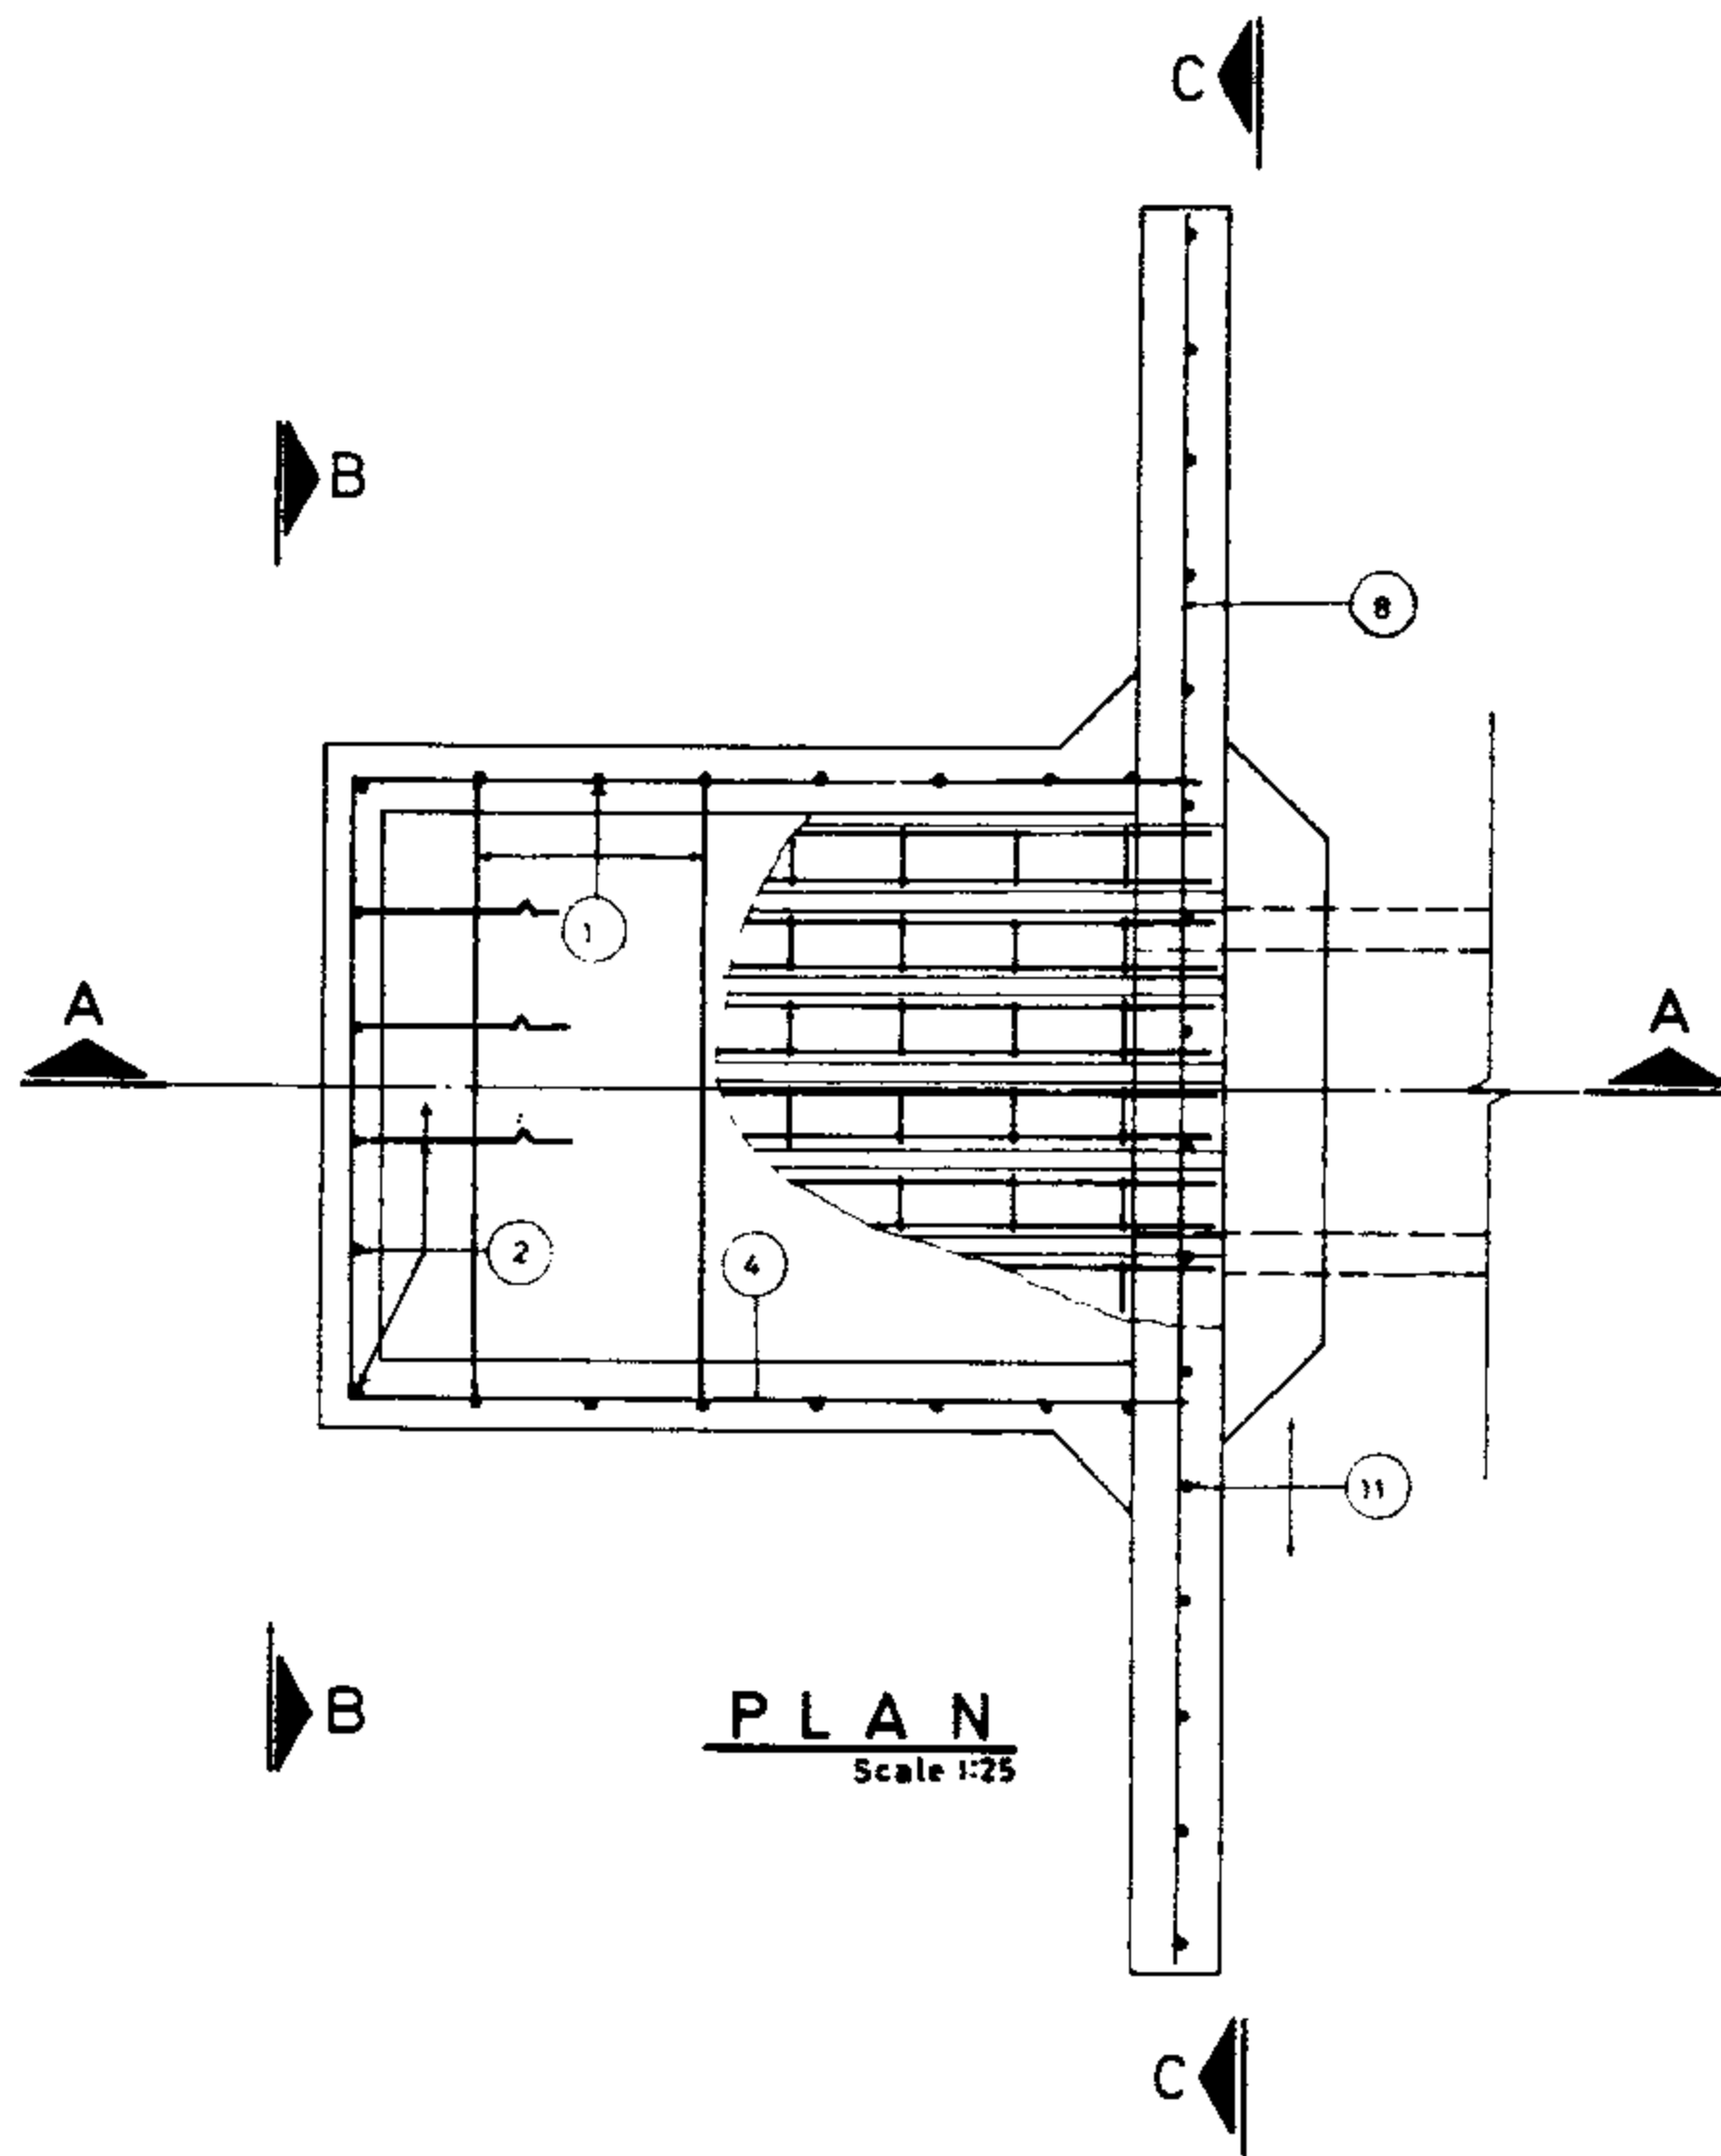

REFERENCE DWGS: For general notes see dwgs. No 20/2/1/01 TO 20/2/1/03
For reinforcement tables see dwgs. No. 12/6/3/02 TO 12/6/3/04

Scale: 1:25_ 1:10

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG. No. 12/6/3/01

Approved:

Sheet No. 3 of 6 Rev. No.

**PIPE INLET WITH CHECK STRUCTURE
REINFORCEMENT
PLAN & SECTION**

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

STR.300-1				
NO.	FORM	UNIT LENG.	TOTAL LENG.	
1	0.87 0.82	2 56	15 36	
2	0.32 1.06	1 53	9 18	
3	0.30 0.40	0 70	3 50	
4	0.82 1.17	3 96	15 84	
5	0.20 1.17	1 77	7 08	
6	0.30 0.60	0 90	6 30	
7	0.40 0.40	2 62	7 86	
8	3.22	3 22	16 10	
9	1.35 ~ 1.57	1 46	2 92	
10	0.82 ~ 2.41	1 62	4 86	
11	1.02 ~ 1.82	1 42	17 04	
12	82	1 82	7 28	
13	0.86 ~ 1.10	0 98	0 98	
14	0.50 0.50	1 00	2 00	
15	0.88	0 88	7 04	
16	0.10	0 10	1 60	
			124.94	
124.94 x 1.21 =			151.18 Kg	

STR.300-2				
NO.	FORM	UNIT LENG.	TOTAL LENG.	
1	1.57 1.07	4 16	29 12	
2	0.82 1.36	2 33	9 32	
3	0.30 0.40	0 70	4 20	
4	1.02 1.47	4 76	33 32	
5	0.20 1.47	2 07	12 42	
6	0.30 0.60	0 90	6 30	
7	0.40 0.40	2 62	7 86	
8	3.42	3 42	27 36	
9	1.65 ~ 1.67	1 56	3 12	
10	1.02 ~ 2.61	1 82	5 46	
11	1.72 ~ 2.52	2 12	25 44	
12	2.52	2 52	10 08	
13	1.56 ~ 1.74	1 65	1 65	
14	0.50 0.50	1 00	2 00	
15	1.18	1 18	11 80	
16	0.10	0 10	2 00	
			191.45	
191.45 x 1.21 =			231.65 kg	

STR.400-1				
NO.	FORM	UNIT LENG.	TOTAL LENG.	
1	0.87 0.92	2 66	15 96	
2	0.32 1.06	1 53	9 18	
3	0.30 0.40	0 70	3 50	
4	0.92 1.17	4 06	16 24	
5	0.20 1.02	1 62	6 48	
6	0.30 0.60	0 90	8 10	
7	0.40 0.40	2 99	8 97	
8	3.32	3 32	13 28	
9	1.35 ~ 1.62	1 49	5 96	
10	0.92 ~ 2.51	1 72	5 16	
11	1.02 ~ 1.82	1 42	17 04	
12	1.82	1 82	7 26	
13	0.76 ~ 0.99	0 88	0 88	
14	0.50 0.50	1 00	2 00	
15	0.88	0 88	7 04	
16	0.10	0 10	1 60	
			128.65	
128.65 x 1.21 =			155.67 Kg	

STR.400-2				
NO.	FORM	UNIT LENG.	TOTAL LENG.	
1	1.57 1.12	4 26	29 82	
2	0.82 1.36	2 33	16 31	
3	0.30 0.40	0 70	4 20	
4	1.12 1.47	4 86	34 02	
5	0.20 1.32	1 92	11 52	
6	0.30 0.60	0 90	8 10	
7	0.40 0.40	2 99	8 97	
8	3.52	3 52	24 54	
9	1.45 ~ 1.72	1 59	6 36	
10	2.71 ~ 1.12	1 92	5 76	
11	2.52 ~ 1.72	2 12	25 44	
12	2.52	2 52	10 08	
13	1.46 ~ 1.69	1 58	1 58	
14	0.50 0.50	1 00	2 00	
15	1.18	1 18	11 80	
16	0.10	0 10	2 50	
			203.10	
203.10 x 1.21 =			245.75 Kg	

STR.450-1				
NO.	FORM	UNIT LENG.	TOTAL LENG.	
1	0.92 0.92	2 76	16 56	
2	0.32 1.06	1 53	9 18	
3	0.30 0.40	0 70	3 50	
4	0.92 1.17	4 06	16 24	
5	0.20 1.02	1 62	9 72	
6	0.30 0.60	0 90	9 00	
7	0.40 0.40	3 10	9 30	
8	3.32	3 32	13 28	
9	1.41 ~ 1.92	1 52	6 08	
10	0.92 ~ 2.51	1 72	5 16	
11	1.07 ~ 1.87	1 47	17 54	
12	1.87	1 87	7 48	
13	0.75 ~ 1.01	0 88	1 76	
14	0.50 0.50	1 00	2 00	
15	0.88	0 88	7 04	
16	0.10	0 10	1 60	
			135.54	
135.54 x 1.21 =			164.00 Kg	

ALL BARS ARE ϕ 14 (1.21 kg/m)

REFERENCE DWGS: For reinforcement see dwg. No. 12/6/3/01
For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale:	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG.No. 12/6/3/02	PIPE INLET WITH CHECK STRUCTURE
Approved:	Sheet No. 4 of 6	Rev.No.
LIST OF REINFORCEMENT STR.1 TO 5		

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU

STR.450_2				
Q. NO.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	7		4.36	30.52
2	4		2.33	9.32
3	6		0.70	4.20
4	7		4.86	34.02
5	8		1.92	15.36
6	10		0.90	9.00
7	3		3.10	9.30
8	7		3.52	24.64
9	4		1.58	6.32
10	3		1.92	5.76
11	12		2.17	26.04
12	4		2.57	10.28
13	2		1.58	3.16
14	2		1.00	2.00
15	6x2		1.18	14.16
16	6x5		0.10	3.00
			207.08	
207.08 x 1.21 =			250.57 Kg	

STR.500_1				
Q. NO.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	7		3.06	21.42
2	7		1.68	11.76
3	6		0.70	4.20
4	4		4.56	18.24
5	6		1.72	10.32
6	10		0.90	9.00
7	3		3.35	10.05
8	4		3.52	14.08
9	4		1.56	6.24
10	3		1.92	5.76
11	12		1.52	18.24
12	4		1.92	7.68
13	2		0.90	1.80
14	2		1.00	2.00
15	6x2		1.03	12.36
16	6x5		0.10	3.00
			156.15	
156.15 x 1.21 =			188.94 Kg	

STR.500_2				
Q. NO.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	9		4.66	41.94
2	8		2.68	21.44
3	7		0.70	4.90
4	7		5.76	40.32
5	8		2.27	18.16
6	10		0.90	9.00
7	3		3.35	10.05
8	7		3.72	26.04
9	4		1.66	6.64
10	3		2.12	6.36
11	12		2.22	26.64
12	4		2.62	10.48
13	2		1.60	3.20
14	2		1.00	2.00
15	7x2		1.53	21.42
16	7x7		0.10	4.90
			253.49	
253.49 x 1.21 =			306.72 Kg	

STR.600_1				
Q. NO.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	7		3.26	22.82
2	7		1.68	11.76
3	6		0.70	4.20
4	4		4.56	18.24
5	6		1.77	10.62
6	12		0.90	10.80
7	3		3.79	11.37
8	4		2.62	10.48
9	4		1.53	6.12
10	3		1.92	5.76
11	12		1.62	19.44
12	2		2.02	4.04
13	2		0.92	1.84
14	2		1.00	2.00
15	6x2		1.03	12.36
16	6x5		0.10	3.00
			154.56	
154.56 x 1.21 =			187.02 Kg	

STR.600_2				
Q. NO.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	10		4.96	49.60
2	9		2.73	24.57
3	7		0.70	4.90
4	6		6.16	36.96
5	10		2.42	24.20
6	13		0.90	11.70
7	3		3.79	11.37
8	4		3.82	15.28
9	4		1.68	6.72
10	3		2.22	6.66
11	12		2.32	27.84
12	4		2.72	10.88
13	2		1.62	3.24
14	2		1.00	2.00
15	7x2		1.68	23.52
16	7x8		0.10	5.60
			265.04	
265.04 x 1.21 =			320.70 Kg	

STR.700_1				
Q. NO.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	7		3.66	25.62
2	8		1.83	14.64
3	7		0.70	4.90
4	4		5.06	20.24
5	10		1.92	19.20
6	13		0.90	11.70
7	3		4.30	12.90
8	4		3.92	15.68
9	6		1.70	10.20
10	3		2.07	6.21
11	14		1.65	23.66
12	2		2.12	4.24
13	3		0.92	2.76
14	2		1.00	2.00
15	7x2		1.18	16.52
16	7x6		0.10	4.20
			194.67	
194.67 x 1.21 =			235.55 Kg	

STR.700_2				
Q. NO.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	10		5.46	54.60
2	10		2.88	28.80
3	9		0.70	6.30
4	6		6.76	40.56
5	10		2.57	25.70
6	13		0.90	11.70
7	3		4.30	12.90
8	7		2.82	19.74
9	6		1.90	11.40
10	3		2.47	7.41
11	14		1.89	26.46
12	4		2.82	11.28
13	3		1.62	4.86
14	2		1.00	2.00
15	9x2		1.83	32.94
16	9x9		0.10	8.10
			304.77	
304.77 x 1.21 =			268.77 Kg	

STR.800_1				
Q. NO.	No.	FORM	UNIT LENG.	TOTAL LENG.
1	7		3.95	27.72
2	9		1.83	16.47
3	7		0.70	4.90
4	4		5.15	26.64
5	7		1.92	13.44
6	15		0.90	13.50
7	3		4.66	13.98
8	4		4.32	17.28
9	6		1.87	11.22
10	3		2.17	6.51
11	14		1.74	24.36
12	2		2.22	4.44
13	3		0.95	2.85
14	2		1.00	2.00
15	7x2		1.18	16.52
16	7x6		0.10	4.20
			200.03	
200.03 x 1.21 =			242.04 Kg	

ALL BARS ARE $\Phi 14$
(1.21 kg/m)

REFERENCE DWGS: For reinforcement see dwg. No. 12/6/3/01
For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale: IRRIGATION & DRAINAGE STANDARDS
Date: DWG. No. 12/6/3/03
Approved: Sheet No. 5 of 6 Rev. No. PIPE INLET WITH CHECK STRUCTURE
LIST OF REINFORCEMENT
STR. 6 TO 13

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

STR.800_2					
PO	No.	FORM	UNIT LENG.	TOTAL LENG.	
1	11	1.97 [2.02] 1.97	5.96	65.56	
2	12	0.72 [2.11] 0.20	3.03	36.36	
3	10	0.30 [0.40]	0.70	7.00	
4	6	2.02 [2.27] 0.40	7.36	44.16	
5	12	0.20 [2.12] 0.40	2.72	32.64	
6	15	0.30 [0.60]	0.90	13.50	
7	3	0.40 [0.40]	4.66	13.98	
8	7	4.92	4.92	34.44	
9	6	1.92 ~ 2.42	2.17	13.02	
10	3	2.02 ~ 3.52	2.77	8.31	
11	14	1.95 ~ 2.92	2.44	34.16	
12	4	2.92	2.92	11.68	
13	3	1.42 ~ 1.87	1.65	4.95	
14	2	0.50 [0.50]	1.00	2.00	
15	11x2	1.98	1.98	43.56	
16	11x9	0.10	0.10	9.90	
				375.22	
				375.22 x 1.21 = 454.02 Kg	

STR.900_2					
PO	No.	FORM	UNIT LENG.	TOTAL LENG.	
1	8	1.37 [1.72] 1.37	4.46	35.68	
2	10	0.32 [1.51] 0.15	1.98	19.80	
3	9	0.30 [0.40]	0.70	6.30	
4	4	1.72 [1.62] 0.40	5.76	23.04	
5	10	0.20 [1.47] 0.40	2.07	20.70	
6	16	0.30 [0.60]	0.90	14.40	
7	4	0.40 [0.40]	5.03	20.12	
8	4	4.62	4.62	18.48	
9	8	1.72 ~ 2.27	2.00	16.00	
10	3	1.72 ~ 3.22	2.47	7.41	
11	14	1.35 ~ 2.32	1.84	25.76	
12	4	2.32	2.32	9.28	
13	4	0.72 ~ 1.22	0.97	3.88	
14	2	0.50 [0.50]	1.00	2.00	
15	9x2	1.33	1.33	23.94	
16	9x7	0.10	0.10	6.30	
				253.09	
				253.09 x 1.21 = 306.24 Kg	

STR.900_2					
PO	No.	FORM	UNIT LENG.	TOTAL LENG.	
1	12	2.10 [2.08] 2.10	6.28	75.36	
2	12	0.62 [2.26] 0.20	3.08	36.96	
3	10	0.30 [0.40]	0.70	7.00	
4	6	2.08 [2.42] 0.40	7.72	46.32	
5	14	0.20 [2.24] 0.40	2.84	39.76	
6	16	0.30 [0.60]	0.90	14.40	
7	4	0.40 [0.40]	5.03	20.12	
8	7	4.98	4.98	34.86	
9	8	1.90 ~ 2.45	2.18	17.44	
10	3	2.08 ~ 3.58	2.83	8.49	
11	14	2.05 ~ 3.02	2.54	35.56	
12	6	3.02	3.02	18.12	
13	4	1.42 ~ 1.92	1.67	6.68	
14	2	0.50 [0.50]	1.00	2.00	
15	11x2	2.10	2.10	46.20	
16	11x10	0.10	0.10	11.00	
				420.27	
				420.27 x 1.21 = 508.53 Kg	

STR.1000_1					
PO	No.	FORM	UNIT LENG.	TOTAL LENG.	
1	9	1.47 [1.72] 1.47	4.66	41.94	
2	10	0.32 [1.56] 0.15	2.13	21.30	
3	9	0.30 [0.40]	0.70	6.30	
4	4	1.69 [1.77] 0.43	6.06	24.24	
5	10	0.20 [1.62] 0.40	2.22	22.20	
6	18	0.30 [0.60]	0.90	16.20	
7	4	0.40 [0.40]	5.54	22.16	
8	4	4.62	4.62	18.48	
9	8	1.65 ~ 2.27	1.96	15.68	
10	3	1.72 ~ 3.16	2.44	7.32	
11	14	1.45 ~ 2.42	1.94	27.16	
12	4	2.42	2.42	9.68	
13	4	0.70 ~ 1.27	0.99	3.96	
14	2	0.50 [0.50]	1.00	2.00	
15	9x2	1.48	1.48	25.16	
16	9x7	0.10	0.10	6.30	
				270.08	
				270.08 x 1.21 = 326.80 Kg	

STR.1000_2					
PO	No.	FORM	UNIT LENG.	TOTAL LENG.	
1	13	2.20 [2.38] 2.20	6.78	88.14	
2	14	0.52 [2.56] 0.20	3.28	45.92	
3	11	0.30 [0.40]	0.70	7.70	
4	5	2.38 [2.72] 0.40	8.62	43.10	
5	16	0.20 [2.54] 0.40	3.14	50.24	
6	18	0.30 [0.60]	0.90	16.20	
7	4	0.40 [0.40]	5.54	22.16	
8	7	5.28	5.28	39.96	
9	8	1.98 ~ 2.60	2.29	18.32	
10	3	2.38 ~ 3.82	3.10	9.30	
11	14	2.15 ~ 3.12	2.64	36.96	
12	6	3.12	3.12	18.72	
13	4	1.40 ~ 1.96	1.68	6.72	
14	2	0.50 [0.50]	1.00	2.00	
15	12x2	2.40	2.40	57.60	
16	12x10	0.10	0.10	12.00	
				472.04	
				472.04 x 1.21 = 571.17 Kg	

STR.1200_1					
PO	No.	FORM	UNIT LENG.	TOTAL LENG.	
1	10	1.67 [1.92] 1.67	5.26	52.60	
2	11	0.32 [1.96] 0.20	2.48	27.28	
3	9	0.30 [0.40]	0.70	6.30	
4	4	1.92 [2.12] 0.40	6.96	27.84	
5	11	0.20 [1.79] 0.40	2.57	26.27	
6	21	0.30 [0.60]	0.90	18.90	
7	4	0.40 [0.40]	6.41	25.64	
8	4	4.82	4.82	19.28	
9	10	1.63 ~ 2.37	2.00	20.00	
10	3	1.92 ~ 3.30	2.61	7.83	
11	14	1.65 ~ 2.62	2.14	29.96	
12	2	2.62	2.62	5.24	
13	5	0.68 ~ 1.35	1.02	5.10	
14	2	0.50 [0.50]	1.00	2.00	
15	10x2	1.83	1.83	36.60	
16	10x9	0.10	0.10	9.00	
				321.84	
				321.84 x 1.21 = 389.43 Kg	

STR.1400_1					
PO	No.	FORM	UNIT LENG.	TOTAL LENG.	
1	11	1.87 [2.12] 1.87	5.86	64.46	
2	12	0.32 [2.11] 0.20	2.63	31.56	
3	10	0.30 [0.40]	0.70	7.00	
4	4	2.12 [2.27] 0.40	7.46	29.84	
5	14	0.20 [2.12] 0.40	2.72	38.08	
6	23	0.30 [0.60]	0.90	20.70	
7	4	0.40 [0.40]	7.21	28.84	
8	4	5.02	5.02	20.08	
9	12	1.62 ~ 2.47	2.05	24.60	
10	3	2.12 ~ 3.47	2.80	8.40	
11	14	1.85 ~ 2.82	2.34	32.76	
12	2	2.82	2.82	5.64	
13	6	0.67 ~ 1.45	1.06	6.36	
14	2	0.50 [0.50]	1.00	2.00	
15	11x2	1.98	1.98	43.56	
16	11x9	0.10	0.10	9.90	
				373.78	
				373.78 x 1.21 = 452.27 Kg	

STR.1600_1					
PO	No.	FORM	UNIT LENG.	TOTAL LENG.	
1	12	2.10 [2.28] 2.10	6.48	77.76	
2	13	0.32 [2.26] 0.20	2.78	36.14	
3	11	0.30 [0.40]	0.70	7.70	
4	4	2.25 [2.42] 0.43	7.92	36.14	
5	16	0.20 [2.24] 0.40	2.84	45.44	
6	26	0.30 [0.60]	0.90	23.40	
7	4	0.40 [0.40]	7.94	31.76	
8	4	5.18	5.18	20.72	
9	14	1.60 ~ 2.55	2.08	29.12	
10	3	2.28 ~ 3.63	2.96	8.88	
11	14	2.05 ~ 3.02	2.54	35.56	
12	2	3.02	3.02	6.04	
13	7	0.67 ~ 1.55	1.11	7.77	
14	2	0.50 [0.50]	1.00	2.00	
15	12x2	2.10	2.10	50.40	
16	12x10	0.10	0.10	12.00	
				430.83	
				430.83 x 1.21 = 521.30 Kg	

ALL BARS ARE $\Phi 14$
(1.21 kg/m)

REFERENCE DWGS: For reinforcement see dwg. No. 12/6/3/01

For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale:

Date:

Approved:

IRRIGATION & DRAINAGE STANDARDS

DWG. No. 12/6/3/04

Sheet No. 6 of 6

Rev. No.

PIPE INLET WITH CHECK STRUCTURE

LIST OF REINFORCEMENT

STR. 14 TO 21

ISLAMIC REPUBLIC OF IRAN

MINISTRY OF PLAN & BUDGE

TECHNICAL RESEARCH AND
STANDARD BUREAU

PROCESS TO SELECT CONTROL NOTCH

A control notch must control discharge from $0.2 Q$ to Q_{Max} .
selecting a proper notch & its dimension proceed with the following steps.

LET:

b = Bottom width of the canal, (m).

m = Side slope of canal.

Y = Depth of flow, (m).

A = Area of flow cross section = $bY + mY^2$

\uparrow = Wetted perimeter = $b + 2Y\sqrt{m^2 + 1}$, (m).

R = Hydraulic radius = $\frac{A}{\uparrow}$, (m).

S = Canal bottom slope.

n = Manning's roughness coefficient.

Q = Discharge = $\frac{1}{n} AR^{2/3} S^{1/2}$, (m^3/s).

V = Velocity = $\frac{Q}{A}$, (m/s).

h_v = Velocity head = $\frac{V^2}{2g}$, (m).

E = Energy head = $Y + h_v$, (m).

P = Bottom width of control notch, (m).

W = Control notch side slope.

T = Height of the notch, (m).

STEP 1

For a given b, m, n, S & Q set up, calculate & fill the following table.

	Y (m)	A (m^2)	V (m/s)	h_v (m)	E (m)
Q_{Max} =
$0.2Q_{Max}$ =

NOTE: To expedite the above calculation, use "tables of hydraulic properties of trapezoidal canals".

STEP 2

From the 6 graphs presented for control notch, select the graph having the smallest P value which furnishes the full range of

discharge. Enter the graph with Q_{Max} & its corresponding E . read the value of " W " on the first curve which lies immediately to the right of the point, check in the same manner for $0.2Q_{Max}$ & its corresponding E . If the curve has been the same for both discharge, read P & W values and go to step 3, otherwise try the graph with the next greater P value. and repeat the same procedure until one of the slope curve lies on the right of the two points.

STEP 3

SET:

$$T > Y \text{ WHEN } Q \text{ IS MAX}$$

THEN:

$$N = P + 2WT$$

DESIGN EXAMPLE

GIVEN:

$$Q = 1.4 \text{ m}^3/\text{s}$$

$$S_f = 0.0005$$

$$m = 1.5:1$$

$$n = 0.025$$

$$b = 1.5 \text{ m}$$

$$y_1 = 0.86 \text{ m}$$

required:

bottom width of control notch : P

control notch side slope : W

height of notch : T


SOLUTION:

STEP (1)

$$A_1 = 1.5 \times 0.86 + 1.5 \times (0.86)^2 = 2.399 \text{ m}^2$$

$$V_1 = \frac{Q}{A} = 0.584 \text{ m/s FOR } Q_{MAX}$$

$$h_{v1} = \frac{V_1^2}{2g} = \frac{0.584^2}{2 \times 9.81} = 0.02 \text{ m}$$

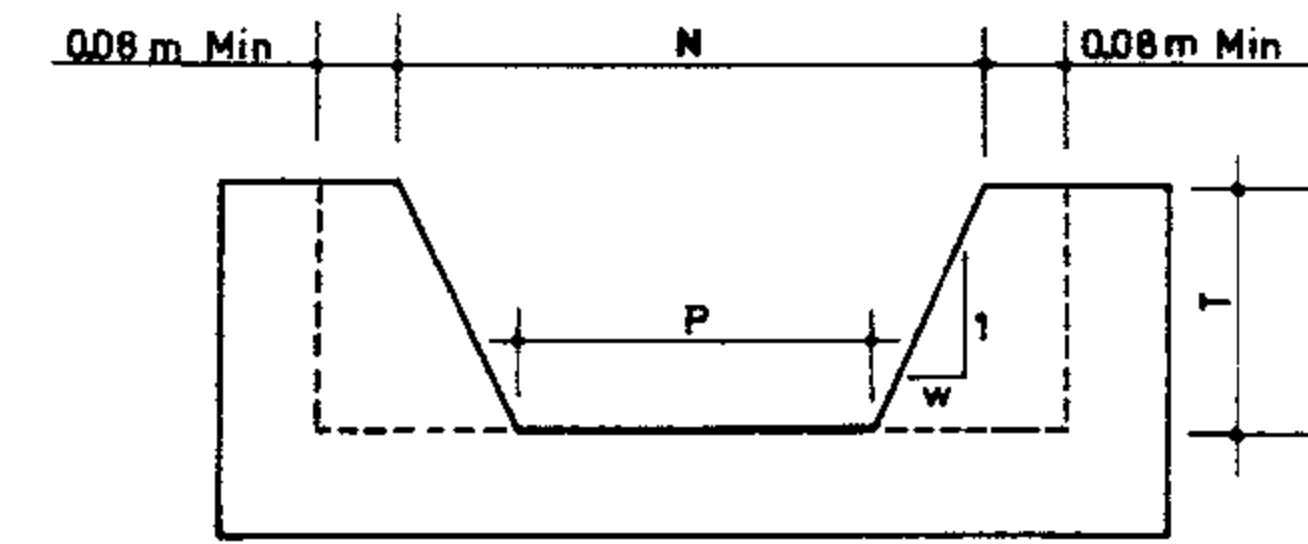

$$E_1 = y_1 + h_{v1} = 0.86 + 0.02 = 0.88 \text{ m}$$

$$0.2 \times Q_{Max} = 0.280 \text{ m}^3/\text{s}$$

$$y_2 = 0.368 \text{ m}$$

$$A_2 = 0.755 \text{ m}^2$$

$$v_2 = \frac{0.28}{A_2} = 0.371 \text{ m/s}$$

$$h_{v2} = 0.007 \text{ m}$$

$$E_2 = y_2 + h_{v2} = 0.375 \text{ m}$$

	Y (m)	A (m^2)	V (m/s)	h_v (m)	E (m)
$Q_{Max}=1.4$	0.86	2.399	0.584	0.02	0.88
$0.2Q=0.28$	0.368	0.755	0.371	0.007	0.375

STEP (2)

From graphs on dwg:

a) For $P=0.40$:

a-1) For Q_{Max} : $W=0.50$

a-2) For $0.2Q$: $W=0.75$

"The two chosen W are not the same".

b) For $P=0.50$:

b-1) For Q_{Max} : $W=0.50$

b-2) For $0.2Q$: $W=0.50$

This control notch is satisfactory as it will act as a control for all discharges between $1.4 \text{ m}^3/\text{s}$ and $0.28 \text{ m}^3/\text{s}$

STEP (3)

$$T = 0.86$$

THEN:

$$N = 0.50 + 2 \times 0.50 \times 0.86 = 1.36$$

REFERENCE DWGS: For Graphs see dwg. No 12/5/2/02
For Plan Section see dwg. No 12/5/1/01

Scale:

IRRIGATION & DRAINAGE STANDARDS

Date:



DWG No 12/5/2/01

Approved:

Sheet No 2 of 4 Rev. No



CONTROL NOTCH
(PROCESS TO SELECT)

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUD
TECHNICAL RESEARCH AND
STANDARD BUREAU

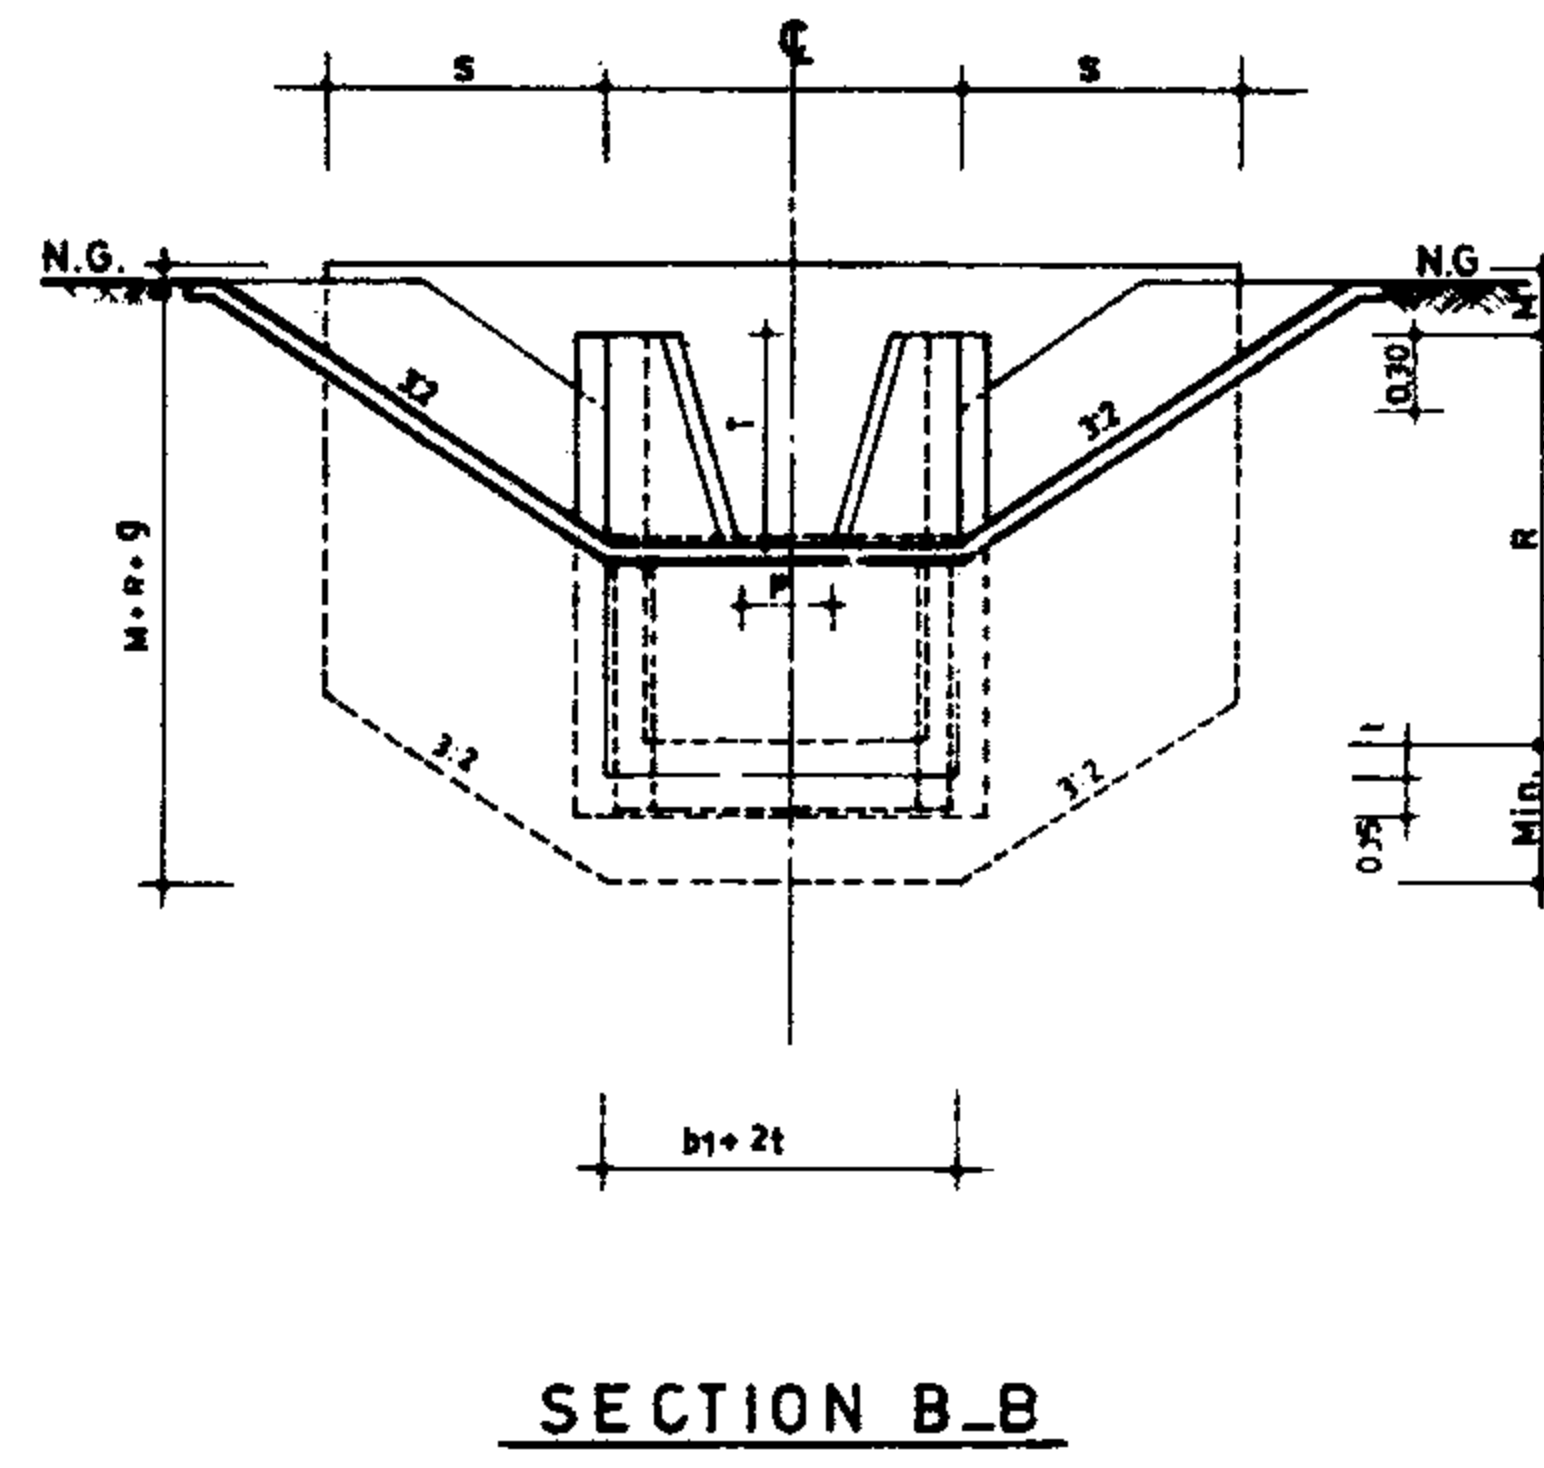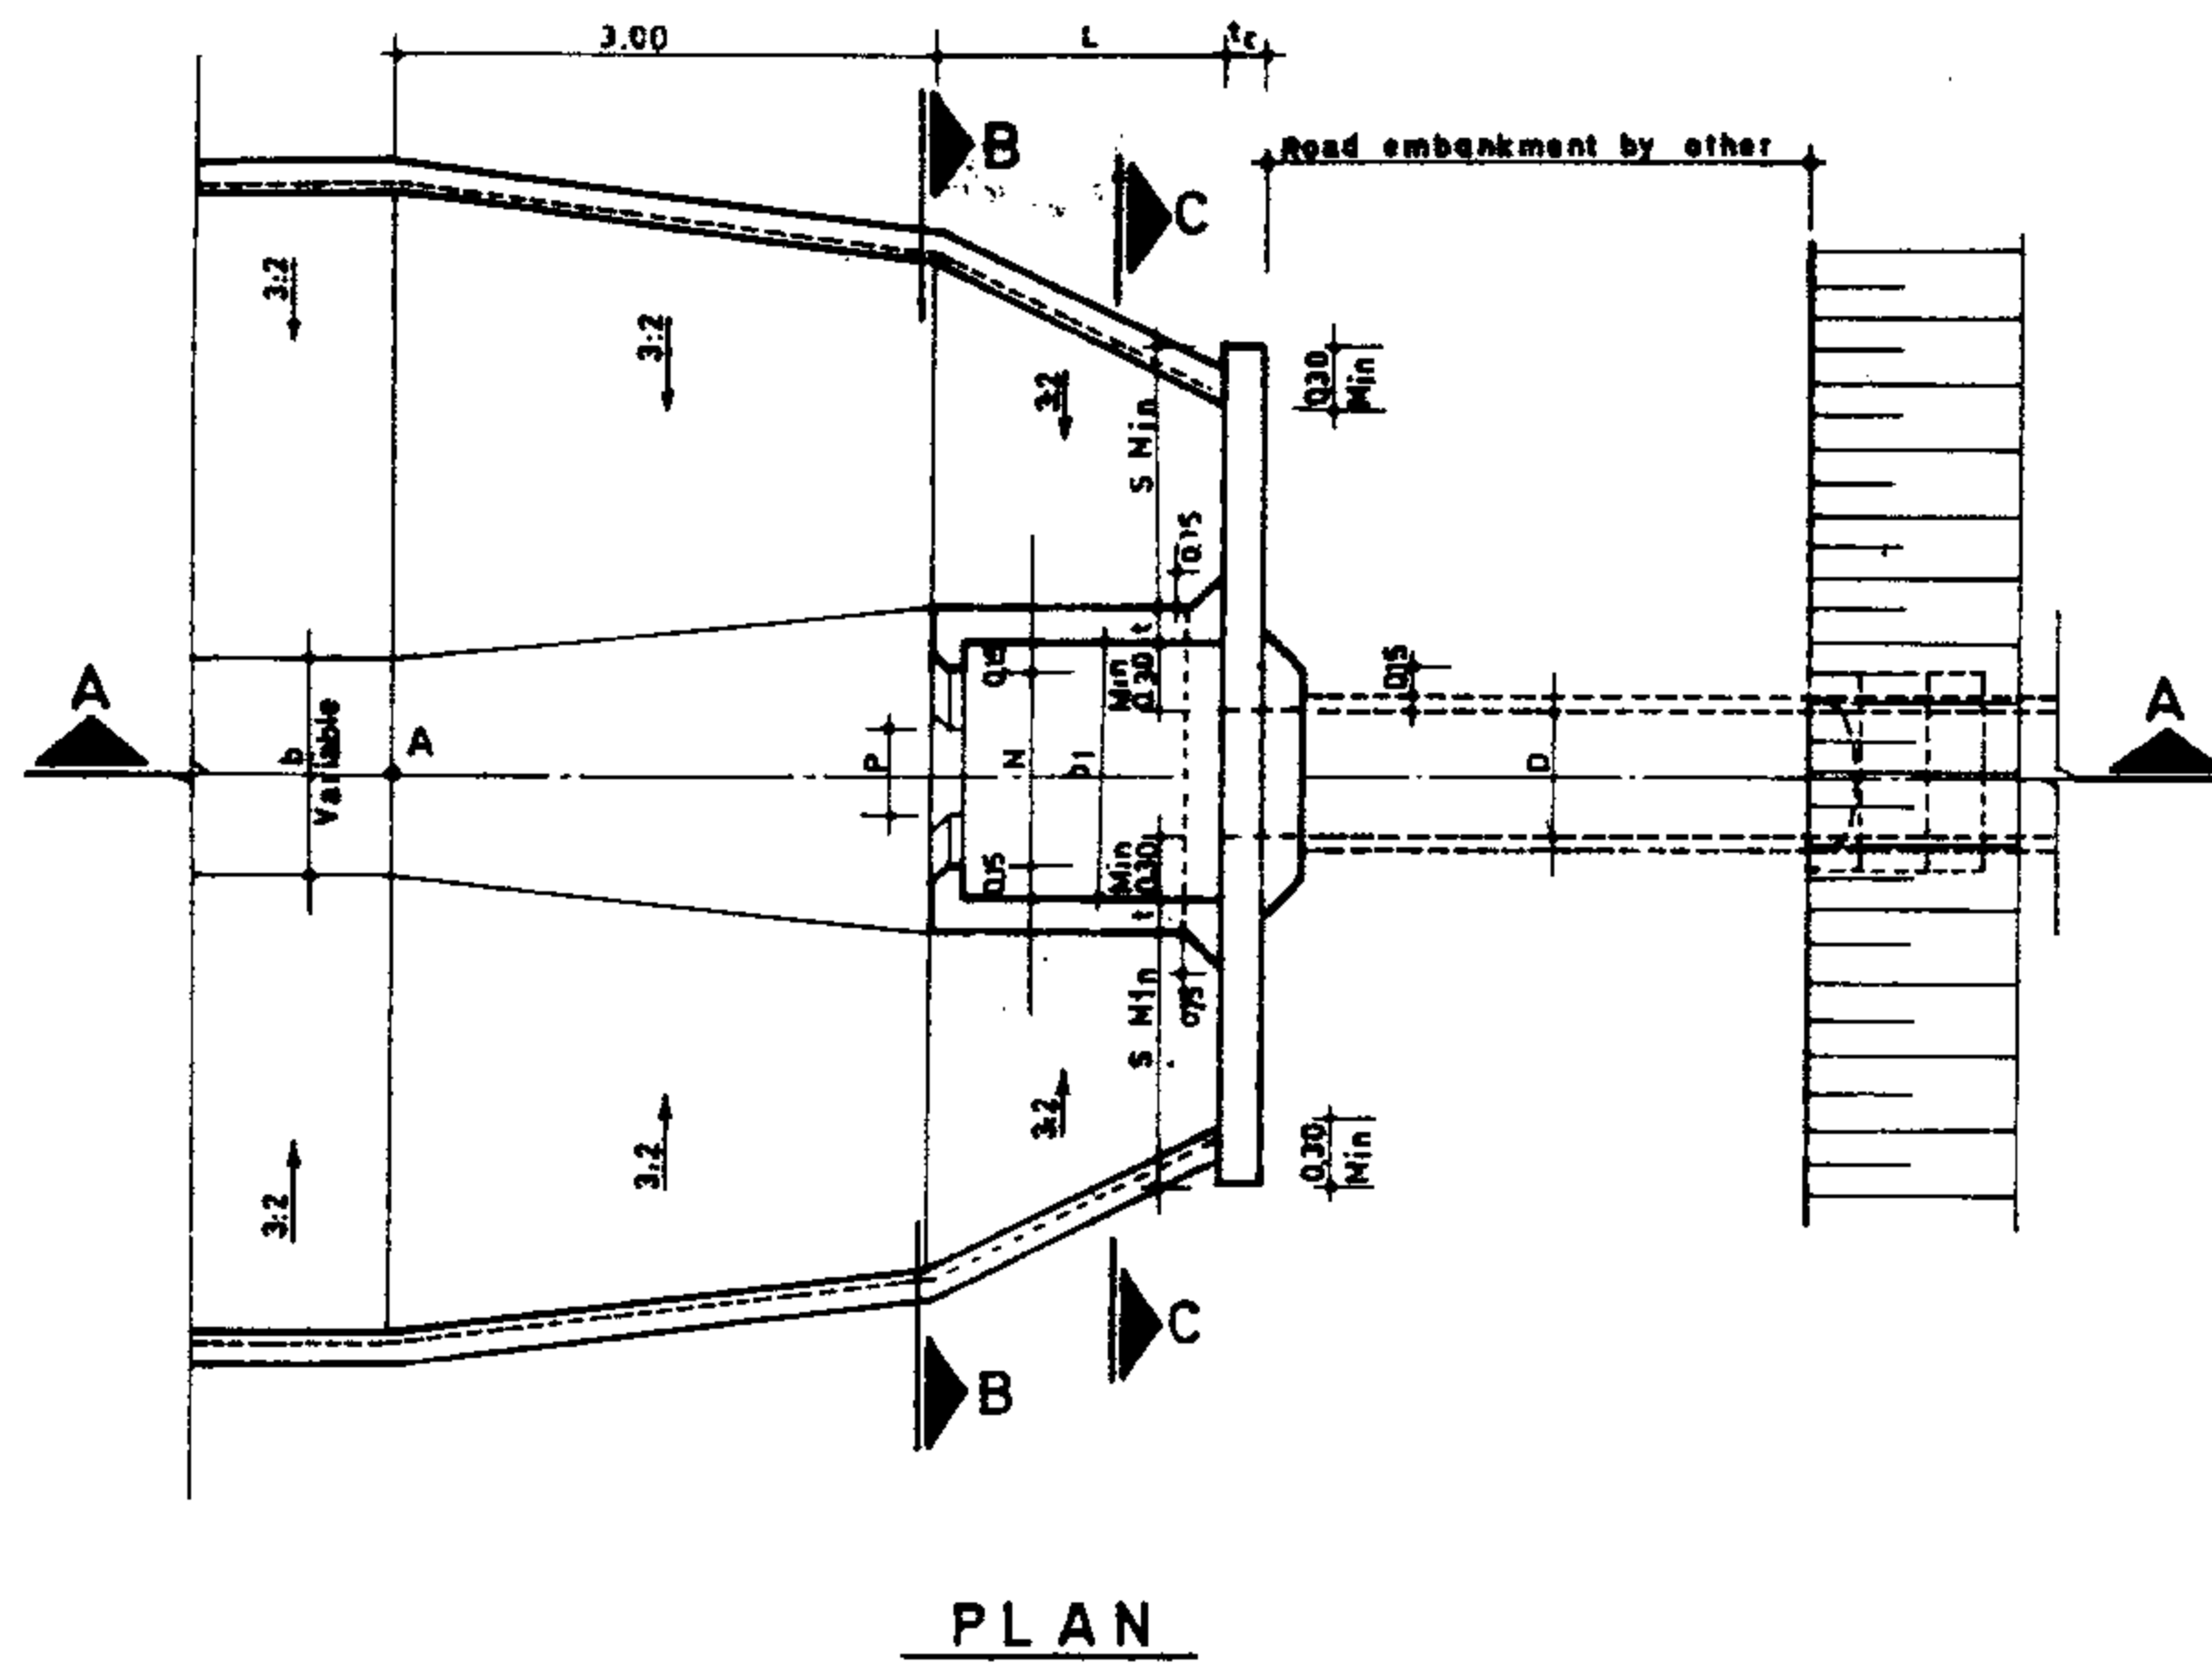

DIMENSION TABLE

Str. No.	D	R	L	t	t _c	M	S
300_1	0.30	0.80	1.10	0.15	0.15	0.30	1.20
300_2	0.30	1.50	1.10	0.15	0.15	0.30	1.20
400_1	0.40	0.80	1.10	0.15	0.15	0.30	1.20
400_2	0.40	1.50	1.10	0.15	0.15	0.30	1.20
450_1	0.45	0.80	1.10	0.15	0.15	0.30	1.20
450_2	0.45	1.55	1.10	0.18	0.15	0.30	1.20
500_1	0.50	0.90	1.10	0.15	0.15	0.30	1.20
500_2	0.50	1.60	1.25	0.18	0.20	0.30	1.20
600_1	0.60	1.00	1.10	0.15	0.15	0.30	1.20
600_2	0.60	1.70	1.40	0.18	0.20	0.30	1.20
700_1	0.70	1.10	1.10	0.15	0.15	0.40	1.30
700_2	0.70	1.80	1.70	0.18	0.20	0.40	1.30
800_1	0.80	1.20	1.10	0.15	0.15	0.45	1.45
800_2	0.80	1.90	1.85	0.18	0.20	0.45	1.45
900_1	0.90	1.30	1.25	0.15	0.15	0.45	1.45
900_2	0.90	2.00	2.00	0.18	0.20	0.45	1.45
1000_1	1.00	1.40	1.40	0.15	0.15	0.45	1.45
1000_2	1.00	2.10	2.15	0.18	0.20	0.45	1.45
1200_1	1.20	1.60	1.55	0.18	0.20	0.45	1.45
1400_1	1.40	1.80	1.80	0.18	0.20	0.45	1.45
1600_1	1.60	2.00	2.00	0.18	0.20	0.45	1.45

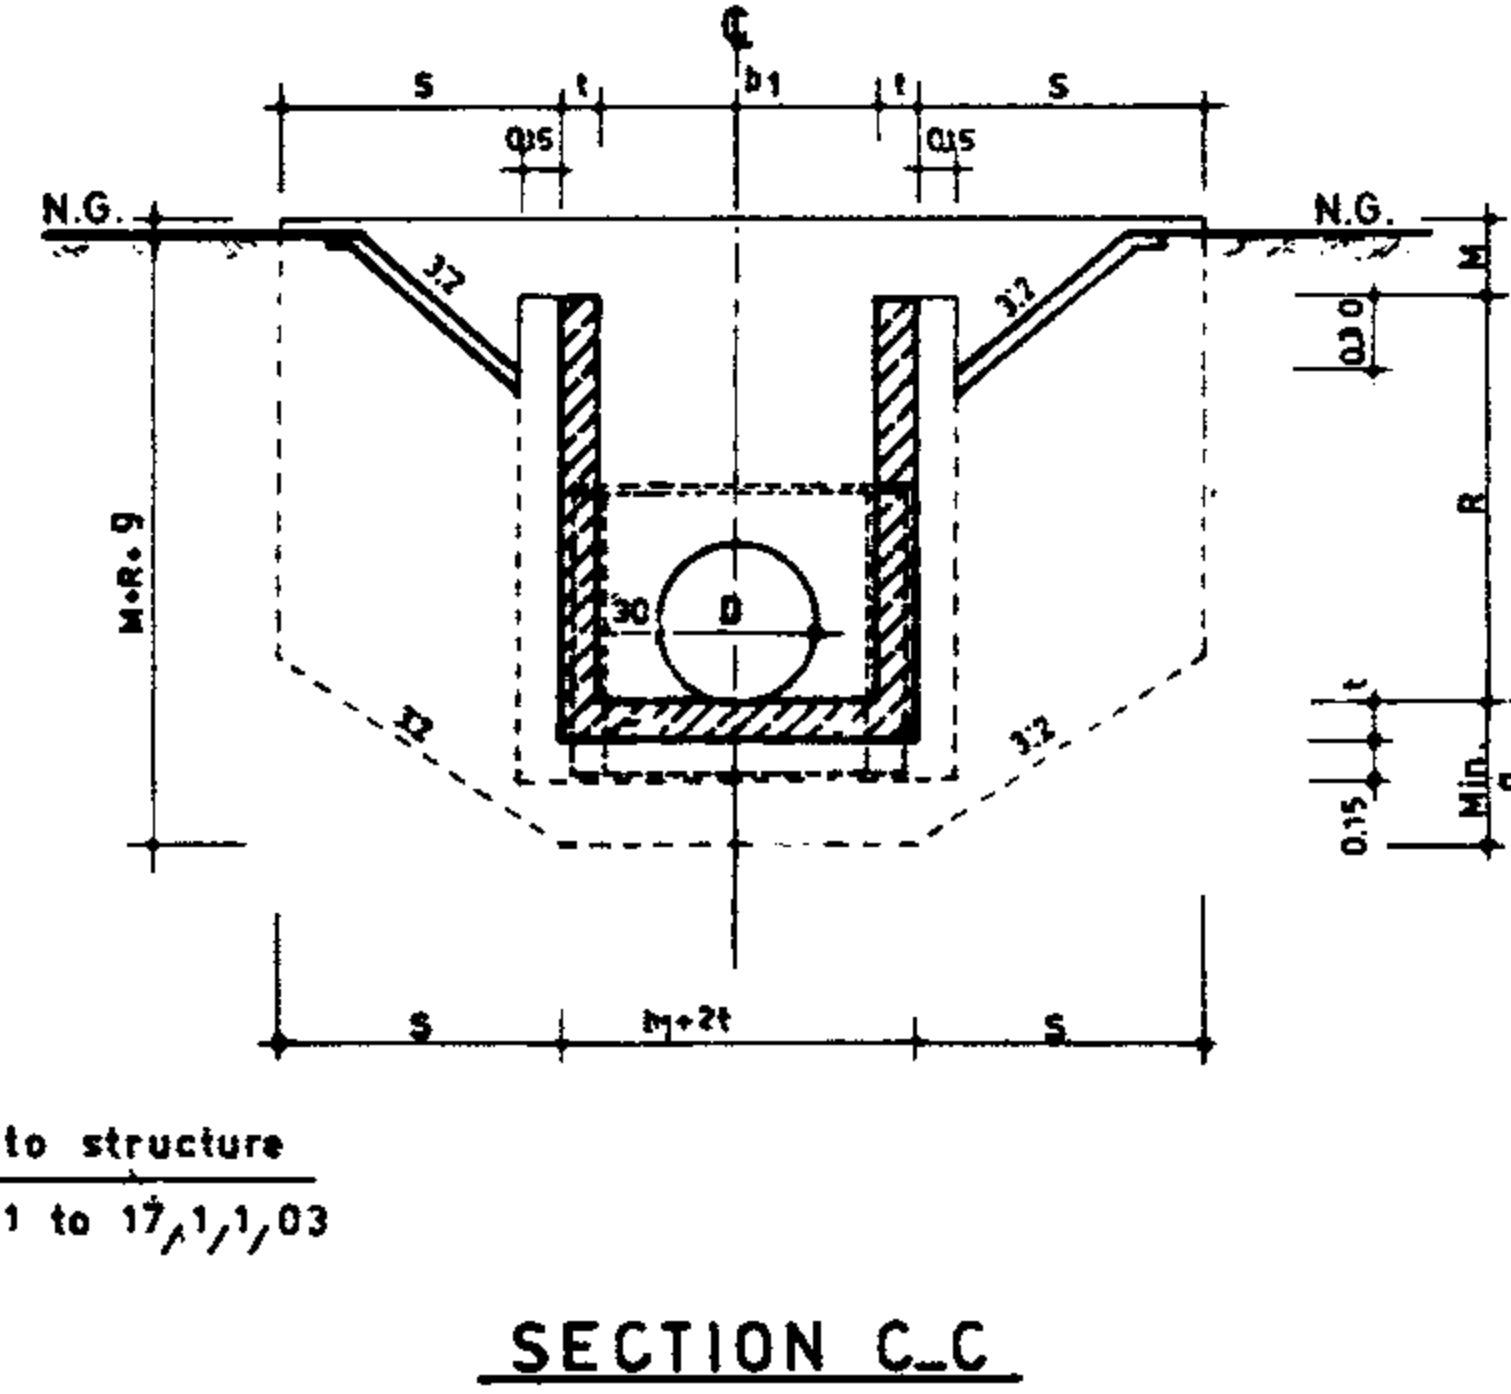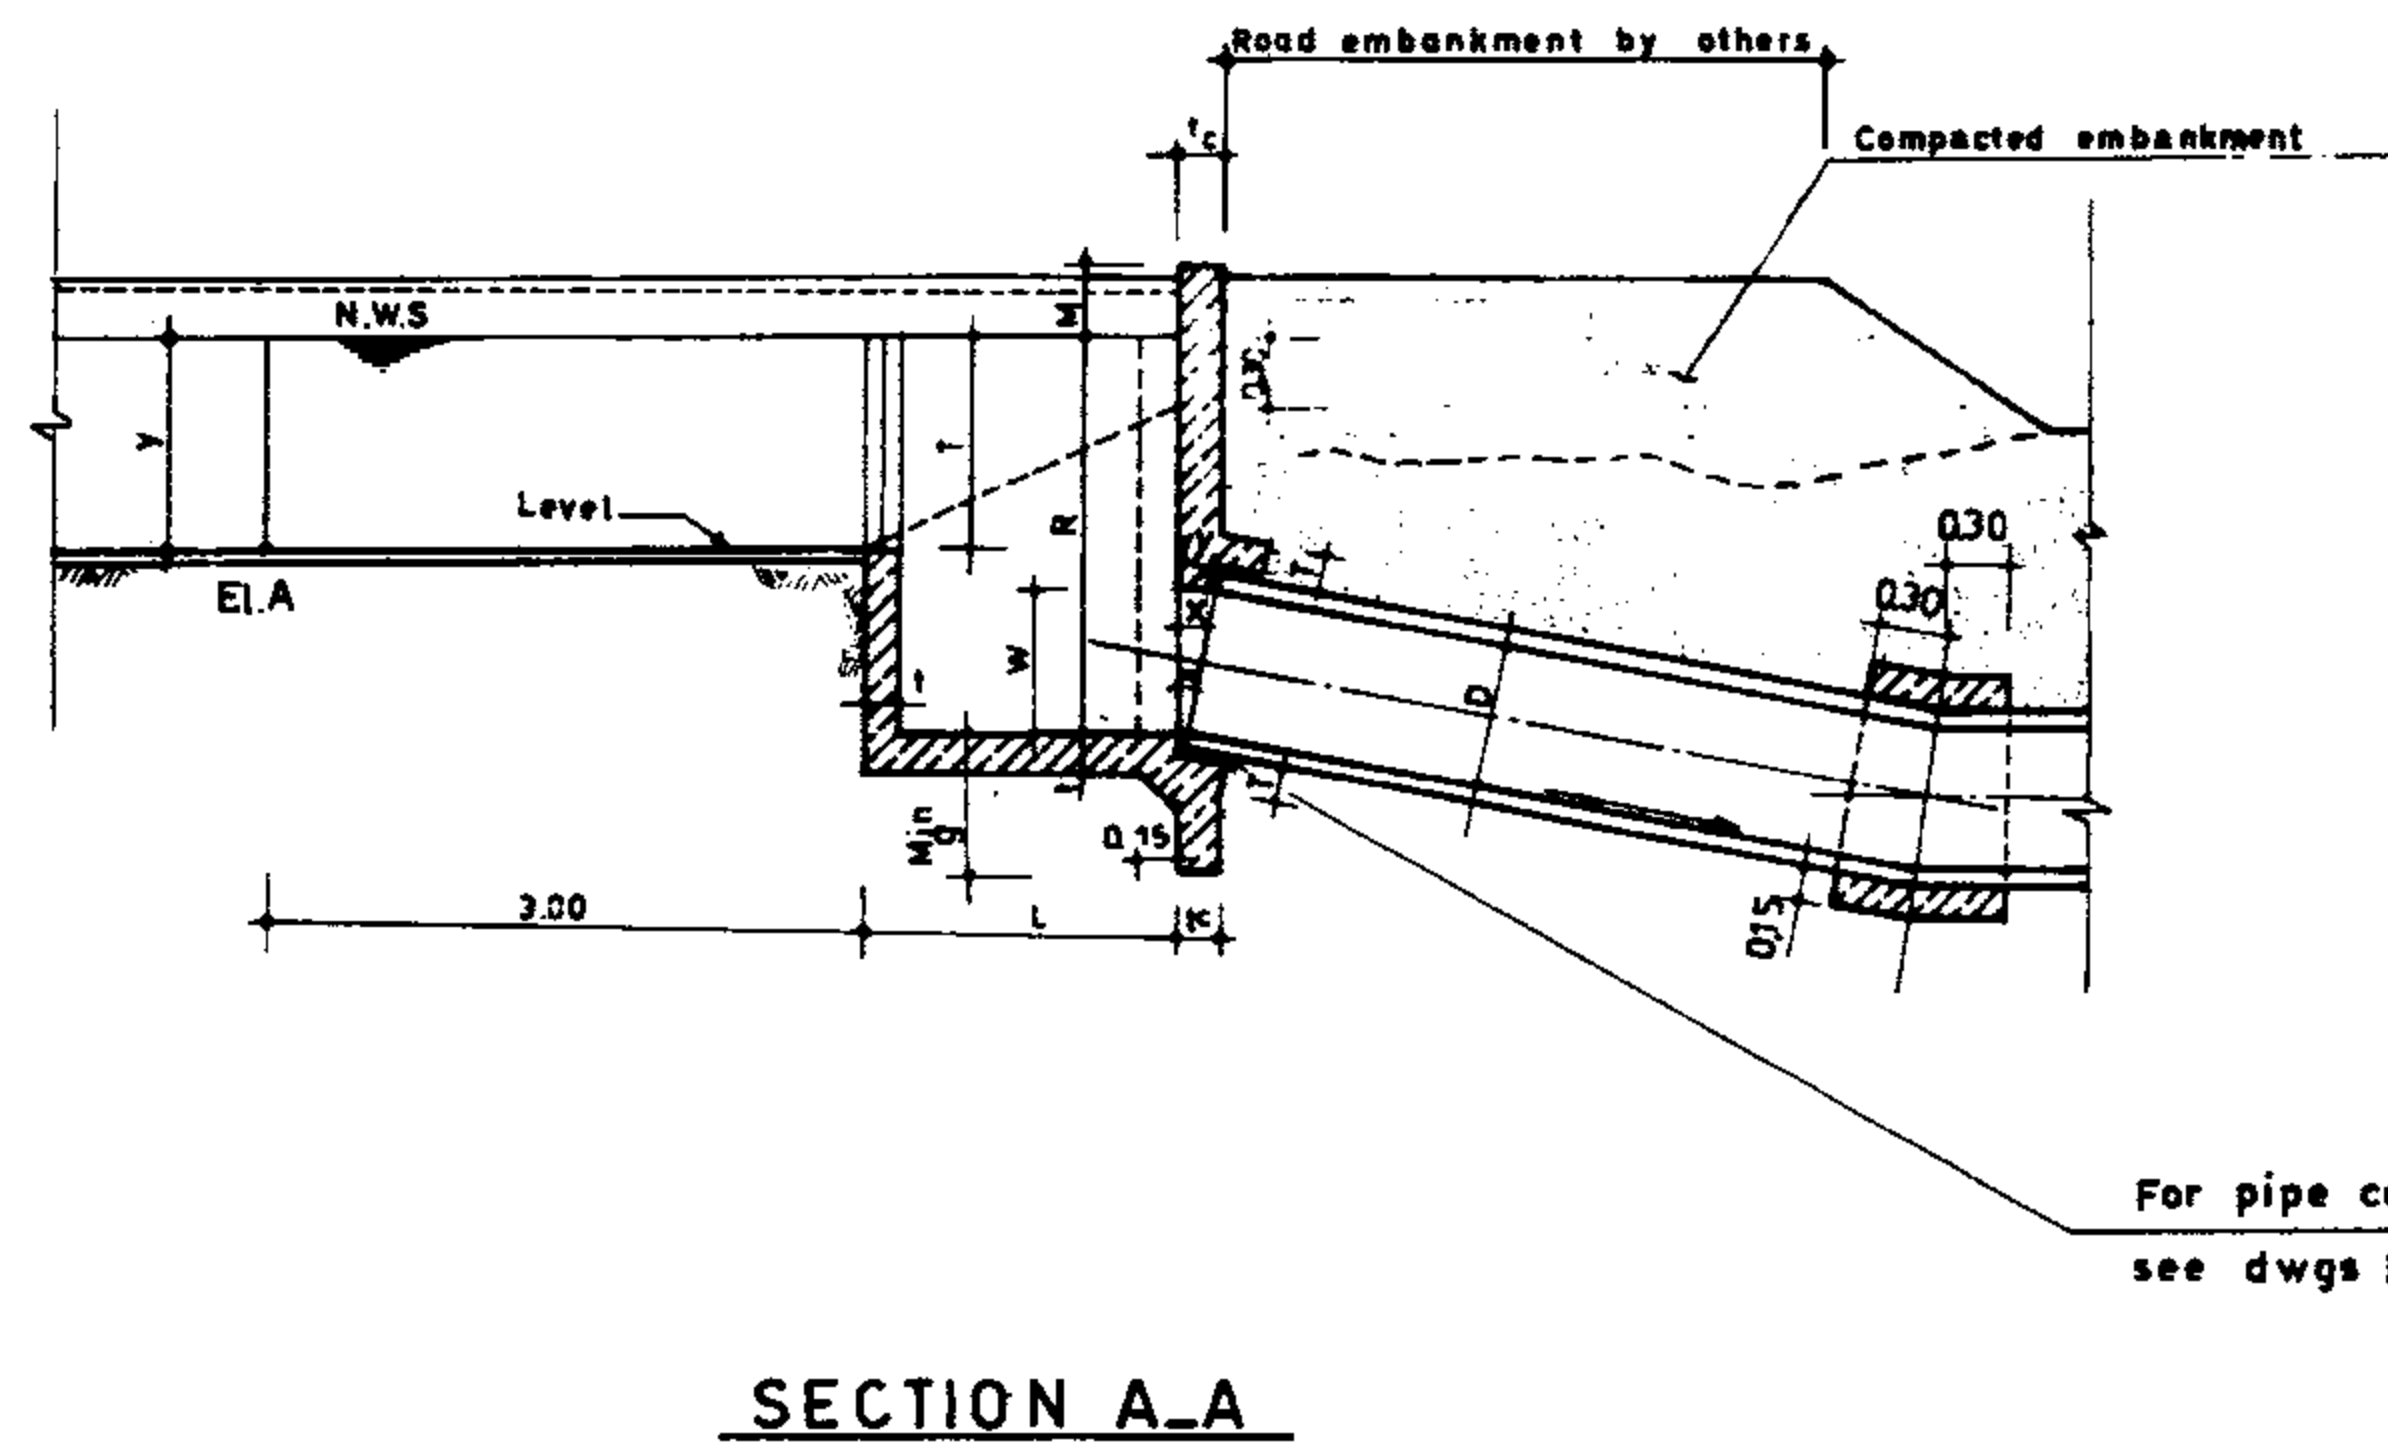

- NOTES:**
- To determine values for P, T & N proceed with step by step design procedure given in dwg. No 12/5/2/01, and dwg No 12/5/2/02
Side slope of notch is shown on dwg. No. 12/5/2/01
 - For pipe diameter selection see dwg. No. 11/6/1/01 or dwgs. 11/3/1/01 to 11/3/2/18 or dwgs. 11/2/1/01 to 11/2/2/09
 - For determining inlet Box width
set $b_1 = N + 0.30$
and $b_1 = D + 0.60$
and chose the greater value.







For pipe connection to structure
see dwgs No 17/1/1/01 to 17/1/1/03

REFERENCE DWGS:
 For process to select control notch see dwg. No. 12/5/2/01
 For graphs see dwg. No. 12/5/2/02
 For type of reinforcement see dwg. No. 12/5/3/01
 For detail of pipe connection to structure see dwgs. No. 17/1/1/01 TO 17/1/1/03

Scale: N.T.S	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. No 12/5/1/01	CONTROL NOTCH
Approved:	Sheet No. 1 of 4	(PLAN & SECTION)

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

0.1 0.2 0.3

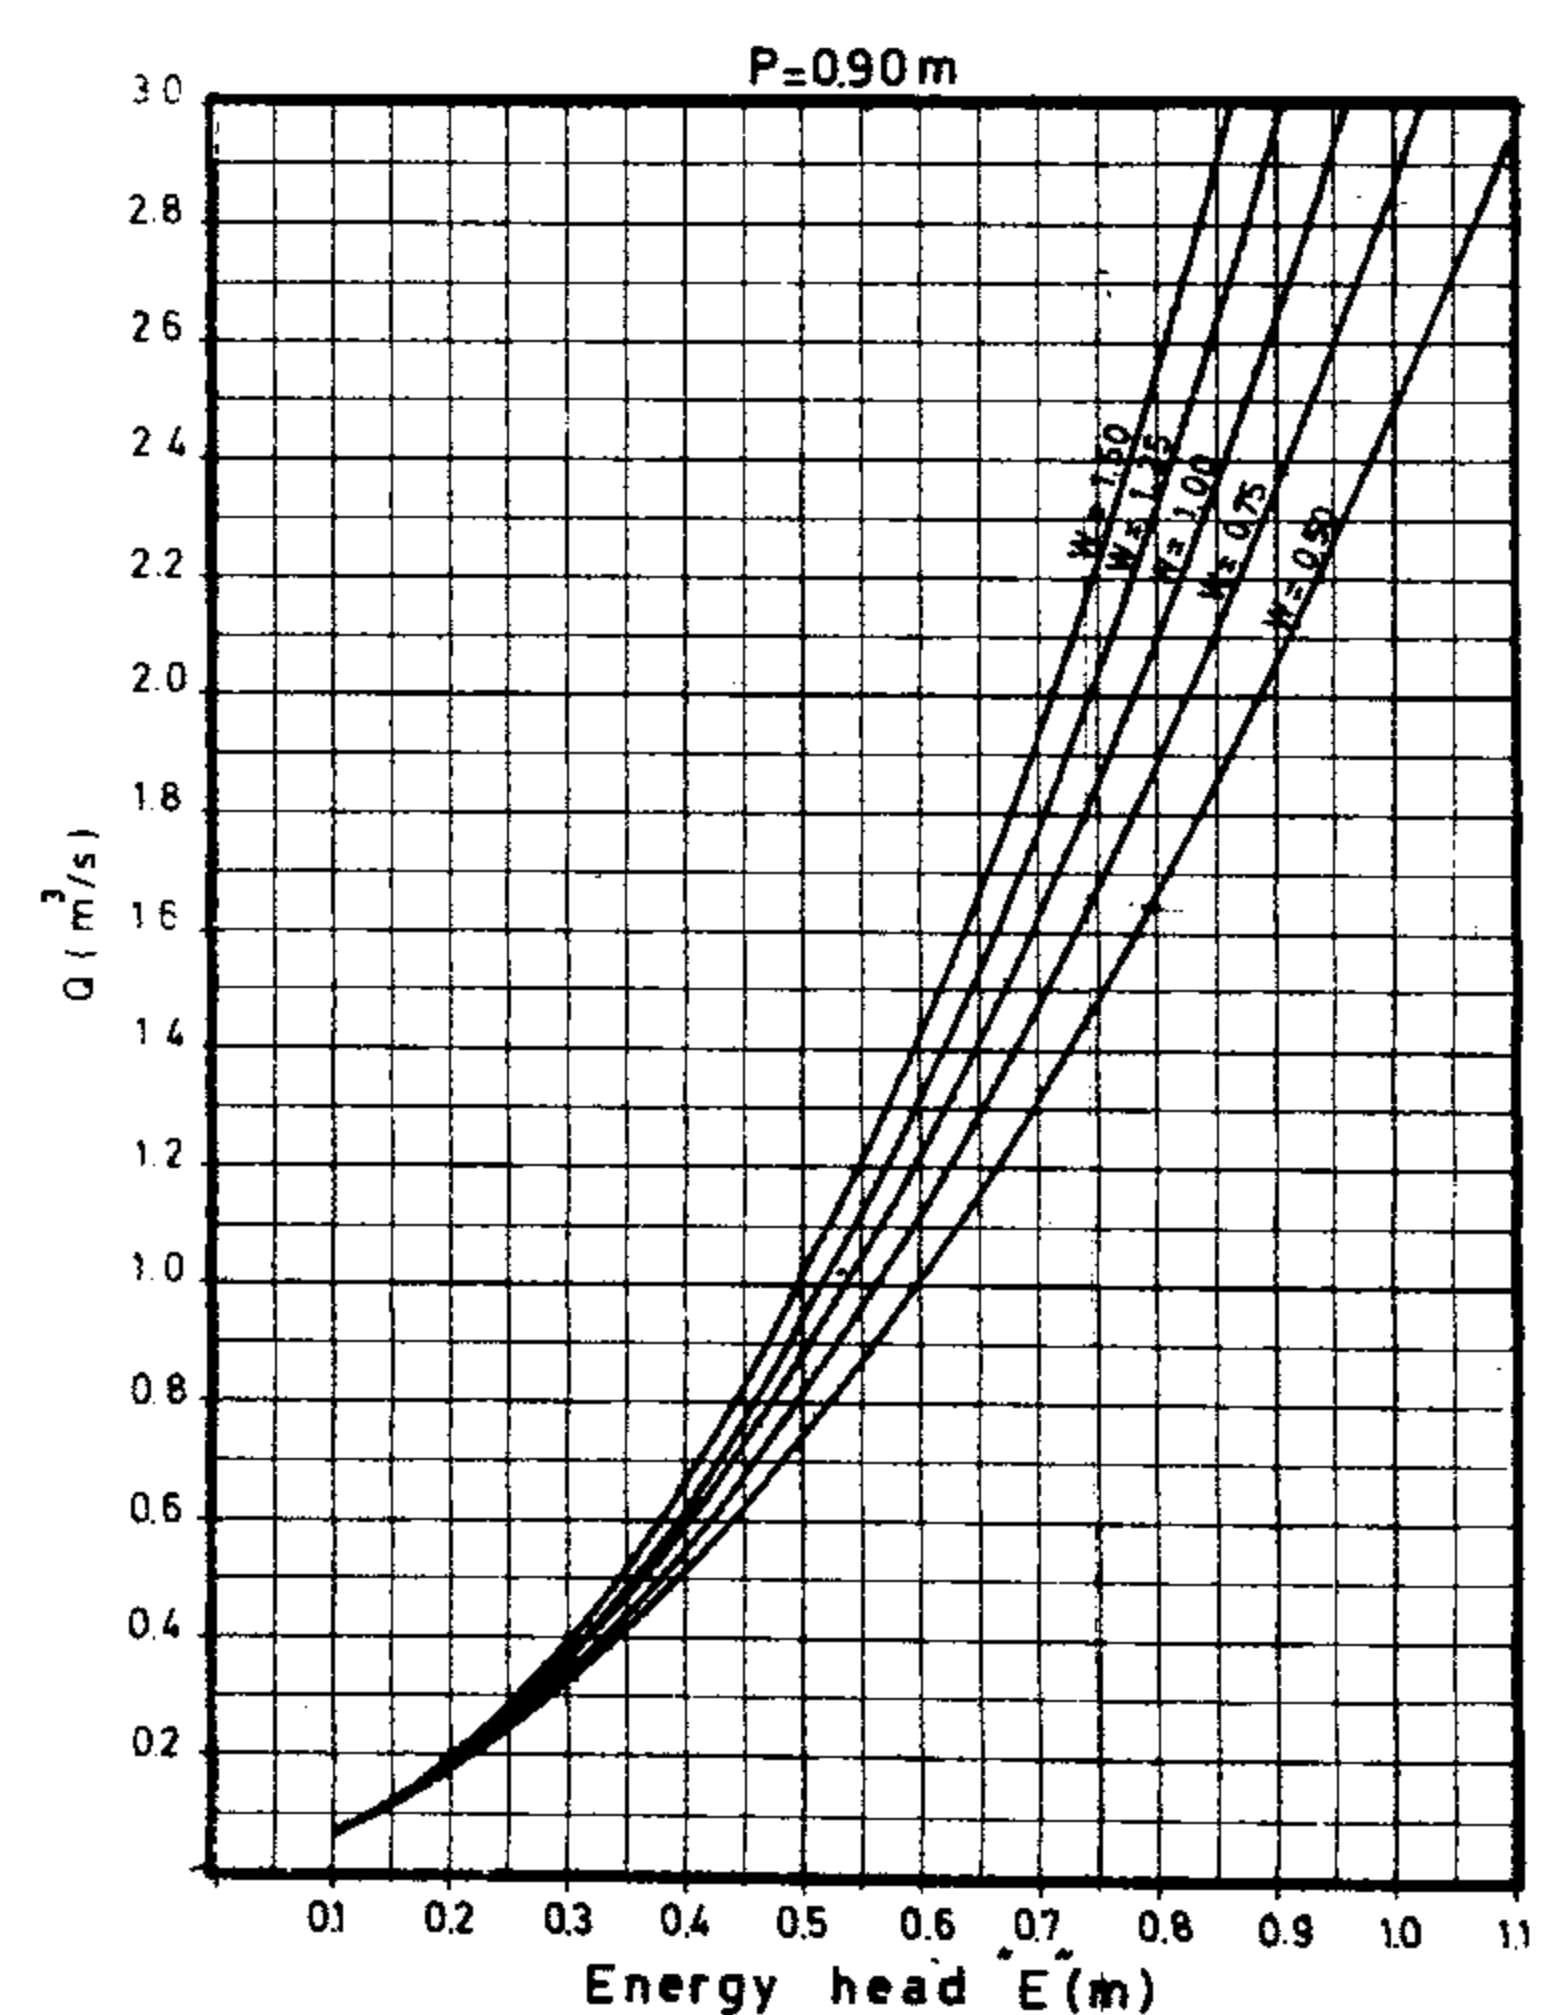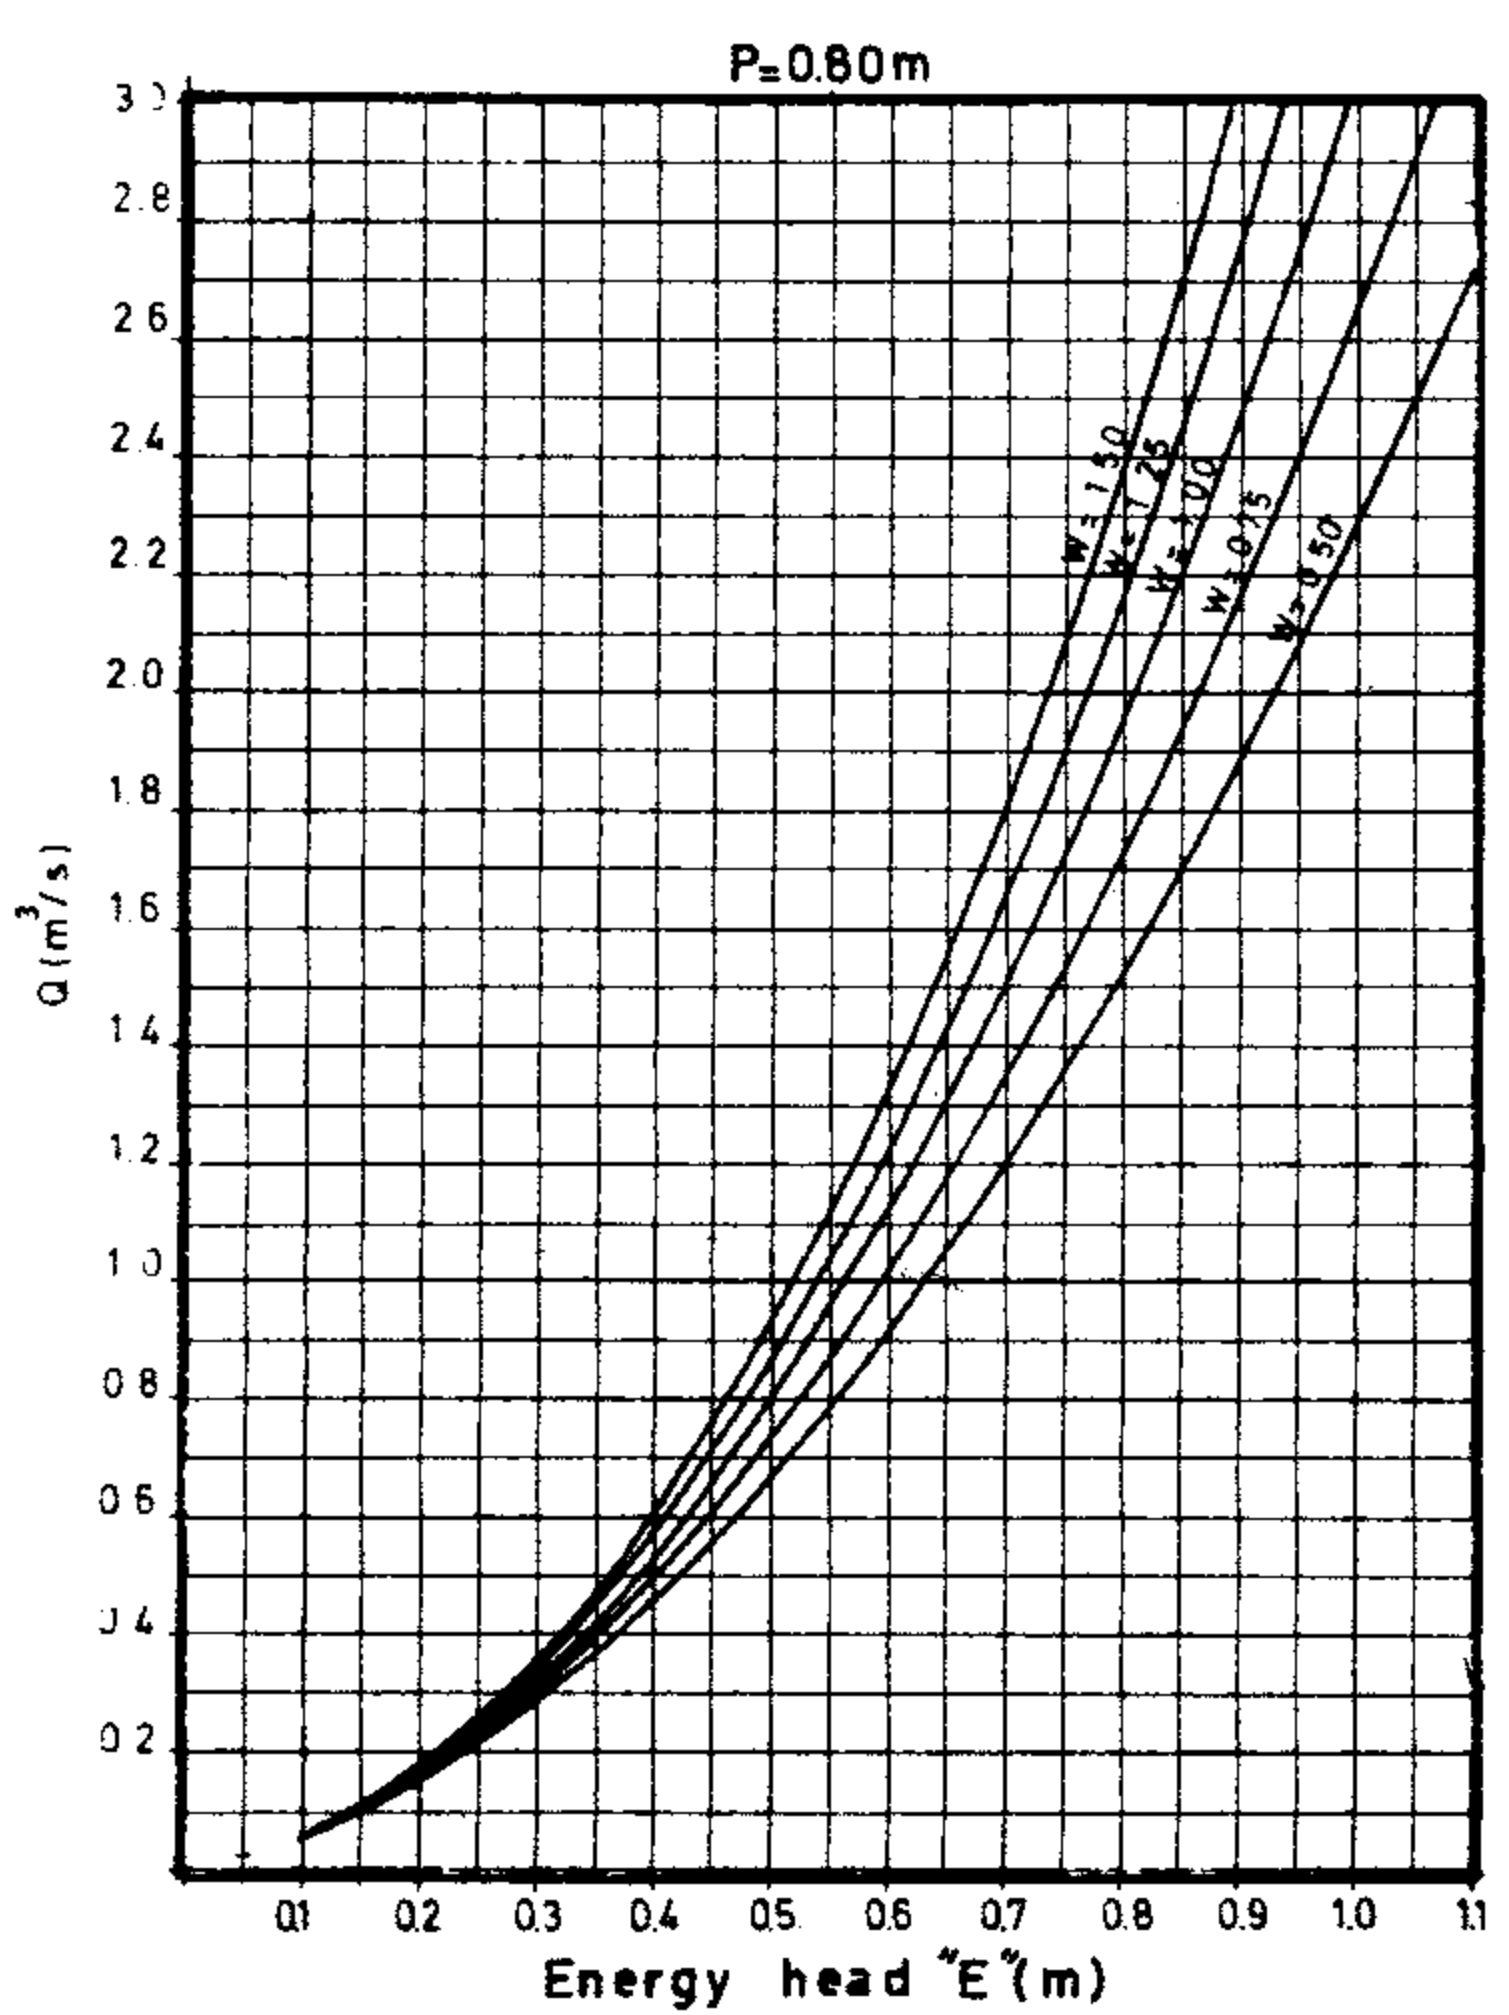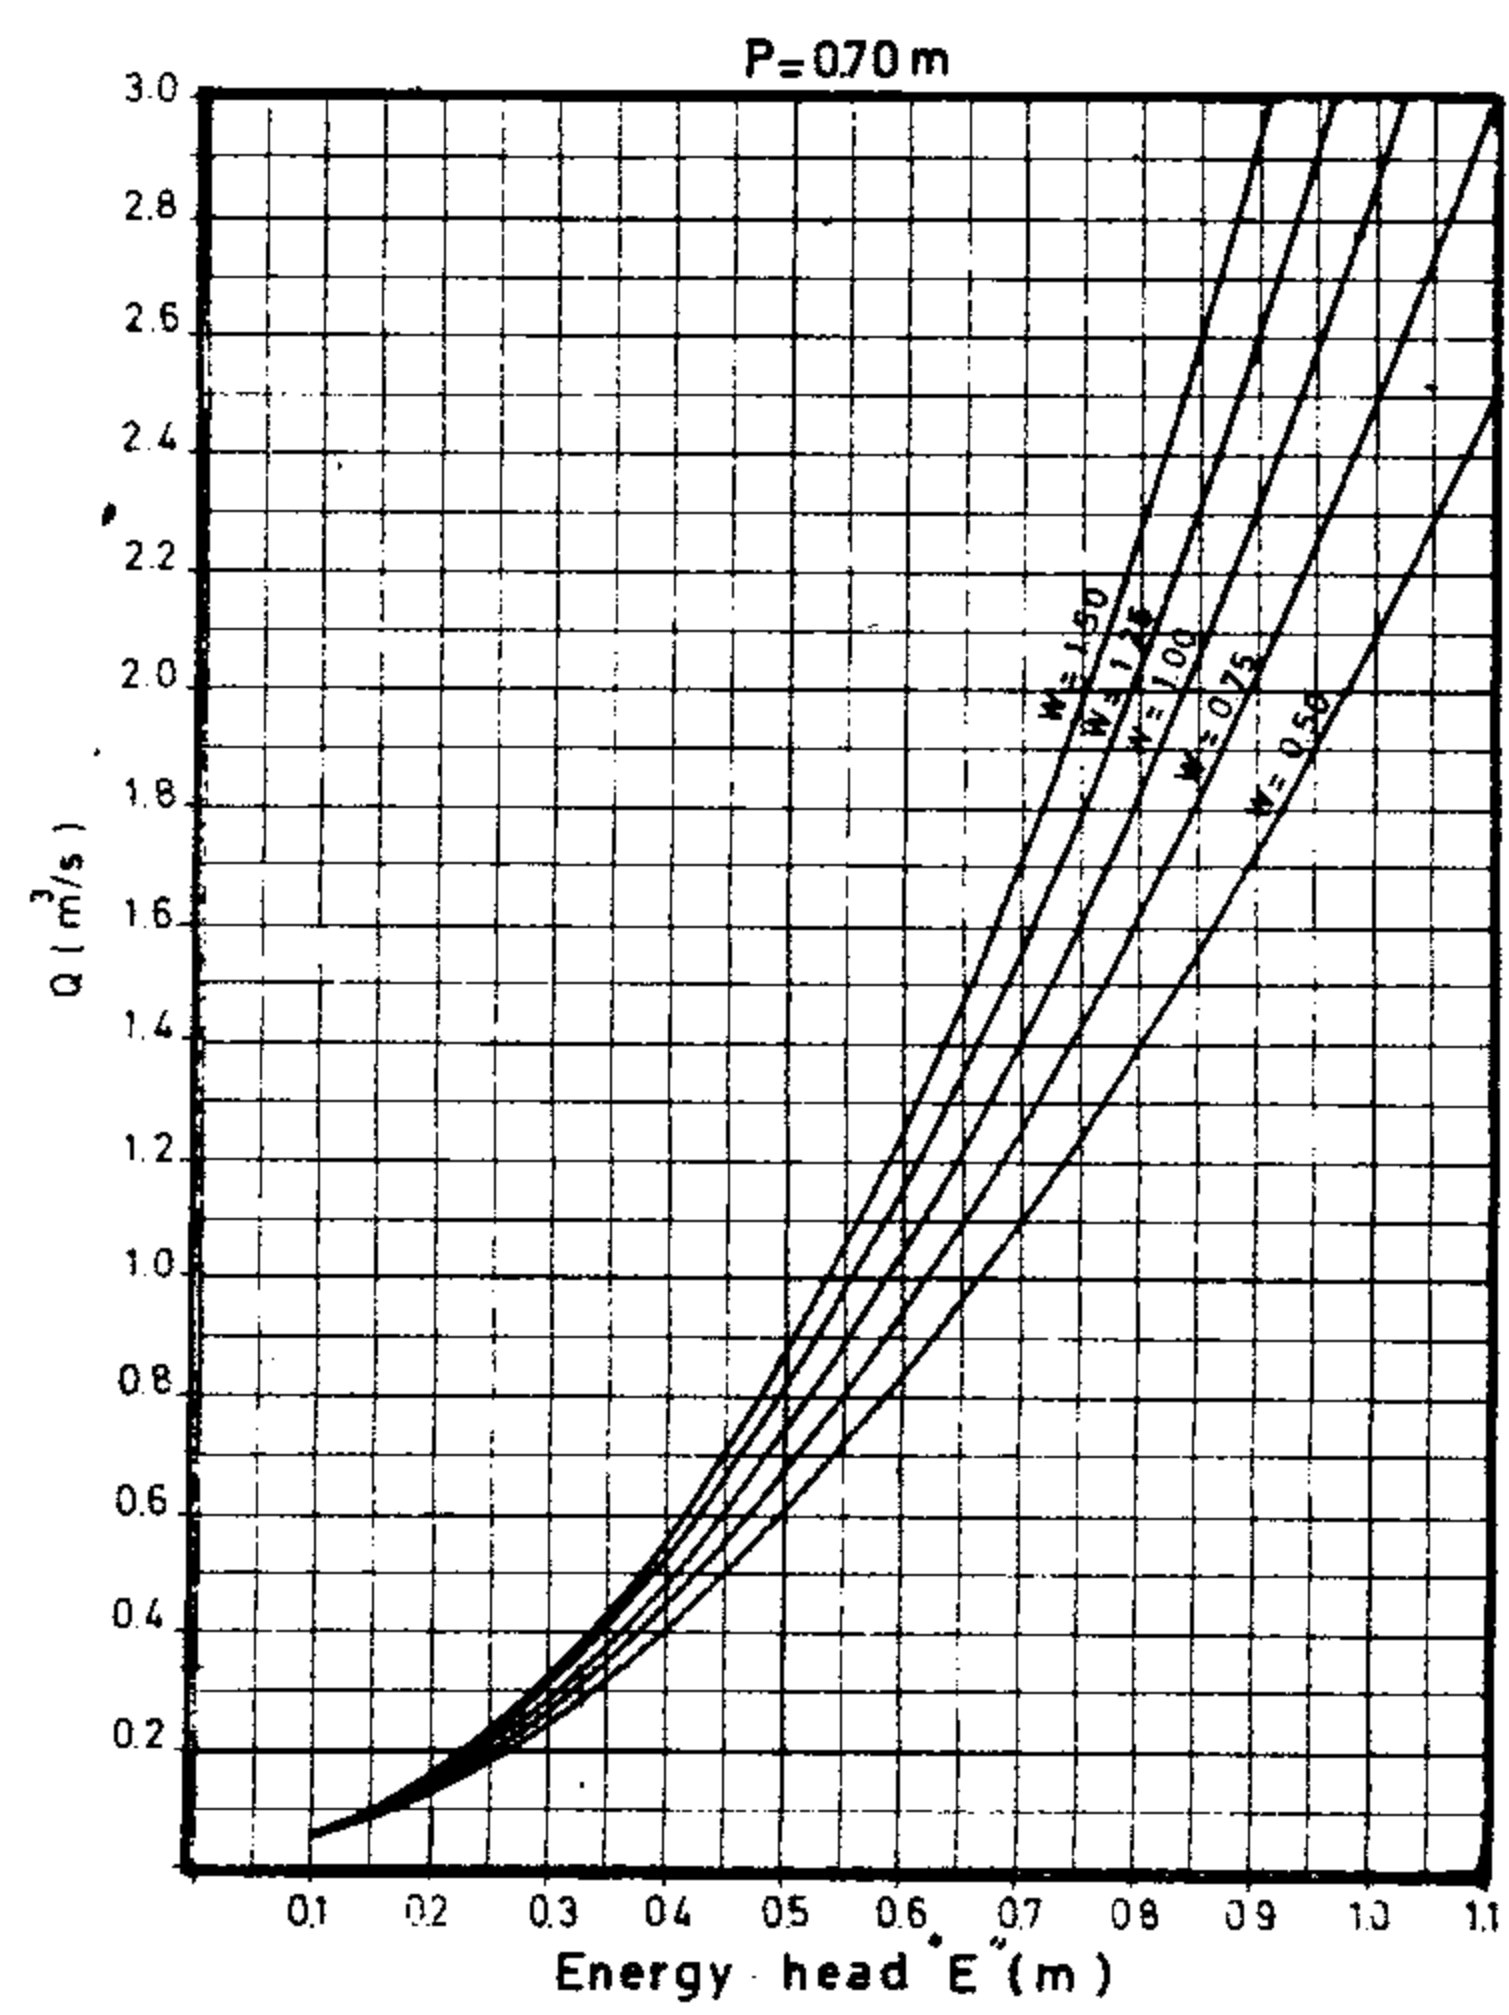
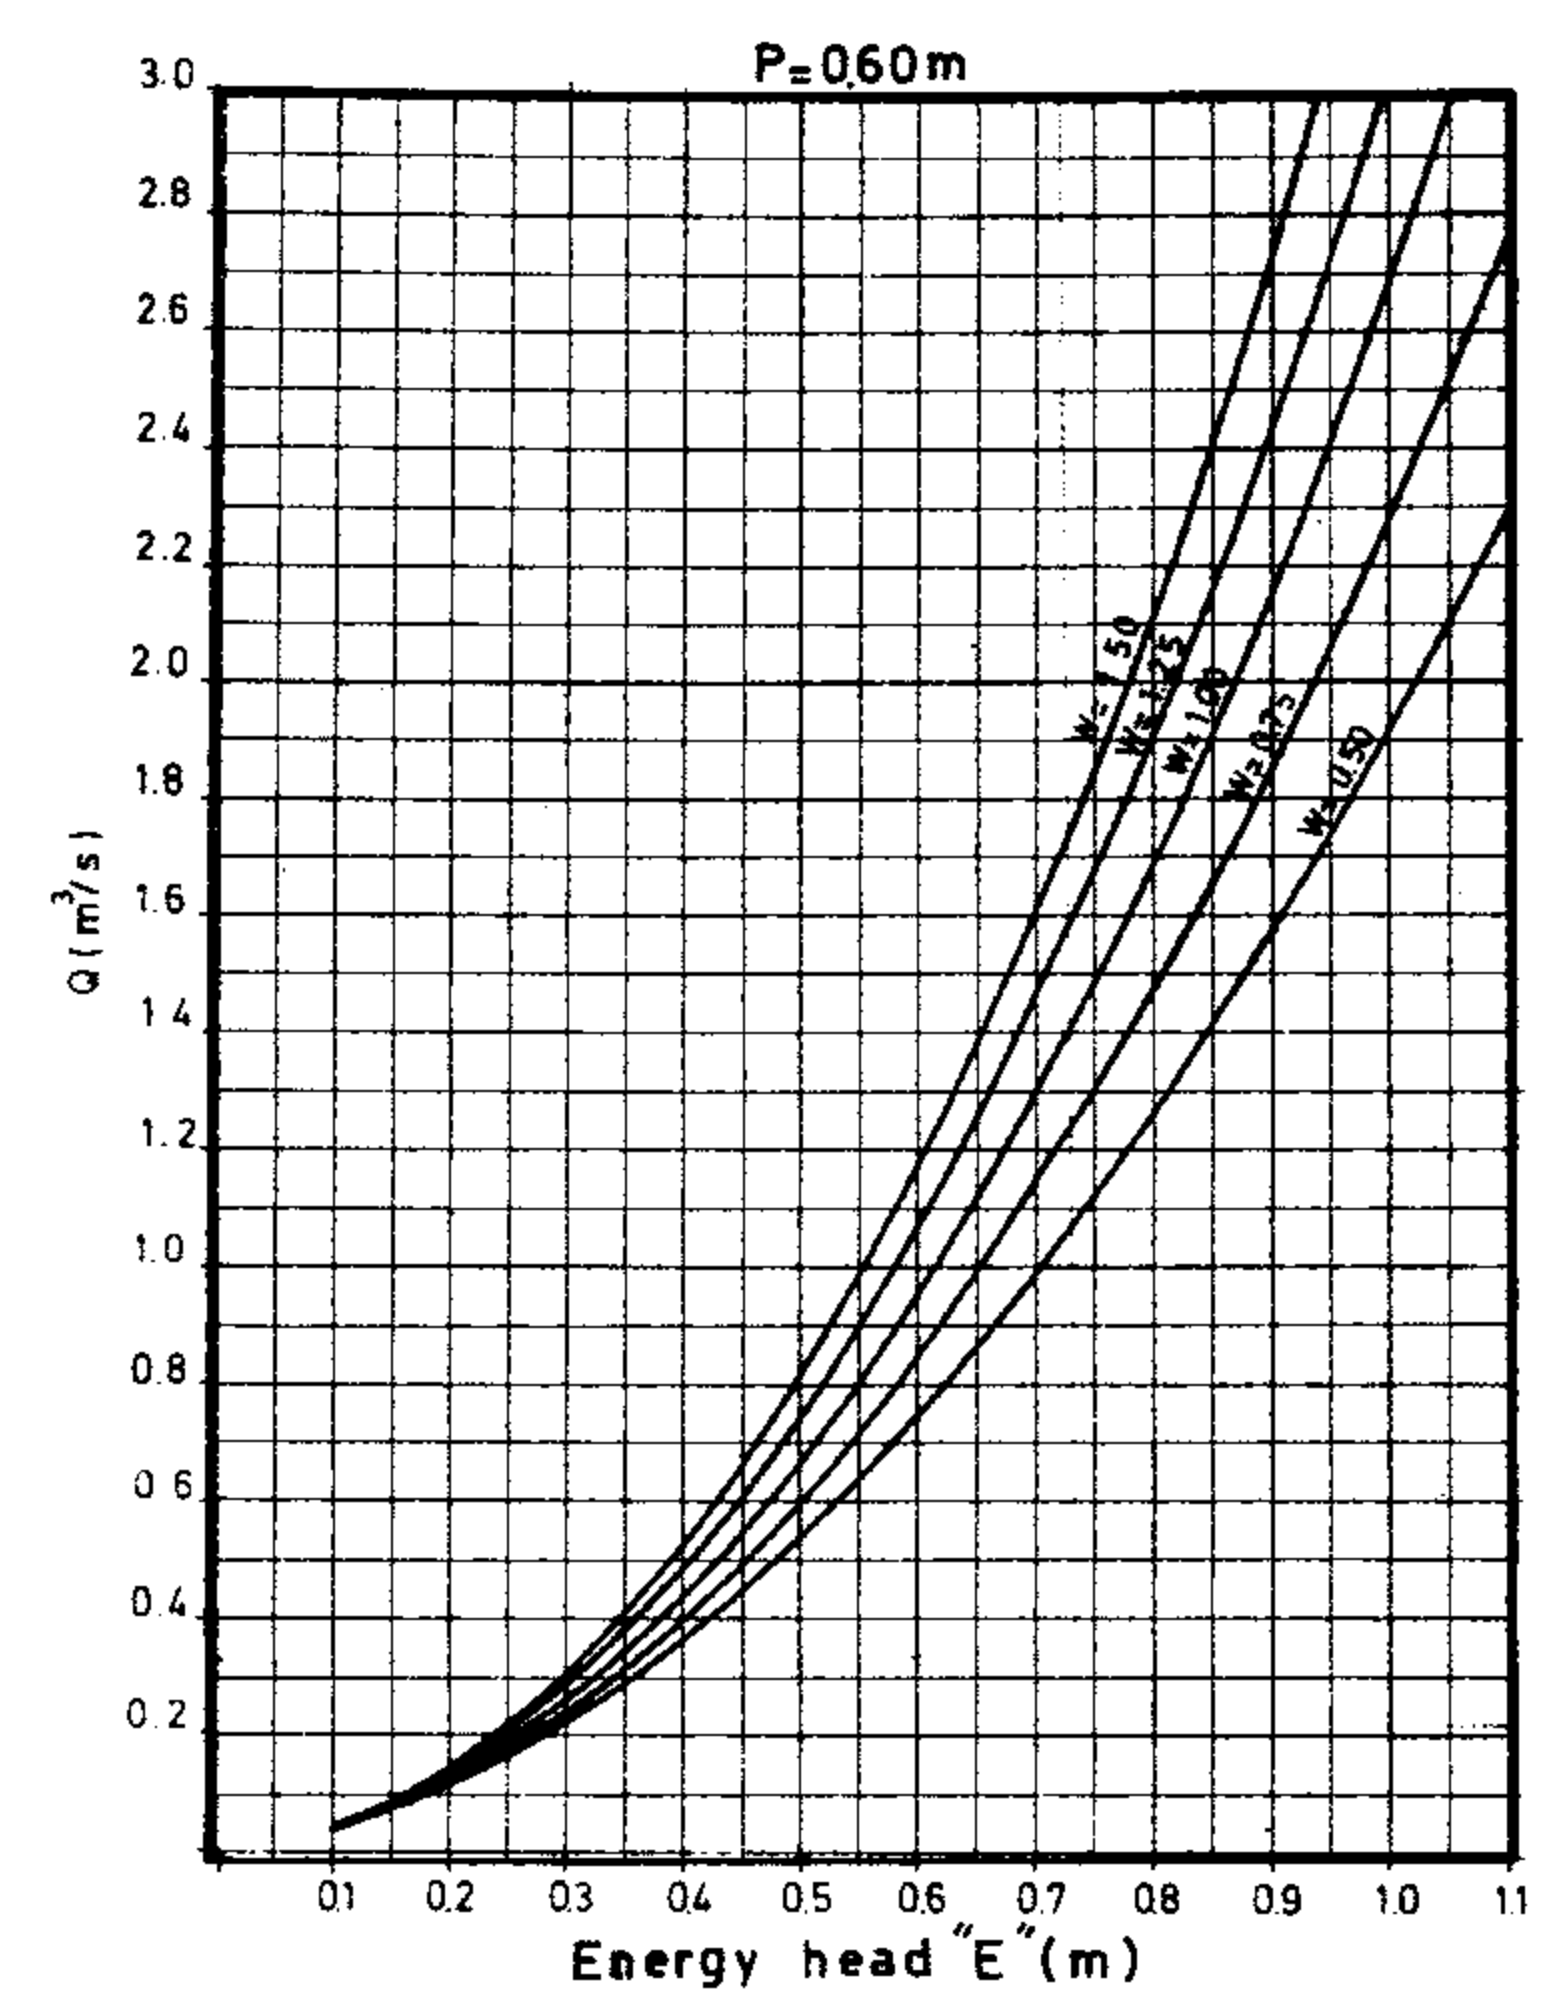
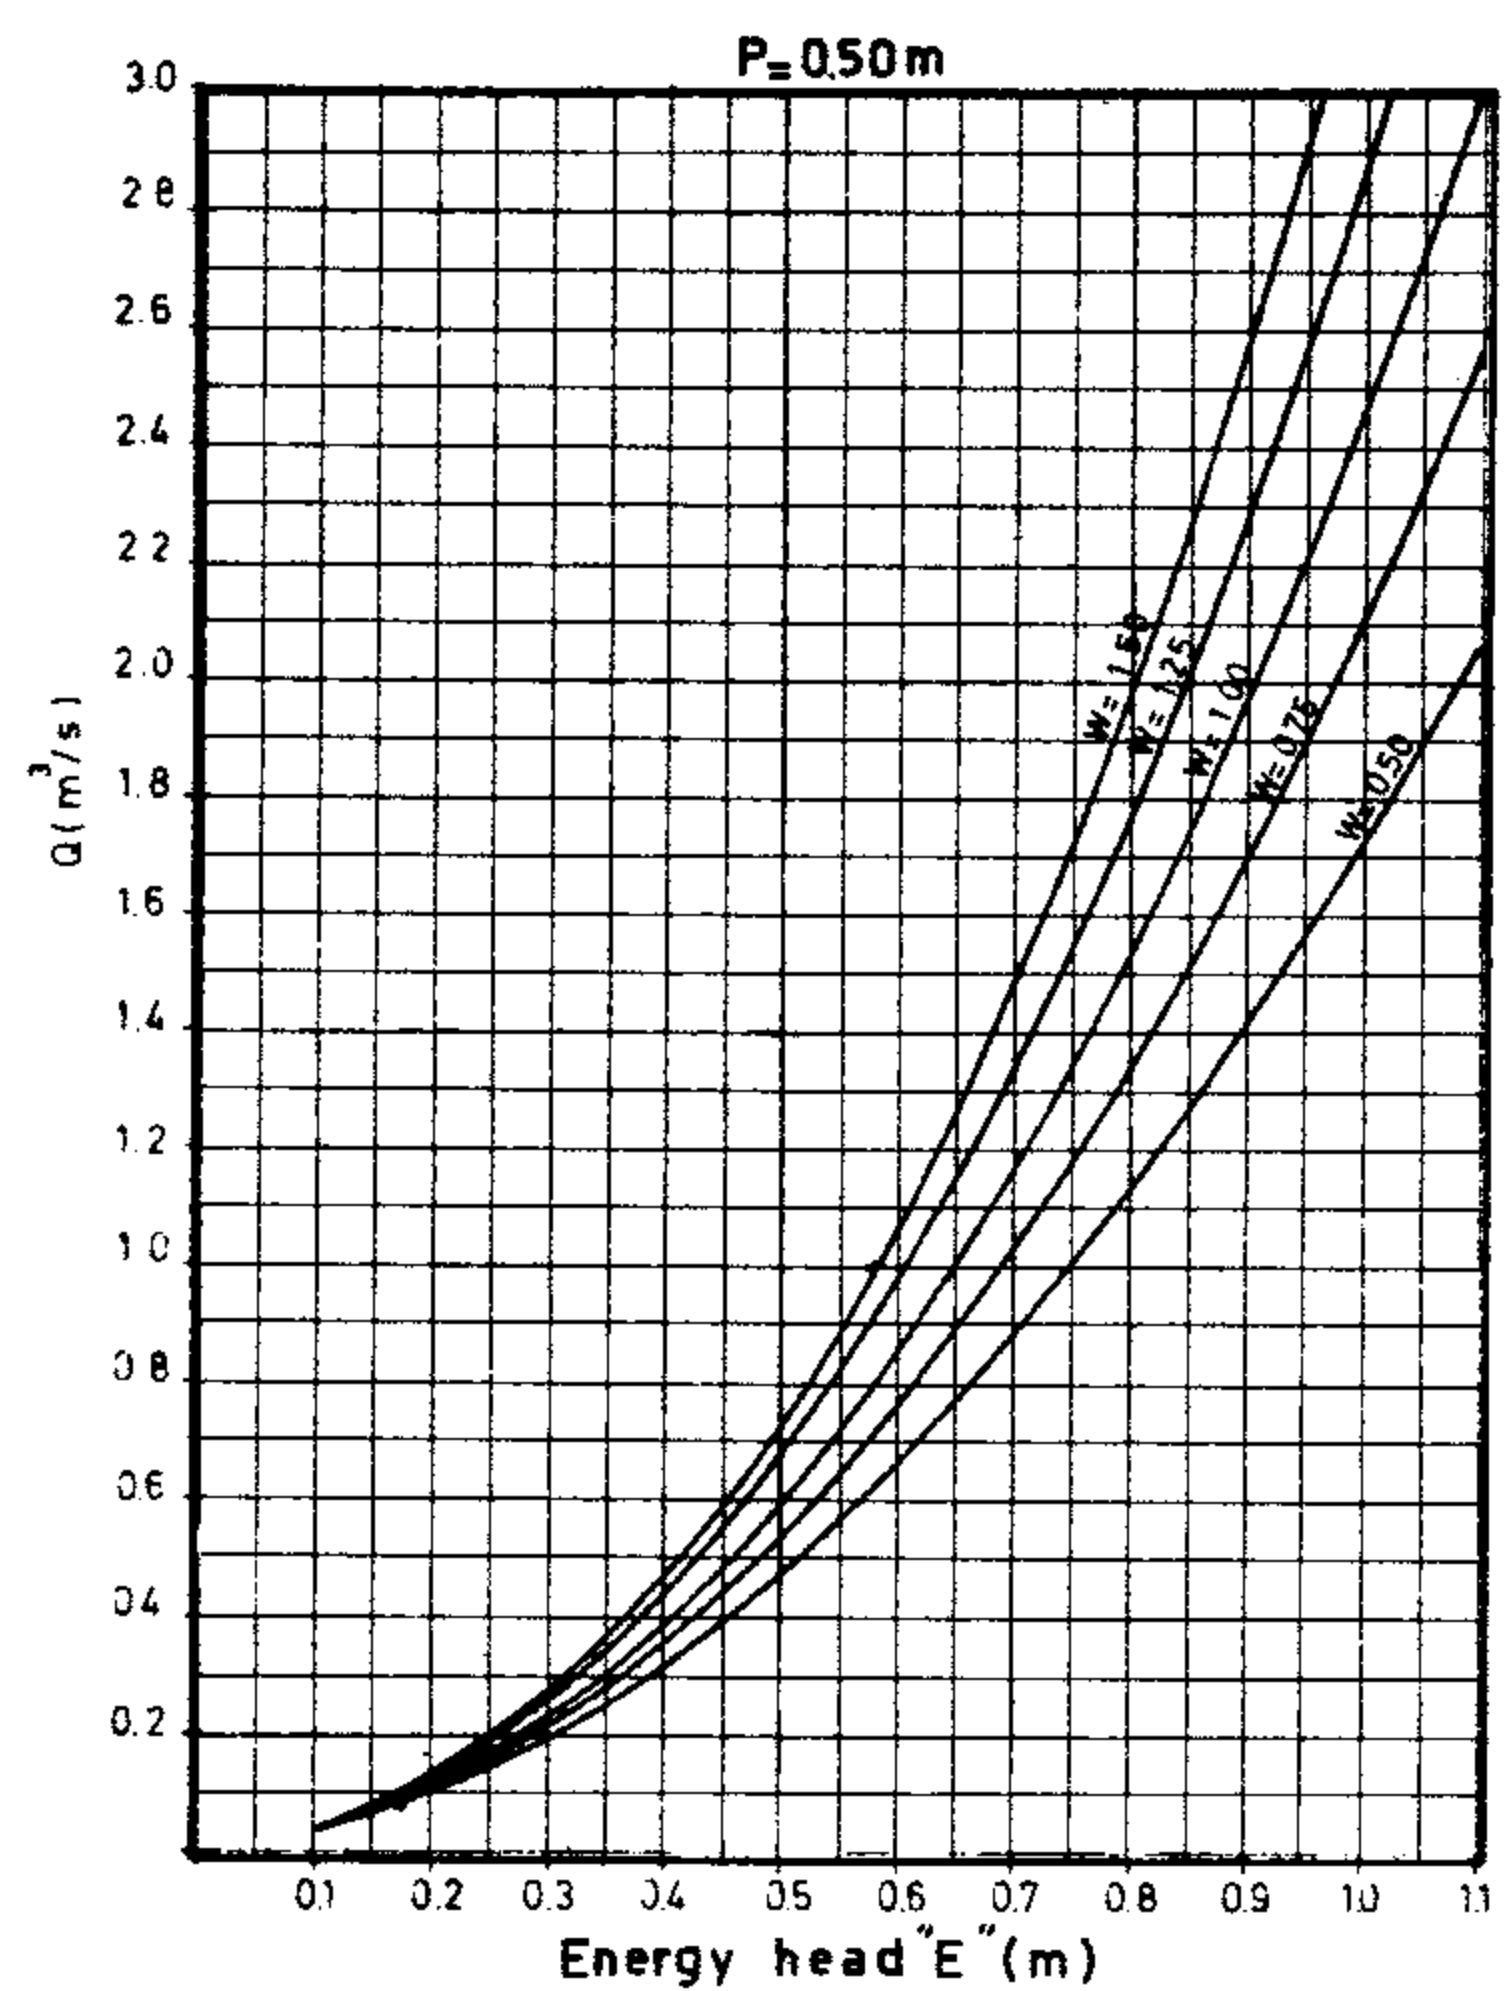
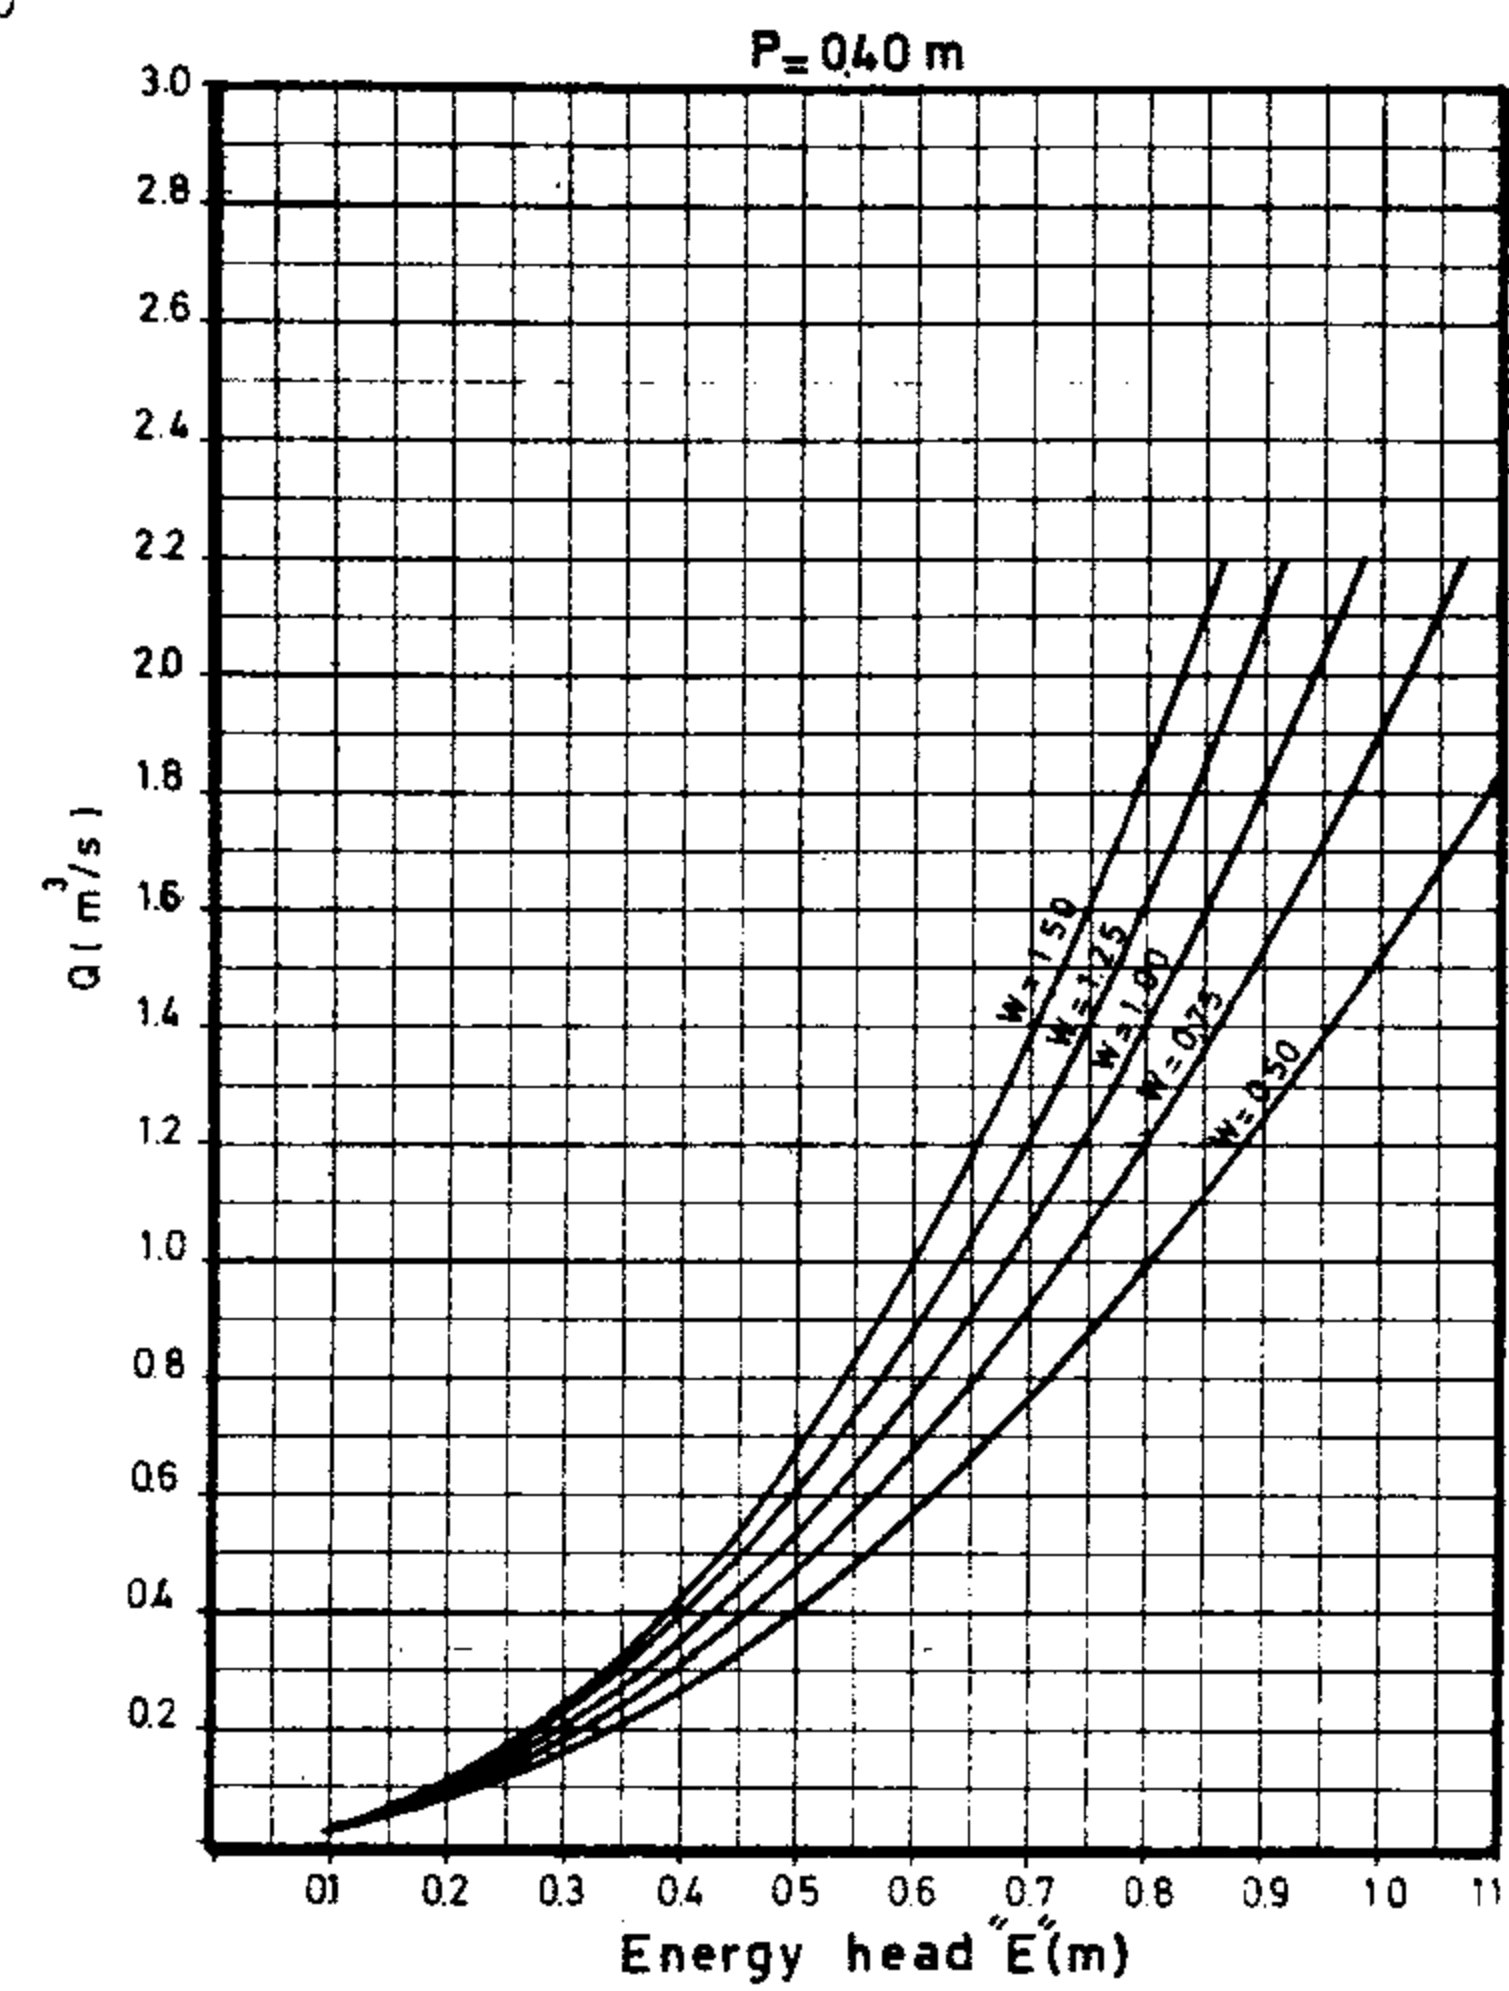


REFERENCE DWGS: For Process to select control notch see dwg. No 12/5/2/01
For Plot Section see dwg. No 12/5/1/01

Scale:	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. No 12/5/2/02	
Approved:	Sheet No 3 of 4	Rev. No

CONTROL NOTCH
(GRAPHS)


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

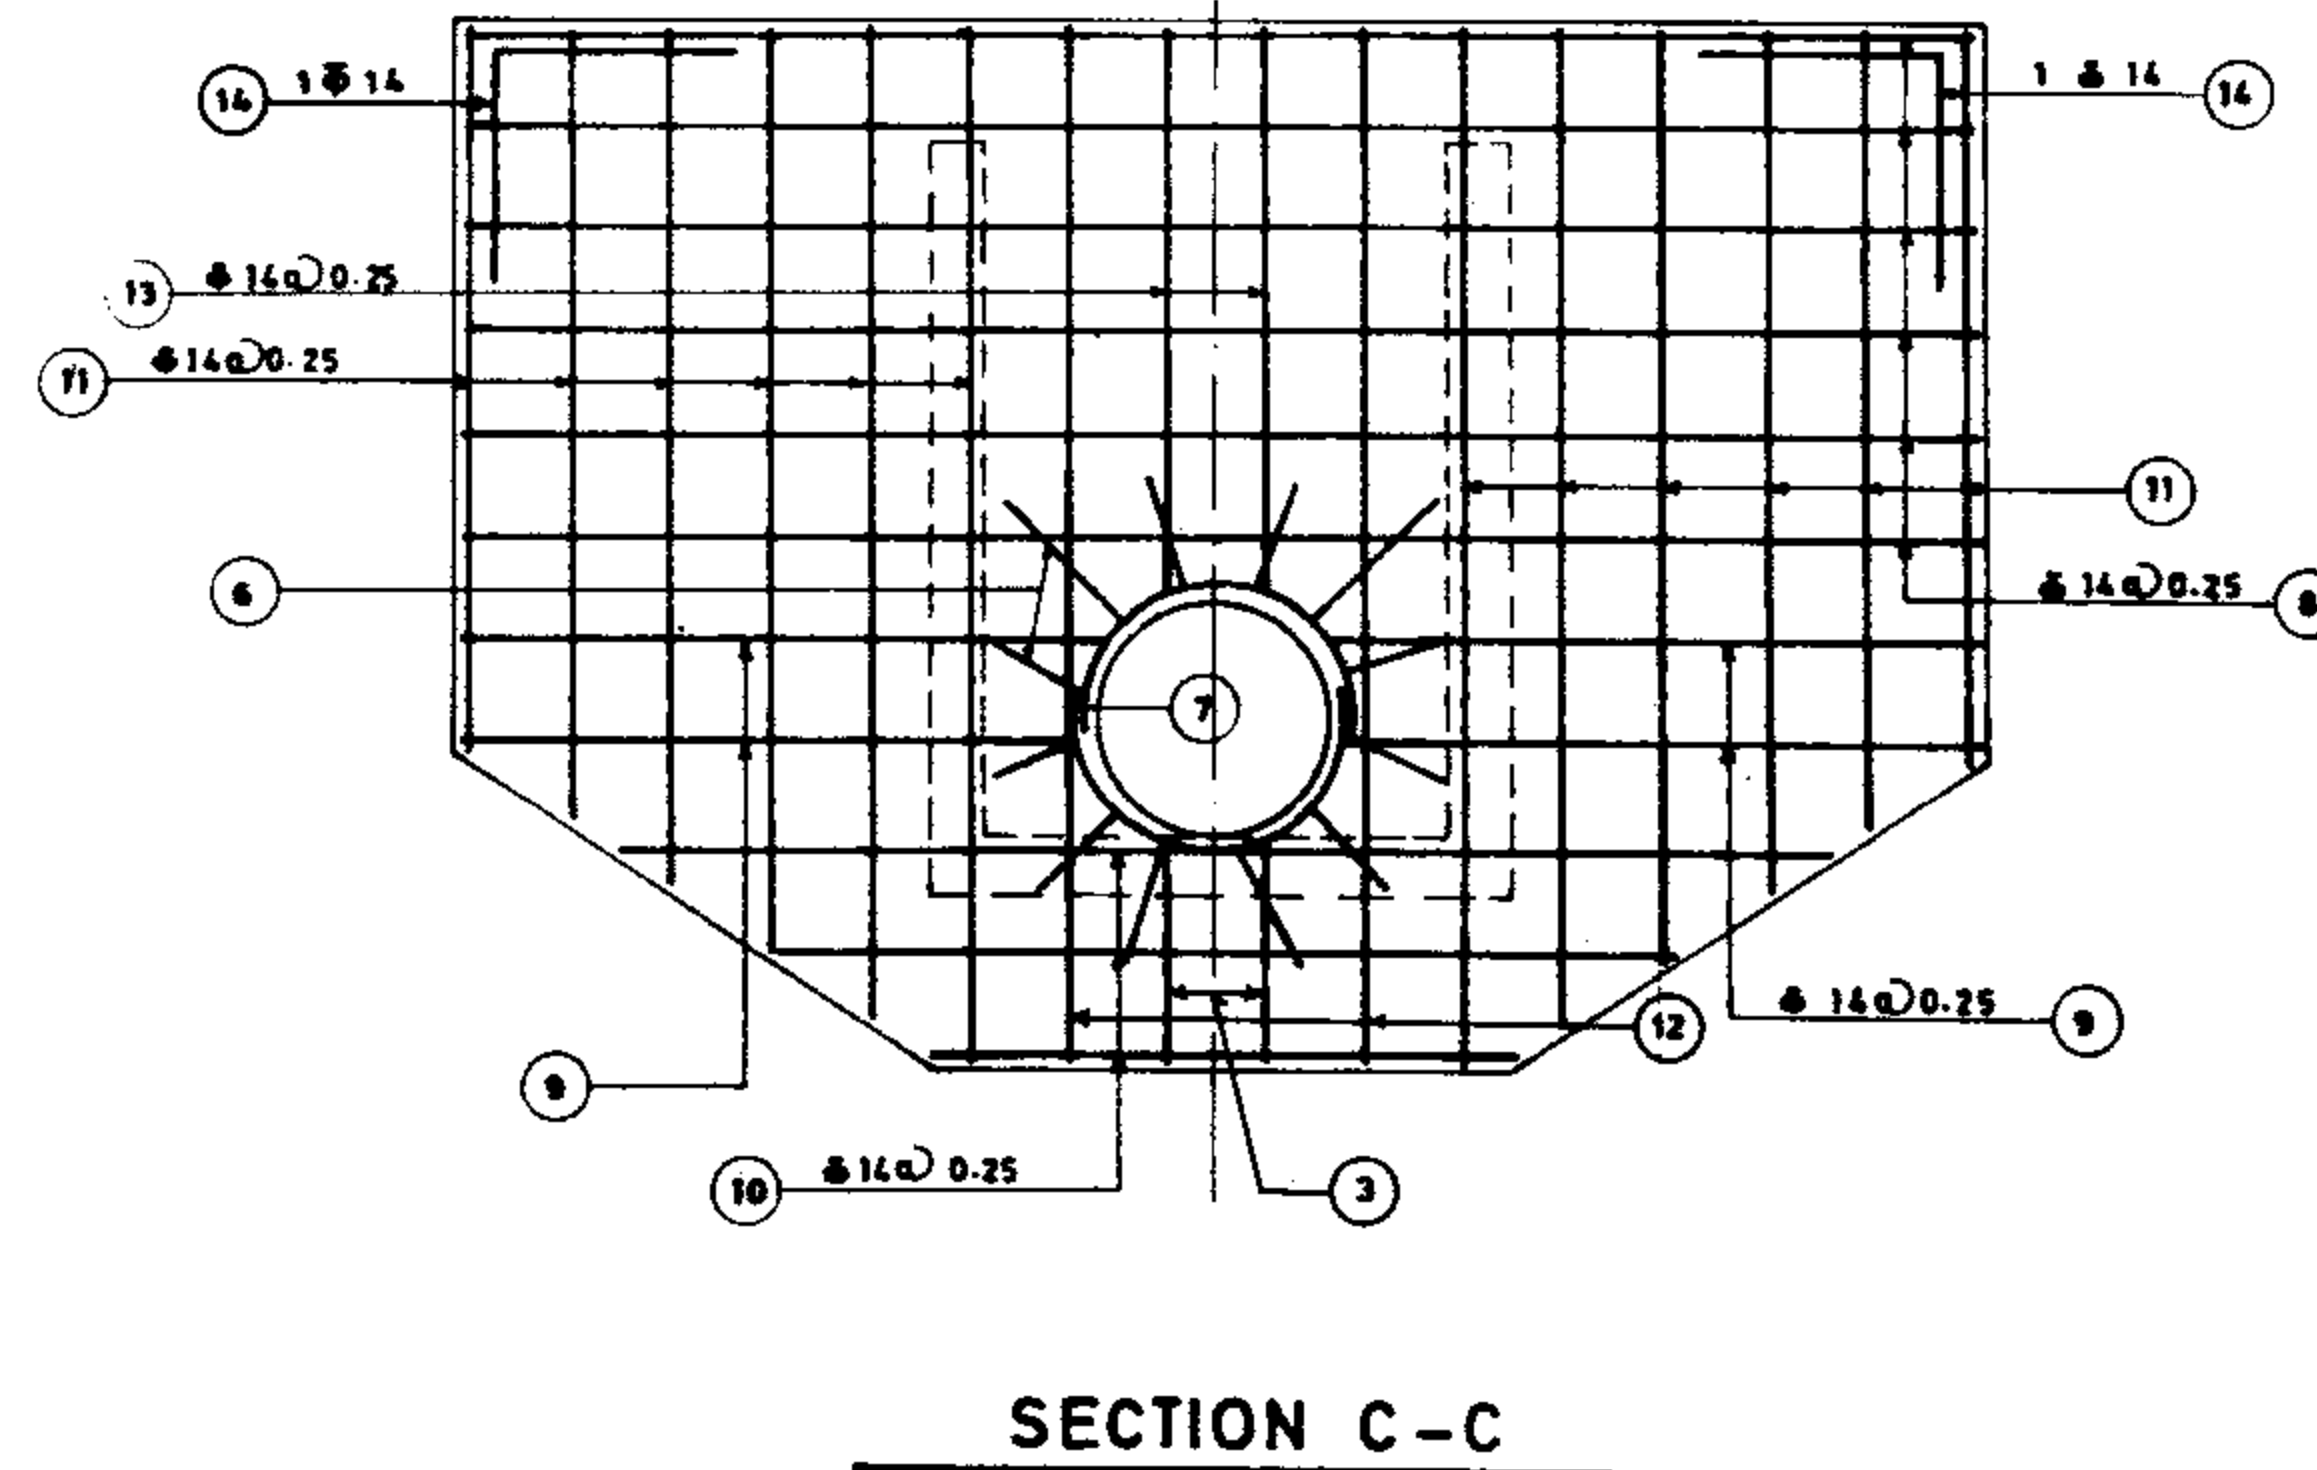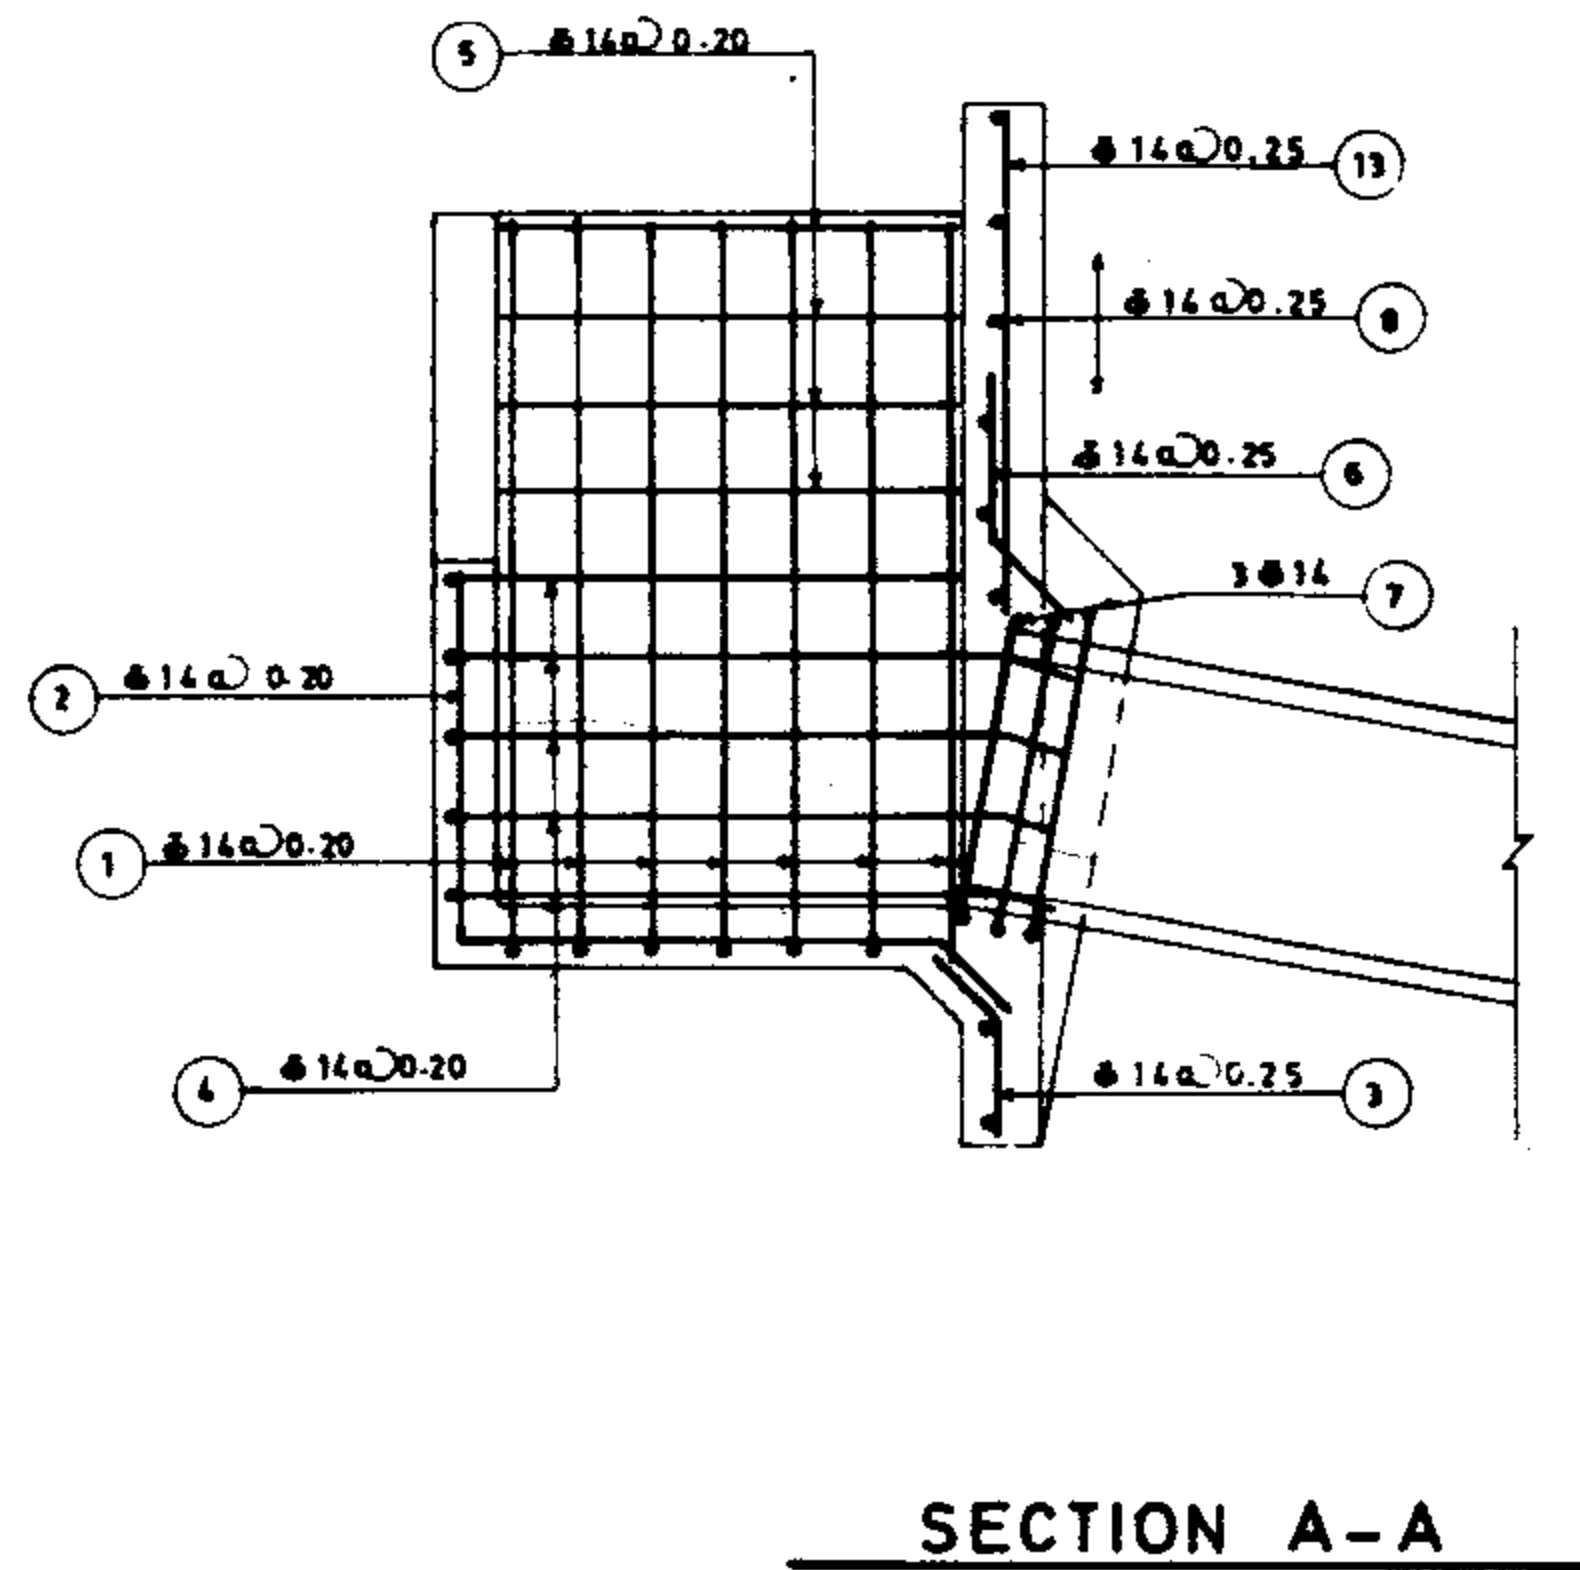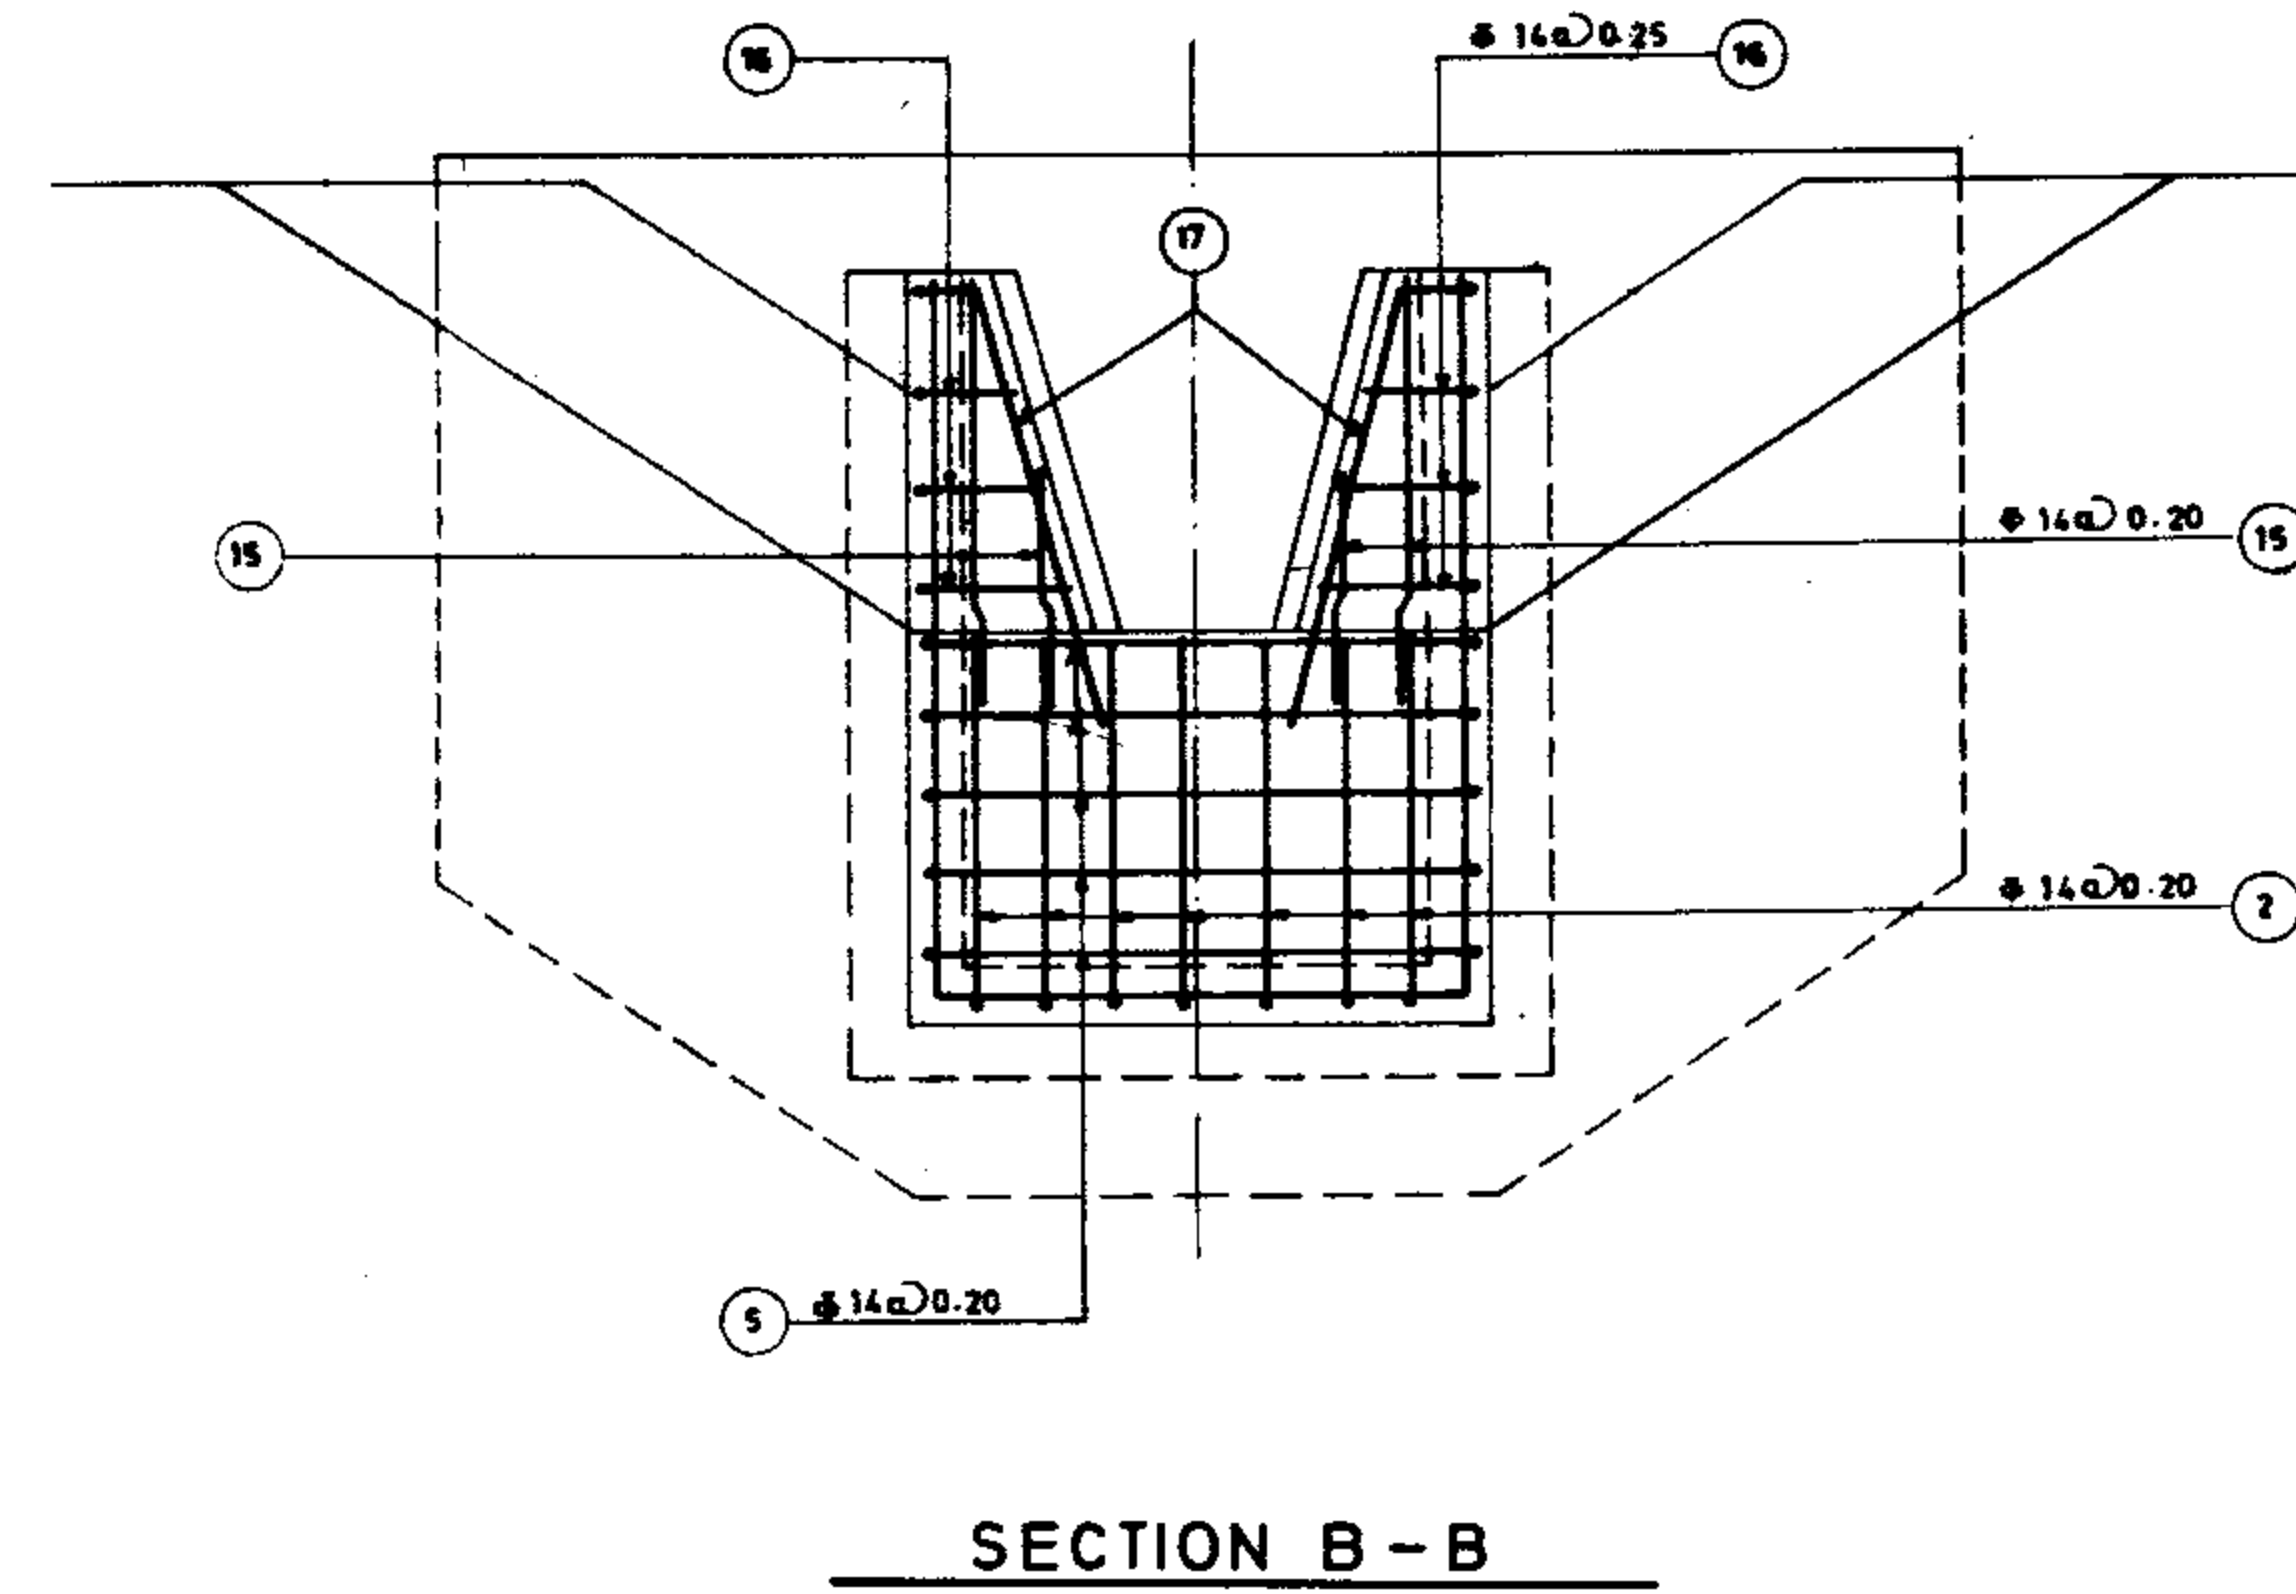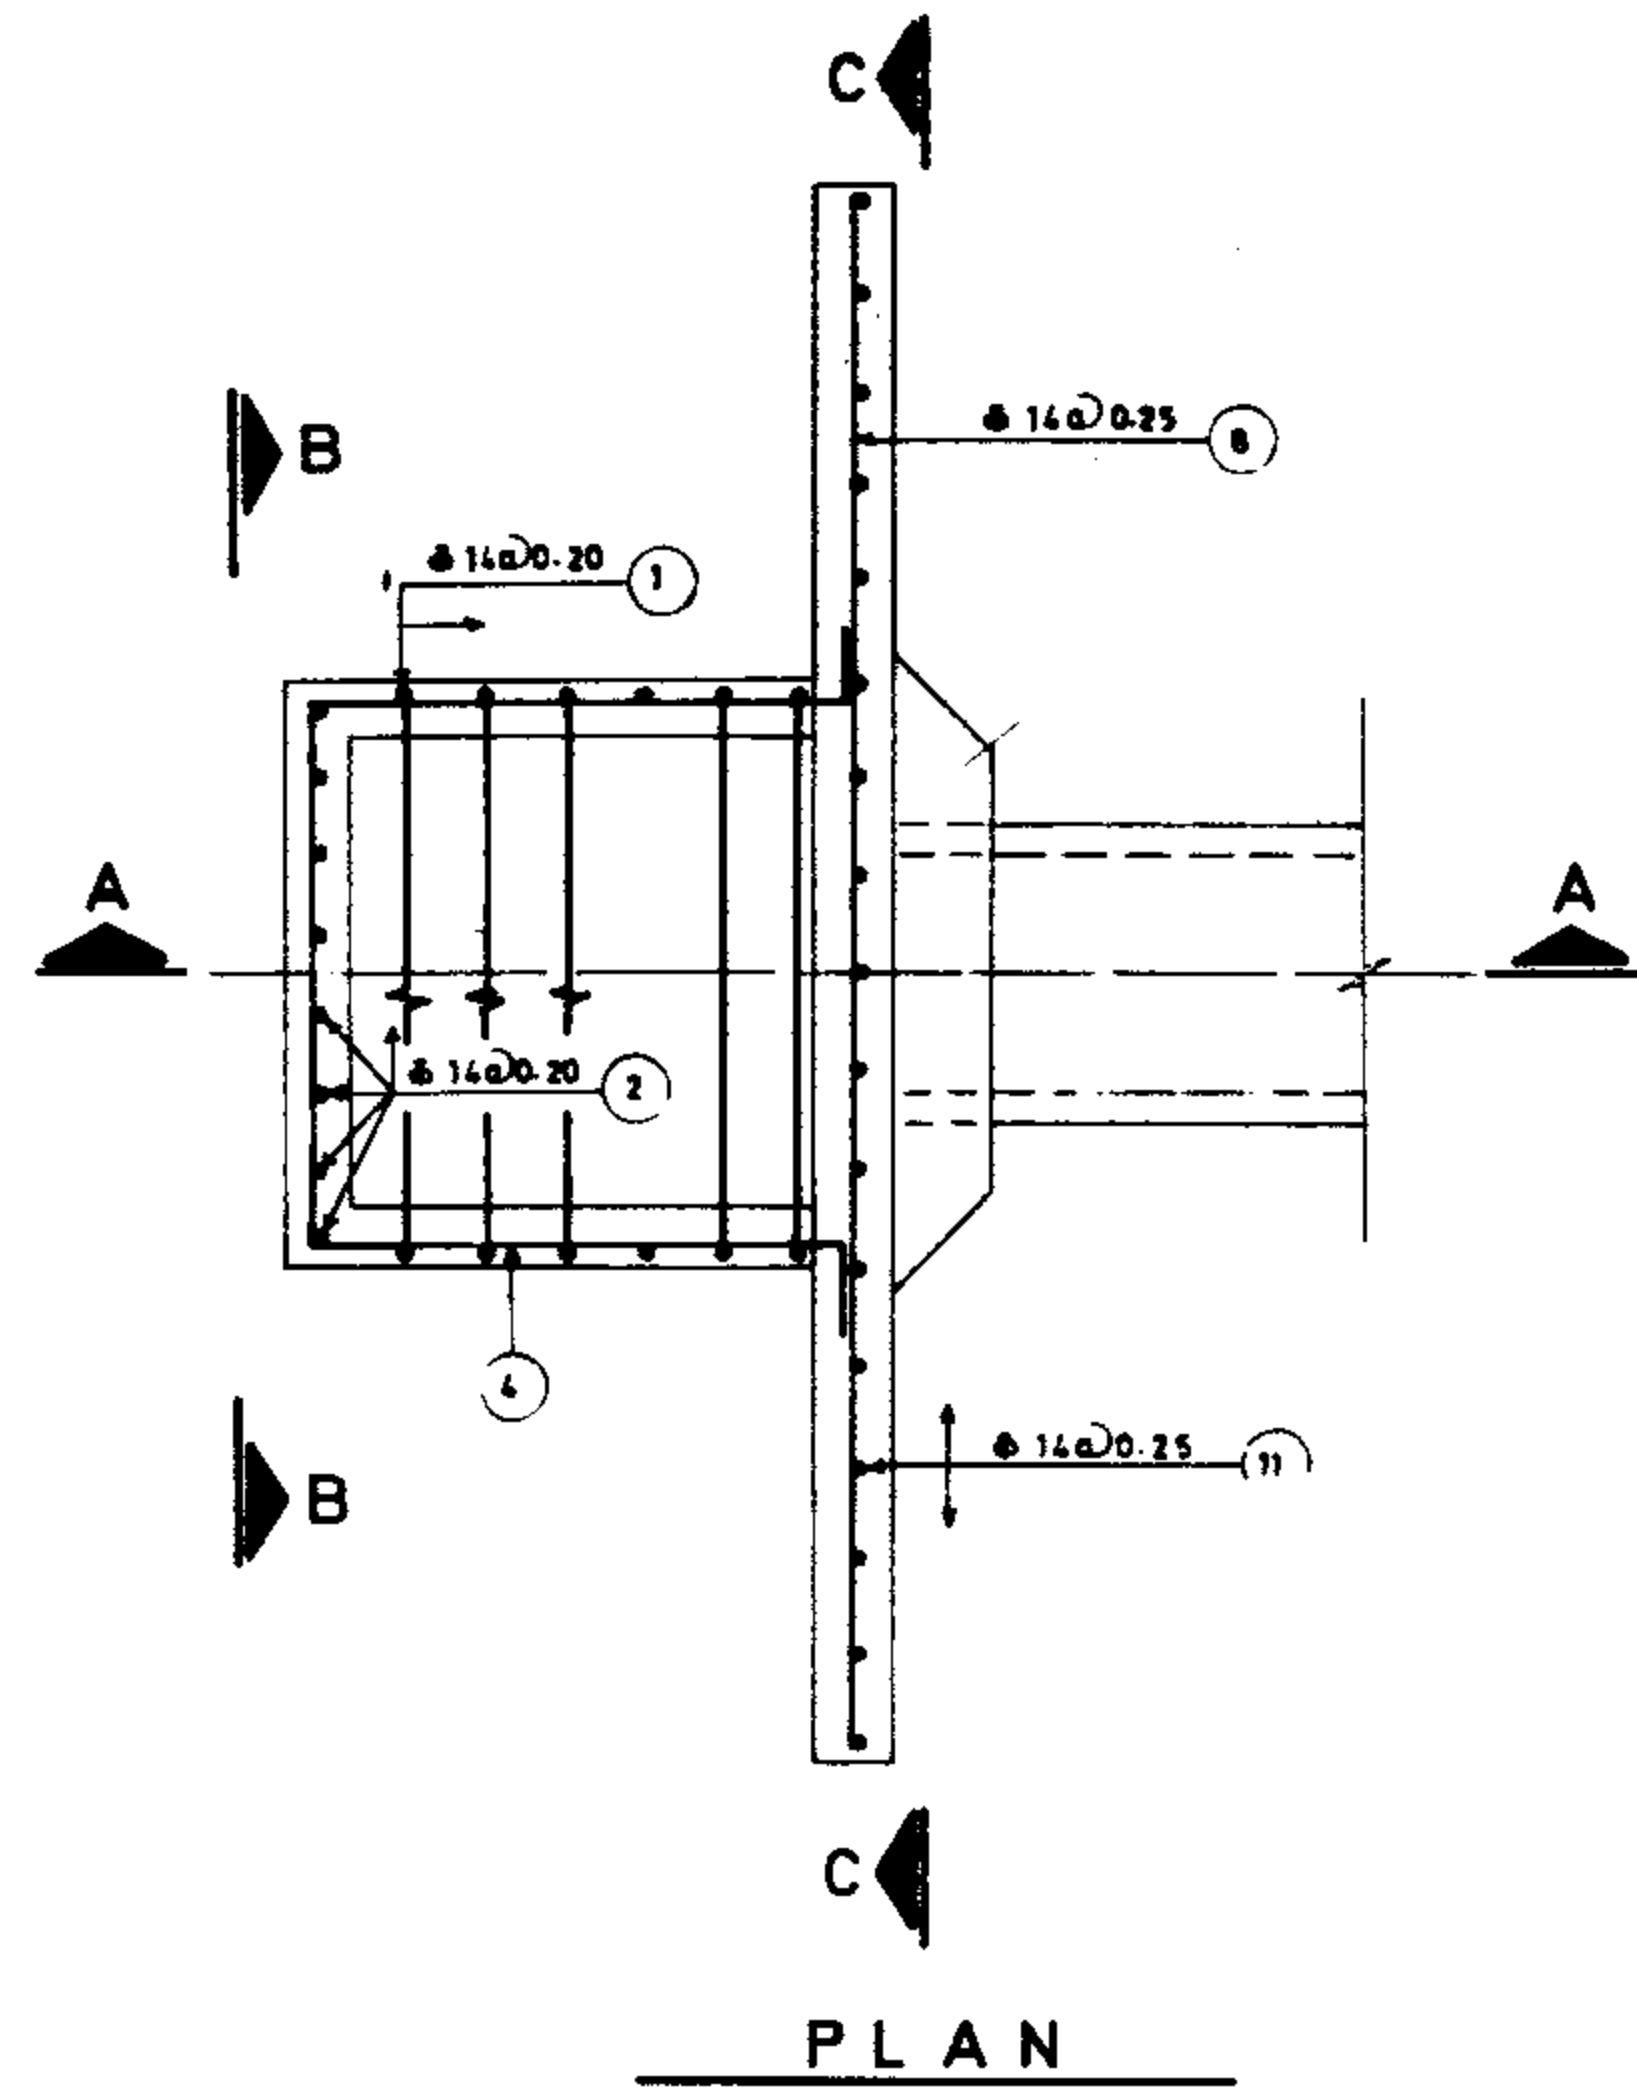


REFERENCE DWGS: For Plan & Section see dwg. No 12/5/1/01
 For Process to select control notch see dwg. No 12/5/2/01

Scale:	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG No 12/5/3/01	CONTROL NOTCH (REINFORCEMENT)
Approved:	Sheet No 4 of 4	Rev No
		(TYPICAL POSITION OF BARS)


ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

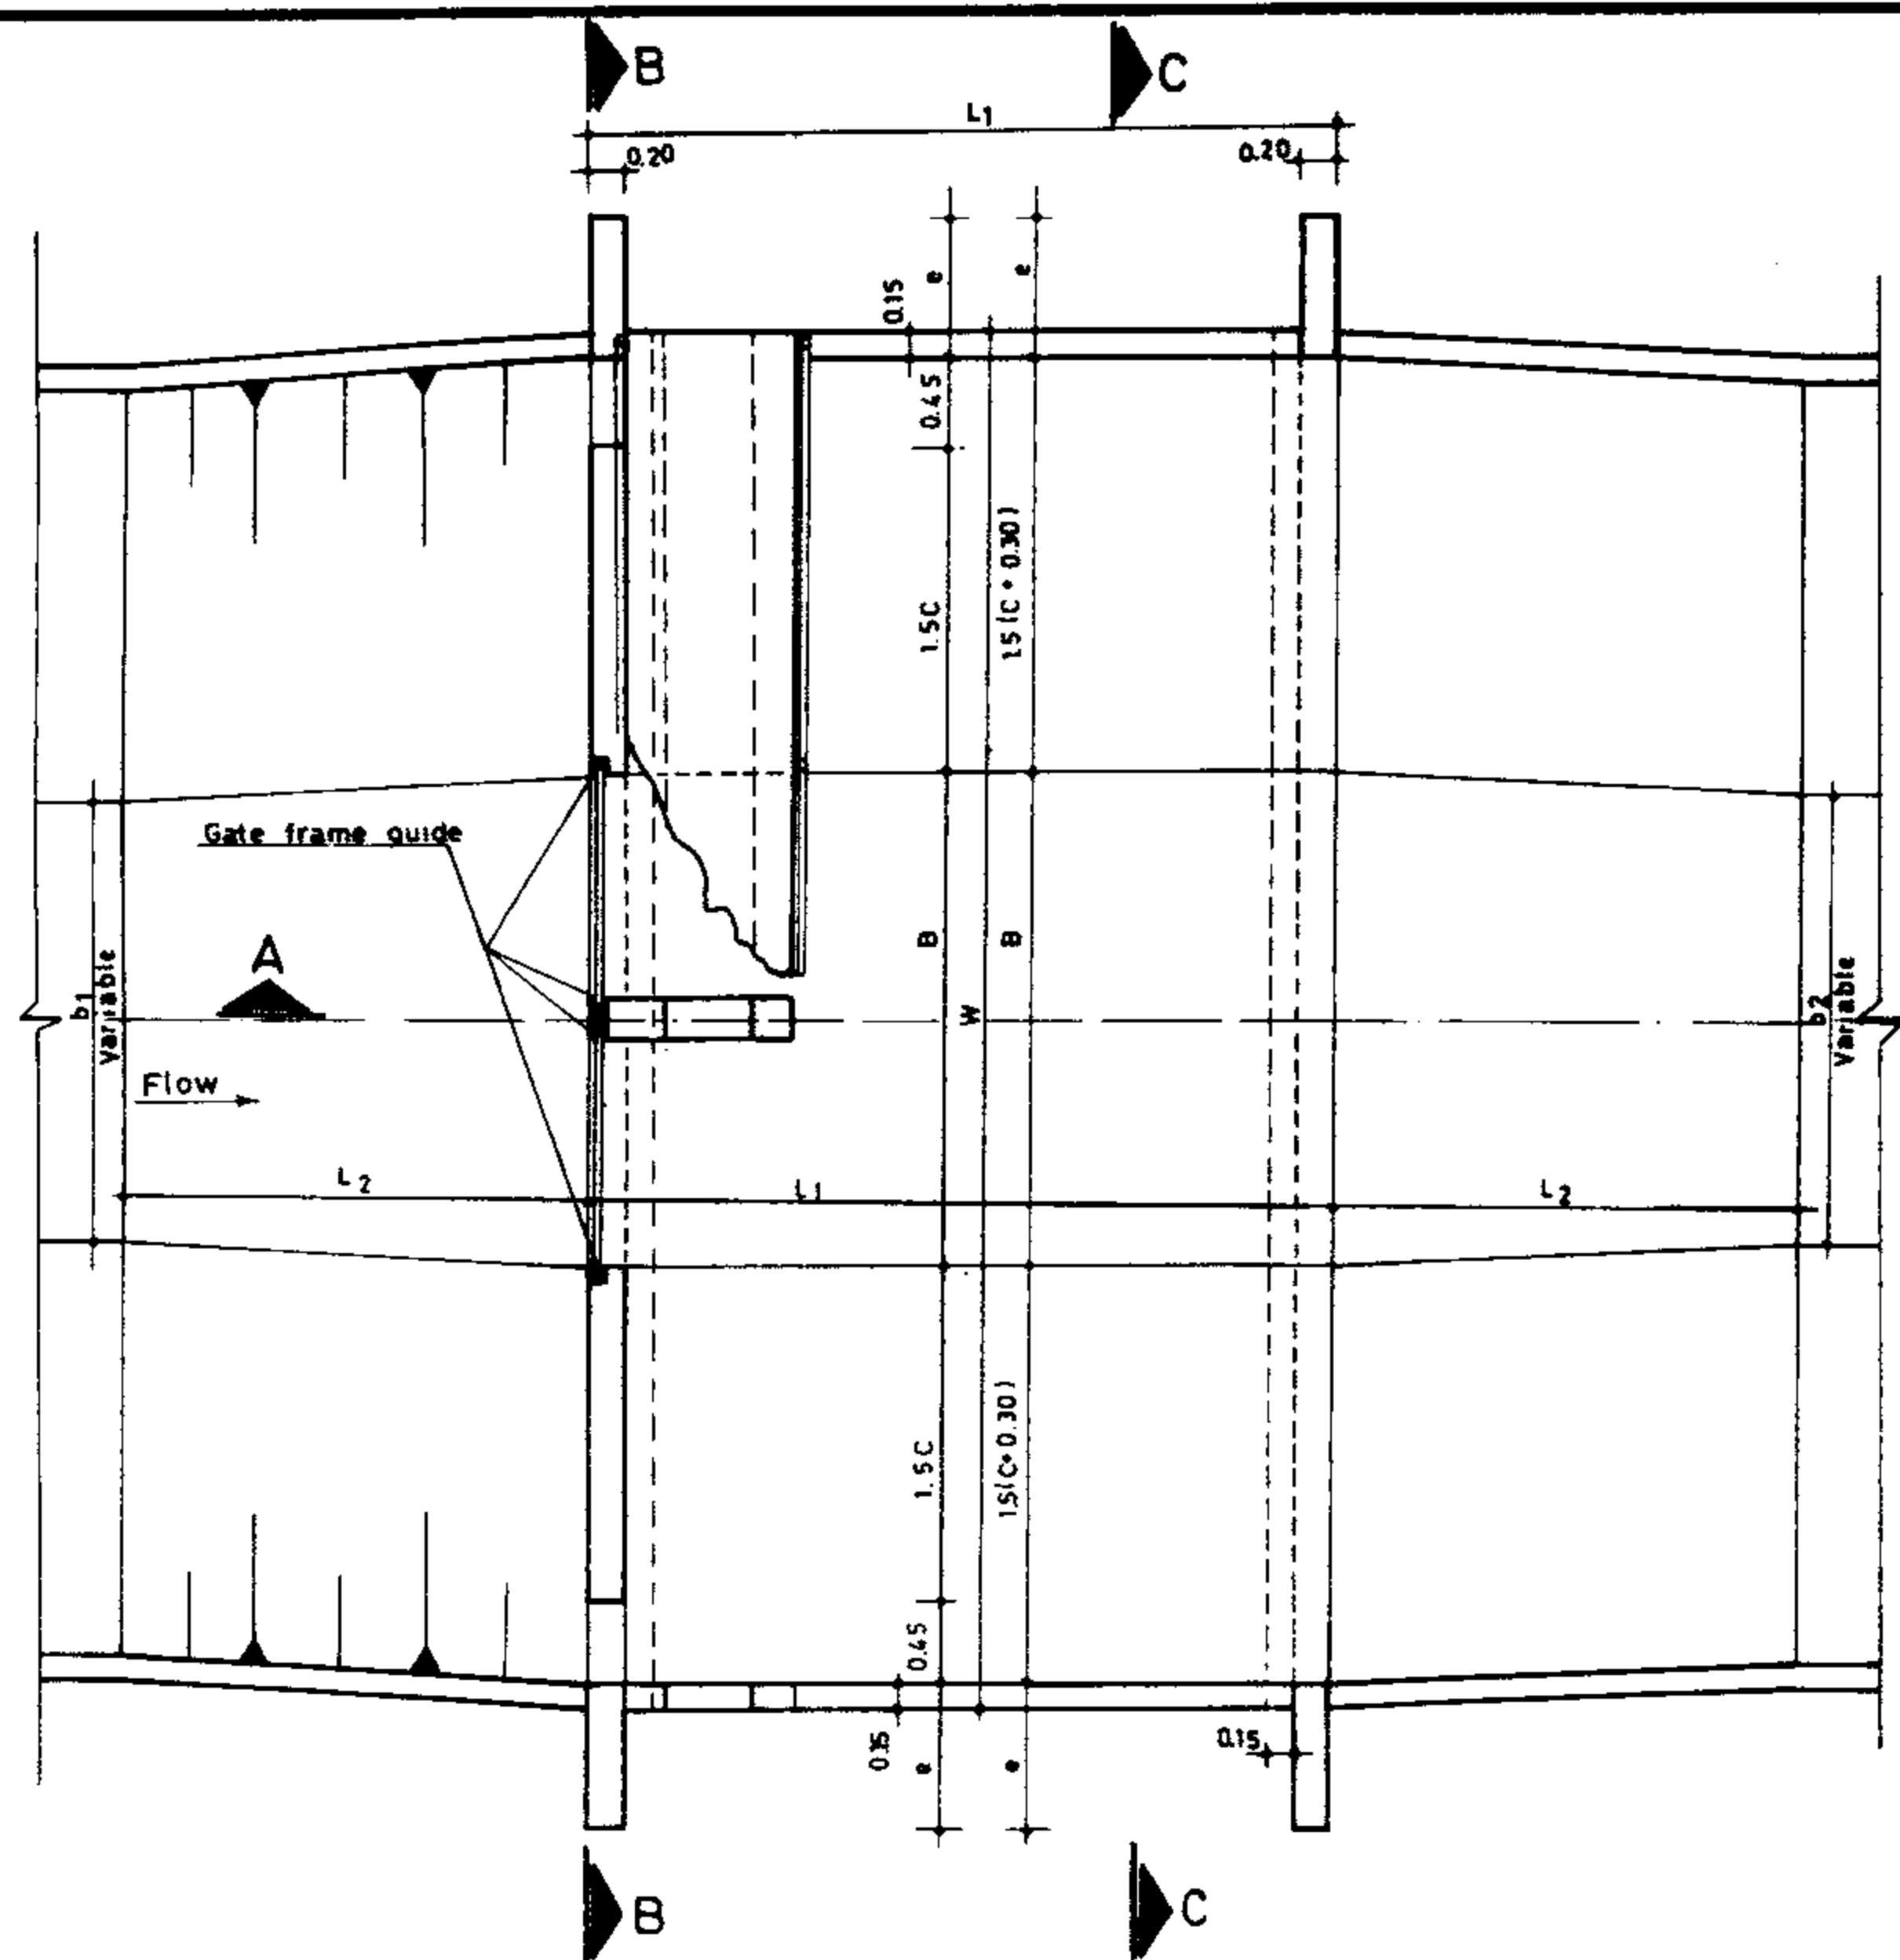

PLAN

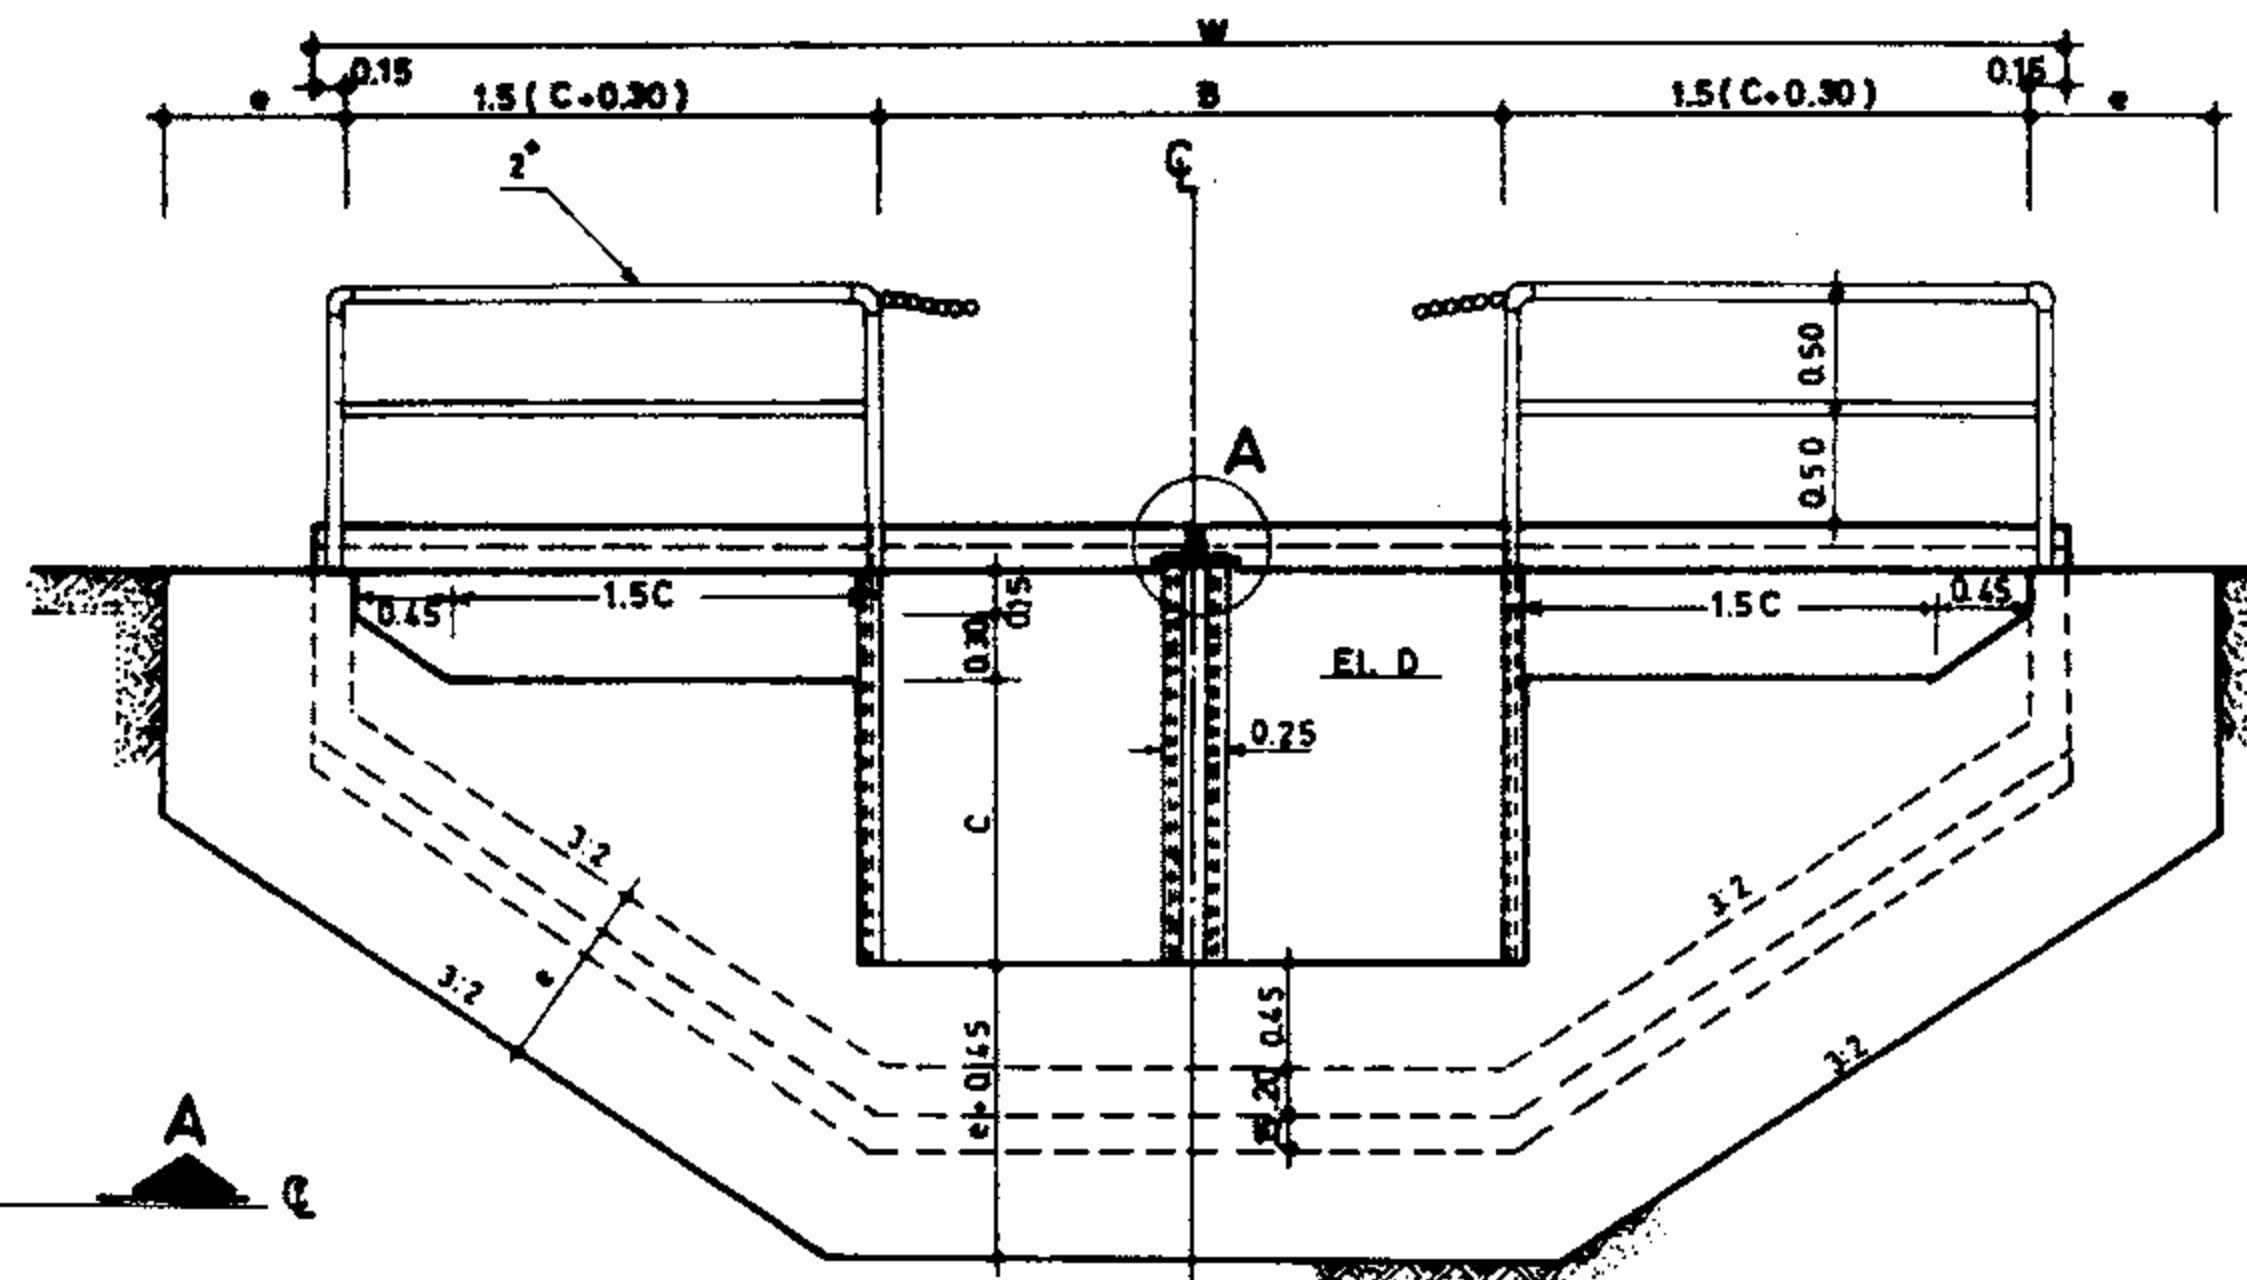

SECTION B-B

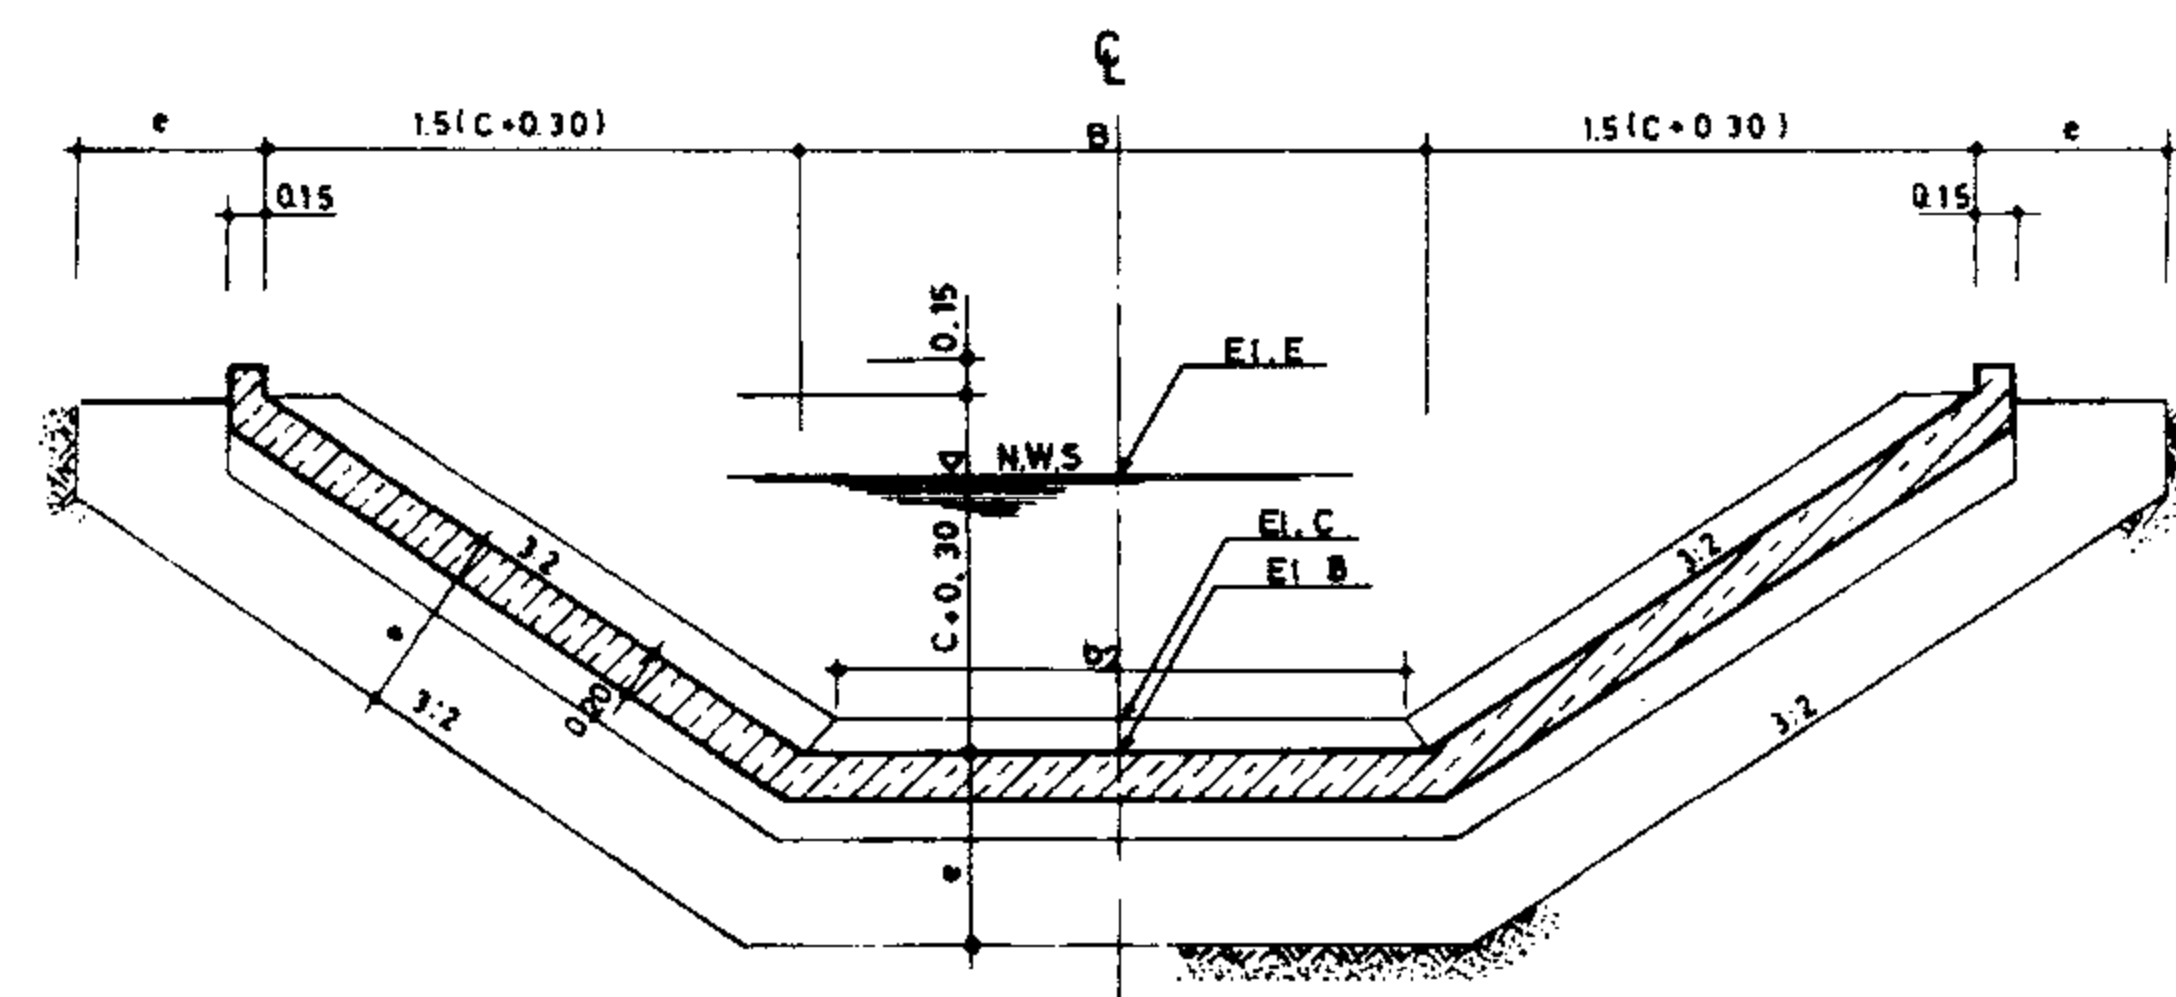


SECTION C-C


DIMENSION TABLE

Str. No.	Max Q m ³ /s	SLIDE GATE		STANDARD DIMENSION											
		WIDTH m	FRM HT. m	B m	C m	L ₁ m	e m	W m	X m	R m	t ₂ m	M #	R/Bar Kg	Conc. m ³	
1	1.600	1.00	0.80	1.70	2.25	0.85	2.50	0.80	6.00	1.35	0.300	2.00	5	617.79	7.89
2	1.800	1.00	0.90	1.80	2.25	0.95	2.60	0.80	6.30	1.40	0.350	2.50	5	660.48	8.46
3	2.000	1.00	1.00	2.20	2.25	1.05	3.15	0.80	6.60	1.50	0.300	2.50	5	747.35	10.05
4	2.200	1.00	1.10	2.40	2.25	1.15	3.85	0.80	6.90	1.25	0.325	2.50	6	855.68	11.59
5	2.160	1.20	0.90	1.90	2.65	1.00	2.60	0.80	6.85	1.25	0.300	2.50	6	712.26	9.30
6	2.400	1.20	1.00	2.10	2.65	1.10	3.15	0.80	7.15	1.30	0.325	2.50	6	796.61	10.92
7	2.640	1.20	1.10	2.40	2.65	1.20	3.85	0.80	7.40	1.35	0.350	2.50	6	922.03	12.39
8	2.520	1.40	0.90	2.00	3.05	1.00	2.60	0.80	7.25	1.30	0.375	2.50	6	751.46	9.74
9	2.800	1.40	1.00	2.20	3.05	1.10	3.15	0.80	7.55	1.40	0.275	3.00	8	818.54	11.14
10	3.080	1.40	1.10	2.40	3.05	1.20	3.85	0.80	7.85	1.45	0.300	3.00	6	971.08	12.94
11	3.200	1.60	1.10	2.20	3.45	1.10	3.5	0.80	7.98	1.45	0.350	3.00	6	879.30	11.64


Str.	1	2	3	4	5	6	7	8	9	10	11
Form m ²	50.25	53.26	56.50	60.11	56.60	59.96	63.49	58.68	62.04	65.85	64.16

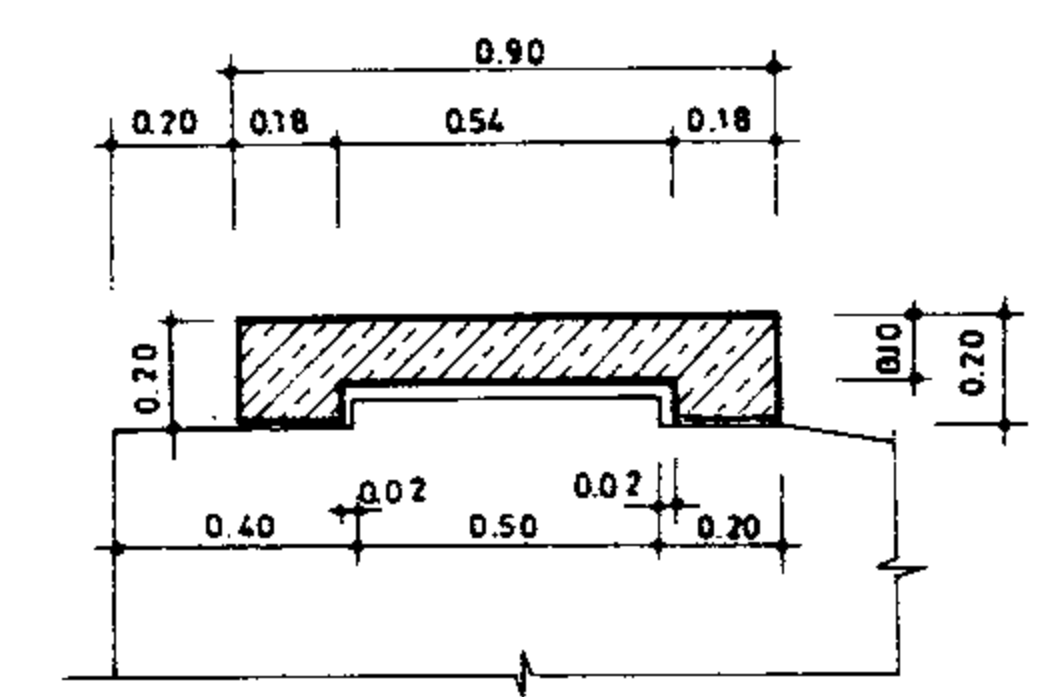


DETAIL "B"

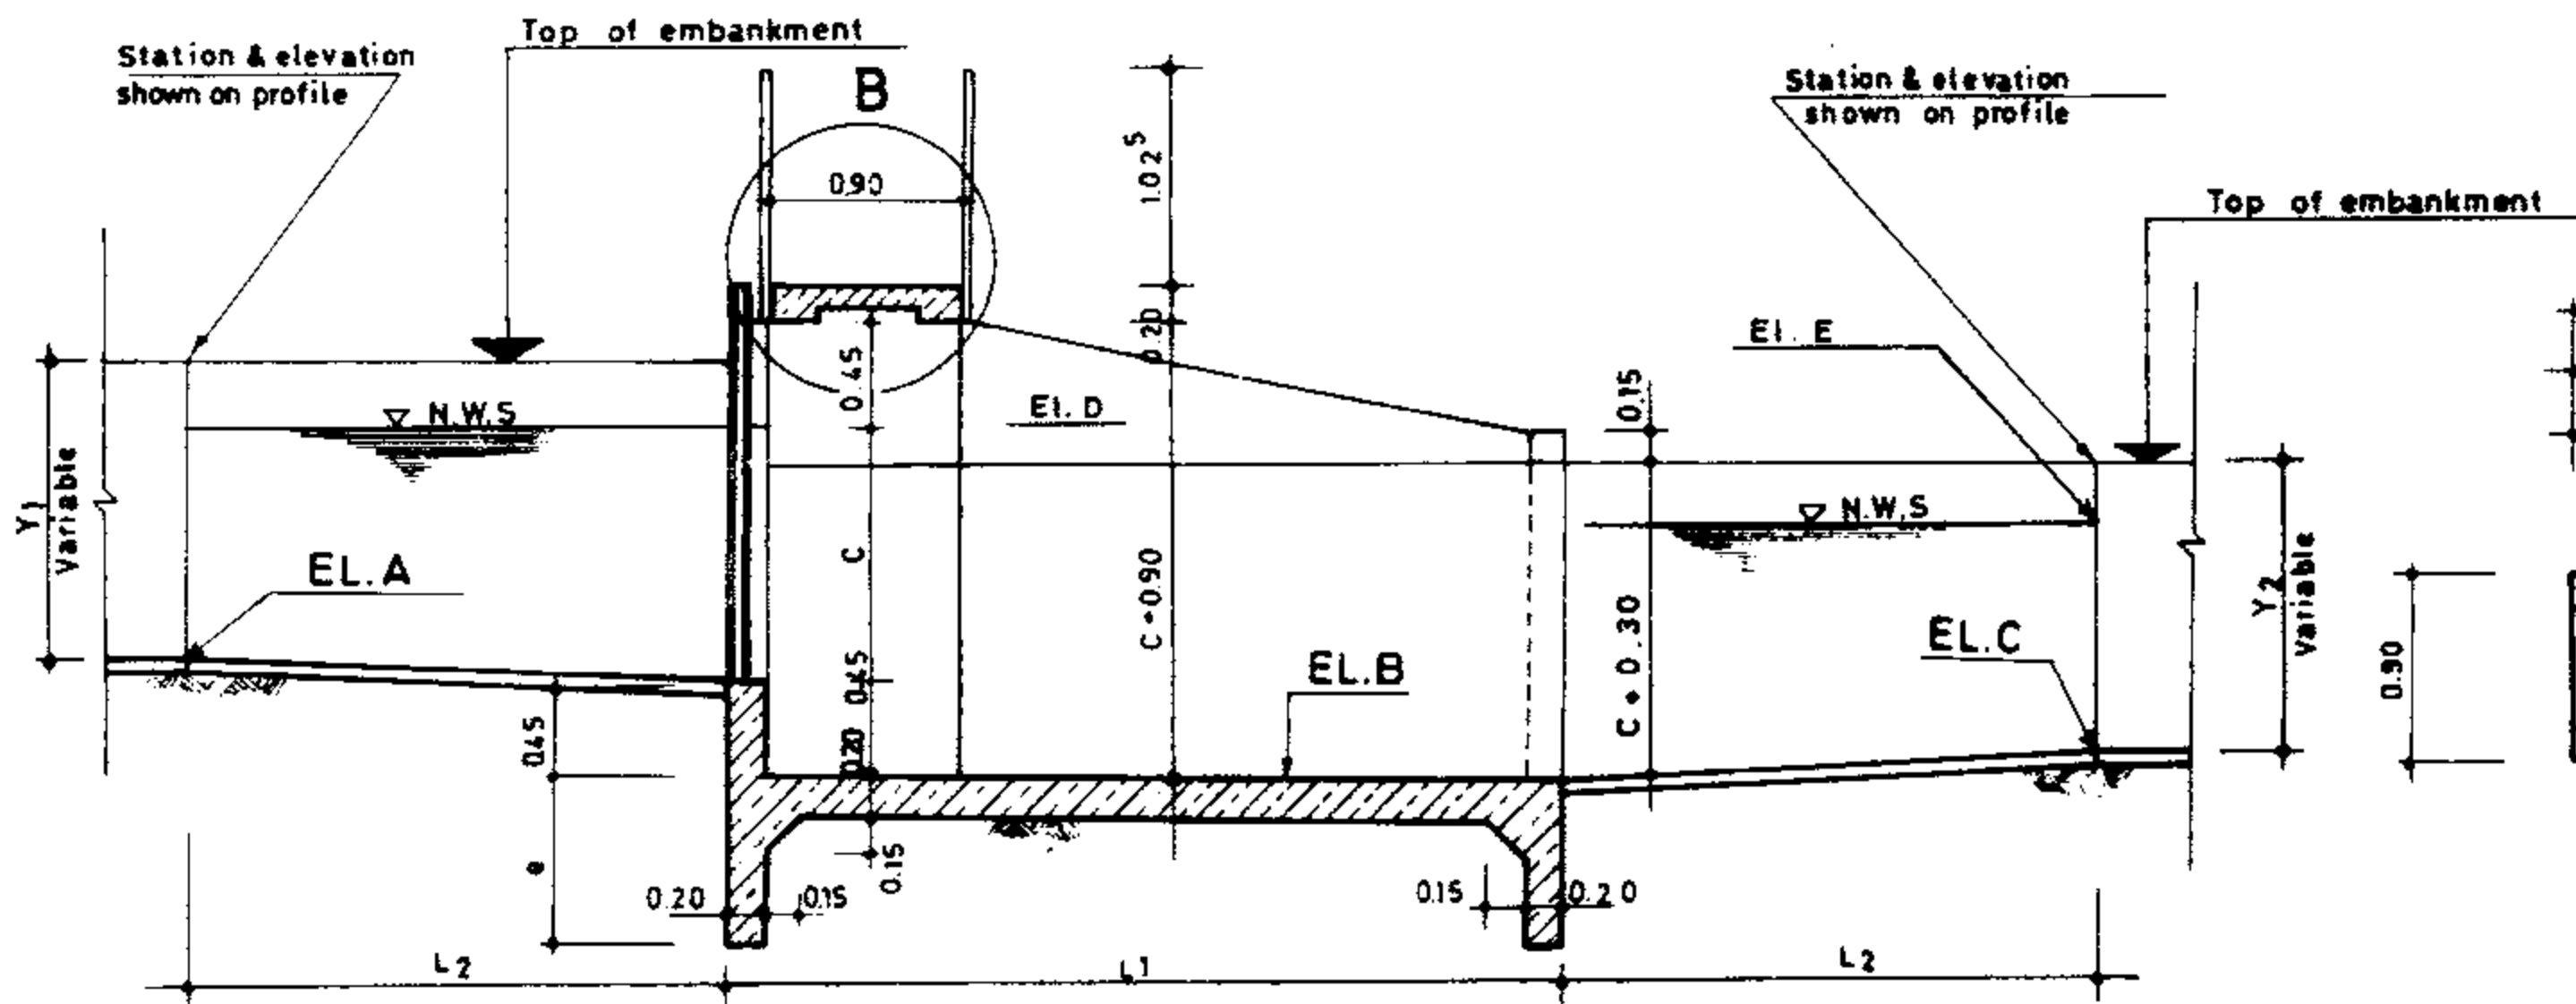

SECTION A-A

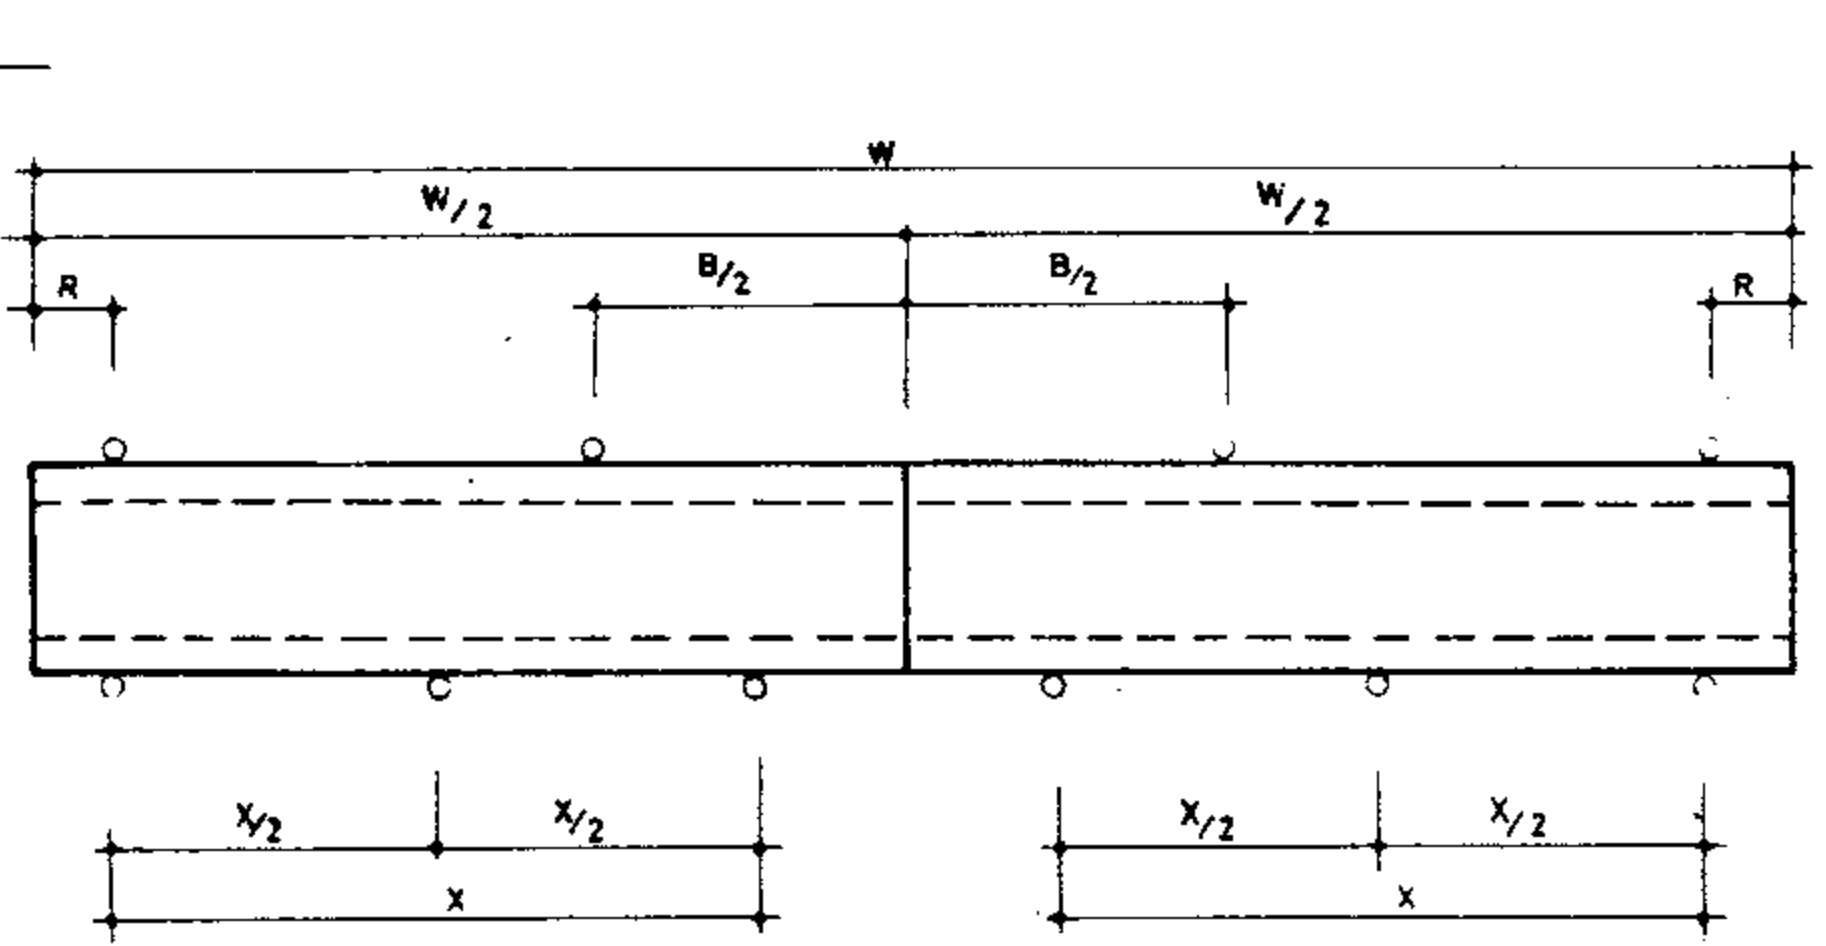

PLAN OPERATING DECK

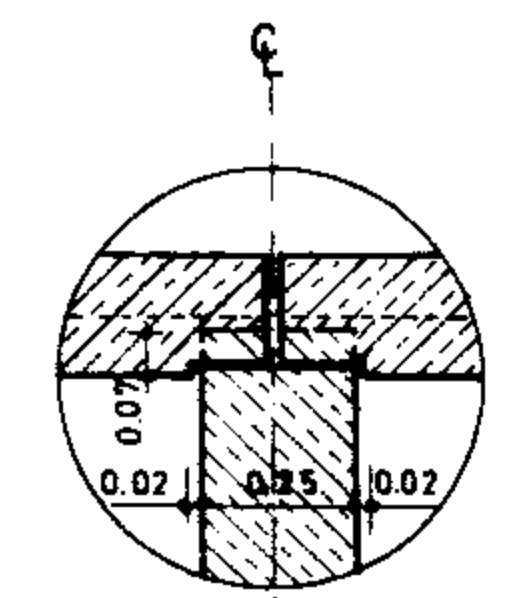


DETAIL "A"


REFERENCE DWGS: For reinforcement see dwg. No. 12/4/3/01
 For general notes and minimum requirements see dwgs. No. 20/2/1/01 TO 20/2/1/03
 For check drops selecting procedure see dwg. No. 12/3/1/01
 For construction detail of gate frame guide see dwg. No. 12/6/1/01

Scale: N.T.S	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. No. 12/4/1/01	45 Cm CHECK DROP (Concrete canal)
Approved:	Sheet No. 1 of 5	Rev. No.
		Q=1600 ~ 3200 L/Sec PLAN & SECTION


ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

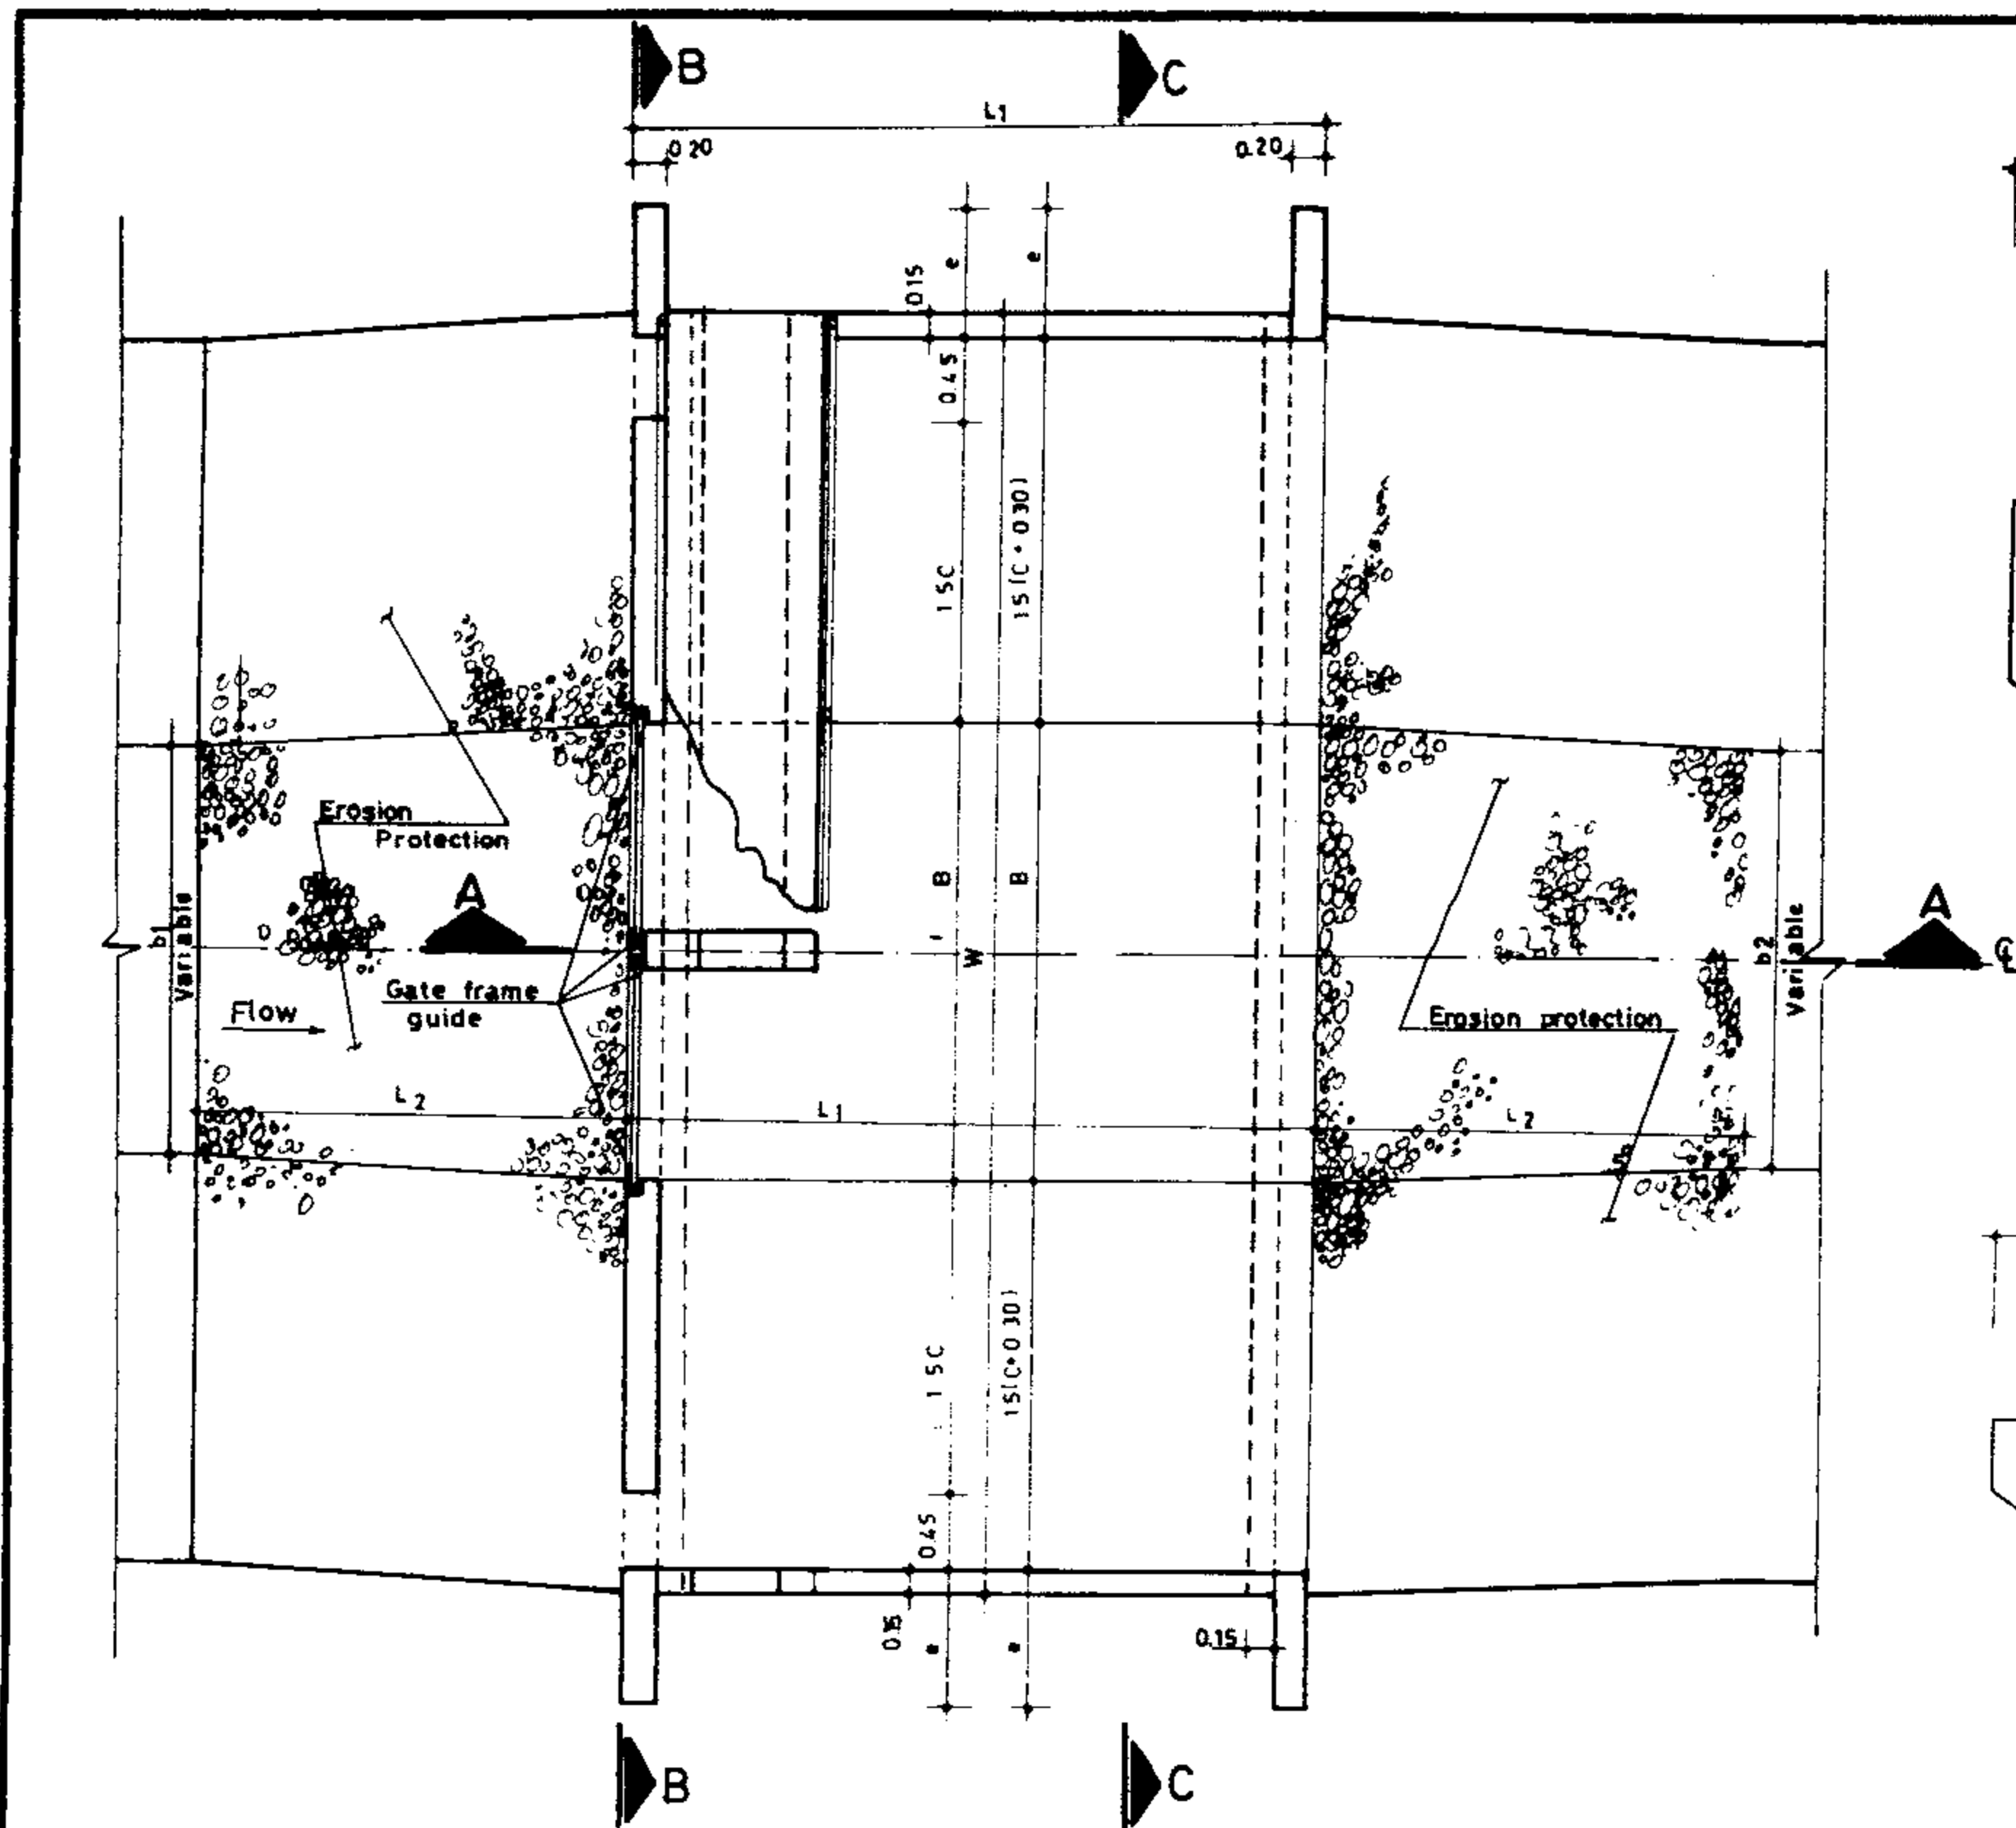

PLAN

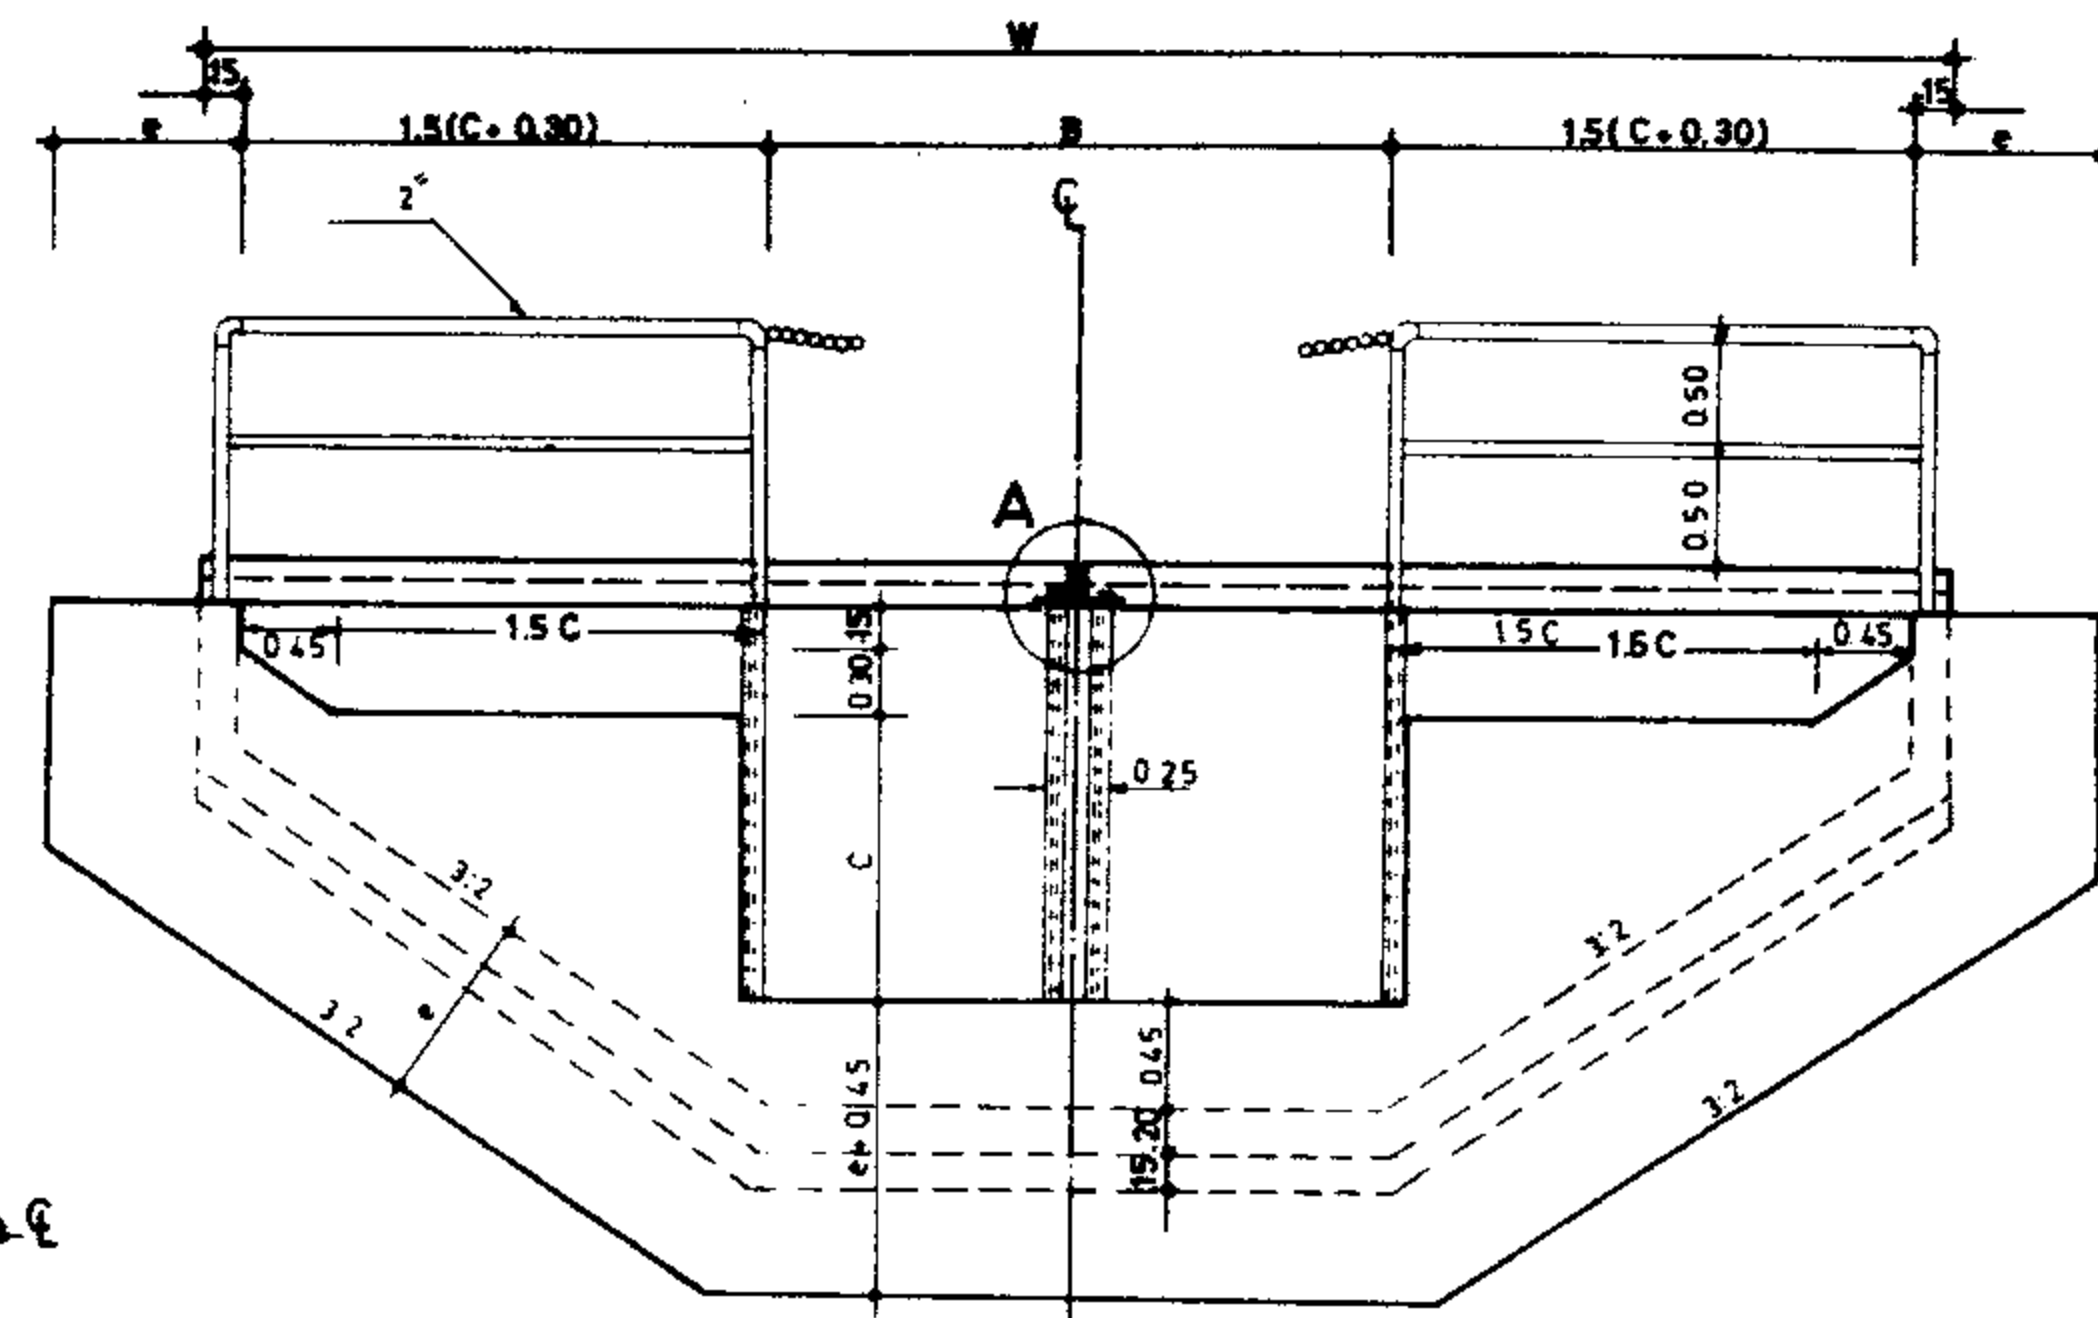


SECTION B-B

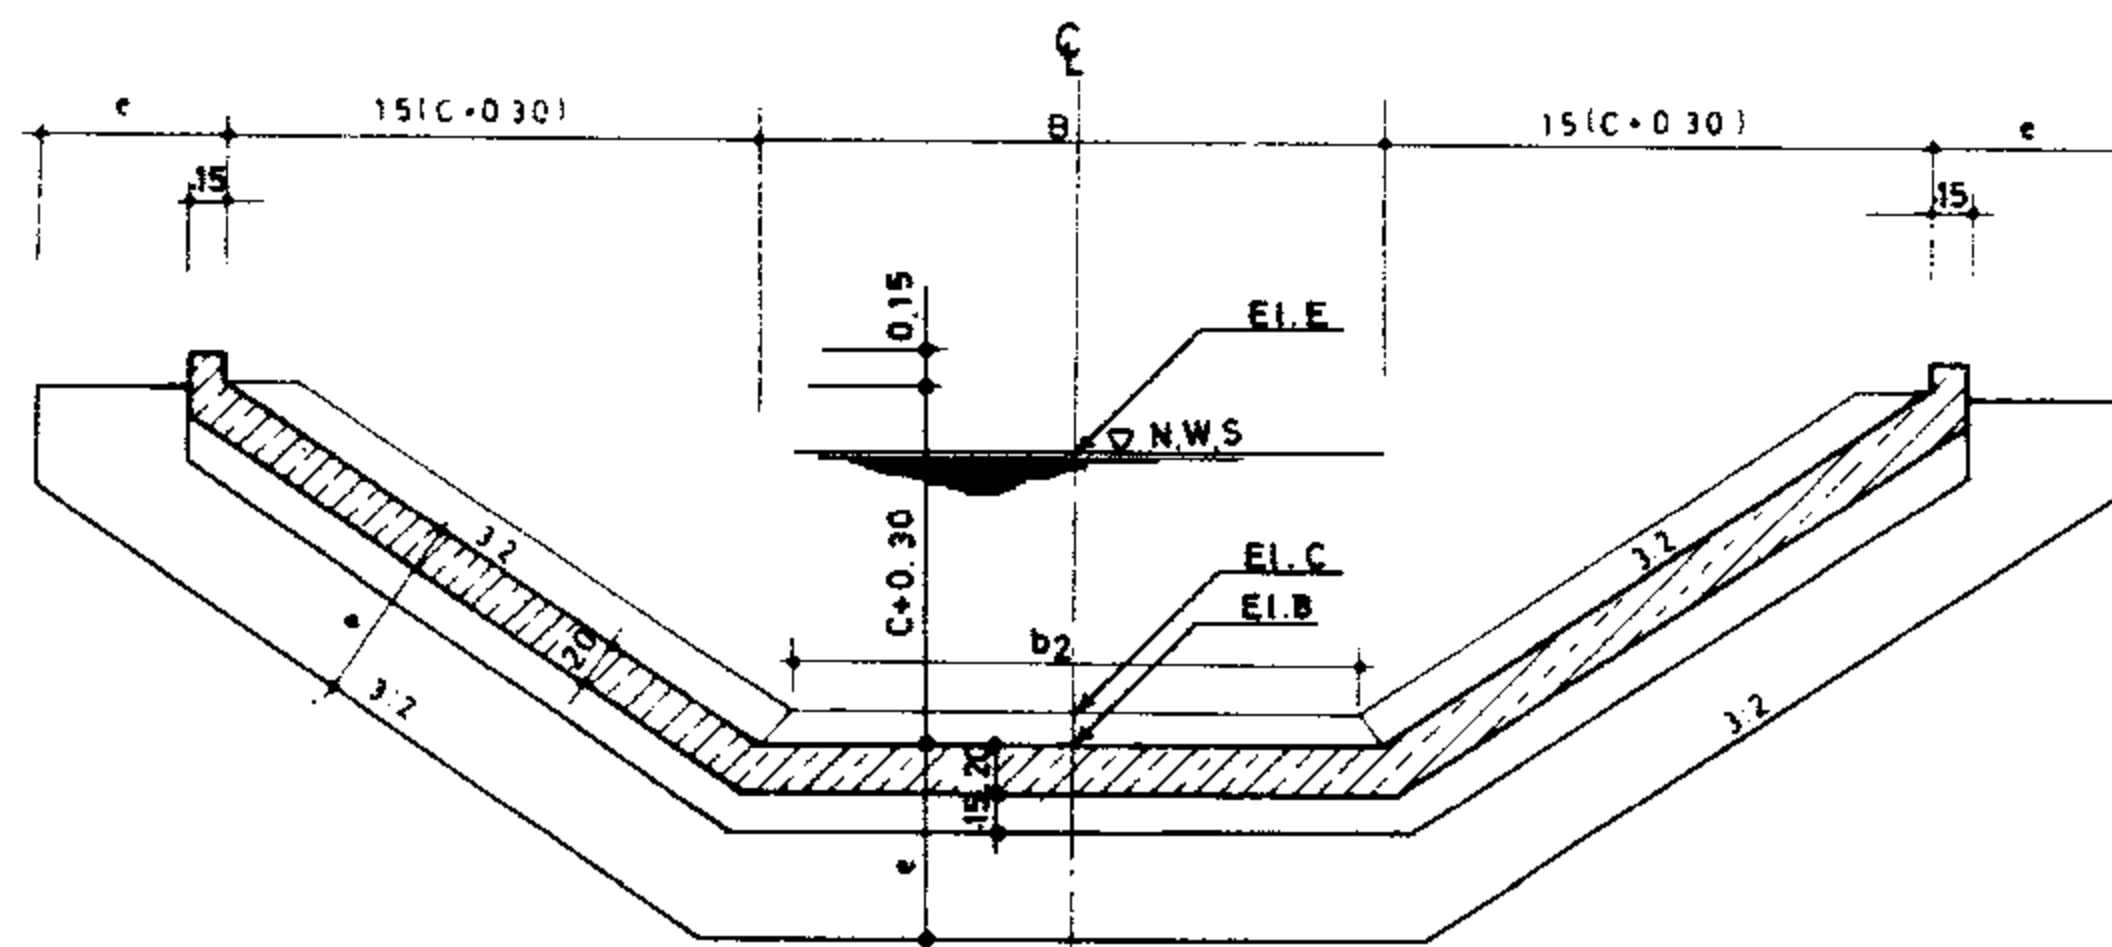


SECTION C-C

No.	Max Q m ³ /s	STANDARD DIMENSION												
		SLIDE GATE WIDTH m	FRM HT. m	θ m	C m	L ₁ m	e m	W m	X m	R m	L ₂ m	N #	R/Bat Kg	Conc. m ³
1	1600	100x0.80	1.70	2.25	0.85	2.50	0.80	6.00	1.35	0.300	2.00	5	617.79	7.89
2	1800	100x0.90	1.80	2.25	0.95	2.60	0.80	6.30	1.40	0.350	2.50	5	660.48	8.46
3	2000	100x1.00	2.20	2.25	1.05	3.15	0.80	6.60	1.50	0.300	2.50	5	747.35	10.05
4	2200	100x1.10	2.40	2.25	1.15	3.65	0.80	6.90	1.25	0.325	2.50	6	855.69	11.59
5	2160	120x0.90	1.90	2.65	1.00	2.80	0.80	6.85	1.25	0.300	2.50	6	712.26	9.30
6	2400	120x1.00	2.10	2.65	1.10	3.15	0.80	7.15	1.30	0.325	2.50	6	796.61	10.92
7	2640	120x1.10	2.40	2.65	1.20	3.65	0.80	7.40	1.35	0.350	2.50	6	922.03	12.39
8	2520	140x0.90	2.00	3.05	1.00	2.60	0.80	7.25	1.30	0.375	2.50	6	751.46	9.74
9	2800	140x1.00	2.20	3.05	1.10	3.15	0.80	7.55	1.40	0.275	3.00	6	818.54	11.14
10	3080	140x1.10	2.40	3.05	1.20	3.65	0.80	7.85	1.45	0.300	3.00	6	971.08	12.94
11	3200	160x1.10	2.20	3.45	1.10	3.75	0.80	7.98	1.45	0.350	3.00	6	879.30	11.64


Str.	1	2	3	4	5	6	7	8	9	10	11
Form m ²	50.25	53.26	56.50	60.11	56.60	59.96	63.45	58.68	62.04	65.65	64.16

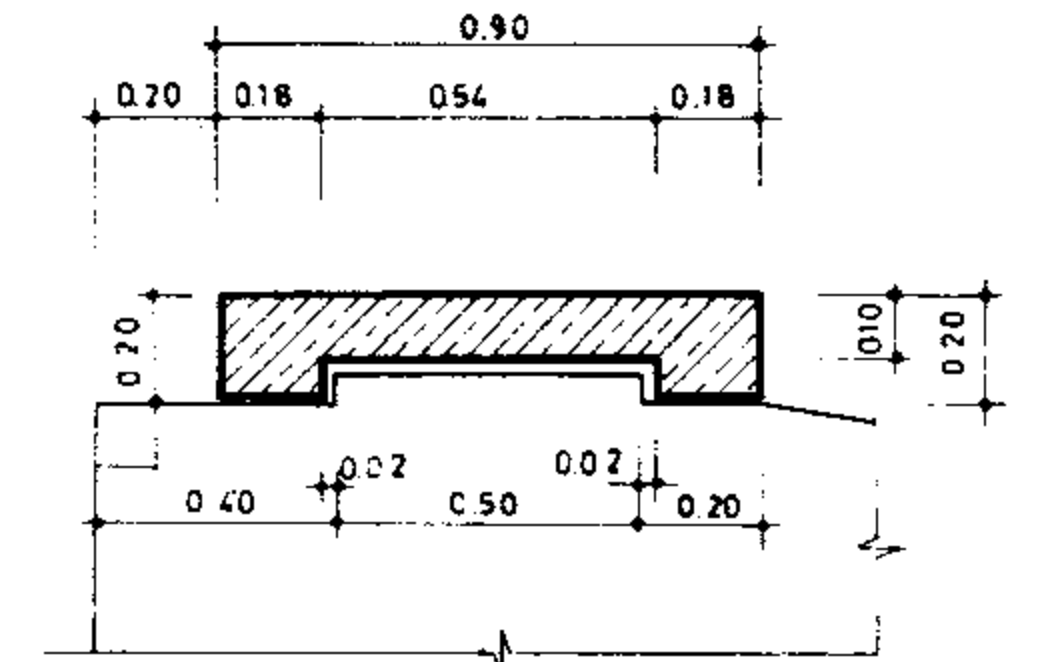


DETAIL "B"

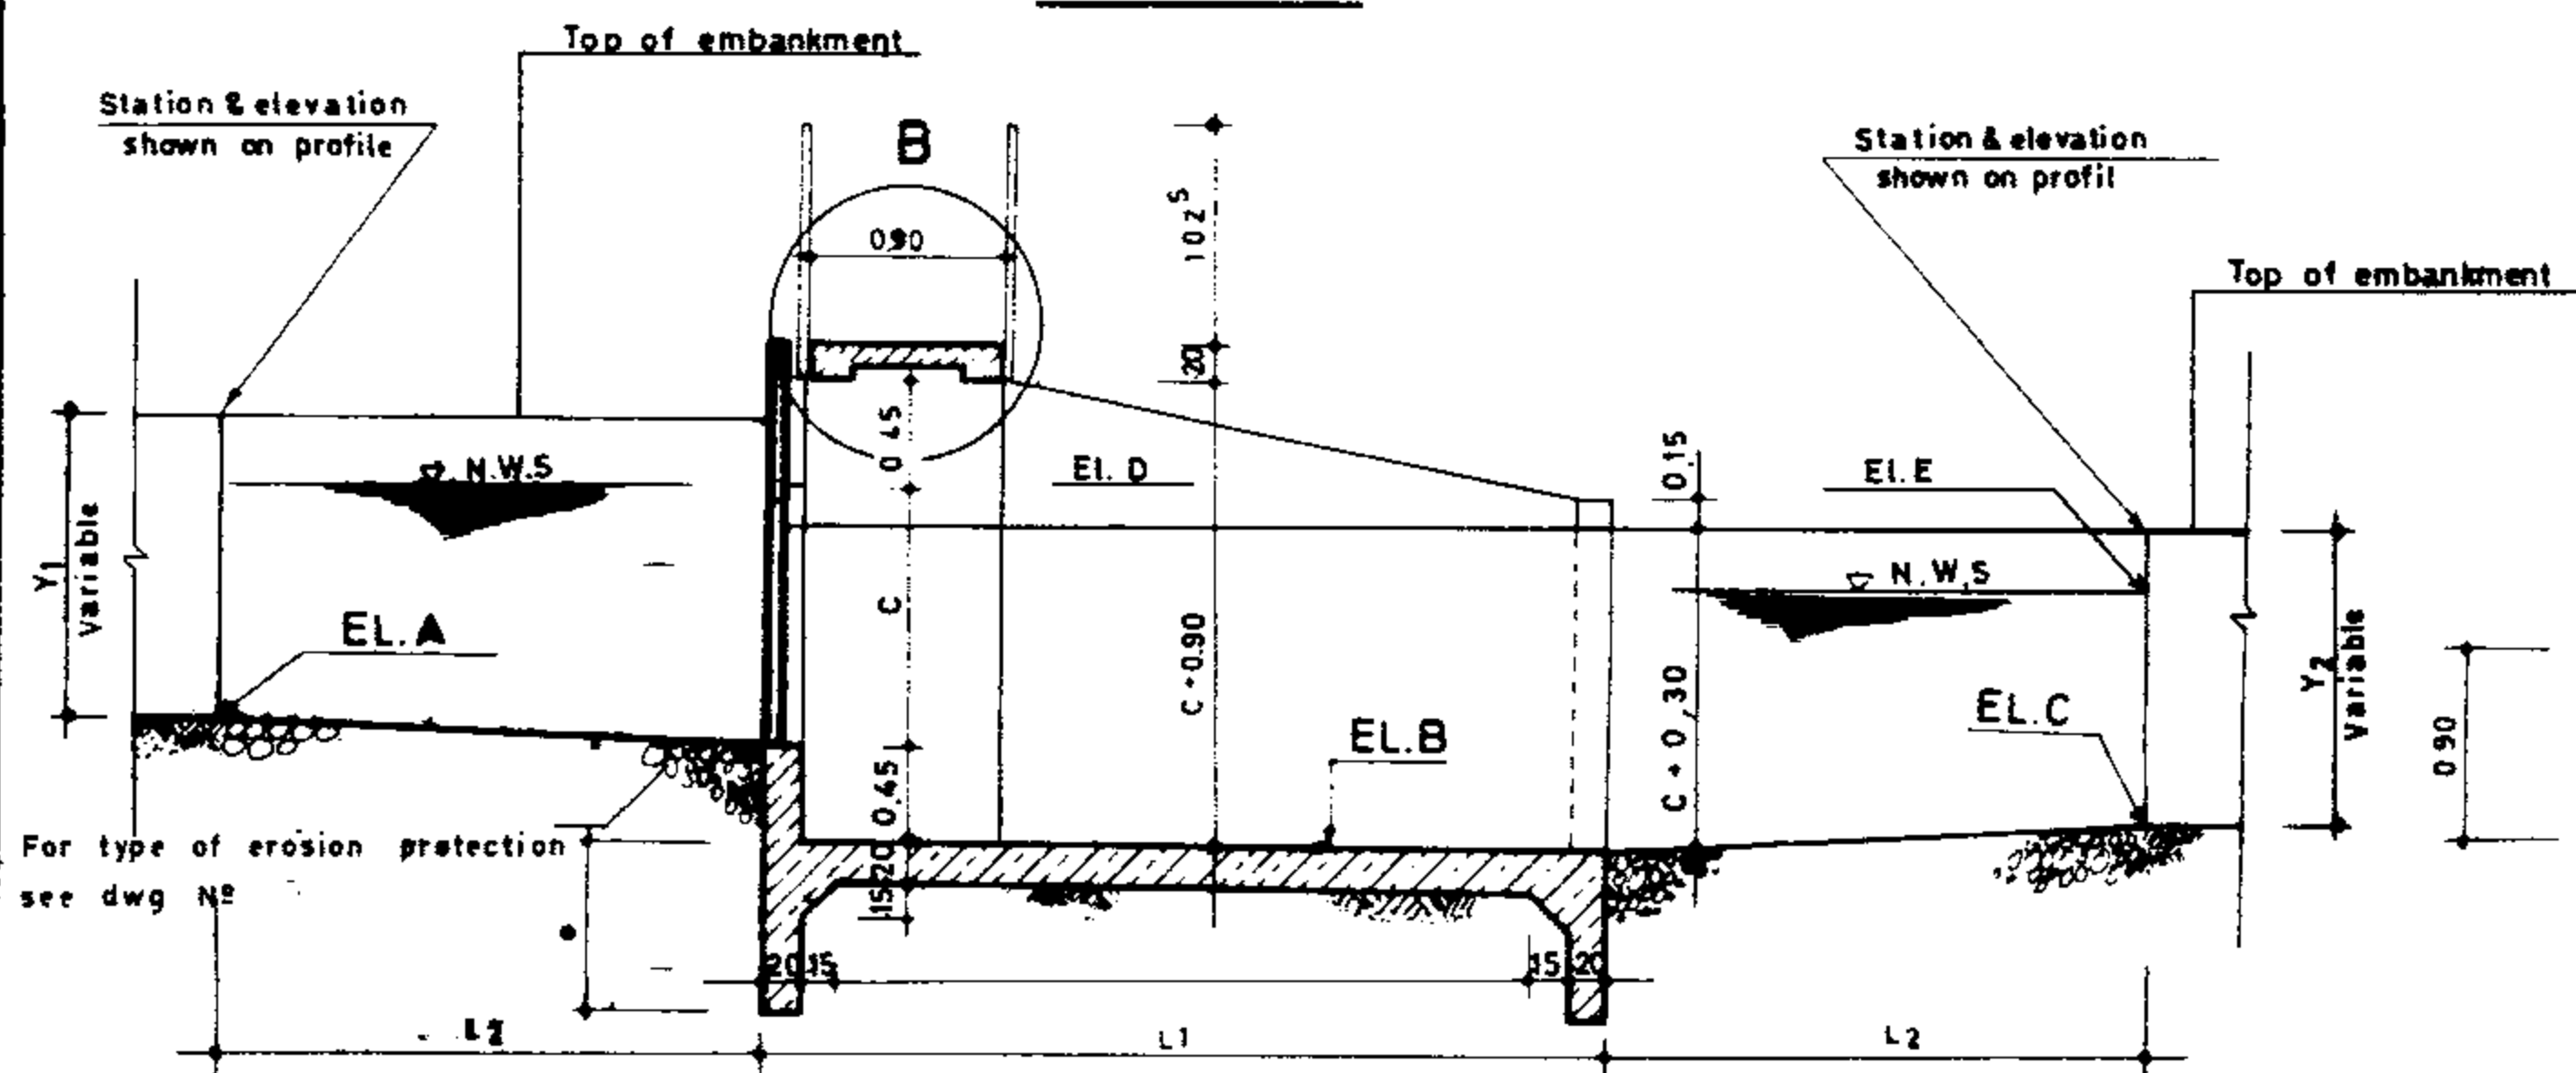

SECTION A-A

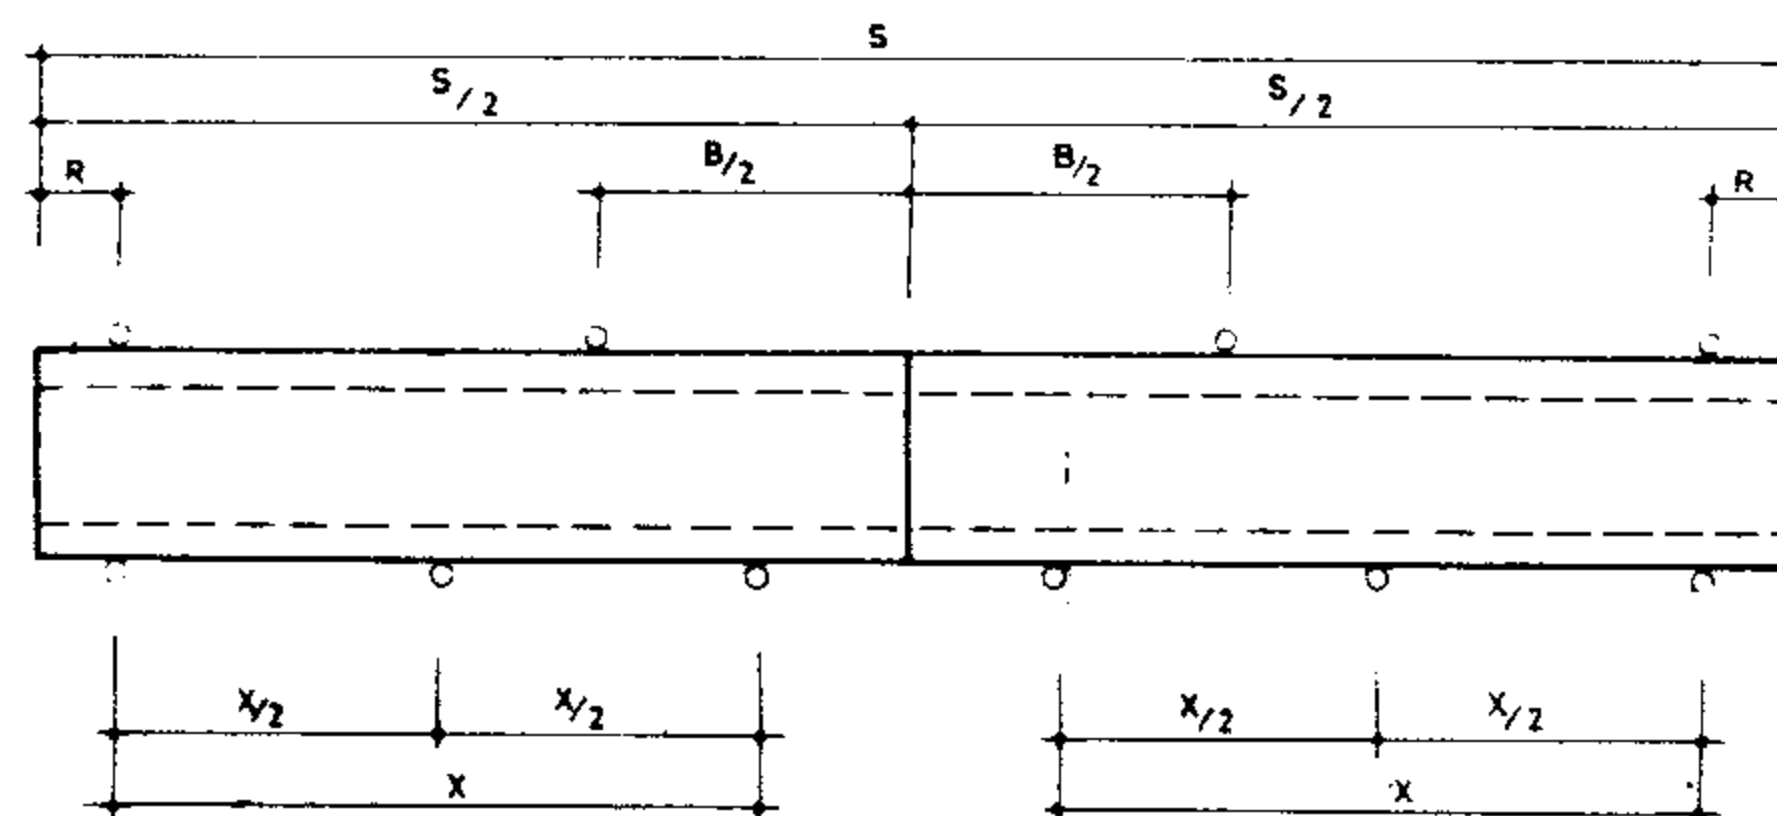

PLAN
OPERATING DECK

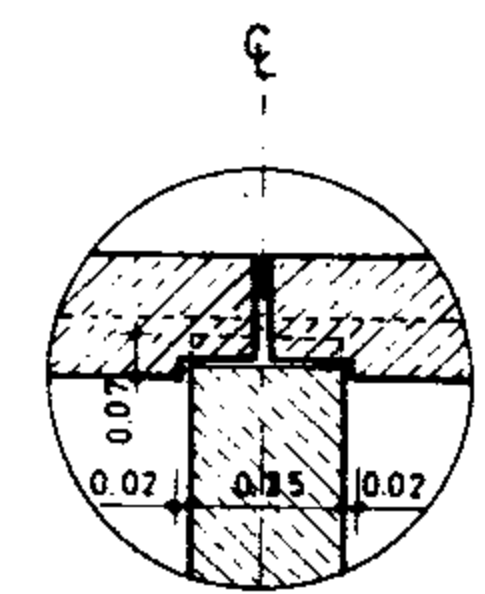


DETAIL "A"


REFERENCE DWGS For reinforcement see dwg. No. 12/4/3/01
 For general notes and minimum requirements see dwgs. No. 20/2/1/01 TO 20/2/1/03
 For check drops selecting procedure see dwg. No. 12/3/1/01
 For construction detail of "gate frame guide" see dwg. No. 12/6/1/01

Scale: N.T.S. IRRIGATION & DRAINAGE STANDARDS
 Date: DWG. No. 12/4/1/02 45 Cm CHECK DROP (Earth canal)
 Approved: Sheet No. 2 of 5 Rev. No. Q=1600~3200 L/Sec
 PLAN & SECTION


ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BU...
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

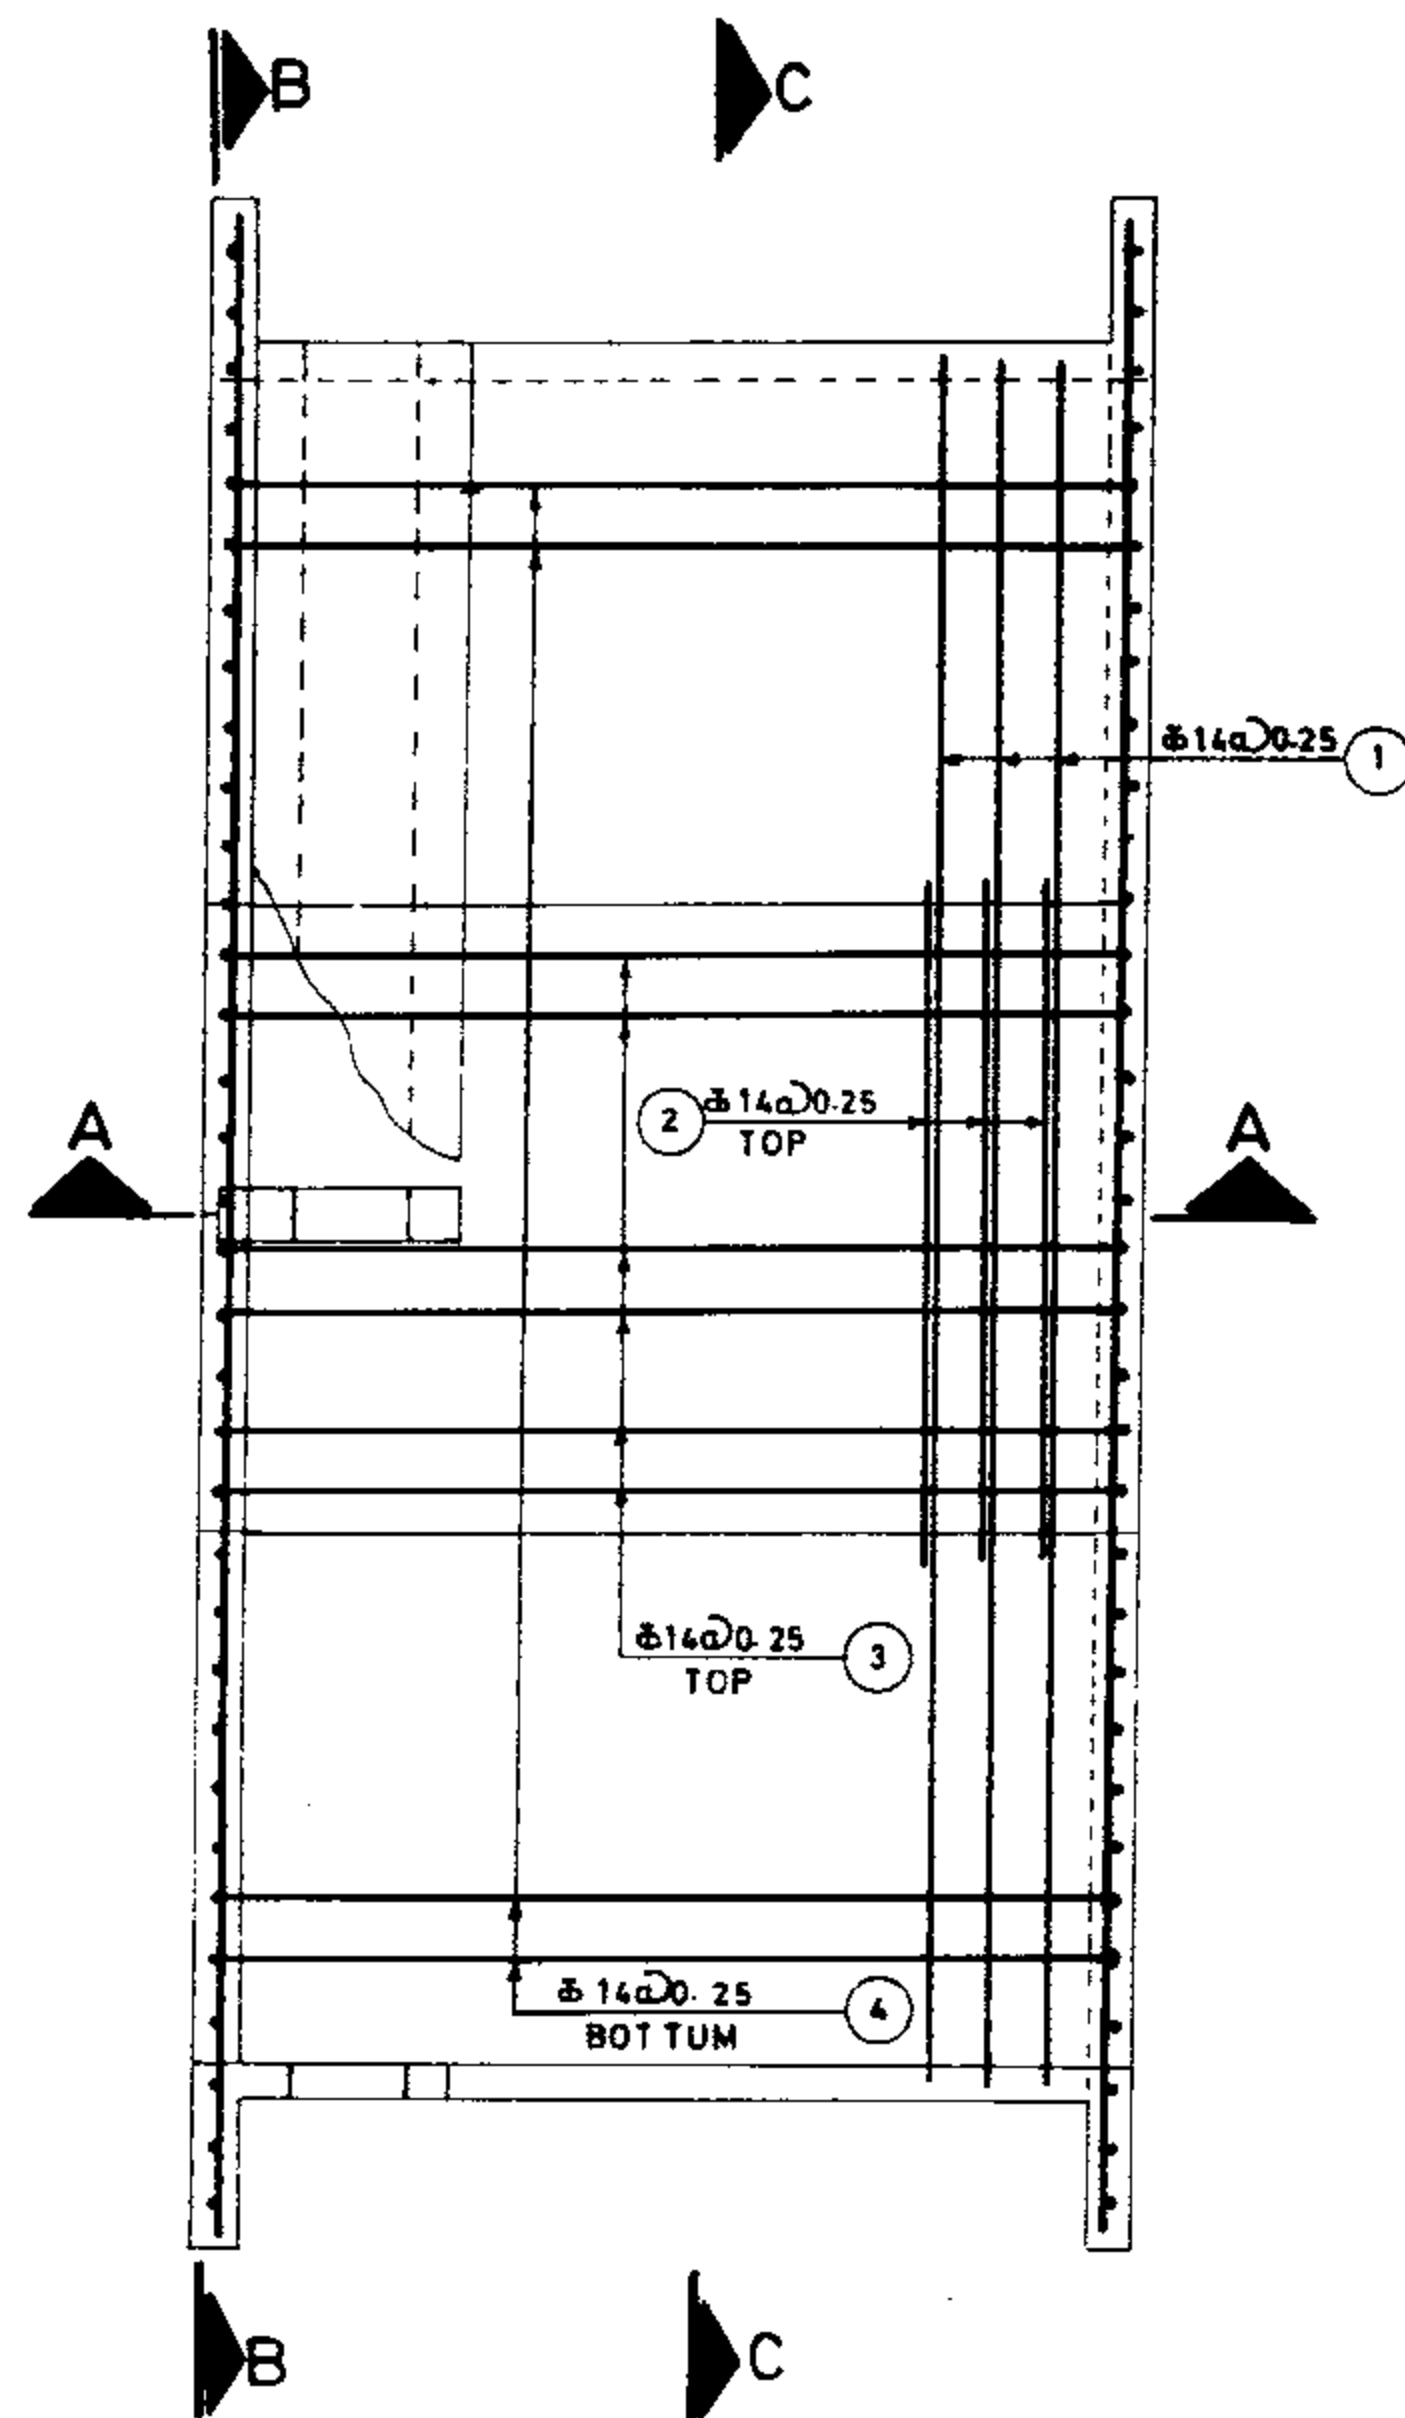


PLAN

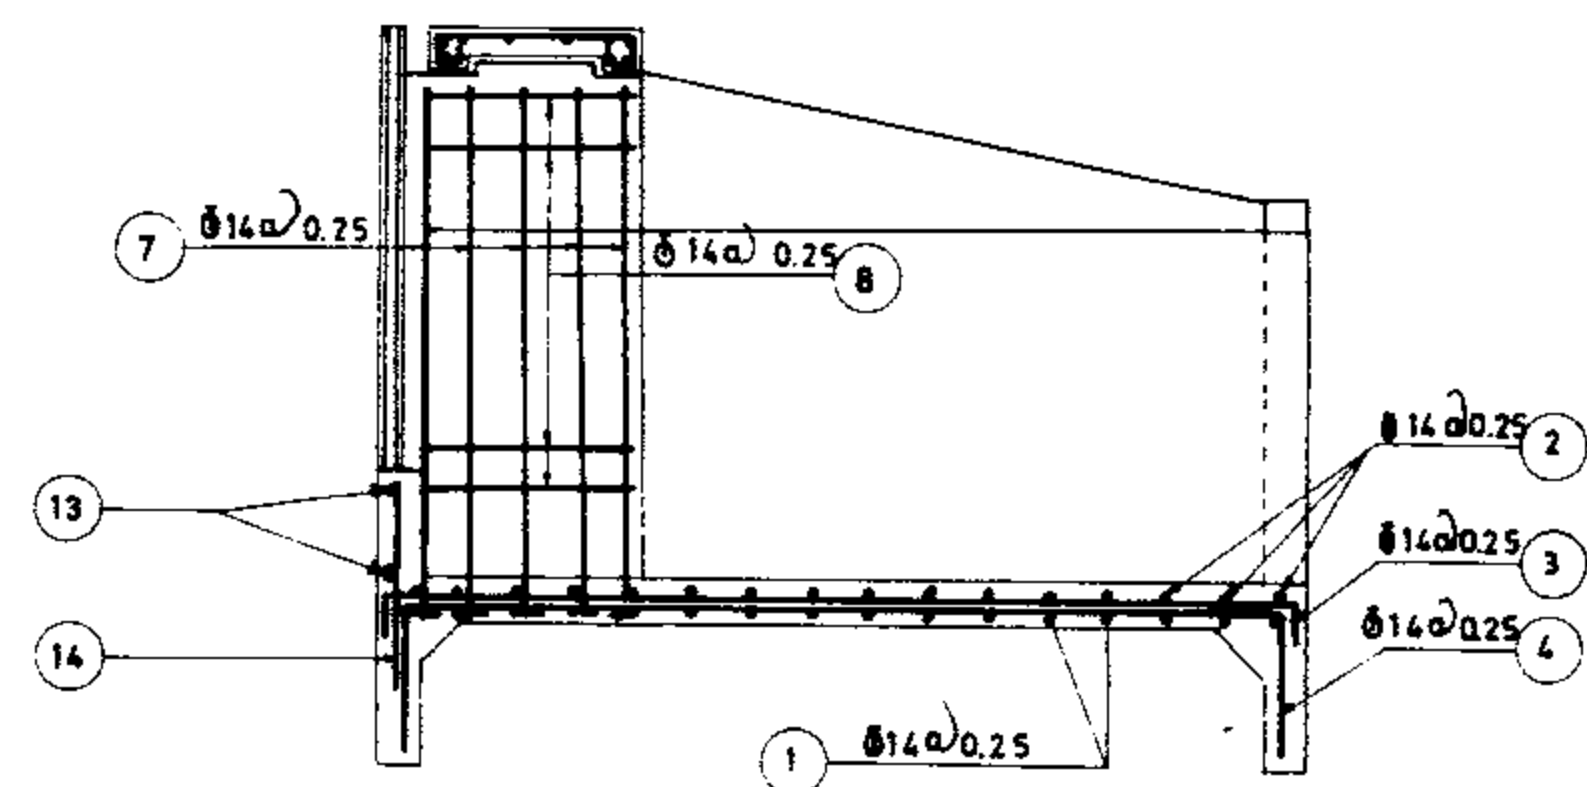


SECTION A-A

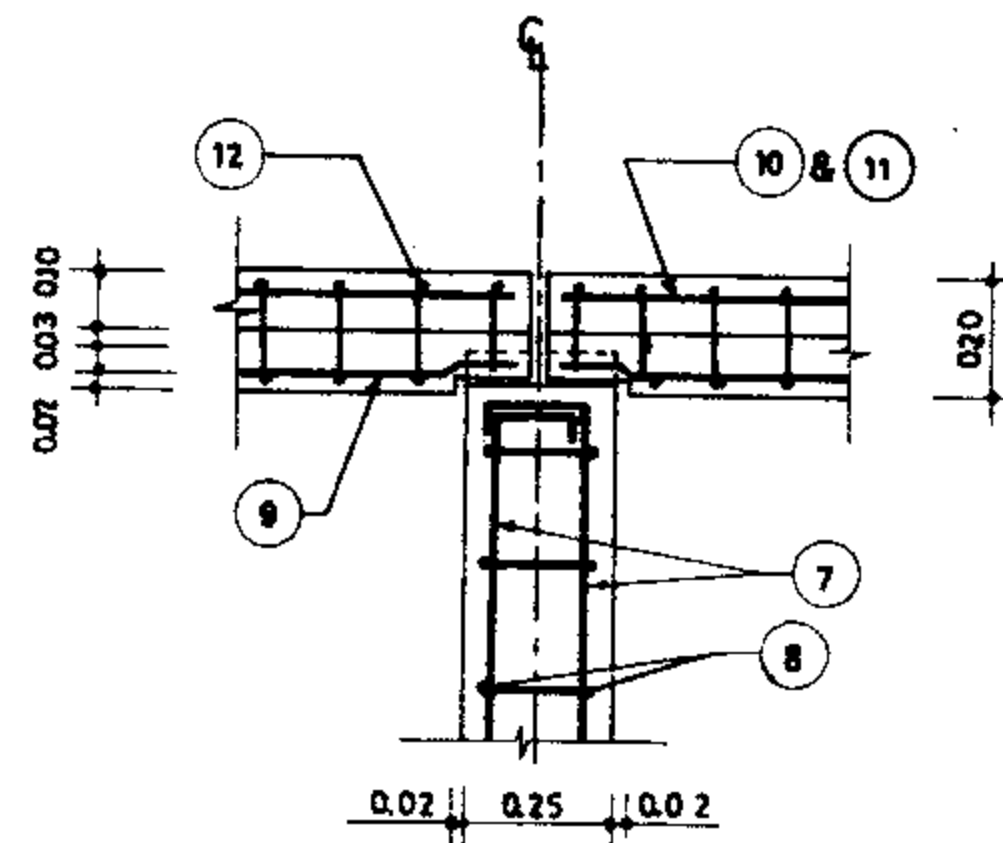


DETAIL "A"

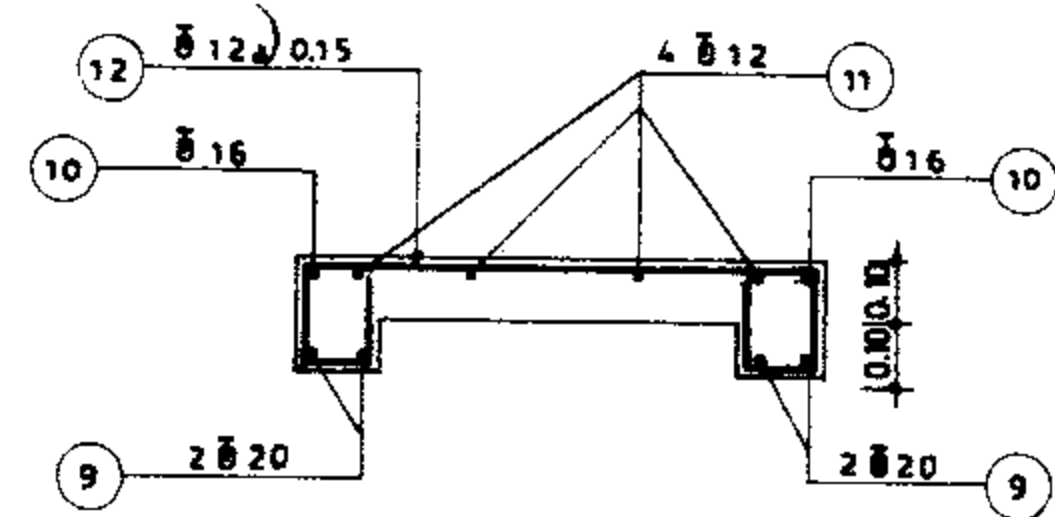


SECTION D-D

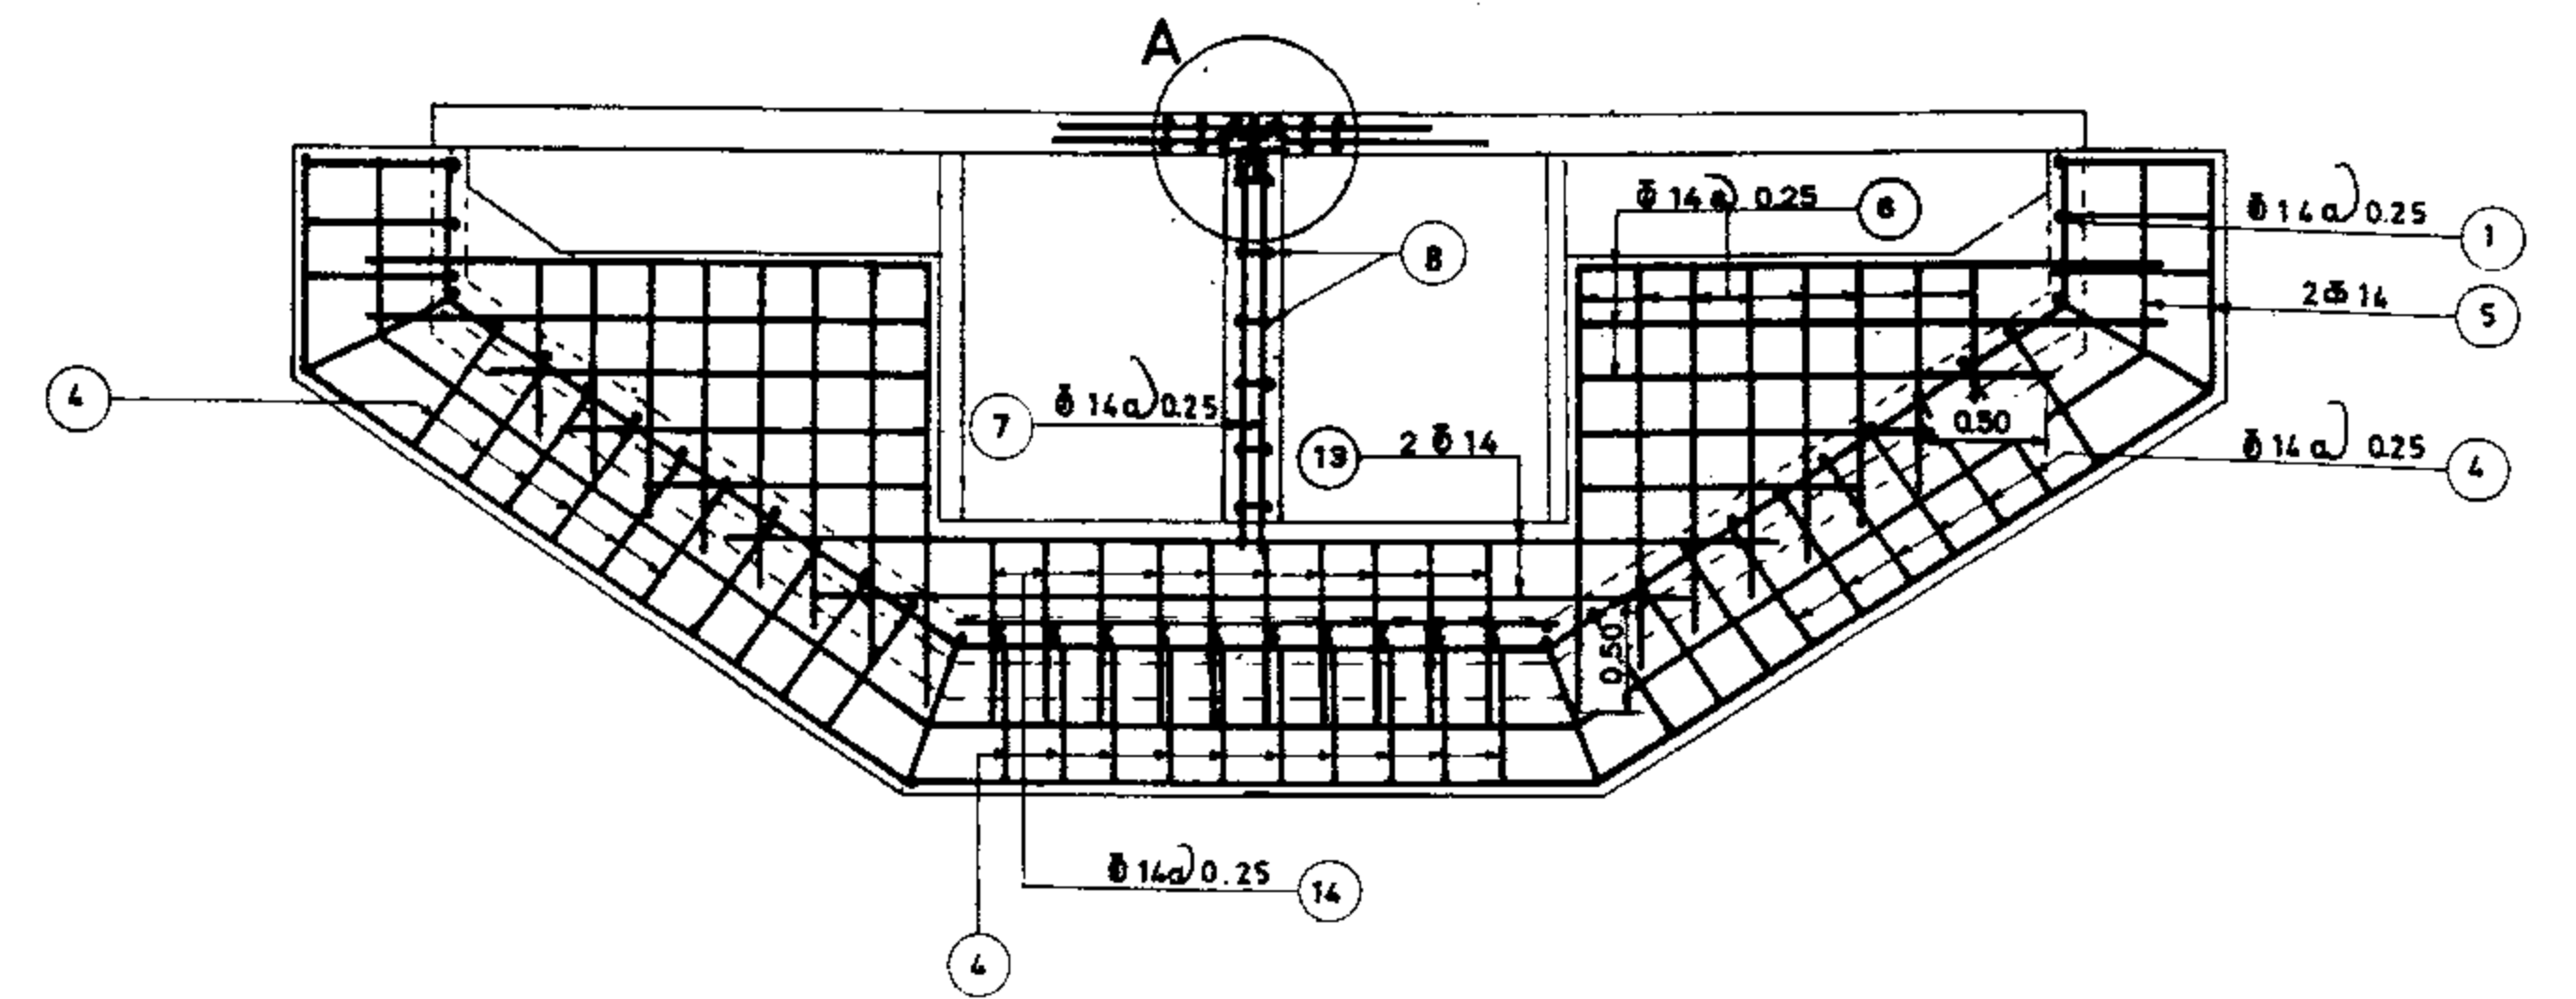

SECTION B-B

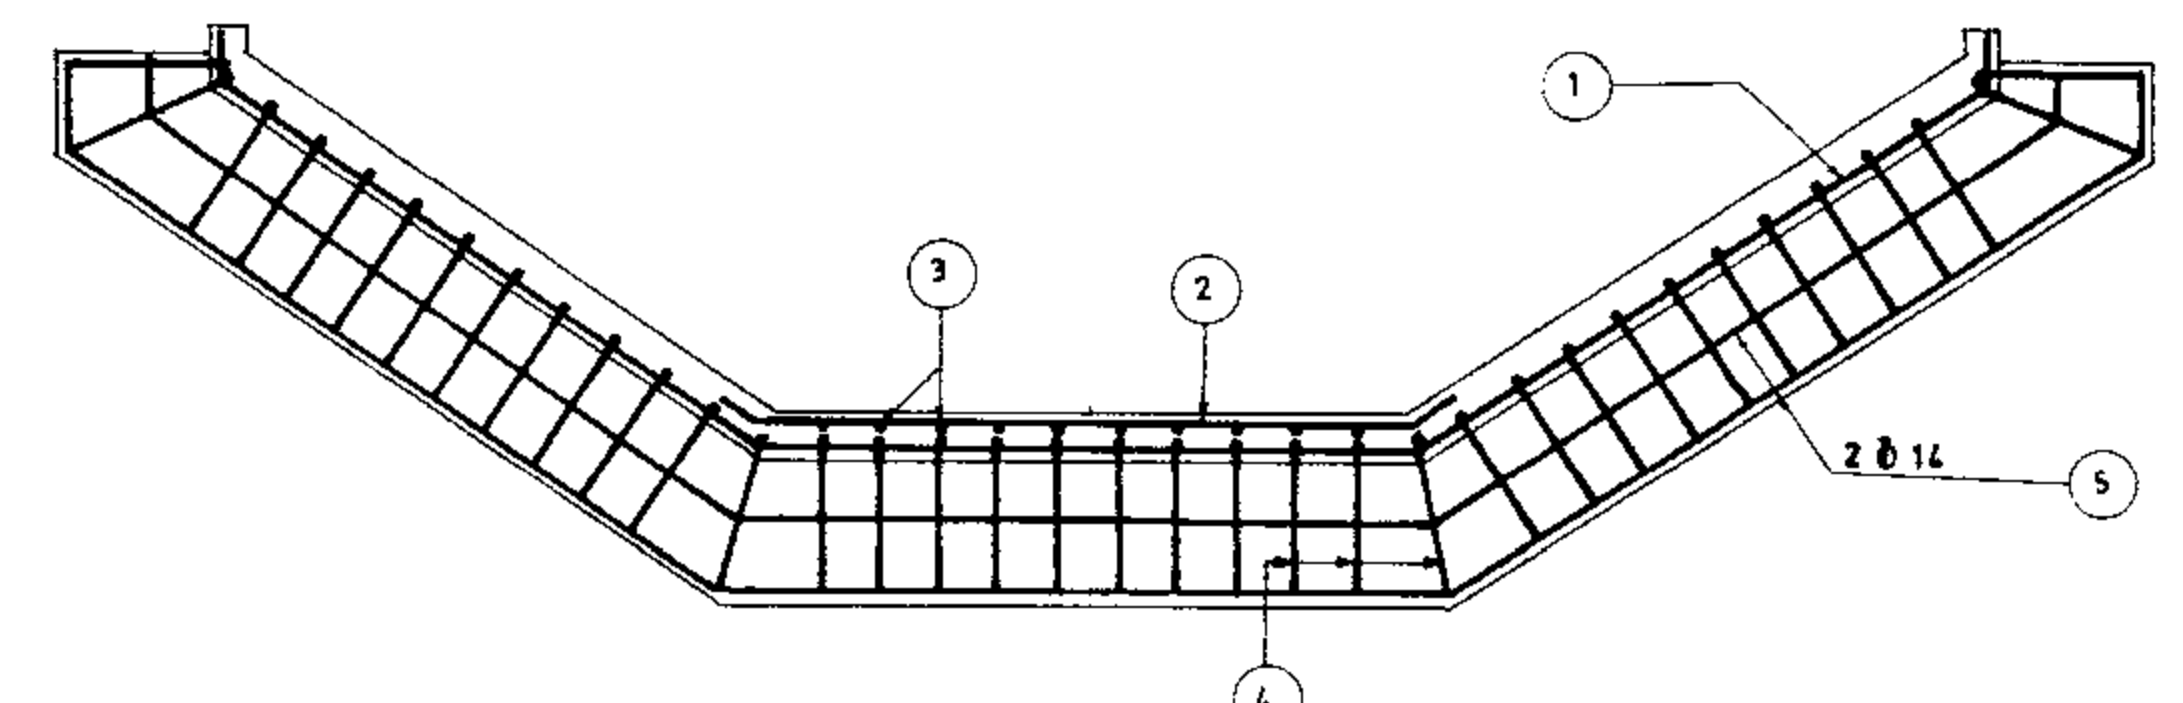

SECTION C-C

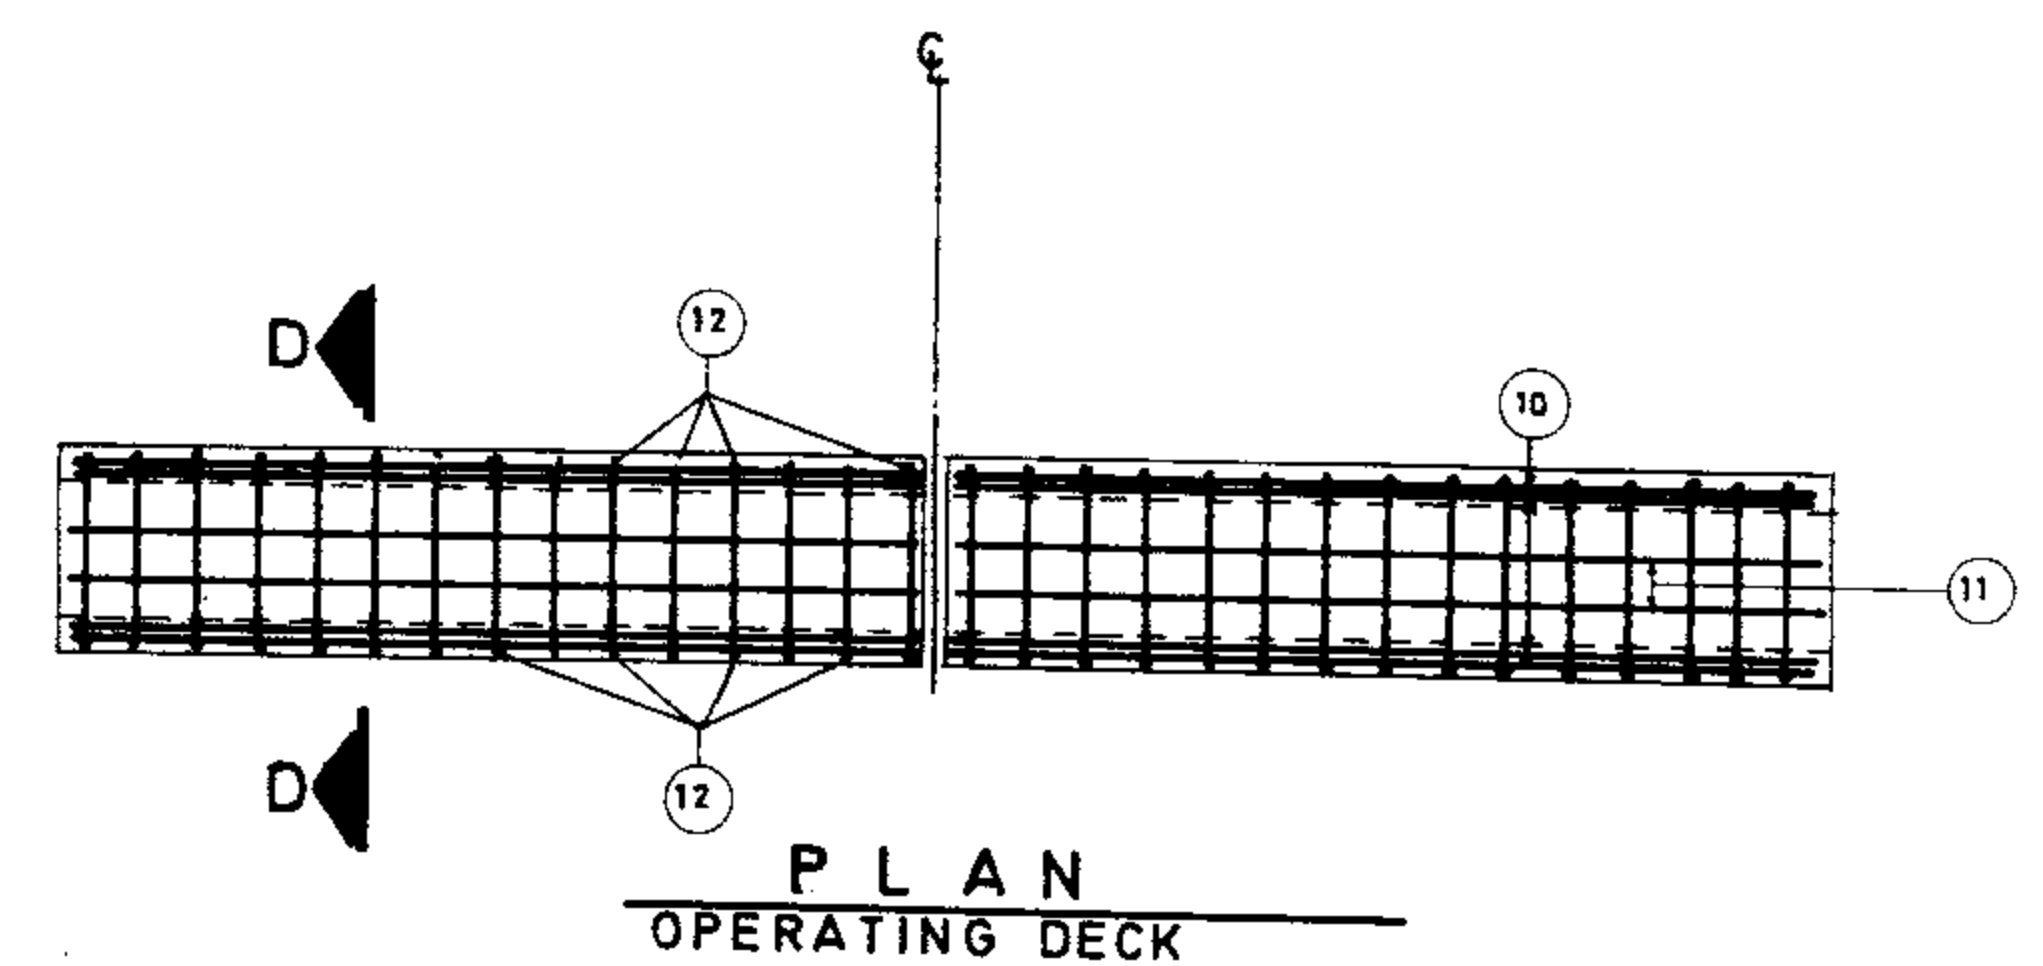

PLAN
OPERATING DECK

REFERENCE DWGS. For construction detail see dwgs. No. 12/4/1/01 & 12/4/1/02
For reinforcement tables see dwgs. No. 12/4/3/02, 12/4/3/03

Scale: 1:50

Date:

Approved:

DWG. No. 12/4/3/01

Sheet No. 3 of 5

Rev.No.

IRRIGATION & DRAINAGE STANDARDS

CHECK DROP
Q = 1600 ~ 3200 l/sec.
REINFORCEMENT
PLAN & SECTION

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

STR.1

ردیف	Ø	№	FORM	Unit leng	Total leng	UWt kg	Total weight
1	14	11		7.42	81.52	1.21	98.78
2	14	11		2.73	30.03	1.21	36.34
3	14	10		2.82	28.20	1.21	34.12
4	14	33		3.62	119.46	1.21	144.55
5	14	4		8.14	32.56	1.21	39.40
6	14	20		1.44	28.80	1.21	34.85
7	14	5		4.67	23.35	1.21	28.25
8	14	8		2.74	21.92	1.21	26.52
9	20	8		3.12	24.96	2.47	61.65
10	16	4		3.12	12.48	1.58	19.72
11	12	8		3.12	24.96	0.888	22.16
12	12	42		1.50	63.00	0.888	55.94
13	14	2		4.50	9.00	1.21	10.89
14	14	10		1.00	10.00	1.21	12.10
						625.25 Kg	

STR.2

ردیف	Ø	№	FORM	Unit leng	Total leng	UWt kg	Total weight
1	14	12		7.78	93.36	1.21	112.97
2	14	12		2.73	32.76	1.21	39.64
3	14	10		2.92	29.20	1.21	35.33
4	14	36		3.63	123.42	1.21	149.34
5	14	4		8.50	34.00	1.21	41.14
6	14	22		1.52	33.44	1.21	40.46
7	14	5		4.87	24.35	1.21	29.46
8	14	9		2.74	24.66	1.21	29.84
9	20	8		3.27	26.16	2.47	64.62
10	16	4		3.27	13.08	1.58	20.67
11	12	8		3.27	26.16	0.888	23.23
12	12	44		1.50	66.00	0.888	58.61
13	14	2		4.50	9.00	1.21	10.89
14	14	10		1.00	10.00	1.21	12.10
						668.30 Kg	

STR.3

ردیف	Ø	№	FORM	Unit leng	Total leng	UWt kg	Total weight
1	14	14		8.14	113.96	1.21	137.89
2	14	14		2.73	38.22	1.21	46.25
3	14	10		3.47	34.70	1.21	41.99
4	14	36		4.18	150.48	1.21	182.08
5	14	4		8.86	35.44	1.21	42.88
6	14	24		1.59	38.16	1.21	46.17
7	14	5		5.07	25.35	1.21	30.67
8	14	9		2.74	24.66	1.21	29.84
9	20	8		3.42	27.36	2.47	67.58
10	16	4		3.42	13.68	1.58	21.61
11	12	8		3.42	27.36	0.888	24.30
12	12	46		1.50	69.00	0.888	61.27
13	14	2		4.50	9.00	1.21	10.89
14	14	10		1.00	10.00	1.21	12.10
						755.52 Kg	

STR.4

ردیف	Ø	№	FORM	Unit leng	Total leng	UWt kg	Total weight
1	14	17		8.50	144.50	1.21	174.85
2	14	17		2.73	46.41	1.21	56.16
3	14	10		4.17	41.70	1.21	50.46
4	14	37		4.88	180.56	1.21	218.48
5	14	4		9.22	36.88	1.21	44.62
6	14	26		1.67	43.42	1.21	52.54
7	14	5		5.27	26.35	1.21	31.98
8	14	9		2.74	24.66	1.21	29.84
9	20	8		3.57	28.56	2.47	70.54
10	16	4		3.57	14.28	1.58	22.56
11	12	8		3.57	28.56	0.888	25.36
12	12	48		1.50	72.00	0.888	63.94
13	14	2		4.50	9.00	1.21	10.89
14	14	10		1.00	10.00	1.21	12.10
						864.22 Kg	

STR.5

ردیف	Ø	№	FORM	Unit leng	Total leng	UWt kg	Total weight
1	14	12		8.23	98.76	1.21	119.50
2	14	12		2.97	35.64	1.21	43.12
3	14	12		2.92	35.04	1.21	42.40
4	14	37		3.63	134.31	1.21	162.52
5	14	4		9.08	36.32	1.21	43.95
6	14	22		1.55	34.10	1.21	41.26
7	14	5		4.97	24.85	1.21	30.07
8	14	9		2.74	24.66	1.21	29.84
9	20	8		3.55	28.40	2.47	70.15
10	16	4		3.55	14.20	1.58	22.44
11	12	8		3.55	28.40	0.888	25.22
12	12	48		1.50	72.00	0.888	63.94
13	14	2		4.90	9.80	1.21	11.85
14	14	12		1.00	12.00	1.21	14.52
						720.79 Kg	

STR.6

ردیف	Ø	№	FORM	Unit leng	Total leng	UWt kg	Total weight
1	14	14		8.56	119.84	1.21	145.01
2	14	14		2.97	41.58	1.21	50.31
3	14	12		3.47	41.64	1.21	50.38
4	14	38		4.18	158.84	1.21	192.20
5	14	4		9.44	37.76	1.21	45.69
6	14	24		1.63	39.12	1.21	47.34
7	14	5		5.17	25.85	1.21	31.28
8	14	9		2.74	24.66	1.21	29.84
9	20	8		3.70	29.60	2.47	73.11
10	16	4		3.70	14.80	1.58	23.38
11	12	8		3.70	29.60	0.888	26.28
12	12	48		1.50	72.00	0.888	63.94
13	14	2		4.90	9.80	1.21	11.85
14	14	12		1.00	12.00	1.21	14.52
						805.14 Kg	

REFERENCE DWGS: For reinforcement see dwg №. 12/4/3/01
 For bars with variable unit length see note under the same title at dwg. № 20/2/1/01

Scale:	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. № 12/4/3/02	
Approved:	Sheet № 4 of 5	Rev. №

CHECK DROP
 LIST OF REINFORCEMENT
 STR.1 TO 6

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

STR.7

Pos	Ø	Nº	FORM	Unit leng	Total leng	UWt kg	Total weight
1	14	17		8.92	151.64	1.21	183.48
2	14	17		2.97	50.49	1.21	61.09
3	14	12		4.17	50.04	1.21	60.55
4	14	40		4.88	195.20	1.21	236.19
5	14	4		9.80	39.20	1.21	47.43
6	14	26		1.70	44.20	1.21	53.48
7	14	5		5.37	26.85	1.21	32.49
8	14	10		2.74	27.40	1.21	33.15
9	20	8		3.85	30.80	2.47	76.08
10	16	4		3.85	15.40	1.58	24.33
11	12	8		3.85	30.80	0.888	27.35
12	12	52		1.50	78.00	0.888	69.26
13	14	2		4.90	9.80	1.21	11.86
14	14	12		1.00	12.00	1.21	14.52
931.26 Kg							

STR.8

Pos	Ø	Nº	FORM	Unit leng	Total leng	UWt kg	Total weight
1	14	12		8.60	103.20	1.21	124.87
2	14	12		3.37	40.44	1.21	48.93
3	14	14		2.92	40.88	1.21	49.46
4	14	38		3.63	137.94	1.21	166.91
5	14	4		9.48	37.92	1.21	45.88
6	14	22		1.55	34.10	1.21	41.26
7	14	5		4.97	24.85	1.21	30.07
8	14	9		2.74	24.66	1.21	29.84
9	20	8		3.75	30.00	2.47	74.10
10	16	4		3.75	15.00	1.58	23.70
11	12	8		3.75	30.00	0.888	26.64
12	12	52		1.50	78.00	0.888	69.26
13	14	2		5.30	10.60	1.21	12.83
14	14	14		1.00	14.00	1.21	16.94
760.69 Kg							

STR.9

Pos	Ø	Nº	FORM	Unit leng	Total leng	UWt kg	Total weight
1	14	14		8.96	125.44	1.21	151.76
2	14	14		3.37	47.18	1.21	57.09
3	14	14		3.47	48.58	1.21	58.78
4	14	40		3.58	143.20	1.21	173.27
5	14	4		9.84	39.36	1.21	47.63
6	14	24		1.63	39.12	1.21	47.34
7	14	5		5.17	25.85	1.21	31.28
8	14	9		2.74	24.66	1.21	29.84
9	20	8		3.90	31.20	2.47	77.05
10	16	4		3.90	15.60	1.58	24.65
11	12	8		3.90	31.20	0.888	27.71
12	12	54		1.50	81.00	0.888	71.93
13	14	2		5.30	10.60	1.21	12.83
14	14	14		1.00	14.00	1.21	16.94
828.13 Kg							

STR.10

Pos	Ø	Nº	FORM	Unit leng	Total leng	UWt kg	Total weight
1	14	17		9.32	158.44	1.21	191.71
2	14	17		3.37	57.29	1.21	69.32
3	14	14		4.17	58.38	1.21	70.64
4	14	41		4.88	200.08	1.21	242.10
5	14	4		10.20	40.80	1.21	49.37
6	14	26		1.70	44.20	1.21	53.48
7	14	5		5.37	26.85	1.21	32.49
8	14	10		2.74	27.40	1.21	33.15
9	20	8		4.05	32.40	2.47	80.03
10	16	4		4.05	16.20	1.58	25.60
11	12	8		4.05	32.40	0.888	28.77
12	12	56		1.50	84.00	0.888	74.59
13	14	2		5.30	10.60	1.21	12.83
14	14	14		1.00	14.00	1.21	16.94
981.02 Kg							







STR.11

Pos	Ø	Nº	FORM	Unit leng	Total leng	UWt kg	Total weight
1	14	14		9.36	131.04	1.21	158.56
2	14	14		3.37	52.78	1.21	63.86
3	14	15		3.47	52.05	1.21	62.98
4	14	41		4.09	167.69	1.21	202.90
5	14	4		10.24	40.96	1.21	49.56
6	14	24		1.63	39.12	1.21	47.34
7	14	5		5.17	25.85	1.21	31.28
8	14	9		2.74	24.66	1.21	29.84
9	20	8		4.11	32.88	2.47	81.21
10	16	4		4.11	16.44	1.58	25.98
11	12	8		4.11	32.88	0.888	29.20
12	12	56		1.50	84.00	0.888	74.59
13	14	2		5.70	11.40	1.21	13.79
14	14	15		1.00	15.00	1.21	18.15
889.24 Kg							

REFERENCE DWGS: For reinforcement see dwg. Nº 12/4/3/01
For bars with variable unit length see note under the same title at dwg. Nº 20/2/1/01

Scale:	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. Nº 12/4/3/03	
Approved:	Sheet Nº 5 of 5	Rev. Nº
	CHECK DROP	
	LIST OF REINFORCEMENT	
	STR. 7 TO 11	

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

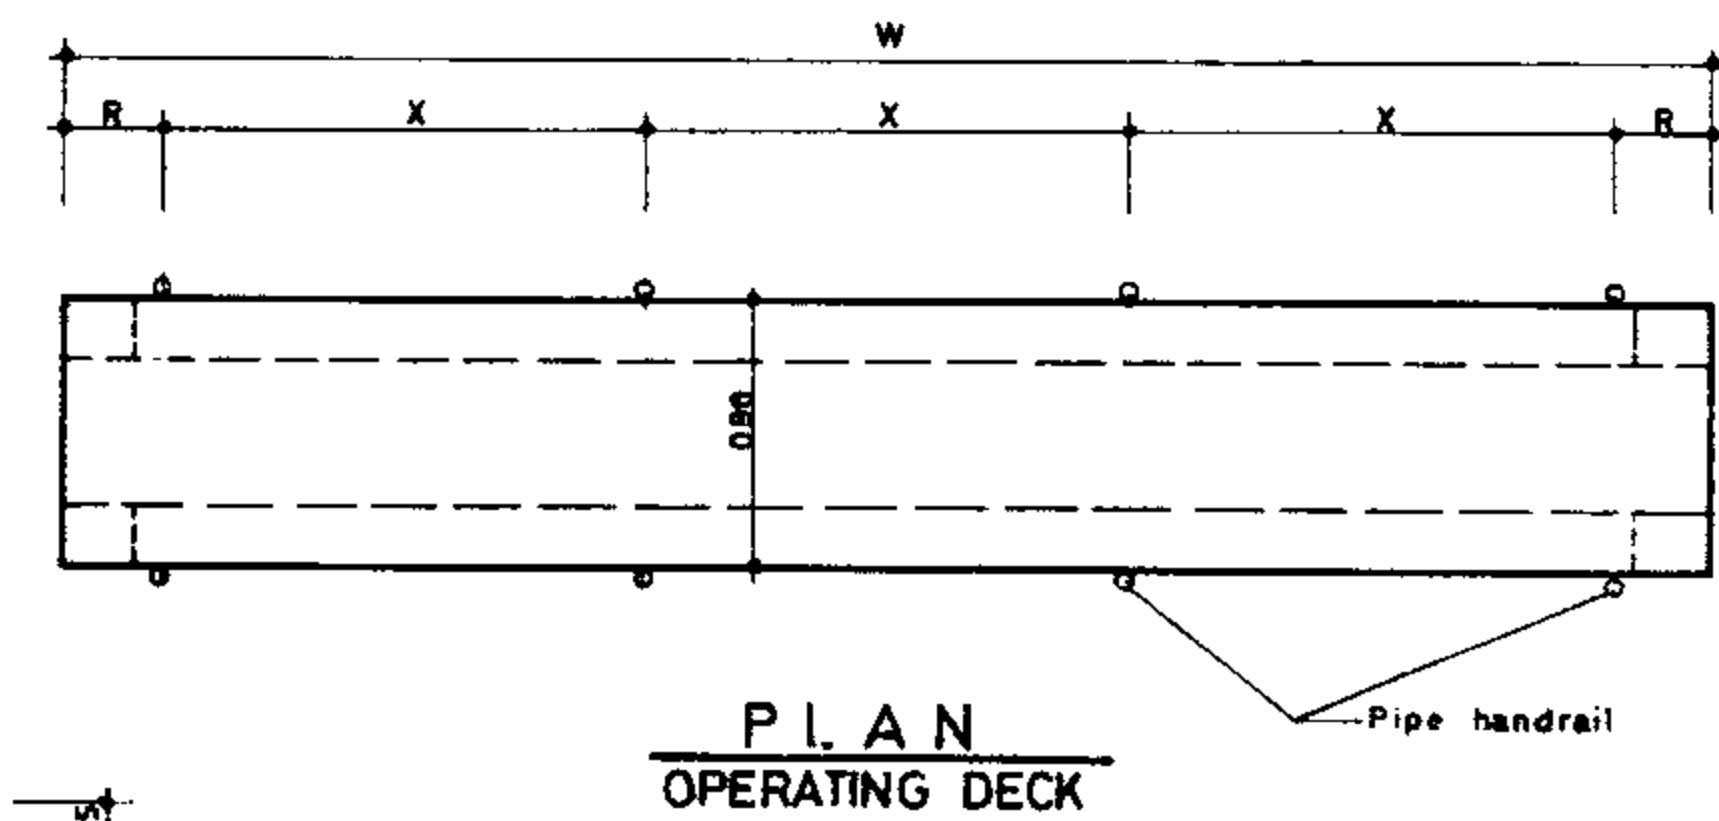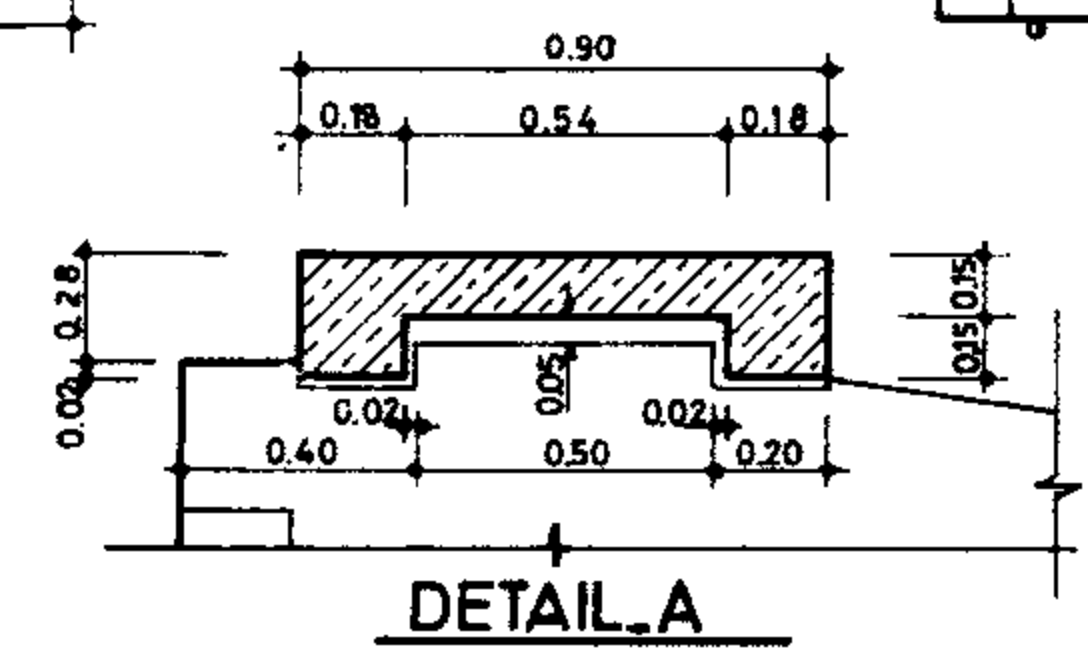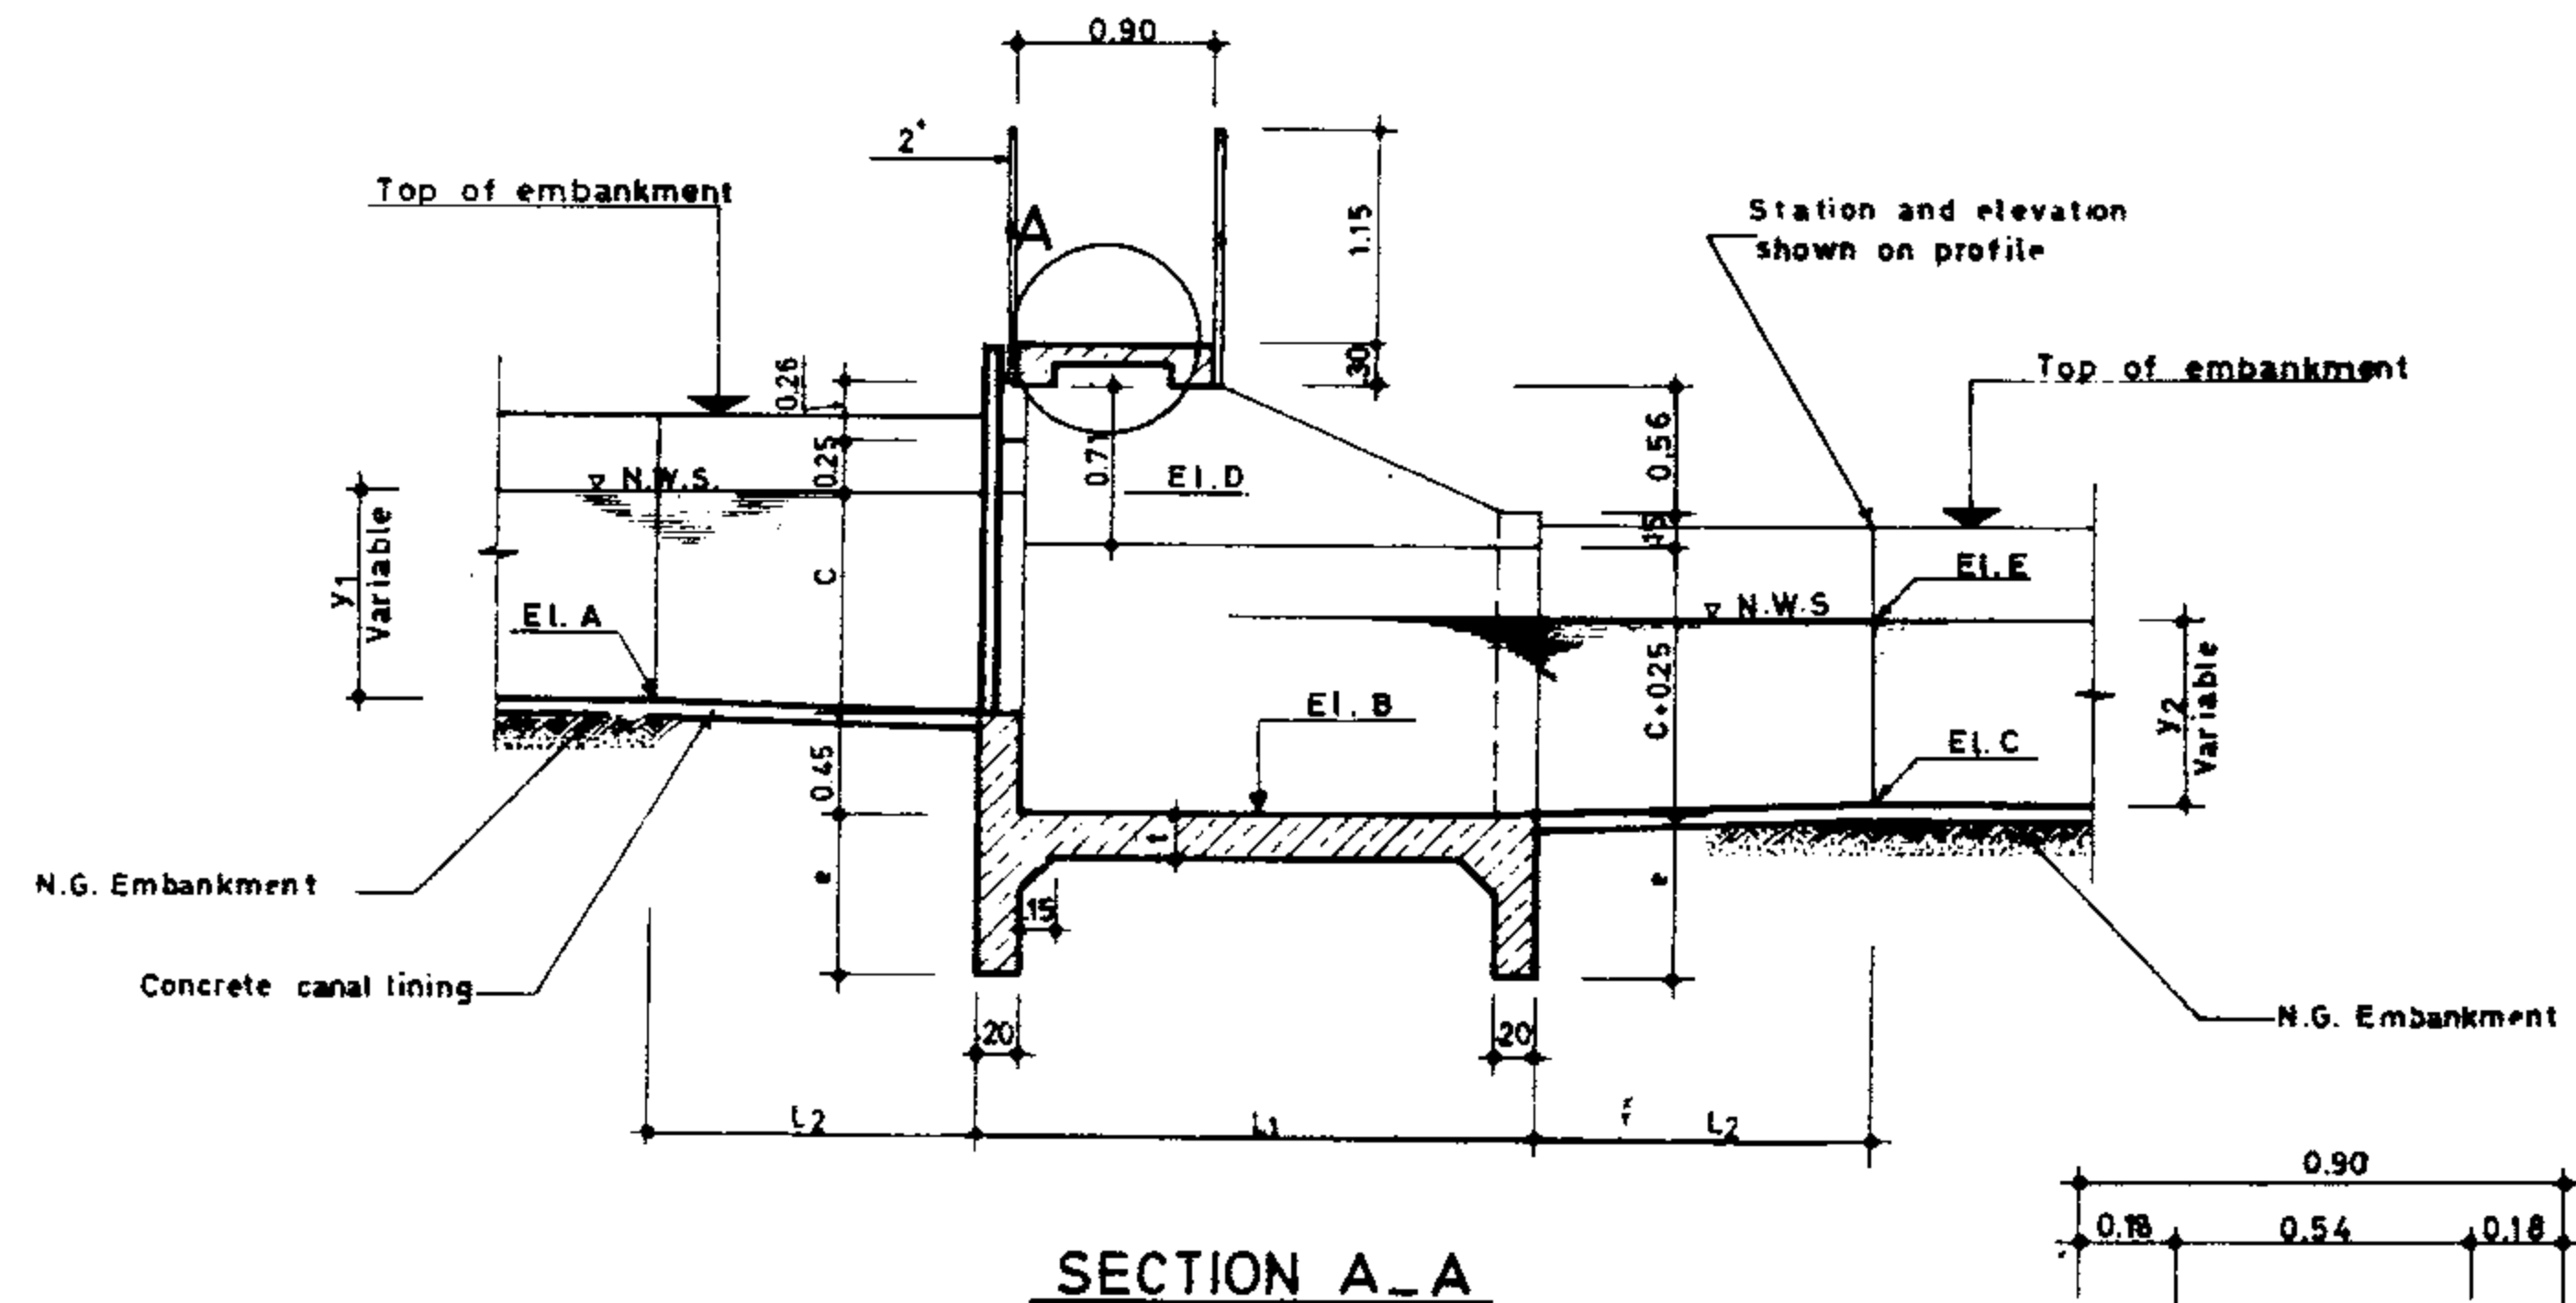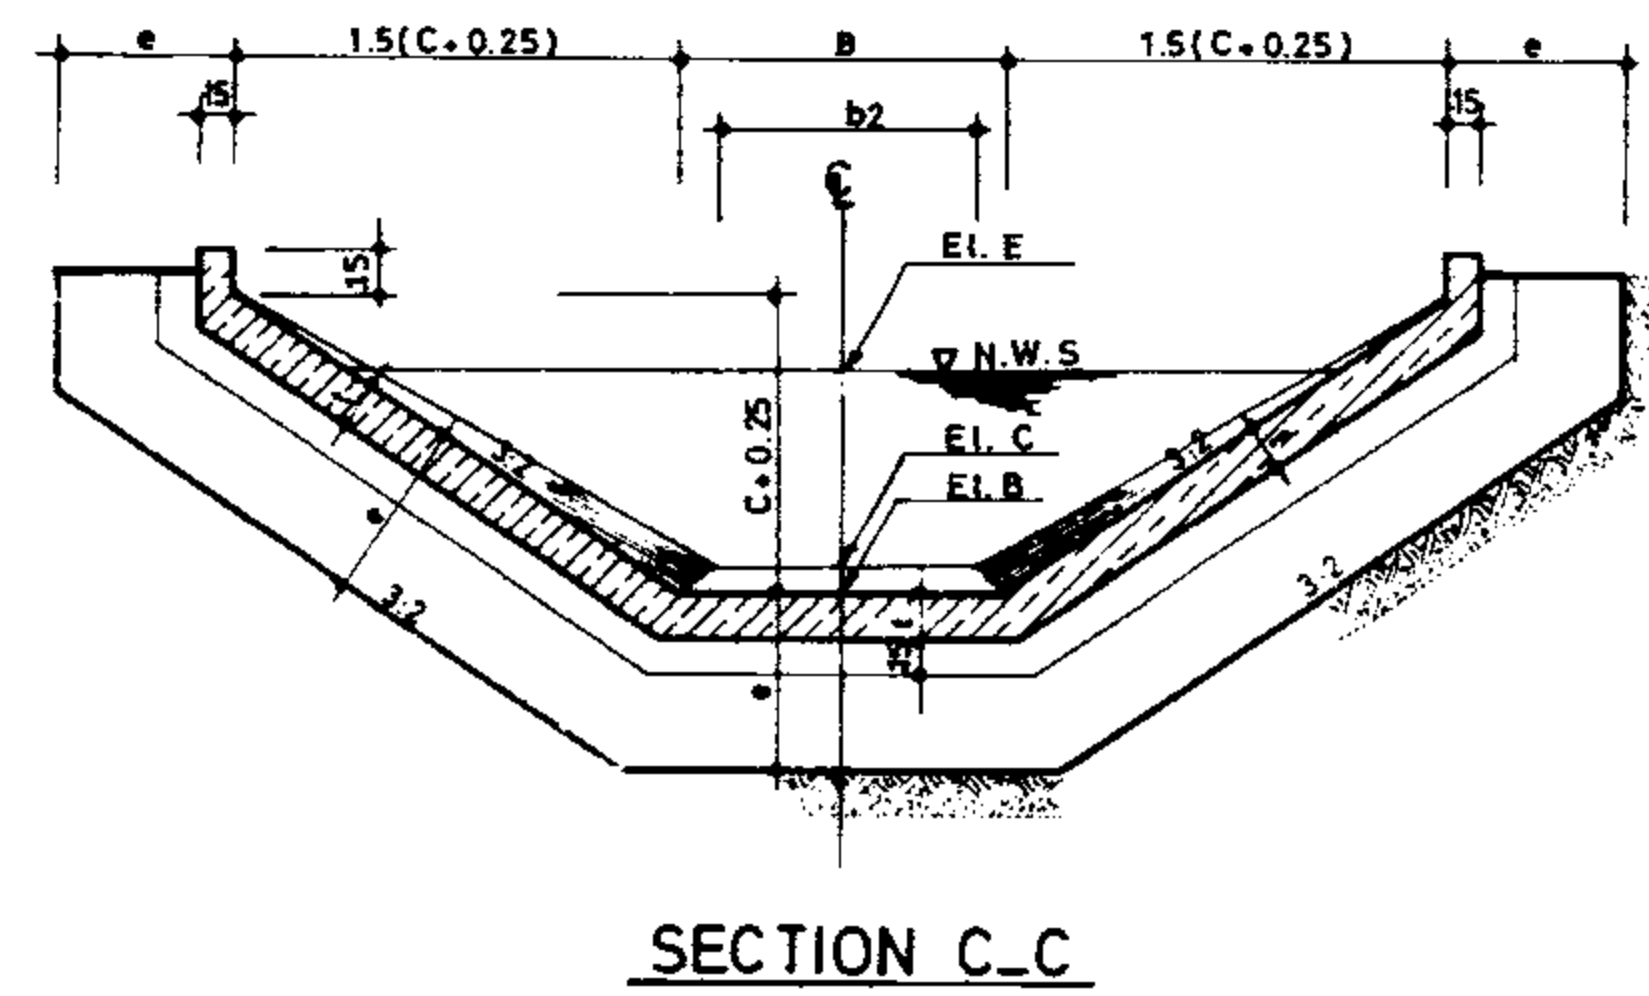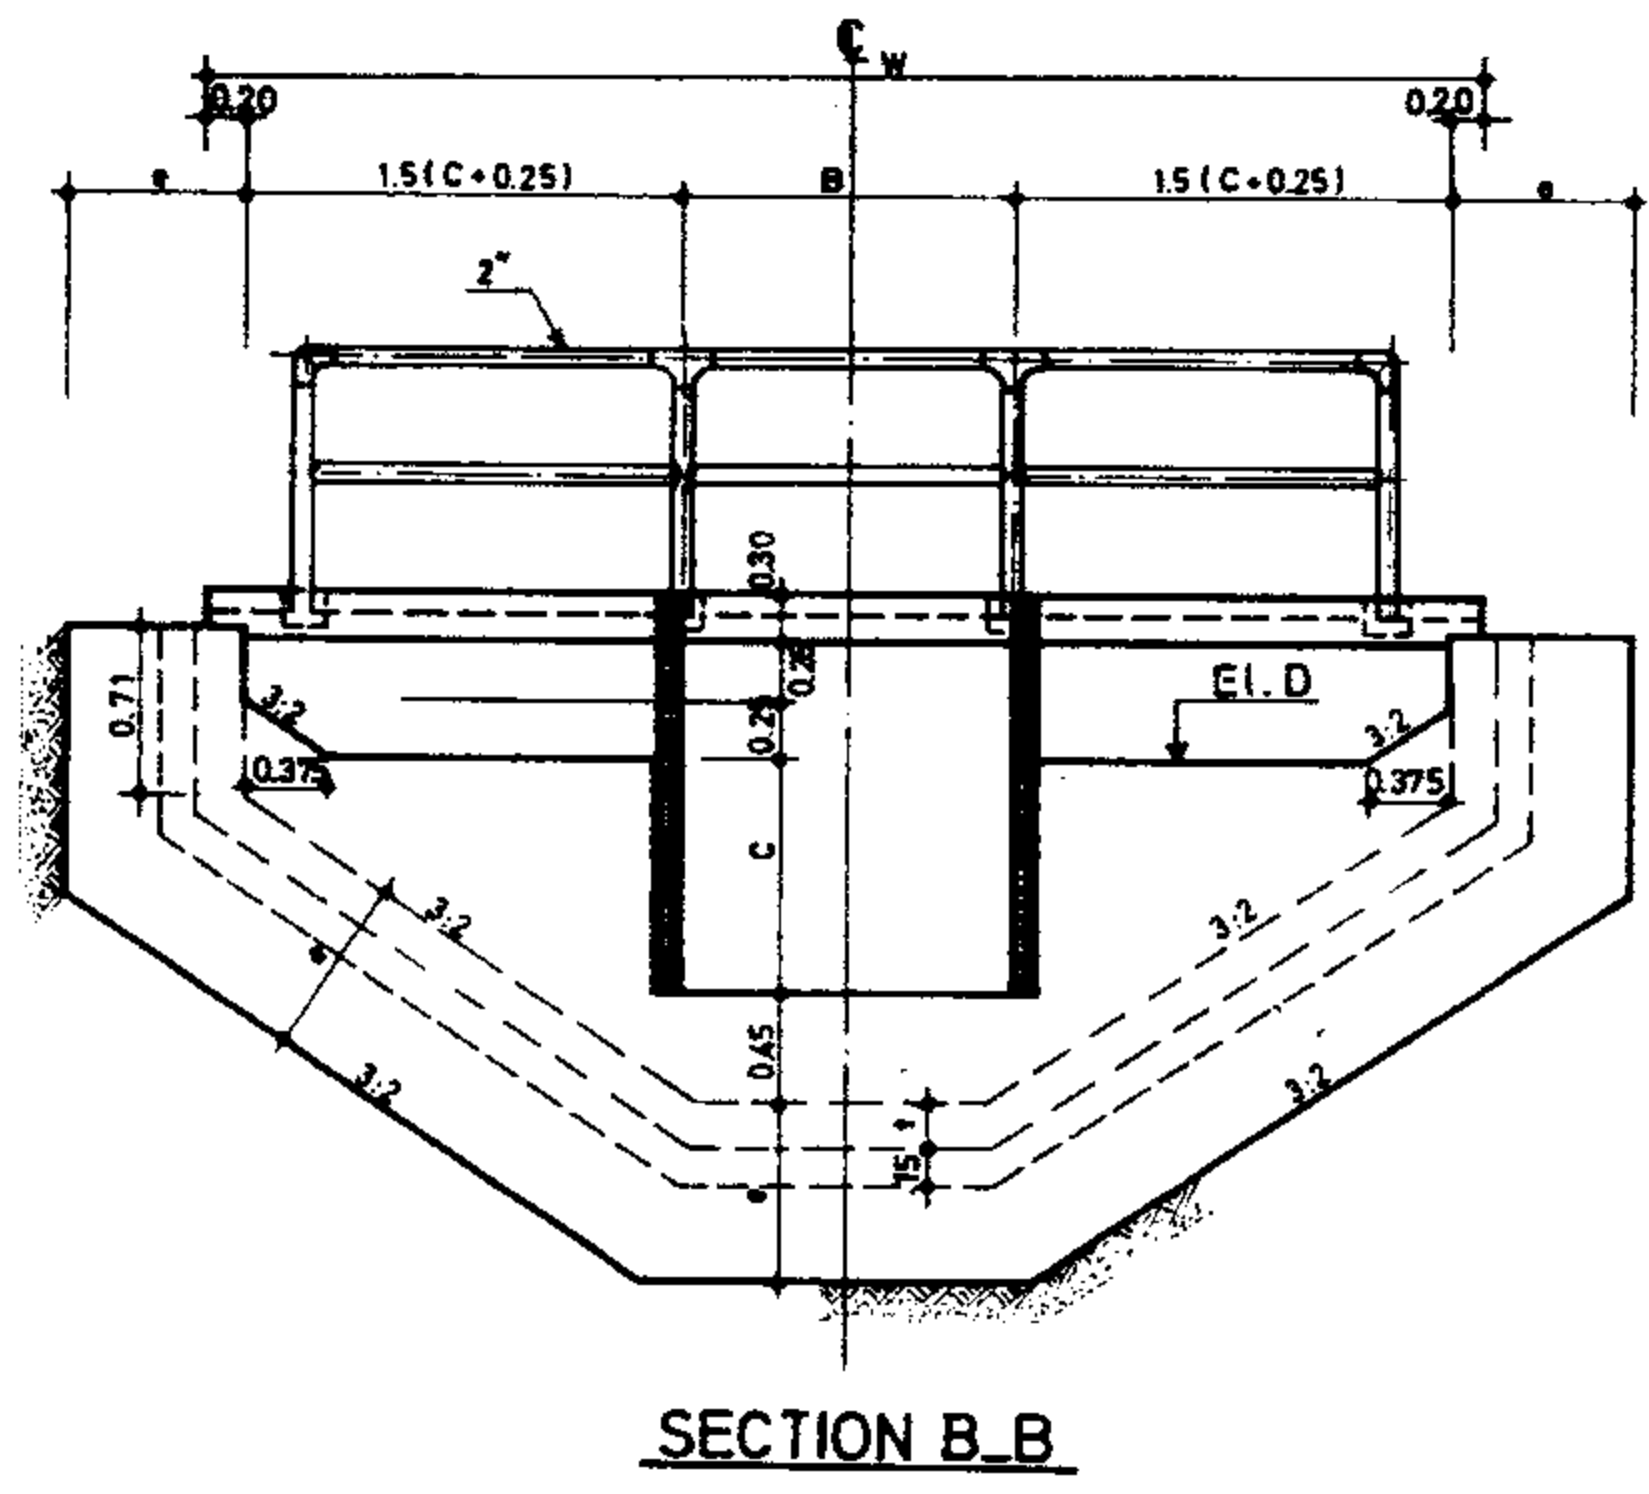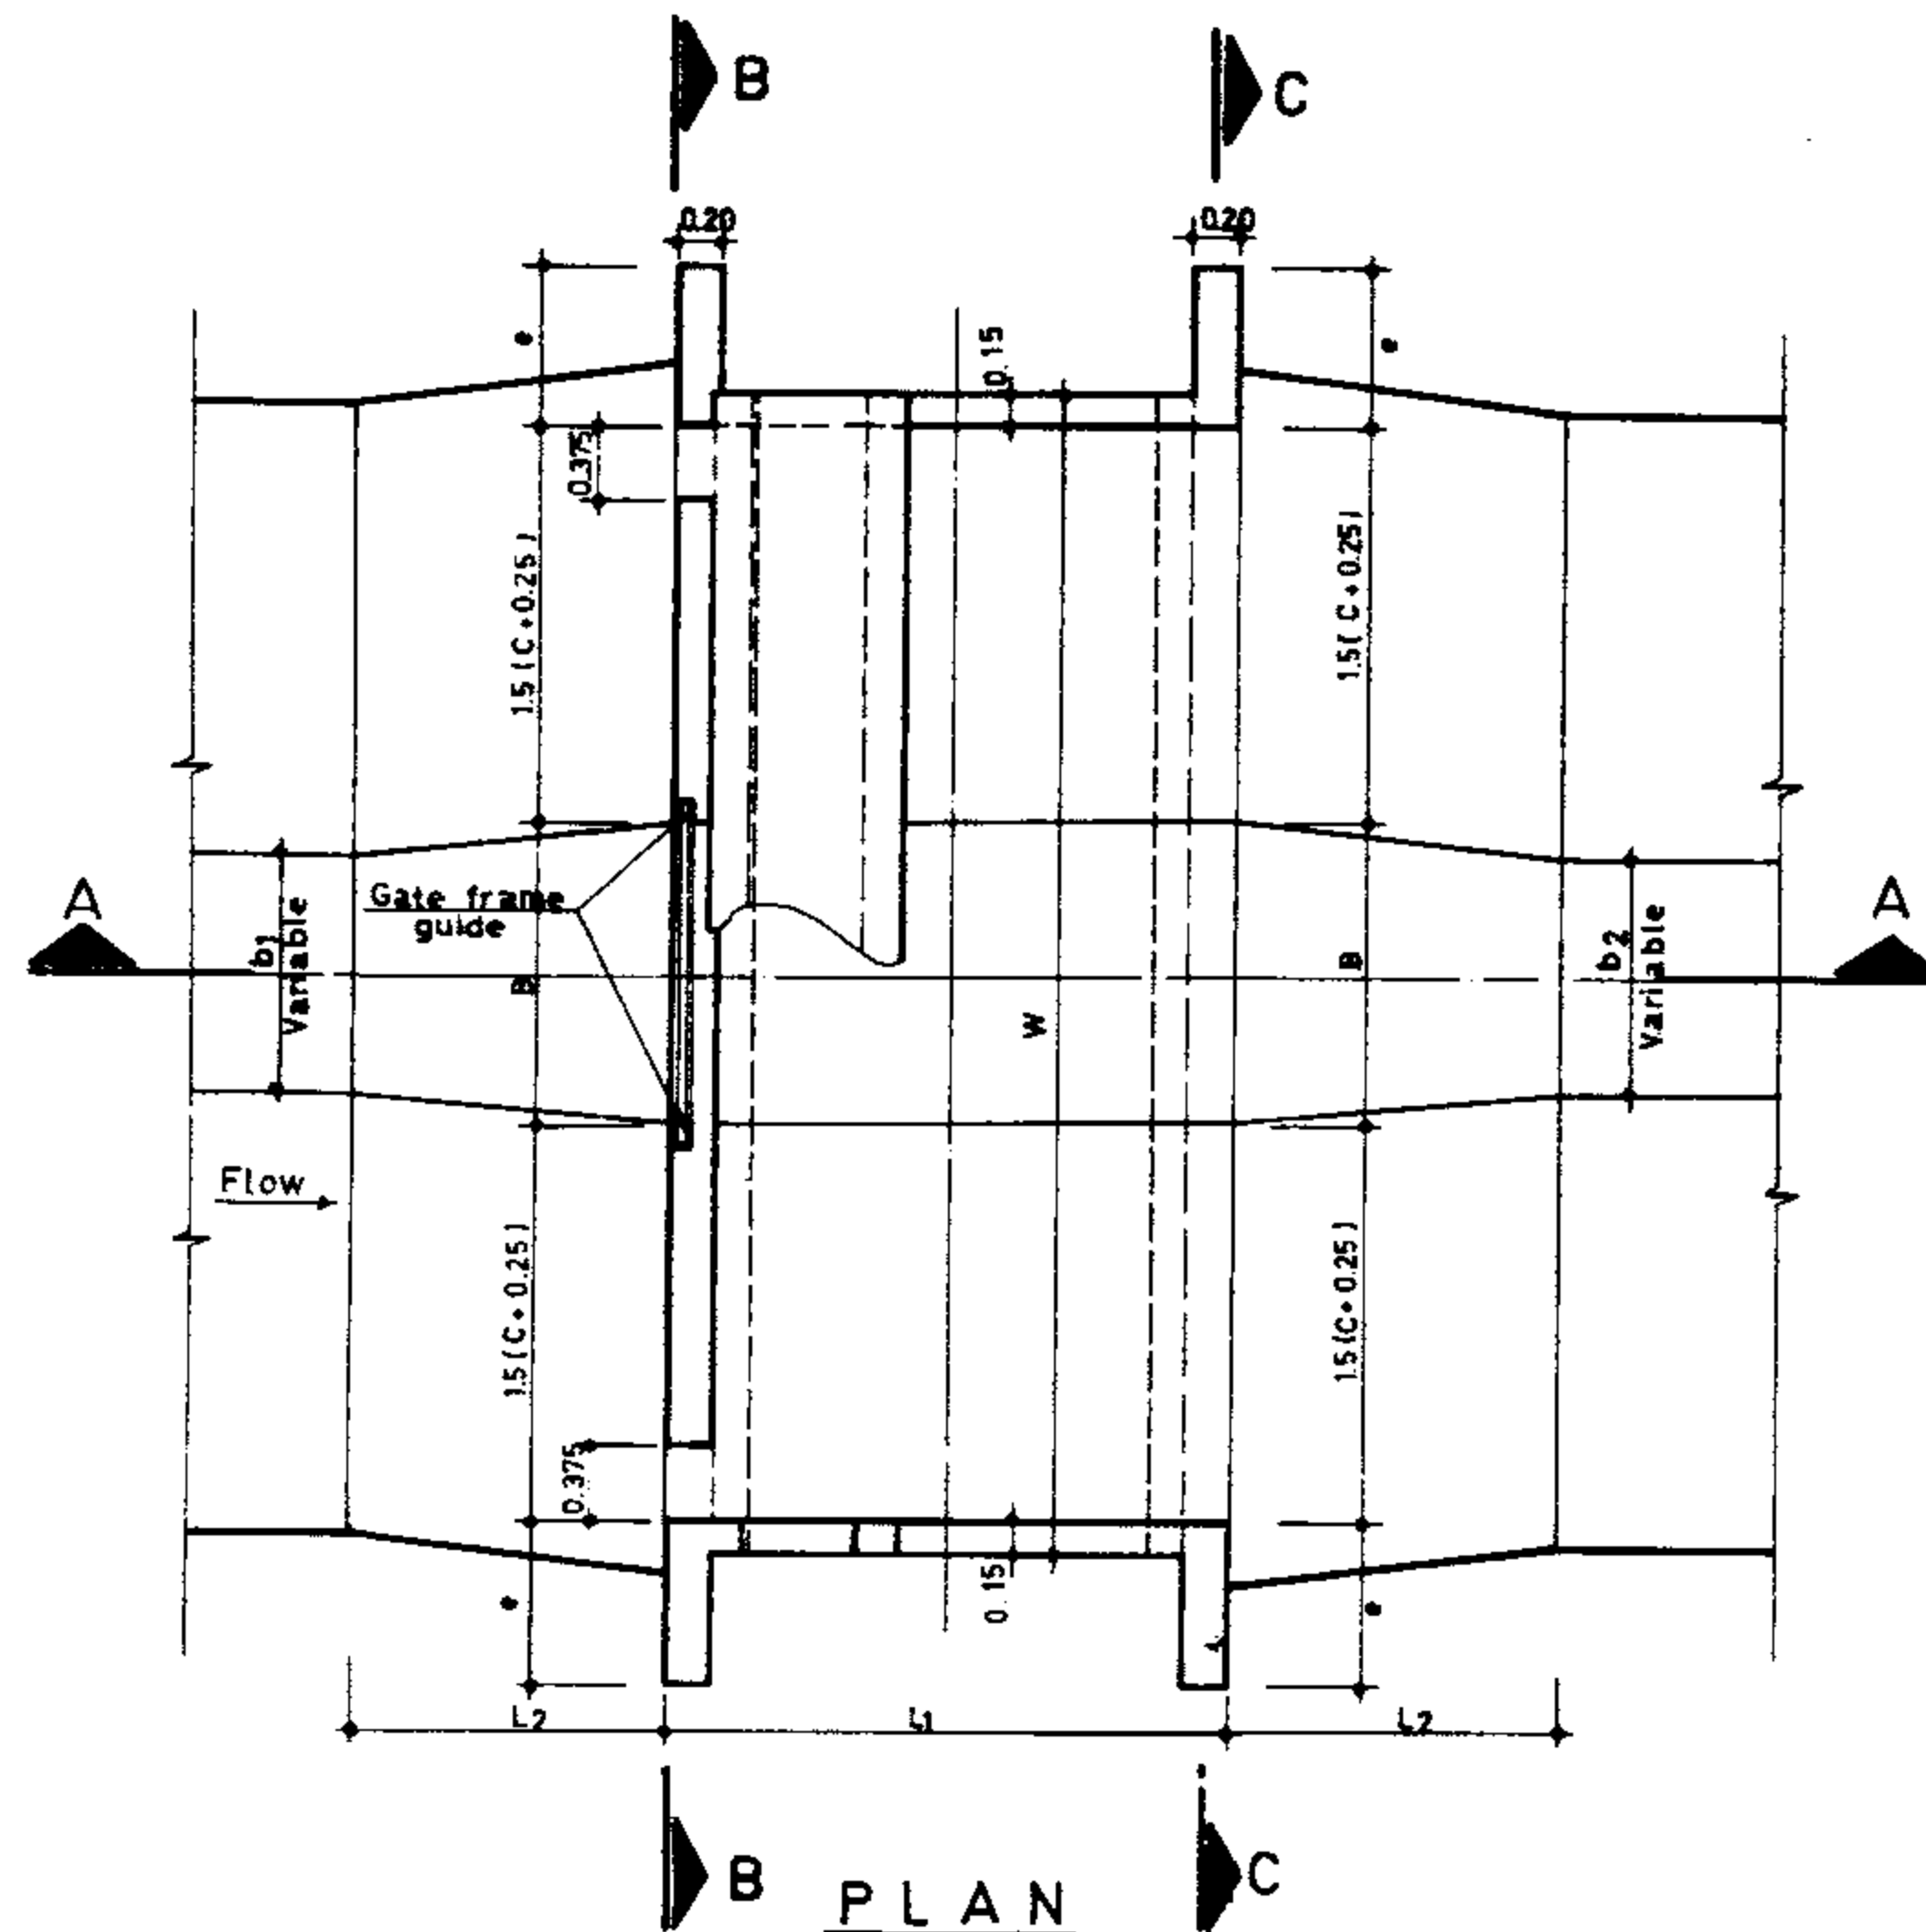

# STR.	MAX Q m ³ /s	SLIDE GATE WIDTH HEIGHT m	FRM HT m	STANDARD DIMENSION												
				B m	C m	L ₁ m	L ₂ m	N #	R m	W m	X m	e m	t m	Conc m ³	R/Bar Kg	Form m ²
1	0.300	1.00x0.30	0.90	1.00	0.35	2.00	1.50	3	0.325	3.25	1.30	0.60	0.15	3.87	273.16	23.09
2	0.400	1.00x0.40	0.70	1.00	0.45	2.00	1.50	3	0.325	3.55	1.45	0.60	0.15	4.31	296.11	24.89
3	0.500	1.00x0.50	1.10	1.00	0.55	2.00	1.50	3	0.325	3.85	1.60	0.60	0.15	4.71	320.03	26.93
4	0.600	1.00x0.60	1.30	1.00	0.65	2.10	1.50	3	0.325	4.15	1.75	0.60	0.15	5.18	452.66	29.39
5	0.700	1.00x0.70	1.50	1.00	0.75	2.20	1.50	3	0.325	4.45	1.90	0.75	0.18	6.08	509.00	35.08
6	0.800	1.00x0.80	1.70	1.00	0.85	2.30	1.50	3	0.325	4.75	2.05	0.75	0.18	6.56	427.99	36.68
7	0.480	1.20x0.40	0.90	1.20	0.50	2.10	1.50	3	0.350	3.90	1.60	0.80	0.15	4.75	333.55	26.86
8	0.600	1.20x0.50	1.10	1.20	0.60	2.20	1.50	3	0.350	4.20	1.75	0.80	0.18	5.20	357.55	28.82
9	0.720	1.20x0.60	1.30	1.20	0.70	2.30	1.50	3	0.350	4.50	1.90	0.80	0.18	5.64	395.13	30.64
10	0.840	1.20x0.70	1.50	1.20	0.80	2.40	1.50	3	0.300	4.80	1.40	0.75	0.18	6.37	433.07	37.42
11	0.960	1.20x0.80	1.70	1.20	0.90	2.50	1.50	4	0.300	5.10	1.50	0.75	0.20	7.07	498.07	39.41
12	1.080	1.20x0.90	1.90	1.20	1.00	2.60	2.00	4	0.300	5.40	1.60	0.75	0.20	7.35	539.92	42.11
13	0.700	1.40x0.50	1.10	1.40	0.60	2.20	2.00	3	0.300	4.40	1.90	0.80	0.18	5.86	372.77	28.37
14	0.840	1.40x0.60	1.30	1.40	0.70	2.30	2.00	3	0.350	4.70	2.00	0.80	0.18	5.90	407.11	31.83
15	0.980	1.40x0.70	1.50	1.40	0.80	2.40	2.00	4	0.325	5.00	1.45	0.75	0.18	6.65	449.12	38.45
16	1.120	1.40x0.80	1.70	1.40	0.90	2.50	2.00	4	0.325	5.30	1.55	0.75	0.20	7.20	518.66	40.67
17	1.260	1.40x0.90	2.00	1.40	1.00	2.60	2.00	4	0.325	5.60	1.65	0.75	0.20	7.66	572.49	43.11
18	0.960	1.60x0.60	1.30	1.60	0.70	2.30	2.00	3	0.350	4.90	1.40	0.60	0.18	5.88	421.36	32.15
19	1.120	1.60x0.70	1.50	1.60	0.80	2.40	2.00	4	0.350	5.20	1.50	0.75	0.18	6.90	463.86	39.45
20	1.280	1.60x0.80	1.70	1.60	0.90	2.50	2.00	4	0.350	5.50	1.60	0.75	0.20	7.49	538.54	40.90
21	1.440	1.60x0.90	2.00	1.60	1.00	2.60	2.00	4	0.350	5.80	1.70	0.75	0.20	7.94	579.91	44.11
22	1.260	1.80x0.70	1.50	1.80	0.80	2.40	2.00	4	0.300	5.40	1.60	0.75	0.18	7.22	474.51	40.72
23	1.440	1.80x0.80	1.80	1.80	0.90	2.50	2.00	4	0.300	5.70	1.70	0.75	0.20	7.77	558.41	42.87
24	1.620	1.80x0.90	2.00	1.80	1.00	2.60	2.00	4	0.300	6.00	1.80	0.75	0.20	8.26	596.70	45.11






- NOTES:**
- N = N² of guard posts.
 - For Q greater than 1 m³/s, upstream handrails required with a safety chain at gate opening.
 - All checks shall have continuous handrail bolted to precast conc. bolts.
 - Gate frame height measured from ϵ of gate opening.
 - For construction detail of gate frame guide see dwg. N^o 12/6/1/01
 - Chamfer all exposed corner 2cm. unless otherwise shown.
 - Values of L₂ given in table are the minimum required lengths.

- CHECK DROPS SELECTING PROCEDURE:**
- Determine "Q" in m³/s in U/S canal.
 - Select the structure from dimension table with respect to required "Q".
 - If the required "Q" not found in the table, select the structure's dimensions with the next largest "Q".
 - EL. D is equal to EL. A + y₁
 - EL. B = EL. D - (C + 0.45)
 - EL. C = EL. A - required change in grade
 - Check if EL. B \leq EL. C
 - If EL. B is higher than EL. C, a structure with a larger dimension C should be selected.

REFERENCE DWGS: For general notes and minimum requirements for detailing reinforcement see dwgs. 20/2/1/01
 For reinforcement see dwg. N^o 12/13/3/01
 For construction detail of gate frame guide see dwg. N^o 12/6/1/01


Scale: N.T.S.	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. N ^o 12/3/1/01	45 Cm CHECK DROP (Concrete canal)
Approved:	Sheet. N ^o 1 of 6	Rev. N ^o
		Q = 300 ~ 1620 l/sec. PLAN & SECTION

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

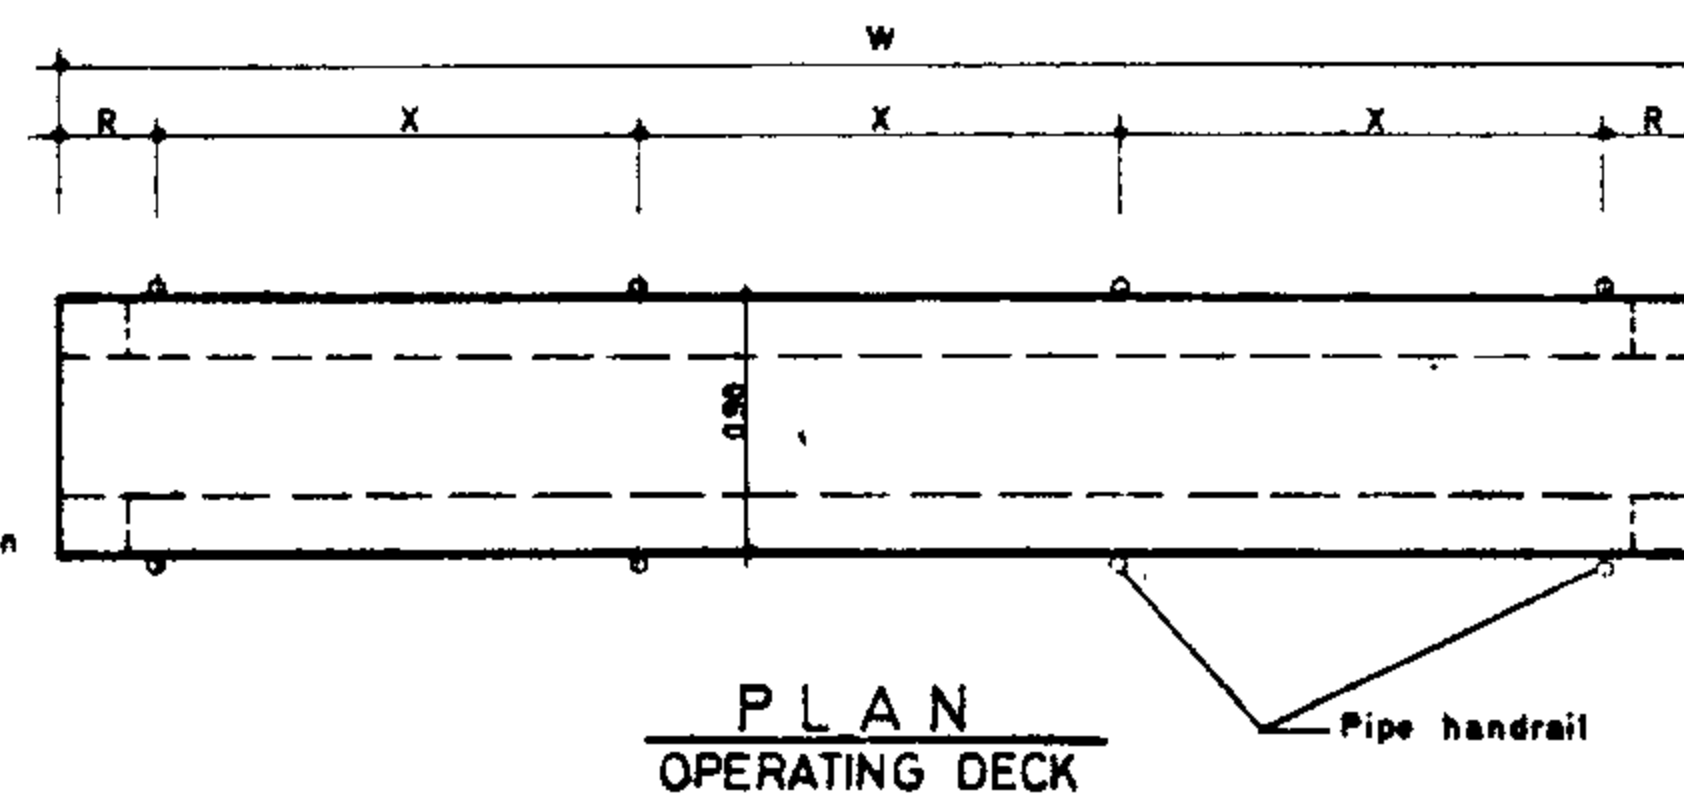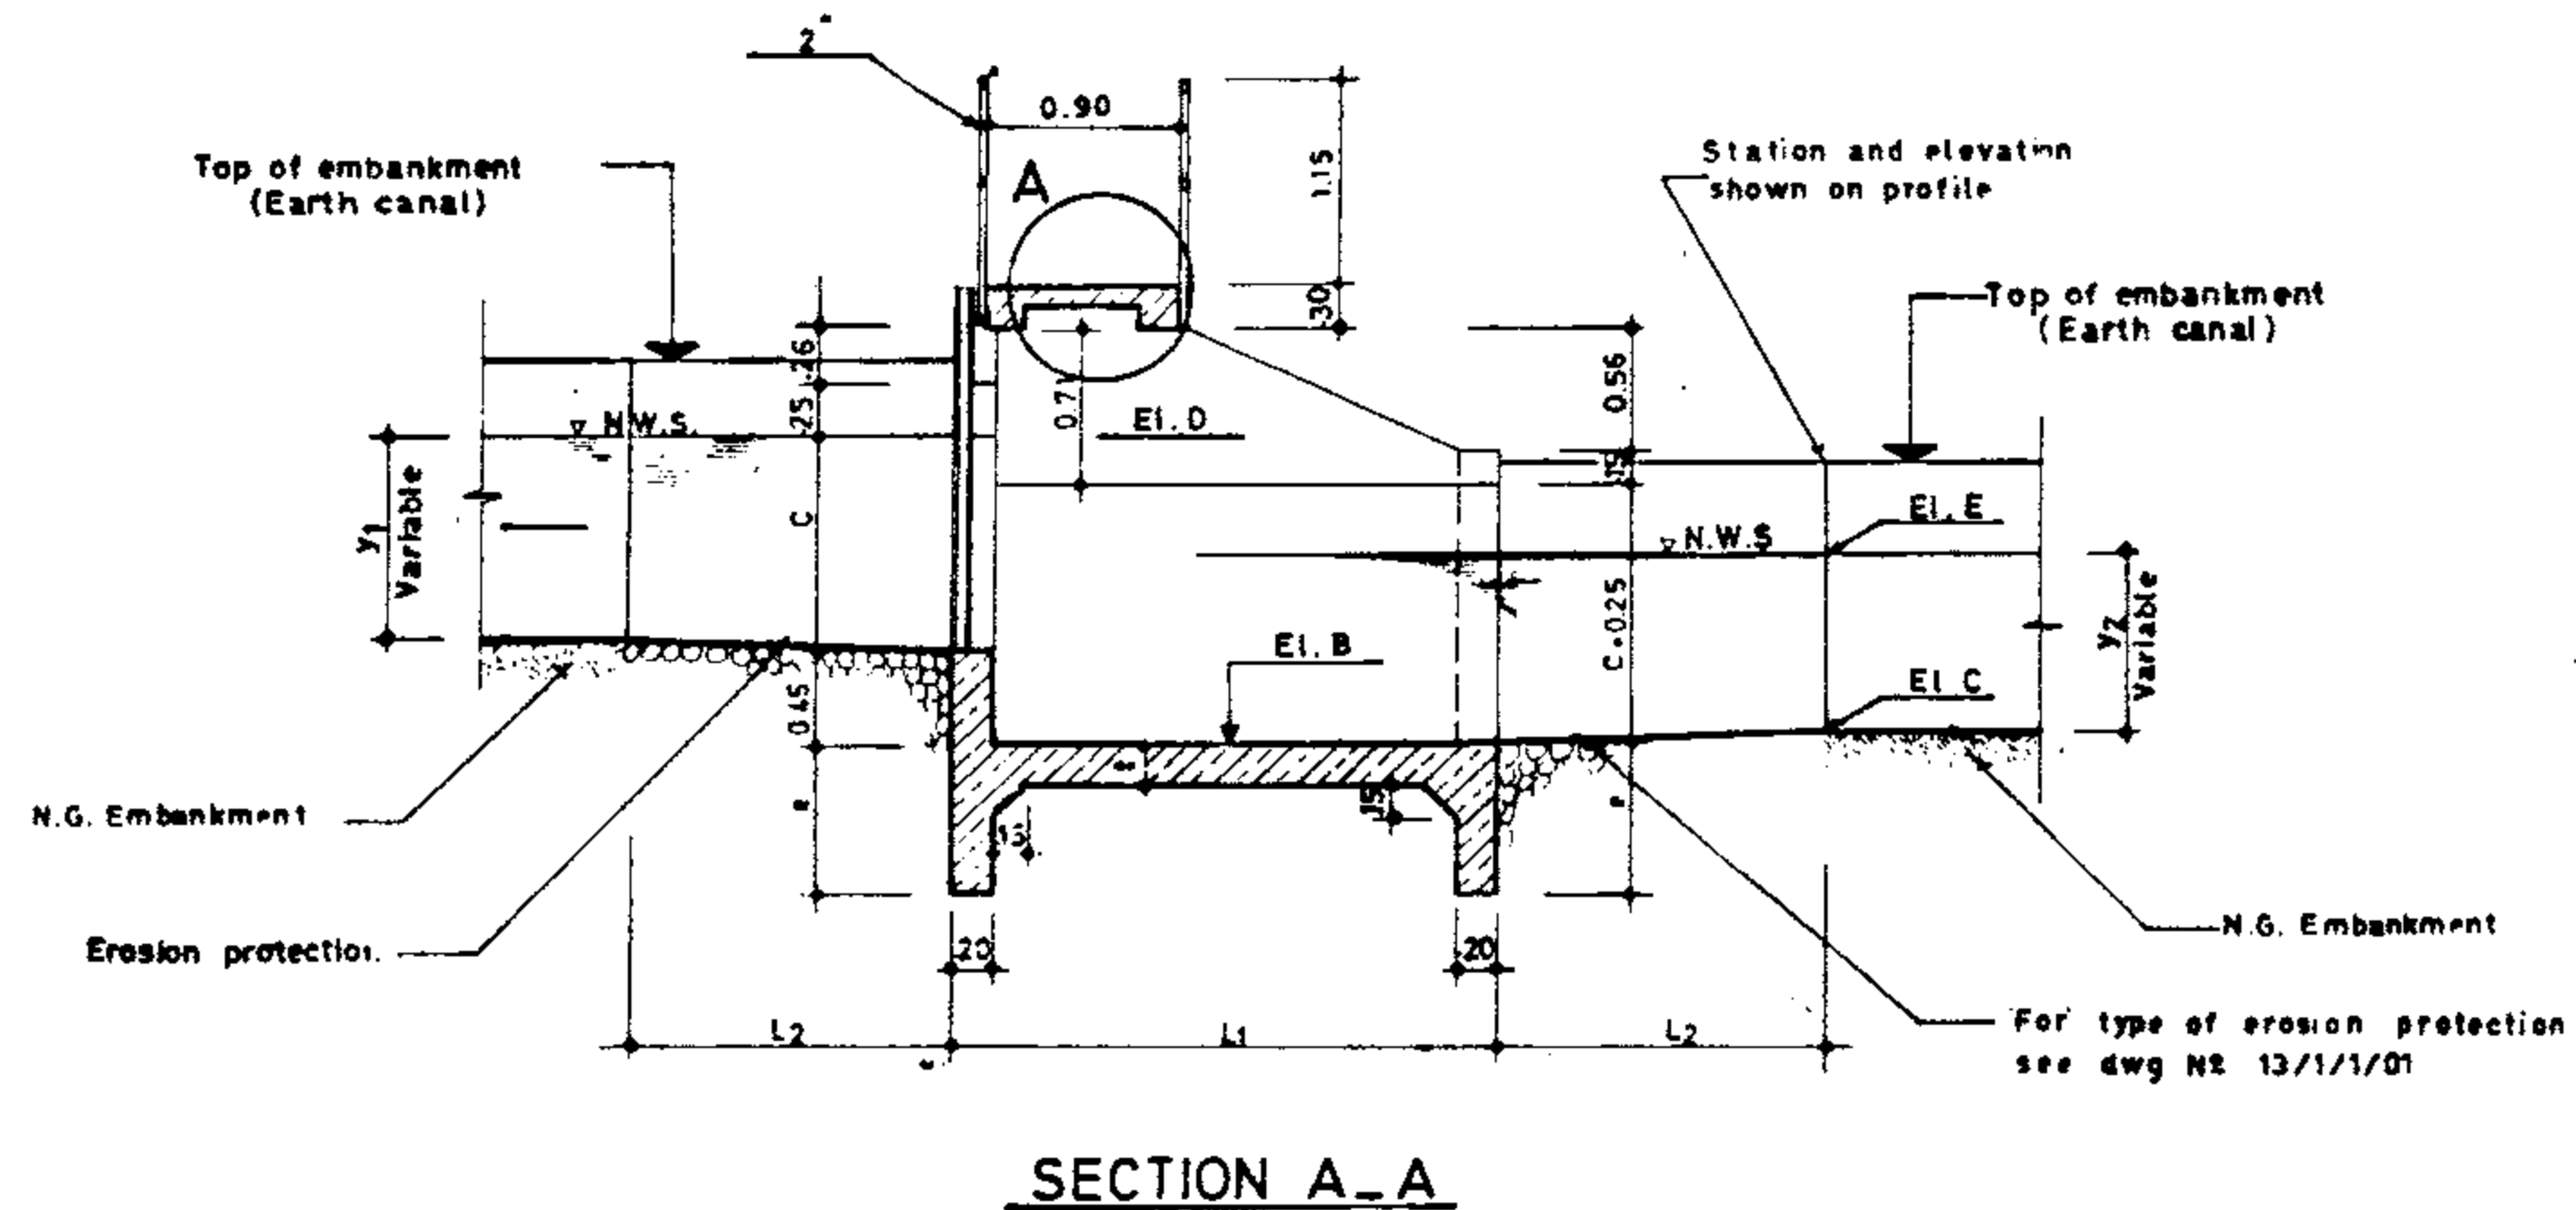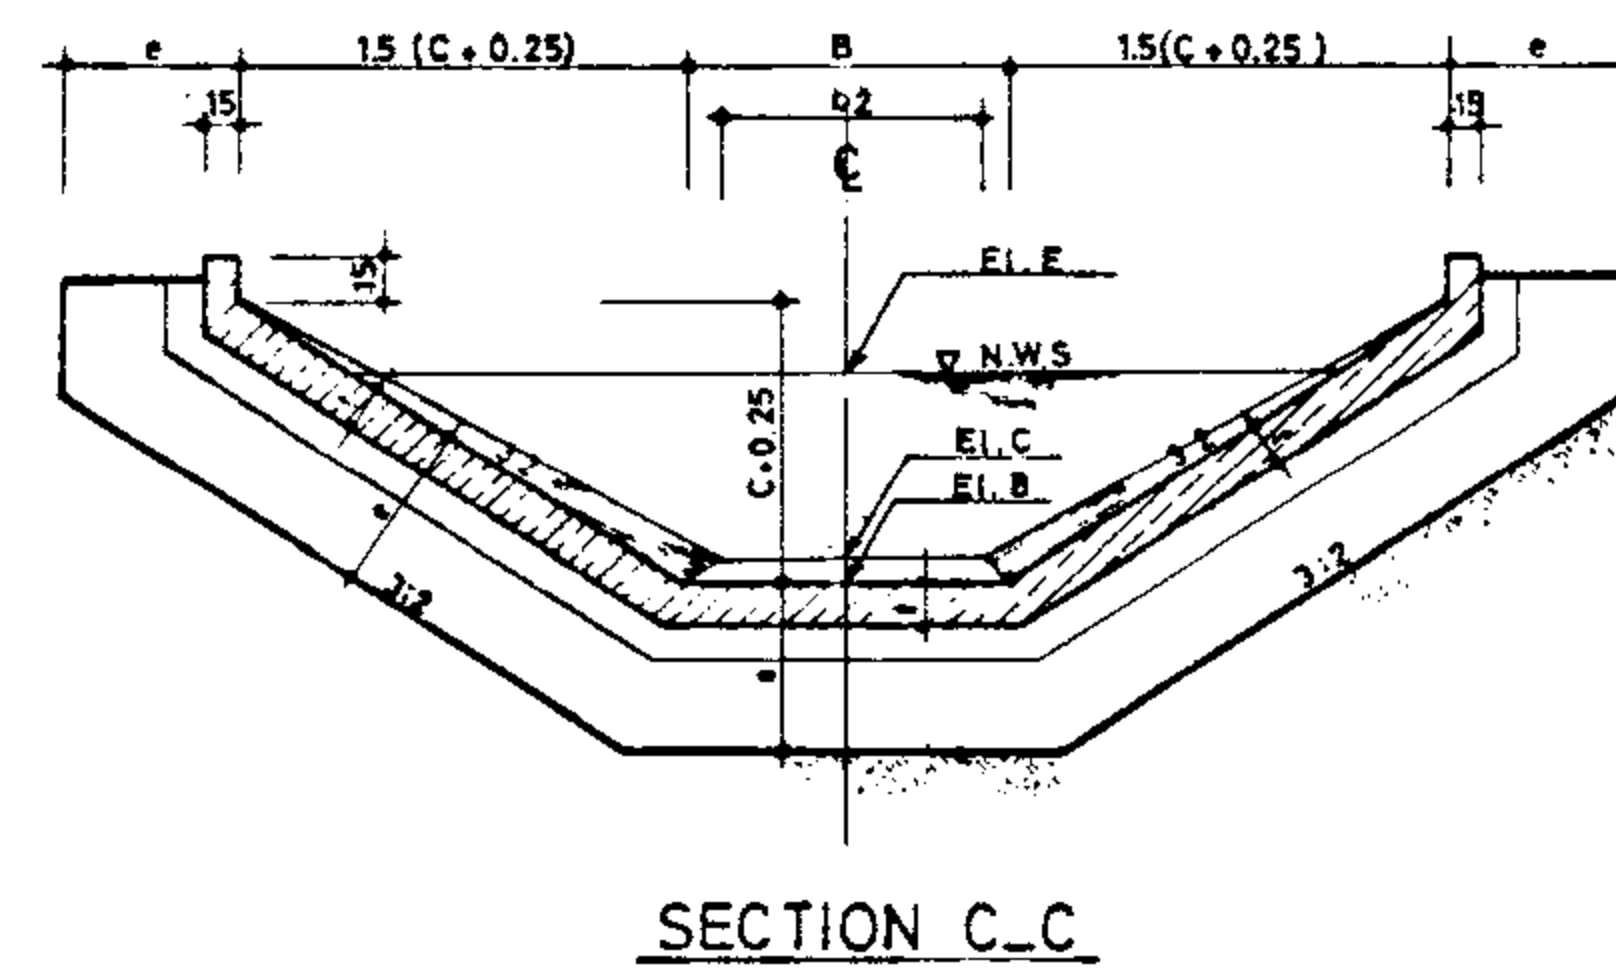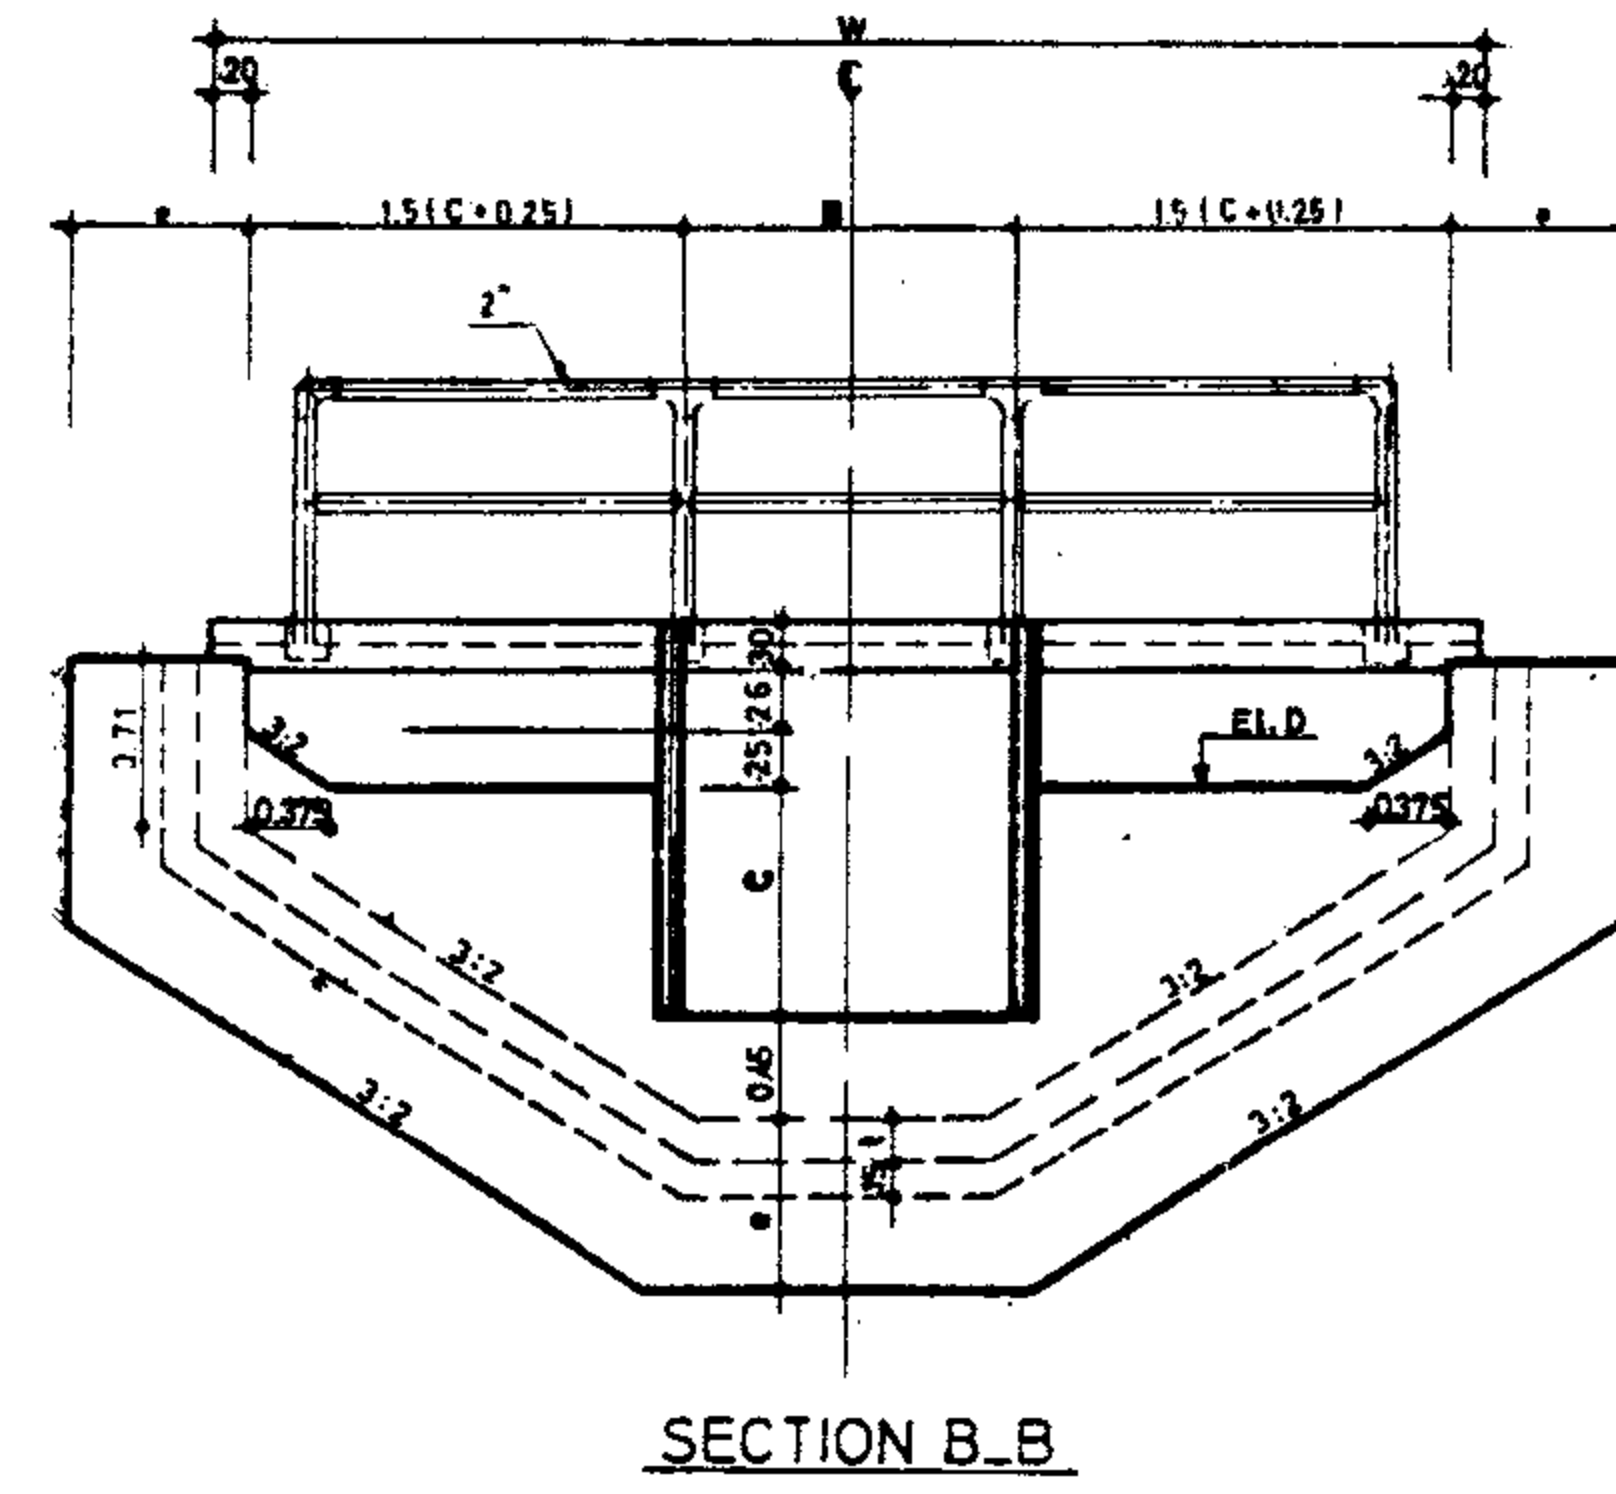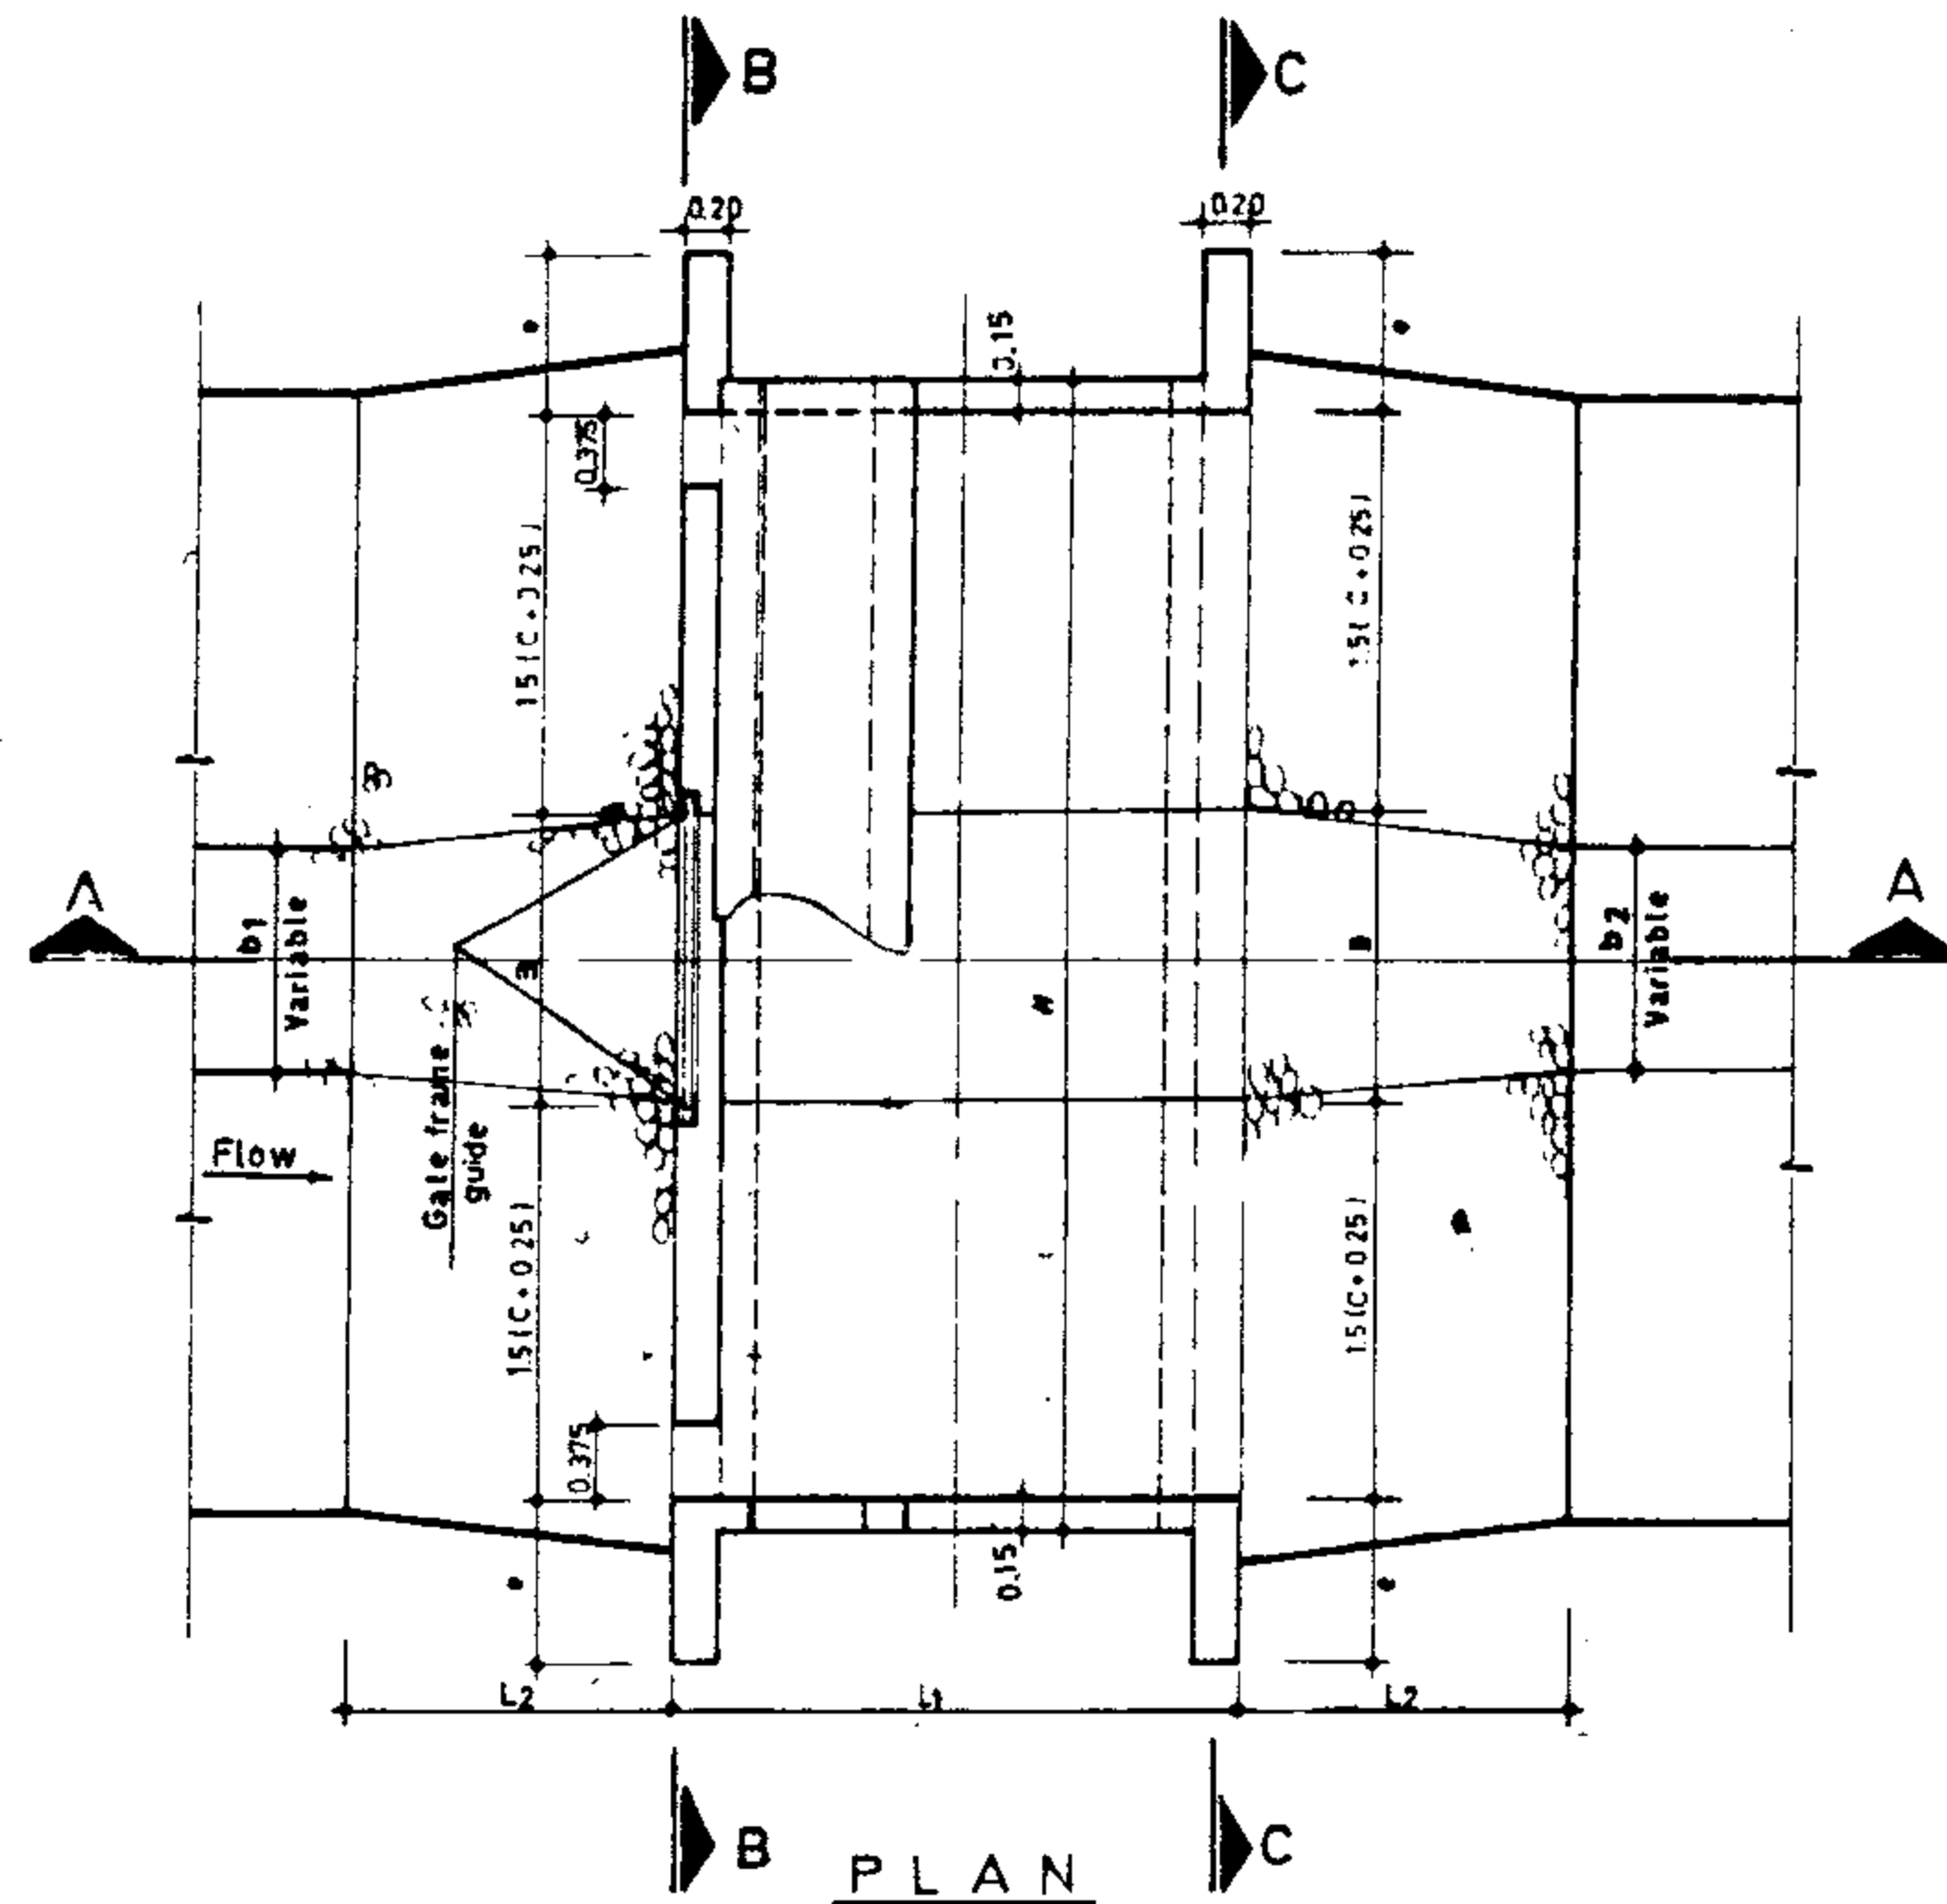

DIMENSION TABLE

Sl. #	MAX Q m ³ /s	SLIDE GATE		STANDARD DIMENSION												
		WIDTH m	HEIGHT m	B m	C m	L ₁ m	L ₂ m	N #	R m	W m	X m	e m	t m	Conc m ³	Rein Kg	Form m ²
1	0.300	1.00×0.30	0.70	1.00	0.35	2.00	1.50	3	0.325	3.25	1.30	0.60	0.15	3.87	273.16	23.09
2	0.400	1.00×0.40	0.90	1.00	0.45	2.00	1.50	3	0.325	3.55	1.45	0.60	0.15	4.31	296.41	24.89
3	0.500	1.00×0.50	1.10	1.00	0.55	2.00	1.50	3	0.325	3.85	1.60	0.60	0.15	4.71	320.03	26.93
4	0.600	1.00×0.60	1.30	1.00	0.65	2.10	1.50	3	0.325	4.15	1.75	0.60	0.18	5.18	452.66	29.39
5	0.700	1.00×0.70	1.50	1.00	0.75	2.20	1.50	3	0.325	4.45	1.90	0.75	0.18	6.08	389.00	35.08
6	0.800	1.00×0.80	1.70	1.00	0.85	2.30	1.50	3	0.325	4.75	2.05	0.75	0.18	6.56	427.99	36.68
7	0.480	1.20×0.40	0.90	1.20	0.50	2.10	1.50	3	0.350	3.90	1.60	0.60	0.15	4.75	333.66	26.86
8	0.600	1.20×0.50	1.10	1.20	0.60	2.20	1.50	3	0.350	4.20	1.75	0.60	0.18	5.20	357.55	28.62
9	0.720	1.20×0.60	1.30	1.20	0.70	2.30	1.50	3	0.350	4.50	1.90	0.60	0.18	5.64	395.13	30.64
10	0.840	1.20×0.70	1.50	1.20	0.80	2.40	1.50	3	0.300	4.80	1.40	0.75	0.18	6.37	433.07	37.42
11	0.960	1.20×0.80	1.70	1.20	0.90	2.50	1.50	4	0.300	5.10	1.50	0.75	0.20	7.07	498.07	39.41
12	1.080	1.20×0.90	1.90	1.20	1.00	2.60	2.00	4	0.300	5.40	1.60	0.75	0.20	7.35	539.92	42.11
13	0.700	1.40×0.50	1.10	1.40	0.60	2.20	2.00	3	0.300	4.40	1.90	0.60	0.18	5.86	372.77	29.37
14	0.840	1.40×0.60	1.30	1.40	0.70	2.30	2.00	3	0.350	4.70	2.00	0.60	0.18	5.90	407.11	31.83
15	0.980	1.40×0.70	1.50	1.40	0.80	2.40	2.00	4	0.325	5.00	1.45	0.75	0.18	6.65	449.12	38.45
16	1.120	1.40×0.80	1.70	1.40	0.90	2.50	2.00	4	0.325	5.30	1.55	0.75	0.20	7.20	518.66	40.67
17	1.260	1.40×0.90	2.00	1.40	1.00	2.60	2.00	4	0.325	5.60	1.65	0.75	0.20	7.66	557.49	43.11
18	0.960	1.60×0.60	1.30	1.60	0.70	2.30	2.00	3	0.350	4.90	1.40	0.60	0.18	5.88	421.36	32.15
19	1.120	1.60×0.70	1.50	1.60	0.80	2.40	2.00	4	0.350	5.20	1.50	0.75	0.18	6.90	463.86	39.45
20	1.280	1.60×0.80	1.70	1.60	0.90	2.50	2.00	4	0.350	5.50	1.60	0.75	0.20	7.49	538.54	40.90
21	1.440	1.60×0.90	2.00	1.60	1.00	2.60	2.00	4	0.350	5.80	1.70	0.75	0.20	7.94	579.91	44.11
22	1.260	1.80×0.70	1.50	1.80	0.80	2.40	2.00	4	0.300	5.40	1.60	0.75	0.18	7.22	474.51	40.72
23	1.440	1.80×0.80	1.80	1.80	0.90	2.50	2.00	4	0.300	5.70	1.70	0.75	0.20	7.77	558.41	42.67
24	1.620	1.80×0.90	2.00	1.80	1.00	2.60	2.00	4	0.300	6.00	1.80	0.75	0.20	8.26	596.70	45.11

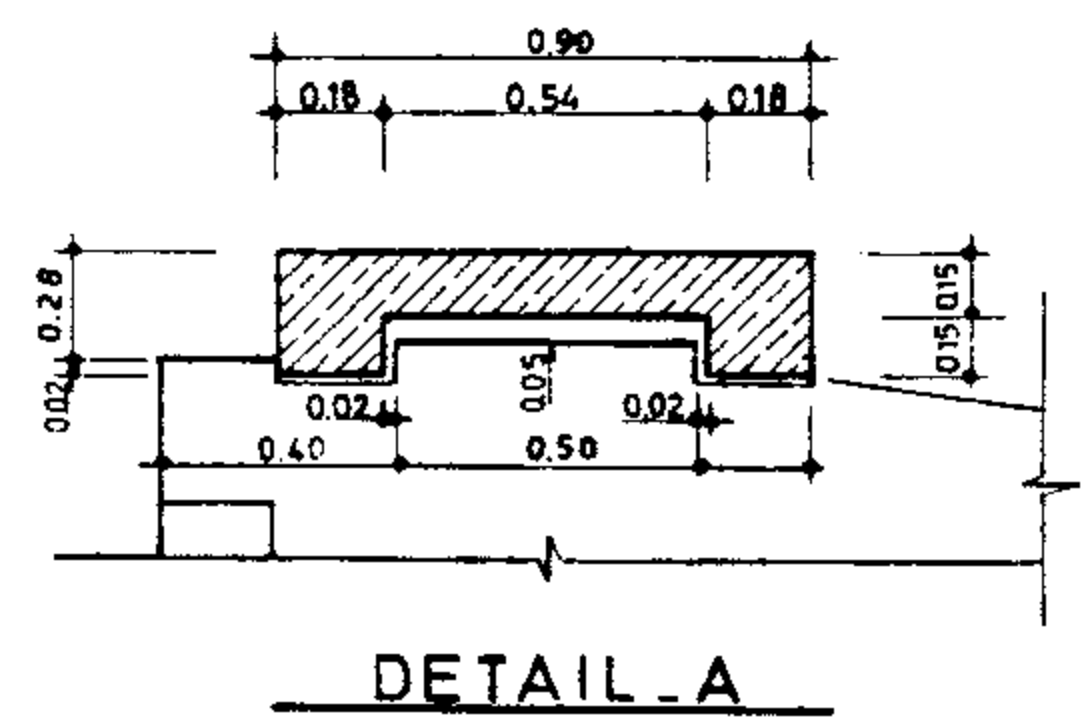







REFERENCE DWGS: For general notes and minimum requirements for detailing reinforcement see dwgs. 20/2/1/01 TO 20/2/1/03
 For reinforcement see dwg N^o 12/3/3/01
 See note on dwg N^o 12/3/1/01
 For check drops selecting procedure see dwg N^o 12/3/1/01
 For construction detail of "gate frame guide" see dwg. N^o 12/6/1/01

IRRIGATION & DRAINAGE STANDARDS

Scale: N.T.S.
 Date: DWG. N^o 12/3/1/02
 Approved: Sheet. N^o 2 of 5 Rev. N^o

45 Cm CHECK DROP (Earth canal)
 Q = 300 ~ 1620 l/sec
 PLAN & SECTION

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

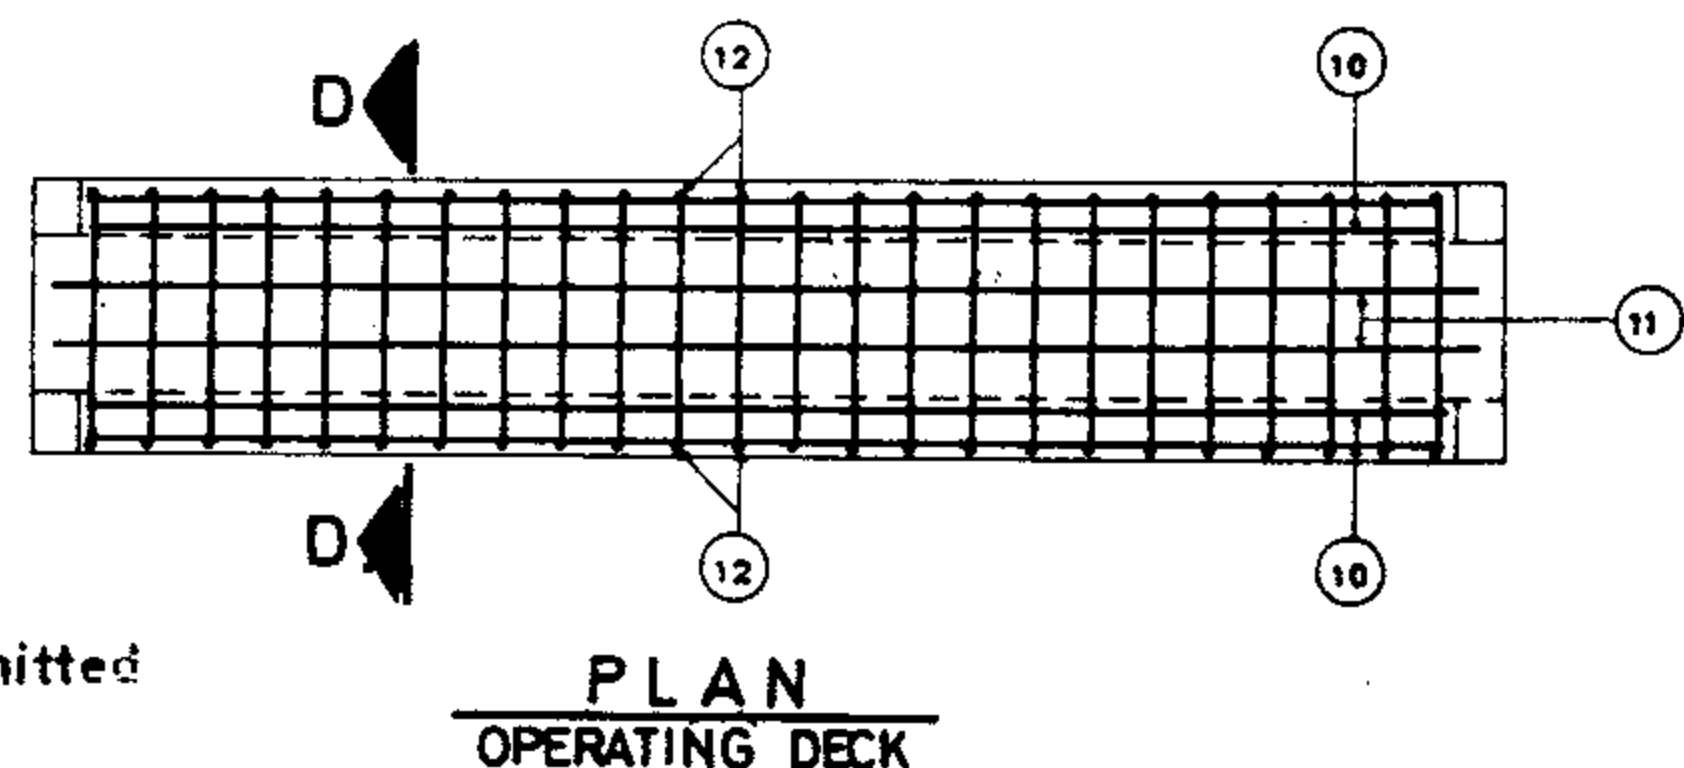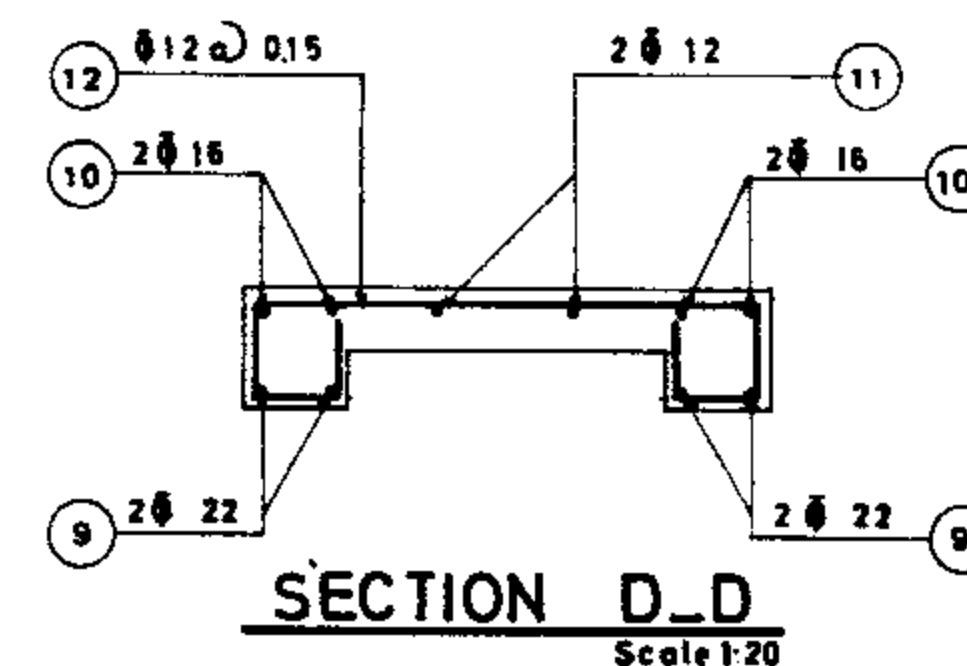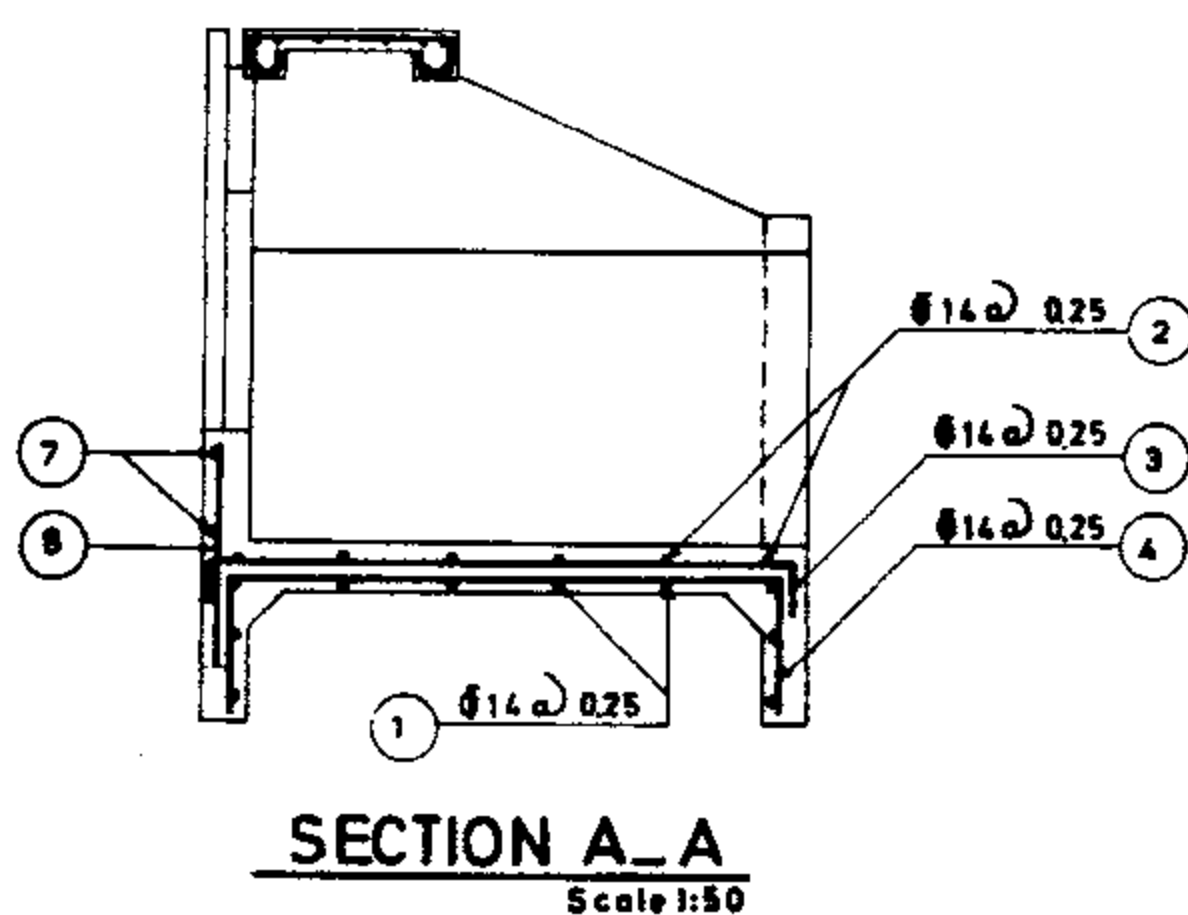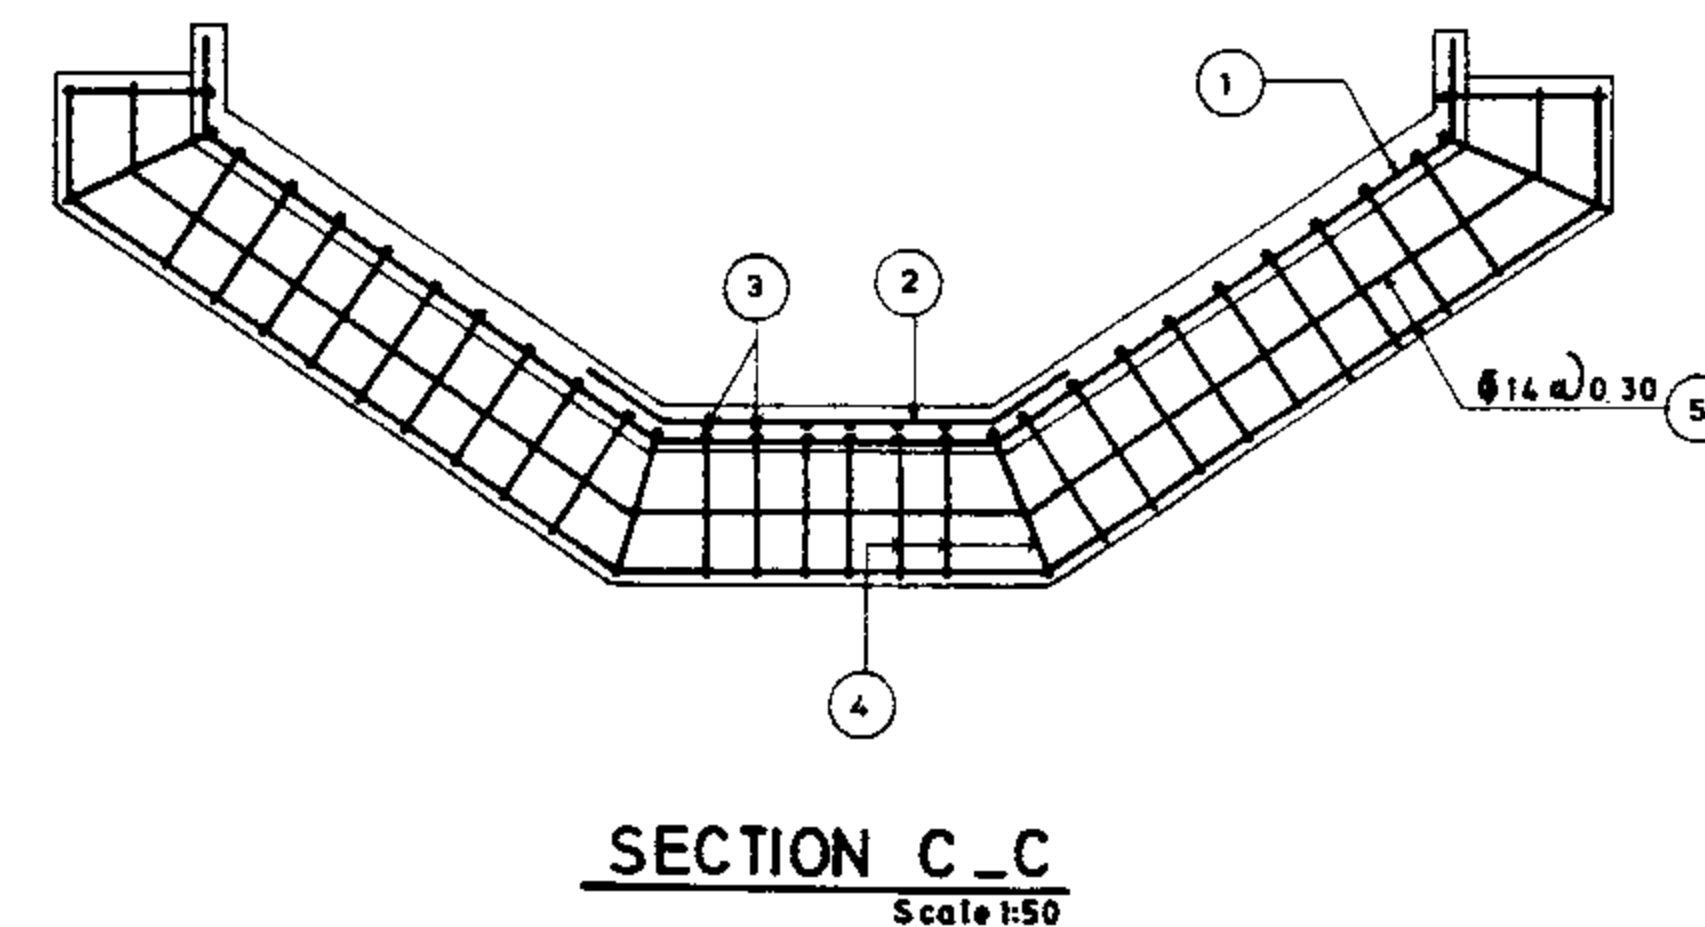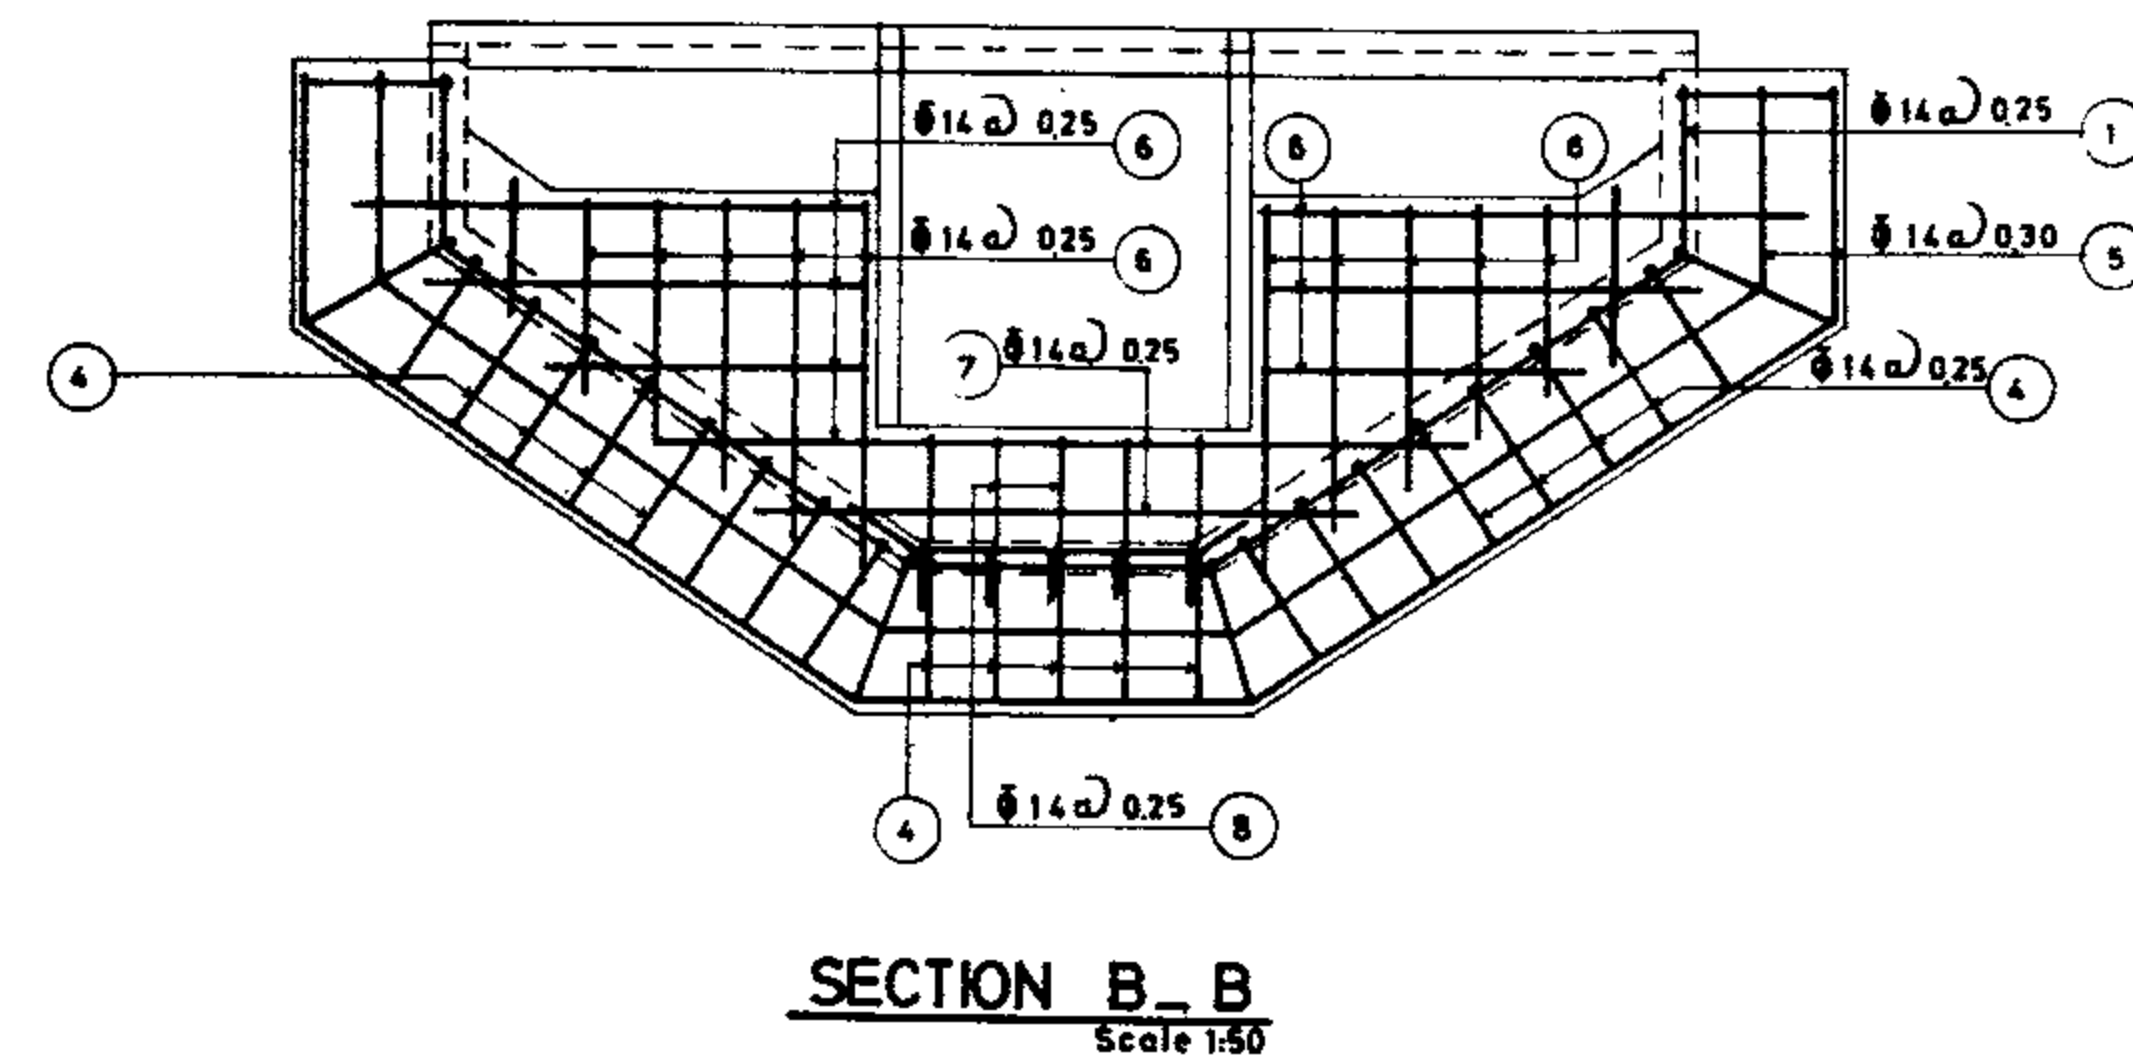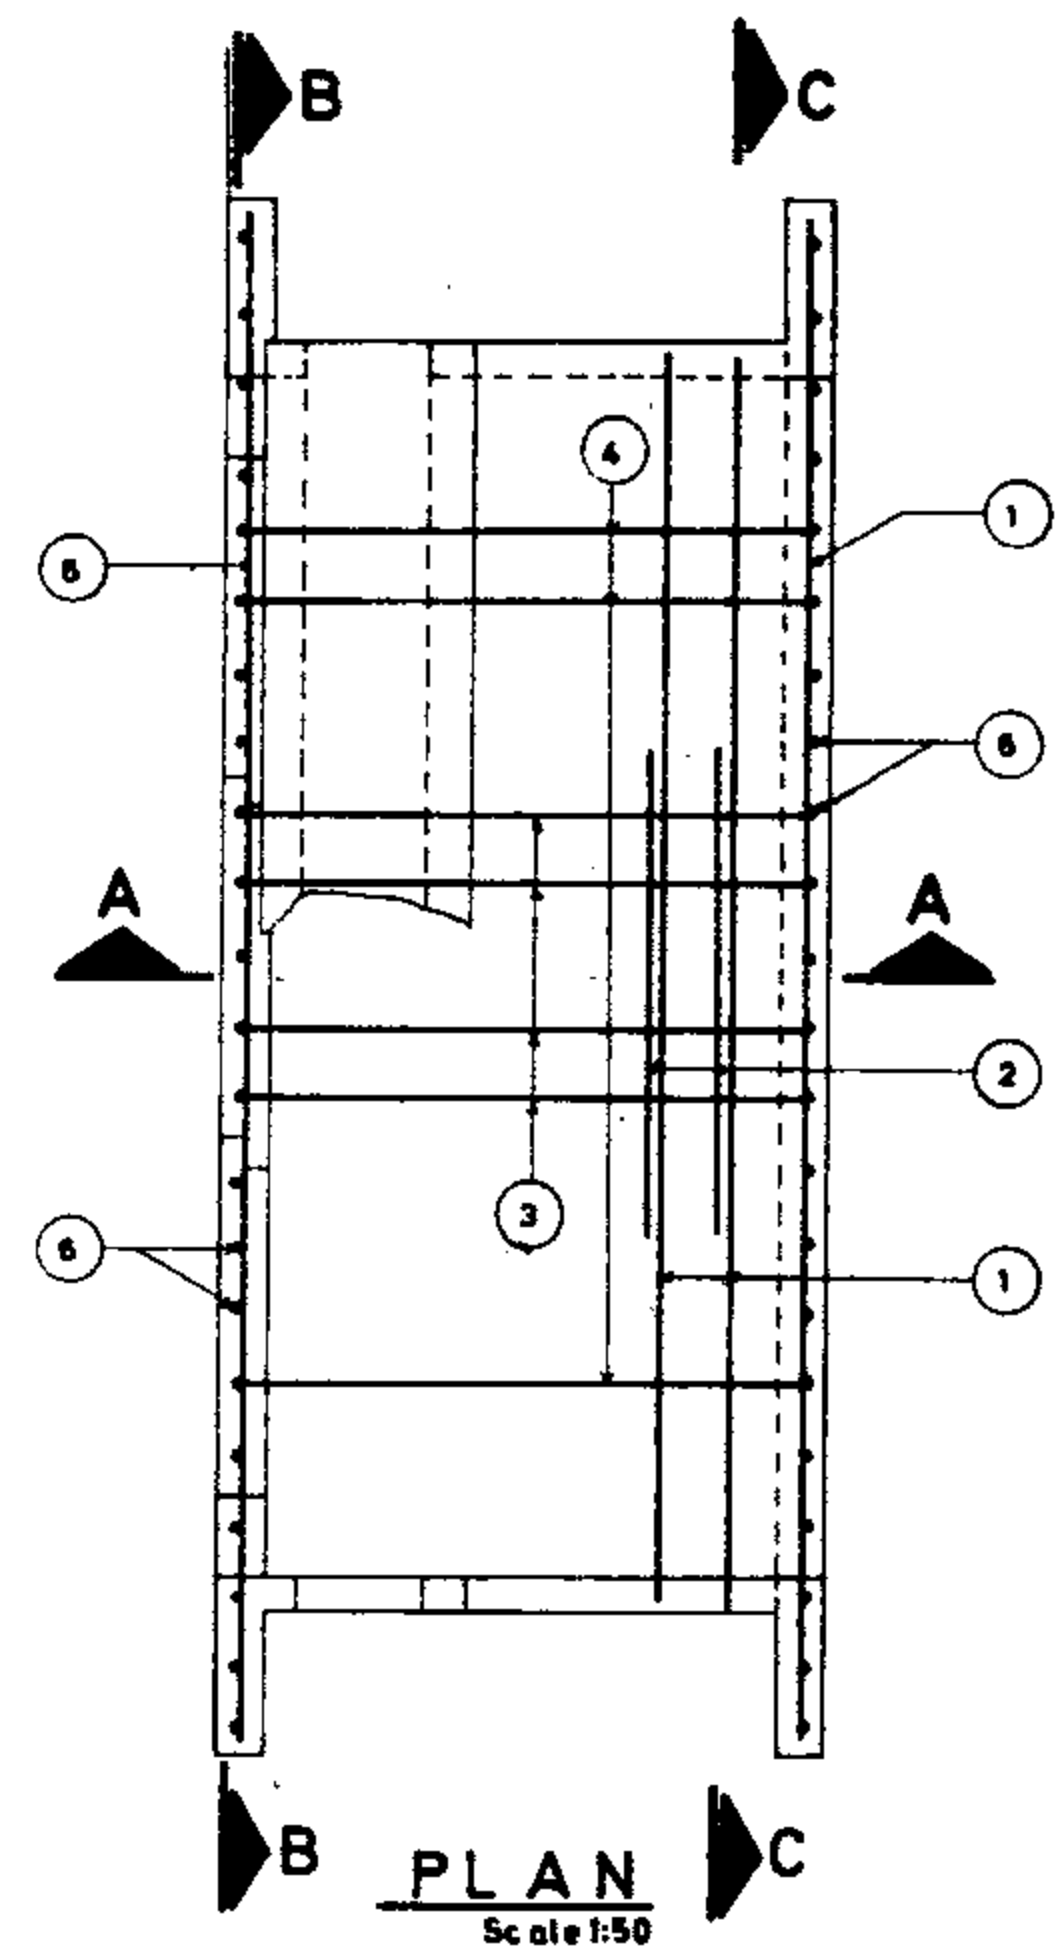

Pos. ② and ③ are omitted
when $t < 20$ cm

REFERENCE DWGS: For details of dimensions see dwgs. No. 12/3/1/01 & 12/3/1/02
For reinforcement table see dwgs. No. 12/3/3/02 TO 12/3/3/04

Scale: 1:50-1:20

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG. No. 12/3/3/01

Approved:

Sheet No: 3 of 6 Rev. No

CHECK DROP
Q=300 ~ 1620
PLAN & SECTION

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

STR.1							
POS	Φ	No.	FORM	Unit leng	Total leng	UWt. Kg.	Total weight
1	14	9		4.37	39.33	1.21	47.59
2	-	-		-	-	-	-
3	-	-		-	-	-	-
4	14	21		2.73	57.33	1.21	69.37
5	14	4		5.09	20.36	1.21	24.64
6	14	18		1.07	19.26	1.21	23.30
7	14	2		3.25	6.50	1.21	7.87
8	14	3		1.00	3.00	1.21	3.63
9	22	4		3.37	13.48	2.98	40.17
10	16	4		3.37	13.48	1.58	21.30
11	12	2		3.37	6.74	0.888	5.95
12	12	22		1.90	41.80	0.888	37.12
						280.98	Kg.

STR.3							
POS	Φ	No.	FORM	Unit leng	Total leng	UWt. Kg.	Total weight
1	14	9		5.09	45.81	1.21	55.43
2	-	-		-	-	-	-
3	-	-		-	-	-	-
4	14	24		2.70	64.80	1.21	78.41
5	14	4		5.81	23.24	1.21	28.12
6	14	22		1.22	26.84	1.21	32.48
7	14	2		3.25	6.50	1.21	7.87
8	14	3		1.00	3.00	1.21	3.63
9	22	4		3.97	15.88	2.98	47.32
10	16	4		3.97	15.88	1.58	25.09
11	12	2		3.97	7.94	0.888	7.05
12	12	26		1.90	49.40	0.888	43.87
						329.27	Kg.

STR.5							
POS	Φ	No.	FORM	Unit leng	Total leng	UWt. Kg.	Total weight
1	14	10		5.81	58.10	1.21	70.30
2	-	-		-	-	-	-
3	-	-		-	-	-	-
4	14	26		3.17	82.42	1.21	99.73
5	14	4		6.53	26.12	1.21	31.61
6	14	26		1.37	35.62	1.21	43.10
7	14	2		3.25	6.50	1.21	7.87
8	14	3		1.00	3.00	1.21	3.63
9	22	4		4.57	18.28	2.98	54.47
10	16	4		4.57	18.28	1.58	28.88
11	12	2		4.57	9.14	0.888	8.12
12	12	31		1.90	58.90	0.888	52.30
						400.01	Kg.

STR.7							
POS	Φ	No.	FORM	Unit leng	Total leng	UWt. Kg.	Total weight
1	14	10		5.11	51.10	1.21	61.83
2	-	-		-	-	-	-
3	-	-		-	-	-	-
4	14	24		2.83	67.92	1.21	82.18
5	14	4		5.83	29.15	1.21	35.27
6	14	22		0.93	20.46	1.21	24.76
7	14	2		3.45	6.90	1.21	8.35
8	14	4		1.00	4.00	1.21	4.84
9	22	4		4.02	16.08	2.98	47.92
10	16	4		4.02	16.08	1.58	25.41
11	12	2		4.02	8.04	0.888	7.14
12	12	27		1.90	51.30	0.888	45.55
						343.25	Kg.

STR.2							
POS	Φ	No.	FORM	Unit leng	Total leng	UWt. Kg.	Total weight
1	14	9		4.73	42.57	1.21	51.51
2	-	-		-	-	-	-
3	-	-		-	-	-	-
4	14	22		2.73	60.06	1.21	72.67
5	14	4		5.45	21.80	1.21	26.38
6	14	20		1.14	22.80	1.21	27.59
7	14	2		3.25	6.50	1.21	7.87
8	14	3		1.00	3.00	1.21	3.63
9	22	4		3.67	14.68	2.98	43.75
10	16	4		3.67	14.68	1.58	23.19
11	12	2		3.67	7.34	0.888	6.52
12	12	25		1.90	47.50	0.888	42.18
						305.29	Kg.

STR.4							
POS	Φ	No.	FORM	Unit leng	Total leng	UWt. Kg.	Total weight
1	14	10		5.45	54.50	1.21	65.95
2	-	-		-	-	-	-
3	-	-		-	-	-	-
4	14	25		2.77	69.25	1.21	83.79
5	14	4		6.17	24.68	1.21	29.86
6	14	24		1.29	30.96	1.21	37.46
7	14	2		3.25	6.50	1.21	7.87
8	14	3		1.00	3.00	1.21	3.63
9	22	4		4.27	17.08	2.98	50.90
10	16	4		4.27	17.08	1.58	26.99
11	12	2		4.27	8.54	0.888	7.58
12	12	29		1.90	55.10	0.888	48.93
						462.96	Kg.

STR.6							
POS	Φ	No.	FORM	Unit leng	Total leng	UWt. Kg.	Total weight
1	14	11		6.17	67.87	1.21	82.12
2	-	-		-	-	-	-
3	-	-		-	-	-	-
4	14	28		3.27	91.56	1.21	110.79
5	14	4		6.89	27.56	1.21	33.35
6	14	28		1.44	40.32	1.21	48.79
7	14	2		3.25	6.50	1.21	7.87
8	14	3		1.00	3.00	1.21	3.63
9	22	4		4.87	19.48	2.98	58.05
10	16	4		4.87	19.48	1.58	30.78
11	12	2		4.87	9.74	0.888	8.65
12	12	33		1.90	62.70	0.888	55.68
						439.71	Kg.

STR.8							
POS	Φ	No.	FORM	Unit leng	Total leng	UWt. Kg.	Total weight
1	14	10		5.47	54.70	1.21	66.19
2	-	-		-	-	-	-
3	-	-		-	-	-	-
4	14	25		2.87	71.75	1.21	86.82
5	14	4		6.19	24.76	1.21	29.96
6	14	24		1.25	30.00	1.21	36.30
7	14	2		3.45	6.90	1.21	8.35
8	14	4		1.00	4.00	1.21	4.84
9	22	4		4.32	17.28	2.98	51.49
10	16	4		4.32	17.28	1.58	27.30
11	12	2		4.32	8.64	0.888	7.67
12	12	29		1.90	55.10	0.888	48.93
						367.85	Kg.

REFERENCE DWGS: For reinforcement see dwg. No 12/3/01
For bars with variable unit length see note under the same title at dwg. No 20/2/1/01

Scale:	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. No 12/3/02	CHECK DROP LIST OF REINFORCEMENT
Approved:	Sheet. No: 4 of 6	Rev. No
		STR. 1 TO 8

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND STANDARD BUREAU

STR.9							
POS	Φ	No.	FORM	Unit leng	Total leng	U.Wt. KG.	Total weight
1	14	11		5.83	64.13	1.21	77.60
2	-	-		-	-	-	-
3	-	-		-	-	-	-
4	14	27		2.97	80.19	1.21	97.03
5	14	4		6.55	26.20	1.21	31.70
6	14	26		1.33	34.58	1.21	41.84
7	14	2		3.45	6.90	1.21	8.35
8	14	4		1.00	4.00	1.21	4.84
9	22	4		4.62	18.48	2.98	55.07
10	16	4		4.62	18.48	1.58	29.20
11	12	2		4.62	9.24	0.888	8.21
12	12	31		1.90	58.90	0.888	52.30
						406.14	Kg.

STR.11							
POS	Φ	No.	FORM	Unit leng	Total leng	U.Wt. KG.	Total weight
1	14	11		6.55	72.05	1.21	87.18
2	14	11		1.68	18.48	1.21	22.36
3	14	6		1.98	11.88	1.21	14.37
4	14	29		3.43	99.47	1.21	120.36
5	14	4		7.27	29.08	1.21	35.19
6	14	30		1.48	44.40	1.21	53.72
7	14	2		3.45	6.90	1.21	8.35
8	14	4		1.00	4.00	1.21	4.48
9	22	4		5.25	21.00	2.98	62.58
10	16	4		5.25	21.00	1.58	33.18
11	12	2		5.25	10.50	0.888	9.32
12	12	35		1.90	66.50	0.888	59.05
						510.50	Kg.

STR.13							
POS	Φ	No.	FORM	Unit leng	Total leng	U.Wt. KG.	Total weight
1	14	10		5.67	56.70	1.21	68.61
2	-	-		-	-	-	-
3	-	-		-	-	-	-
4	14	26		2.87	74.62	1.21	90.29
5	14	4		6.39	25.56	1.21	30.93
6	14	24		1.25	30.00	1.21	36.30
7	14	2		3.65	7.30	1.21	8.83
8	14	5		1.00	5.00	1.21	6.05
9	22	4		4.52	18.08	2.98	53.88
10	16	4		4.52	18.08	1.58	28.57
11	12	2		4.52	9.04	0.888	8.03
12	12	31		1.90	58.90	0.888	52.30
						383.78	Kg.

STR.15							
POS	Φ	No.	FORM	Unit leng	Total leng	U.Wt. KG.	Total weight
1	14	11		6.39	70.29	1.21	85.05
2	-	-		-	-	-	-
3	-	-		-	-	-	-
4	14	29		3.37	97.73	1.21	118.25
5	14	4		7.11	28.44	1.21	34.41
6	14	28		1.40	39.20	1.21	47.43
7	14	2		3.65	7.30	1.21	8.83
8	14	5		1.00	5.00	1.21	6.05
9	22	4		5.12	20.48	2.98	61.03
10	16	4		5.12	20.48	1.58	32.36
11	12	2		5.12	10.24	0.888	9.90
12	12	35		1.90	66.50	0.888	59.05
						461.55	Kg.

STR.10							
POS	Φ	No.	FORM	Unit leng	Total leng	U.Wt. KG.	Total weight
1	14	11		6.19	68.09	1.21	82.39
2	-	-		-	-	-	-
3	-	-		-	-	-	-
4	14	28		3.37	94.36	1.21	114.18
5	14	4		6.91	27.64	1.21	33.44
6	14	28		1.40	39.20	1.21	47.43
7	14	2		3.45	6.90	1.21	8.35
8	14	4		1.00	4.00	1.21	4.84
9	22	4		4.92	19.68	2.98	58.65
10	16	4		4.92	19.68	1.58	31.09
11	12	2		4.92	9.84	0.888	8.74
12	12	33		1.90	62.70	0.888	55.68
						444.79	Kg.

STR.12							
POS	Φ	No.	FORM	Unit leng	Total leng	U.Wt. KG.	Total weight
1	14	12		6.91	82.92	1.21	100.33
2	14	12		1.68	20.16	1.21	24.39
3	14	6		2.03	12.18	1.21	14.74
4	14	31		3.53	109.43	1.21	132.41
5	14	4		7.63	30.52	1.21	36.93
6	14	31		1.55	48.05	1.21	58.14
7	14	2		3.45	6.90	1.21	8.35
8	14	4		1.00	4.00	1.21	4.84
9	22	4		5.52	22.08	2.98	65.80
10	16	4		5.52	22.08	1.58	34.89
11	12	2		5.52	11.04	0.888	9.80
12	12	37		1.90	70.30	0.888	62.43
						553.05	Kg.

STR.14							
POS	Φ	No.	FORM	Unit leng	Total leng	U.Wt. KG.	Total weight
1	14	11		6.03	66.33	1.21	80.26
2	-	-		-	-	-	-
3	-	-		-	-	-	-
4	14	27		2.97	80.19	1.21	97.03
5	14	4		6.75	27.00	1.21	32.67
6	14	26		1.33	34.58	1.21	41.84
7	14	2		3.65	7.30	1.21	8.83
8	14	5		1.00	5.00	1.21	6.05
9	22	4		4.82	19.28	2.98	57.45
10	16	4		4.82	19.28	1.58	30.46
11	12	2		4.82	9.64	0.888	8.56
12	12	33		1.90	62.70	0.888	55.68
						418.83	Kg.

STR.16							
POS	Φ	No.	FORM	Unit leng	Total leng	U.Wt. KG.	Total weight
1	14	11		6.75	74.25	1.21	89.84
2	14	11		1.68	20.68	1.21	25.02
3	14	7		1.98	13.86	1.21	16.77
4	14	30		3.43	102.90	1.21	124.51
5	14	4		7.47	29.88	1.21	36.15
6	14	30		1.48	44.40	1.21	53.72
7	14	2		3.65	7.30	1.21	8.83
8	14	5		1.00	5.00	1.21	6.05
9	22	4		5.42	21.68	2.98	64.61
10	16	4		5.42	21.68	1.58	34.25
11	12	2		5.42	10.84	0.888	9.63
12	12	37		1.90	70.30	0.888	62.43
						531.81	Kg.

REFERENCE DWGS: For reinforcement see dwg. No. 12/3/3/01
 For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

IRRIGATION & DRAINAGE STANDARDS			
Scale:	DWG. No. 12/3/3/03		
Date:	CHECK DROP LIST OF REINFORCEMENT		
Approved:	Sheet No. 5 of 6	Rev. No.	STR. 9 TO 16

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND STANDARD BUREAU

STR.17

Pos.	Φ	Nº	FORM	Unit leng	Total leng	U.Wt. KG.	Total weight
1	14	12		7.11	85.32	1.21	103.24
2	14	12		1.68	22.56	1.21	27.30
3	14	7		2.03	14.21	1.21	17.19
4	14	32		3.53	112.96	1.21	136.68
5	14	4		7.83	31.32	1.21	37.90
6	14	30		1.55	46.50	1.21	56.27
7	14	2		2.65	5.30	1.21	6.41
8	14	5		1.00	5.00	1.21	6.05
9	22	4		5.72	22.88	2.98	68.18
10	16	4		5.72	22.88	1.58	36.15
11	12	2		5.72	11.44	0.888	10.16
12	12	39		1.90	74.10	0.888	65.80
						571.34	Kg.

STR.19

Pos.	Φ	Nº	FORM	Unit leng	Total leng	U.Wt. KG.	Total weight
1	14	11		6.59	72.49	1.21	87.71
2	-	-		-	-	-	-
3	-	-		-	-	-	-
4	14	30		3.37	101.10	1.21	122.33
5	14	4		7.31	29.24	1.21	35.38
6	14	28		1.40	39.20	1.21	47.43
7	14	2		3.85	7.70	1.21	9.32
8	14	6		1.00	6.00	1.21	7.26
9	22	4		5.32	21.28	2.98	63.41
10	16	4		5.32	21.28	1.58	33.62
11	12	2		5.32	10.64	0.888	9.45
12	12	36		1.90	68.40	0.888	60.74
						476.65	Kg.

STR.21

Pos.	Φ	Nº	FORM	Unit leng	Total leng	U.Wt. KG.	Total weight
1	14	12		7.31	87.72	1.21	106.14
2	14	12		2.08	24.96	1.21	30.20
3	14	8		2.03	16.24	1.21	19.65
4	14	32		3.53	112.96	1.21	136.68
5	14	4		8.03	32.12	1.21	38.87
6	14	32		1.55	49.60	1.21	60.02
7	14	2		3.85	7.70	1.21	9.32
8	14	6		1.00	6.00	1.21	7.26
9	22	4		5.92	23.68	2.98	70.57
10	16	4		5.92	23.68	1.58	37.41
11	12	2		5.92	11.84	0.888	10.51
12	12	40		1.90	76.00	0.888	67.49
						594.12	Kg.

STR.23

Pos.	Φ	Nº	FORM	Unit leng	Total leng	U.Wt. KG.	Total weight
1	14	11		7.15	78.65	1.21	95.17
2	14	11		2.28	25.08	1.21	30.35
3	14	9		1.98	17.82	1.21	21.56
4	14	32		3.43	109.76	1.21	132.81
5	14	4		7.87	31.48	1.21	38.09
6	14	30		1.48	44.40	1.21	53.72
7	14	2		4.05	8.10	1.21	9.80
8	14	7		1.00	7.00	1.21	8.47
9	22	4		5.82	23.28	2.98	69.37
10	16	4		5.82	23.28	1.58	36.78
11	12	4		5.82	11.64	0.888	10.34
12	12	39		1.90	74.10	0.888	65.80
						572.26	Kg.

STR.18

Pos.	Φ	Nº	FORM	Unit leng	Total leng	U.Wt. KG.	Total weight
1	14	11		6.23	68.53	1.21	82.92
2	-	-		-	-	-	-
3	-	-		-	-	-	-
4	14	28		2.97	83.16	1.21	100.62
5	14	4		6.95	27.80	1.21	33.64
6	14	26		1.33	34.58	1.21	41.84
7	14	2		3.85	7.70	1.21	9.32
8	14	6		1.00	6.00	1.21	7.26
9	22	4		5.02	20.08	2.98	59.84
10	16	4		5.02	20.08	1.58	31.73
11	12	2		5.02	10.04	0.888	8.92
12	12	34		1.90	64.60	0.888	57.36
						433.43	Kg.

STR.20

Pos.	Φ	Nº	FORM	Unit leng	Total leng	U.Wt. KG.	Total weight
1	14	11		6.95	76.45	1.21	92.50
2	14	11		2.08	22.88	1.21	27.68
3	14	8		1.98	15.84	1.21	19.17
4	14	31		3.43	106.33	1.21	128.66
5	14	4		7.67	30.68	1.21	37.12
6	14	30		1.48	44.40	1.21	53.72
7	14	2		3.85	7.70	1.21	9.32
8	14	6		1.00	6.00	1.21	7.26
9	22	4		5.62	22.48	2.98	66.99
10	16	4		5.62	22.48	1.58	35.52
11	12	2		5.62	11.24	0.888	9.98
12	12	38		1.90	72.20	0.888	64.11
						552.03	Kg.

STR.22

Pos.	Φ	Nº	FORM	Unit leng	Total leng	U.Wt. KG.	Total weight
1	14	11		6.79	74.69	1.21	90.37
2	-	-		-	-	-	-
3	-	-		-	-	-	-
4	14	30		3.37	101.10	1.21	122.33
5	14	4		7.51	30.04	1.21	36.35
6	14	28		1.40	39.20	1.21	47.43
7	14	2		4.05	8.10	1.21	9.80
8	14	7		1.00	7.00	1.21	8.47
9	22	4		5.52	22.08	2.98	65.80
10	16	4		5.52	22.08	1.58	34.89
11	12	2		5.52	11.04	0.888	9.80
12	12	37		1.90	70.30	0.888	62.43
						487.66	Kg.

STR.24


Pos.	Φ	Nº	FORM	Unit leng	Total leng	U.Wt. KG.	Total weight
1	14	12		7.51	90.12	1.21	109.05
2	14	12		2.28	27.36	1.21	33.11
3	14	9		2.03	18.27	1.21	22.11
4	14	33		3.53	116.49	1.21	140.95
5	14	4		8.23	32.92	1.21	39.83
6	14	30		1.55	46.50	1.21	56.27
7	14	2		4.05	8.10	1.21	9.80
8	14	7		1.00	7.00	1.21	8.47
9	22	4		6.12	24.48	2.98	72.95
10	16	4		6.12	24.48	1.58	38.68
11	12	2		6.12	12.24	0.888	10.87
12	12	41		1.90	77.90	0.888	69.18
						611.27	Kg.

REFERENCE DWGS: For reinforcement see dwg. N^o 12/3/3/01
For bars with variable unit length see note under the same title at dwg. N^o 20/2/10/01


Scale: IRRIGATION & DRAINAGE STANDARDS
Date: DWG. N^o 12/3/3/04
Approved: Sheet. N^o: 6 of 6 Rev. N^o

CHECK DROP
LIST OF REINFORCEMENT
STR. 17 TO 24


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

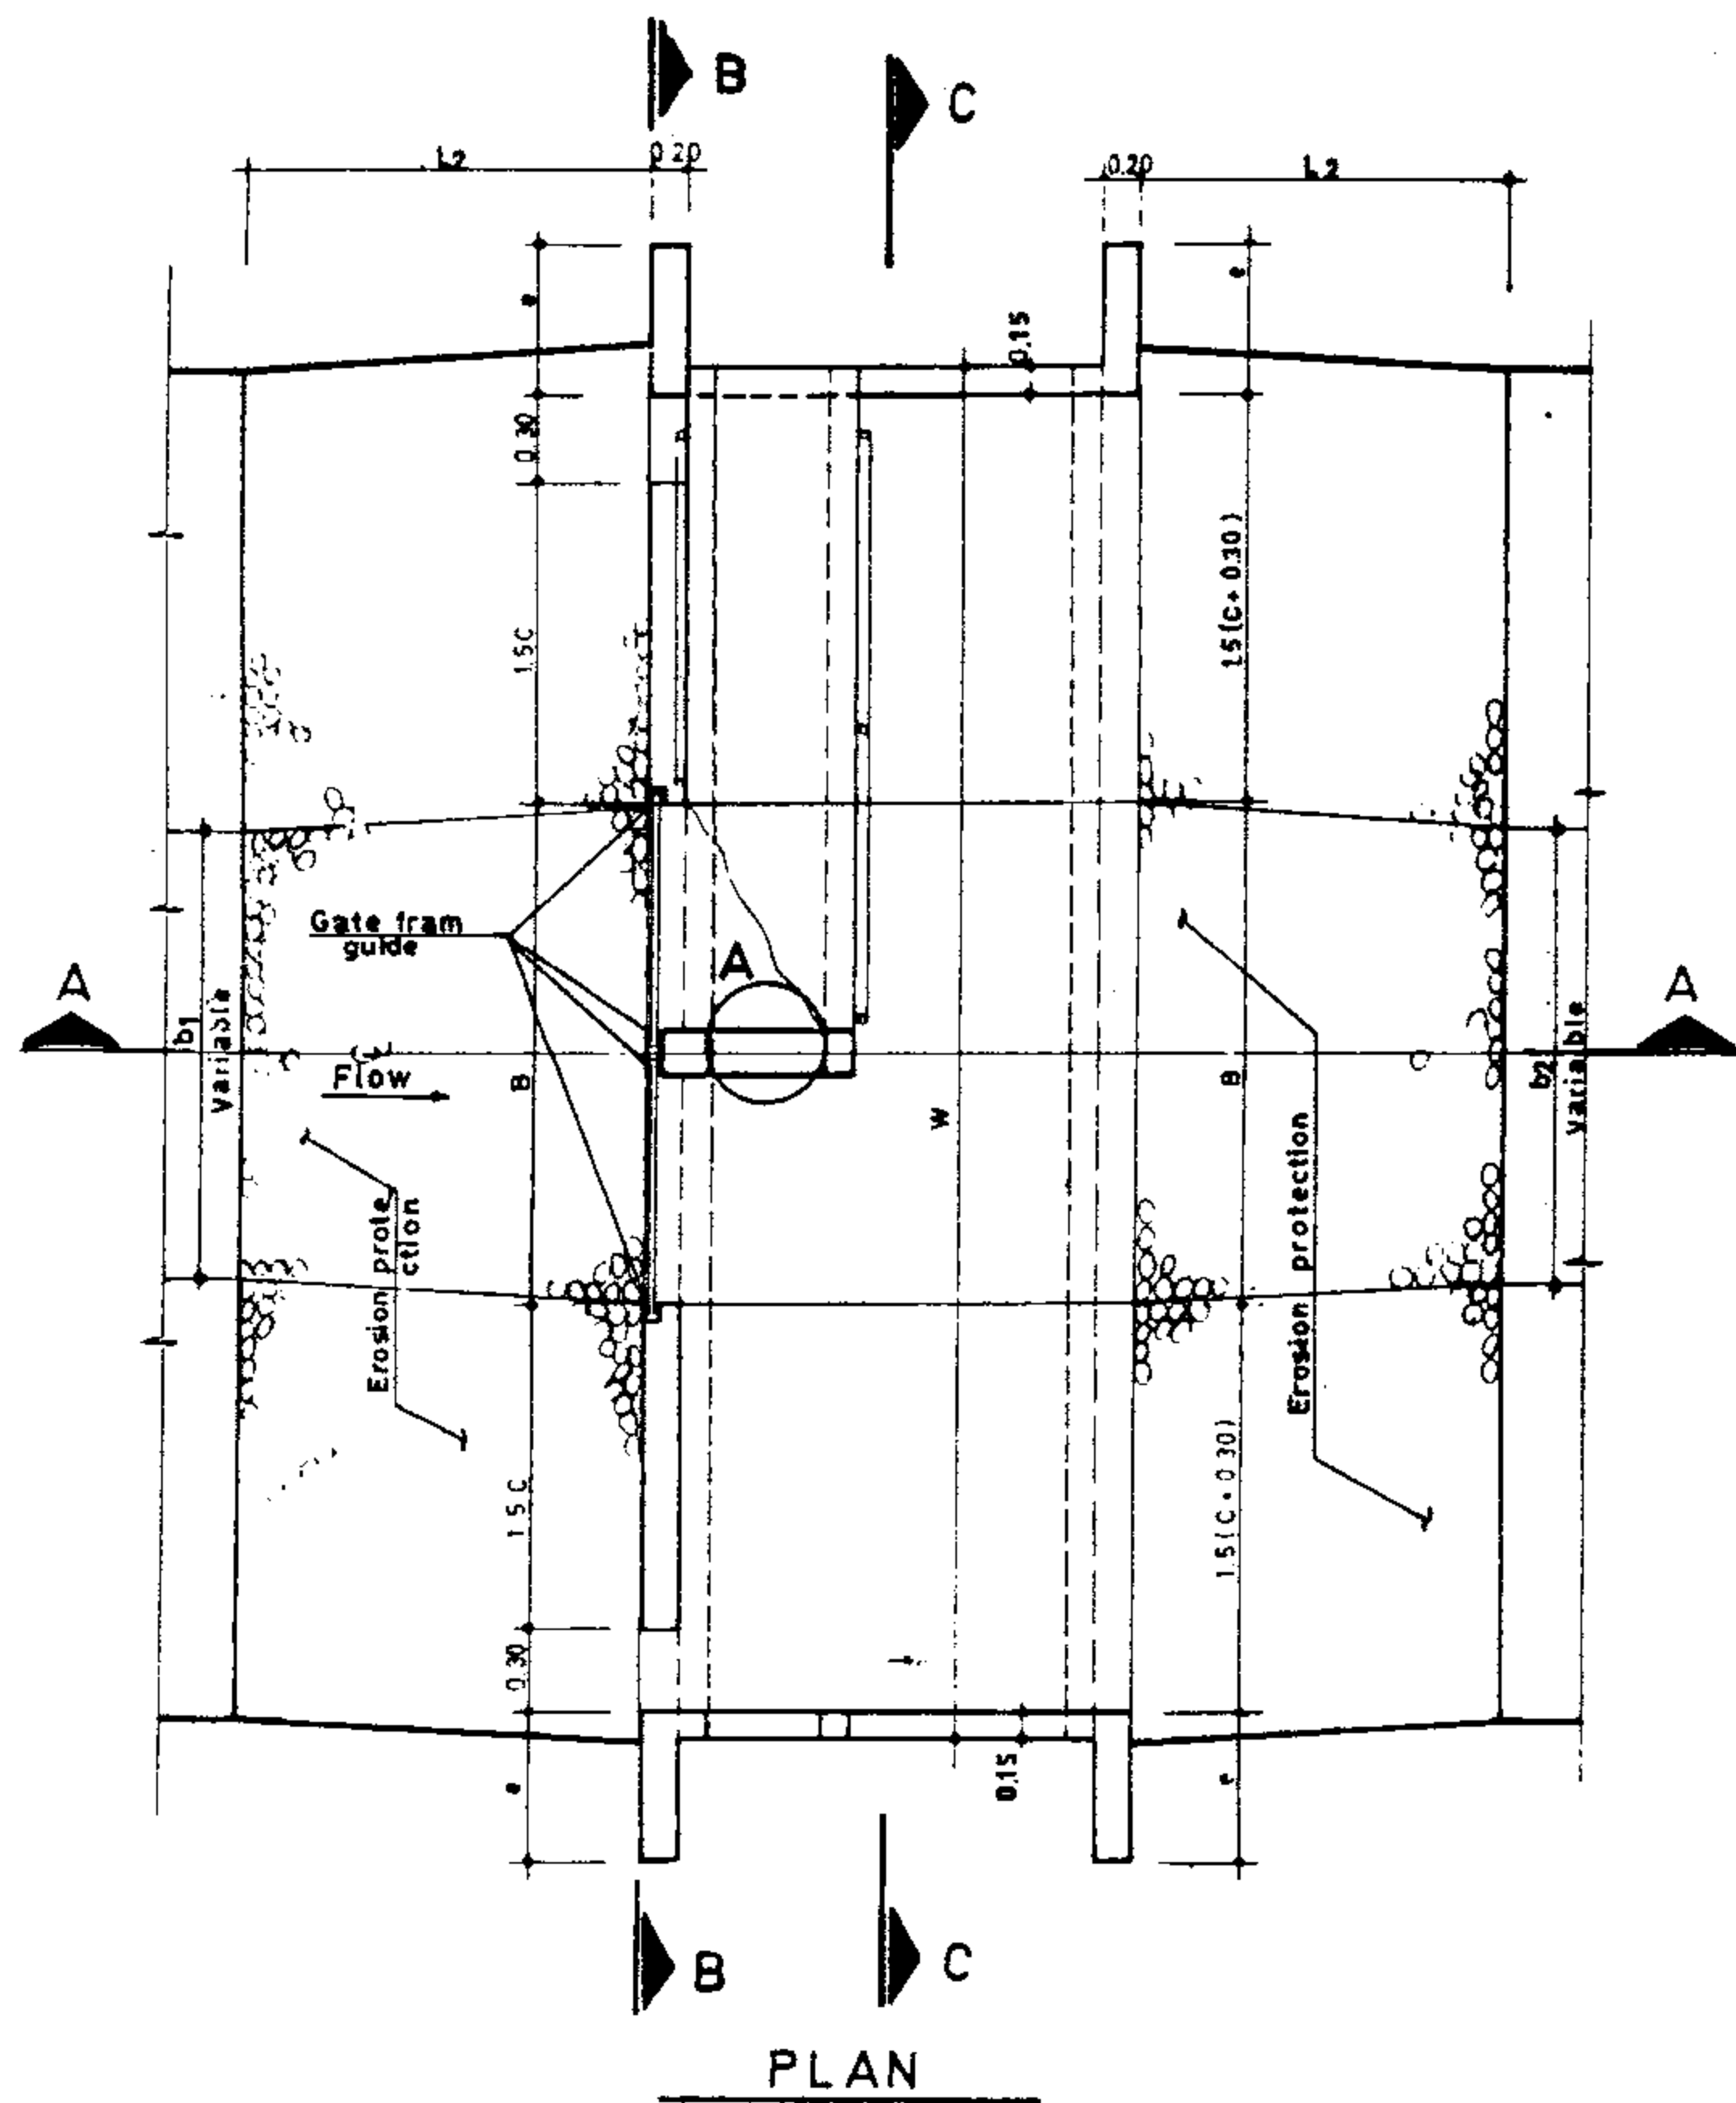

PLAN

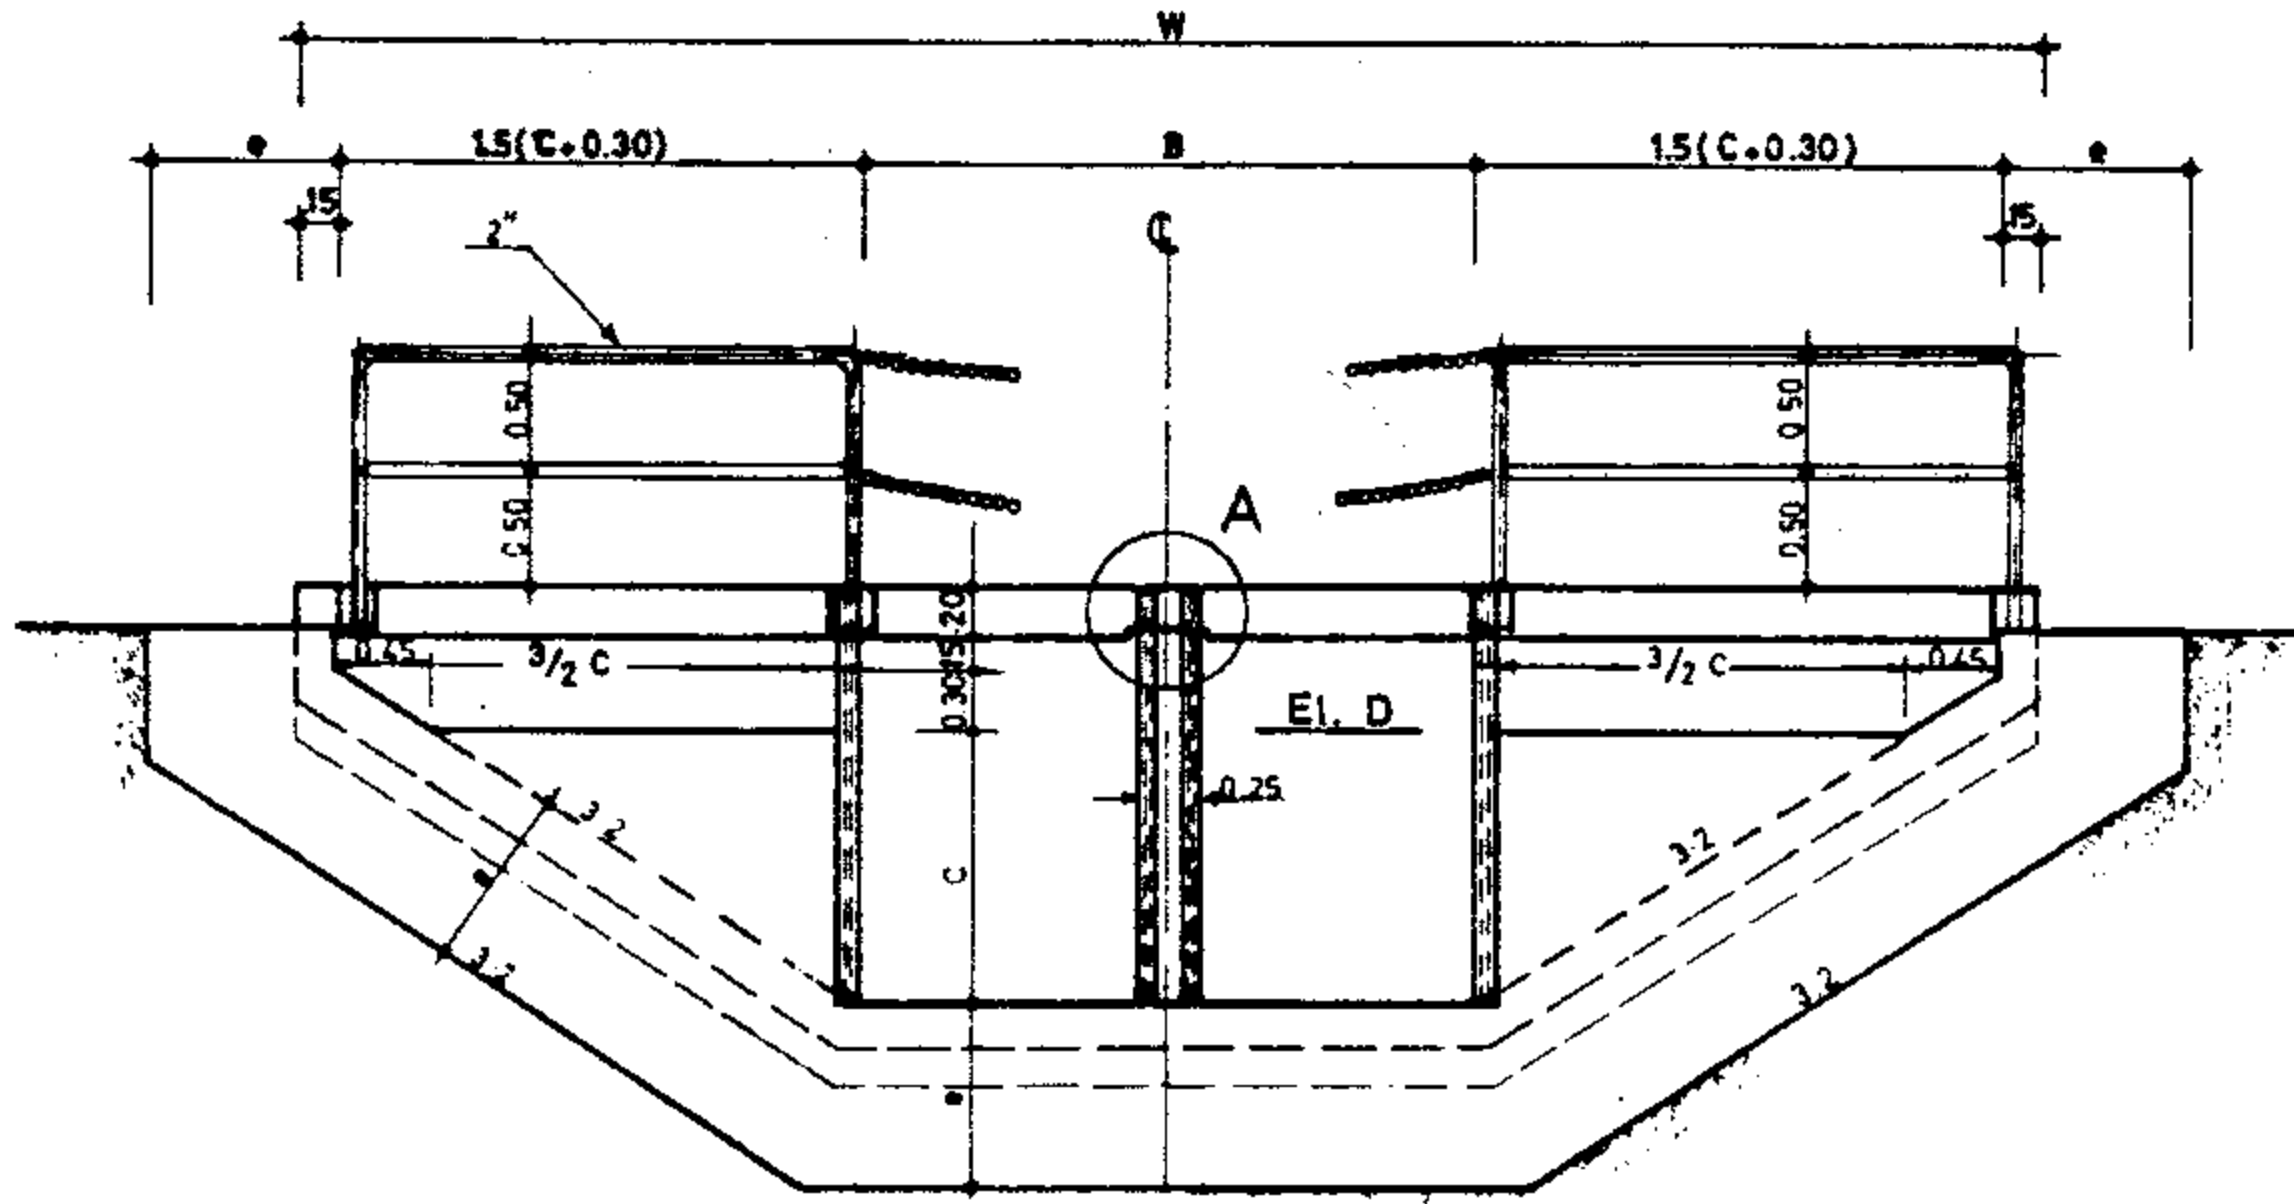


SECTION B.B.

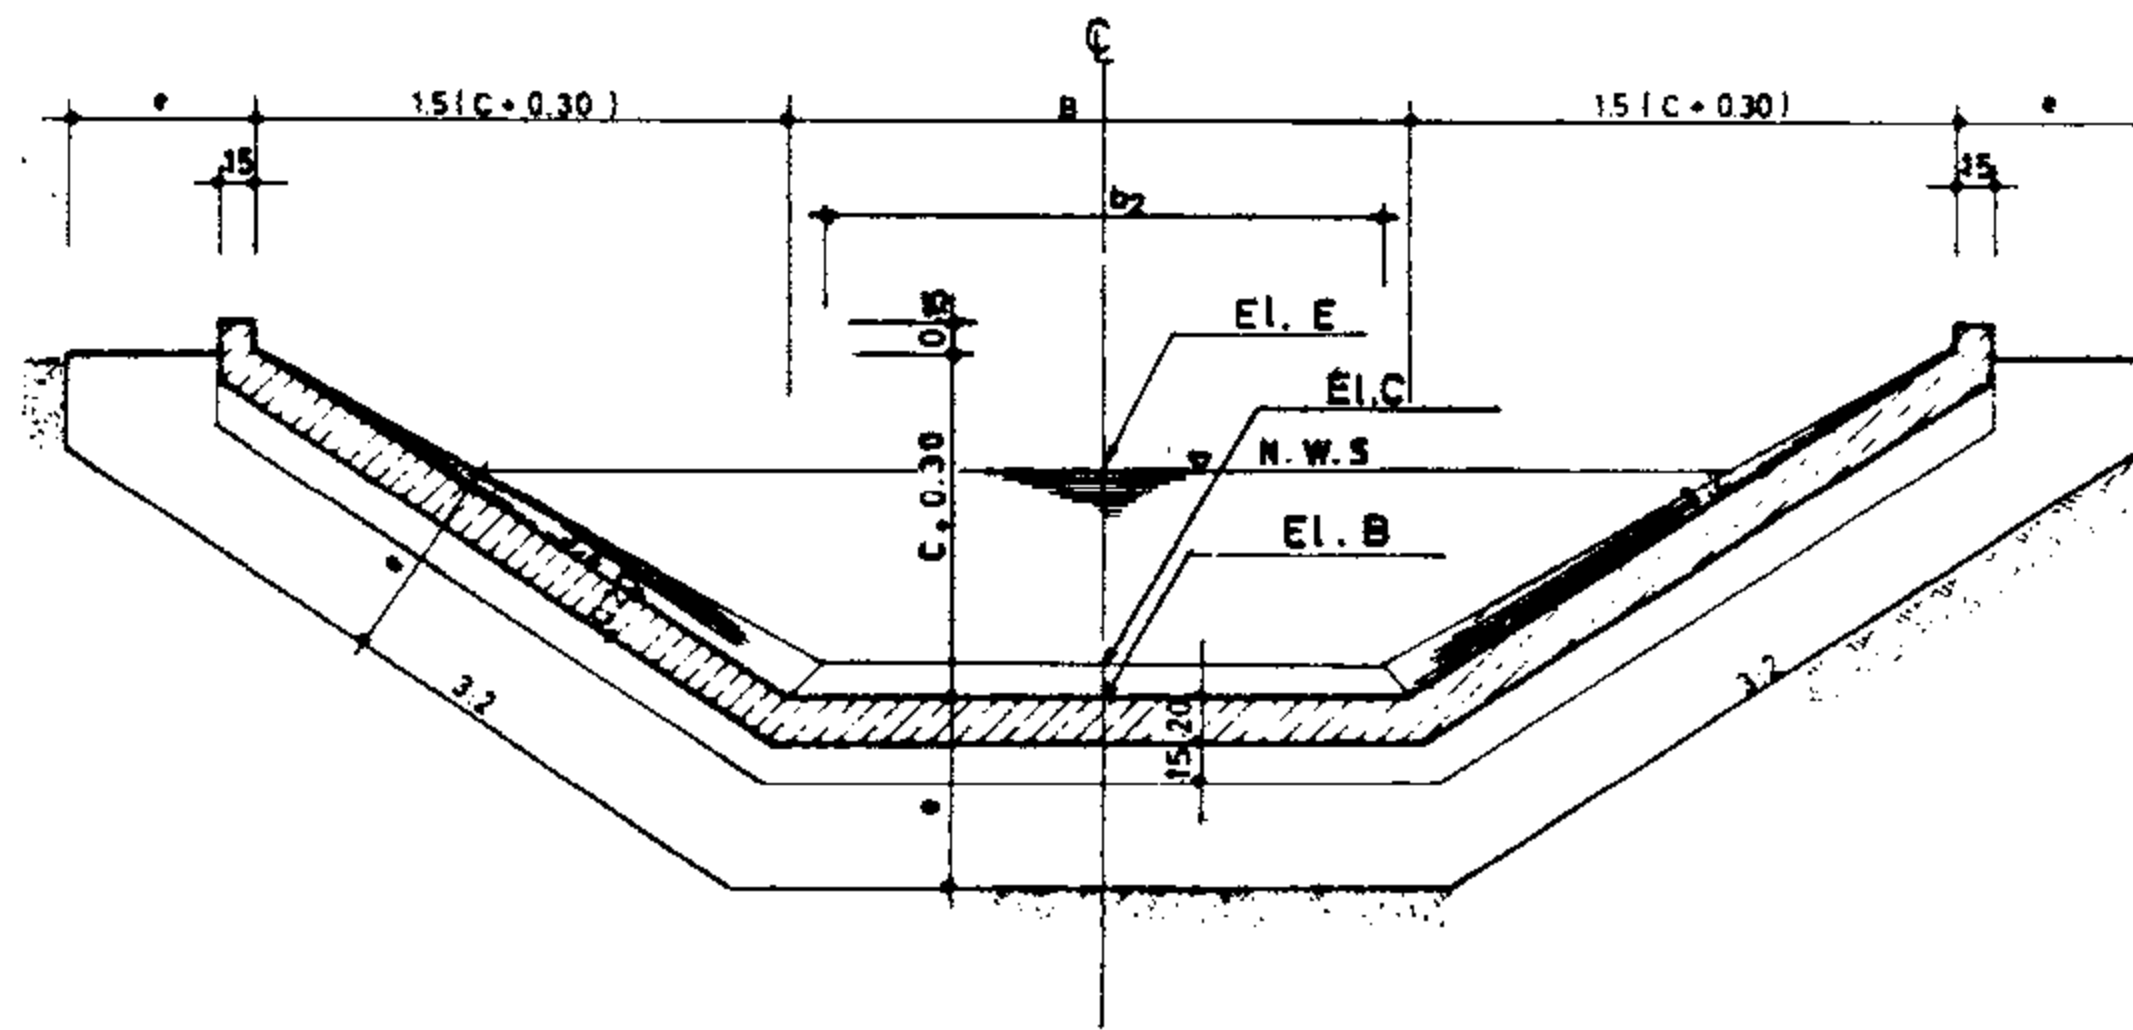


SECTION C.C.


# STR.	MAX. Q m ³ /s	DIMENSION TABLE												Conc. m ³	R/Bor Kg.	Form m ²
		SLIDE GATE	STANDARD DIMENSION													
		WIDTH m	FRM HT. m	B m	C m	L1 m	L2 m	N #	R m	W m	X m	e m				
1	1,600	100x080	1.70	2.25	0.85	2.10	2.00	5	0.300	6.00	1.35	0.75	7.62	512.63	31.90	
2	1,800	100x090	1.80	2.25	0.95	2.20	2.50	5	0.350	6.30	1.40	0.75	8.07	540.63	33.47	
3	2,000	100x100	2.20	2.25	1.05	2.30	2.50	5	0.300	6.60	1.50	0.75	8.59	588.54	38.79	
4	2,200	100x110	2.40	2.25	1.15	2.40	2.50	6	0.325	6.90	1.25	0.75	8.95	616.34	39.94	
5	2,160	120x090	1.90	2.65	1.00	2.20	2.50	6	0.300	6.85	1.25	0.75	8.88	591.39	37.18	
6	2,400	120x100	2.10	2.65	1.10	2.30	2.50	6	0.325	7.15	1.30	0.75	9.20	624.06	39.79	
7	2,640	120x110	2.40	2.65	1.20	2.40	2.50	6	0.350	7.40	1.35	0.75	9.71	668.07	42.50	
8	2,520	140x090	2.00	3.05	1.00	2.30	2.50	6	0.375	7.25	1.30	0.75	9.28	643.90	38.86	
9	2,800	140x100	2.20	3.05	1.10	2.40	3.00	6	0.275	7.55	1.40	0.75	9.80	678.13	41.47	
10	3,080	140x110	2.40	3.05	1.20	2.50	3.00	6	0.300	7.85	1.45	0.75	10.38	710.06	44.16	
11	3,200	160x100	2.20	3.45	1.10	2.40	3.00	6	0.350	7.95	1.45	0.75	10.35	711.01	43.07	

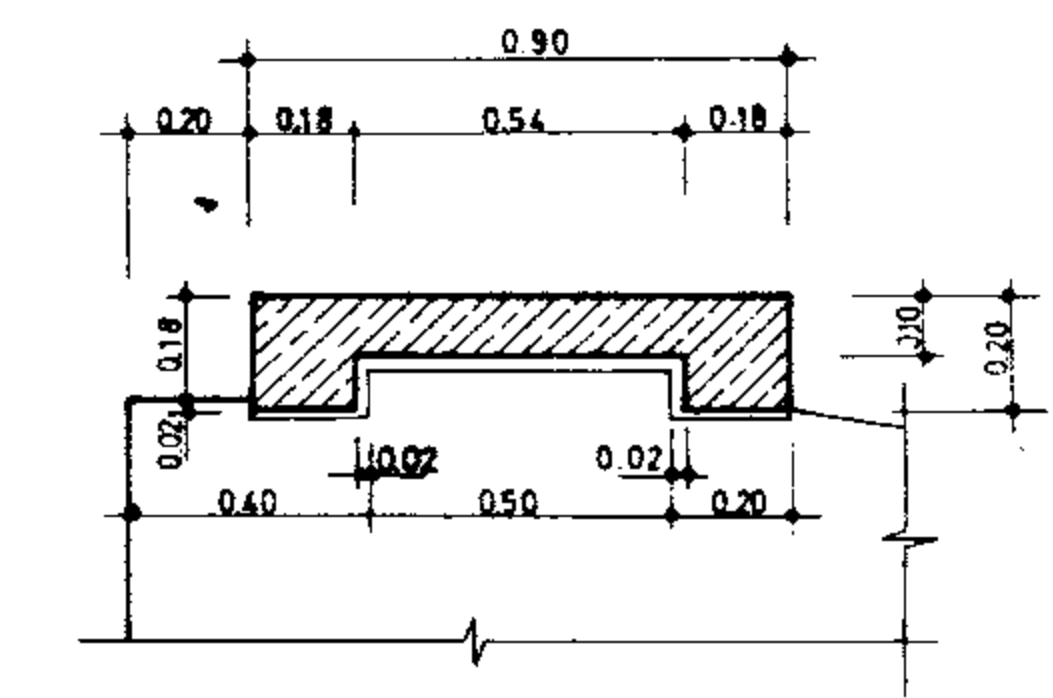


DETAIL B

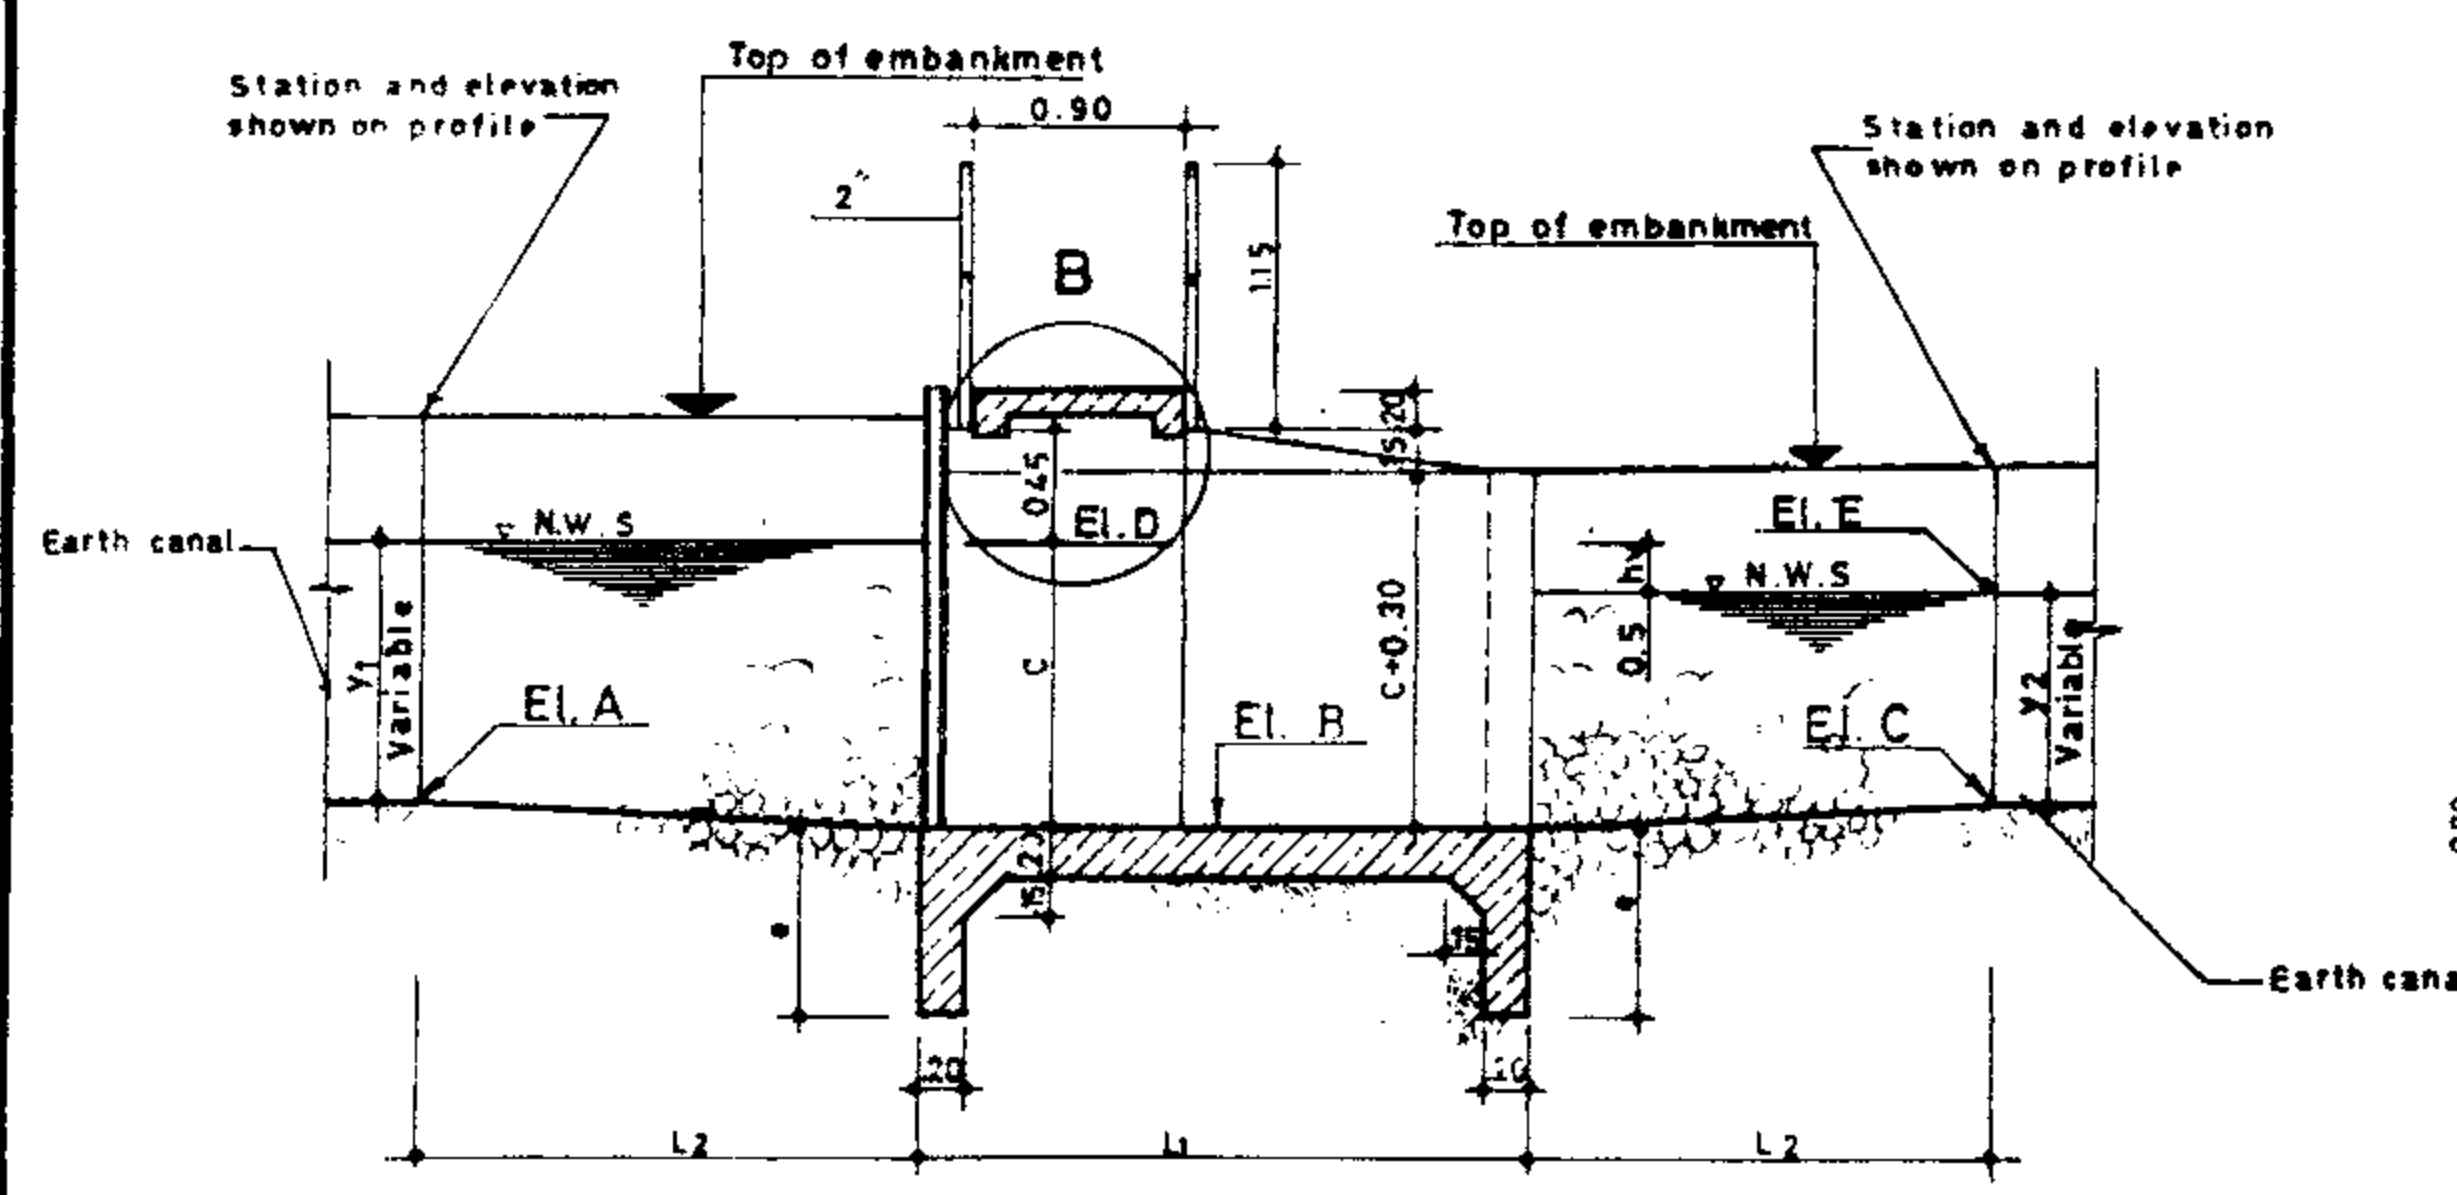

SECTION A.A.

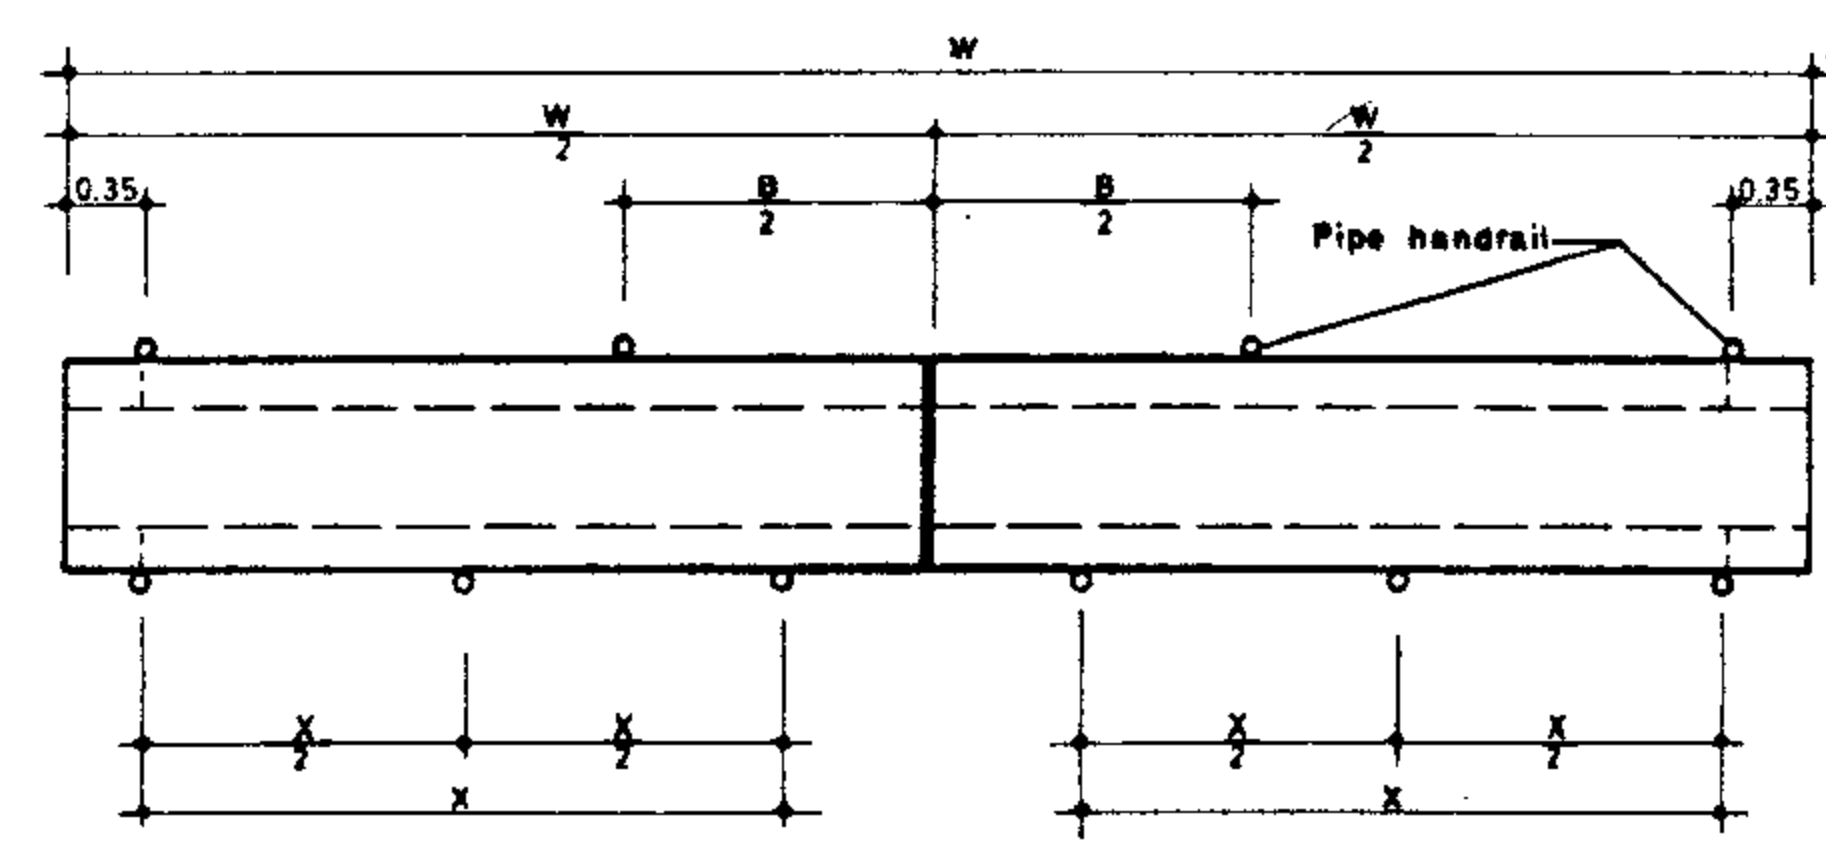

PLAN OPERATING DECK






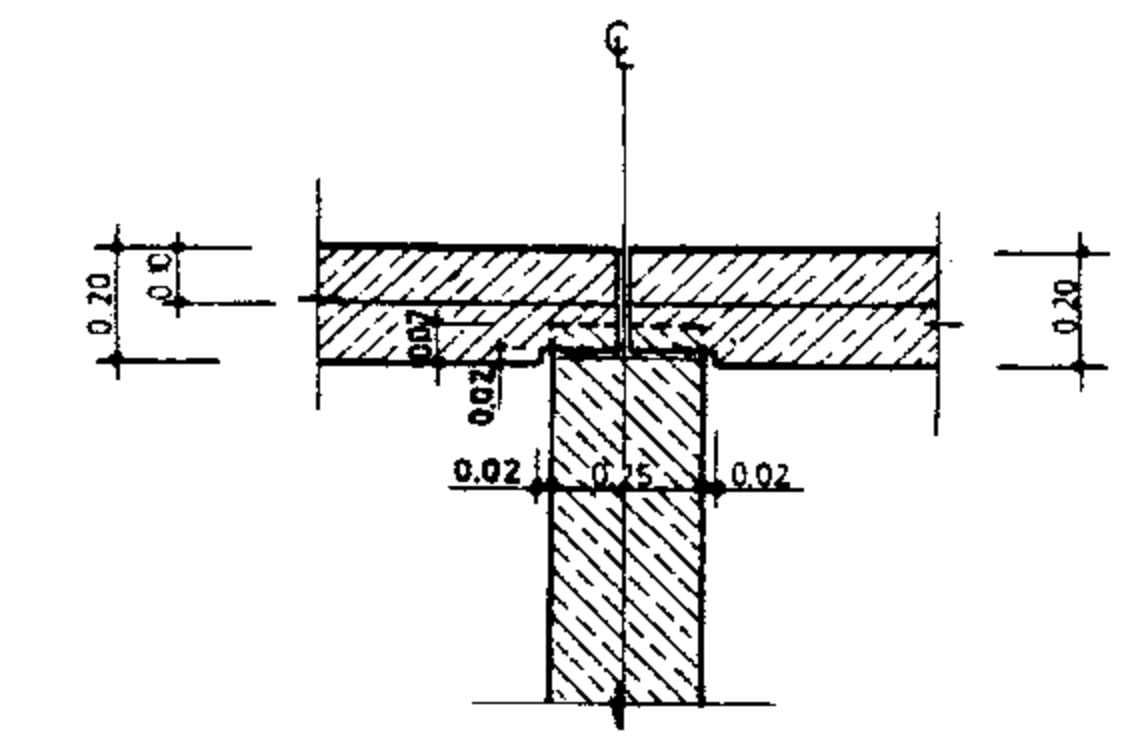


DETAIL A

REFERENCE DWGS: For general notes and minimum requirements for detailing reinforcement see dwgs. N^o 20/2/1/01 TO 20/2/1/03
 For reinforcement see dwg N^o 12/2/3/01
 For notes on check structure selecting procedure, see dwg. N^o 12/1/1/01
 For type of erosion protection see dwg N^o 13/1/1/01
 For construction detail of "gate frame guide" see dwg. N^o 12/6/1/01

Scale: N.T.S	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. N ^o 12/2/1/02	CHECK STRUCTURES (Earth canal)
Approved:	Sheet N ^o 2 of 5	Rev. N ^o
		Q = 1600 ~ 3200 l/sec.
		PLAN & SECTION

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

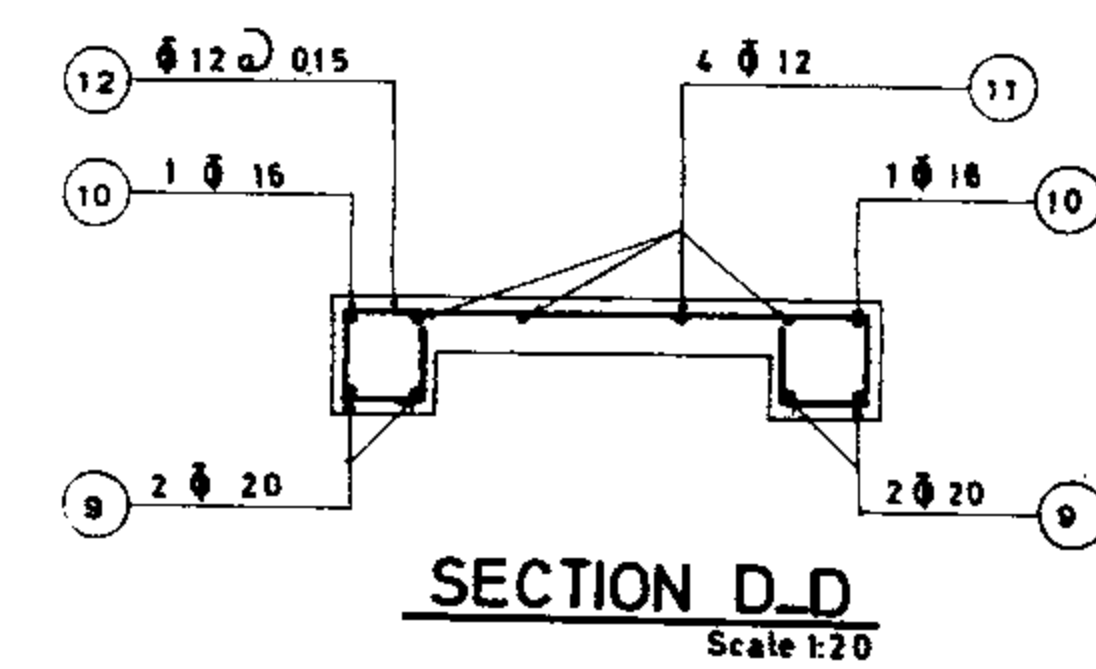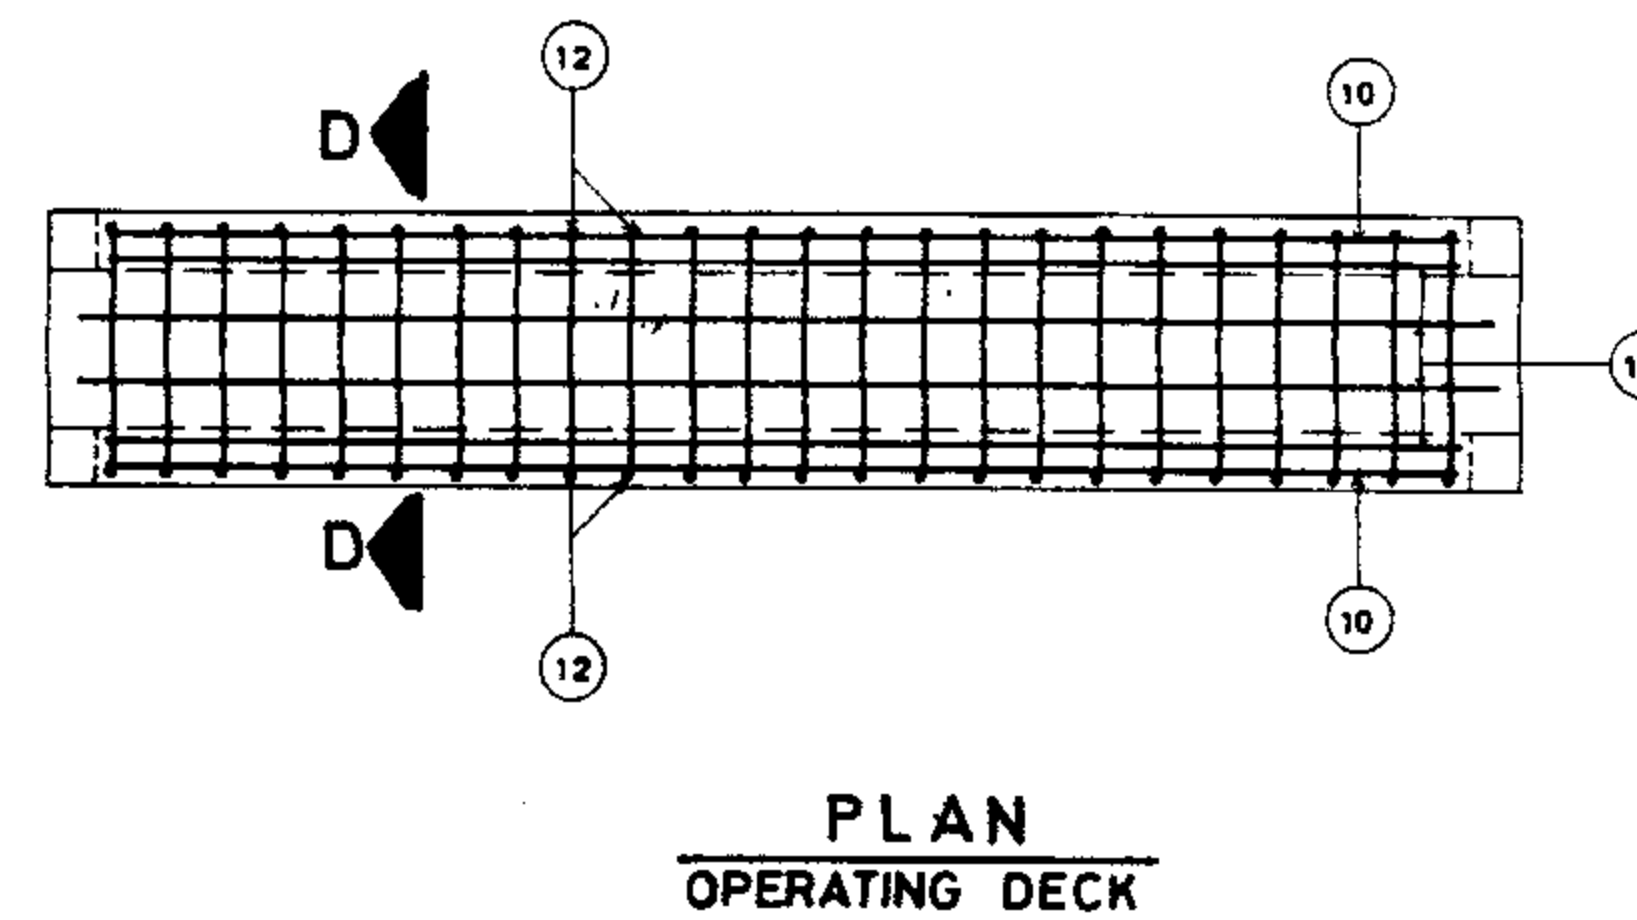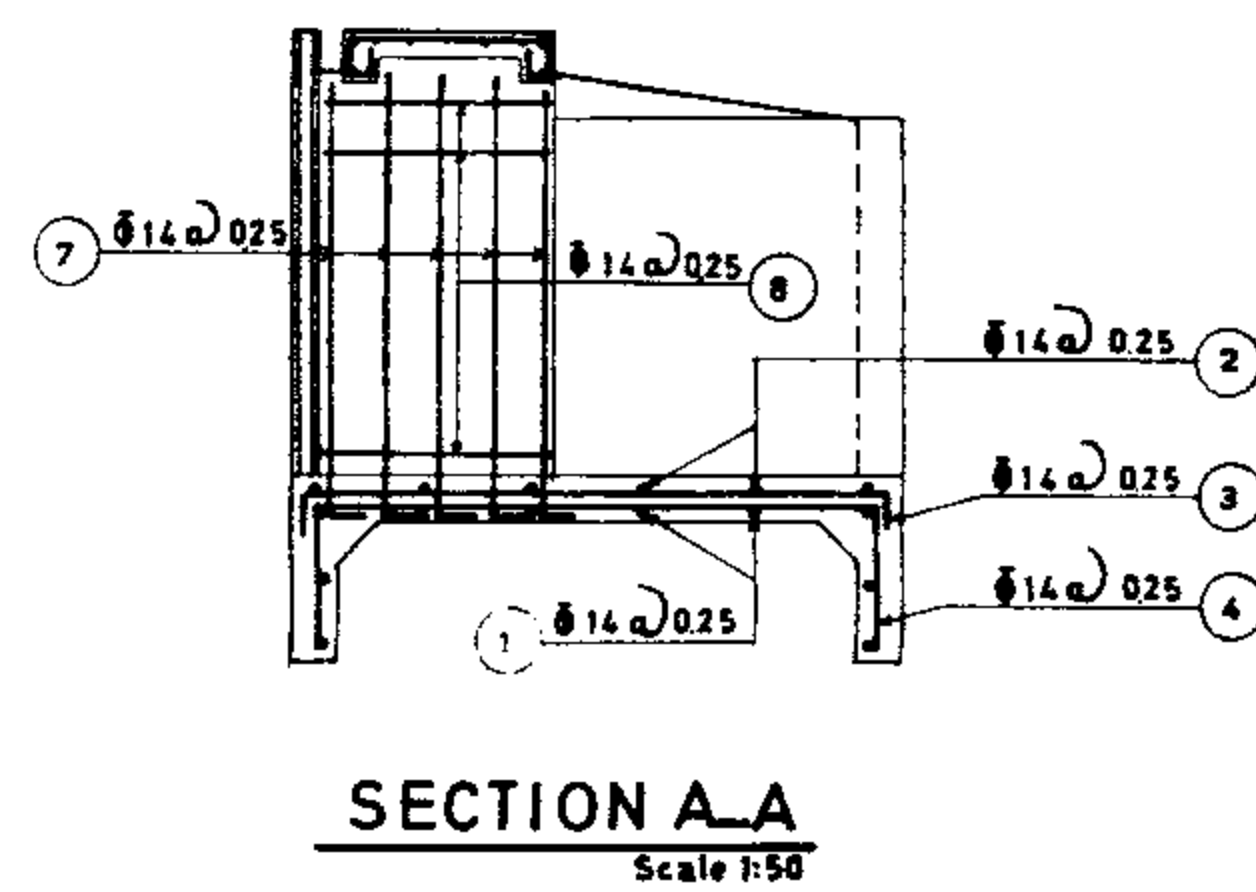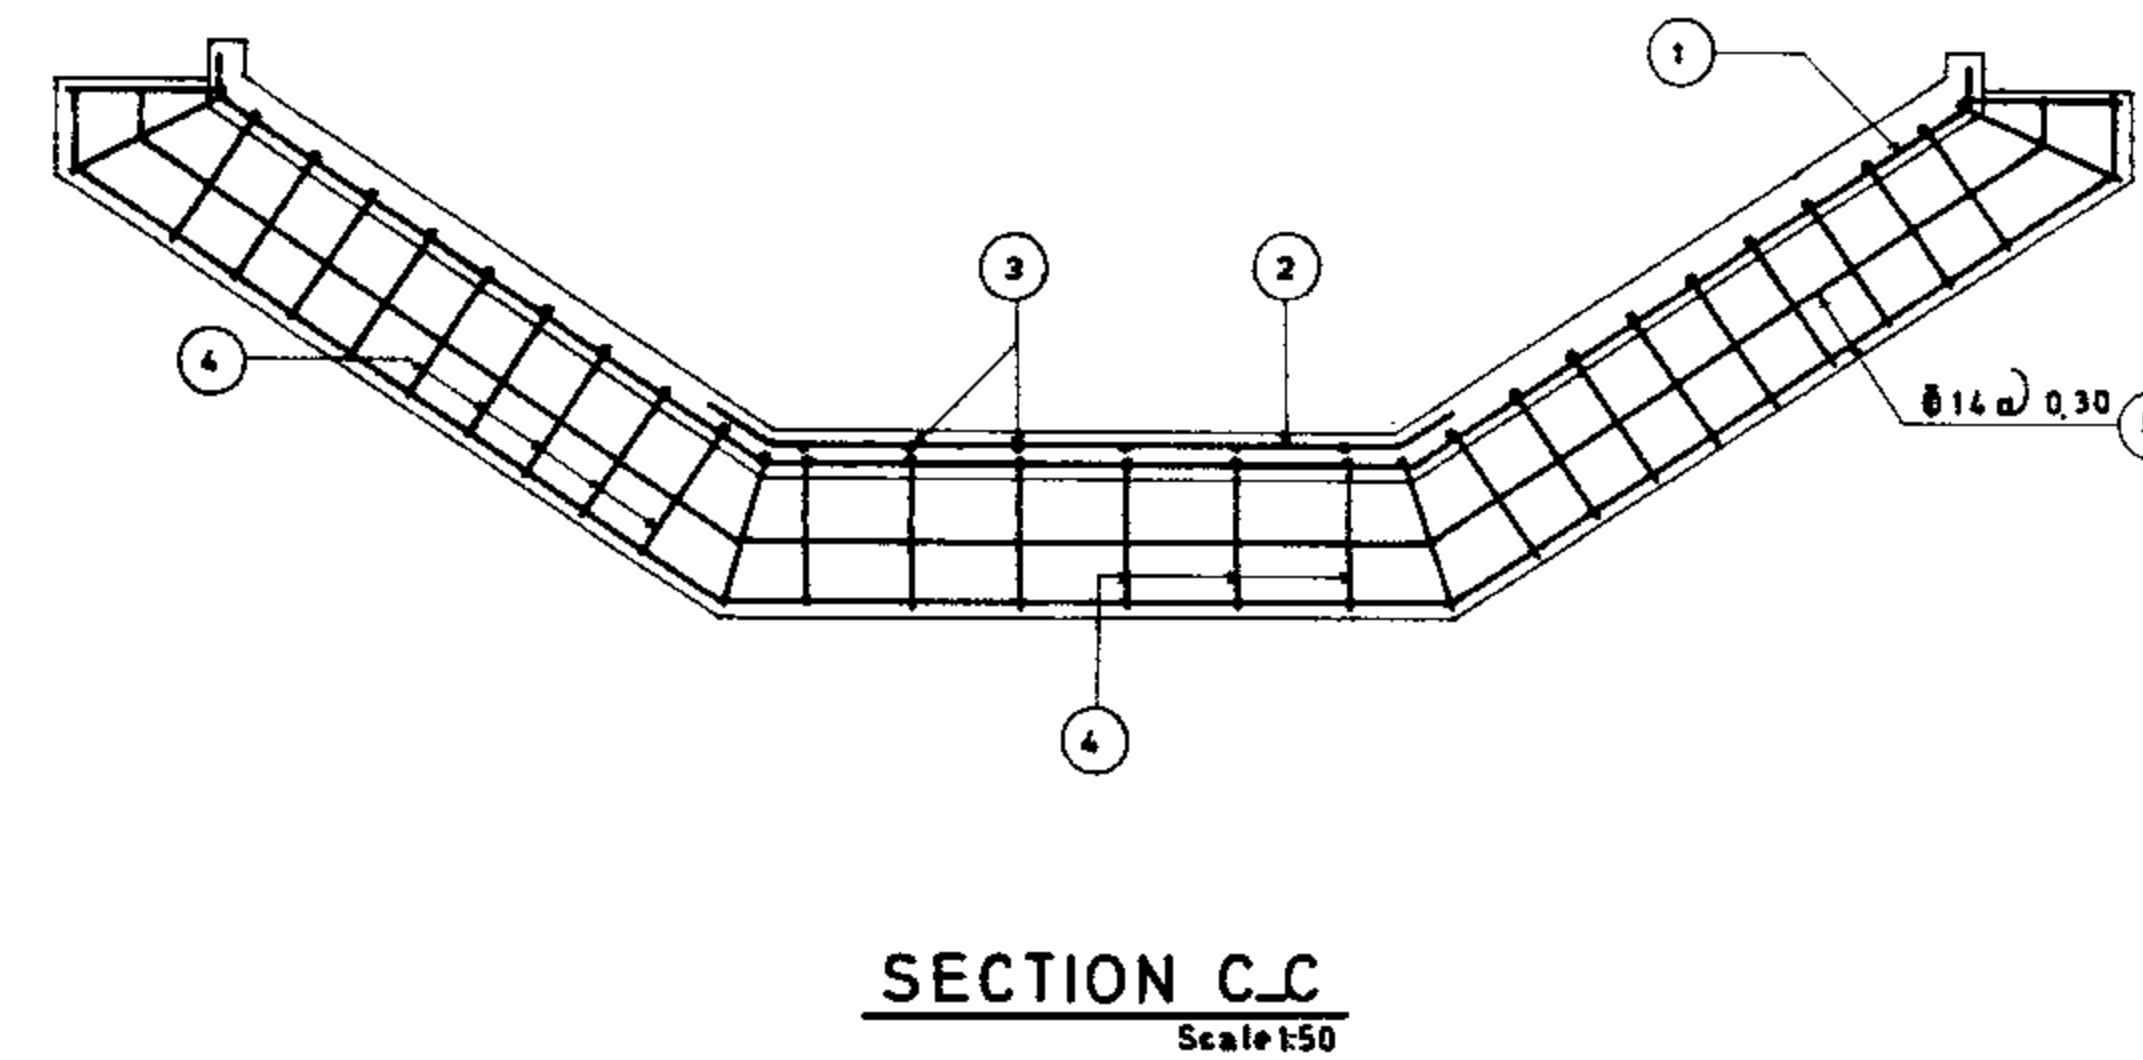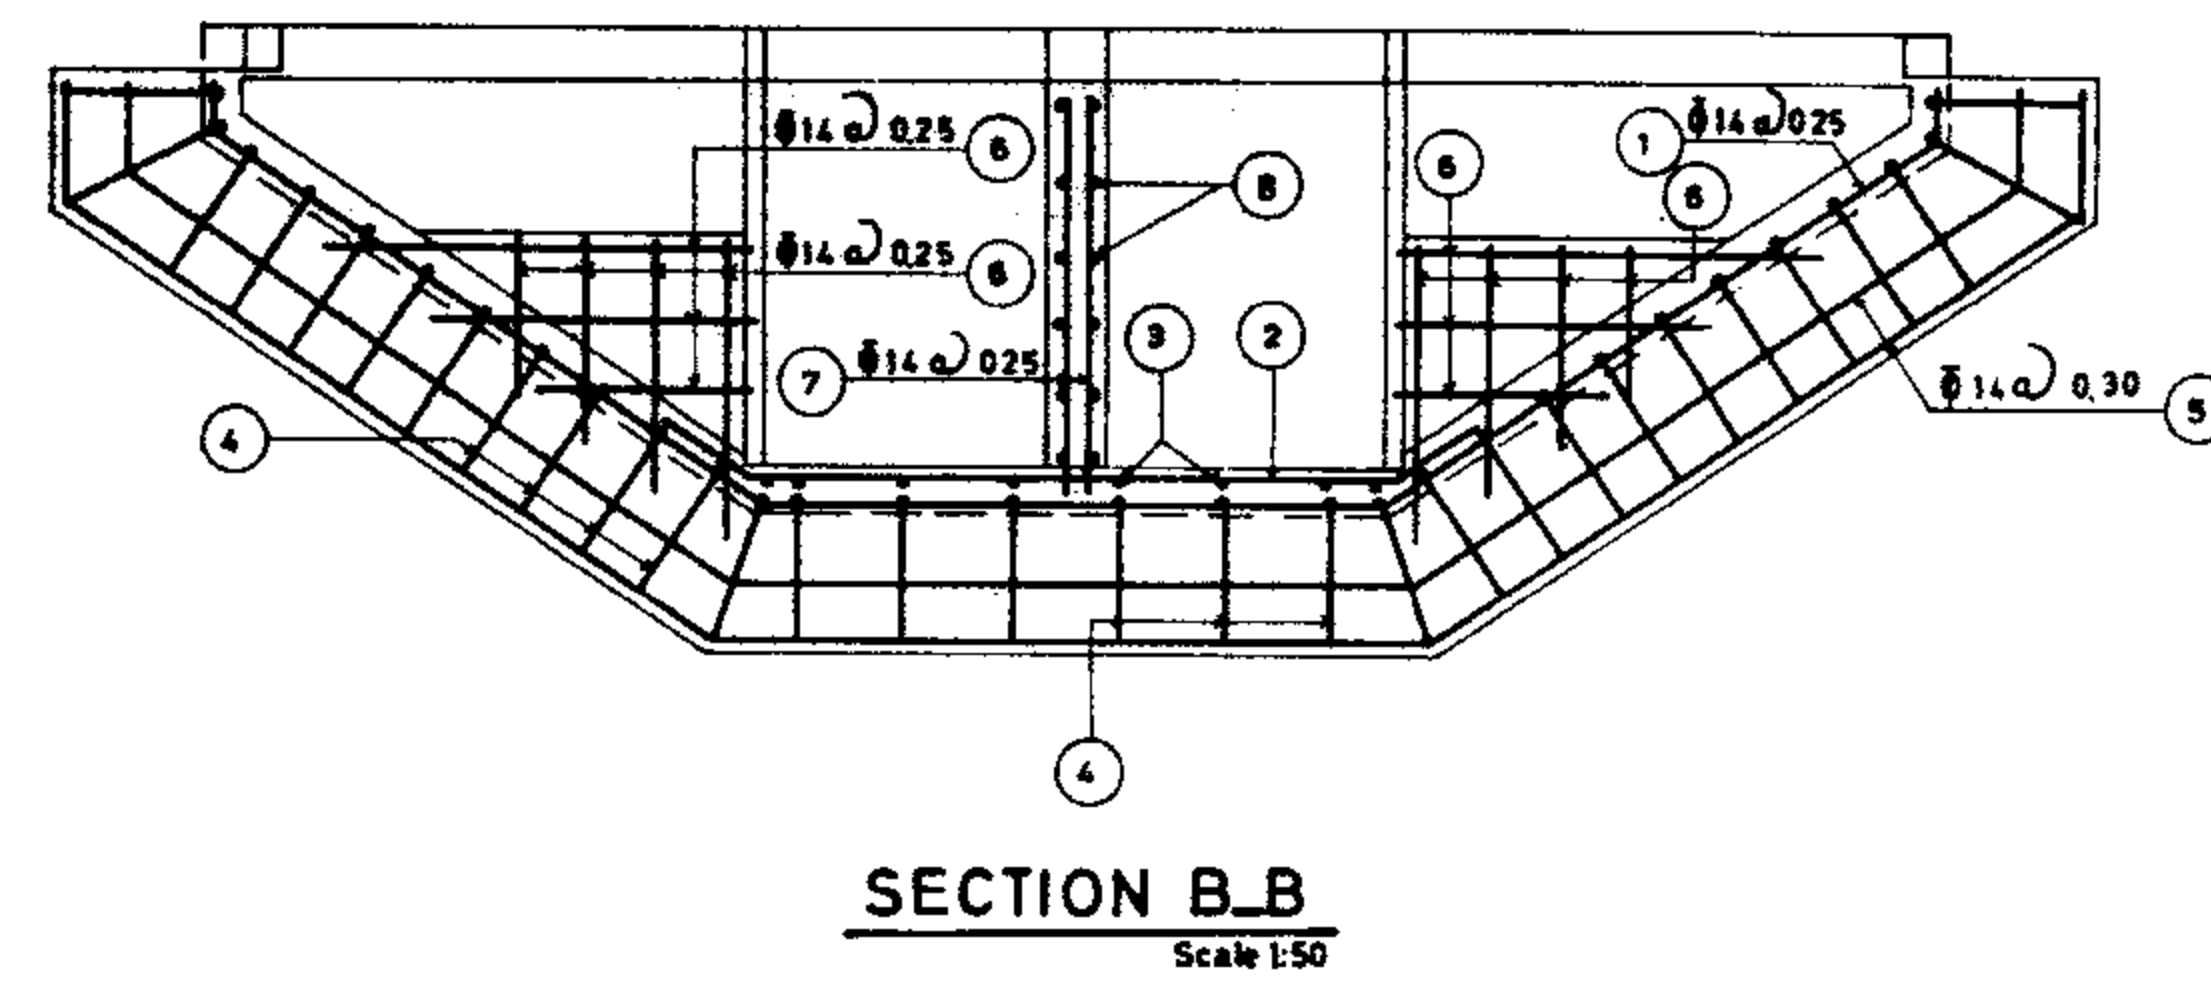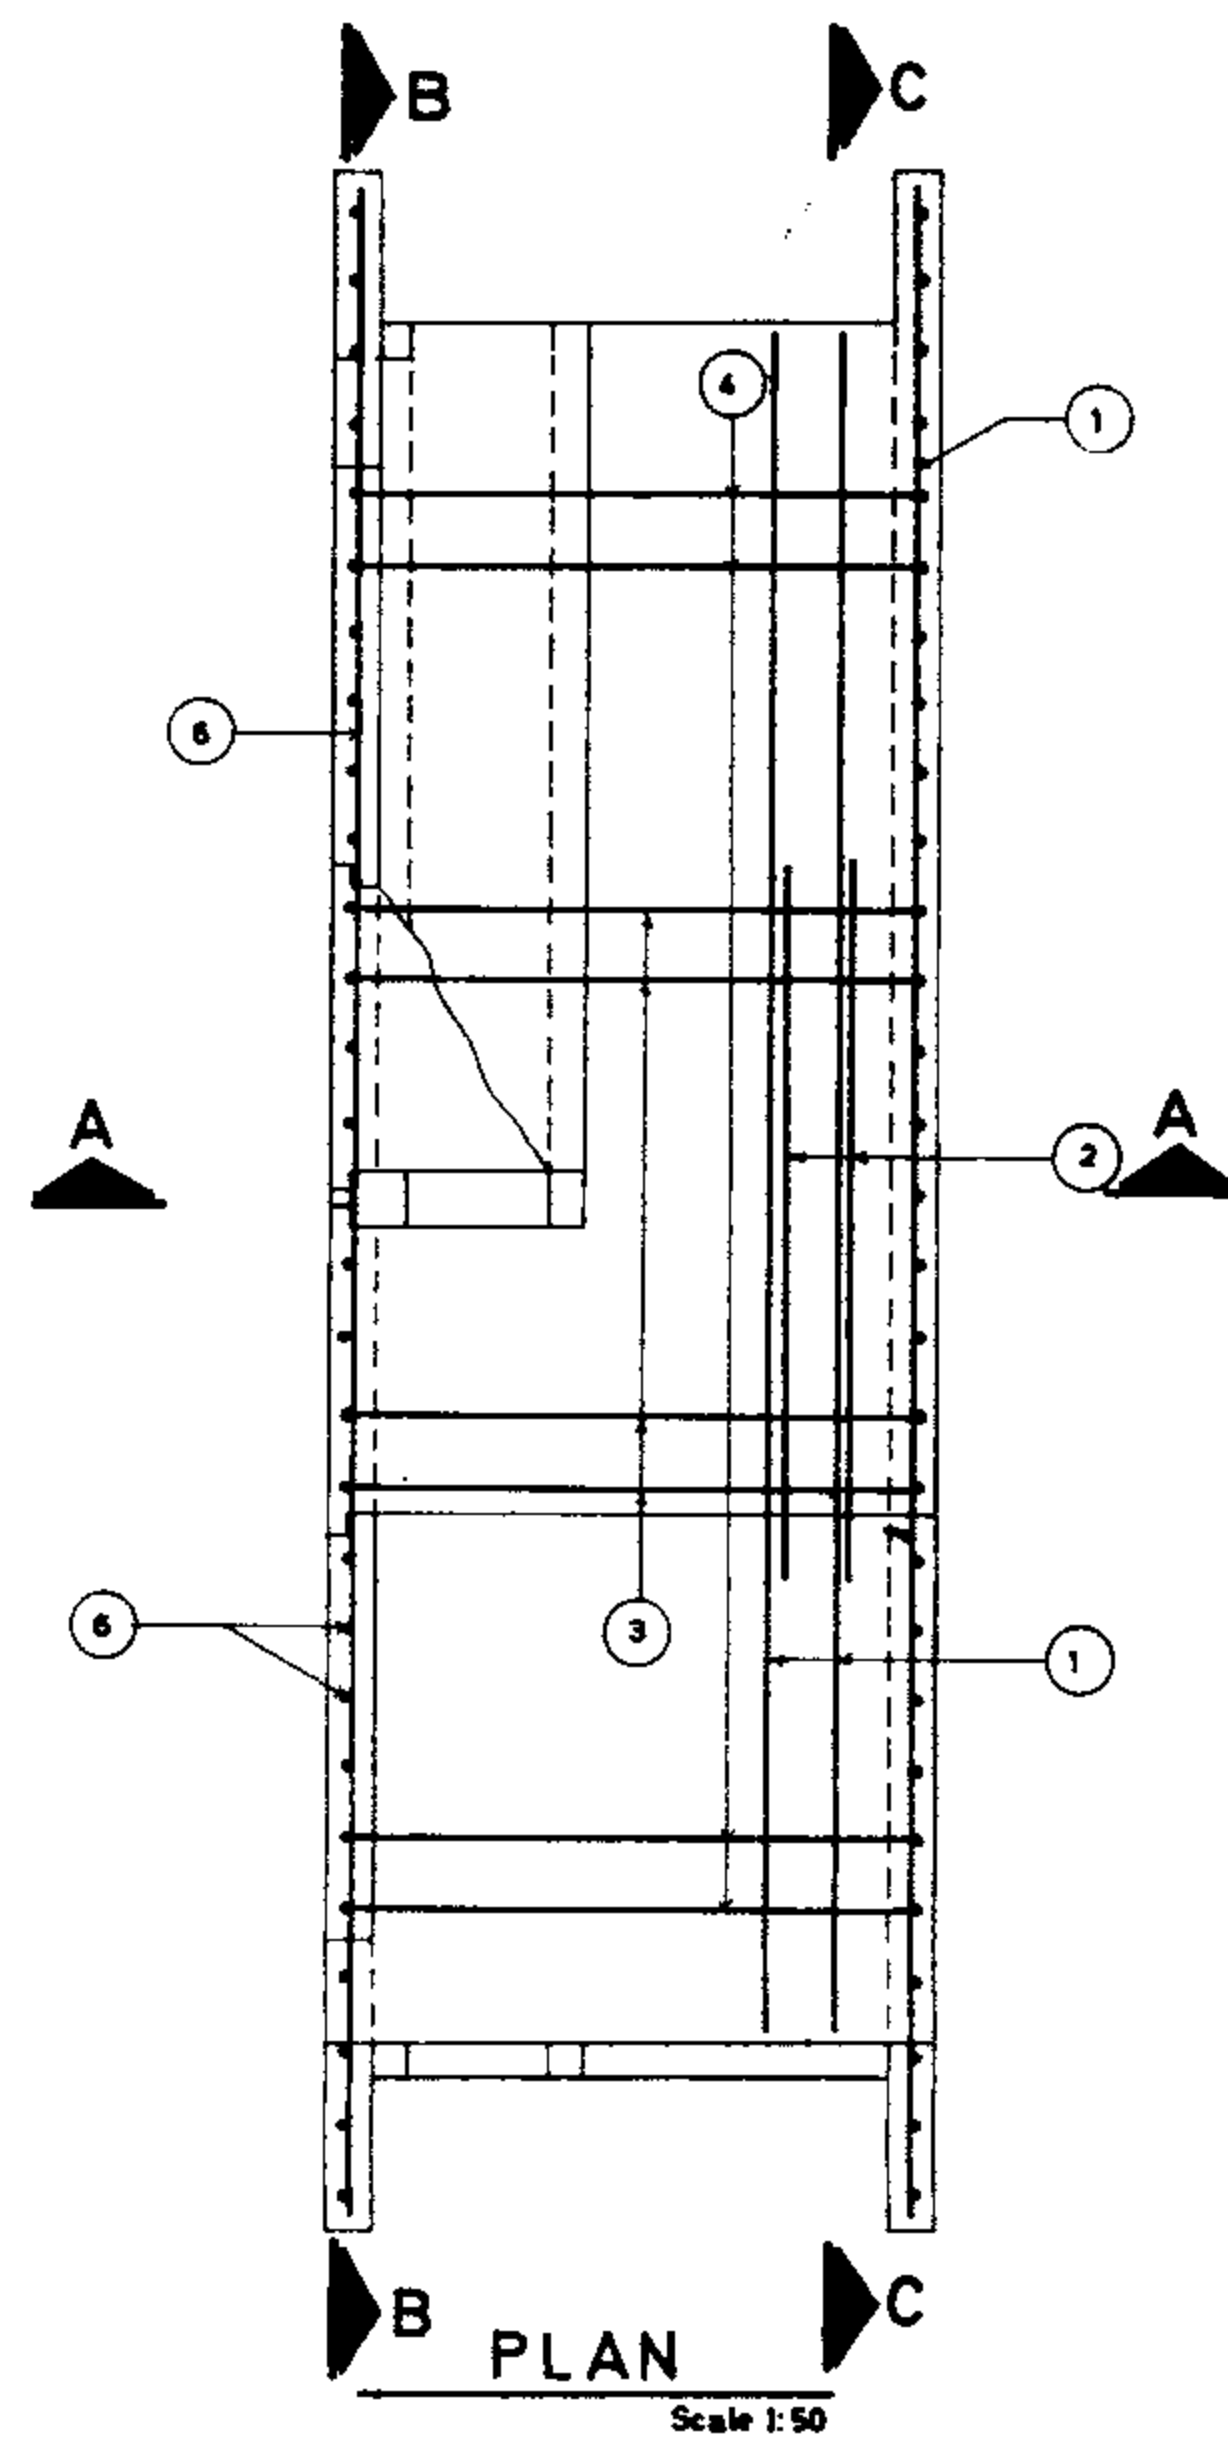

REFERENCE DWGS: For detail of dimensions see dwgs. No. 12/2/1/01 & 12/2/1/02
 For reinforcement tables see dwgs. No. 12/2/3/03 & 12/2/3/03

Scale: 1:50, 1:20

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG. No. 12/2/3/01

CHECK STRUCTURES

Q = 1600 ~ 3200 l/sec.

Approved:

Sheet No: 3 of 5

Rev. No.

REINFORCEMENT
 PLAN & SECTIONS

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

STR.1

Pos	Φ	No.	FORM	Unit leng	Total leng	U.Wt. KG	Total weight
1	14	10		6.71	67.10	1.21	81.19
2	14	10		2.73	27.30	1.21	33.03
3	14	10		2.42	24.20	1.21	29.28
4	14	29		3.03	87.87	1.21	106.32
5	14	4		7.51	30.04	1.21	36.35
6	14	20		1.11	22.20	1.21	26.86
7	14	5		4.04	20.20	1.21	24.44
8	14	7		2.74	19.78	1.21	23.21
9	20	8		3.12	24.98	2.47	61.65
10	16	4		3.12	12.48	1.58	19.72
11	12	8		3.12	24.96	0.888	22.16
12	12	42		1.50	63.00	0.888	55.94
						520.15	KG

STR.3

Pos	Φ	No.	FORM	Unit leng	Total leng	U.Wt. KG	Total weight
1	14	11		7.43	81.73	1.21	98.89
2	14	11		2.73	30.03	1.21	36.34
3	14	10		2.62	26.20	1.21	31.70
4	14	32		3.23	103.36	1.21	125.07
5	14	4		8.23	32.92	1.21	39.98
6	14	24		1.26	30.24	1.21	36.59
7	14	5		4.44	22.20	1.21	26.86
8	14	8		2.74	21.92	1.21	26.52
9	20	8		3.42	27.36	2.47	67.58
10	16	4		3.42	13.68	1.58	21.61
11	12	8		3.42	27.36	0.888	24.30
12	12	46		1.50	69.00	0.888	61.27
						596.71	KG

STR.5

Pos	Φ	No.	FORM	Unit leng	Total leng	U.Wt. KG	Total weight
1	14	10		7.65	76.50	1.21	92.57
2	14	10		3.13	31.30	1.21	37.87
3	14	12		2.52	30.24	1.21	36.59
4	14	33		3.13	103.29	1.21	124.98
5	14	4		8.45	33.80	1.21	40.90
6	14	22		1.22	26.84	1.21	32.48
7	14	5		4.34	21.70	1.21	26.26
8	14	8		2.74	21.92	1.21	26.52
9	20	8		3.55	28.40	2.47	70.15
10	16	4		3.55	14.20	1.58	22.44
11	12	8		3.55	28.40	0.888	25.22
12	12	48		1.50	72.00	0.888	63.94
						599.92	KG

STR.2

Pos	Φ	No.	FORM	Unit leng	Total leng	U.Wt. KG	Total weight
1	14	10		7.07	70.70	1.21	85.55
2	14	10		2.73	27.30	1.21	33.03
3	14	10		2.52	25.20	1.21	30.49
4	14	30		3.13	93.90	1.21	113.62
5	14	4		7.87	31.48	1.21	38.09
6	14	22		1.19	26.18	1.21	31.68
7	14	5		4.24	21.20	1.21	25.65
8	14	7		2.74	19.78	1.21	23.21
9	20	8		3.27	26.16	2.47	64.62
10	16	4		3.27	13.08	1.58	20.67
11	12	8		3.27	26.16	0.888	23.23
12	12	44		1.50	66.00	0.888	58.61
						548.45	KG

STR.4

Pos	Φ	No.	FORM	Unit leng	Total leng	U.Wt. KG	Total weight
1	14	11		7.79	85.69	1.21	103.68
2	14	11		2.73	30.03	1.21	36.34
3	14	10		2.74	27.40	1.21	33.15
4	14	33		3.33	109.89	1.21	132.97
5	14	4		8.59	34.36	1.21	41.58
6	14	26		1.34	34.84	1.21	42.16
7	14	5		4.64	23.20	1.21	28.07
8	14	8		2.74	21.92	1.21	26.52
9	20	8		3.57	28.56	2.47	70.54
10	16	4		3.57	14.28	1.58	22.56
11	12	8		3.57	28.56	0.888	25.36
12	12	48		1.50	72.00	0.888	63.94
						626.87	KG

STR.6

Pos	Φ	No.	FORM	Unit leng	Total leng	U.Wt. KG	Total weight
1	14	11		8.01	88.11	1.21	106.61
2	14	11		3.13	34.43	1.21	41.66
3	14	12		2.62	31.44	1.21	38.04
4	14	34		3.23	109.82	1.21	132.88
5	14	4		8.81	35.24	1.21	42.64
6	14	24		1.30	31.20	1.21	37.75
7	14	5		4.54	22.70	1.21	27.47
8	14	8		2.74	21.92	1.21	26.52
9	20	8		3.70	29.60	2.47	73.11
10	16	4		3.70	14.80	1.58	23.38
11	12	8		3.70	29.60	0.888	26.28
12	12	50		1.50	75.00	0.888	66.60
						642.94	KG

REFERENCE DWGS: For replacement see dwg. No 12/2/3/01
For bars with variable unit length see note under the same title at dwg. No 20/2/1/01

Scale:
Date:
Approved:

IRRIGATION & DRAINAGE STANDARDS

DWG. No 12/2/3/02

Sheet No: 4 of 5 Rev. No.

CHECK STRUCTURES
LIST OF REINFORCEMENT
STR. 1 TO 6

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

STR. 7

Pos	Φ	No.	FORM	Unit leng	Total leng	U.Wt. KG.	Total weight
1	14	11		8.37	92.07	1.21	111.40
2	14	11		3.13	34.43	1.21	41.66
3	14	12		2.72	32.64	1.21	39.49
4	14	36		3.33	119.88	1.21	145.05
5	14	4		9.17	36.68	1.21	44.38
6	14	26		1.37	35.62	1.21	43.10
7	14	5		4.74	23.70	1.21	28.68
8	14	8		2.74	21.92	1.21	26.52
9	20	8		3.85	30.80	2.47	76.08
10	16	4		3.85	15.40	1.58	24.33
11	12	8		3.85	30.80	0.888	27.35
12	12	52		1.50	78.00	0.888	69.26
						677.30	Kg.

STR. 9

Pos	Φ	No.	FORM	Unit leng	Total leng	U.Wt. KG.	Total weight
1	14	11		8.41	92.51	1.21	111.94
2	14	11		3.53	38.83	1.21	46.98
3	14	14		2.72	38.08	1.21	46.08
4	14	36		3.33	119.88	1.21	145.05
5	14	4		9.21	36.84	1.21	44.58
6	14	24		1.30	31.20	1.21	37.75
7	14	5		4.54	22.70	1.21	27.47
8	14	8		2.74	21.92	1.21	26.52
9	20	8		3.90	31.20	2.47	77.06
10	16	4		3.90	15.60	1.58	24.65
11	12	8		3.90	31.20	0.888	27.71
12	12	54		1.50	81.00	0.888	71.93
						687.72	Kg.

STR. 11

Pos	Φ	No.	FORM	Unit leng	Total leng	U.Wt. KG.	Total weight
1	14	11		8.81	96.91	1.21	117.26
2	14	11		3.93	43.23	1.21	52.31
3	14	15		2.72	40.80	1.21	49.37
4	14	36		3.33	126.54	1.21	153.11
5	14	4		9.61	38.44	1.21	46.51
6	14	24		1.30	31.20	1.21	37.75
7	14	5		4.54	22.70	1.21	27.47
8	14	8		2.74	21.92	1.21	26.52
9	20	8		4.10	32.80	2.47	81.02
10	16	4		4.10	16.40	1.58	25.91
11	12	8		4.10	32.80	0.888	29.13
12	12	56		1.50	84.00	0.888	74.59
						720.95	Kg.

STR. 8

Pos	Φ	No.	FORM	Unit leng	Total leng	U.Wt. KG.	Total weight
1	14	11		8.05	88.55	1.21	107.15
2	14	11		3.53	38.83	1.21	46.98
3	14	14		2.62	36.68	1.21	44.33
4	14	34		3.23	109.82	1.21	132.88
5	14	4		8.85	35.40	1.21	42.83
6	14	22		1.22	26.84	1.21	32.48
7	14	5		4.34	21.70	1.21	26.26
8	14	8		2.74	21.92	1.21	26.52
9	20	8		3.75	30.00	2.47	74.10
10	16	4		3.75	15.00	1.58	23.70
11	12	8		3.75	30.00	0.888	26.64
12	12	52		1.50	78.00	0.888	69.26
						653.13	Kg.

STR. 10



Pos	Φ	No.	FORM	Unit leng	Total leng	U.Wt. KG.	Total weight
1	14	11		8.77	96.47	1.21	116.73
2	14	11		3.53	38.83	1.21	46.98
3	14	14		2.82	39.48	1.21	47.77
4	14	37		3.43	126.91	1.21	153.56
5	14	4		9.89	39.56	1.21	47.87
6	14	26		1.37	35.62	1.21	43.10
7	14	5		4.74	23.70	1.21	28.68
8	14	8		2.74	21.92	1.21	26.52
9	20	8		4.05	32.40	2.47	80.03
10	16	4		4.05	16.20	1.58	25.60
11	12	8		4.05	32.40	0.888	28.77
12	12	56		1.50	84.00	0.888	74.59
						720.20	Kg.

REFERENCE DWGS: For reinforcement see dwg. No. 12/2/3/01
 For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01


Scale: IRRIGATION & DRAINAGE STANDARDS
 Date: DWG. No. 12/2/3/03
 Approved: Sheet No. 5 of 5 Rev. No. CHECK STRUCTURES LIST OF REINFORCEMENT STR. 7 TO 11

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND STANDARD BUREAU

STR.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
Form m ²	15.77	17.60	19.12	20.51	22.85	26.55	19.12	20.43	22.05	23.78	30.23	32.23	21.16	22.77	24.52	31.01	32.95	23.47	25.21	31.83	33.87	26.30	32.65	34.69

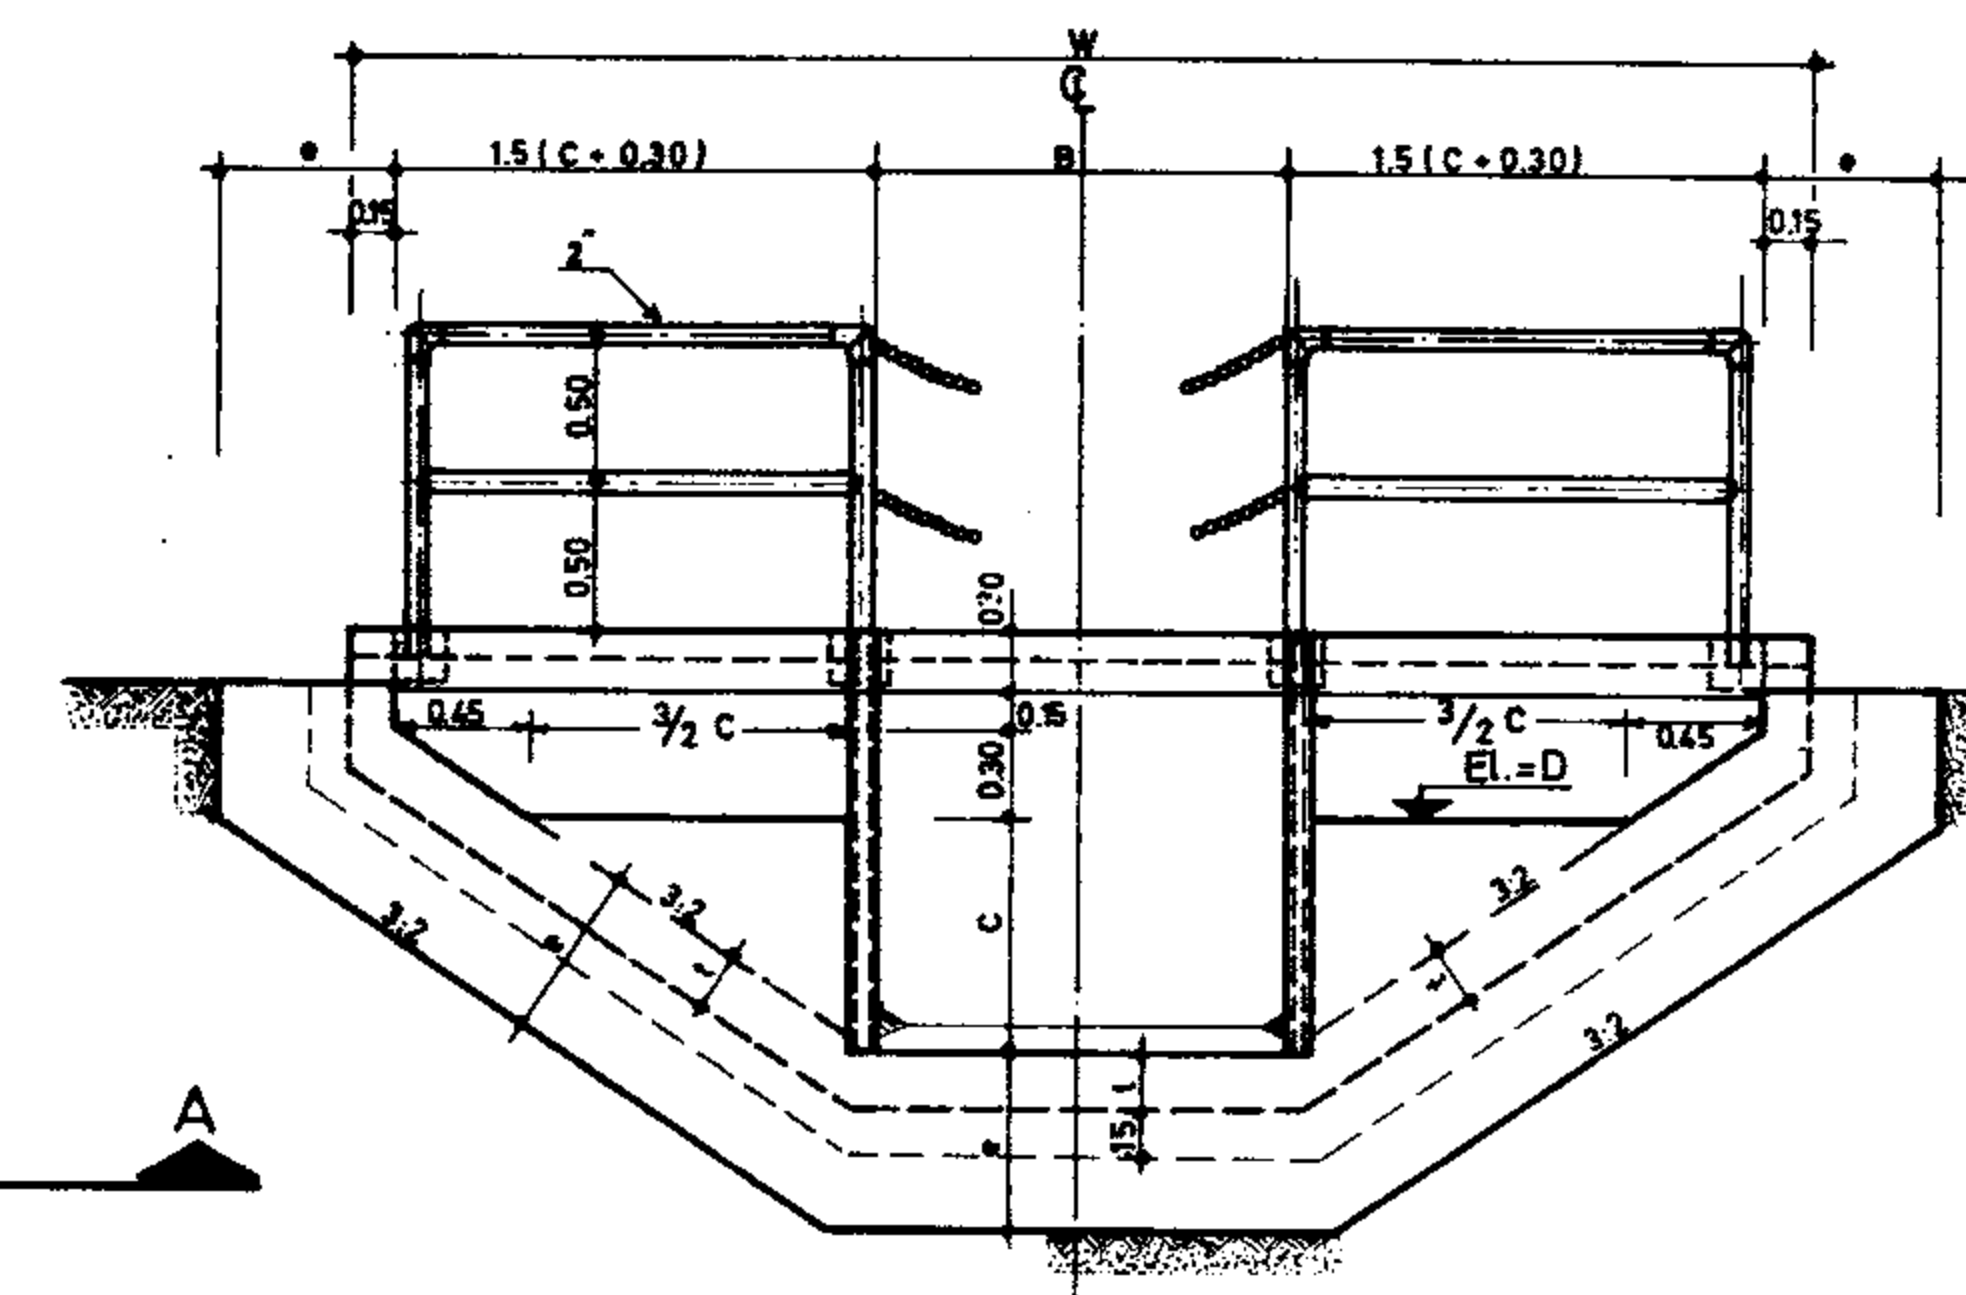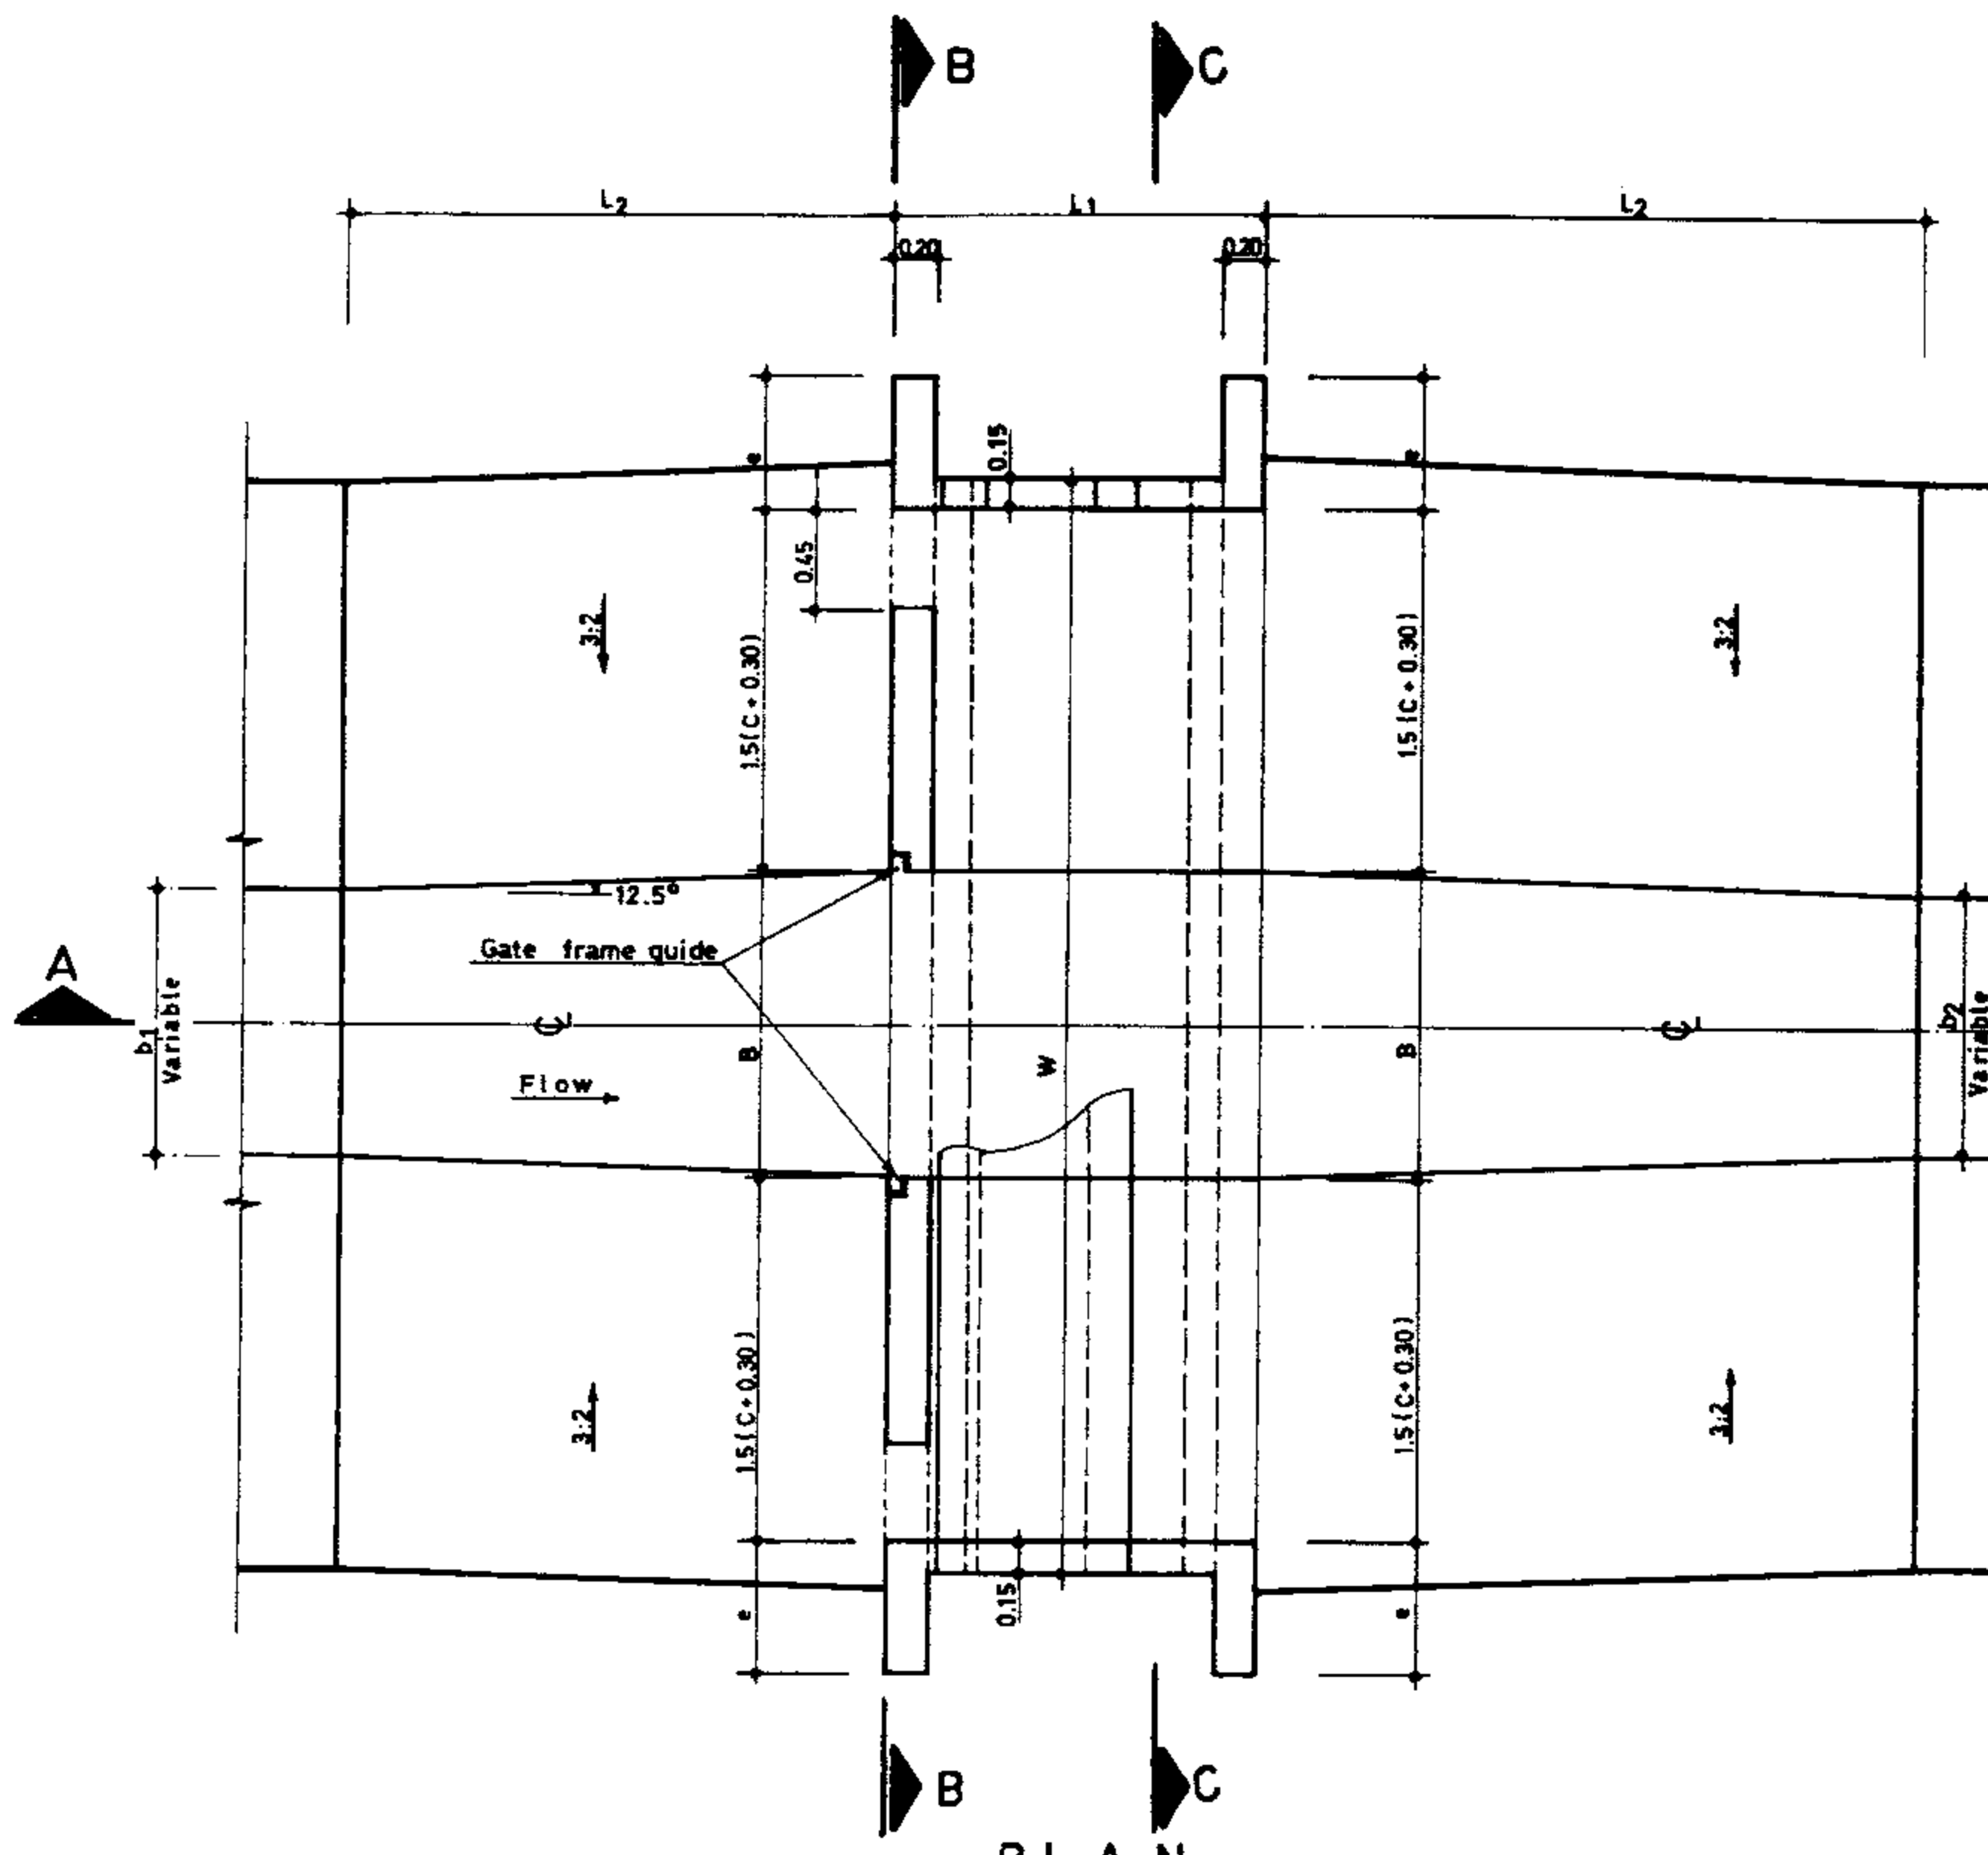

SECTION B-B

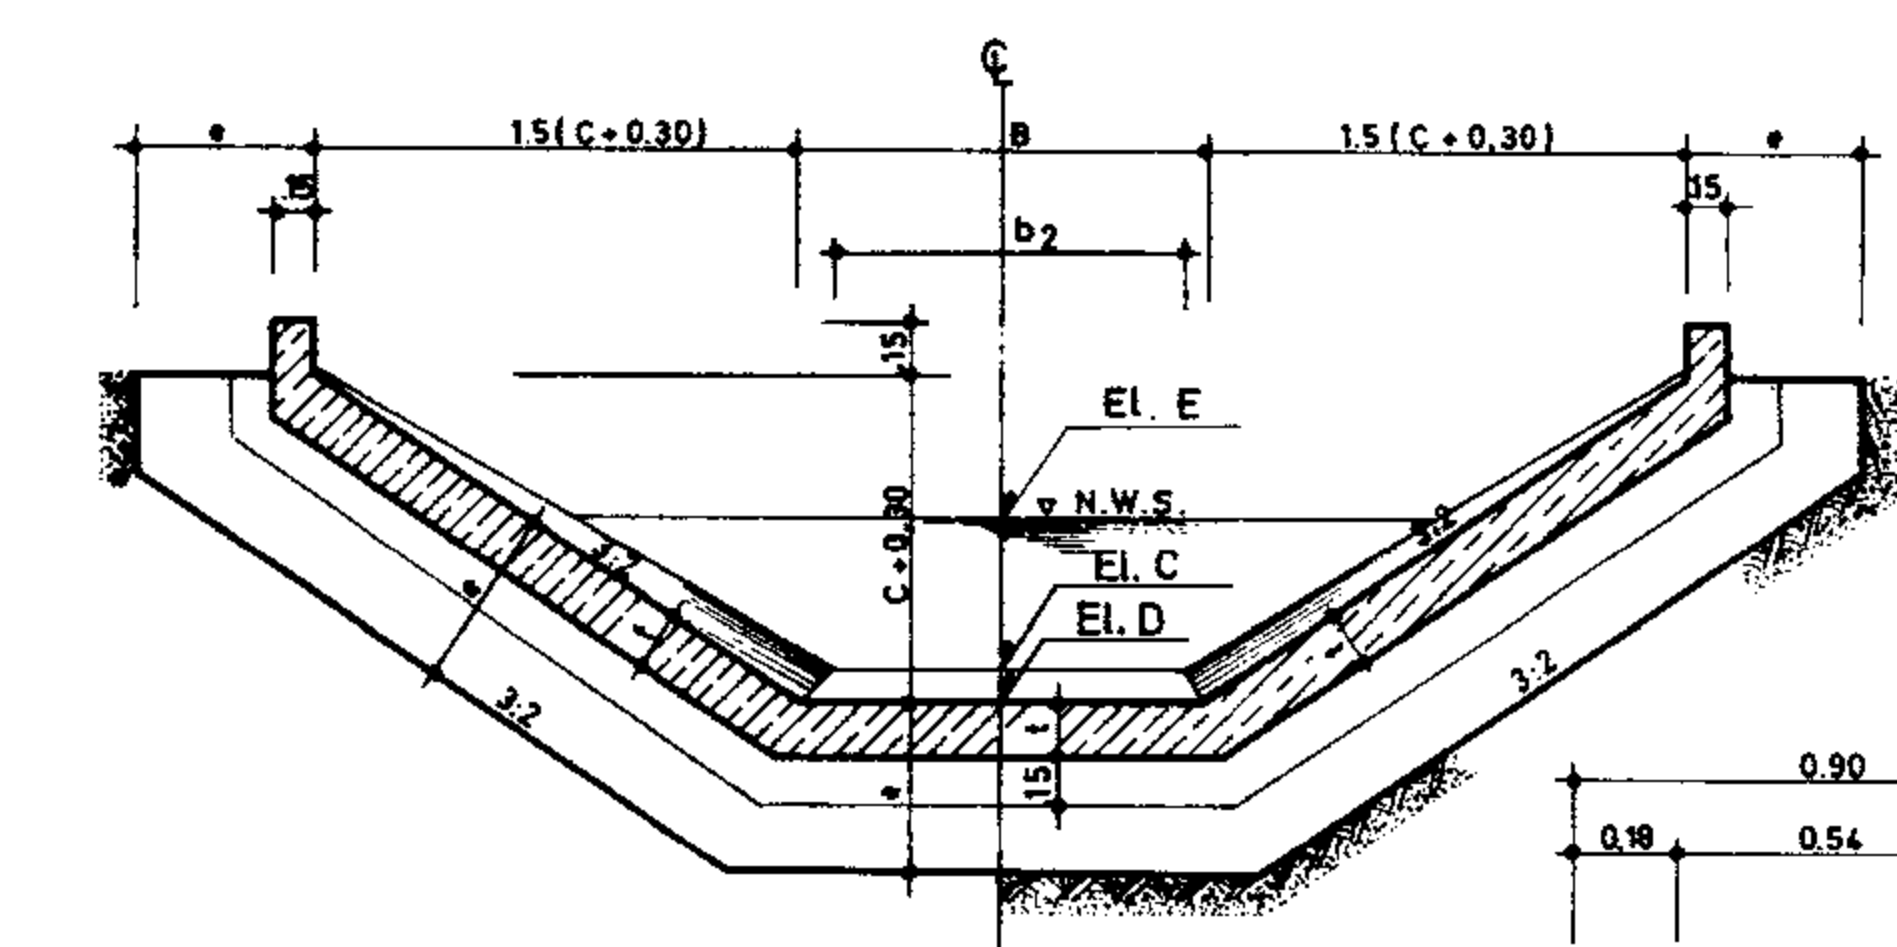


SECTION C-C

DIMENSION TABLE


# STR.	MAX. Q m ³ /s	SLIDE GATE		STANDARD DIMENSION													
		WIDTH m	HT. m	B m	C m	L1 m	L2 m	N #	R m	W m	X m	e m	t m	Conc. m ³	H/Ba Kg		
1	0.300	1.00 x 0.30	0.70	1.00	0.35	1.40	1.50	3	0.325	3.25	1.30	0.60	0.15	3.47	2034.5		
2	0.400	1.00 x 0.40	0.90	1.00	0.45	1.40	1.50	3	0.325	3.55	1.45	0.60	0.15	3.87	222.25		
3	0.500	1.00 x 0.50	1.10	1.00	0.55	1.40	1.50	3	0.325	3.85	1.60	0.60	0.15	4.27	240.22		
4	0.600	1.00 x 0.60	1.30	1.00	0.65	1.50	1.50	3	0.325	4.15	1.75	0.60	0.18	4.67	264.79		
5	0.700	1.00 x 0.70	1.50	1.00	0.75	1.70	1.50	3	0.325	4.45	1.90	0.60	0.18	5.11	296.43		
6	0.800	1.00 x 0.80	1.70	1.00	0.85	1.90	1.50	3	0.325	4.75	2.05	0.75	0.18	6.07	341.40		
7	0.840	1.20 x 0.40	0.90	1.20	0.50	1.40	1.50	3	0.350	3.90	1.60	0.60	0.15	4.23	242.76		
8	0.600	1.20 x 0.50	1.10	1.20	0.60	1.40	1.50	3	0.350	4.20	1.75	0.60	0.18	4.63	262.02		
9	0.720	1.20 x 0.60	1.30	1.20	0.70	1.50	1.50	3	0.350	4.50	1.90	0.60	0.18	5.05	285.54		
10	0.840	1.20 x 0.70	1.50	1.20	0.80	1.70	1.50	4	0.300	4.80	1.40	0.60	0.18	5.29	318.01		
11	0.960	1.20 x 0.80	1.70	1.20	0.90	1.90	1.50	4	0.300	5.10	1.50	0.75	0.20	6.28	394.70		
12	1.080	1.20 x 0.90	1.90	1.20	1.00	2.10	2.00	4	0.300	5.40	1.60	0.75	0.20	6.75	438.04		
13	0.700	1.40 x 0.50	1.10	1.40	0.60	1.40	2.00	3	0.300	4.40	1.90	0.60	0.18	4.82	270.55		
14	0.840	1.40 x 0.60	1.30	1.40	0.70	1.50	2.00	3	0.350	4.70	2.00	0.60	0.18	5.25	294.86		
15	0.980	1.40 x 0.70	1.50	1.40	0.80	1.70	2.00	4	0.325	5.00	1.45	0.60	0.18	5.50	330.43		
16	1.120	1.40 x 0.80	1.70	1.40	0.90	1.90	2.00	4	0.325	5.30	1.55	0.75	0.20	6.95	412.79		
17	1.260	1.40 x 0.90	2.00	1.40	1.00	2.10	2.00	4	0.325	5.60	1.65	0.75	0.20	7.06	457.12		
18	0.960	1.60 x 0.60	1.30	1.60	0.70	1.50	2.00	4	0.350	4.90	1.40	0.60	0.18	5.20	305.50		
19	1.120	1.60 x 0.70	1.50	1.60	0.80	1.70	2.00	4	0.350	5.20	1.50	0.60	0.18	5.71	341.54		
20	1.280	1.60 x 0.80	1.80	1.60	0.90	1.90	2.00	4	0.350	5.50	1.60	0.75	0.20	6.81	429.56		
21	1.440	1.60 x 0.90	2.00	1.60	1.00	2.10	2.00	4	0.350	5.80	1.70	0.75	0.20	7.31	471.19		
22	1.280	1.80 x 0.70	1.60	1.80	0.80	1.70	2.00	4	0.300	5.40	1.60	0.60	0.18	5.94	349.78		
23	1.440	1.80 x 0.80	1.80	1.80	0.90	1.90	2.00	4	0.300	5.70	1.70	0.75	0.20	7.01	446.33		
24	1.620	1.80 x 0.90	2.00	1.80	1.00	2.10	2.00	4	0.300	6.00	1.80	0.75	0.20	7.22	488.91		

- NOTES:**
- N = No of handrail
 - For "Q" greater than 1m³/sec. upstream handrail is required with a safety chain at gate opening.
 - All checks shall have continuous handrail bolted to pre-cast concrete deck.
 - Gate frame height measured from C of gate opening.
 - Chamfer all exposed corner 2 cm unless other wise shown.
 - Values of L₂ given in table are the minimum required lengths.

- CHECK STRUCTURE SELECTING PROCEDURE:**
- Determine "Q" in m³/s. in U/S canal.
 - Select the structure from dimension table with respect to required "Q".
 - If the required "Q" not found in the table, select the structure's dimensions with next largest "Q".
 - EL. D is equal to EL. A + y₁
 - EL. B = EL. D - C
- Note that EL. B should be equal to or less than EL. A to avoid a jump in the bottom of the canal. If EL. B is higher than EL. A, a structure with a larger dimension should be selected.
- D/S water elevation "EL. E" is equal to EL. D - 0.5h_v in which, h_v is the difference between the velocity head at the check opening and the velocity head in canal section upstream of the structure. A minimum head loss of 0.03m. should be allowed
 - EL. C = EL. E - y₂

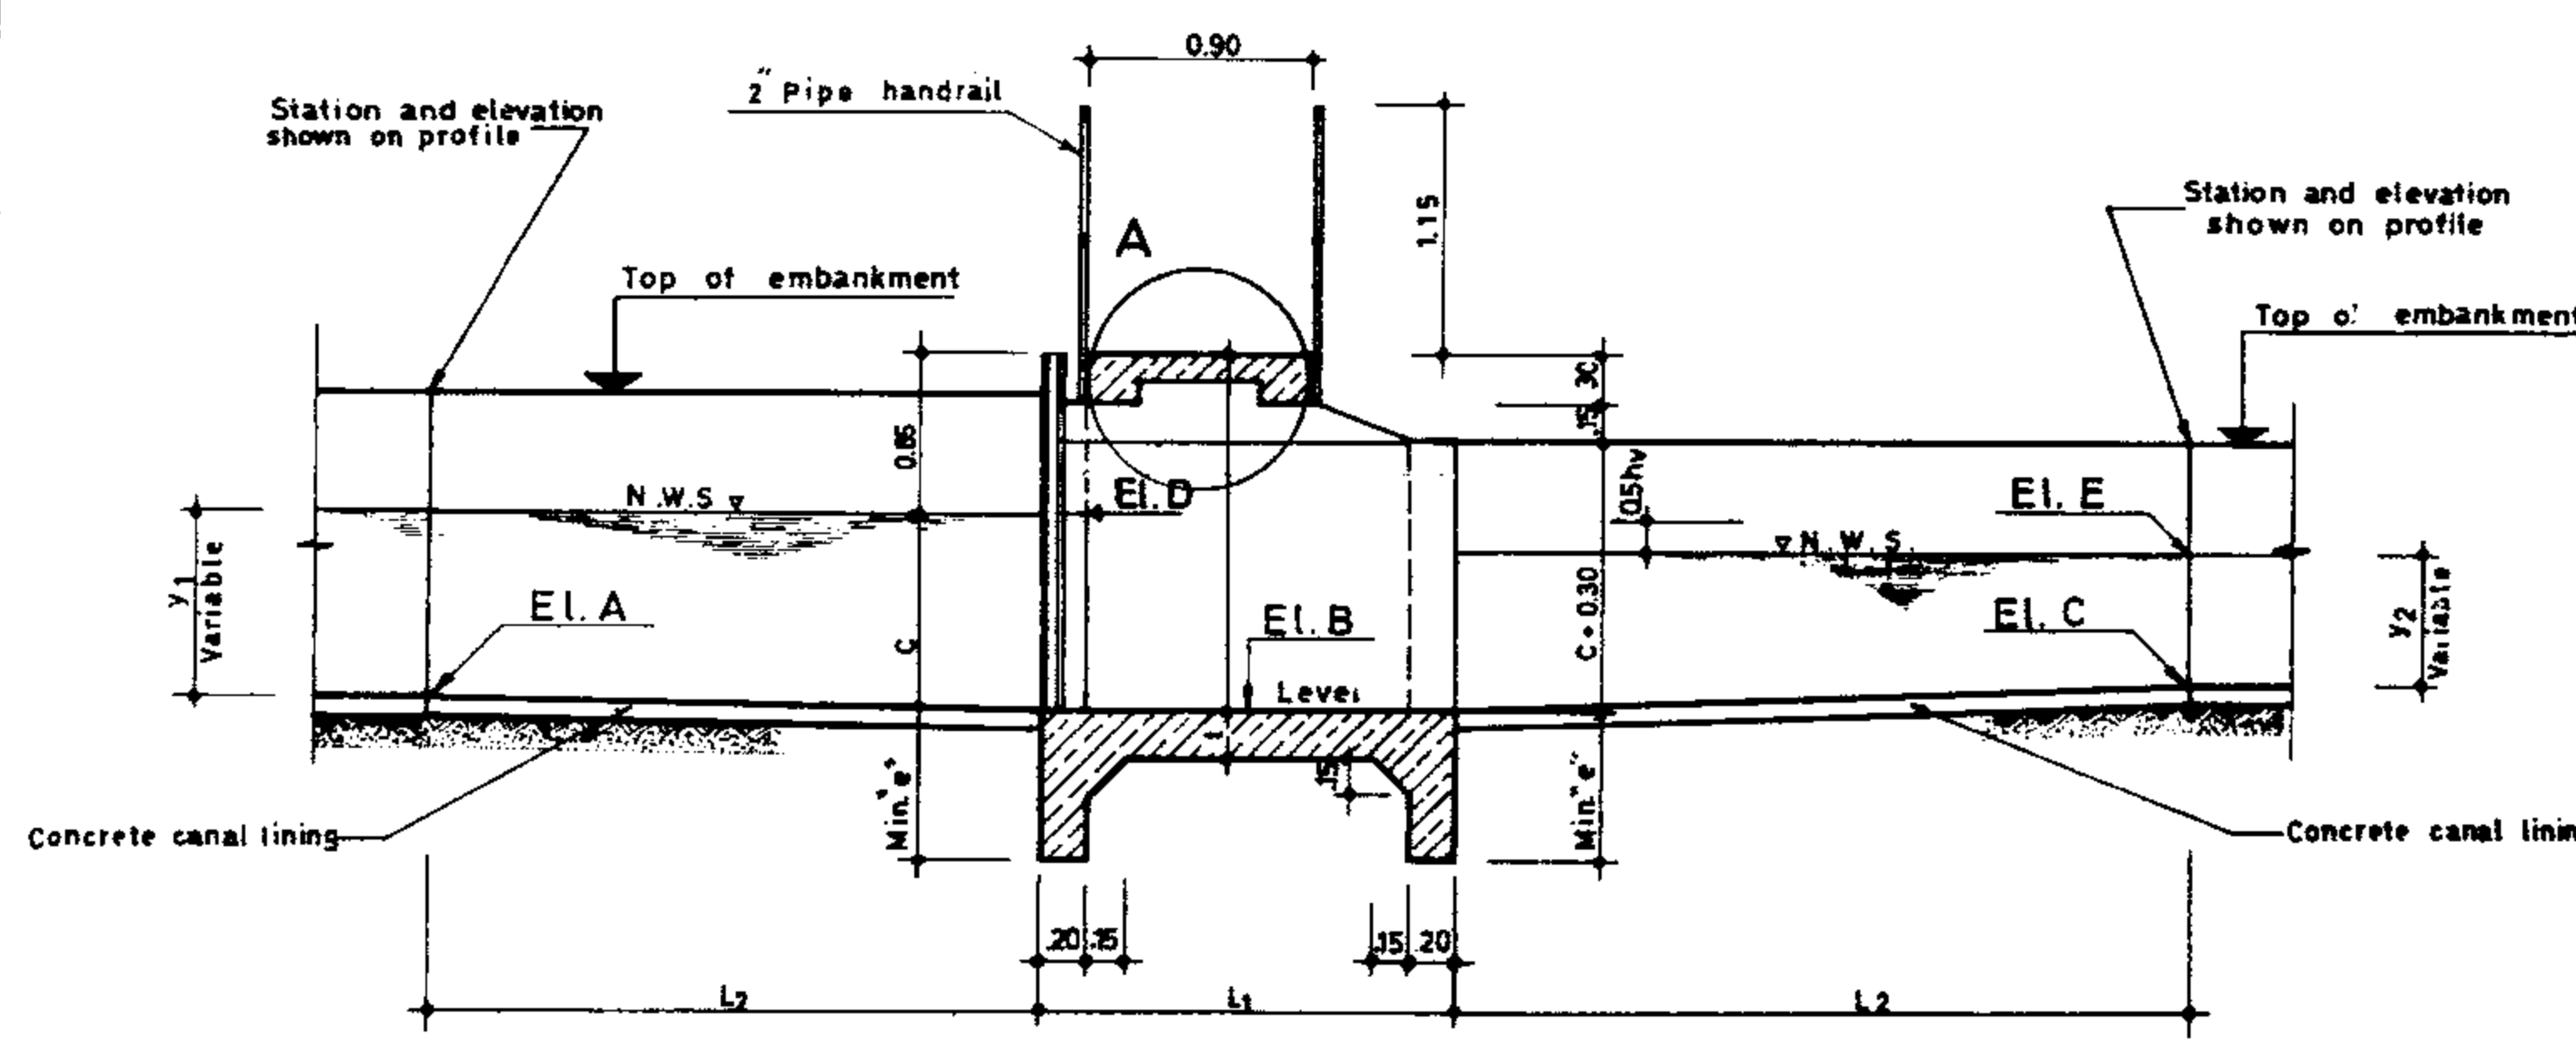



SECTION A-A

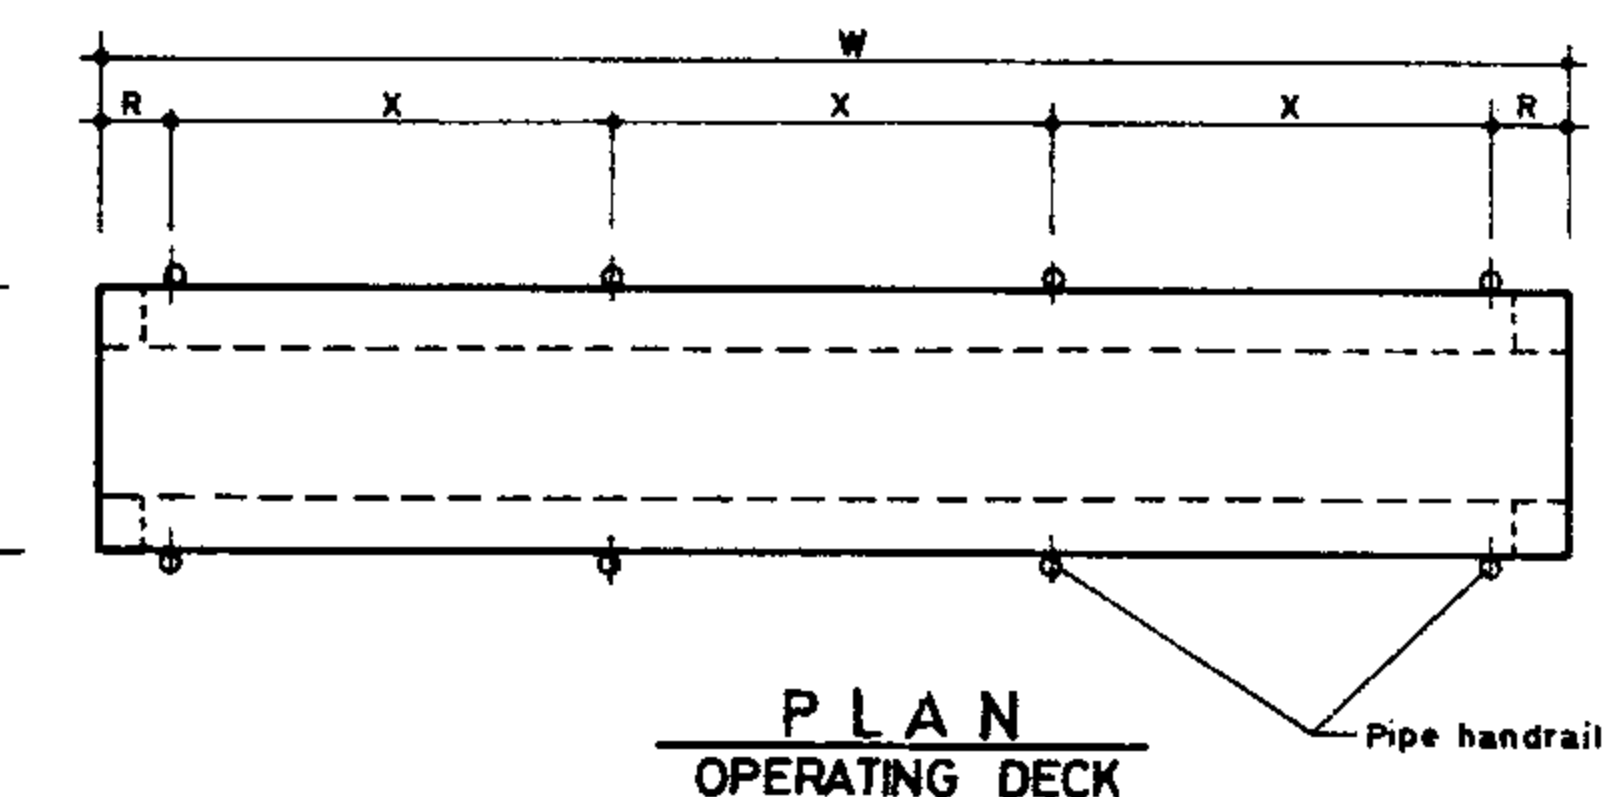


PLAN OPERATING DECK

REFERENCE DWGS: For general notes and minimum requirements for detailing reinforcement see dwgs. 20/2/1/01 TO 20/2/1/03
 For reinforcement see dwg. No 12/1/3/01
 For construction detail of 'gate frame guide' see dwg. No 12/6/1/01


Scale: N.T.S.		IRRIGATION & DRAINAGE STANDARDS		ISLAMIC REPUBLIC OF IRAN	
Date:	DWG. No 12/1/1/01	CHECK STRUCTURES (Concrete canal)		MINISTRY OF PLAN & BUDGET	
Approved:	Sheet. No. 1 of 6	Rev. No	0 - 300 ~ 1620 1/sec.		TECHNICAL RESEARCH AND STANDARD BUREAU
			PLAN & SECTION		

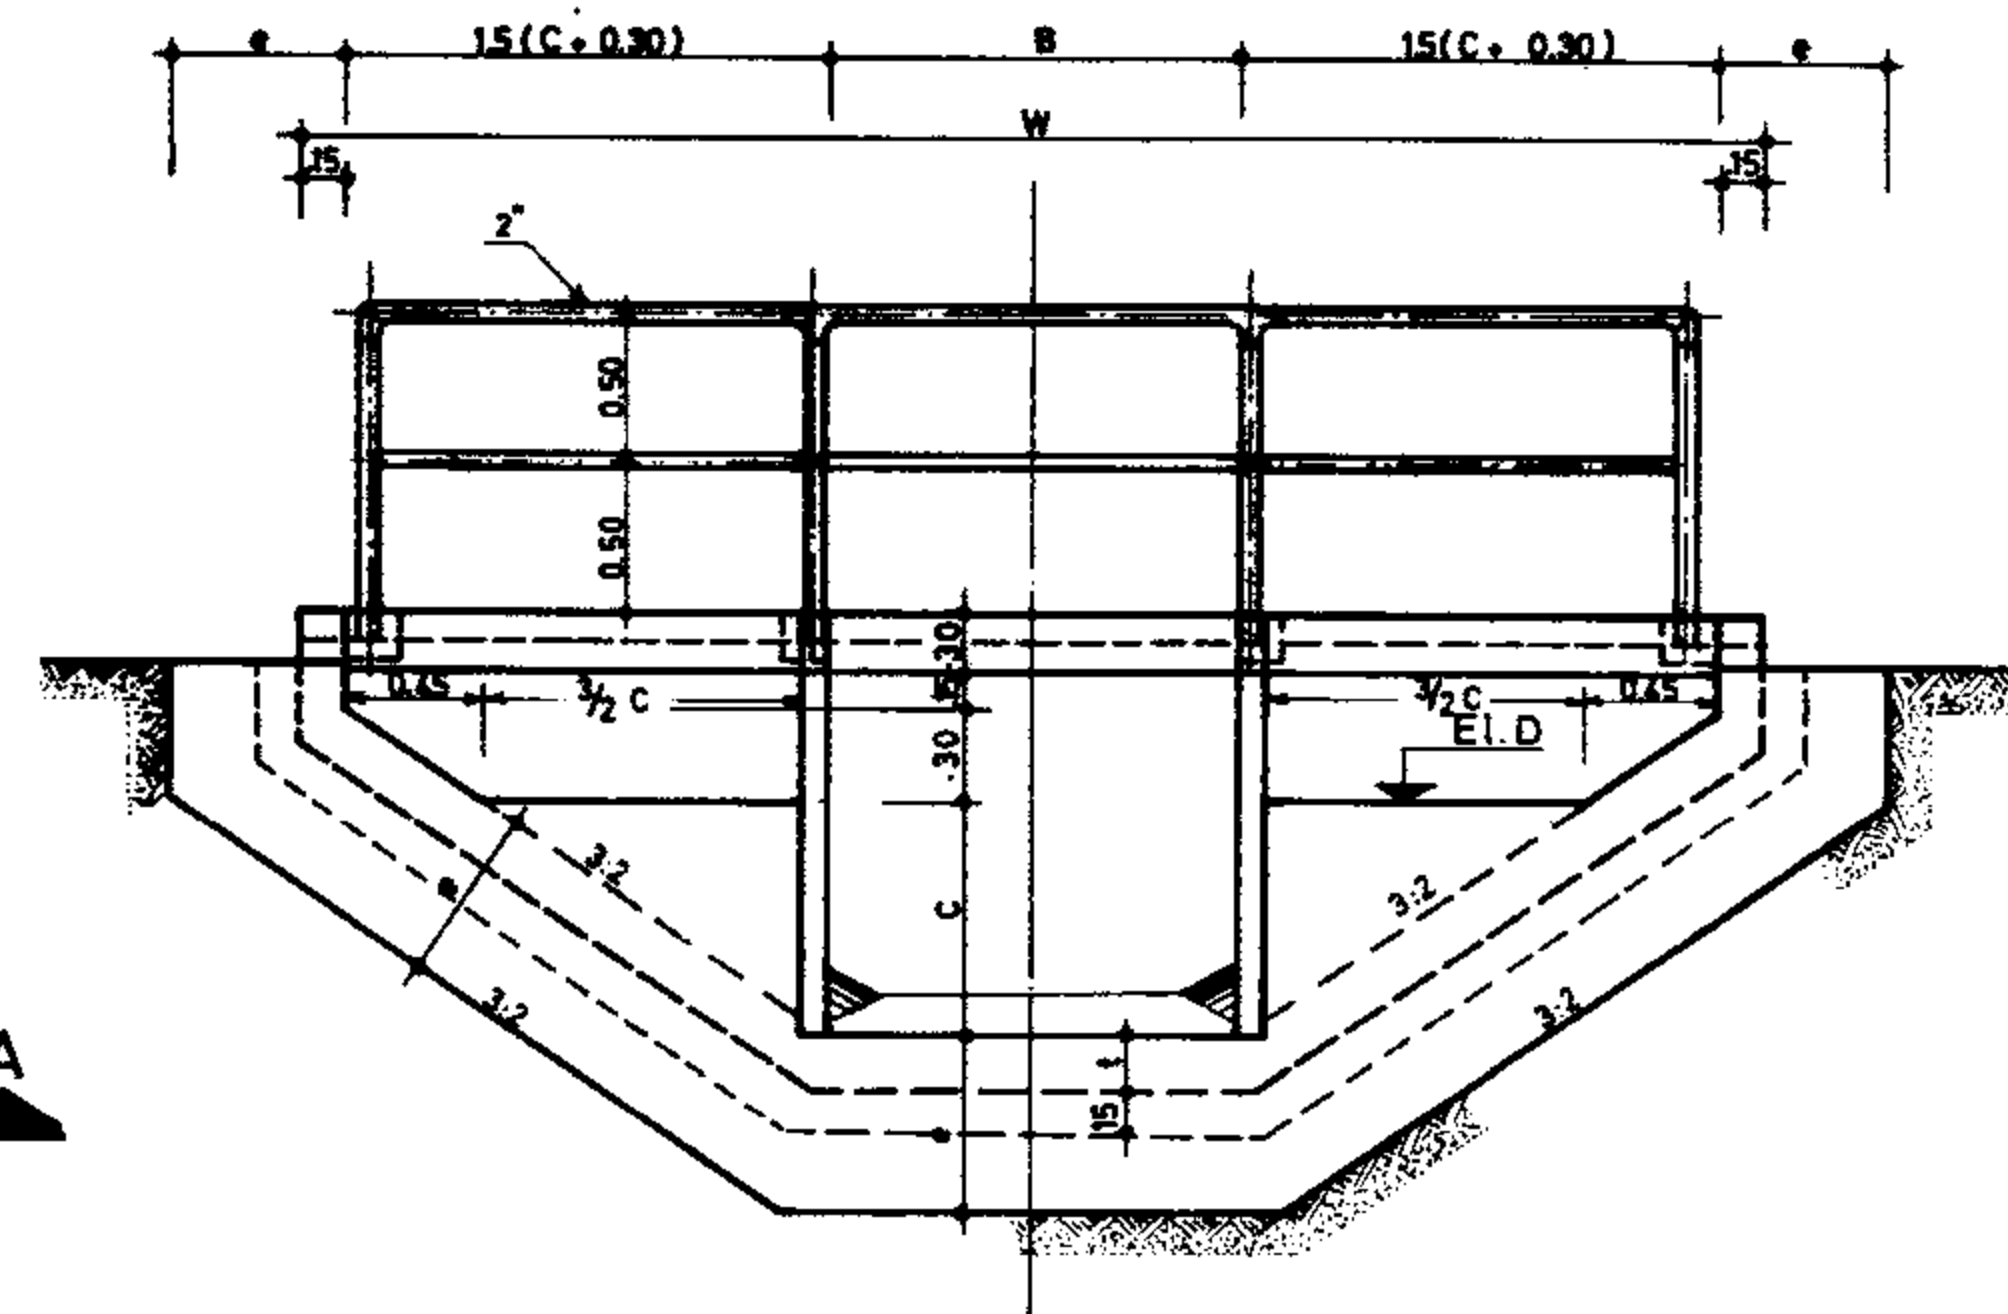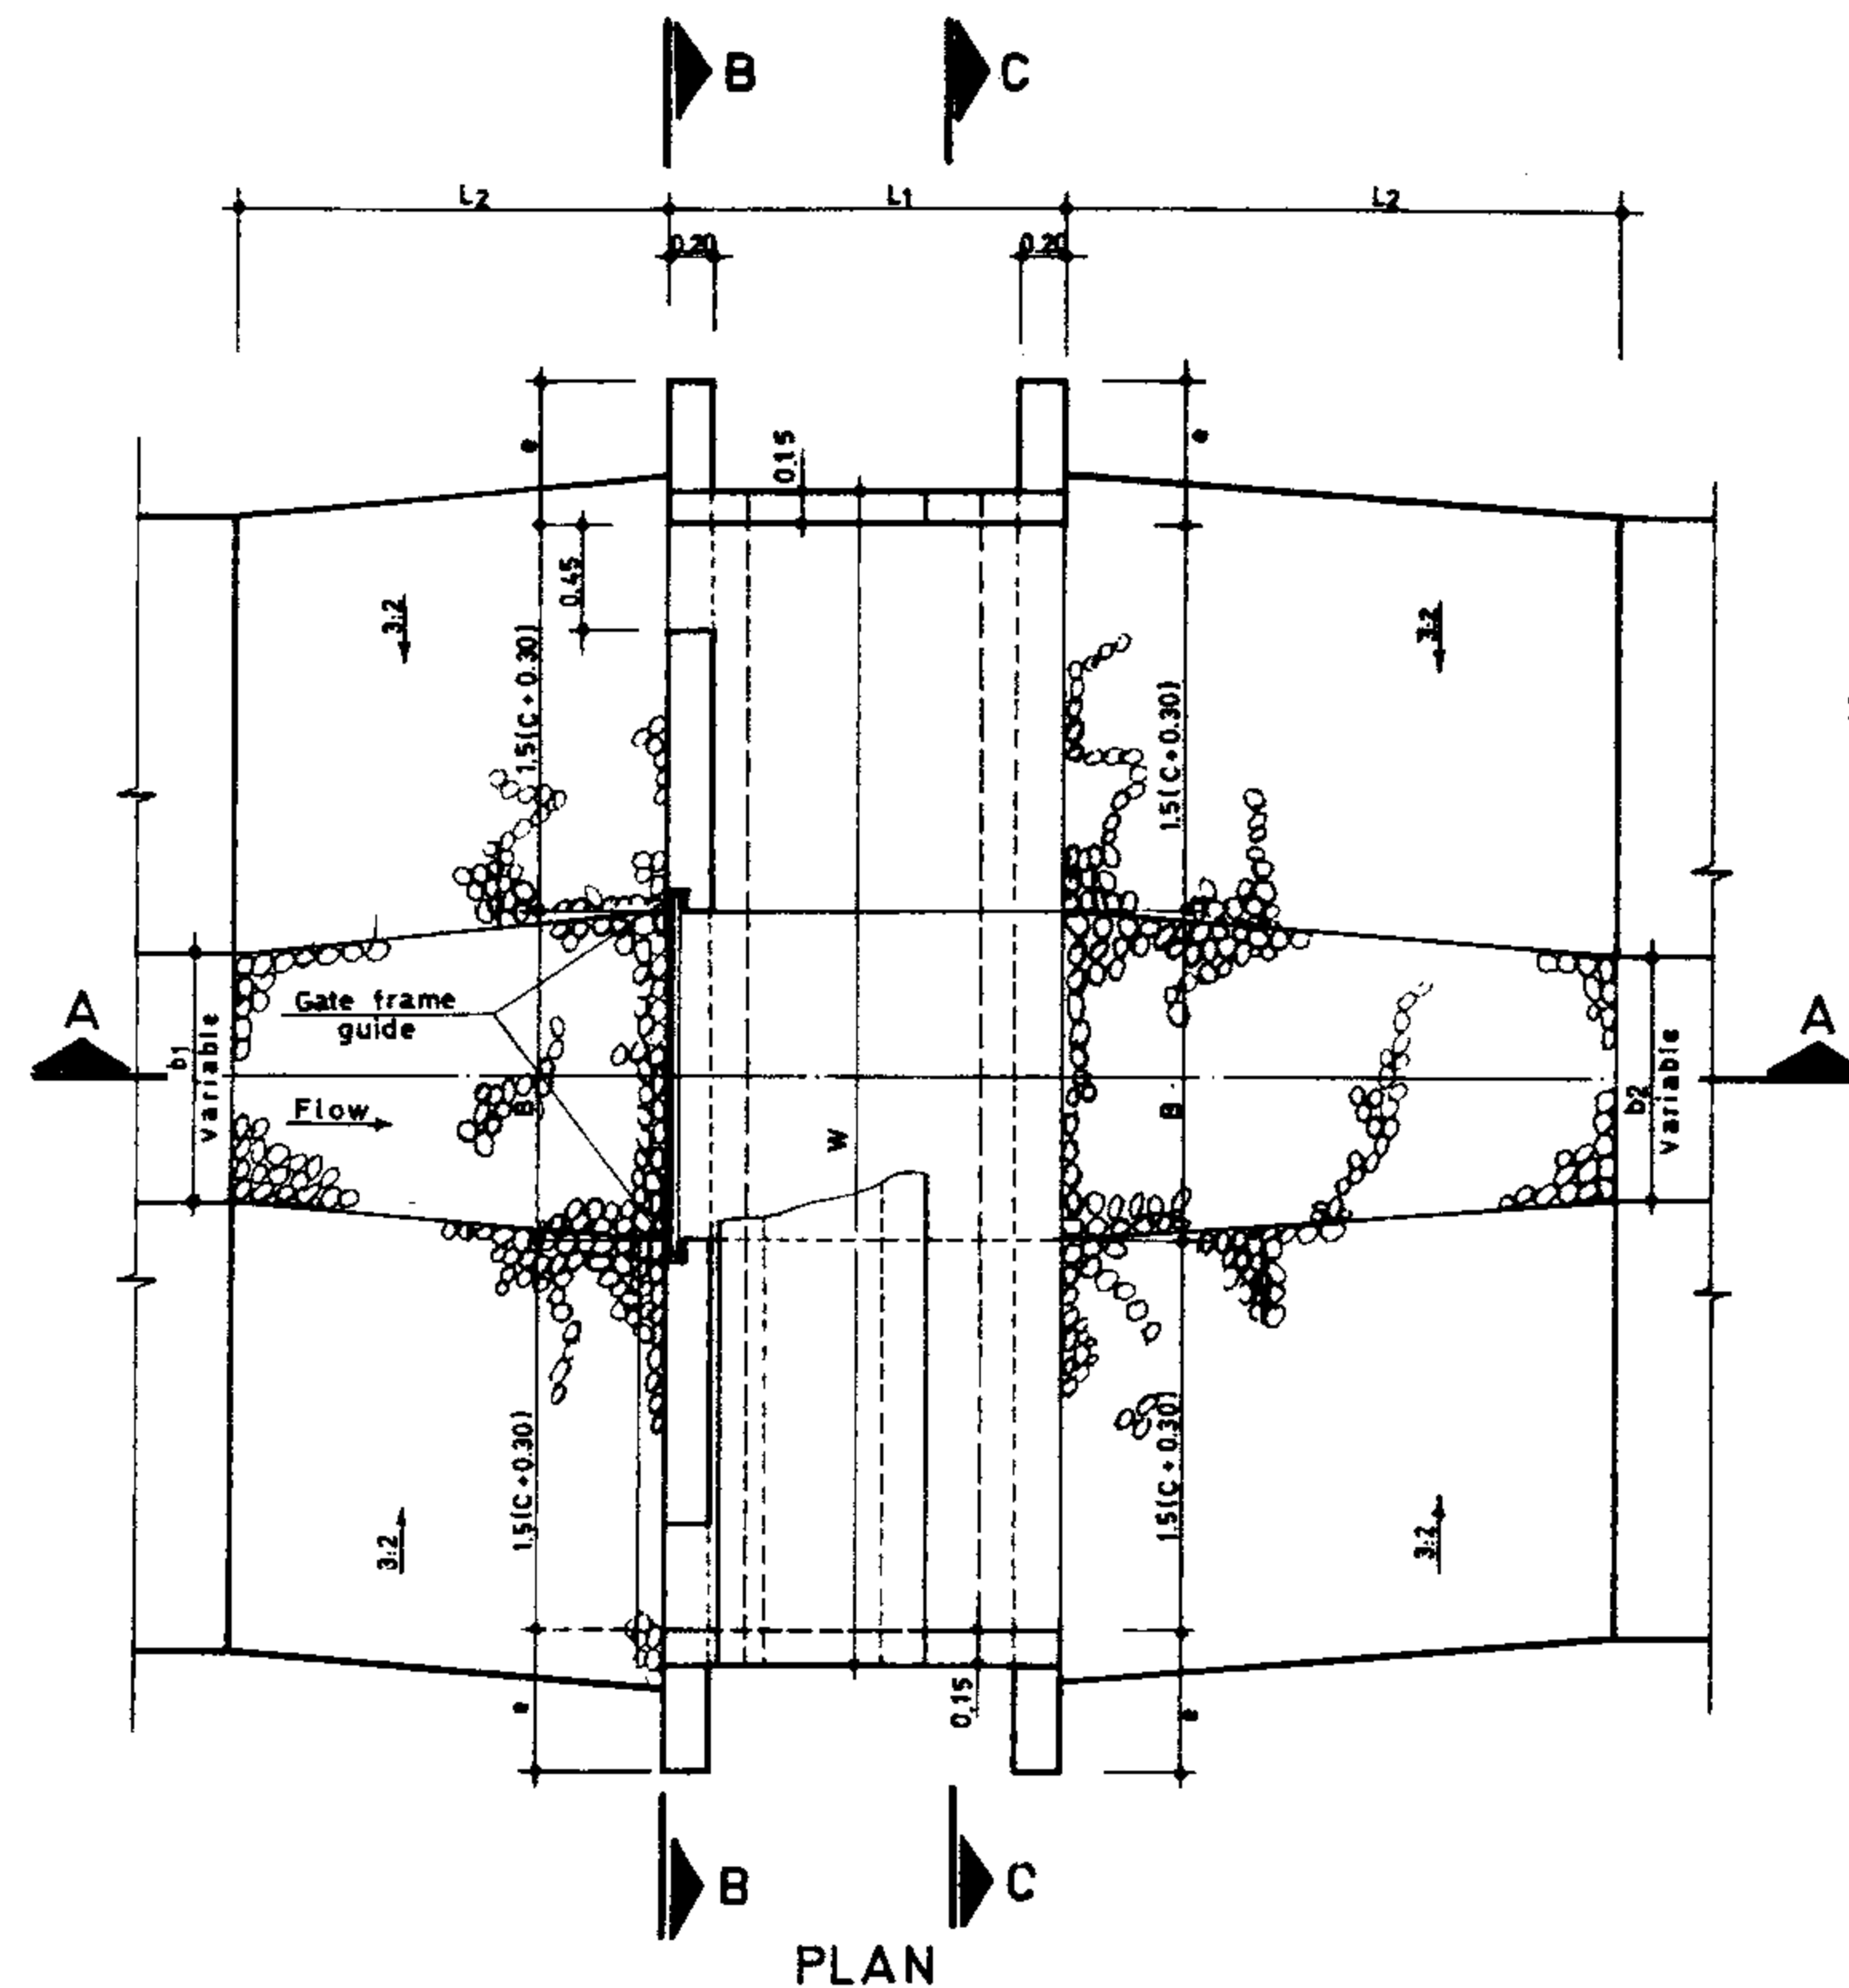


SECTION B.B.

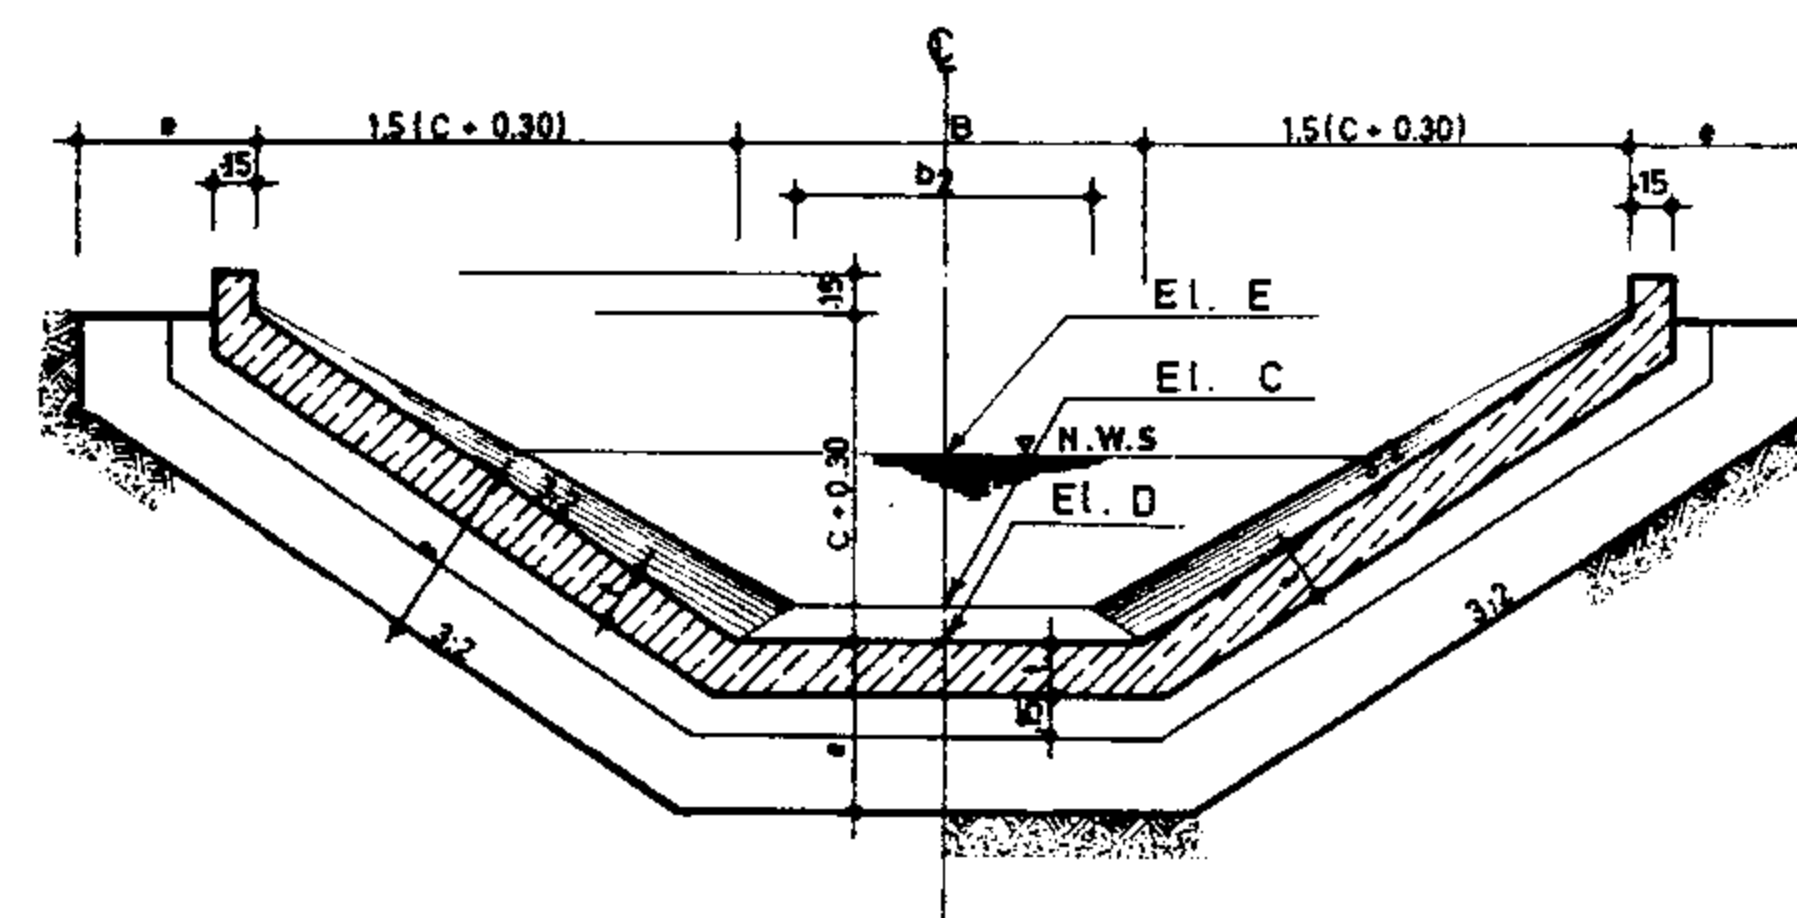


SECTION C.C.

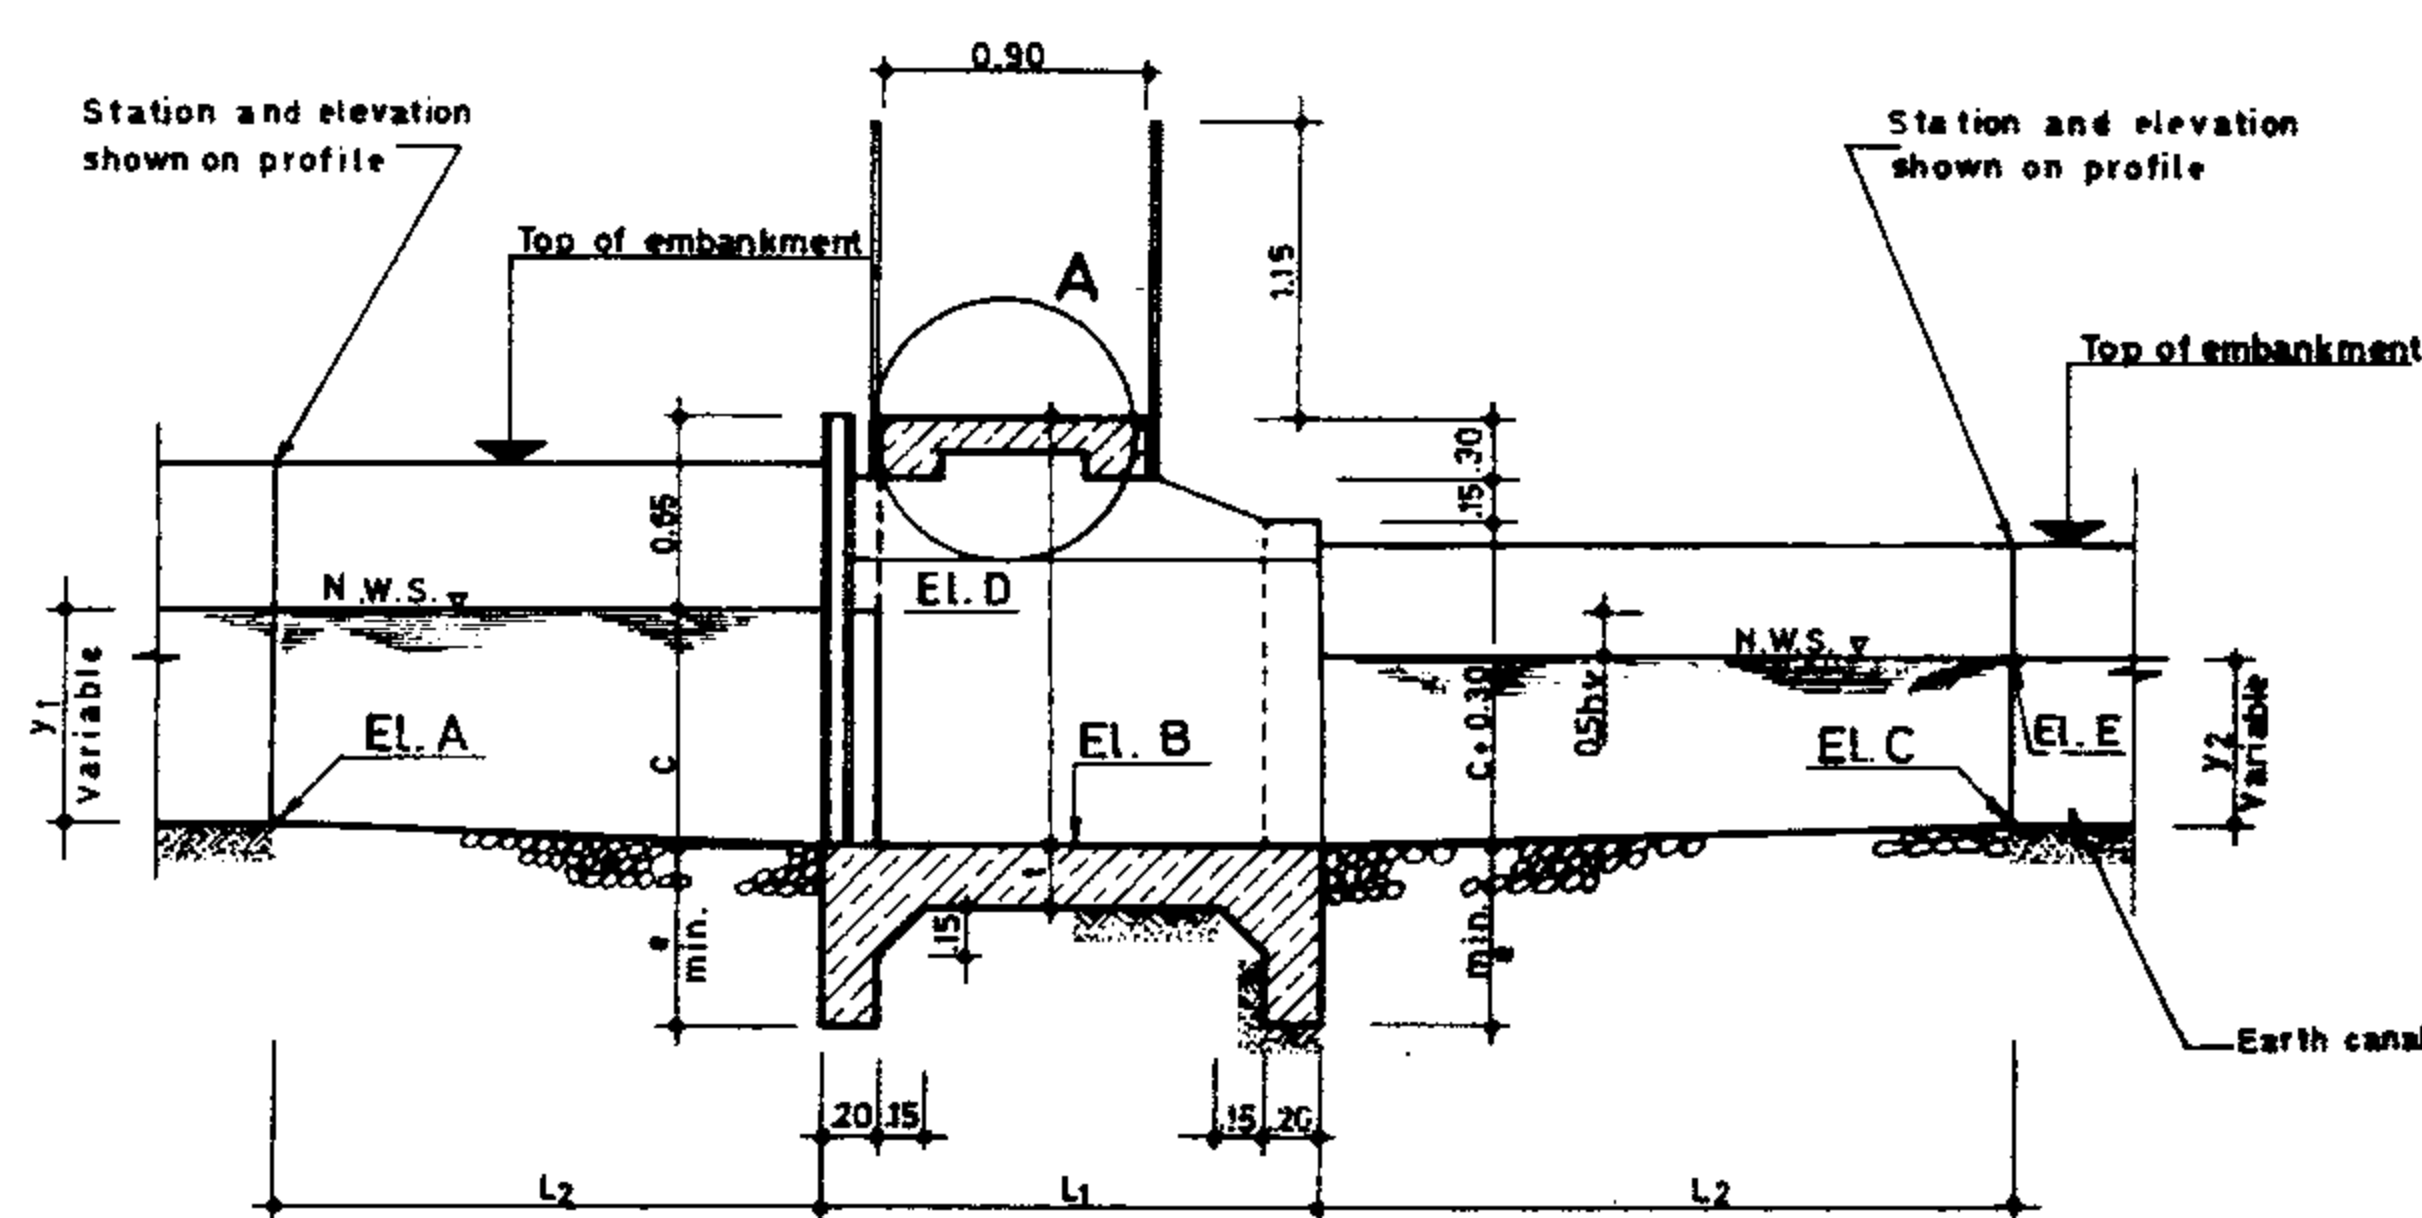

SECTION A.A.

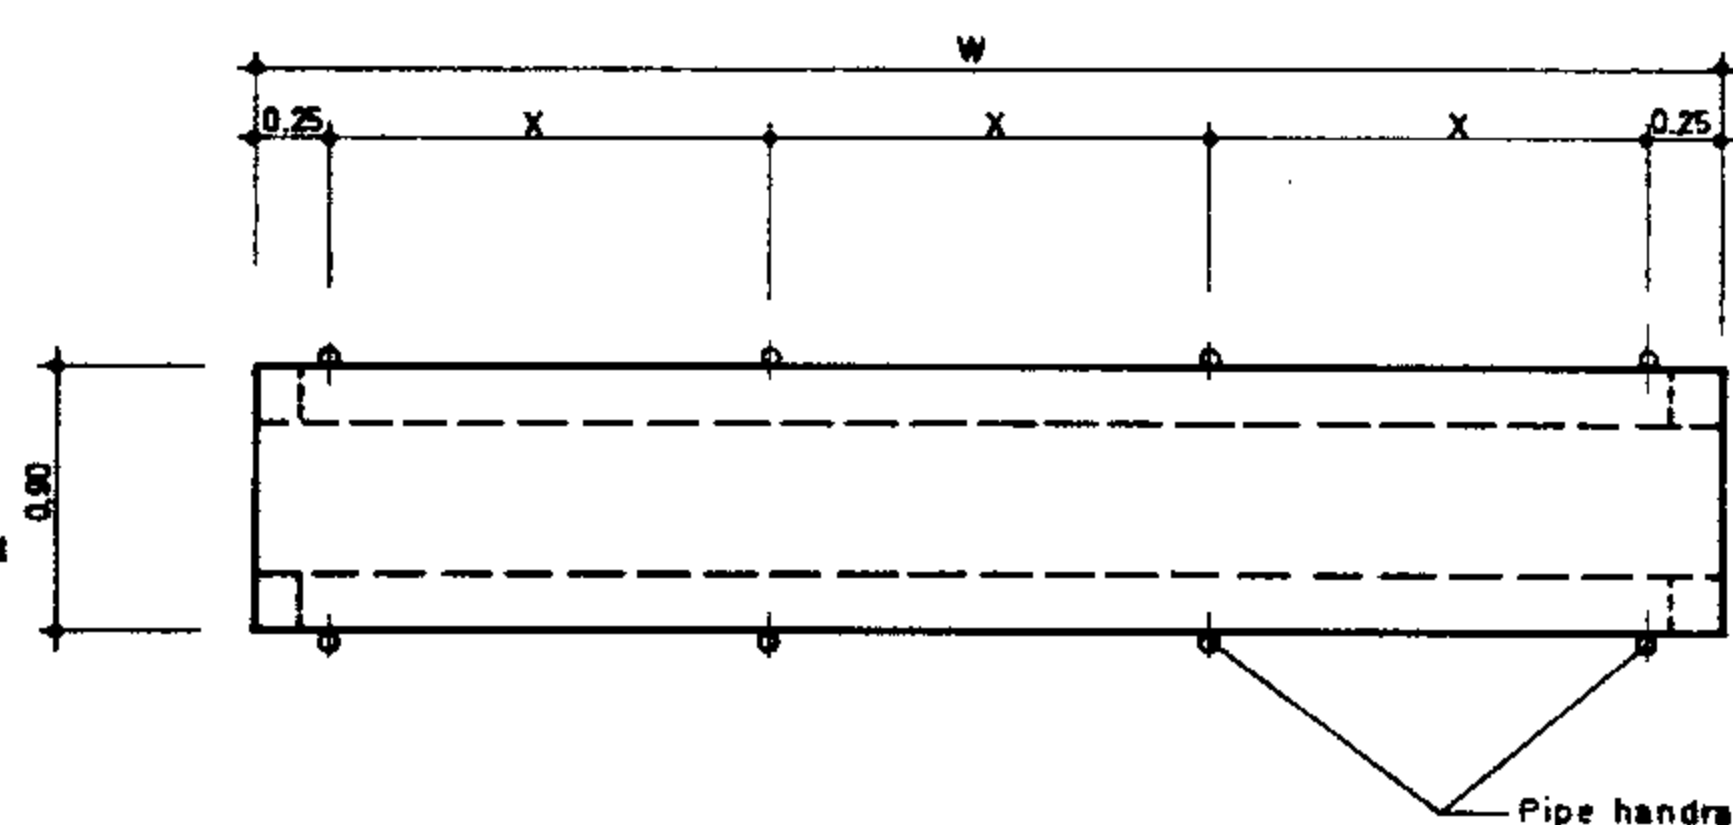

PLAN OPERATING DECK

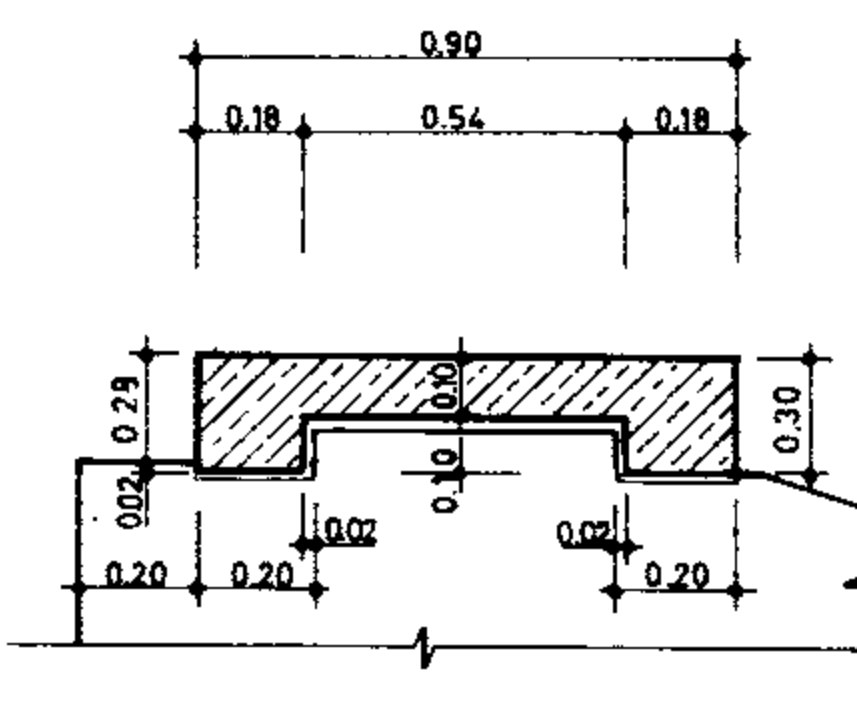







DETAIL A

# STR.	MAX. Q m ³ /s	SLIDE GATE		STANDARD DIMENSION													
		WIDTH m	HEIGHT m	FRM. HT. m	B m	C m	L ₁ m	L ₂ m	N #	R m	W m	X m	e m	t m	Conc. m ³	R/Bar Kg	Form m ²
1	0.300	1.00x0.30	0.70	1.00	0.35	1.40	1.50	3	0.325	3.25	1.30	0.60	0.15	3.47	203.45	15.77	
2	0.400	1.00x0.40	0.90	1.00	0.45	1.40	1.50	3	0.325	3.55	1.45	0.60	0.15	3.87	222.29	17.60	
3	0.500	1.00x0.50	1.10	1.00	0.55	1.40	1.50	3	0.325	3.85	1.60	0.60	0.15	4.27	240.22	19.12	
4	0.600	1.00x0.60	1.30	1.00	0.65	1.50	1.50	3	0.325	4.15	1.75	0.60	0.18	4.67	264.79	20.51	
5	0.700	1.00x0.70	1.50	1.00	0.75	1.70	1.90	3	0.325	4.45	1.90	0.75	0.18	5.11	296.43	22.85	
6	0.800	1.00x0.80	1.70	1.00	0.85	1.90	1.50	3	0.325	4.75	2.05	0.75	0.18	6.07	341.40	28.55	
7	0.480	1.20x0.40	0.90	1.20	0.50	1.40	1.50	3	0.350	3.90	1.60	0.60	0.15	4.23	242.76	19.12	
8	0.600	1.20x0.50	1.10	1.20	0.60	1.40	1.50	3	0.350	4.20	1.75	0.60	0.18	4.63	262.02	20.43	
9	0.720	1.20x0.60	1.30	1.20	0.70	1.50	1.50	3	0.350	4.50	1.90	0.60	0.18	5.05	285.54	22.05	
10	0.840	1.20x0.70	1.50	1.20	0.80	1.70	1.50	4	0.300	4.80	1.40	0.75	0.18	5.29	318.01	23.79	
11	0.960	1.20x0.80	1.70	1.20	0.90	1.90	1.50	4	0.300	5.10	1.50	0.75	0.20	6.28	394.70	30.23	
12	1.080	1.20x0.90	1.90	1.20	1.00	2.10	2.00	4	0.300	5.40	1.60	0.75	0.20	6.79	438.04	32.23	
13	0.700	1.40x0.50	1.10	1.40	0.60	1.40	2.00	3	0.300	4.40	1.90	0.60	0.18	4.82	270.55	21.16	
14	0.840	1.40x0.60	1.30	1.40	0.70	1.60	2.00	3	0.350	4.70	2.00	0.60	0.18	5.25	294.86	22.77	
15	0.980	1.40x0.70	1.50	1.40	0.80	1.70	2.00	4	0.325	5.00	1.45	0.75	0.18	5.50	330.43	24.52	
16	1.120	1.40x0.80	1.70	1.40	0.90	1.90	2.00	4	0.325	5.30	1.55	0.75	0.20	6.55	412.79	31.01	
17	1.260	1.40x0.90	2.00	1.40	1.00	2.10	2.00	4	0.325	5.60	1.65	0.75	0.20	7.06	457.42	32.95	
18	0.960	1.60x0.60	1.30	1.60	0.70	1.50	2.00	3	0.350	4.90	1.40	0.60	0.18	5.20	305.50	23.47	
19	1.120	1.60x0.70	1.50	1.60	0.80	1.70	2.00	4	0.350	5.20	1.50	0.75	0.18	5.71	341.54	25.21	
20	1.280	1.60x0.80	1.70	1.60	0.90	1.90	2.00	4	0.350	5.50	1.60	0.75	0.20	6.81	429.56	31.83	
21	1.440	1.60x0.90	2.00	1.60	1.00	2.10	2.00	4	0.350	5.80	1.70	0.75	0.20	7.31	471.19	33.87	
22	1.260	1.80x0.70	1.60	1.80	0.80	1.70	2.00	4	0.300	5.40	1.60	0.75	0.18	5.94	349.78	26.30	
23	1.440	1.80x0.80	1.80	1.80	0.90	1.90	2.00	4	0.300	5.70	1.70	0.75	0.20	7.04	446.33	32.65	
24	1.620	1.80x0.90	2.00	1.80	1.00	2.10	2.00	4	0.300	6.00	1.80	0.75	0.20	7.22	488.91	34.69	

REFERENCE DWGS: For general notes and minimum requirements for detailing reinforcement see dwgs. 20/2/1/01 TO 20/2/1/03
 For reinforcement see dwg. N^o 12/1/3/01
 For check structure selecting procedure and notes see dwg. N^o 12/1/1/01
 For type of erosion protection see dwg. N^o 13/3/1/01
 For construction detail of "gate frame guide" see dwg. N^o 12/6/1/01

Scale: N.T.S
 Date: DWG. N^o 12/1/1/02
 Approved: Sheet. N^o: 2 of 6 Rev. N^o
IRRIGATION & DRAINAGE STANDARDS
 CHECK STRUCTURES (Earth canal)
 Q = 300 ~ 1620 l/sec.
 PLAN & SECTION

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND STANDARD BUREAU

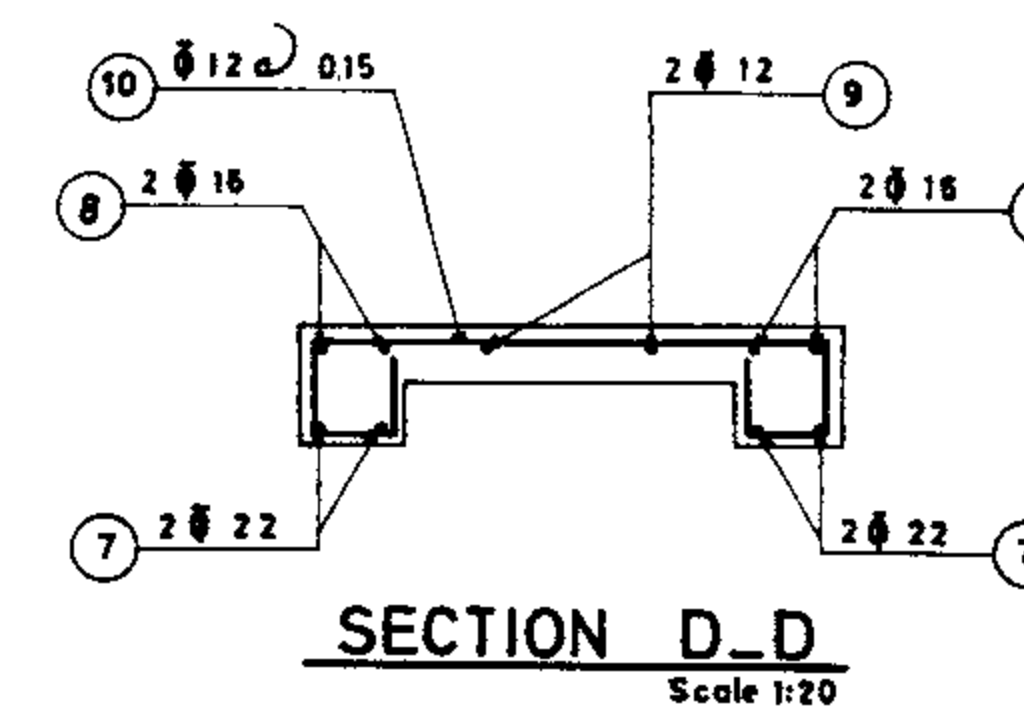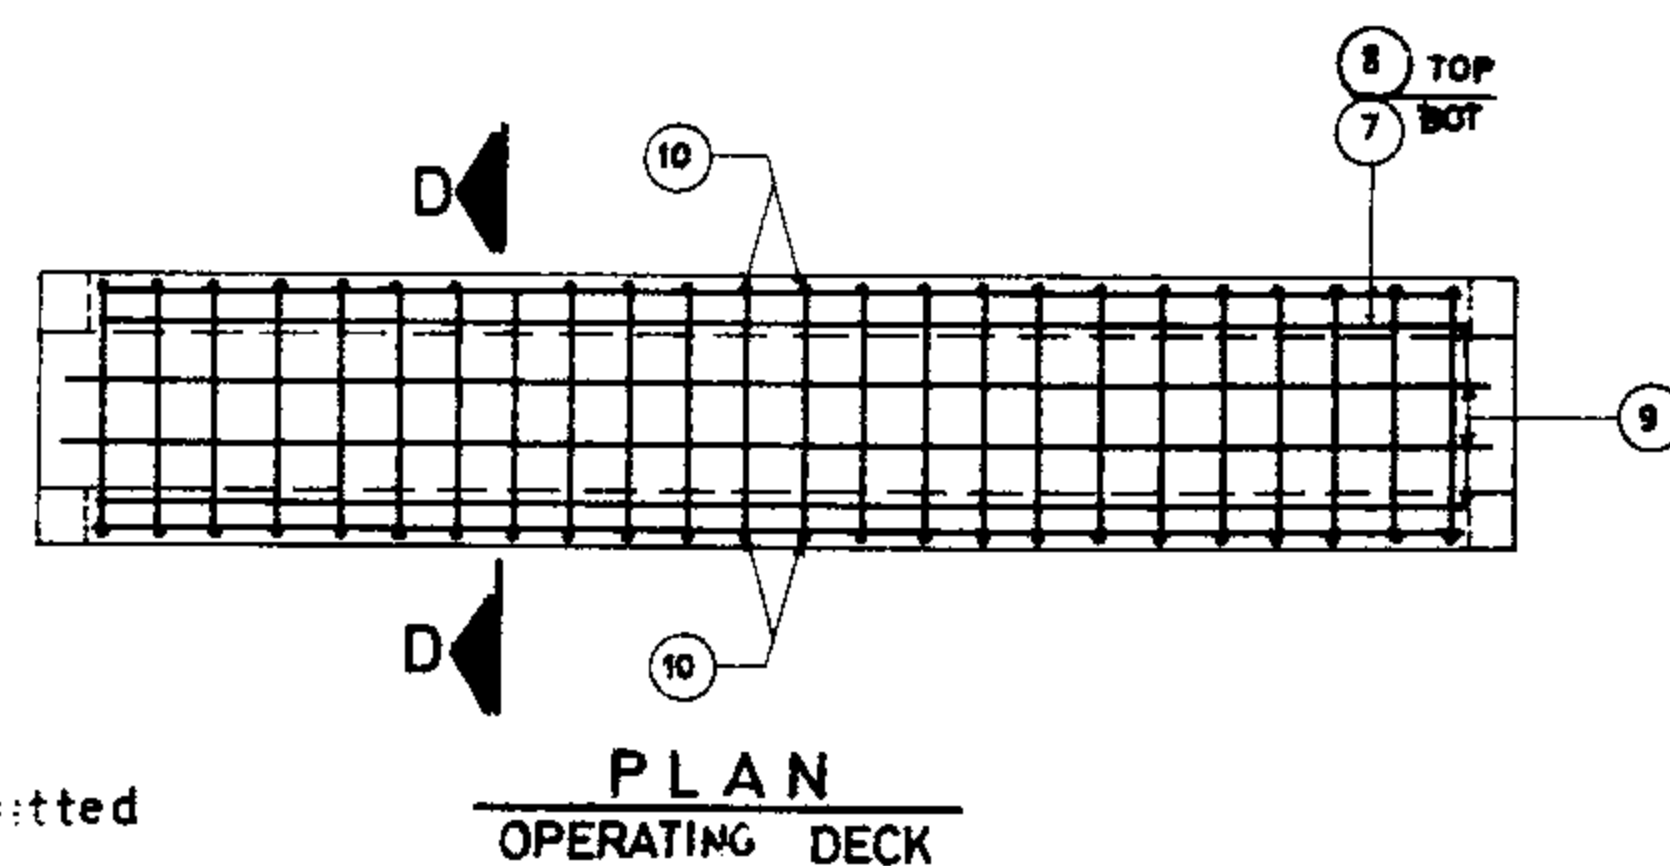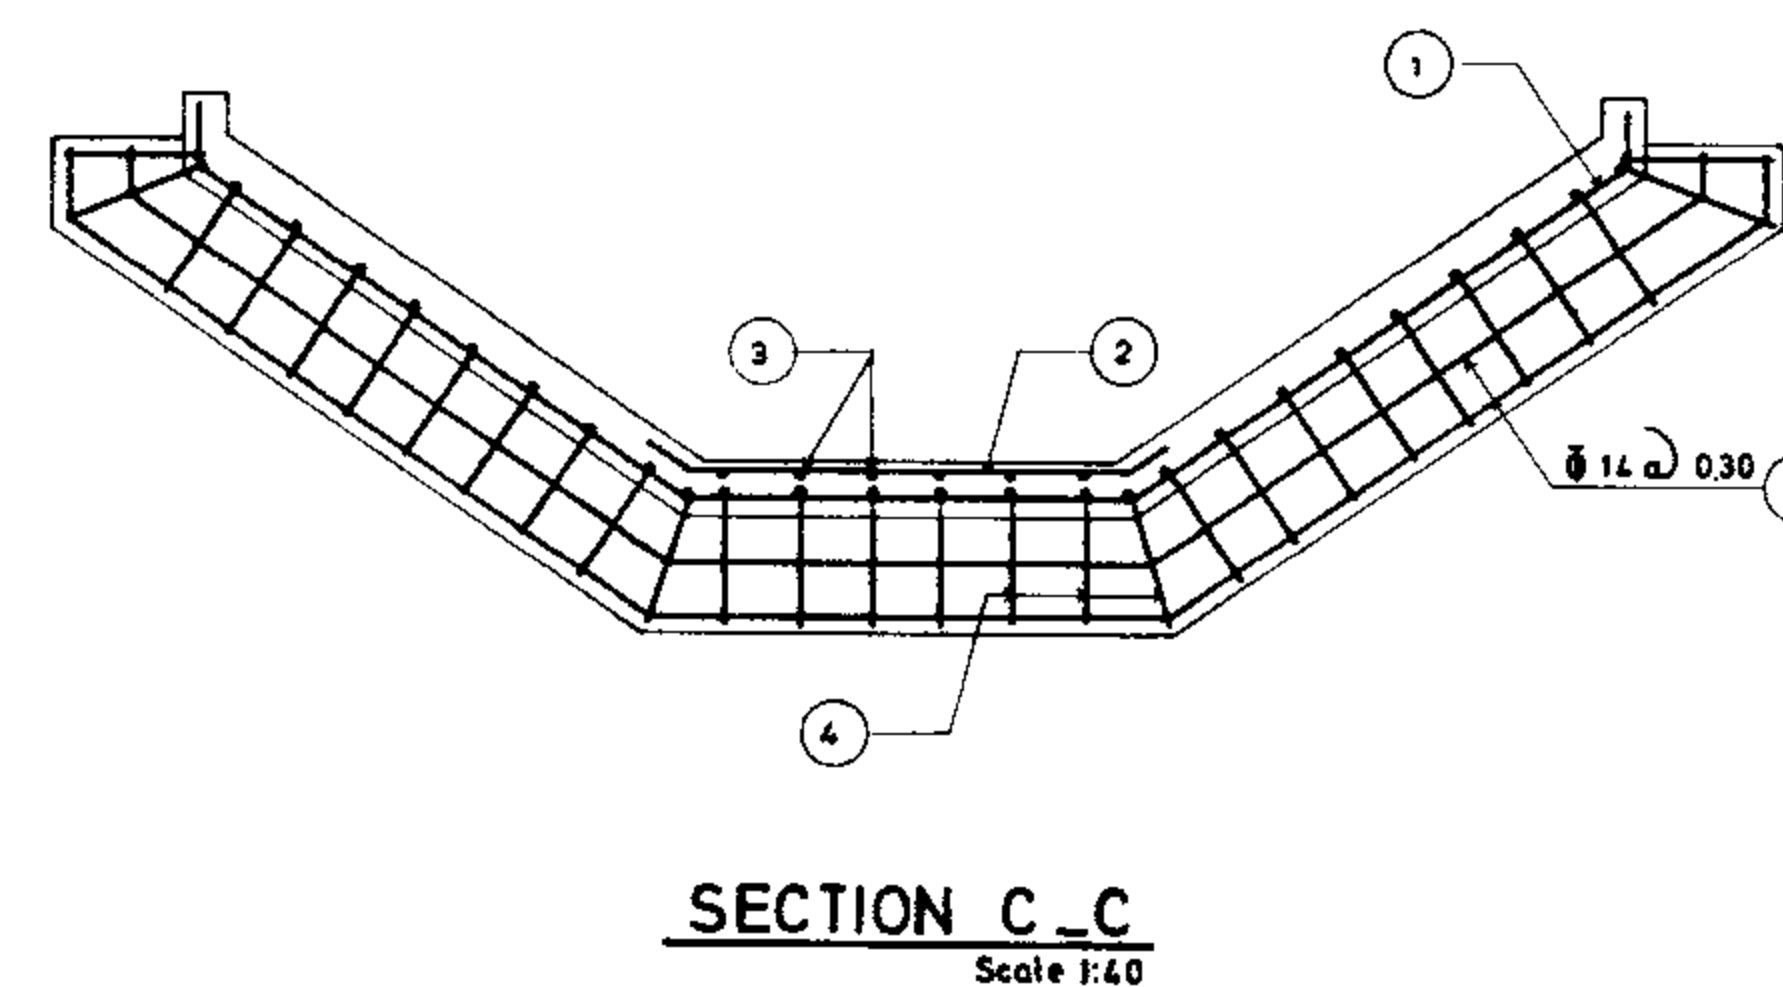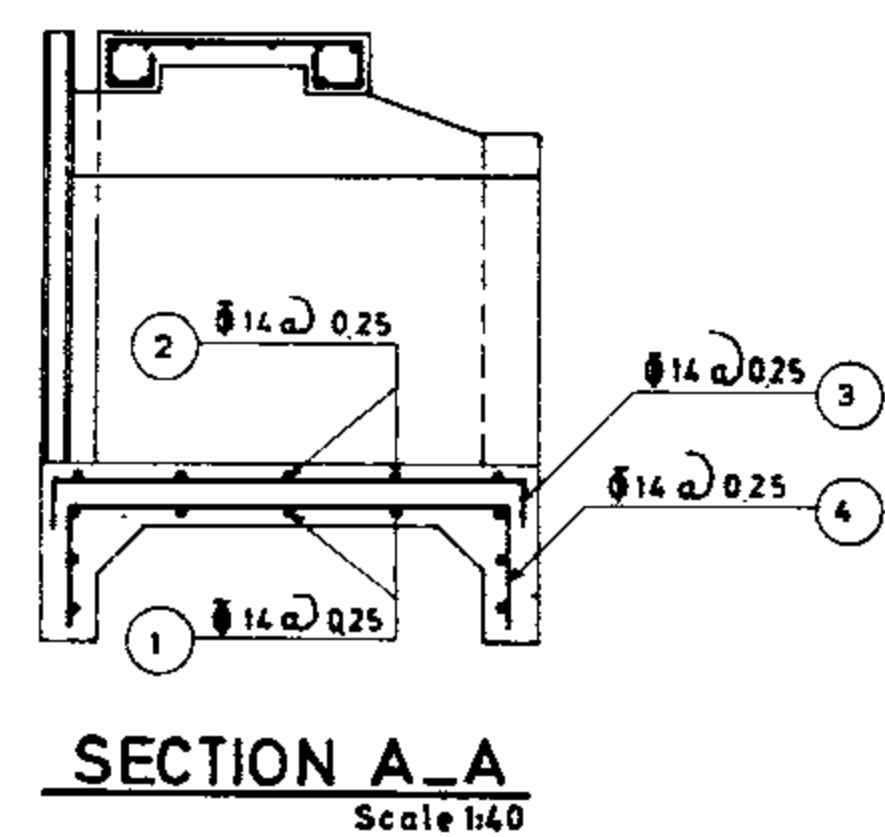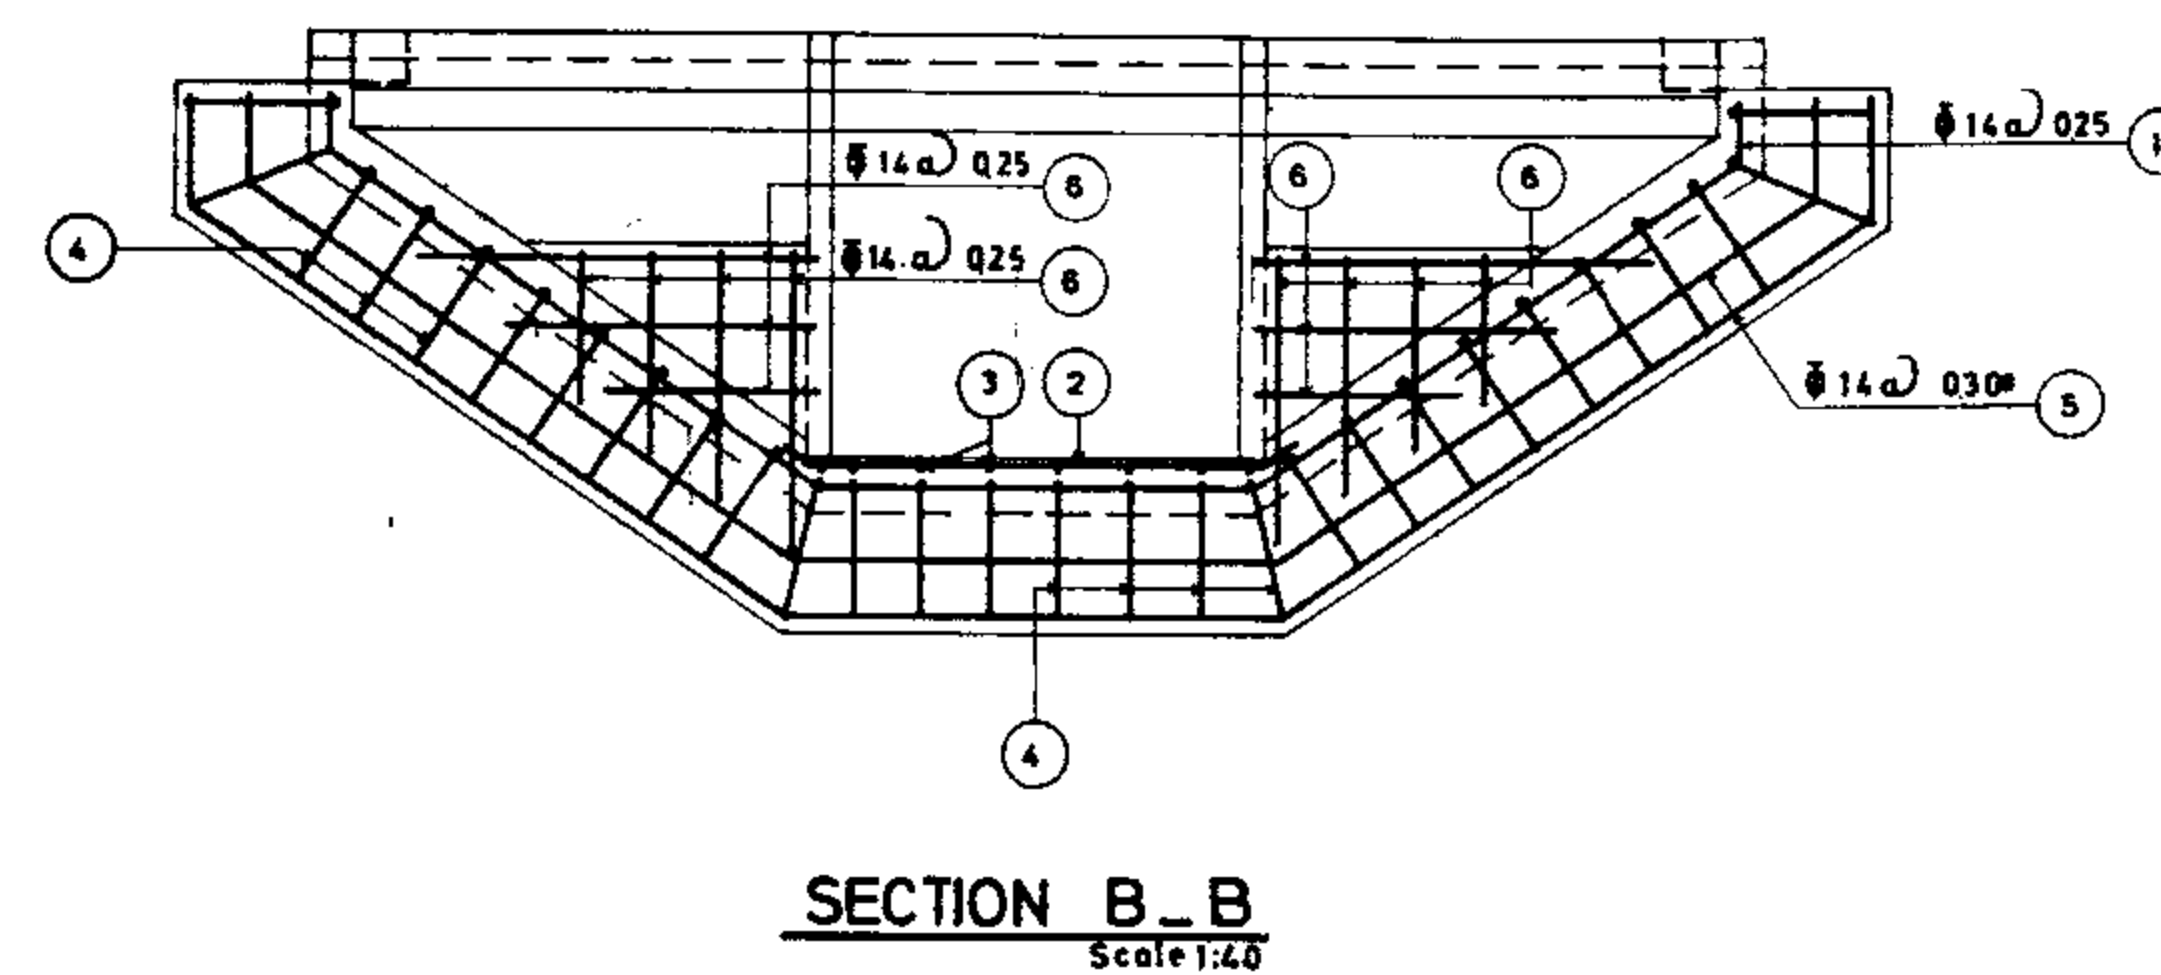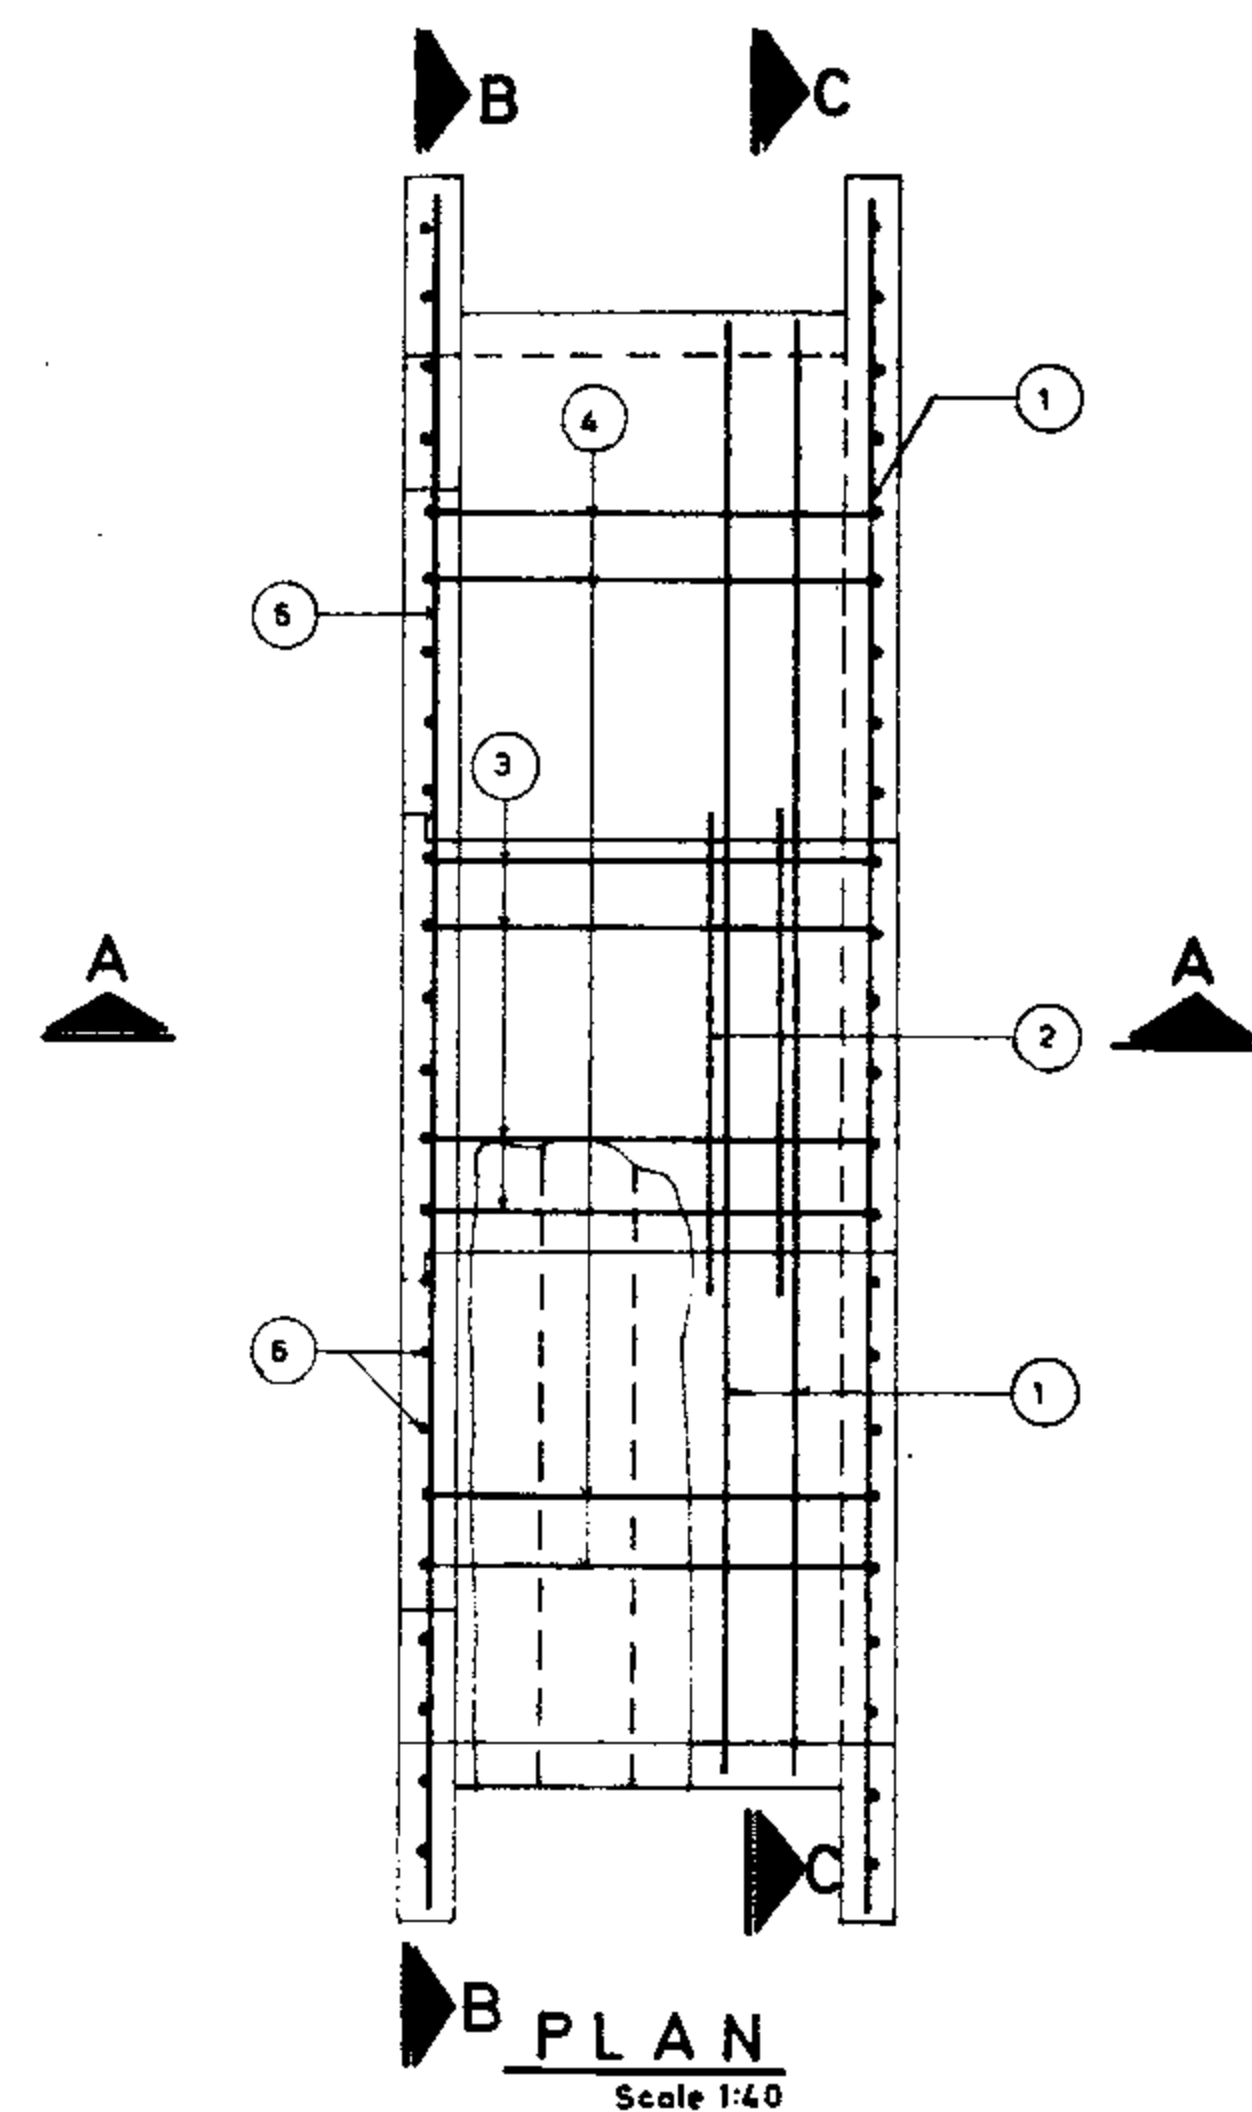

Pos. ② and ③ are omitted when $t < 20$ cm

REFERENCE DWGS: For detail of dimensions see dwgs. No. 12/1/1/01 & 12/1/1/02
For reinforcement table see dwgs. No. 12/1/3/02 TO 12/1/3/04

Scale: 1:40, 1:20

IRRIGATION & DRAINAGE STANDARDS

Date:

DWG. No. 12/1/3/01

Approved:

Sheet No. 3 of 6 Rev. No.

CHECK STRUCTURES
 $Q = 300 \sim 1620$ l/sec.
REINFORCEMENT
PLAN & SECTIONS

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

STR.1							
Pos	Φ	No.	FORM	Unit Leng.	Total Leng.	U.Wt. Kg.	Total weight
1	14	7		3.66	25.62	1.21	31.00
2	-	-	-	-	-	-	-
3	-	-	-	-	-	-	-
4	14	17		2.13	36.21	1.21	43.81
5	14	4		4.46	17.84	1.21	21.59
6	14	10		0.74	7.40	1.21	8.95
7	22	4		3.37	13.48	2.98	40.17
8	16	4		3.37	13.48	1.58	21.30
9	12	2		3.37	6.74	0.888	5.99
10	12	23		1.90	43.70	0.888	38.81
						211.62	Kg.

STR.3							
Pos	Φ	No.	FORM	Unit Leng.	Total Leng.	U.Wt. Kg.	Total weight
1	14	7		4.38	30.66	1.21	37.10
2	-	-	-	-	-	-	-
3	-	-	-	-	-	-	-
4	14	20		2.13	42.60	1.21	51.55
5	14	4		5.18	20.72	1.21	25.07
6	14	14		0.89	12.46	1.21	15.08
7	22	4		3.97	15.88	2.98	43.32
8	16	4		3.97	15.88	1.58	25.09
9	12	2		3.97	7.94	0.888	7.05
10	12	27		1.90	51.30	0.888	45.55
						249.81	Kg.

STR.5							
Pos	Φ	No.	FORM	Unit Leng.	Total Leng.	U.Wt. Kg.	Total weight
1	14	8		5.10	40.80	1.21	49.37
2	-	-	-	-	-	-	-
3	-	-	-	-	-	-	-
4	14	22		2.37	52.14	1.21	63.09
5	14	4		5.90	23.60	1.21	28.56
6	14	18		1.04	18.72	1.21	22.65
7	22	4		4.57	18.28	2.98	54.47
8	16	4		4.57	18.28	1.58	28.88
9	12	2		4.57	9.14	0.888	8.12
10	12	31		1.90	58.90	0.888	52.30
						307.44	Kg.

STR.7							
Pos	Φ	No.	FORM	Unit Leng.	Total Leng.	U.Wt. Kg.	Total weight
1	14	7		4.40	30.80	1.21	37.27
2	-	-	-	-	-	-	-
3	-	-	-	-	-	-	-
4	14	20		2.13	42.60	1.21	51.55
5	14	4		5.20	20.80	1.21	25.17
6	14	12		0.85	10.20	1.21	12.34
7	22	4		4.02	16.08	2.98	47.92
8	16	4		4.02	16.08	1.58	25.41
9	12	2		4.02	8.04	0.888	7.14
10	12	27		1.90	51.30	0.888	45.55
						252.35	Kg.

STR.2							
Pos	Φ	No.	FORM	Unit Leng.	Total Leng.	U.Wt. Kg.	Total weight
1	14	7		4.02	28.14	1.21	34.05
2	-	-	-	-	-	-	-
3	-	-	-	-	-	-	-
4	14	18		2.13	38.34	1.21	46.39
5	14	4		4.82	19.28	1.21	23.33
6	14	12		0.81	9.72	1.21	11.76
7	22	4		3.67	14.68	2.98	43.75
8	16	4		3.67	14.68	1.58	23.19
9	12	2		3.67	7.34	0.888	6.52
10	12	25		1.90	47.50	0.888	42.18
						231.17	Kg.

STR.4							
Pos	Φ	No.	FORM	Unit Leng.	Total Leng.	U.Wt. Kg.	Total weight
1	14	7		4.74	33.18	1.21	40.15
2	-	-	-	-	-	-	-
3	-	-	-	-	-	-	-
4	14	21		2.17	45.57	1.21	55.14
5	14	4		5.54	22.16	1.21	26.81
6	14	16		0.96	15.36	1.21	18.59
7	22	4		4.27	17.08	2.98	50.90
8	16	4		4.27	17.08	1.58	26.99
9	12	2		4.27	8.54	0.888	7.58
10	12	29		1.90	55.10	0.888	48.93
						275.09	Kg.

STR.6							
Pos	Φ	No.	FORM	Unit Leng.	Total Leng.	U.Wt. Kg.	Total weight
1	14	9		5.46	49.14	1.21	59.46
2	-	-	-	-	-	-	-
3	-	-	-	-	-	-	-
4	14	24		2.87	68.88	1.21	83.34
5	14	4		6.26	25.04	1.21	30.30
6	14	20		1.11	22.20	1.21	26.86
7	22	4		4.87	19.48	2.98	58.05
8	16	4		4.87	19.48	1.58	30.78
9	12	2		4.87	9.74	0.888	8.65
10	12	33		1.90	62.70	0.888	55.68
						353.12	Kg.

STR.8							
Pos	Φ	No.	FORM	Unit Leng.	Total Leng.	U.Wt. Kg.	Total weight
1	14	7		4.76	33.32	1.21	40.32
2	-	-	-	-	-	-	-
3	-	-	-	-	-	-	-
4	14	21		2.13	44.73	1.21	54.12
5	14	4		5.56	22.24	1.21	26.91
6	14	14		0.92	12.88	1.21	15.58
7	22	4		4.32	17.28	2.98	51.49
8	16	4		4.32	17.28	1.58	27.30
9	12	2		4.32	8.64	0.888	7.67
10	12	29		1.90	55.10	0.888	48.93
						272.32	Kg.

REFERENCE DWGS: For reinforcement: see dwg. No 12/1/3/01
For bars with variable unit length see note under the same title at dwg. No 20/2/1/01

Scale:	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. No 12/1/3/02	
Approved:	Sheet No: 4 of 6	Rev. No
	CHECK STRUCTURES LIST OF REINFORCEMENT STR. 1 TO 8	

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

STR.9									
POS	Φ	No.	FORM	Unit Leng	Total Leng	U.Wt. KG	Total weight		
1	14	7		5.12	35.84	1.21	43.37		
2	-	-		-	-	-	-		
3	-	-		-	-	-	-		
4	14	23		2.17	49.91	1.21	60.39		
5	14	4		5.92	23.68	1.21	28.65		
6	14	16		1.00	16.00	1.21	19.36		
7	22	4		4.62	18.48	2.98	55.07		
8	16	4		4.62	18.48	1.58	29.20		
9	12	2		4.62	9.24	0.888	8.21		
10	12	31		1.90	58.90	0.888	52.30		
							296.55	KG.	

STR.11									
POS	Φ	No.	FORM	Unit Leng	Total Leng	U.Wt. KG	Total weight		
1	14	9		5.84	52.56	1.21	63.60		
2	14	9		1.68	15.12	1.21	18.30		
3	14	6		2.22	13.32	1.21	16.12		
4	14	25		2.83	70.75	1.21	85.61		
5	14	4		6.64	26.56	1.21	32.14		
6	14	20		1.15	23.00	1.21	27.83		
7	22	4		5.22	20.88	2.98	62.22		
8	16	4		5.22	20.88	1.58	32.99		
9	12	2		5.22	10.44	0.888	9.27		
10	12	35		1.90	66.50	0.888	59.05		
							407.13	KG.	

STR.13									
POS	Φ	No.	FORM	Unit Leng	Total Leng	U.Wt. KG	Total weight		
1	14	7		4.96	34.72	1.21	42.01		
2	-	-		-	-	-	-		
3	-	-		-	-	-	-		
4	14	22		2.07	45.54	1.21	55.10		
5	14	4		5.39	21.56	1.21	26.09		
6	14	14		0.92	12.88	1.21	15.58		
7	22	4		4.52	18.08	2.98	53.88		
8	16	4		4.52	18.08	2.98	28.57		
9	12	2		4.52	9.04	0.888	8.03		
10	12	31		1.90	58.90	0.888	52.30		
							281.56	KG.	

STR.15									
POS	Φ	No.	FORM	Unit Leng	Total Leng	U.Wt. KG	Total weight		
1	14	8		5.68	45.44	1.21	54.98		
2	-	-		-	-	-	-		
3	-	-		-	-	-	-		
4	14	25		2.37	59.25	1.21	71.69		
5	14	4		6.48	25.92	1.21	31.36		
6	14	18		1.07	19.26	1.21	23.30		
7	22	4		5.12	20.48	2.98	61.03		
8	16	4		5.12	20.48	1.58	32.36		
9	12	2		5.12	10.24	0.888	9.09		
10	12	35		1.90	66.50	0.888	59.05		
							342.86	KG.	

STR.10									
POS	Φ	No.	FORM	Unit Leng	Total Leng	U.Wt. KG	Total weight		
1	14	8		5.48	43.84	1.21	53.05		
2	-	-		-	-	-	-		
3	-	-		-	-	-	-		
4	14	24		2.37	56.88	1.21	68.82		
5	14	4		6.28	25.12	1.21	30.40		
6	14	18		1.07	19.26	1.21	23.30		
7	22	4		4.92	19.68	2.98	58.65		
8	16	4		4.92	19.68	1.58	31.09		
9	12	2		4.92	9.84	0.888	8.74		
10	12	33		1.90	62.70	0.888	55.68		
							329.73	KG.	

STR.12									
POS	Φ	No.	FORM	Unit Leng	Total Leng	U.Wt. KG	Total weight		
1	14	10		6.20	62.00	1.21	75.02		
2	14	10		1.68	16.80	1.21	20.33		
3	14	6		2.42	14.52	1.21	17.57		
4	14	27		3.03	81.81	1.21	98.99		
5	14	4		7.00	28.00	1.21	33.88		
6	14	22		1.22	26.84	1.21	32.48		
7	22	4		5.52	22.08	2.98	65.80		
8	16	4		5.52	22.08	1.58	34.89		
9	12	2		5.52	11.04	0.888	9.80		
10	12	37		1.90	70.30	0.888	62.43		
							451.19	KG.	

STR.14									
POS	Φ	No.	FORM	Unit Leng	Total Leng	U.Wt. KG	Total weight		
1	14	7		5.32	37.24	1.21	45.06		
2	-	-		-	-	-	-		
3	-	-		-	-	-	-		
4	14	23		2.17	49.91	1.21	60.39		
5	14	4		6.12	24.48	1.21	29.62		
6	14	16		1.00	16.00	1.21	19.36		
7	22	4		4.82	19.28	2.98	57.45		
8	16	4		4.82	19.28	1.58	30.46		
9	12	2		4.82	9.64	0.888	8.56		
10	12	33		1.90	62.70	0.888	55.68		
							306.58	KG.	

STR.16									
POS	Φ	No.	FORM	Unit Leng	Total Leng	U.Wt. KG	Total weight		
1	14	9		6.04	54.36	1.21	65.78		
2	14	9		1.88	16.92	1.21	20.47		
3	14	7		2.22	15.54	1.21	18.80		
4	14	26		2.83	73.58	1.21	89.03		
5	14	4		6.84	27.36	1.21	33.11		
6	14	20		1.15	23.00	1.21	27.83		
7	22	4		5.42	21.68	2.98	64.61		
8	16	4		5.42	21.68	1.58	34.25		
9	12	2		5.42	10.84	0.888	9.63		
10	12	37		1.90	70.30	0.888	62.43		
							425.94	KG.	

REFERENCE DWGS: For reinforcement see dwg. No 12/1/3/01
For bars with variable unit length see note under the same title at dwg. No 20/2/101

Scale:	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. No 12/1/3/03	CHECK STRUCTURES
Approved:	Sheet. No: 5 of 6	Rev. No
	LIST OF REINFORCEMENT STR. 9 TO 16	

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

STR.17

POS	Φ	No.	FORM	Unit Leng	Total Leng	U.Wt. KG	Total weight
1	14	10		6.40	64.00	1.21	77.44
2	14	10		1.88	18.80	1.21	22.75
3	14	7		2.42	16.94	1.21	20.50
4	14	28		3.03	84.84	1.21	102.66
5	14	4		7.20	28.80	1.21	34.85
6	14	22		1.22	26.84	1.21	32.48
7	22	4		5.72	22.88	2.98	68.18
8	16	4		5.72	22.88	1.58	36.15
9	12	2		5.72	11.44	0.888	10.16
10	12	39		1.90	74.10	0.888	65.80
						470.97	KG

STR.19

POS	Φ	No.	FORM	Unit Leng	Total Leng	U.Wt. KG	Total weight
1	14	8		5.88	47.04	1.21	56.92
2	-	-	-	-	-	-	-
3	-	-	-	-	-	-	-
4	14	26		2.37	61.62	1.21	74.56
5	14	4		6.68	26.72	1.21	32.33
6	14	18		1.07	19.26	1.21	23.30
7	22	4		5.32	21.28	2.98	63.41
8	16	4		5.32	21.28	1.58	33.62
9	12	2		5.32	10.64	0.888	9.45
10	12	36		1.90	68.40	0.888	60.74
						354.33	KG

STR.21

POS	Φ	No.	FORM	Unit Leng	Total Leng	U.Wt. KG	Total weight
1	14	10		6.60	66.00	1.21	79.86
2	14	10		2.08	20.80	1.21	25.17
3	14	8		2.42	19.36	1.21	23.43
4	14	28		3.03	84.84	1.21	102.66
5	14	4		7.40	29.60	1.21	35.82
6	14	22		1.22	26.84	1.21	32.48
7	22	4		5.92	23.68	2.98	70.57
8	16	4		5.92	23.68	1.58	37.41
9	12	2		5.92	11.84	0.888	10.51
10	12	40		1.90	76.00	0.888	67.49
						485.40	KG

STR.23

POS	Φ	No.	FORM	Unit Leng	Total Leng	U.Wt. KG	Total weight
1	14	9		6.44	57.96	1.21	70.13
2	14	9		2.28	20.52	1.21	24.83
3	14	9		2.22	19.98	1.21	24.18
4	14	28		2.83	79.24	1.21	95.88
5	14	4		7.24	28.96	1.21	35.04
6	14	20		1.15	23.00	1.21	27.83
7	22	4		5.82	23.28	2.98	69.37
8	16	4		5.82	23.28	1.58	36.78
9	12	2		5.82	11.64	0.888	10.34
10	12	39		1.90	74.10	0.888	65.80
						460.18	KG

STR.18

POS	Φ	No.	FORM	Unit Leng	Total Leng	U.Wt. kg.	Total weight
1	14	7		5.52	38.64	1.21	46.75
2	-	-	-	-	-	-	-
3	-	-	-	-	-	-	-
4	14	24		2.17	52.08	1.21	63.02
5	14	4		6.32	25.28	1.21	30.59
6	14	16		1.00	16.00	1.21	19.36
7	22	4		5.02	20.08	2.98	59.84
8	16	4		5.02	20.08	1.58	31.73
9	12	2		5.02	10.04	0.888	8.92
10	12	34		1.90	64.60	0.888	57.36
						317.57	KG

STR.20

POS	Φ	No.	FORM	Unit Leng	Total Leng	U.Wt. KG	Total weight
1	14	9		6.24	56.16	1.21	67.95
2	14	9		2.08	18.72	1.21	22.65
3	14	8		2.22	17.76	1.21	21.49
4	14	27		2.83	76.41	1.21	92.46
5	14	4		7.04	28.16	1.21	34.07
6	14	20		1.15	23.00	1.21	27.83
7	22	4		5.62	22.48	2.98	66.99
8	16	4		5.62	22.48	1.58	35.52
9	12	2		5.62	11.24	0.888	9.98
10	12	38		1.90	72.20	0.888	64.11
						443.05	KG

STR.22

POS	Φ	No.	FORM	Unit Leng	Total Leng	U.Wt. KG	Total weight
1	14	8		6.08	48.64	1.21	58.85
2	-	-	-	-	-	-	-
3	-	-	-	-	-	-	-
4	14	26		2.37	61.62	1.21	74.56
5	14	4		6.88	27.52	1.21	33.30
6	14	18		1.07	19.26	1.21	23.30
7	22	4		5.52	22.08	2.98	65.80
8	16	4		5.52	22.08	1.58	34.89
9	12	2		5.52	11.04	0.888	9.80
10	12	37		1.90	70.30	0.888	62.43
						362.93	KG

STR.24

POS	Φ	No.	FORM	Unit Leng	Total Leng	U.Wt. KG	Total weight
1	14	10		6.80	68.00	1.21	82.28
2	14	10		2.28	22.80	1.21	27.59
3	14	9		2.42	21.78	1.21	26.35
4	14	29		3.03	87.87	1.21	106.32
5	14	4		7.60	30.40	1.21	36.78
6	14	22		1.22	26.84	1.21	32.48
7	22	4		6.12	24.48	2.98	72.95
8	16	4		6.12	24.48	1.58	38.68
9	12	2		6.12	12.24	0.888	10.87
10	12	41		1.90	77.90	0.888	69.18
						503.48	KG

REFERENCE DWGS: For reinforcement see dwg. No 12/1/3/01
For bars with variable unit length see note under the same title at dwg. No 20/2/1/01

Scale:	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. No 12/1/3/04	
Approved:	Sheet No: 6 of 6	Rev. No
	CHECK STRUCTURES LIST OF REINFORCEMENT STR. 16 TO 24	

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDJET
TECHNICAL RESEARCH AND
STANDARD BUREAU

DESIGN CONSIDERATIONS


- 1) Inverted siphons are used to convey canal water by gravity under roads, railroads, other structures, various type of drainage channels and depressions.
- 2) The pipe cover requirements are :
 - a) Min. 0.60 m. of earth cover for all siphons crossing under roads and railroads. Back fill should be thoroughly compacted.
 - b) Min. 0.90 m. of earth cover for siphons crossing under cross-drainage channels unless studies indicate more cover is required because of projected future retrogressions of the channel.
 - c) Min. 0.60 m. of earth cover for siphons crossing under an earth canal.
 - d) Min. 0.15 m. of earth cover between the concrete canal lining and the top of pipe, is required.
- 3) The following siphons require either a concrete inlet transition or some type of concrete outlet transitions:
 - a) All siphons crossing under railroads and state highways.
 - b) All 0.90 m. diameter and larger pipe siphon crossing roads.
 - c) All siphons in unlined canals with water velocities in excess of 1.0 m/s.
 - d) If there is a need for controlling the water surface elevation upstream from the siphon a check and pipe inlet or a control and pipe inlet is to be used
- 4) In general, siphon velocities should range from 1.0 to 3.0 m/s depending on available head. The following velocity criteria may be used in determining the diameter of siphon :
 - a) 1.0 m/s or less for a relatively short siphon with only earth transitions provided at inlet and outlet.

- b) 1.5 m/s or less for a relatively short siphon with either a concrete transition or a control structure provided at the inlet and a concrete transition provided at the outlet.
 - c) 3.0 m/s or less for a relatively long siphon with either a concrete transition or a control structure provided at the inlet and a concrete transition provided at the outlet.
- 5) E.L.B. is equal to E.L.A-head losses. Head losses which should be considered are as follows:
 - a) Convergence loss in the inlet transition.
 - b) Check structure losses when a check is installed in the inlet.
 - c) Control structure losses when a control is installed in the inlet.
 - d) Friction and bend losses in the pipe.
 - e) Diversion loss in the outlet transition.
 - f) Transition friction losses are usually ignored for the size of structures in this publication.
 - g) Convergence and divergence head losses in earth transitions when required between the canal and concrete transition are usually small and ignored.
 - h) The total computed head loss is usually increased by 10% as a safety factor.
 - 6) a) The hydraulic head loss in transition is dependent on the difference of the velocity heads in the canal and the normal to centerline section of the closed conduit.
 - b) Coefficients of velocity head considered adequate for determining head losses in a broken-back type of transition (Concrete transition type 5, dwg. No. 13/11/1/01) shown in this dwg., are 0.4 for the inlet and 0.7 for the outlet.
 - c) Coefficients of velocity head considered adequate for determining head losses in earth transitions from the canal to a



pipe are 0.5 for the inlet and 1.0 for the outlet.

- d) For min. hydraulic loss, it is desirable to provide a seal of $1.5 h_v$, with 0.08 m. minimum at pipe inlet and no submergence at the pipe outlet. The seal is equal in height to vertical drop from the normal canal water surface to the top of the siphon opening. ("S" on section A-A).
 - e) If the siphon has both upstream and downstream concrete transitions, it may be economically desirable to construct the D/S transition the same as the upstream transition.
 - f) Pipe friction losses are determined by using Manning formula.
 - g) Pipe bend losses are determined by using Fig-1.
- 7) Design procedure :
 - a) Determine inlet and outlet structures and approximate size of pipe.
 - b) Make a preliminary layout of the siphon and determine L_1, L_2, L_3, α_1 and α_2 cover and submergence requirements.
 - c) Compute the siphon head-losses in this layout.
 - c-1) If the computed losses are greater than the difference in U/S and D/S canal water surface, the pipe size should be increased or the canal profile revised to provide adequate head.
 - c-2) If the computed losses are appreciably less than the difference in U/S canal water surface, it may be possible to decrease the size of pipe, or the canal profile may be revised.
 - 8) When the pipe profile permits vacuum an air vent should be provided, as shown on dwgs. 12/3/1/01 or 12/9/1/01.

Figure 1. Head loss coefficients for pipe bends

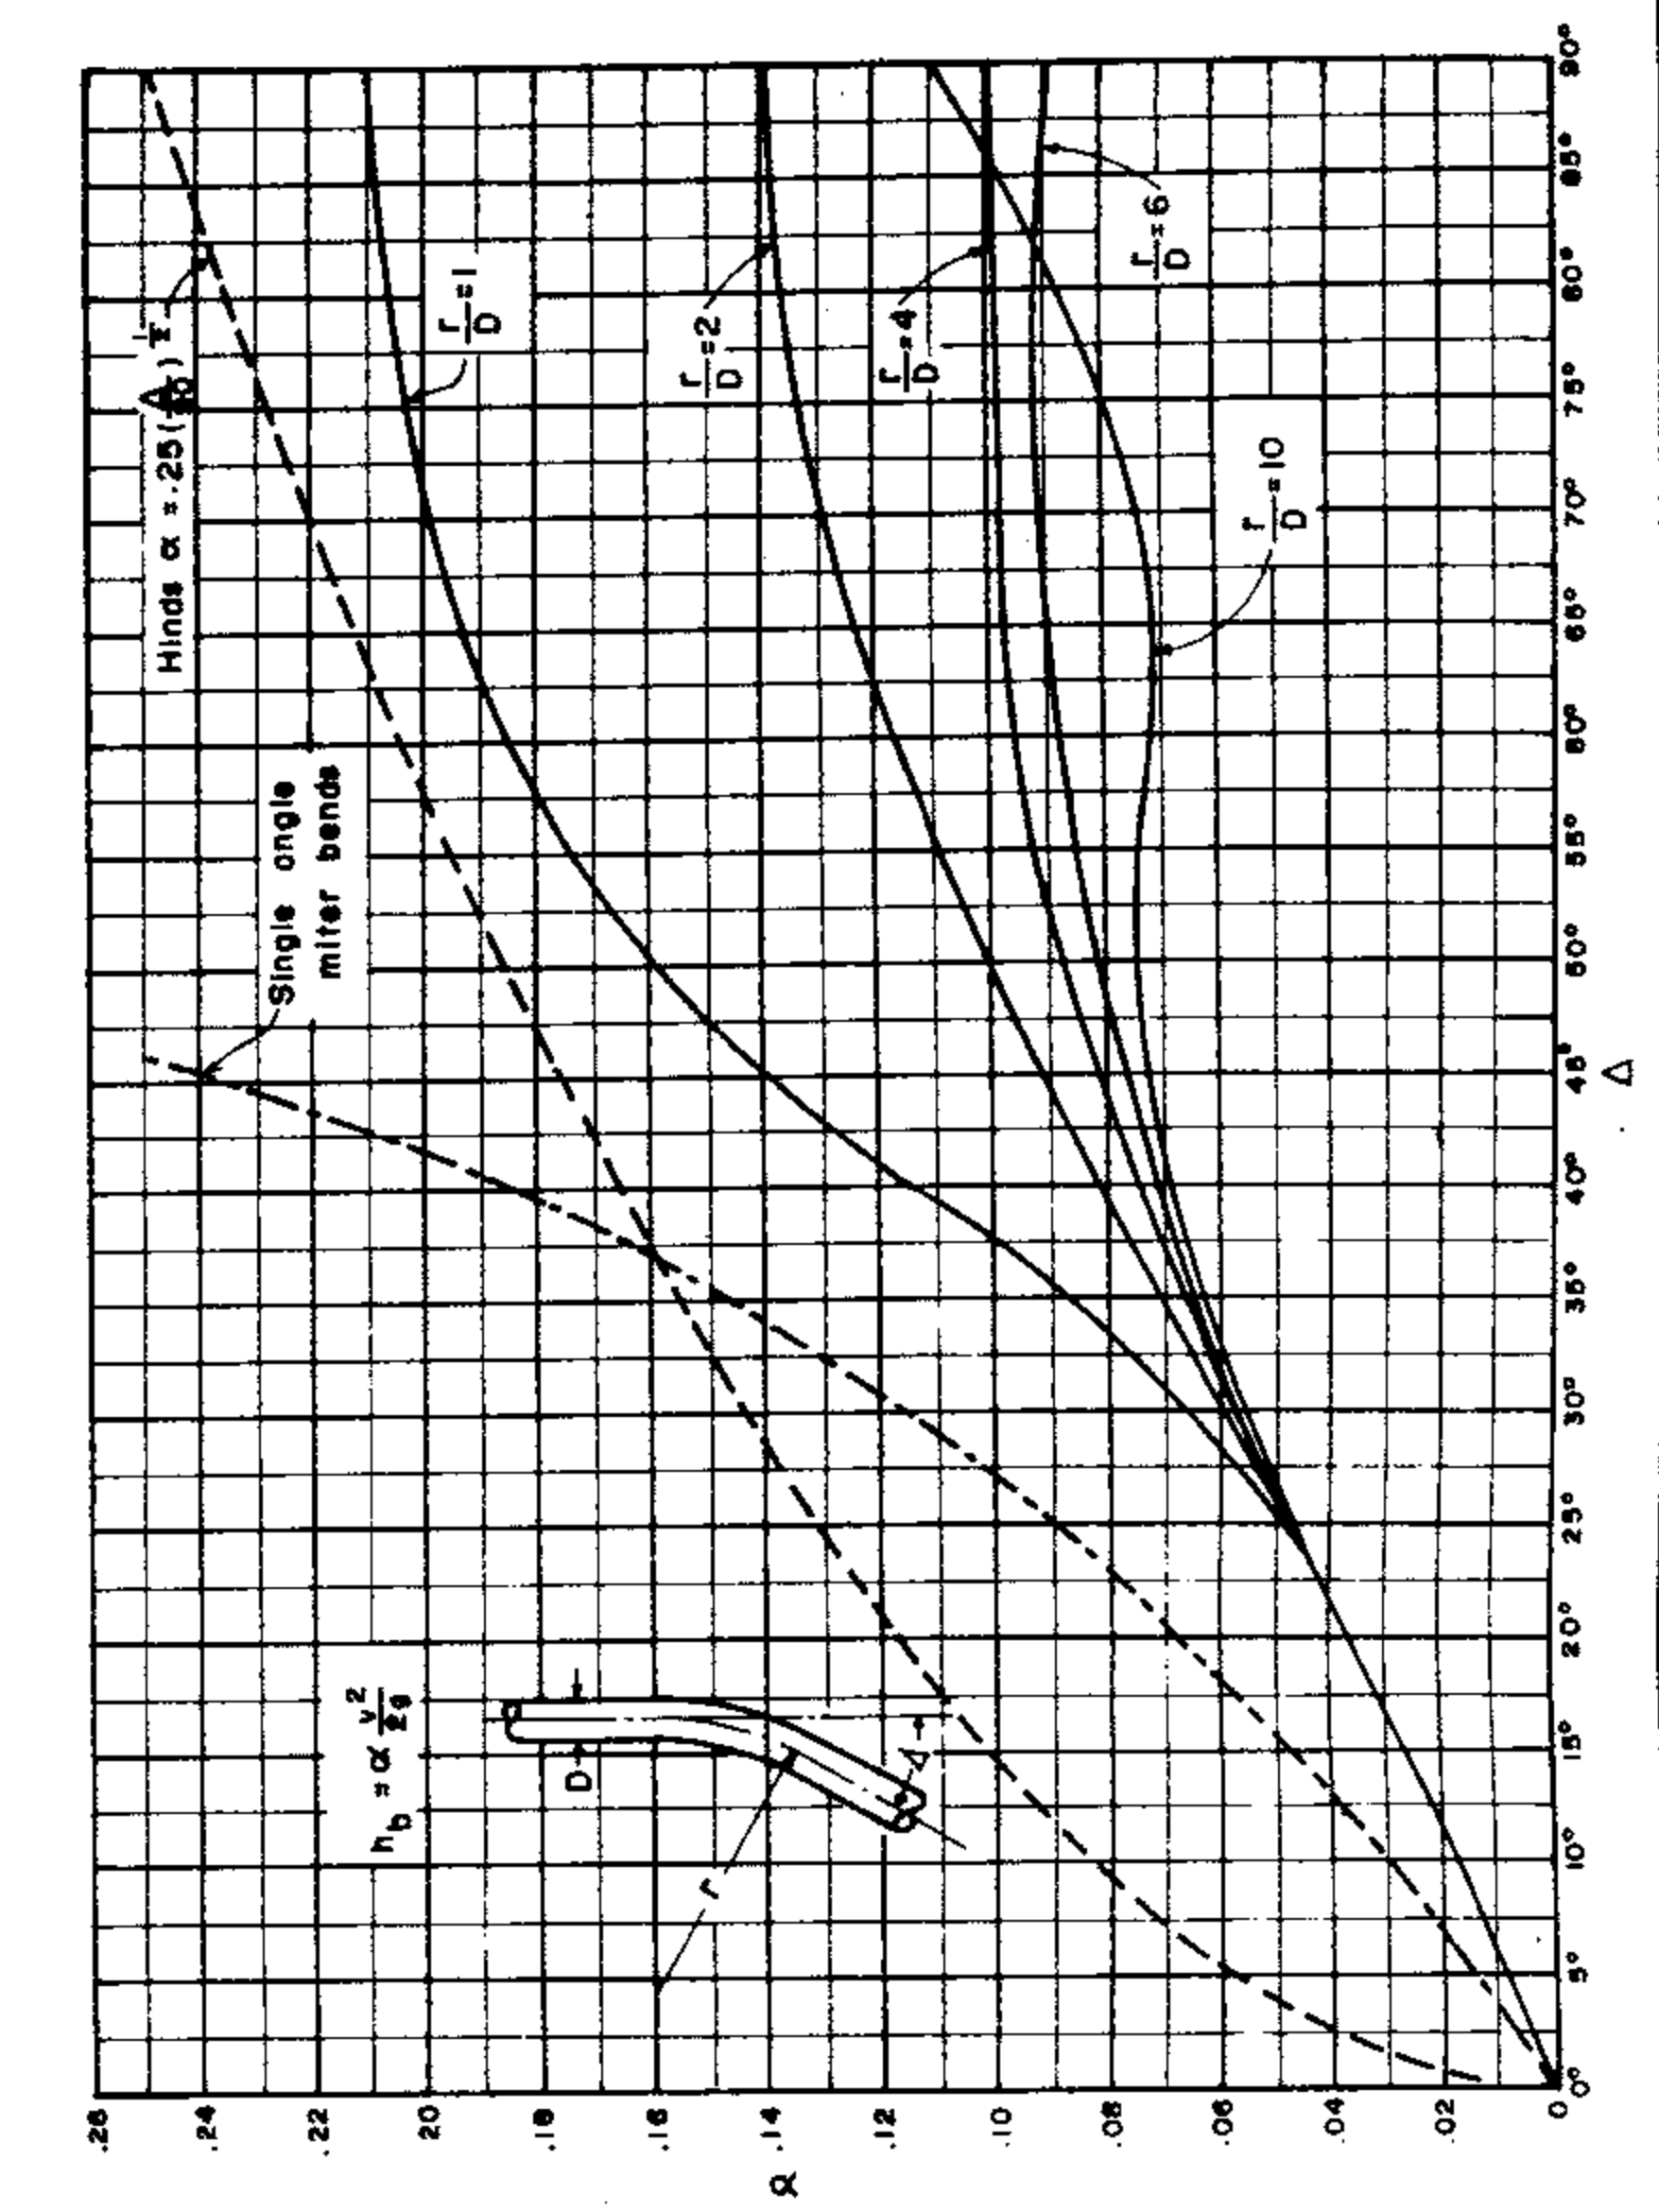


Pipe diameter selection table Q m ³ /sce						Pipe
V = 1.00 m/s Max		V = 1.50 m/s Max		V = 3.00 m/s Max		D mm
from	to	from	to	from	to	
-	0.008	-	0.012	-	0.024	100
0.008	0.031	0.012	0.047	0.024	0.094	200
0.031	0.049	0.047	0.074	0.094	0.147	250
0.049	0.071	0.074	0.106	0.147	0.212	300
0.071	0.096	0.106	0.144	0.212	0.289	350
0.096	0.126	0.144	0.188	0.289	0.377	400
0.126	0.159	0.188	0.239	0.377	0.477	450
0.159	0.196	0.239	0.295	0.477	0.589	500
0.196	0.282	0.295	0.424	0.589	0.848	600
0.282	0.385	0.424	0.577	0.848	1.155	700
0.385	0.503	0.577	0.754	1.155	1.508	800
0.503	0.636	0.754	0.954	1.508	1.909	900
0.636	0.785	0.954	1.178	1.909	2.356	1000
0.785	1.131	1.178	1.696	2.356	3.393	1200
1.131	1.539	1.696	2.309	3.393	4.618	1400
1.539	2.011	2.309	3.016	4.618	6.032	1600
2.011	2.545	3.016	3.817	6.032	7.634	1800
2.545	3.142	3.817	4.712	7.634	9.425	2000

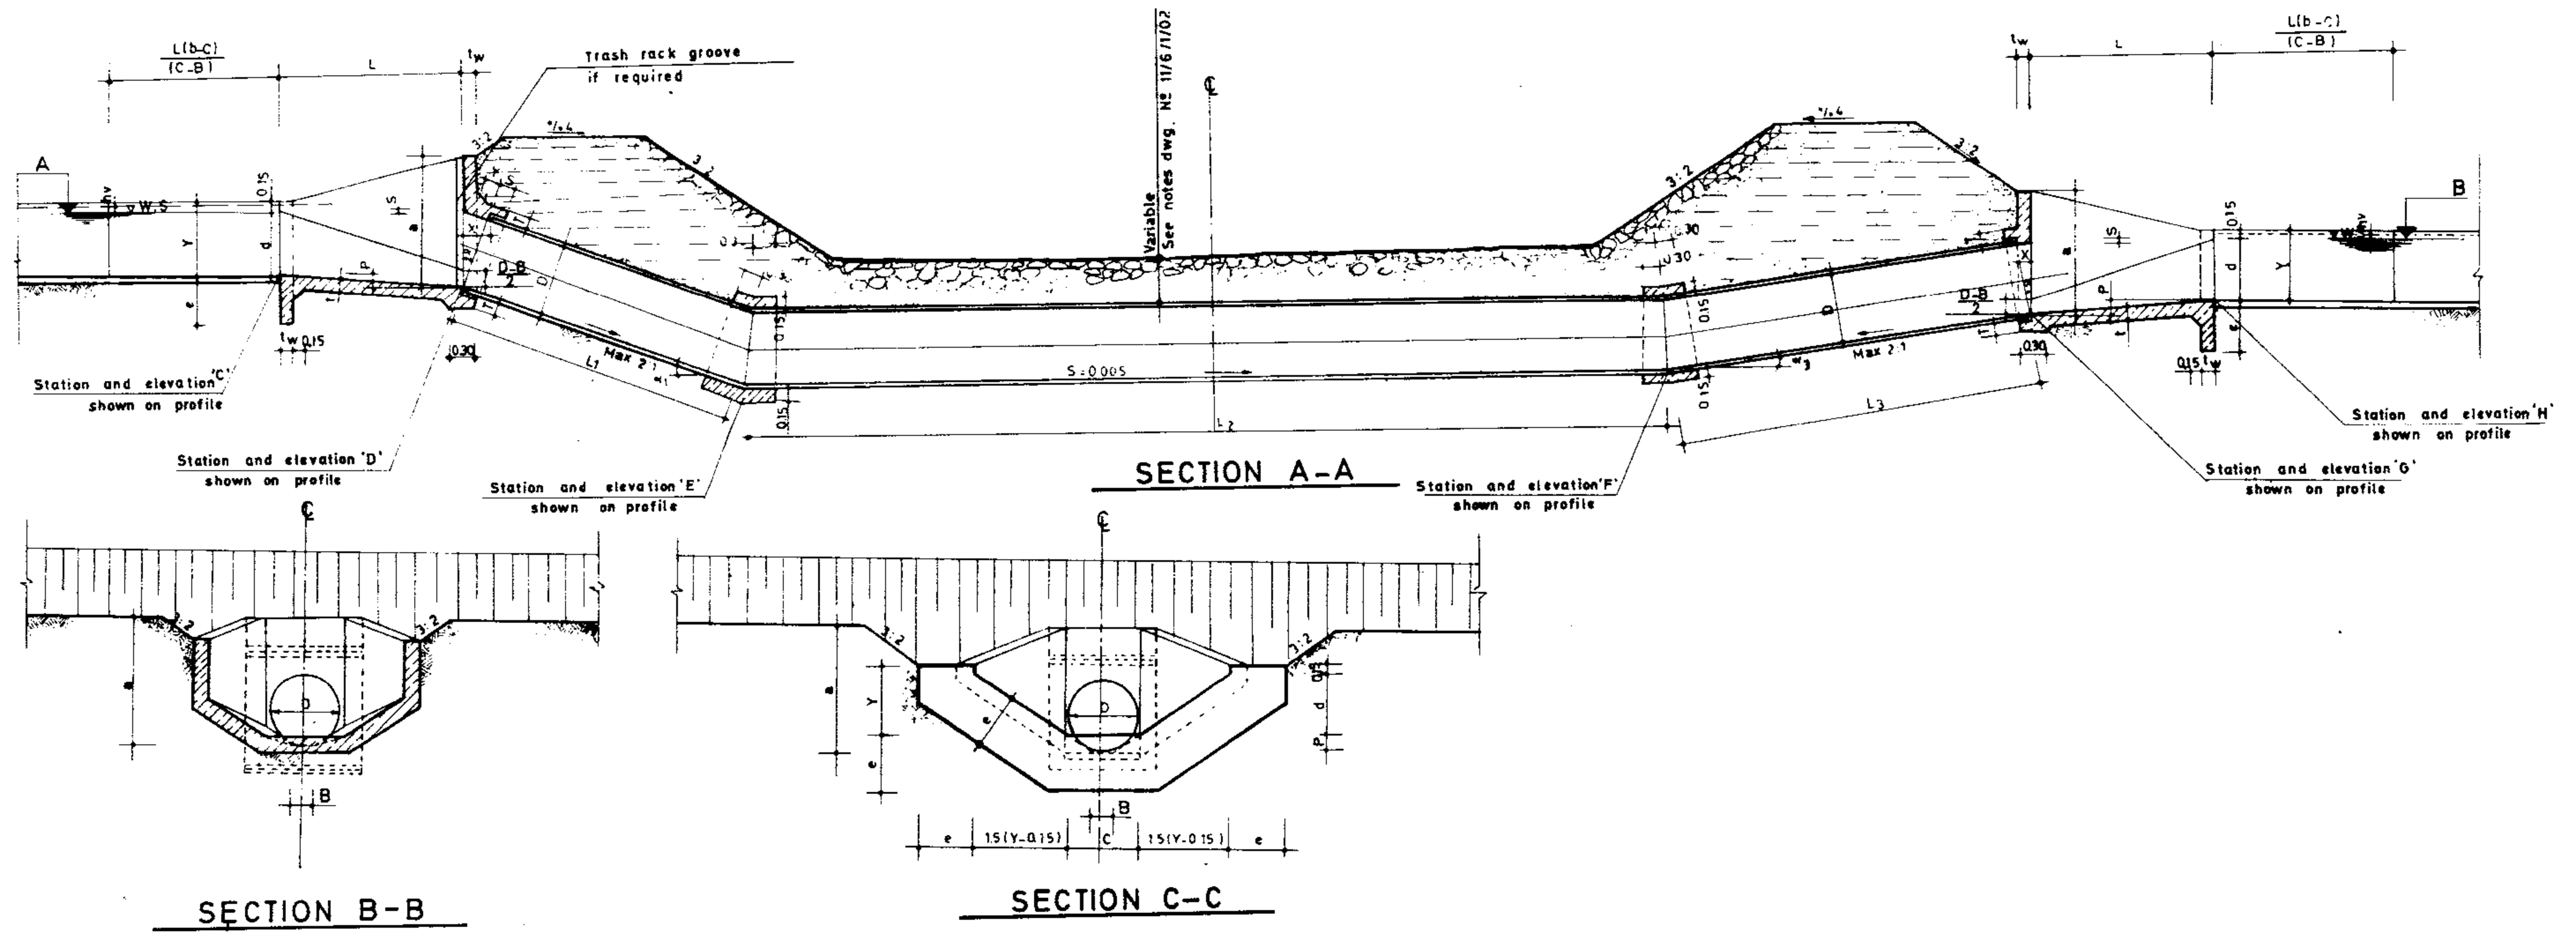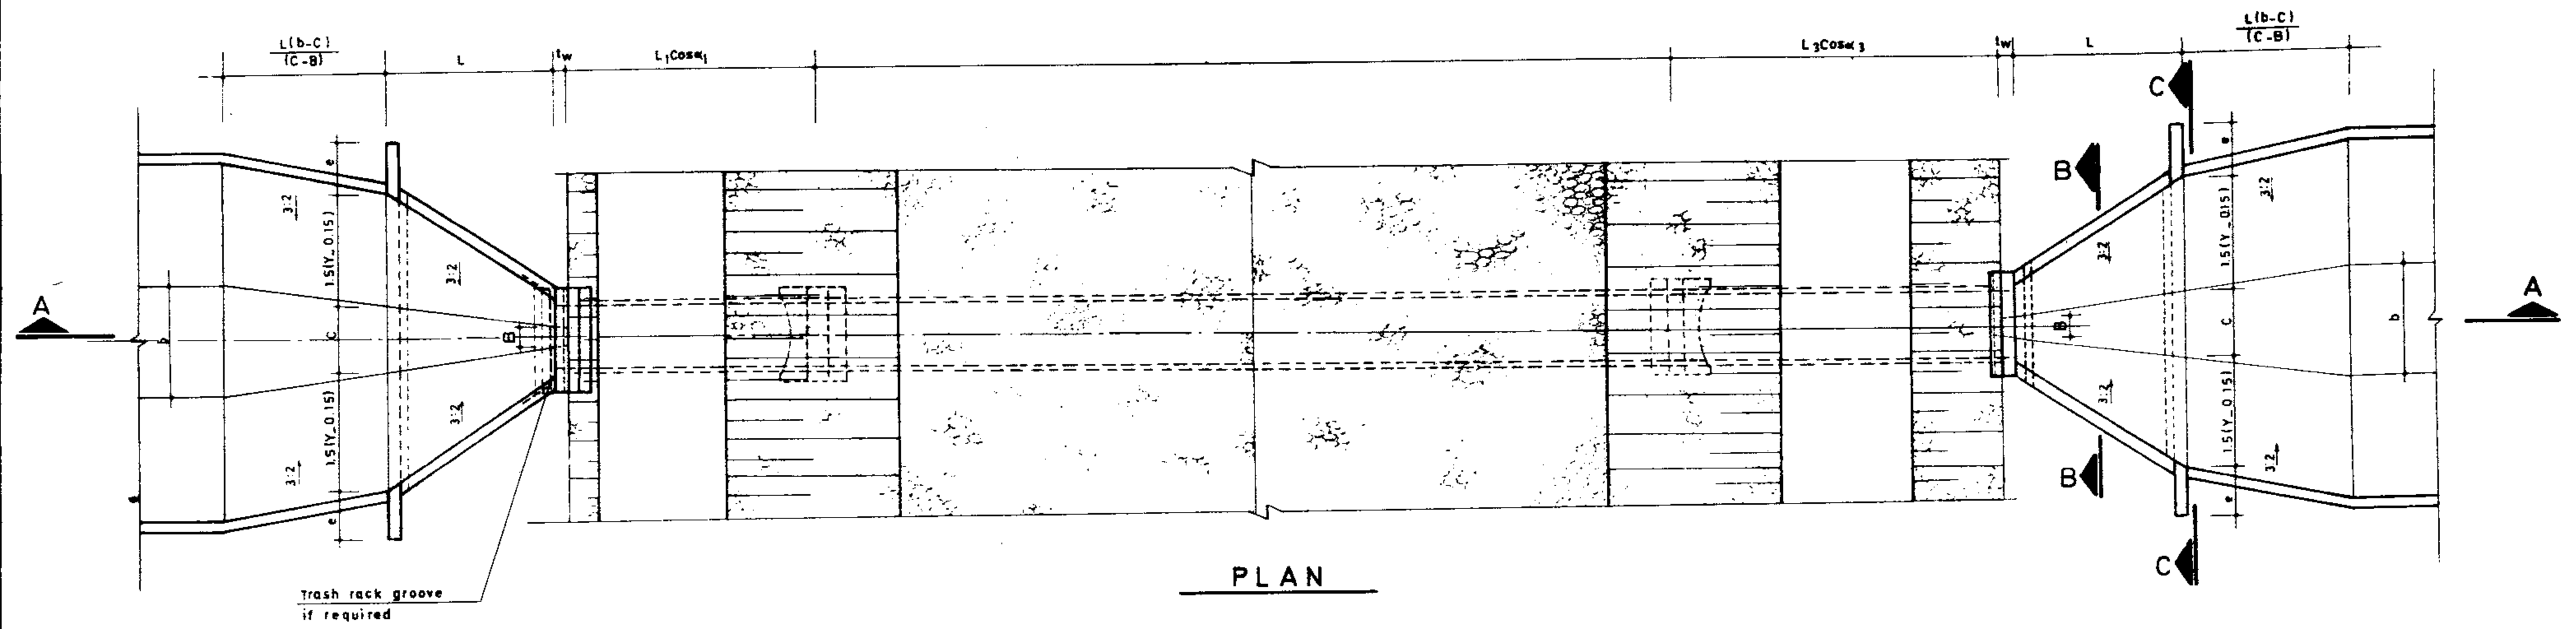

REFERENCE DWGS: For detail dimension of transition see dwg. No 13/7/1/01 to 13/12/1/01
 For hydraulic information of pipes and calculation of head losses see dwg. No 11/6/1/02
 For detail of pipe connection to structures see dwgs. No 17/1/1/01 to 17/1/1/01

Scale: N.T.S.	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG No 11/6/1/01	INVERTED SIPHON (TYPICAL POSITION)
Approved:	Sheet No 2 of 2	Rev. No
		PLAN & SECTION


ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUD.
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

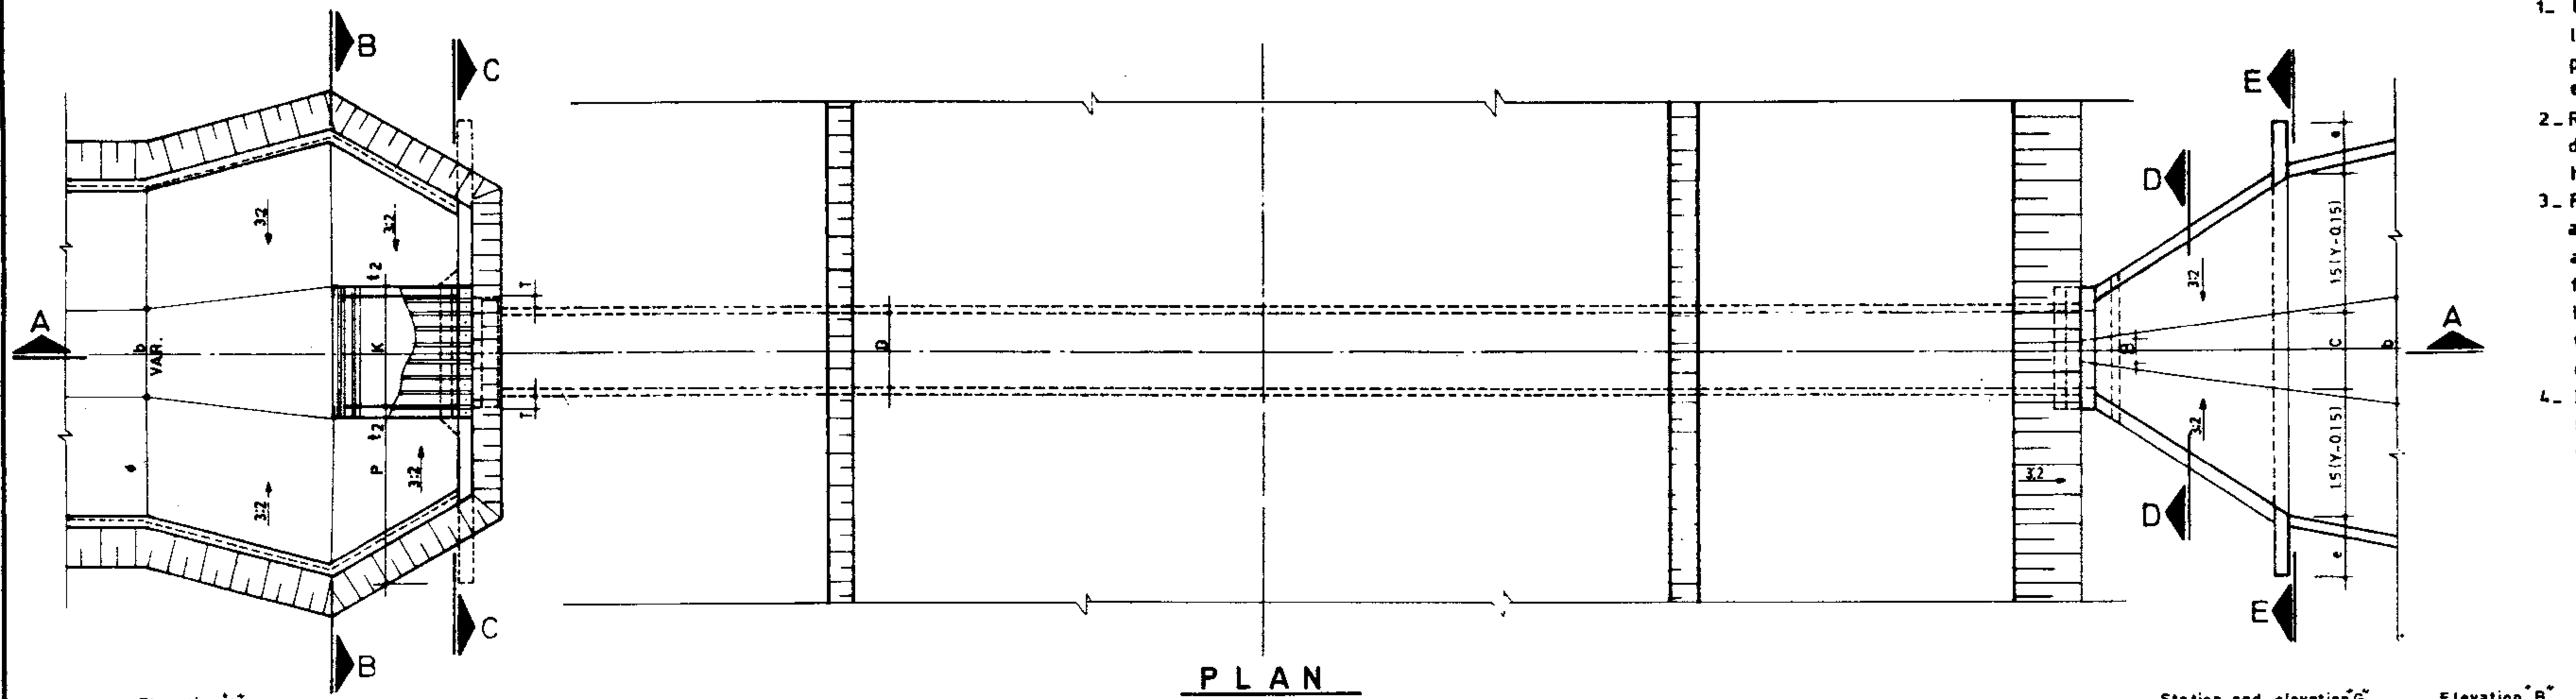


PLAN

NOTES


1. Road crossing conduit may have a straight line profile as shown in this dwg. or a profile with vertical bends which function either as inverted siphons, drops or chutes.
2. Road crossing with straight line profile is designed for flow with little or no internal hydrostatic pressure.
3. For pipe selection see dwg. No. 11/6/1/01 and considered:
 - a) A maximum allowable velocity of 1.0m/sec for a pipe with earth transitions.
 - b) A maximum allowable velocity of 1.5m/sec for a pipe with concrete transitions or other concrete inlet and outlet structures.
4. If there is a need for controlling the water surface elevation upstream from the road crossing, a check inlet or a control inlet is used. If one of these structures is required, it is usually economically desirable to also use a concrete outlet structure and size the pipe based on a maximum velocity of 1.5m/sec.

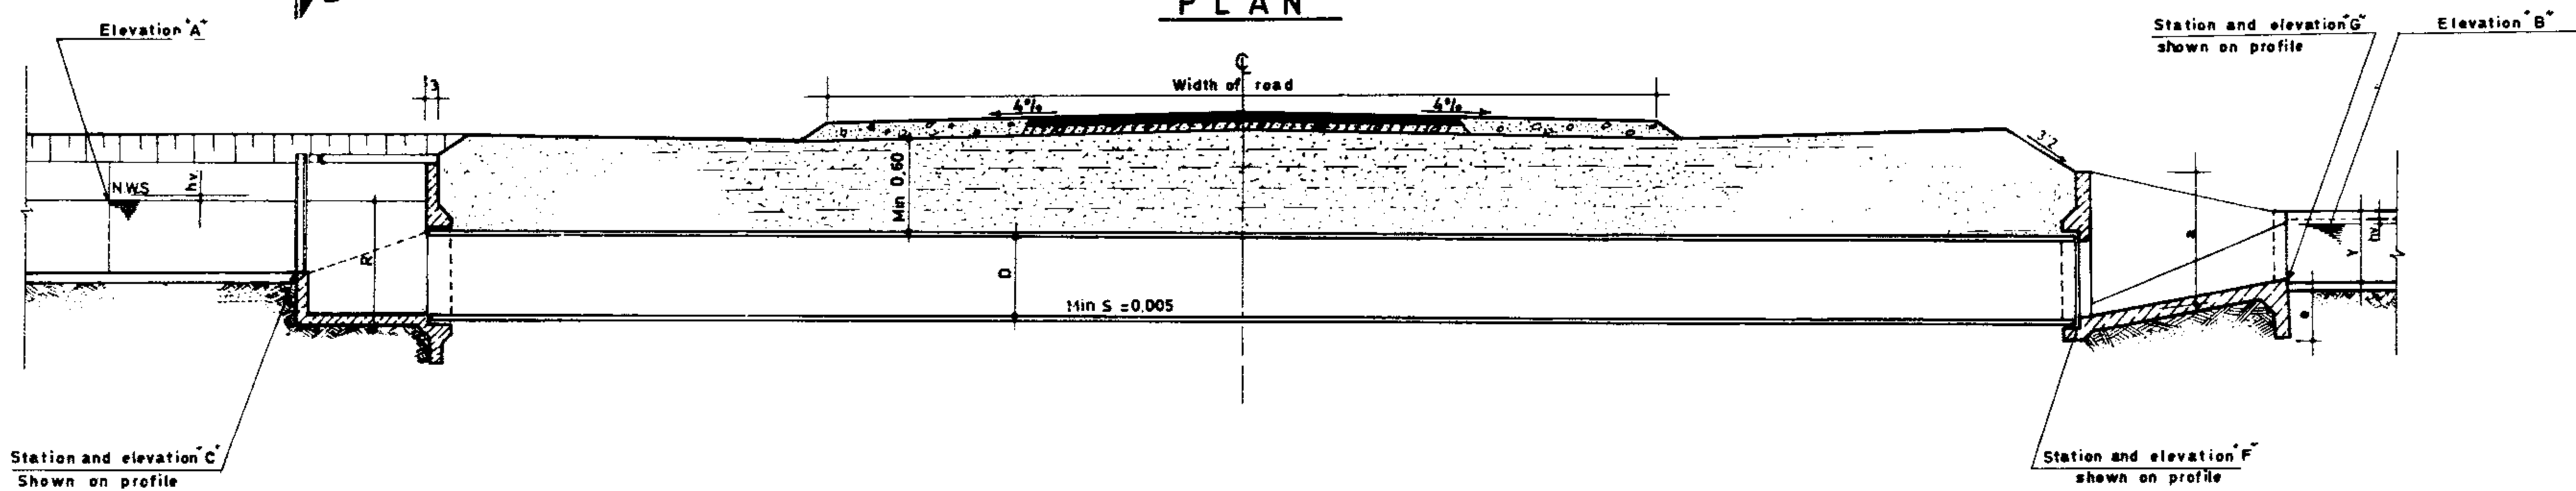


SECTION A.A

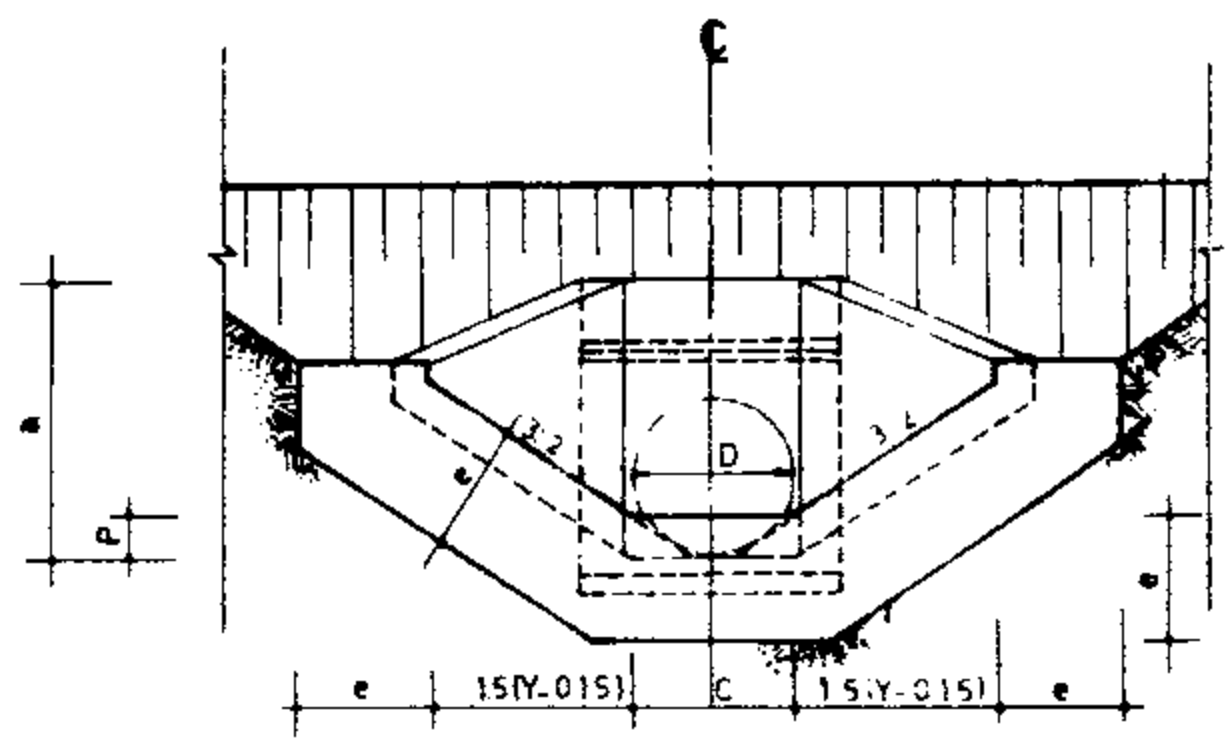


SECTION E-E

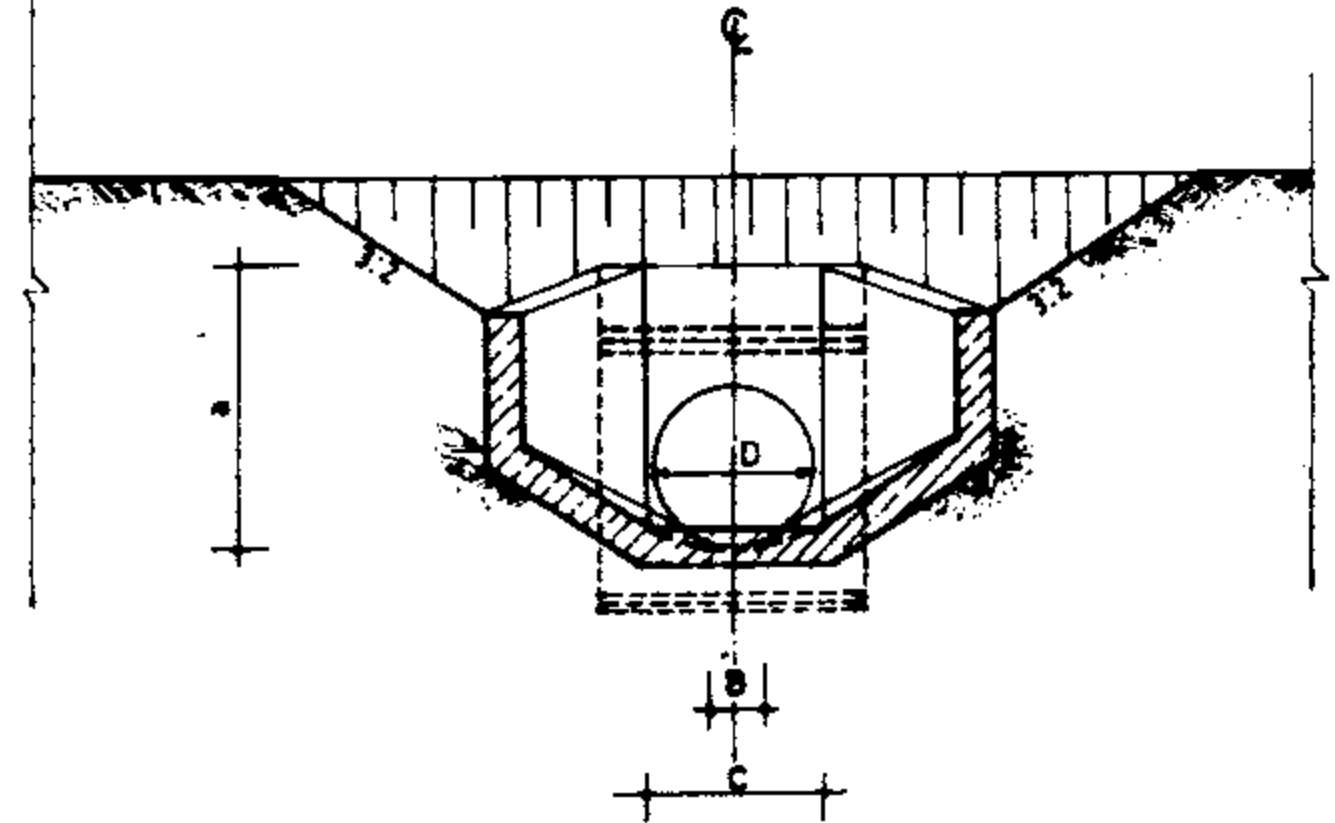

SECTION D-D

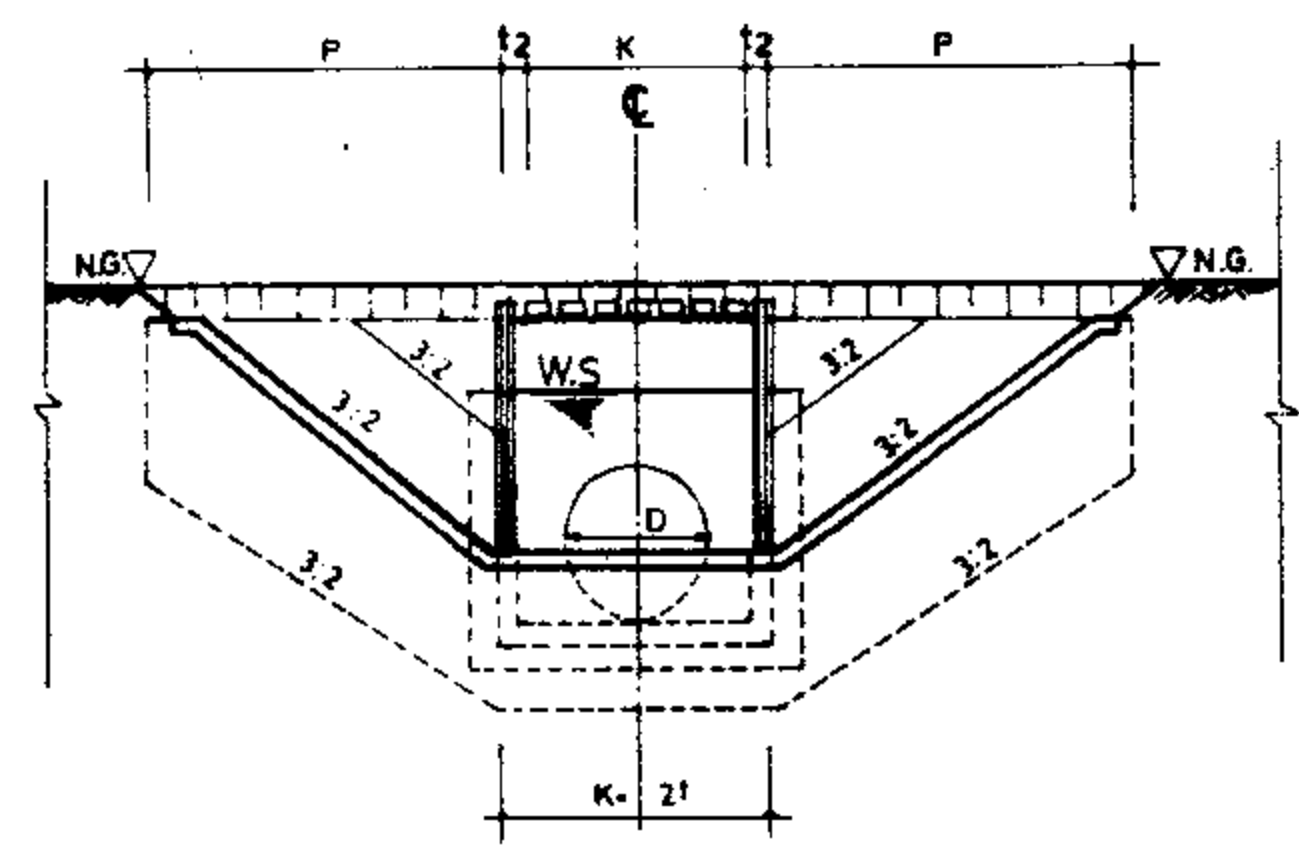

SECTION B-B

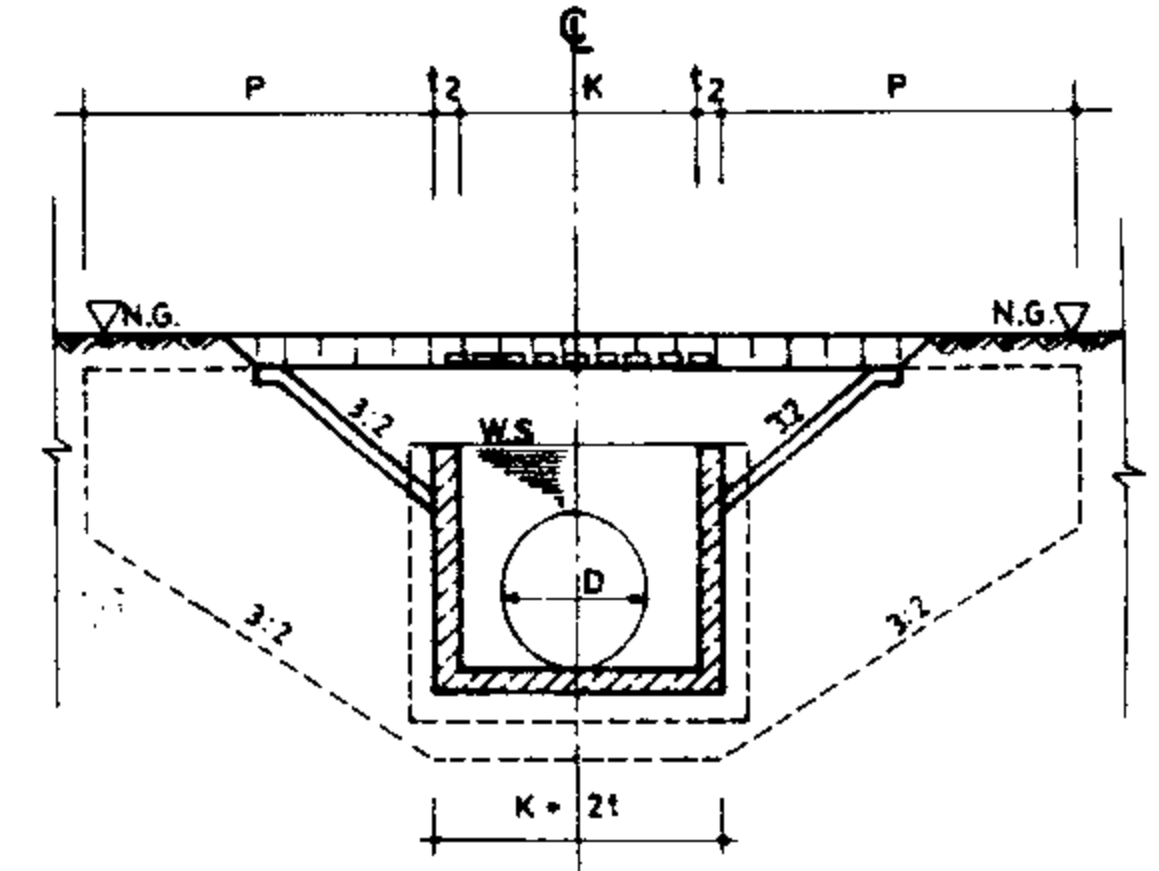


SECTION C-C

REFERENCE DWGS: For detail & dimension of check see dwg. No. 12/6/1/02
 For detail & dimension of transition see dwgs. No. 13/6/1/01 TO 13/10/1/01
 For hydraulic information of pipes and calculation of headlosses see dwg. No. 11/6/V01
 For detail of pipe connection to structures see dwgs. No. 17/1/1/01 TO 17/1/1/03


Scale: N.T.S.	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. No. 11/5/1/01	ROAD CROSSING - (TYPICAL POSITION) PLAN & SECTION
Approved:	Sheet No. 1 of 1 Rev. No.	

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDJET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

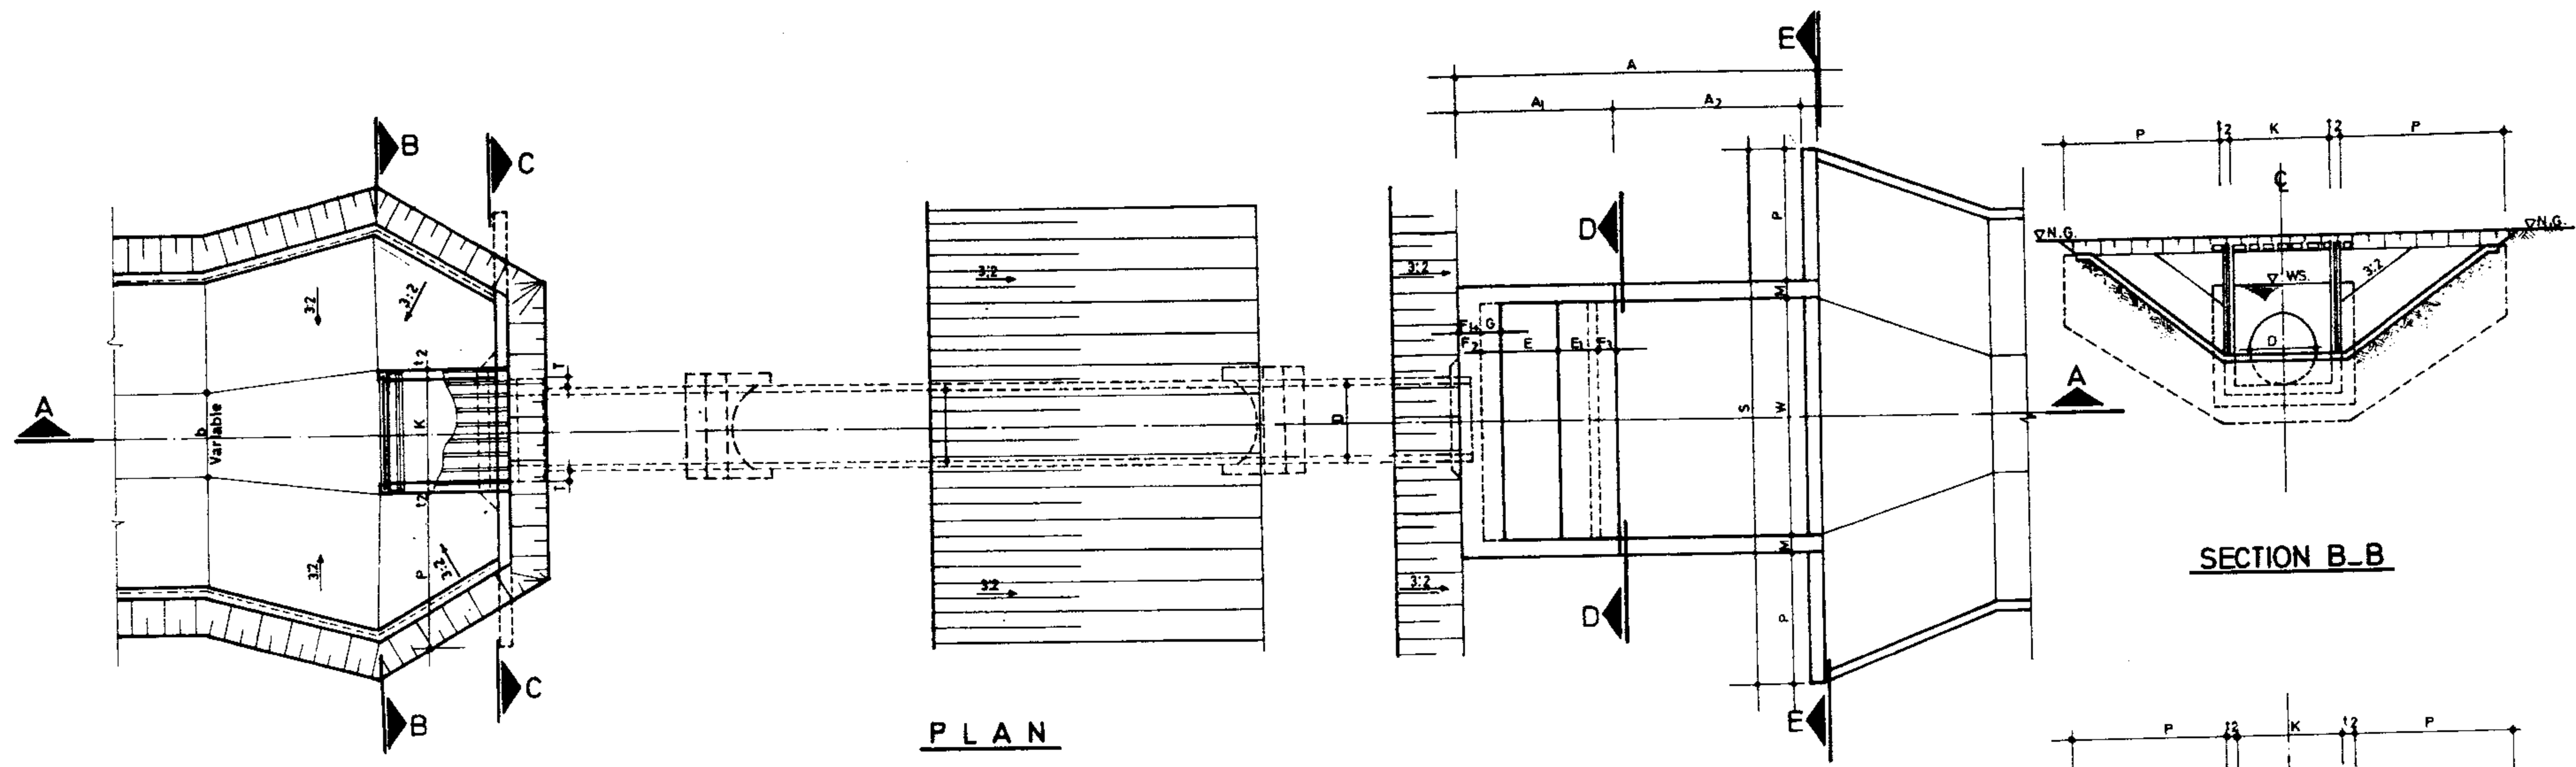


PLAN


SECTION B-B

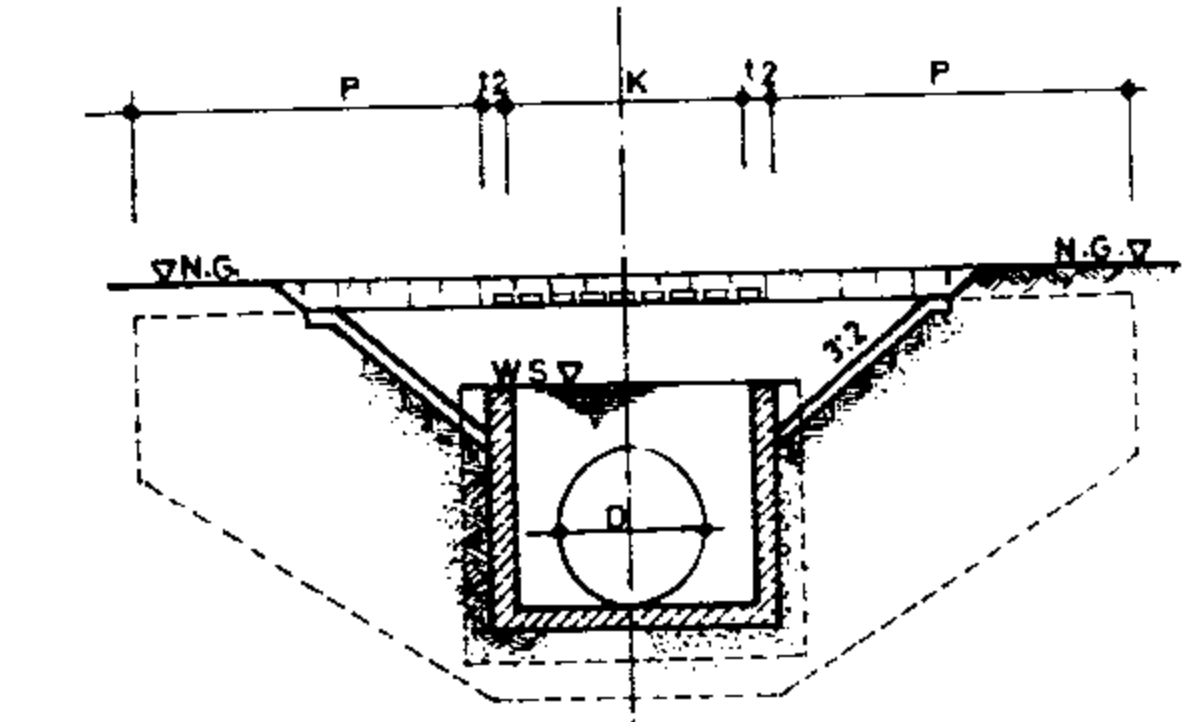

SECTION C-C

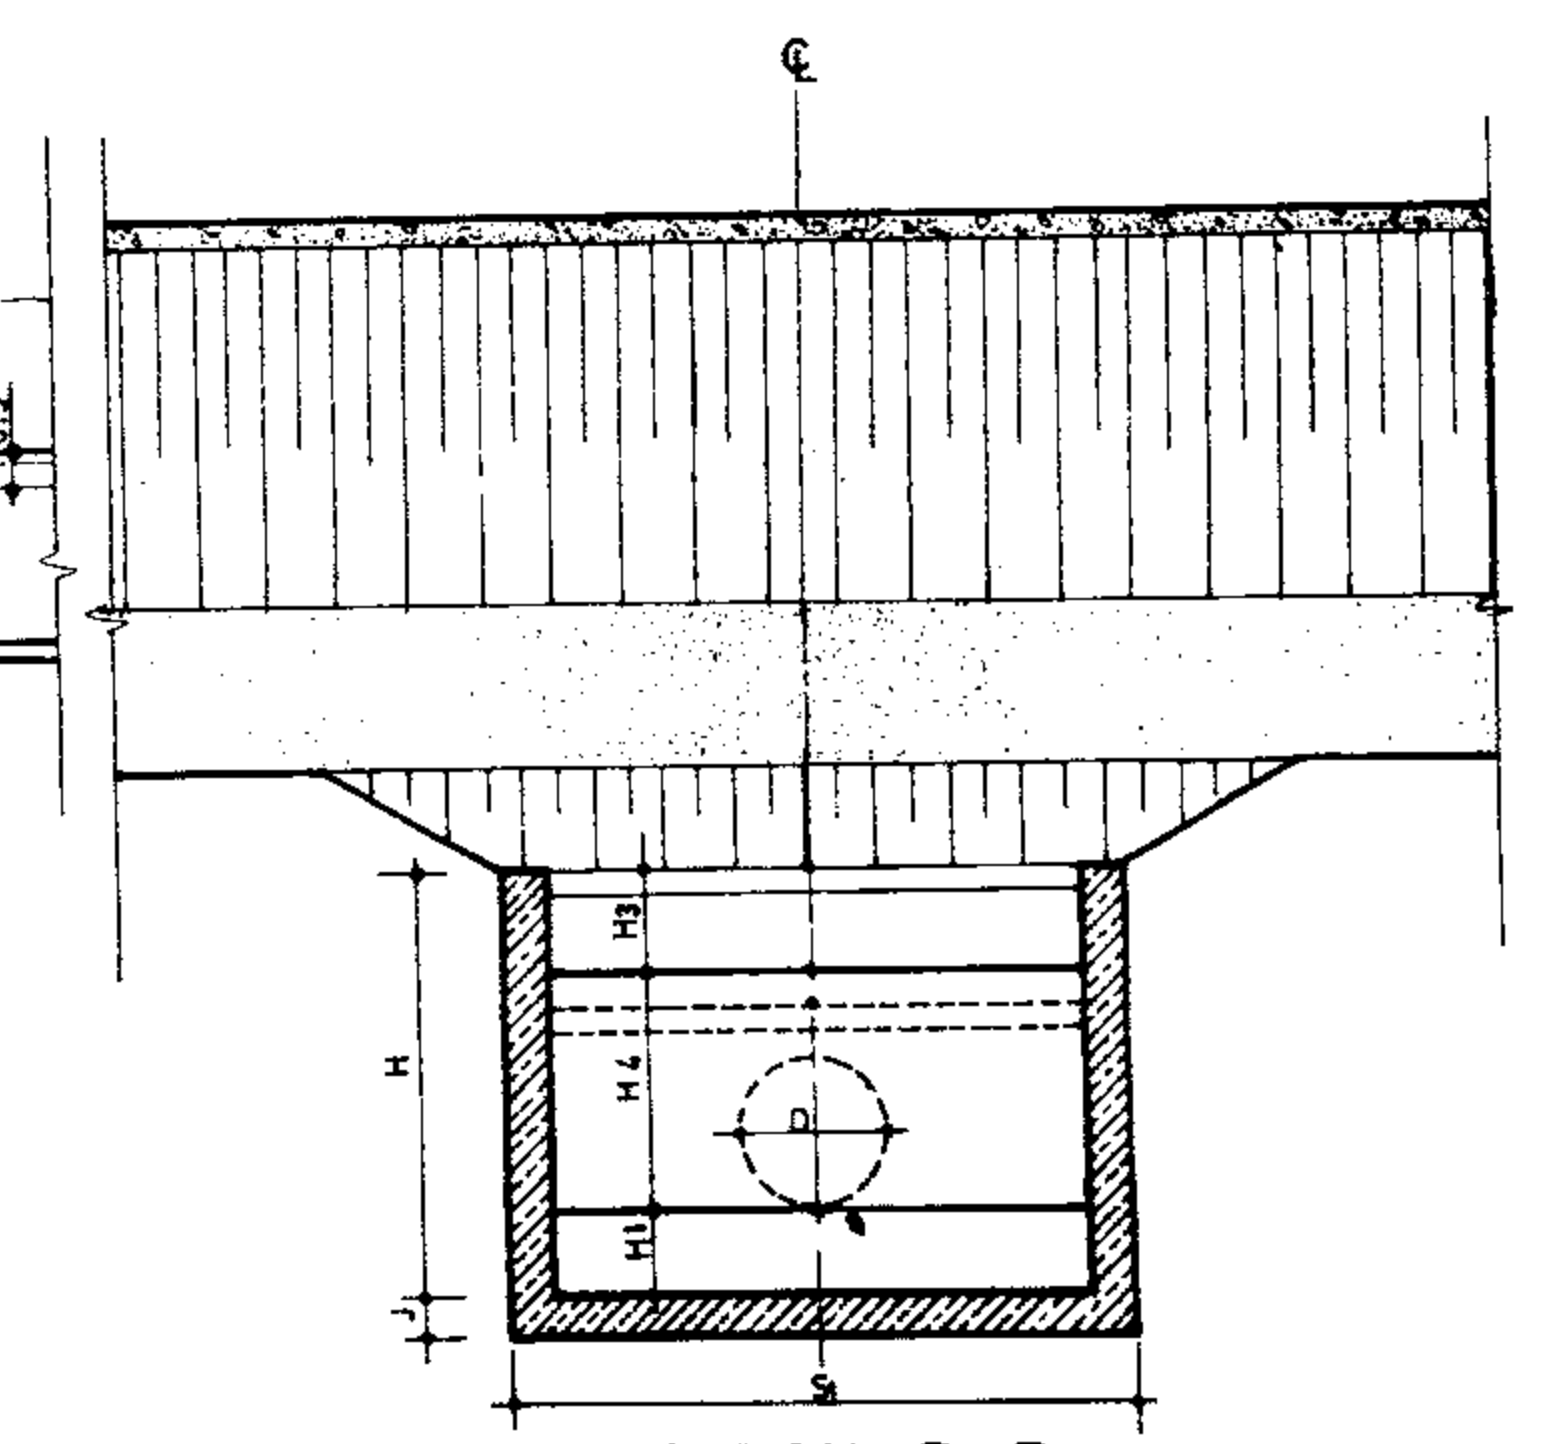

SECTION D-D

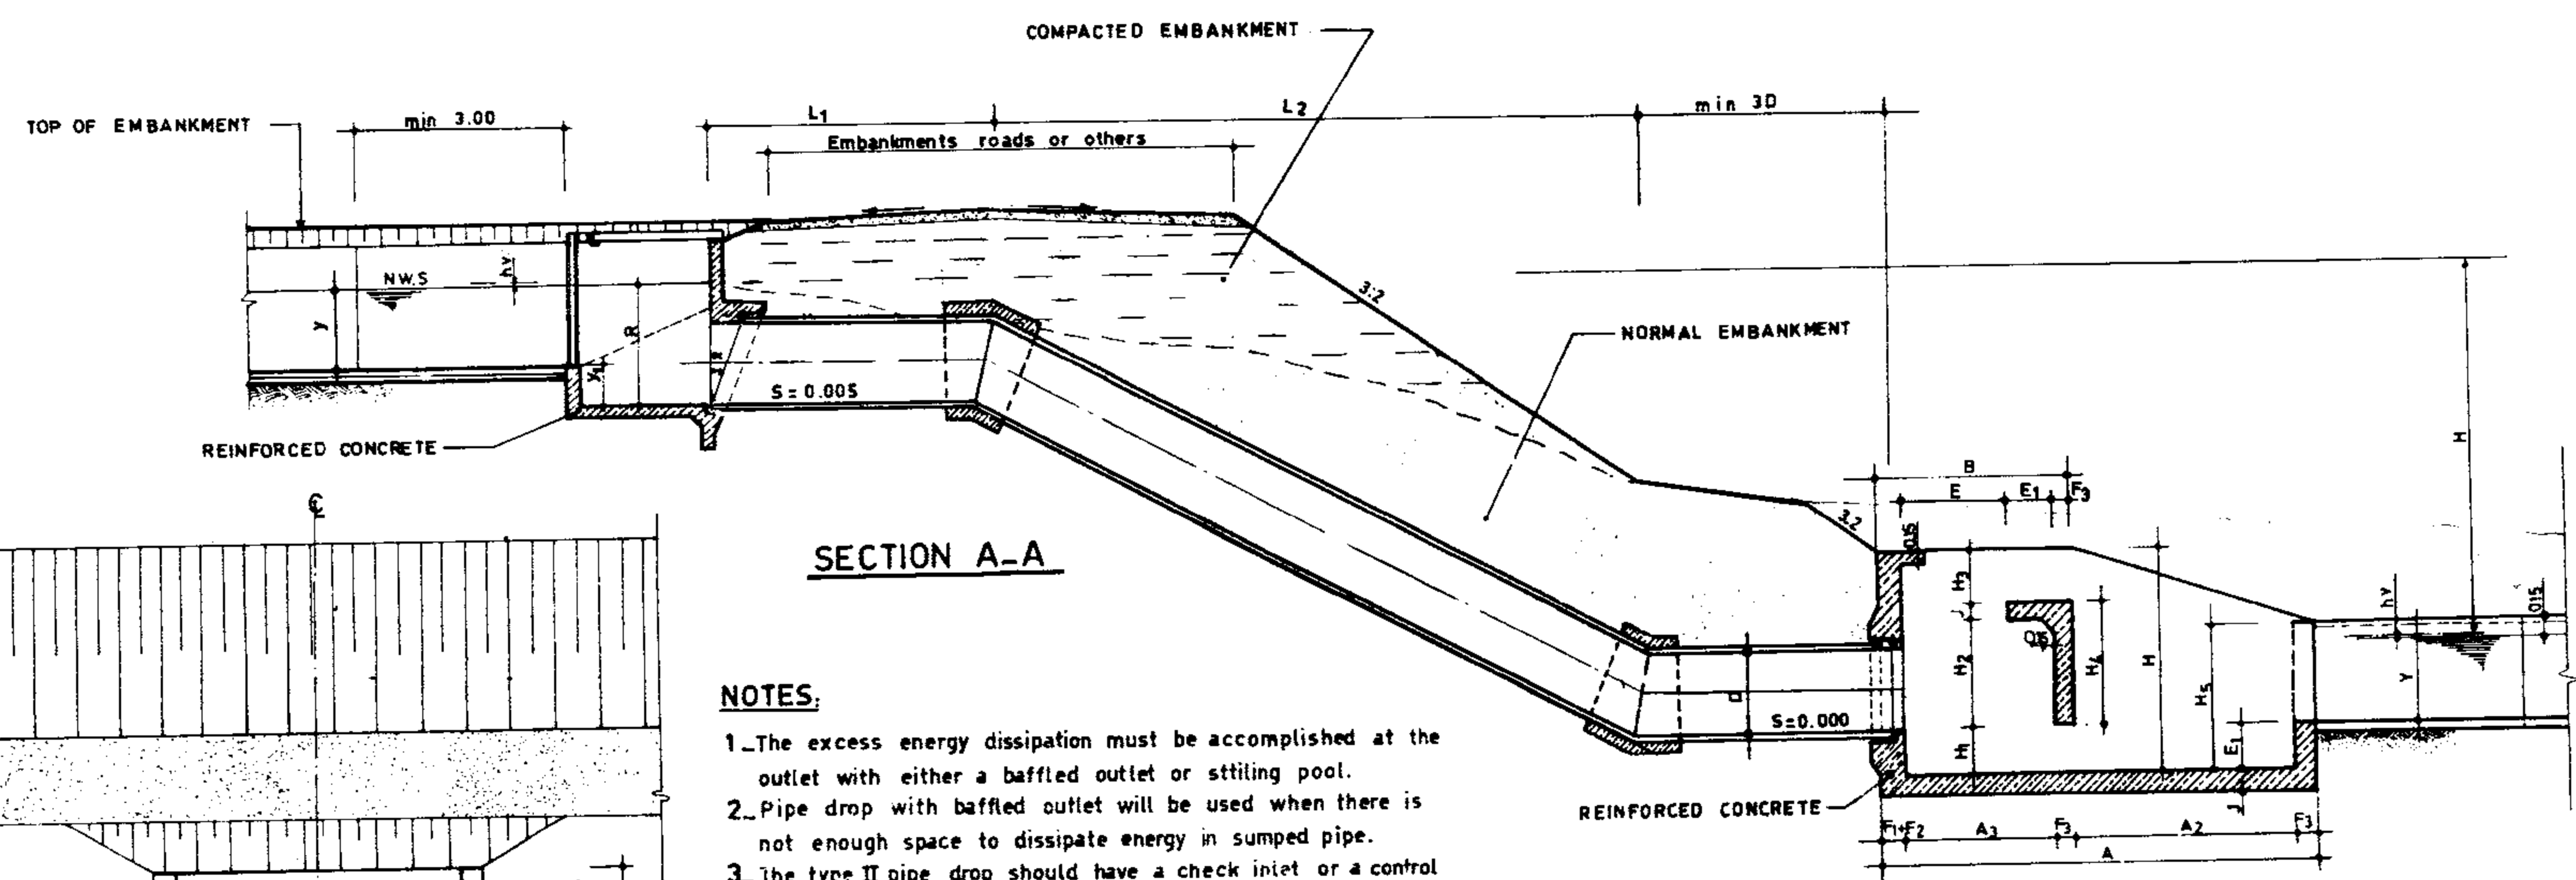


SECTION A-A

NOTES:

1. The excess energy dissipation must be accomplished at the outlet with either a baffled outlet or stilling pool.
2. Pipe drop with baffled outlet will be used when there is not enough space to dissipate energy in sumped pipe.
3. The type II pipe drop should have a check inlet or a control inlet if the drop is in an inline canal structure and have a reinforced concrete inlet transition (type 1, 2, 3 or 4) if it is a cross-drainage structure.
4. The maximum full pipe velocity is 3/5 m/sec.
5. L_1 and L_2 must be calculated on field conditions.







Q m ³ /sec		PIPE	
V _{max} = 3.50 m/s		D	A
FROM	TO	mm	m ²
0.337	0.440	400	0.1257
0.440	0.557	450	0.1590
0.557	0.687	500	0.1963
0.687	0.830	550	0.2387
0.830	0.990	600	0.2868
0.990	1.167	650	0.3407
1.167	1.359	700	0.3997
1.359	1.567	750	0.4640
1.567	1.790	800	0.5337
1.790	2.027	850	0.6082
2.027	2.279	900	0.6872
2.279	2.545	950	0.7707
2.545	2.825	1000	0.8587
2.825	3.119	1050	0.9512
3.119	3.427	1100	1.0482
3.427	3.749	1150	1.1497
3.749	4.085	1200	1.2557

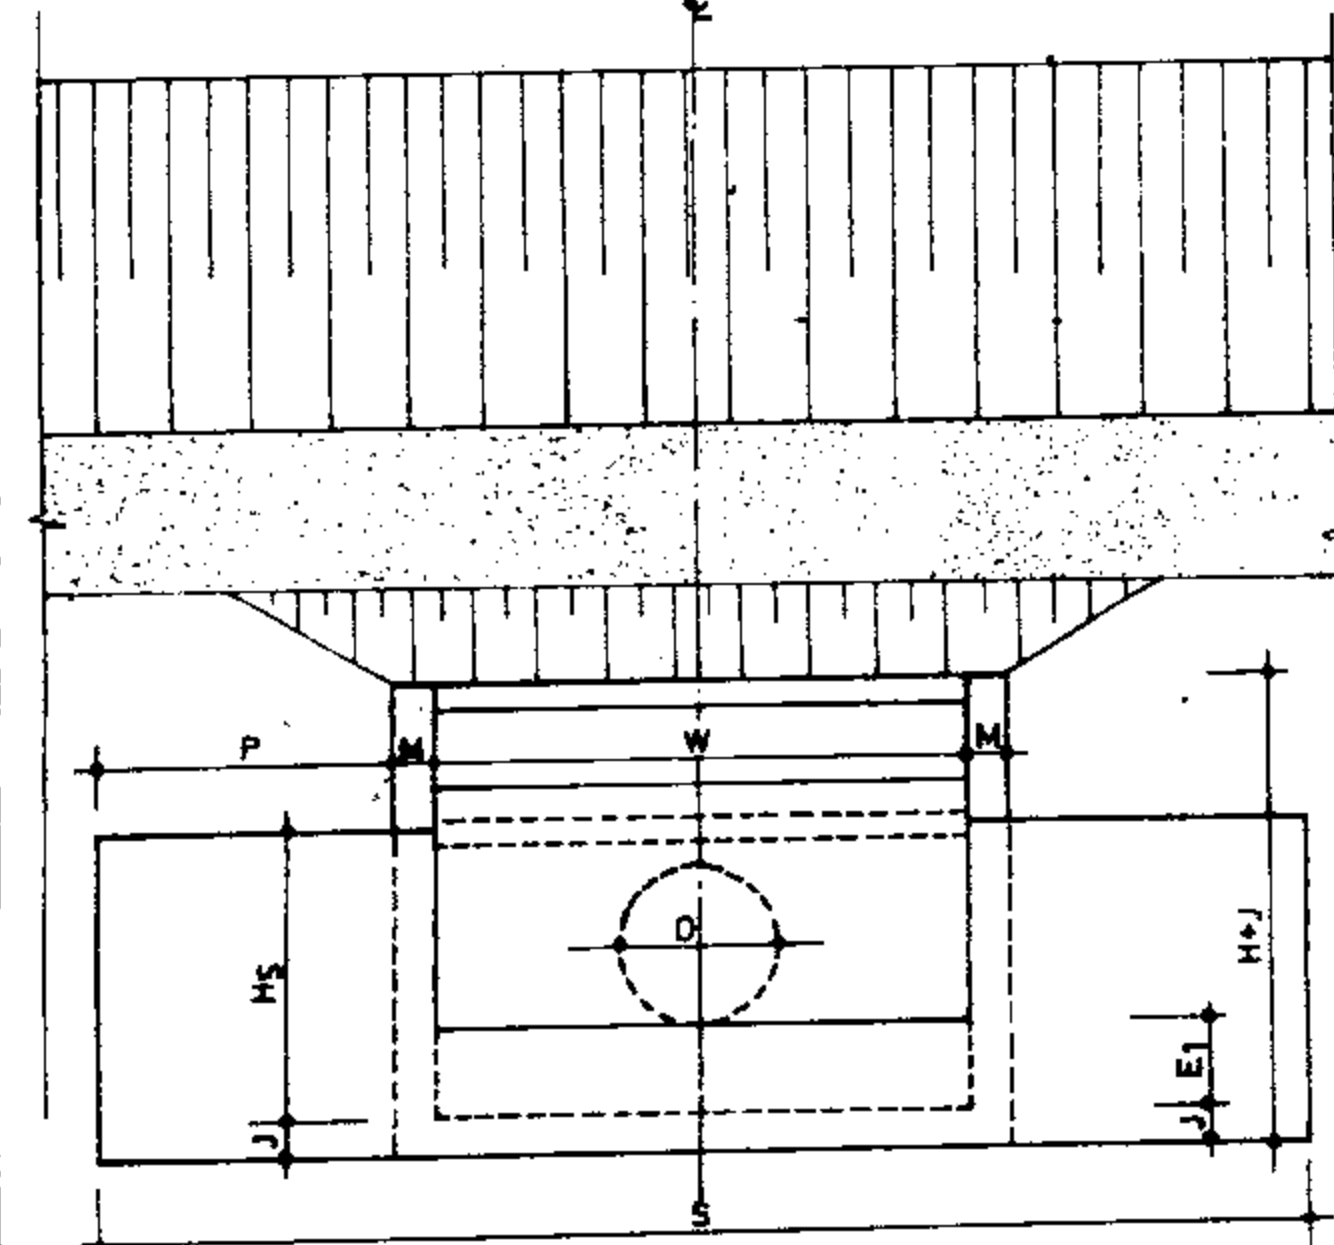

SECTION E-E

REFERENCE DWGS.
 1. FOR DIMENSIONS AND DETAIL OF INLET STRUCTURE SEE DWGS NO 13/6/1/01, 13/7/1/01, 13/8/1/01, 13/9/1/01, 12/6/1/02, 12/5/1/01
 2. FOR DIMENSIONS AND DETAIL OF BAFFLED OUTLET SEE DWG NO 16/1/1/01
 3. FOR DIMENSIONS AND DETAIL OF PIPE JUNCTION SEE DWG NO 17/1/1/01 TO 17/1/1/03

Scale: N.T.S	IRRIGATION & DRAINAGE STANDARDS		ISLAMIC REPUBLIC OF IRAN MINISTRY OF PLAN & BUDJE TECHNICAL RESEARCH AND STANDARD BUREAU
Date:	DWG. NO 11/4/1/01	PIPE DROP TYPE II WITH BAFFLED OUTLET	
Approved:	Sheet NO 1 of 1	Rev. NO	

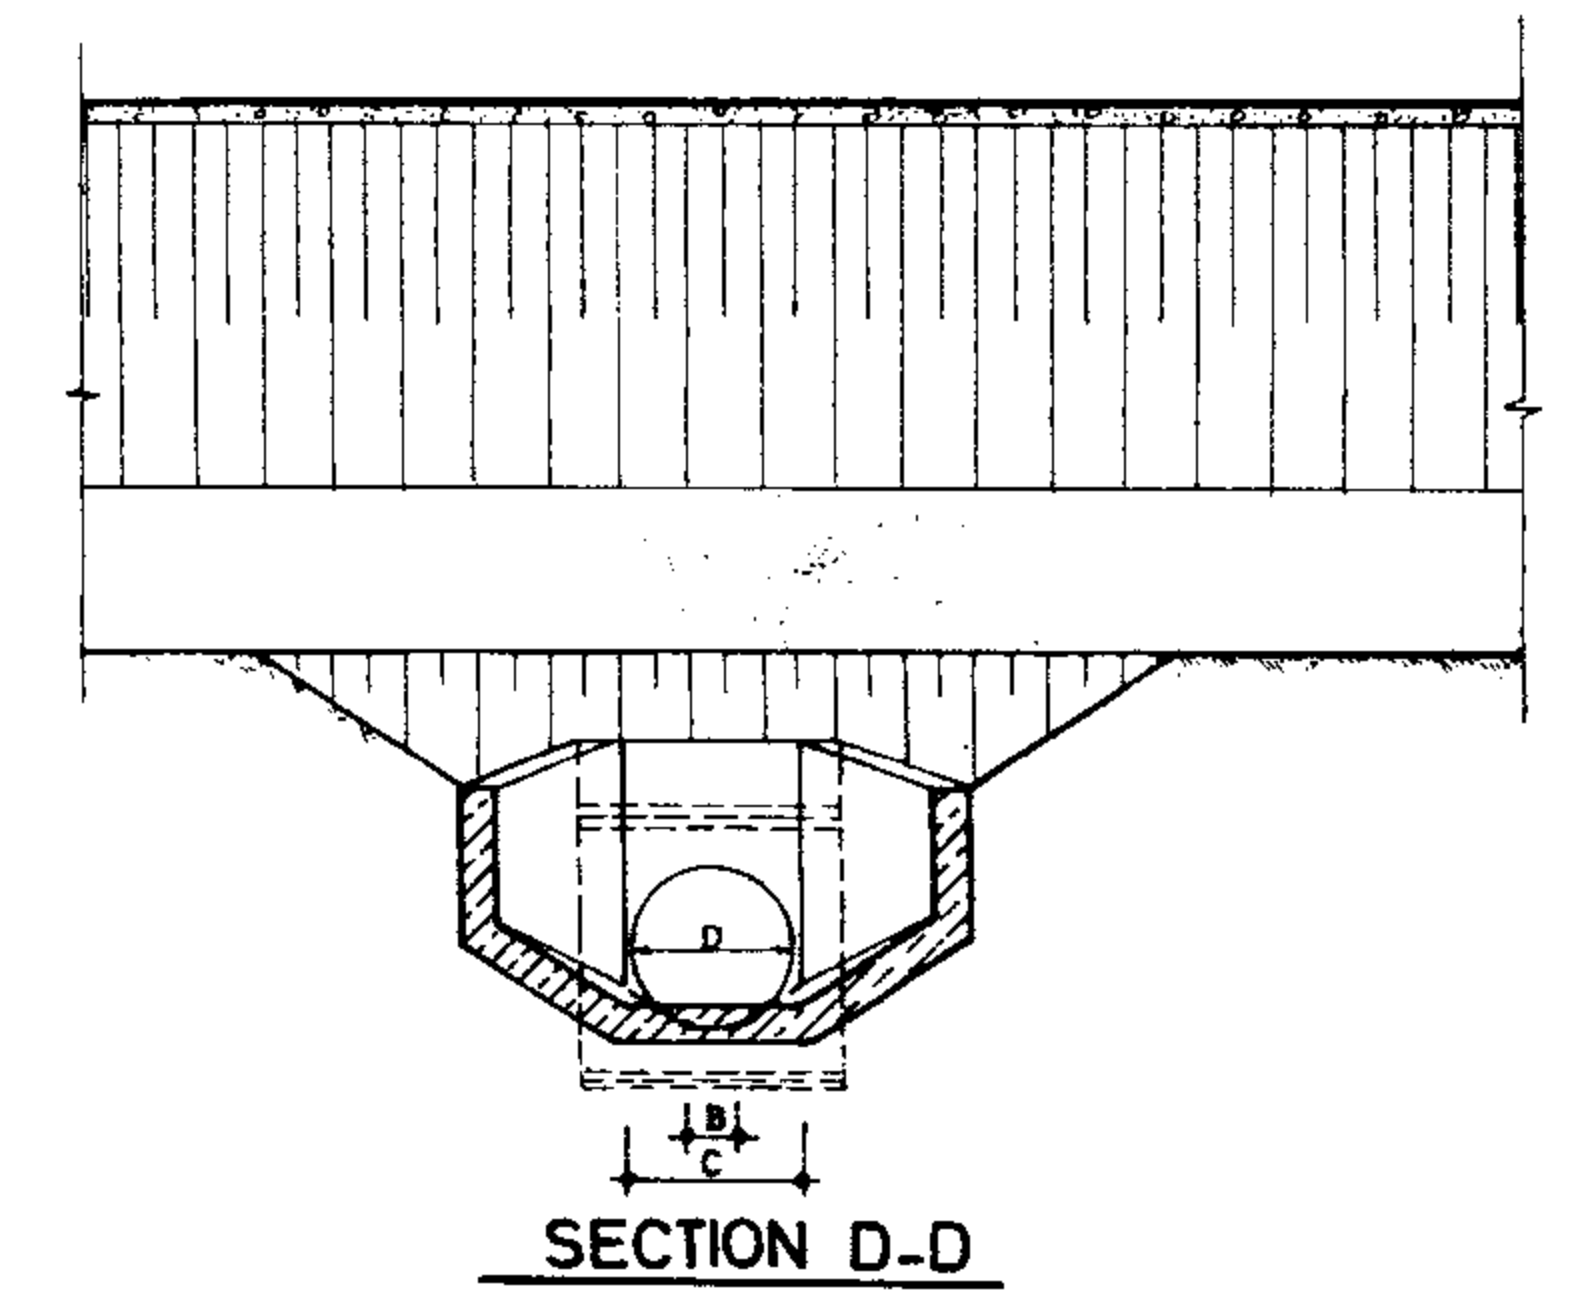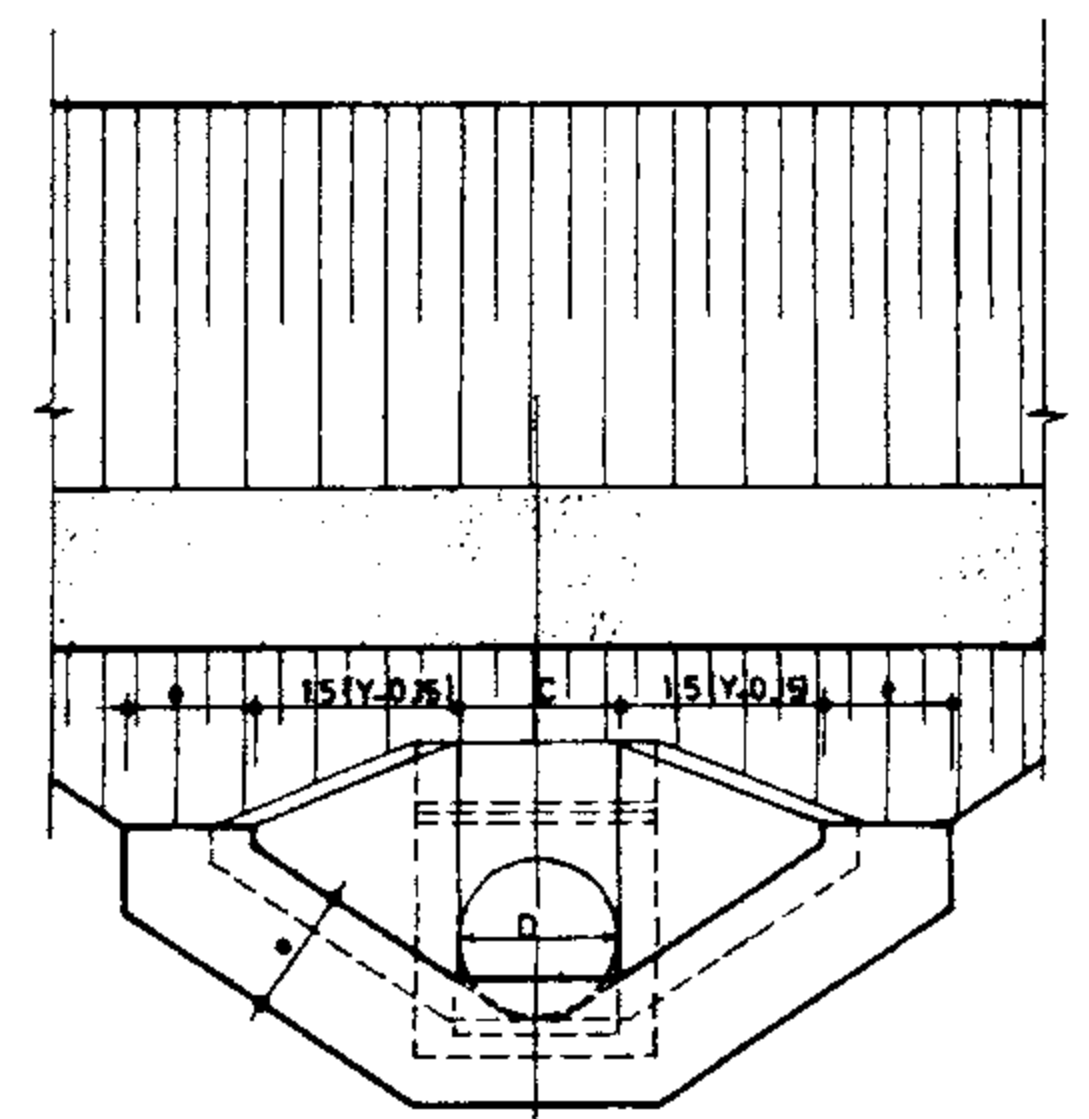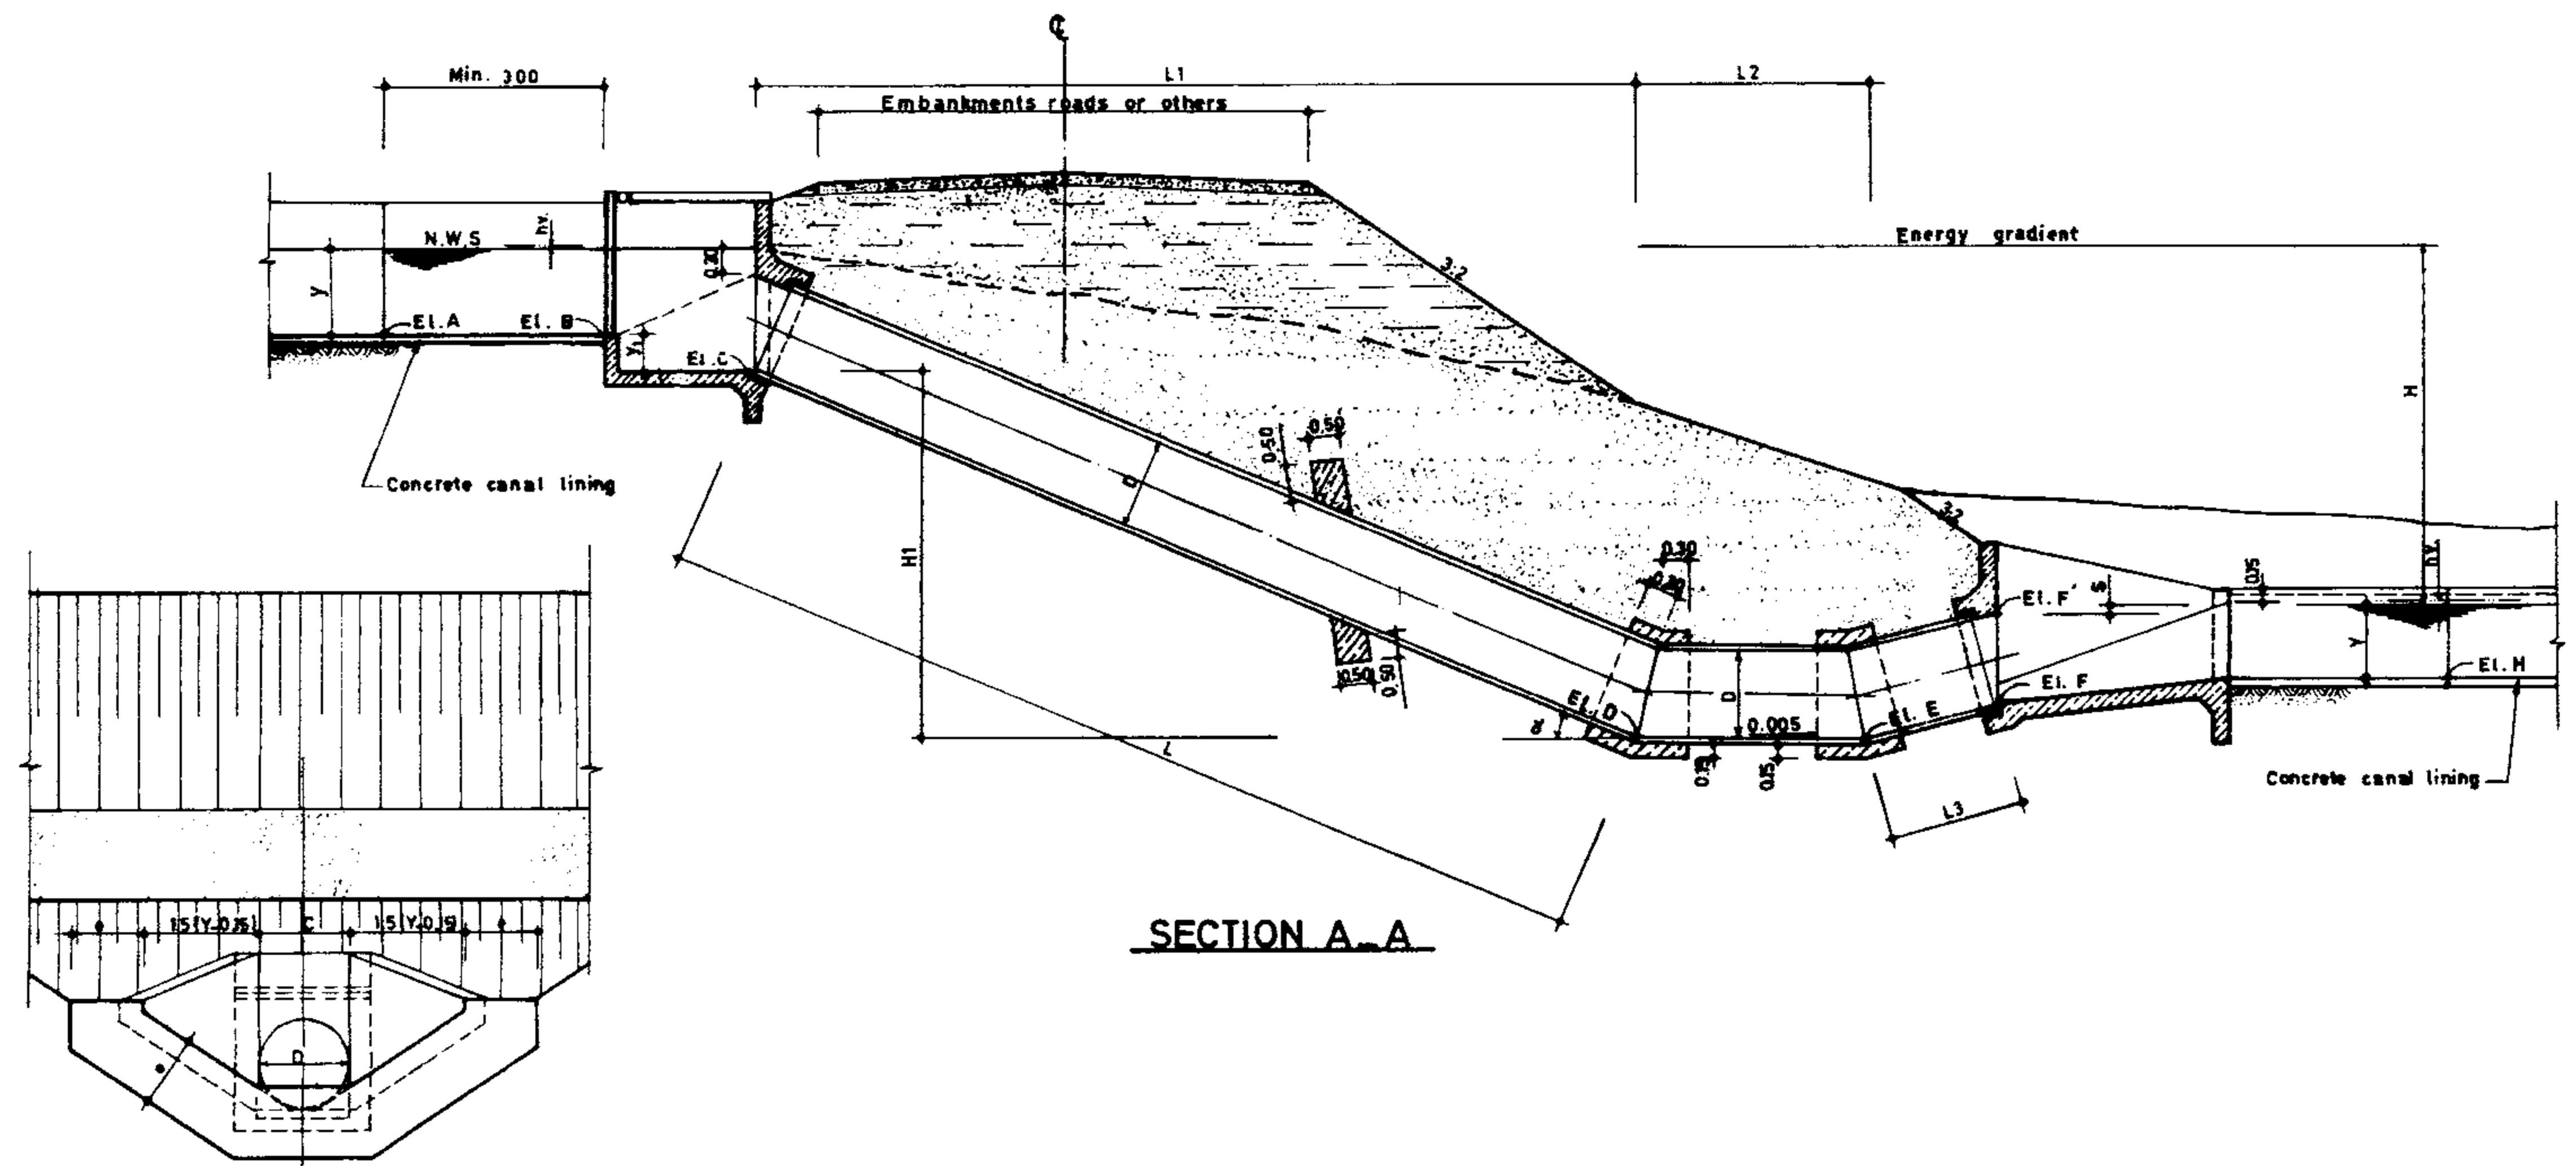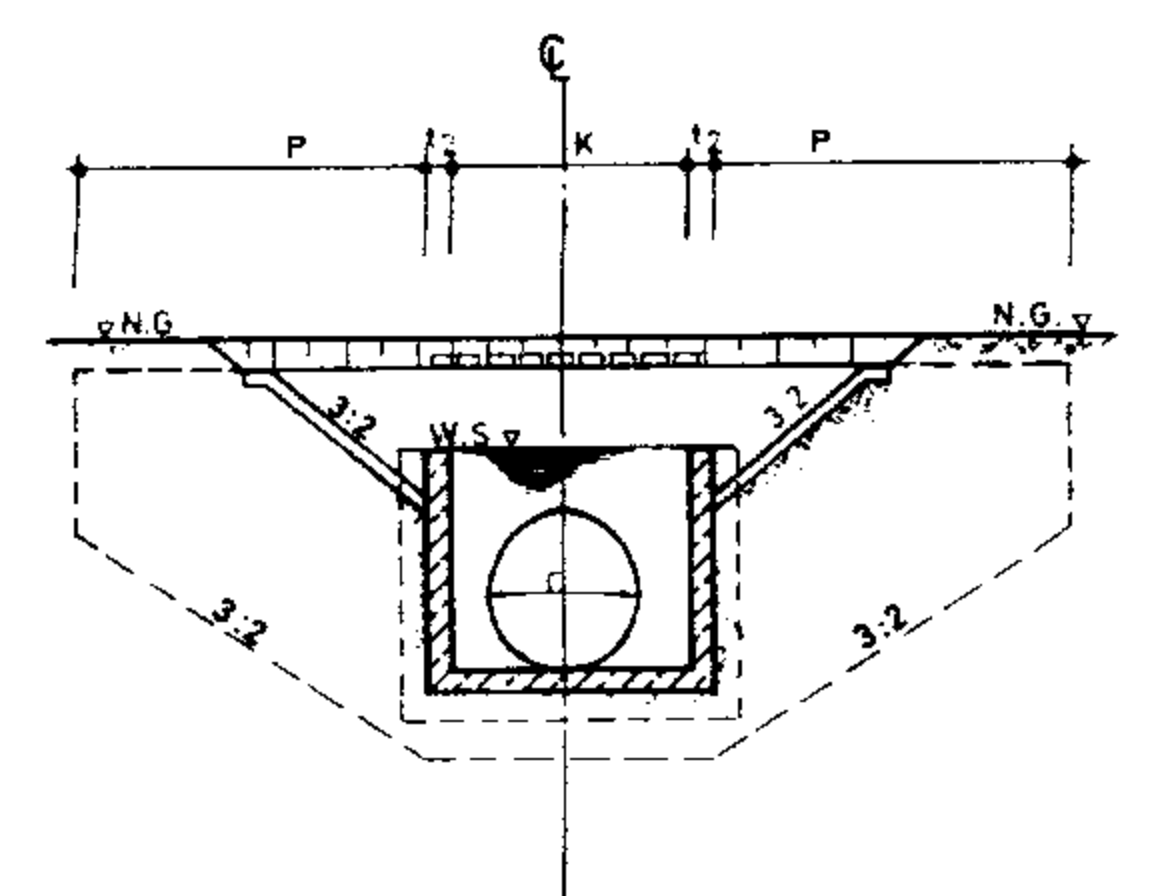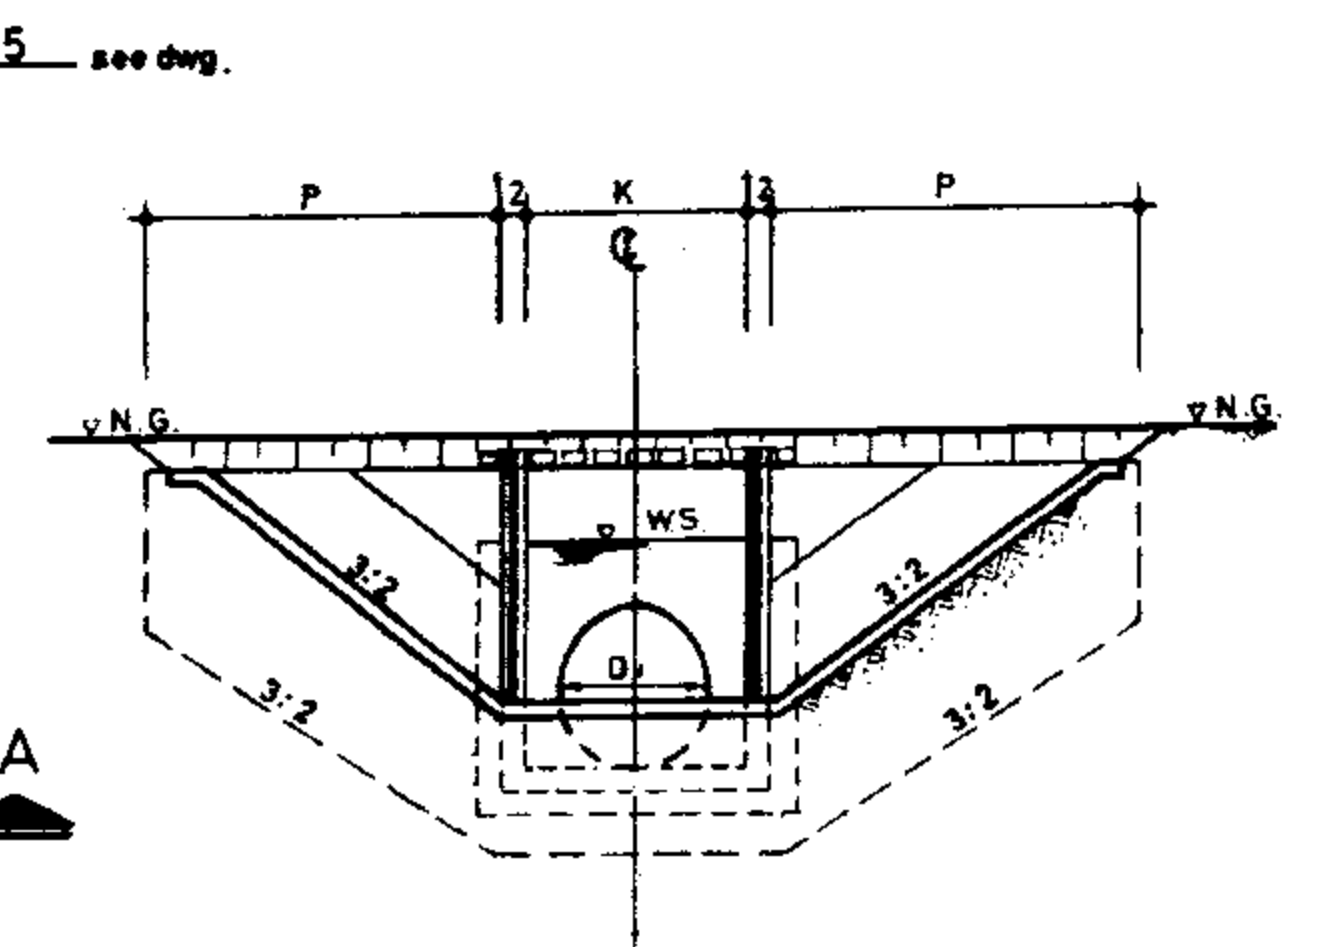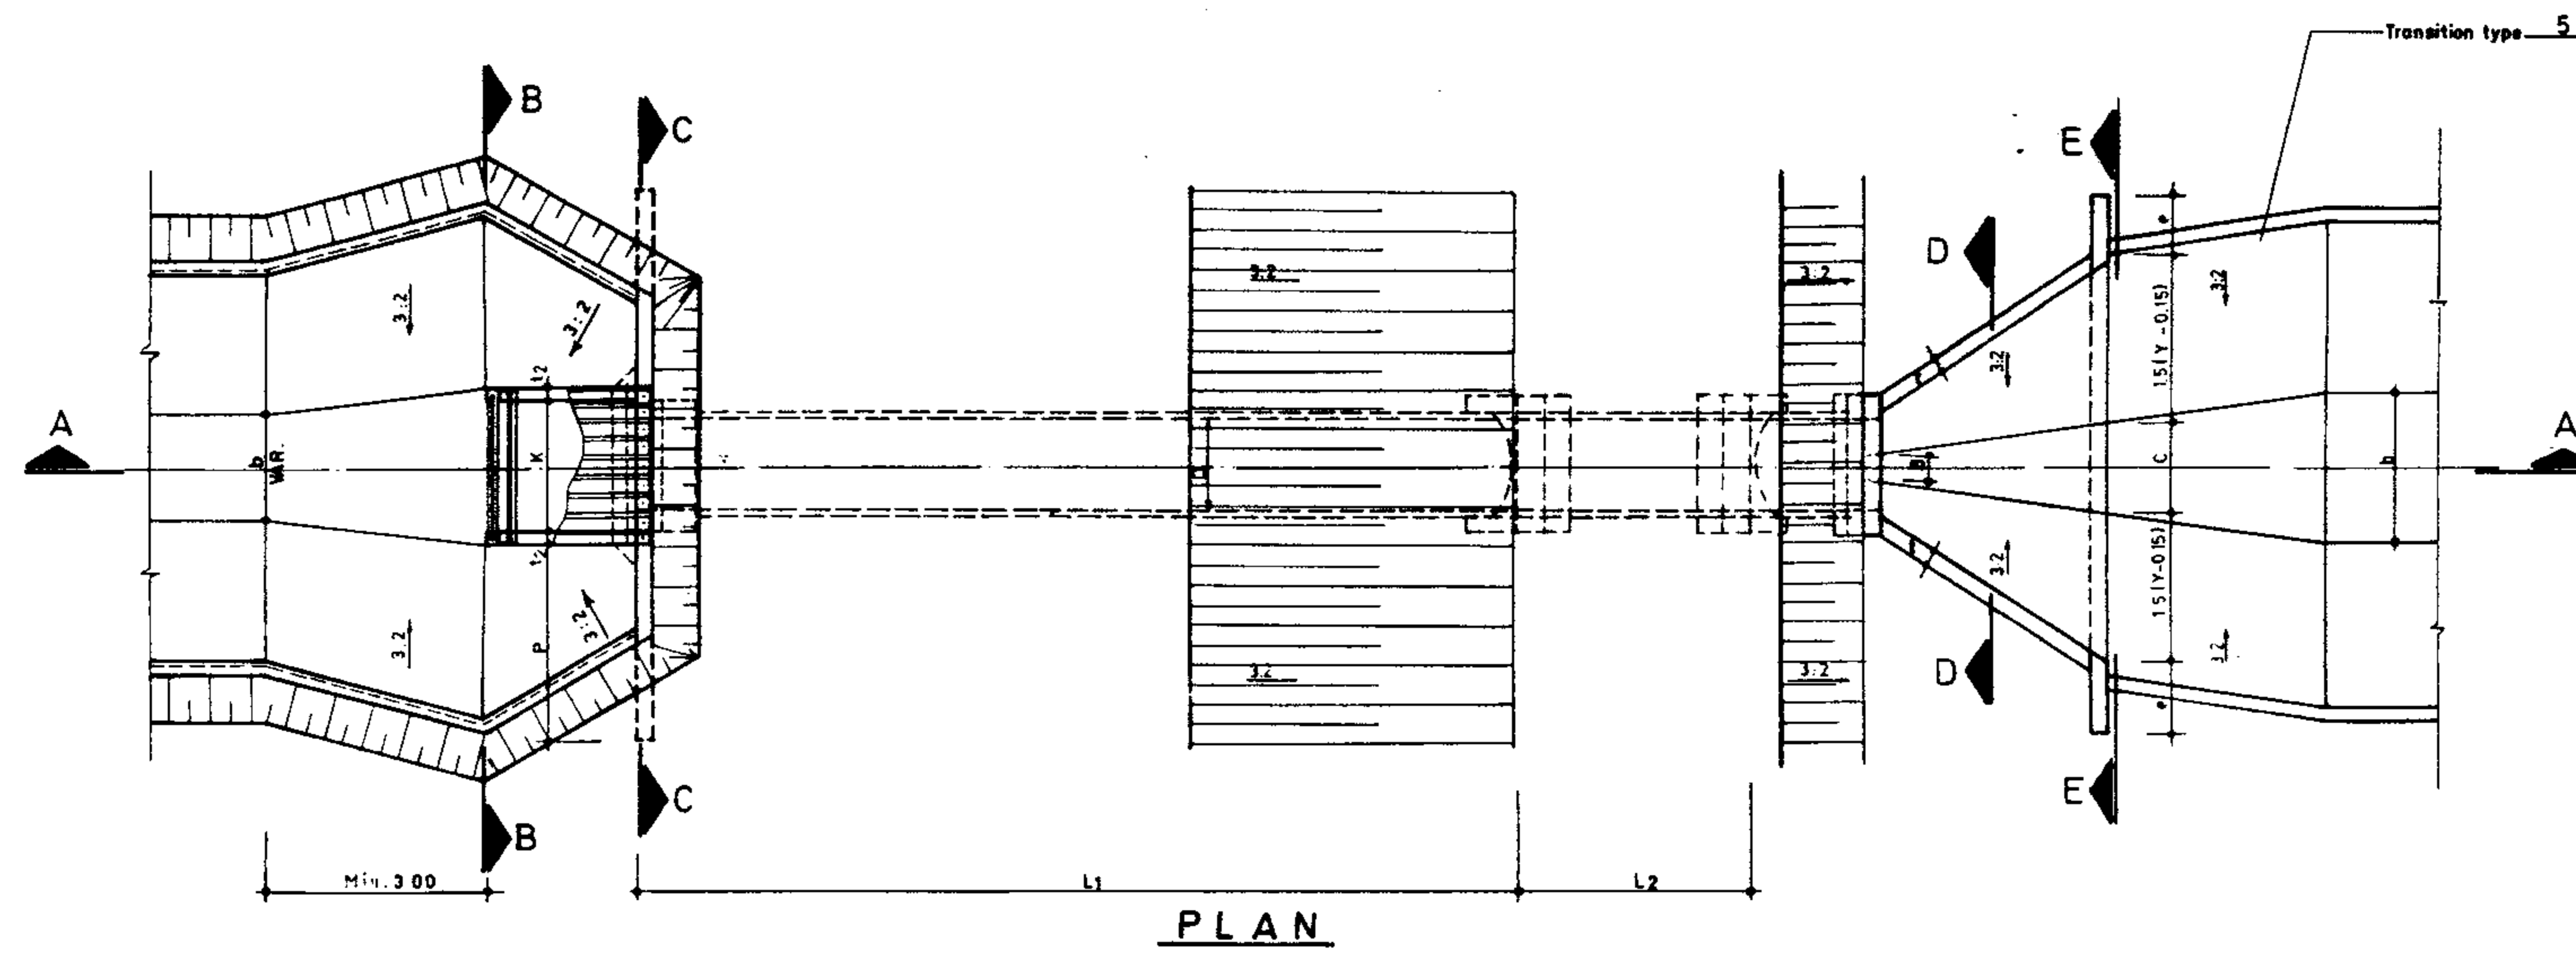

REFERENCE DWGS: For detail & dimension of inlet structure see dwg. No 12/6/1/02
 For outlet transition see dwg No 13/6/1/01
 For detail hydraulic information see pipe drop with earth outlet transition computer table see dwg. No 13/6/1/01
 For pipe construction dimensions see dwgs. No 11/3/2/01 TO 11/3/2/18

Scale: N.T.S.
 Date: DWG. No. 11/3/1/01
 Approved: Sheet No. 1 of 19 Rev. No.

IRRIGATION & DRAINAGE STANDARDS
 PIPE DROP TYPE I WITH
 CONCRETE OUTLET TRANSITION
 PLAN & SECTION

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

TABLE # P D C 13 (Q=0.300M³/S , D= 500 mm , R=0.90 m)

H (m)	0.53	0.59	0.66	0.73	0.80	0.87	0.94	1.01	1.08	1.15	1.22	1.29	1.37	1.44	1.51	1.59	1.66	1.74	1.81	1.89	1.96	2.04	2.12	2.19	2.27	2.35	2.42	2.50	2.58	2.66	2.73	2.81	2.89	2.97	3.05	3.13	3.21	3.29	3.37	3.45	3.53	3.61	3.69	3.77	3.85	3.93	4.01	4.09	4.17	4.25	4.33	4.41	4.49	4.58	4.66	4.74	
L (m)	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00	6.25	6.50	6.75	7.00	7.25	7.50	7.75	8.00	8.25	8.50	8.75	9.00	9.25	9.50	9.75	10.00	10.25	10.50	10.75	11.00	11.25	11.50	11.75	12.00	12.25	12.50	12.75	13.00	13.25	13.50	13.75	14.00	14.25	14.50	14.75	15.00	15.25	15.50	
L1 (m)	1.62	1.85	2.08	2.31	2.54	2.77	3.00	3.23	3.46	3.70	3.93	4.16	4.39	4.62	4.85	5.08	5.31	5.54	5.77	6.00	6.24	6.47	6.70	6.93	7.16	7.39	7.62	7.85	8.08	8.31	8.55	8.78	9.01	9.24	9.47	9.70	9.93	10.16	10.39	10.62	10.86	11.09	11.32	11.55	11.78	12.01	12.24	12.47	12.70	12.93	13.16	13.40	13.63	13.86	14.09	14.32	
L2 (m)	2.50	2.50	2.50	2.70	2.80	2.90	3.00	2.80	2.90	2.90	3.00	3.10	2.90	3.00	3.10	3.10	3.20	3.30	3.30	3.10	3.20	3.30	3.30	3.40	3.20	3.30	3.30	3.40	3.50	3.50	3.60	3.30	3.40	3.40	3.50	3.60	3.60	3.70	3.80	3.50	3.60	3.60	3.70	3.80	3.80	3.90	3.90	3.70	3.70	3.80	3.80	3.90	3.90	4.00	4.00	3.80	
L3 (m)	1.50	1.50	1.50	1.20	1.20	1.20	1.20	1.50	1.50	1.50	1.50	1.50	1.80	1.80	1.80	1.80	1.80	1.80	2.10	2.10	2.10	2.10	2.10	2.10	2.40	2.40	2.40	2.40	2.40	2.40	2.40	2.70	2.70	2.70	2.70	2.70	2.70	2.70	2.70	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.30	3.30	3.30	3.30	3.30	3.30	3.30	3.30	3.30	3.60
H1 (m)	0.67	0.76	0.86	0.96	1.05	1.15	1.24	1.34	1.43	1.53	1.63	1.72	1.82	1.91	2.01	2.10	2.20	2.30	2.39	2.49	2.58	2.68	2.77	2.87	2.97	3.06	3.16	3.25	3.35	3.44	3.54	3.63	3.73	3.83	3.92	4.02	4.11	4.21	4.30	4.40	4.50	4.59	4.69	4.78	4.88	4.97	5.07	5.17	5.26	5.36	5.45	5.55	5.64	5.74	5.84	5.93	
S (m)	0.15	0.18	0.21	0.14	0.17	0.20	0.23	0.13	0.15	0.17	0.20	0.22	0.12	0.14	0.17	0.19	0.21	0.23	0.12	0.14	0.17	0.19	0.20	0.22	0.12	0.14	0.16	0.17	0.19	0.21	0.23	0.12	0.14	0.15	0.17	0.19	0.20	0.22	0.24	0.13	0.14	0.16	0.18	0.19	0.21	0.22	0.24	0.13	0.14	0.16	0.17	0.19	0.20	0.22	0.23	0.13	
δ (DEG)	15.00	15.00	15.00	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50

TABLE # P D C 14 (Q=0.300M³/S , D= 600 mm , R=1.00 m)

H (m)	0.76	0.84	0.91	0.99	1.07	1.14	1.22	1.30	1.38	1.46	1.54	1.62	1.72	1.78	1.86	1.94	2.02	2.10	2.18	2.27	2.35	2.43	2.51	2.60	2.68	2.76	2.84	2.93	3.01	3.10	3.18	3.26	3.35	3.43	3.51	3.60	3.68	3.77	3.85	3.94	4.02	4.11	4.19	4.28	4.36	4.45	4.53	4.62	4.70	4.79	4.87	4.96	5.05	5.13	5.22	5.30				
L (m)	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00	6.25	6.50	6.75	7.00	7.25	7.50	7.75	8.00	8.25	8.50	8.75	9.00	9.25	9.50	9.75	10.00	10.25	10.50	10.75	11.00	11.25	11.50	11.75	12.00	12.25	12.50	12.75	13.00	13.25	13.50	13.75	14.00	14.25	14.50	14.75	15.00	15.25	15.50				
L1 (m)	1.62	1.85	2.08	2.31	2.54	2.77	3.00	3.23	3.46	3.70	3.93	4.16	4.39	4.62	4.85	5.08	5.31	5.54	5.77	6.00	6.24	6.47	6.70	6.93	7.16	7.39	7.62	7.85	8.08	8.31	8.55	8.78	9.01	9.24	9.47	9.70	9.93	10.16	10.39	10.62	10.86	11.09	11.32	11.55	11.78	12.01	12.24	12.47	12.70	12.93	13.16	13.40	13.63	13.86	14.09	14.32				
L2 (m)	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.20	3.20	3.30	3.30	3.40	3.40	3.50	3.50	3.60	3.30	3.40	3.40	3.50	3.50	3.50	3.60	3.60	3.70	3.70	3.70	3.70	3.70	3.50	3.50	3.60	3.60	3.60	3.60	3.70	3.70	3.80	3.80	3.80	3.90	3.90	3.60	3.70	3.70	3.80	3.80	3.80	3.80	3.80
L3 (m)	0.90	1.20	1.20	0.90	0.90	0.90	0.90	0.90	1.20	1.20	1.20	1.20	1.20	1.50	1.50	1.50	1.50	1.50	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.80	1.80	1.80	1.80	1.80	1.80	1.80	1.80	1.80	1.80	1.80	2.10	2.10	2.10	2.10	2.10	2.10	2.10					
H1 (m)	0.67	0.76	0.86	0.96	1.05	1.15	1.24	1.34	1.43	1.53	1.63	1.72	1.82	1.91	2.01	2.10	2.20	2.30	2.39	2.49	2.58	2.68	2.77	2.87	2.97	3.06	3.16	3.25	3.35	3.44	3.54	3.63	3.73	3.83	3.92	4.02	4.11	4.21	4.30	4.40	4.50	4.59	4.69	4.78	4.88	4.97	5.07	5.17	5.26	5.36	5.45	5.55	5.64	5.74	5.84	5.93				
S (m)	0.21	0.19	0.21	0.14	0.16	0.18	0.20	0.21	0.15	0.16	0.18	0.20	0.21	0.15	0.16	0.18	0.19	0.21	0.13	0.14	0.15	0.17	0.18	0.19	0.21	0.22	0.23	0.12	0.13	0.14	0.16	0.17	0.18	0.19	0.20	0.22	0.23	0.24	0.12	0.13	0.15	0.16	0.17	0.18	0.19	0.20	0.21	0.22	0.23	0.24	0.13	0.14	0.15	0.16	0.17	0.18				
δ (DEG)	7.50	7.50	7.50	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	

TABLE # P D C 15 (Q=0.325M³/S , D= 600 mm , R=1.00 m)

H (m)	0.72	0.79	0.87	0.94	1.02	1.09	1.17	1.25	1.32	1.40	1.48	1.56	1.64	1.72	1.80	1.88	1.96	2.04	2.12	2.20	2.28	2.36	2.44	2.52	2.60	2.69	2.77	2.85	2.93	3.02	3.10	3.18	3.26	3.35	3.43	3.51	3.60	3.68	3.76	3.85	3.93	4.02	4.10	4.18	4.27	4.35	4.44	4.52	4.61	4.69	4.78	4.86	4.95	5.03	5.12	5.20			
L (m)	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00	6.25	6.50	6.75	7.00	7.25	7.50	7.75	8.00	8.25	8.50	8.75	9.00	9.25	9.50	9.75	10.00	10.25	10.50	10.75	11.00	11.25	11.50	11.75	12.00	12.25	12.50	12.75	13.00	13.25	13.50	13.75	14.00	14.25	14.50	14.75	15.00	15.25	15.50			
L1 (m)	1.62	1.85	2.08	2.31	2.54	2.77	3.00	3.23	3.46	3.70	3.93	4.16	4.39	4.62	4.85	5.08	5.31	5.54	5.77	6.00	6.24	6.47	6.70	6.93	7.16	7.39	7.62	7.85	8.08	8.31	8.55	8.78	9.01	9.24	9.47	9.70	9.93	10.16	10.39	10.62	10.86	11.09	11.32	11.55	11.78	12.01	12.24	12.47	12.70	12.93	13.16	13.40	13.63	13.86	14.09	14.32			
L2 (m)	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.20	3.20	3.30	3.30	3.40	3.50	3.50	3.60	3.30	3.40	3.40	3.50	3.50	3.60	3.60	3.70	3.70	3.50	3.50	3.60	3.60	3.60	3.70	3.70	3.70	3.80	3.80	3.90	3.60	3.60	3.70	3.70	3.80	3.80	3.90	3.90	3.90	3.90	3.90	4.00	4.00	3.70	3.80	3.80	3.90
L3 (m)	1.20	0.90	0.90	0.90	0.90	1.20	1.20	1.20	1.20	1.50	1.50	1.50	1.50	1.50	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.80	1.80	1.80	1.80	1.80	1.80	1.80	1.80	1.80	2.10	2.10	2.10	2.10	2.10	2.10	2.10	2.10	2.10	2.10	2.10	2.40	2.40	2.40	2.40	2.40				
H1 (m)	0.67	0.76	0.86	0.96	1.05	1.15	1.24	1.34	1.43	1.53	1.63	1.72	1.82	1.91	2.01	2.10	2.20	2.30	2.39	2.49	2.58	2.68	2.77	2.87	2.97	3.06	3.16	3.25	3.35	3.44	3.54	3.63	3.73	3.83	3.92	4.02	4.11	4.21	4.30	4.40	4.50	4.59	4.69	4.78	4.88	4.97	5.07	5.17	5.26	5.36	5.45	5.55	5.64	5.74	5.84	5.93			
S (m)	0.21	0.15	0.17	0.19	0.21	0.15	0.17	0.19	0.20	0.14	0.16	0.18	0.19	0.21	0.13	0.15	0.16	0.18	0.19	0.21	0.22	0.24	0.13	0.14	0.16	0.17	0.18	0.20	0.21	0.23	0.24	0.13	0.14	0.15	0.																								

TABLE # PDC 21 (Q=0.425 M³/S , D= 700 mm , R=1.10 m)

H (m)	0.76	0.84	0.92	0.99	1.07	1.15	1.22	1.30	1.38	1.46	1.54	1.62	1.70	1.78	1.86	1.94	2.02	2.10	2.18	2.26	2.35	2.43	2.51	2.59	2.67	2.76	2.84	2.92	3.01	3.09	3.17	3.26	3.34	3.42	3.51	3.59	3.67	3.76	3.84	3.93	4.01	4.10	4.18	4.27	4.35	4.44	4.52	4.61	4.69	4.78	4.86	4.95	5.03	5.12	5.20	5.29
L (m)	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00	6.25	6.50	6.75	7.00	7.25	7.50	7.75	8.00	8.25	8.50	8.75	9.00	9.25	9.50	9.75	10.00	10.25	10.50	10.75	11.00	11.25	11.50	11.75	12.00	12.25	12.50	12.75	13.00	13.25	13.50	13.75	14.00	14.25	14.50	14.75	15.00	15.25	15.50
L1 (m)	1.62	1.85	2.08	2.31	2.54	2.77	3.00	3.23	3.46	3.70	3.93	4.16	4.39	4.62	4.85	5.08	5.31	5.54	5.77	6.00	6.24	6.47	6.70	6.93	7.16	7.39	7.62	7.85	8.08	8.31	8.55	8.78	9.01	9.24	9.47	9.70	9.93	10.16	10.39	10.62	10.86	11.09	11.32	11.55	11.78	12.01	12.24	12.47	12.70	12.93	13.16	13.40	13.63	13.86	14.09	14.32
L2 (m)	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.70	3.70	3.80	3.80	3.90	3.90	3.70	3.80	3.80	3.90	3.90	4.00	4.00	4.00	4.10	3.80	3.90	3.90	4.00	4.00	4.00	4.10	4.10	4.10	4.20	4.20	4.00	4.00	4.00	4.10	4.10	4.20	4.20	4.20
L3 (m)	0.90	1.20	1.20	0.90	0.90	0.90	0.90	0.90	1.20	1.20	1.20	1.20	1.20	1.50	1.50	1.50	1.50	1.50	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.80	1.80	1.80	1.80	1.80	1.80	1.80	1.80	1.80	2.10	2.10	2.10	2.10	2.10	2.10	2.10	2.10	
H1 (m)	0.67	0.76	0.86	0.96	1.05	1.15	1.24	1.34	1.43	1.53	1.63	1.72	1.82	1.91	2.01	2.10	2.20	2.30	2.39	2.49	2.58	2.68	2.77	2.87	2.97	3.06	3.16	3.25	3.35	3.44	3.54	3.63	3.73	3.83	3.92	4.02	4.11	4.21	4.30	4.40	4.50	4.59	4.69	4.78	4.88	4.97	5.07	5.17	5.26	5.36	5.45	5.55	5.64	5.74	5.84	5.93
S (m)	0.20	0.18	0.20	0.14	0.16	0.18	0.19	0.21	0.15	0.17	0.18	0.20	0.21	0.15	0.16	0.18	0.19	0.21	0.13	0.14	0.16	0.17	0.18	0.20	0.21	0.23	0.24	0.13	0.14	0.15	0.16	0.18	0.19	0.20	0.21	0.23	0.24	0.12	0.14	0.15	0.16	0.17	0.18	0.19	0.20	0.21	0.22	0.24	0.12	0.13	0.14	0.15	0.16	0.17	0.18	0.19
δ (DEG)	7.50	7.50	7.50	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50

TABLE # PDC 22 (Q=0.450 M³/S , D= 700 mm , R=1.10 m)

H (m)	0.73	0.81	0.88	0.96	1.03	1.11	1.19	1.26	1.34	1.42	1.50	1.57	1.65	1.73	1.81	1.89	1.97	2.05	2.13	2.21	2.29	2.38	2.46	2.54	2.62	2.70	2.78	2.87	2.95	3.03	3.11	3.20	3.28	3.36	3.44	3.53	3.61	3.69	3.78	3.86	3.95	4.03	4.11	4.20	4.28	4.37	4.45	4.53	4.62	4.70	4.79	4.87	4.96	5.04	5.13	5.21
L (m)	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00	6.25	6.50	6.75	7.00	7.25	7.50	7.75	8.00	8.25	8.50	8.75	9.00	9.25	9.50	9.75	10.00	10.25	10.50	10.75	11.00	11.25	11.50	11.75	12.00	12.25	12.50	12.75	13.00	13.25	13.50	13.75	14.00	14.25	14.50	14.75	15.00	15.25	15.50
L1 (m)	1.62	1.85	2.08	2.31	2.54	2.77	3.00	3.23	3.46	3.70	3.93	4.16	4.39	4.62	4.85	5.08	5.31	5.54	5.77	6.00	6.24	6.47	6.70	6.93	7.16	7.39	7.62	7.85	8.08	8.31	8.55	8.78	9.01	9.24	9.47	9.70	9.93	10.16	10.39	10.62	10.86	11.09	11.32	11.55	11.78	12.01	12.24	12.47	12.70	12.93	13.16	13.40	13.63	13.86	14.09	14.32
L2 (m)	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.70	3.80	3.80	3.90	3.90	3.70	3.70	3.80	3.80	3.90	3.90	4.00	4.00	4.10	3.80	3.90	3.90	4.00	4.00	4.10	4.10	4.20	4.20	4.00	4.00	4.10	4.10	4.20	4.20	4.20	4.30	4.30	4.40	4.10	4.10	4.20	4.20	4.20
L3 (m)	1.20	1.50	0.90	0.90	0.90	0.90	1.20	1.20	1.20	1.20	1.50	1.50	1.50	1.50	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.80	1.80	1.80	1.80	1.80	1.80	1.80	1.80	1.80	1.80	2.10	2.10	2.10	2.10	2.10	2.10	2.10	2.10	2.10	2.40	2.40	2.40			
H1 (m)	0.67	0.76	0.86	0.96	1.05	1.15	1.24	1.34	1.43	1.53	1.63	1.72	1.82	1.91	2.01	2.10	2.20	2.30	2.39	2.49	2.58	2.68	2.77	2.87	2.97	3.06	3.16	3.25	3.35	3.44	3.54	3.63	3.73	3.83	3.92	4.02	4.11	4.21	4.30	4.40	4.50	4.59	4.69	4.78	4.88	4.97	5.07	5.17	5.26	5.36	5.45	5.55	5.64	5.74	5.84	5.93
S (m)	0.20	0.18	0.15	0.18	0.19	0.21	0.15	0.17	0.19	0.21	0.14	0.16	0.18	0.19	0.21	0.13	0.15	0.16	0.18	0.19	0.21	0.22	0.24	0.13	0.14	0.16	0.17	0.18	0.20	0.21	0.22	0.24	0.13	0.14	0.15	0.16	0.18	0.19	0.20	0.21	0.23	0.24	0.12	0.14	0.15	0.16	0.17	0.18	0.19	0.20	0.22	0.23	0.24	0.12	0.13	0.14
δ (DEG)	7.50	7.50	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50	22.50

TABLE # PDC 23 (Q=0.475 M³/S , D= 700 mm , R=1.10 m)

H (m)	0.70	0.77	0.85	0.92	1.00	1.07	1.15	1.22	1.30	1.38	1.45	1.53	1.61	1.69	1.77	1.85	1.92	2.00	2.08	2.16	2.24	2.32	2.40	2.48	2.57	2.65	2.73	2.81	2.89	2.97	3.05	3.14	3.22	3.30	3.38	3.46	3.55	3.63	3.71	3.80	3.88	3.96	4.05	4.13	4.21	4.30	4.38	4.46	4.55	4.63	4.72	4.80	4.88	4.97	5.05	5.14	
L (m)	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00	6.25	6.50	6.75	7.00	7.25	7.50	7.75	8.00	8.25	8.50	8.75	9.00	9.25	9.50	9.75	10.00	10.25	10.50	10.75	11.00	11.25	11.50	11.75	12.00	12.25	12.50	12.75	13.00	13.25	13.50	13.75	14.00	14.25	14.50	14.75	15.00	15.25	15.50	
L1 (m)	1.62	1.85	2.08	2.31	2.54	2.77	3.00	3.23	3.46	3.70	3.93	4.16	4.39	4.62	4.85	5.08	5.31	5.54	5.77	6.00	6.24	6.47	6.70	6.93	7.16	7.39	7.62	7.85	8.08	8.31	8.55	8.78	9.01	9.24	9.47	9.70	9.93	10.16	10.39	10.62	10.86	11.09	11.32	11.55	11.78	12.01	12.24	12.47	12.70	12.93	13.16	13.40	13.63	13.86	14.09	14.32	
L2 (m)	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.50	3.70	3.70	3.80	3.80	3.90	3.90	3.70	3.70	3.80	3.80	3.90	3.90	4.00	4.00	4.10	3.80	3.90	3.90	4.00	4.00	4.10	4.10	4.20	3.90	4.00	4.00	4.10	4.10	4.20	4.20	4.30	4.30	4.30	4.10	4.10	4.20	4.20	4.30	4.30	4.40	4.40
L3 (m)	0.90	0.90	0.90	0.90	1.20	1.20	1.20	1.20	1.50	1.50	1.50	1.50	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.80	1.80	1.80	1.80	1.80	1.80	1.80	1.80	2.10	2.10	2.10	2.10	2.10	2.10	2.10	2.10	2.10	2.40	2.40	2.40	2.40	2.40	2.40	2.40	2.40		
H1 (m)	0.67	0.76	0.86	0.96	1.05	1.15	1.24	1.34	1.43	1.53	1.63	1.72	1.82	1.91	2.01	2.10	2.20	2.30	2.39	2.49	2.58	2.68	2.77	2.87	2.97	3.06	3.16	3.25	3.35	3.44	3.54	3.63	3.73	3.83	3.92	4.02	4.11	4.21	4.30	4.40	4.50	4.59	4.69	4.78	4.88	4.97	5.07	5.17	5.26	5.36	5.45	5.55	5.64	5.74	5.84	5.93	
S (m)	0.14	0.17	0.19	0.21	0.15	0.17	0.19	0.21	0.15	0.17	0.19	0.20	0.13	0.14	0.16	0.18	0.20	0.21	0.23	0.12	0.14	0.15	0.17	0.18	0.20	0.21	0.23	0.24	0.13	0.14	0.16	0.17	0.19	0.20	0.21	0.23	0.24	0.13	0.14	0.15	0.17	0.18	0.19	0.20	0.22	0.23	0.24	0.13	0.14	0.15	0.16	0.18</					

STRUCTURE'S DESCRIPTION

Pipe drop conveys water from a higher elevation to a lower elevation through a piping system.

STRUCTURE COMPONENTS

Pipe drop consists of: Upstream Transition, Inlet Structure, Pipe and Outlet Transition.

APPLICATION

- Pipe drop could be used where the drop in elevation is within the range of 0.90 to 4.6 meters.
- The inlet may serve as a control device to regulate the water depth at the upstream of the canal.
- The inlet and outlet can be adapted to either earth or a lined waterway.
- The outlet can be adapted to a waterway where there is no downstream water surface control.
- The inlet can be incorporated either with a control notch or with a check.
- Pipe drop can be used under another waterway or a roadway.

CLASSIFICATION

In general, two types of pipe drops are introduced:

- Type I - Which is used as an inline canal structure where the possibility of clogging is minimal. This type of pipe drop is used either with earth or concrete outlet transition. See Dwgs.No.11/2/1/01 and 11/3/1/01.
- Type II - Which is used as an inline canal structure or as a cross-drainage structure. This type of pipe drop is used either with a baffled outlet or a stilling pool. See Dwg.No. 11/4/1/01.

How to fit a pipe drop with the design condition

For fitting a pipe drop to the design condition proceed with the following steps:

- Decide which type of pipe drops well suit the desired condition.

Recommendation

There are three ways by which a pipe drop can be selected:

Use the drop selection model Dwg.No. 11/0/4/01 or

Use Designer's own judgement and/or

Use the following general rule:

- If the possibility of clogging is minimal, canal is lined and $Q \leq 1.5 \text{ m}^3/\text{s}$ select pipe drop type I with concrete outlet transition.
- If the possibility of clogging is minimal but canal is not lined and $Q \leq 0.70 \text{ m}^3/\text{s}$ select pipe drop type I with earth outlet transition.
- If $Q > 1.5 \text{ m}^3/\text{s}$ or the structure is used as cross-drainage or sediment and debris are carried in the water, use type II pipe drop with the following considerations:
 - Use type II with stilling pool where water carries weeds.
 - Use type II with baffled outlet in

other cases.

- Read elevations of A and H from the profile sheets.

let:

- El.A = Elevation of point A.
 - El.H = Elevation of point H.
 - El.A_W = Elevation of normal water surface at point A.
 - El.H_W = Elevation of normal water surface at point H.
 - El.A_E = Elevation of energy gradient at point A.
 - El.H_E = Elevation of energy gradient at point H.
- $$H = El.A_E - El.H_E$$

- Select type of inlet structure.

Recommendation

- If the upstream water level is being maintained and flow varies very often, use control notch.
- If the upstream water level is being maintained and flow does not vary often, use check.

- If the selection is made on type II, follow the step 9 below. Otherwise proceed with the following steps.

- From the table named "Pipe Selection Table" Dwg.No.11/2/2/01 select pipe diameter(D).

- From the tables named "Pipe Drop with Concrete Outlet Transition" or "Pipe Drop with Earth Outlet Transition" Dwg.No. 11/2/2/01 select the proper table which best fits to the canal flow(Q) and selected D. These tables are designated by PDE and PDC, where PDE is referred to pipe drop with earth outlet transition and PDC to pipe drop with concrete outlet transition.

- Find relevant table and read R at the top of the table. Match the calculated H to the values of H given in the first row of the table and select the column with nearest value of H to the calculated one. From the selected column read the following construction dimensions:

L, L₁, L₂, L₃, H₁, S and θ .

S, value designate the expected submergency but this figure should be recalculated.

- Calculate the rest of elevations and submergences(S).

$$El.D = El.A_W - R - H_1$$

$$El.E = El.D - 0.005 L_2$$

$$El.F = El.E + L_3 \sin \theta$$

$$El.F' = El.F + D \cos \theta \quad \text{If earth outlet.}$$

$$El.F' = El.F + D \cos \theta + D \sin^2 \theta / \cos \theta \quad \text{If concrete outlet.}$$

$$S = El.H_W - El.F'$$

GOTO Step 11.

- See Dwg.No. 11/2/2/01 for pipe selection and receiving the basic design considerations for adaption the pipe drop to the existing condition.

- If the outlet is baffled, refer to Dwg.No. 11/4/1/01. If it is stilling pool refer to

Dwg.No.14/10/1/01.

- To obtain the structural data for inlet structure proceed as follows:

If control notch is selected, refer to Dwg. No.12/5/1/01.

If check is selected, refer to Dwgs.No. 12/1/1/01 & 12/1/1/02.

If you are adapting type II pipe drop, it is possible to use a transition as an inlet. In this case the structure does not regulate the upstream water surface

In case of selecting was the transition as an inlet, the transition type 1,2,3 and 4 may be used. See Dwgs.No.13/7/1/01, 13/8/1/01, 13/9/1/01 and 13/10/1/01 Respectively.

EXAMPLE

Select a drop which has also to be used for controlling the upstream water level for a flow ranging from 500 to 900 lit/s.

The hydraulic properties of upstream and downstream of the canal are as follows:

- Q = 900 lit/s
- B = 0.30 m.
- Y = 0.55
- V = 1.00 m/s
- m = 1.5:1
- n = 0.014
- S = 0.0009

- El.A = 110.00
El.H = 108.09
El.A_W = El.A + Y = 110.00 + 0.55 = 110.55
El.H_W = El.H + Y = 108.09 + 0.55 = 108.64
El.A_E = El.A_W + V²/2g = 110.55 + (1.00)²/2g = 110.60
El.H_E = El.H_W + V²/2g = 108.64 + (1.00)²/2g = 108.69
H = El.A_E - El.H_E = 110.60 - 108.69 = 1.91 m.
- Control notch is selected as inlet structure.
- From the pipe selection table:
D = 900 mm.
- By entering Q = 0.90 m³/s and D = 900 mm. into the "Pipe Drop with Concrete Outlet Transition Table" Dwg.No.11/2/2/01. Read table No. PDC 53. This table is shown on Dwg.No.11/3/2/14.
- From table PDC 53:
R = 1.30 m.
Column which its H = 1.93 fits the calculated H value. Then:
L = 6.00 m. L₁ = 5.54 m.
L₂ = 4.50 m. L₃ = 1.50 m.
H₁ = 2.30 m. θ = 22.5
S = 0.17 m.
- El.D = El.A_W - R - H₁
= 110.55 - 1.30 - 2.30 = 106.95
El.E = El.D - 0.005 L₂
= 106.95 - 0.005 x 4.50 = 106.93
El.F = El.E + L₃ sin 22.5
= 106.93 + 1.50 x 0.38268 = 107.50
El.F' = El.F + D cos 22.5 + D sin² θ / cos θ
= 107.50 + 0.9 x 0.9239 + 0.9 x 0.14644 / 0.9239 = 108.47
S = El.H_W - El.F' = 108.64 - 108.47 = 0.17 m.

- For calculating the dimensions of control notch follow the procedure given at Dwg.No.12/5/2/01.

The inlet structure should control upstream water surface for the range of Q = 500 to 900 lit/s.

for Q = 0.90 m³/s:

$$Y = 0.55 \text{ m.}$$

$$V = 1.00 \text{ m/s}$$

$$E = 0.55 + \frac{(1.00)^2}{2g} = 0.60 \text{ m.}$$

for Q = 0.500 m³/s:

$$Y = 0.41 \text{ m.}$$

$$V = 0.86 \text{ m/s}$$

$$E = 0.41 + \frac{(0.86)^2}{2g} = 0.45 \text{ m.}$$

The first graphs satisfies the condition, so:

$$P = 0.40 \text{ m.} \quad \& \quad W = 1.25$$

$$T \geq Y \quad \text{for } Q = 0.90 \quad T = 0.55$$

$$N = P + 2WT = 0.40 + 2 \times 1.25 \times 0.55 = 1.375 \approx 1.38$$

Determine the inlet box inside (b₁):

$$b_1 = N + 0.30 = 1.38 + 0.30 = 1.68 \text{ m.}$$

and

$$b_1 = D + 0.60 = 0.90 + 0.60 = 1.50 \text{ m.}$$

which b₁ = 1.68 m. is selected.

Determine the elevation top of the notch:

$$El.\text{top of the notch} = El.A + T$$

$$= 110 + 0.55 = 110.55$$

The rest of the dimensions of inlet structure can be extracted from the table given on Dwg.No.12/5/1/01 selecting structure No. 900-1, where 900 refers to pipe diameter and 1 refers to structure which its R value is equal to the R value of the pipe drop.

REFERENCE DWGS:

Scale:

Date:

Approved:

IRRIGATION & DRAINAGE STANDARDS

DWG # 11/2,3/0/01

Sheet #2 of 1 Rev #2


PIPE DROP

DESIGN PROCEDURE AND EXAMPLE


ISLAMIC REPUBLIC OF IRAN

MINISTRY OF PLANNING & BUDGET


TECHNICAL RESEARCH AND STANDARDS BUREAU

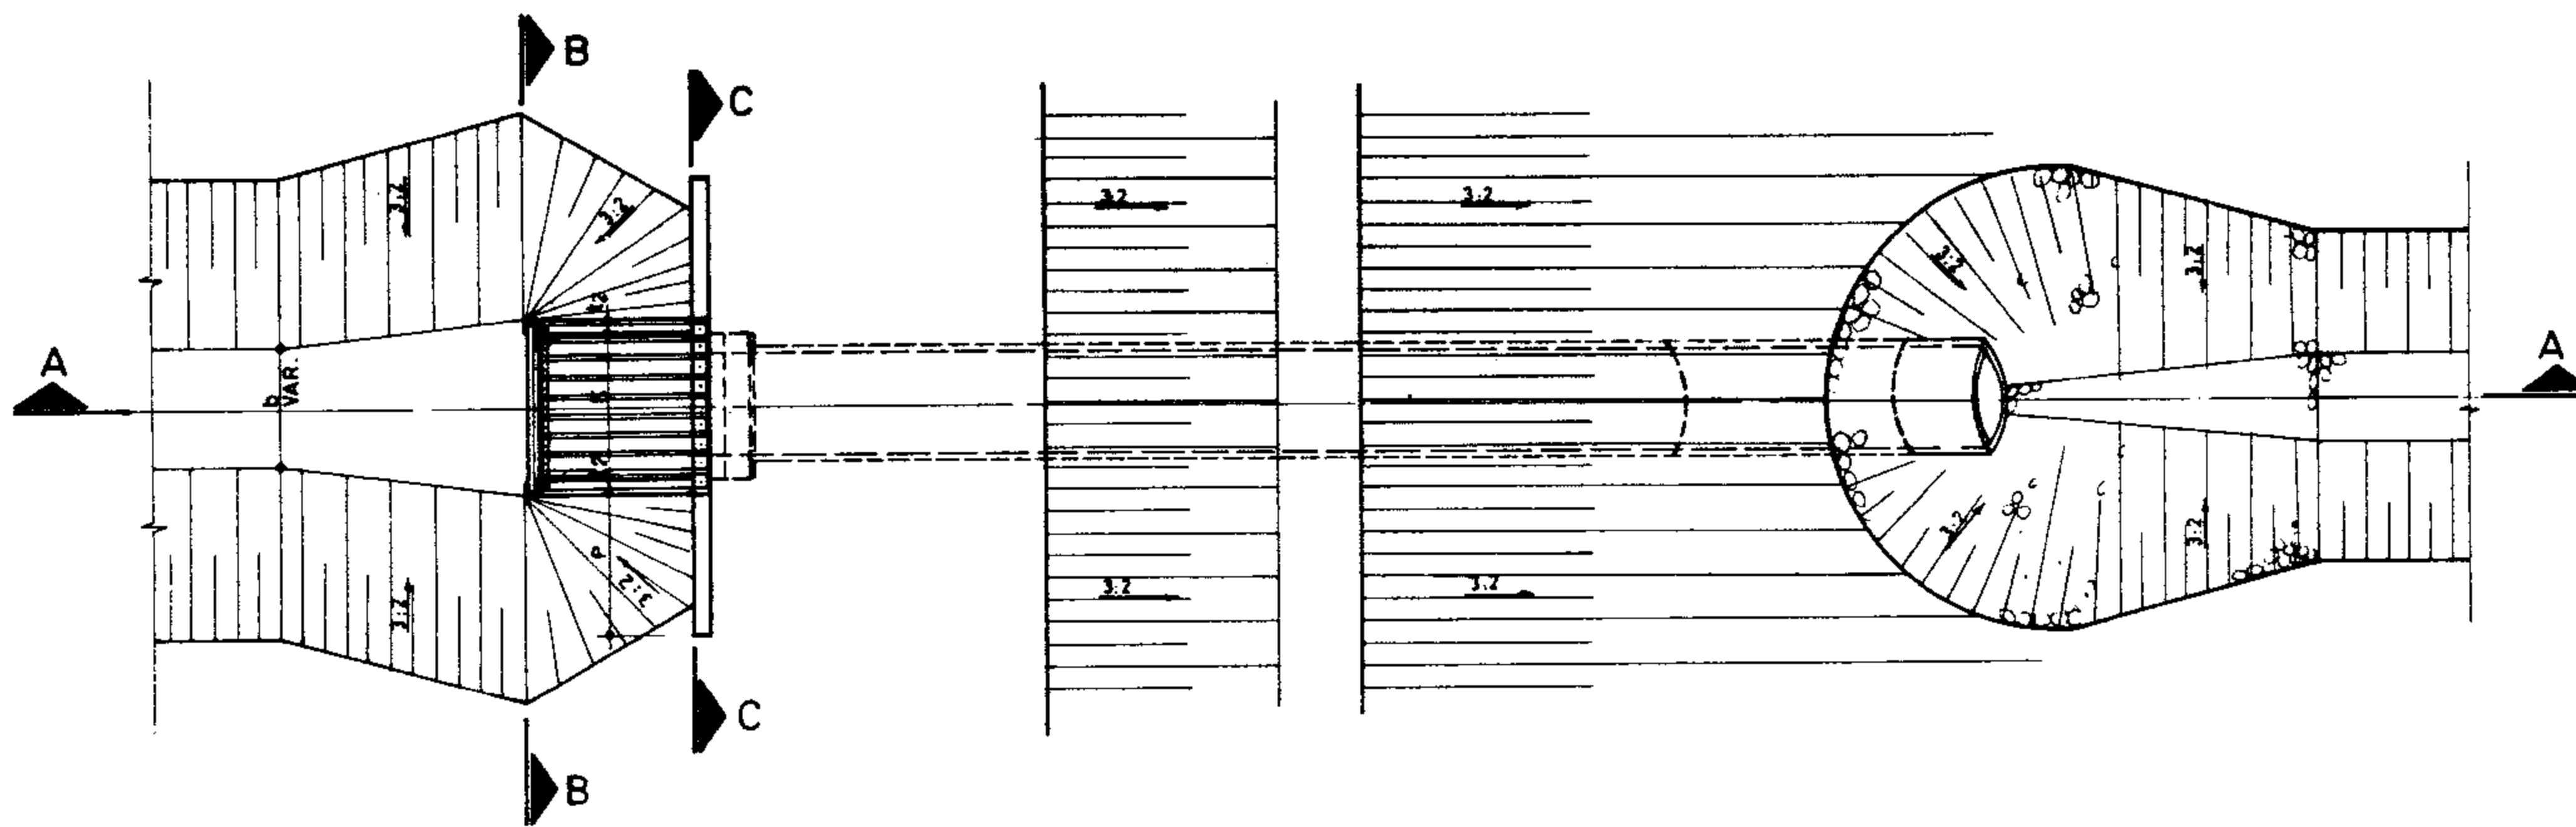


PLAN

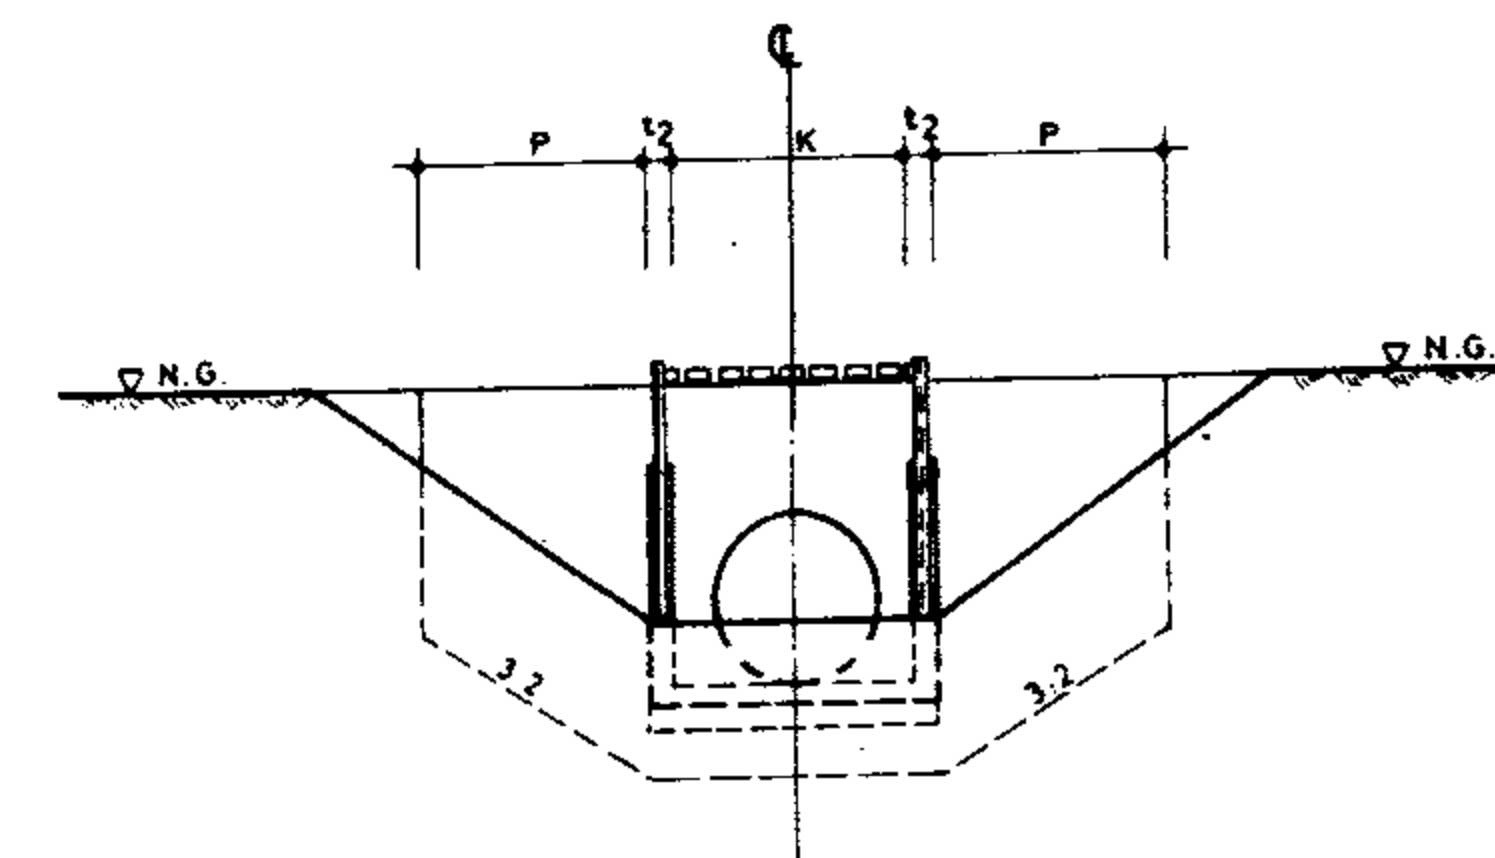

SECTION B.B.

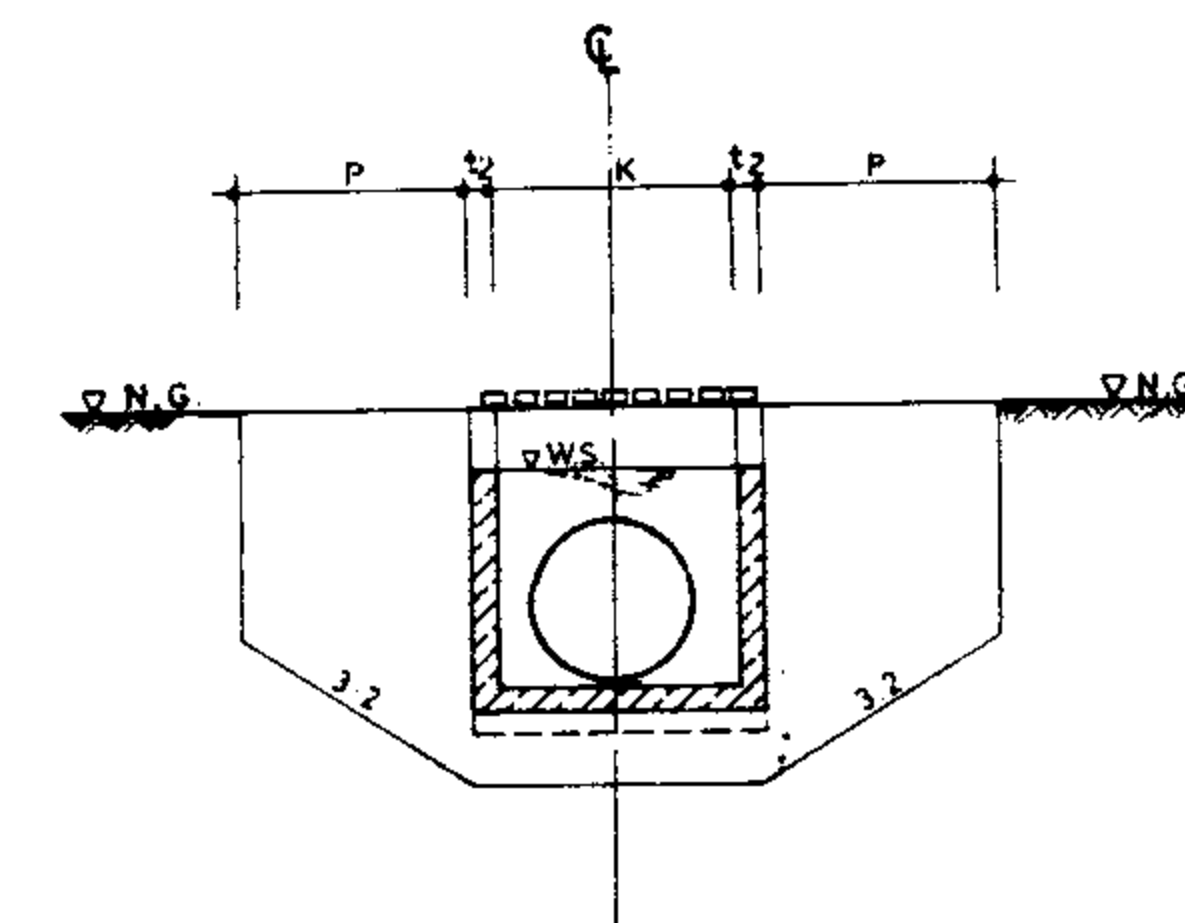

SECTION C.C.

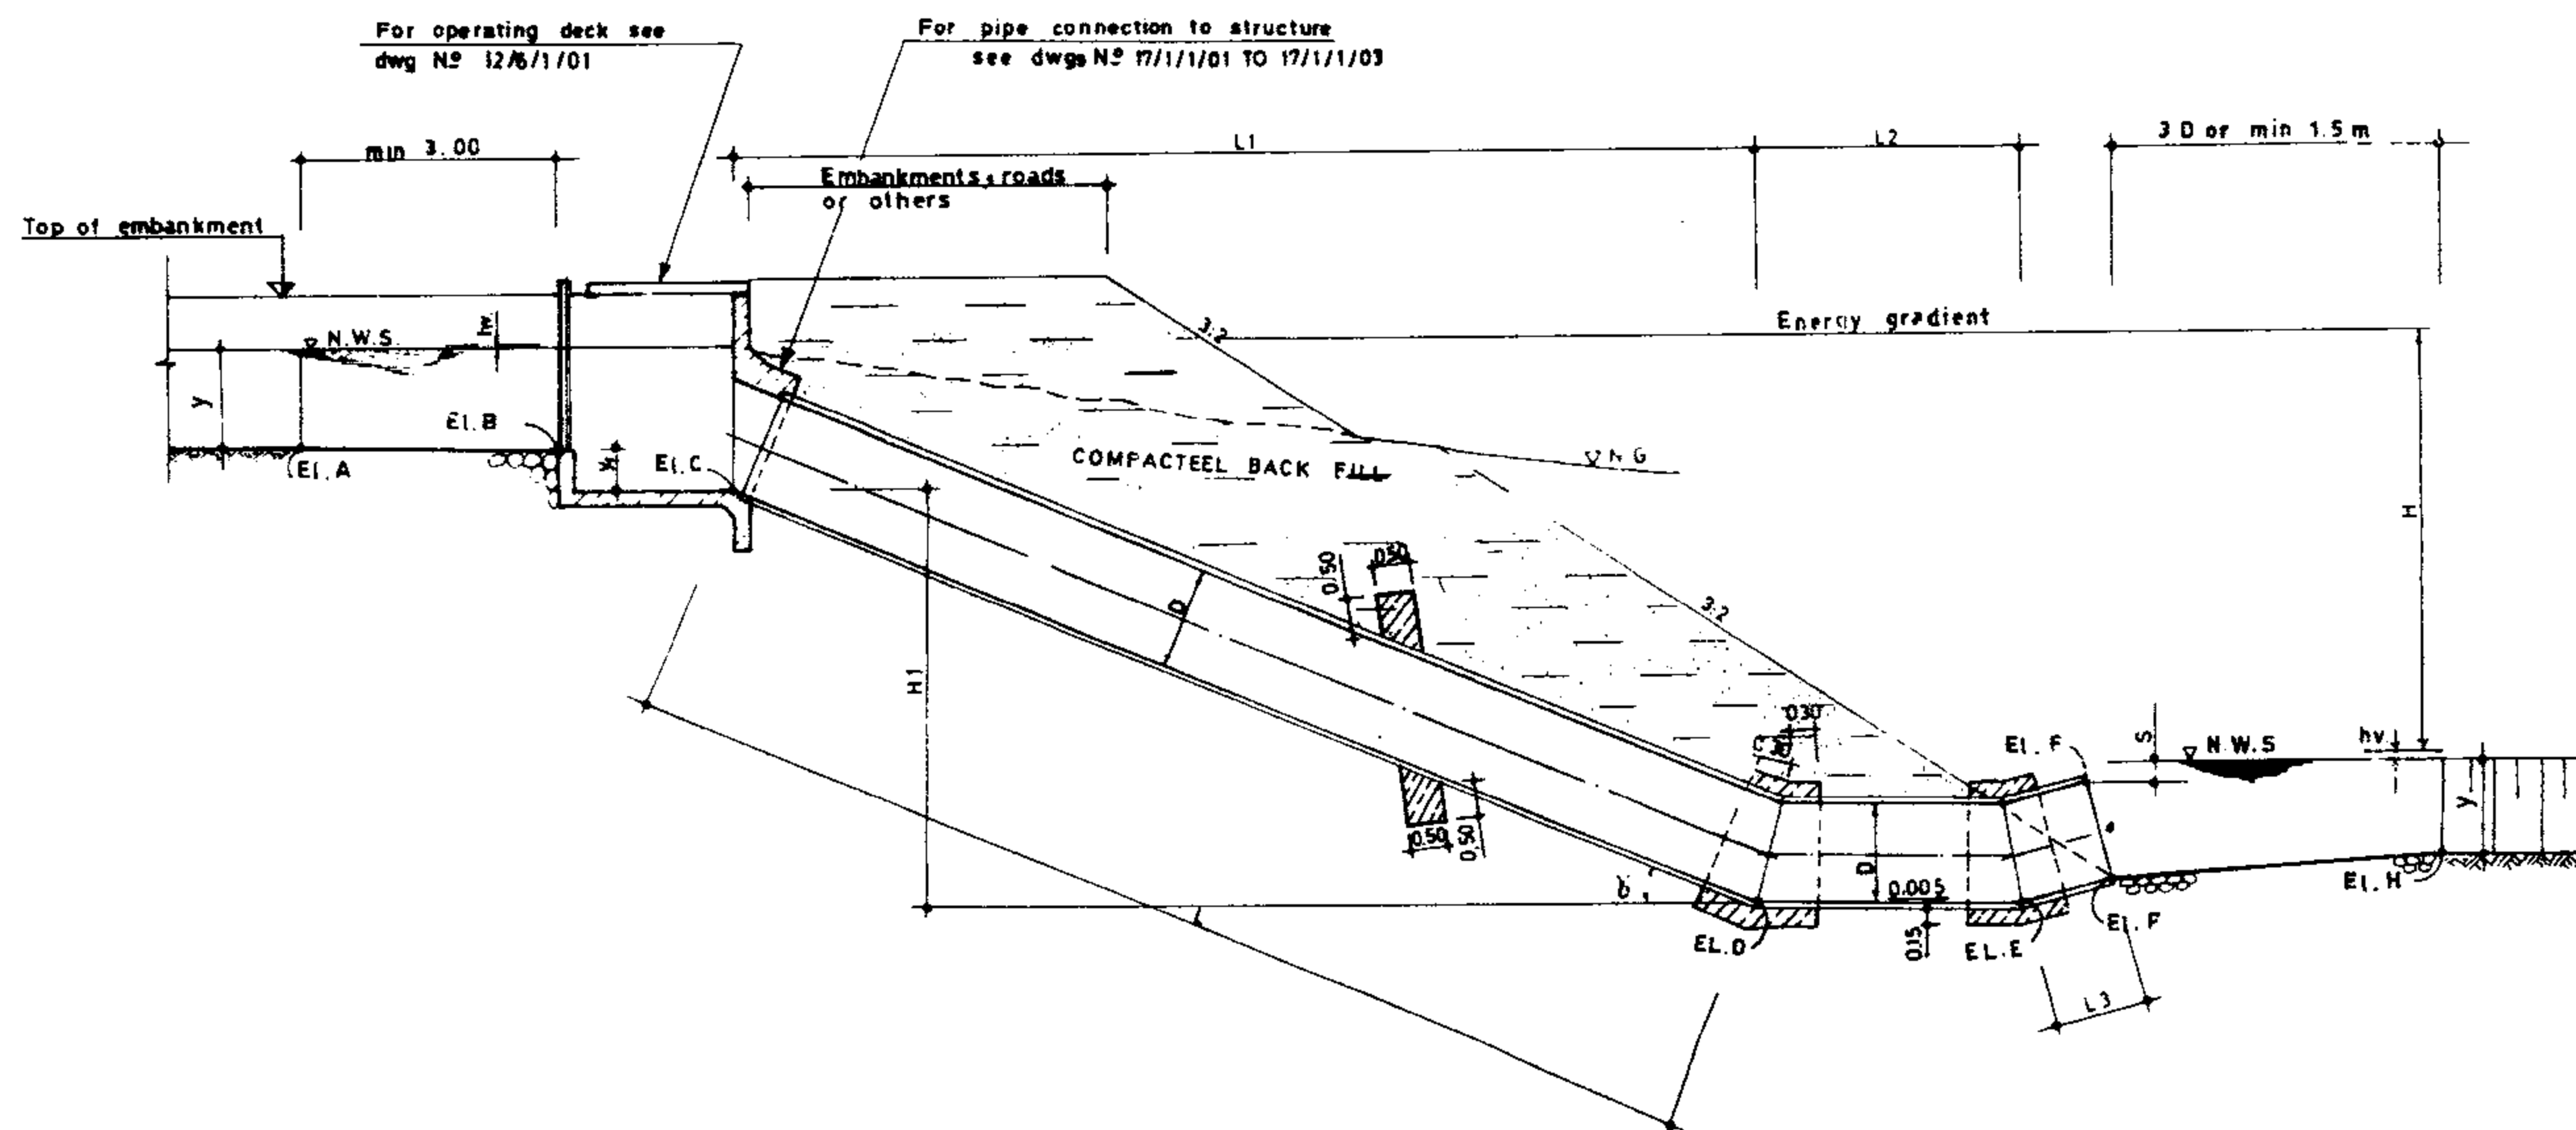

SECTION A.A.

NOTES

-All the pipes shown in this dwgs. are either precast reinforced concrete pressure pipe or asbestos-cement pressure pipe according to ASTM standard.

REFERENCE DWGS: For detail & dimension of inlet structure see dwg. N° 12/6/1/02
For pipe drop construction dimension see dwgs. N° 11/2/2/01 TO 11/2/2/09

Scale: N T S

Date:

Approved:

IRRIGATION & DRAINAGE STANDARDS

DWG. N° 11/2/1/01

Sheet N° 1 of 10 Rev. N°

PIPE DROP TYPE I WITH
EARTH OUTLET TRANSITION

PLAN & SECTION

ISLAMIC REPUBLIC OF
MINISTRY OF PLANNING & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

TABLE # PDE.09 (Q=0.250M³/S , D= 600 mm , R=1.00 m)

H (m)	0.85	0.93	1.01	1.09	1.17	1.25	1.33	1.41	1.49	1.57	1.66	1.74	1.82	1.90	1.99	2.07	2.16	2.24	2.32	2.41	2.49	2.58	2.66	2.75	2.83	2.92	3.00	3.09	3.17	3.26	3.34	3.43	3.51	3.60	3.69	3.77	3.86	3.95	4.03	4.12	4.21	4.29	4.38	4.47	4.55	4.64	4.73	4.81	4.90	4.99		
L (m)	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00	6.25	6.50	6.75	7.00	7.25	7.50	7.75	8.00	8.25	8.50	8.75	9.00	9.25	9.50	9.75	10.00	10.25	10.50	10.75	11.00	11.25	11.50	11.75	12.00	12.25	12.50	12.75	13.00	13.25	13.50	13.75	14.00		
L1 (m)	1.62	1.85	2.08	2.31	2.54	2.77	3.00	3.23	3.46	3.70	3.93	4.16	4.39	4.62	4.85	5.08	5.31	5.54	5.77	6.00	6.24	6.47	6.70	6.93	7.16	7.39	7.62	7.85	8.08	8.31	8.55	8.78	9.01	9.24	9.47	9.70	9.93	10.16	10.39	10.62	10.86	11.09	11.32	11.55	11.78	12.01	12.24	12.47	12.70	12.93		
L2(m)	3.00	3.00	3.10	3.10	3.20	3.20	3.30	3.30	3.40	3.40	3.50	3.50	3.60	3.60	3.70	3.70	3.80	3.80	3.90	3.90	4.00	4.00	4.10	4.10	4.10	4.20	4.20	4.20	4.30	4.30	4.40	4.40	4.40	4.40	4.50	4.50	4.50	4.60	4.60	4.60	4.70	4.70	4.70	4.80	4.80	4.80	4.90	4.90	4.90	4.90		
L3(m)	0.60	0.60	0.60	0.60	0.90	0.90	0.90	1.20	1.20	1.20	0.90	0.90	0.90	0.90	0.90	0.90	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50		
H1(m)	0.67	0.76	0.86	0.96	1.05	1.15	1.24	1.34	1.43	1.53	1.63	1.72	1.82	1.91	2.01	2.10	2.20	2.30	2.39	2.49	2.58	2.68	2.77	2.87	2.97	3.06	3.16	3.25	3.35	3.44	3.54	3.63	3.73	3.83	3.92	4.02	4.11	4.21	4.30	4.40	4.50	4.59	4.69	4.78	4.88	4.97	5.07	5.17	5.26	5.36		
S (m)	0.16	0.17	0.19	0.21	0.18	0.20	0.21	0.19	0.20	0.21	0.15	0.16	0.17	0.18	0.20	0.21	0.14	0.15	0.17	0.18	0.19	0.20	0.21	0.14	0.15	0.16	0.17	0.18	0.19	0.21	0.21	0.13	0.14	0.15	0.16	0.17	0.18	0.19	0.20	0.21	0.22	0.23	0.23	0.23	0.12	0.13	0.14	0.15	0.15	0.16	0.17	
δ (DEG)	7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.50	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00

TABLE # P DE. 10 (Q=0.275M³/S , D= 600 mm , R=1.00 m)

H (m)	0.80	0.88	0.96	1.04	1.12	1.19	1.27	1.35	1.43	1.52	1.60	1.68	1.76	1.84	1.92	2.01	2.09	2.17	2.25	2.34	2.42	2.50	2.59	2.67	2.75	2.84	2.92	3.01	3.09	3.18	3.26	3.35	3.43	3.52	3.60	3.69	3.77	3.86	3.94	4.03	4.11	4.20	4.28	4.37	4.46	4.54	4.63	4.72	4.80	4.89				
L (m)	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00	6.25	6.50	6.75	7.00	7.25	7.50	7.75	8.00	8.25	8.50	8.75	9.00	9.25	9.50	9.75	10.00	10.25	10.50	10.75	11.00	11.25	11.50	11.75	12.00	12.25	12.50	12.75	13.00	13.25	13.50	13.75	14.00				
L1 (m)	1.62	1.85	2.08	2.31	2.54	2.77	3.00	3.23	3.46	3.70	3.93	4.16	4.39	4.62	4.85	5.08	5.31	5.54	5.77	6.00	6.24	6.47	6.70	6.93	7.16	7.39	7.62	7.85	8.08	8.31	8.55	8.78	9.01	9.24	9.47	9.70	9.93	10.16	10.39	10.62	10.86	11.09	11.32	11.55	11.78	12.01	12.24	12.47	12.70	12.93				
L2(m)	3.10	3.20	3.20	3.30	3.30	3.40	3.50	3.50	3.60	3.60	3.70	3.70	3.80	3.80	3.90	3.90	4.00	4.00	4.10	4.10	4.20	4.20	4.30	4.30	4.40	4.40	4.50	4.50	4.60	4.60	4.60	4.70	4.70	4.70	4.80	4.80	4.90	4.90	4.90	5.00	5.00	5.10	5.10	5.10	5.20	5.20	5.30	5.30	5.30	5.30				
L3(m)	0.60	0.90	0.90	0.90	1.20	1.20	0.90	0.90	0.90	0.90	0.90	1.20	1.20	1.20	1.20	1.20	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.80	1.80	1.80	1.80					
H1(m)	0.67	0.76	0.86	0.96	1.05	1.15	1.24	1.34	1.43	1.53	1.63	1.72	1.82	1.91	2.01	2.10	2.20	2.30	2.39	2.49	2.58	2.68	2.77	2.87	2.97	3.06	3.16	3.25	3.35	3.44	3.54	3.63	3.73	3.83	3.92	4.02	4.11	4.21	4.30	4.40	4.50	4.59	4.69	4.78	4.88	4.97	5.07	5.16	5.26	5.36				
S (m)	0.20	0.18	0.20	0.22	0.19	0.21	0.14	0.16	0.18	0.19	0.21	0.14	0.15	0.17	0.18	0.20	0.21	0.14	0.16	0.17	0.18	0.19	0.21	0.12	0.14	0.15	0.16	0.17	0.18	0.19	0.20	0.22	0.23	0.24	0.12	0.13	0.14	0.16	0.17	0.18	0.19	0.20	0.21	0.22	0.23	0.24	0.12	0.13	0.14	0.15	0.15	0.16	0.17	
δ (DEG)	7.50	7.50	7.50	7.50	7.50	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00

TABLE # PDE. 11 (Q=0.300M³/S , D= 700 mm , R=1.10 m)

H (m)					1.26	1.34	1.43	1.51	1.59	1.68	1.76	1.85	1.93	2.02	2.10	2.19	2.27	2.36	2.44	2.53	2.61	2.70	2.79	2.87	2.96	3.05	3.13	3.22	3.31	3.39	3.48	3.57	3.65	3.74	3.83	3.92	4.00	4.09	4.18	4.27	4.35	4.44	4.53	4.62	4.70	4.79	4.88	4.97	5.06	5.15									
L (m)					2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00	6.25	6.50	6.75	7.00	7.25	7.50	7.75	8.00	8.25	8.50	8.75	9.00	9.25	9.50	9.75	10.00	10.25	10.50	10.75	11.00	11.25	11.50	11.75	12.00	12.25	12.50	12.75	13.00	13.25	13.50	13.75	14.00									
L1 (m)					2.54	2.77	3.00	3.23	3.46	3.70	3.93	4.16	4.39	4.62	4.85	5.08	5.31	5.54	5.77	6.00	6.24	6.47	6.70	6.93	7.16	7.39	7.62	7.85	8.08	8.31	8.55	8.78	9.01	9.24	9.47	9.70	9.93	10.16	10.39	10.62	10.86	11.09	11.32	11.55	11.78	12.01	12.24	12.47	12.70	12.93									
L2(m)					3.20	3.30	3.30	3.40	3.40	3.50	3.50	3.60	3.60	3.70	3.70	3.80	3.80	3.90	3.90	4.00	4.00	4.10	4.10	4.20	4.20	4.30	4.30	4.40	4.40	4.40	4.40	4.50	4.50	4.50	4.60	4.60	4.60	4.70	4.70	4.70	4.80	4.80	4.90	4.90	4.90	5.00	5.00	5.00	5.00	5.00	5.10	5.10	5.20	5.20	5.30				
L3(m)					0.60	0.60	0.60	0.60	0.60	0.60	0.60	0.60	0.90	0.90	0.90	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20						
H1(m)					1.05	1.15	1.24	1.34	1.43	1.53	1.63	1.72	1.82	1.91	2.01	2.10	2.20	2.30	2.39	2.49	2.58	2.68	2.77	2.87	2.97	3.06	3.16	3.25	3.35	3.44	3.54	3.63	3.73	3.83	3.92	4.02	4.11	4.21	4.30	4.40	4.50	4.59	4.69	4.78	4.88	4.97	5.07	5.16	5.26	5.36									
S (m)					0.13	0.14	0.15	0.17	0.18	0.19	0.20	0.21	0.18	0.20	0.21	0.22	0.19	0.20	0.21	0.18	0.15	0.16	0.17	0.18	0.18	0.19	0.20	0.21	0.14	0.15	0.16	0.17	0.18	0.19	0.19	0.20	0.21	0.22	0.15	0.15	0.16	0.17	0.18	0.19	0.19	0.20	0.21	0.12	0.13	0.14	0.15	0.15	0.16	0.17					
δ (DEG)					7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.50	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00

TABLE # PDE. 12 (Q=0.325M³/S , D= 700 mm , R=1.10 m)

H (m)		0.98	1.05	1.14	1.22	1.30	1.39	1.47	1.55	1.63	1.72	1.80	1.88	1.97	2.05	2.14	2.22	2.30	2.39	2.47	2.56	2.64	2.73	2.82	2.90	2.99	3.07	3.16	3.24	3.33	3.42	3.50	3.59	3.68	3.76	3.85	3.94	4.02	4.11	4.20	4.28	4.37	4.46	4.55	4.63	4.72	4.81	4.90	4.98	5.07
L (m)		2.00	2.25	2.50	2.																																													

STRUCTURE'S DESCRIPTION

Rectangular Inclined Drop (R.I.Drop) in a rectangular shaped structure with constant width that conveys water from a higher elevation to a lower elevation.

STRUCTURE COMPONENTS

Rectangular Inclined Drop consists of the following hydraulic elements:

- Inlet
- Inclined Channel
- Stilling Pool
- Outlet, and
- Downstream Transition

APPLICATION

- a. The R.I.Drop could be used where the drop in elevation is within the range of 1.00 to 4.00 meters
- b. The inlet of this structure may serve as a control to regulate the water depth in the upstream canal.
- c. The inlet and outlet can be adapted to either an earth or a lined water way.
- d. The inlet can be incorporated either with a control notch or with a check.

How to fit a R.I.Drop with the design condition

For fitting a R.I.Drop with the design condition, proceed with the following steps:

1. Collect the hydraulic properties of the canal at inlet and outlet of structure.

let:

- b = Bottom width of the canal (m.)
- m = Side slope of the canal
- Y = Depth of flow (m.)
- S = Canal bottom slope
- n = Manning's roughness coefficient
- Q = Discharge (m³/s)
- V = Velocity (m/s)
- $h_v = \text{Velocity head} = \frac{V^2}{2g}$ (m.)

2. Read the elevation of points A and D from the profile sheets.

let:

- El.A = Elevation of point A.
- El.D = Elevation of point D.
- El.A_W = Elevation of the normal water surface at point A.
- El.D_W = Elevation of the normal water surface at point D.
- El.A_E = Elevation of the energy gradient at point A.
- El.D_E = Elevation of the energy gradient at point D.

3. From the "Standard Dimension Table", Dwg. No.11/1/2/02, for a given discharge, select the width of the R.I.Drop as well as the other dimensions listed on the table.

4. Decide whether to use check or control notch at the inlet.

Recommendation

If the amount of flow changes very often and it is required that the upstream canal water depth being controlled select control notch.

Control notch is designed to control upstream canal water depth and velocity for flow ranges between design flow and to about 0.2 of design flow.

If the changes of flow is not very often check could be used.

5. If the control notch is selected, for calculating its dimensions, follow the steps presented on Dwg.No.12/5/2/01 and then proceed with the following steps.

6. Calculate the energy gradient at point A.

$$El.A_E = El.A + Y + h_v$$

7. Calculate the energy gradient at point D using reduced n value. This reduced n should be 0.8 times the assumed design n for the canal. These smaller values of n are used as a factor of safety against possible lower canal water elevations than indicated using the rougher n value.

$$El.D_E = El.D + Y' + h'_v$$

Where Y' represents the depth of water at point D, using reduced n and h'_v which represents velocity head at the downstream when the depth of water is Y'.

8. Determine the drop value (H).
9. By knowing Q and H values and using the tables provided on Dwgs.No.11/1/2/01 and 11/1/2/02 the required structure numbers and corresponding dimensions can be selected.

10. The elevation of B and C could be calculated as follows:

$$El.C = El.D_E - (Y_2 + h_{v2})$$

$$El.B = El.C + L_3/2$$

If El.B is higher than El.A, select another structure to satisfy the condition.

11. All the structural data could be obtained from the dimension tables and the reinforcement information could be obtained by H_4 value of Dwgs. No. 11/1/3/01 to 11/1/3/03.

Lists of reinforcement are shown on Dwgs.No. 11/1/3/04 through 11/1/3/27 indicated by structure numbers.

Example

- 1&2. The following information is provided for the selection of a proper Rectangular Inclined Drop.

The hydraulic properties of upstream and downstream of the structures are the same.

- b = 0.8 m. Q = 1.2 m³/s
- m = 1.5:1 Y = 0.617 m.
- s = 0.001 V = 1.13 m/s
- n = 0.014 $h_v = 0.065$ m.
- El.A = 102.18 m. El.B = 99.78 m.

3. From the Standard Dimension Table: B = 1.85 m.

4. It is decided to use check control at the inlet.

$$6. El.A_E = 102.18 + 0.617 + 0.065 = 102.86$$

$$7. n' = 0.8 \times 0.014 = 0.011$$

For detailed calculation of water depth, when reduced values of n i.e.(n') is used, the reader is referred to P.B.O publication No. 104.

$$Y' = 0.549 \quad V' = 1.33 \quad h'_v = 0.093$$

$$El.D_E = 99.78 + 0.549 + 0.093 = 100.42$$

$$3. H = 102.86 - 100.42 = 2.44$$

9. Use structure # 1200 - 250


$$10. Y_2 + h_{v2} = 1.027$$

$$El.C = 100.42 - 1.027 = 99.39 \quad \text{Take } 99.40$$

$$L_3 = 5.40$$

$$El.B = 99.40 + \frac{5.40}{2} = 102.10$$

All the structural dimensions could be extracted from the table by using structure # 1200 - 250.

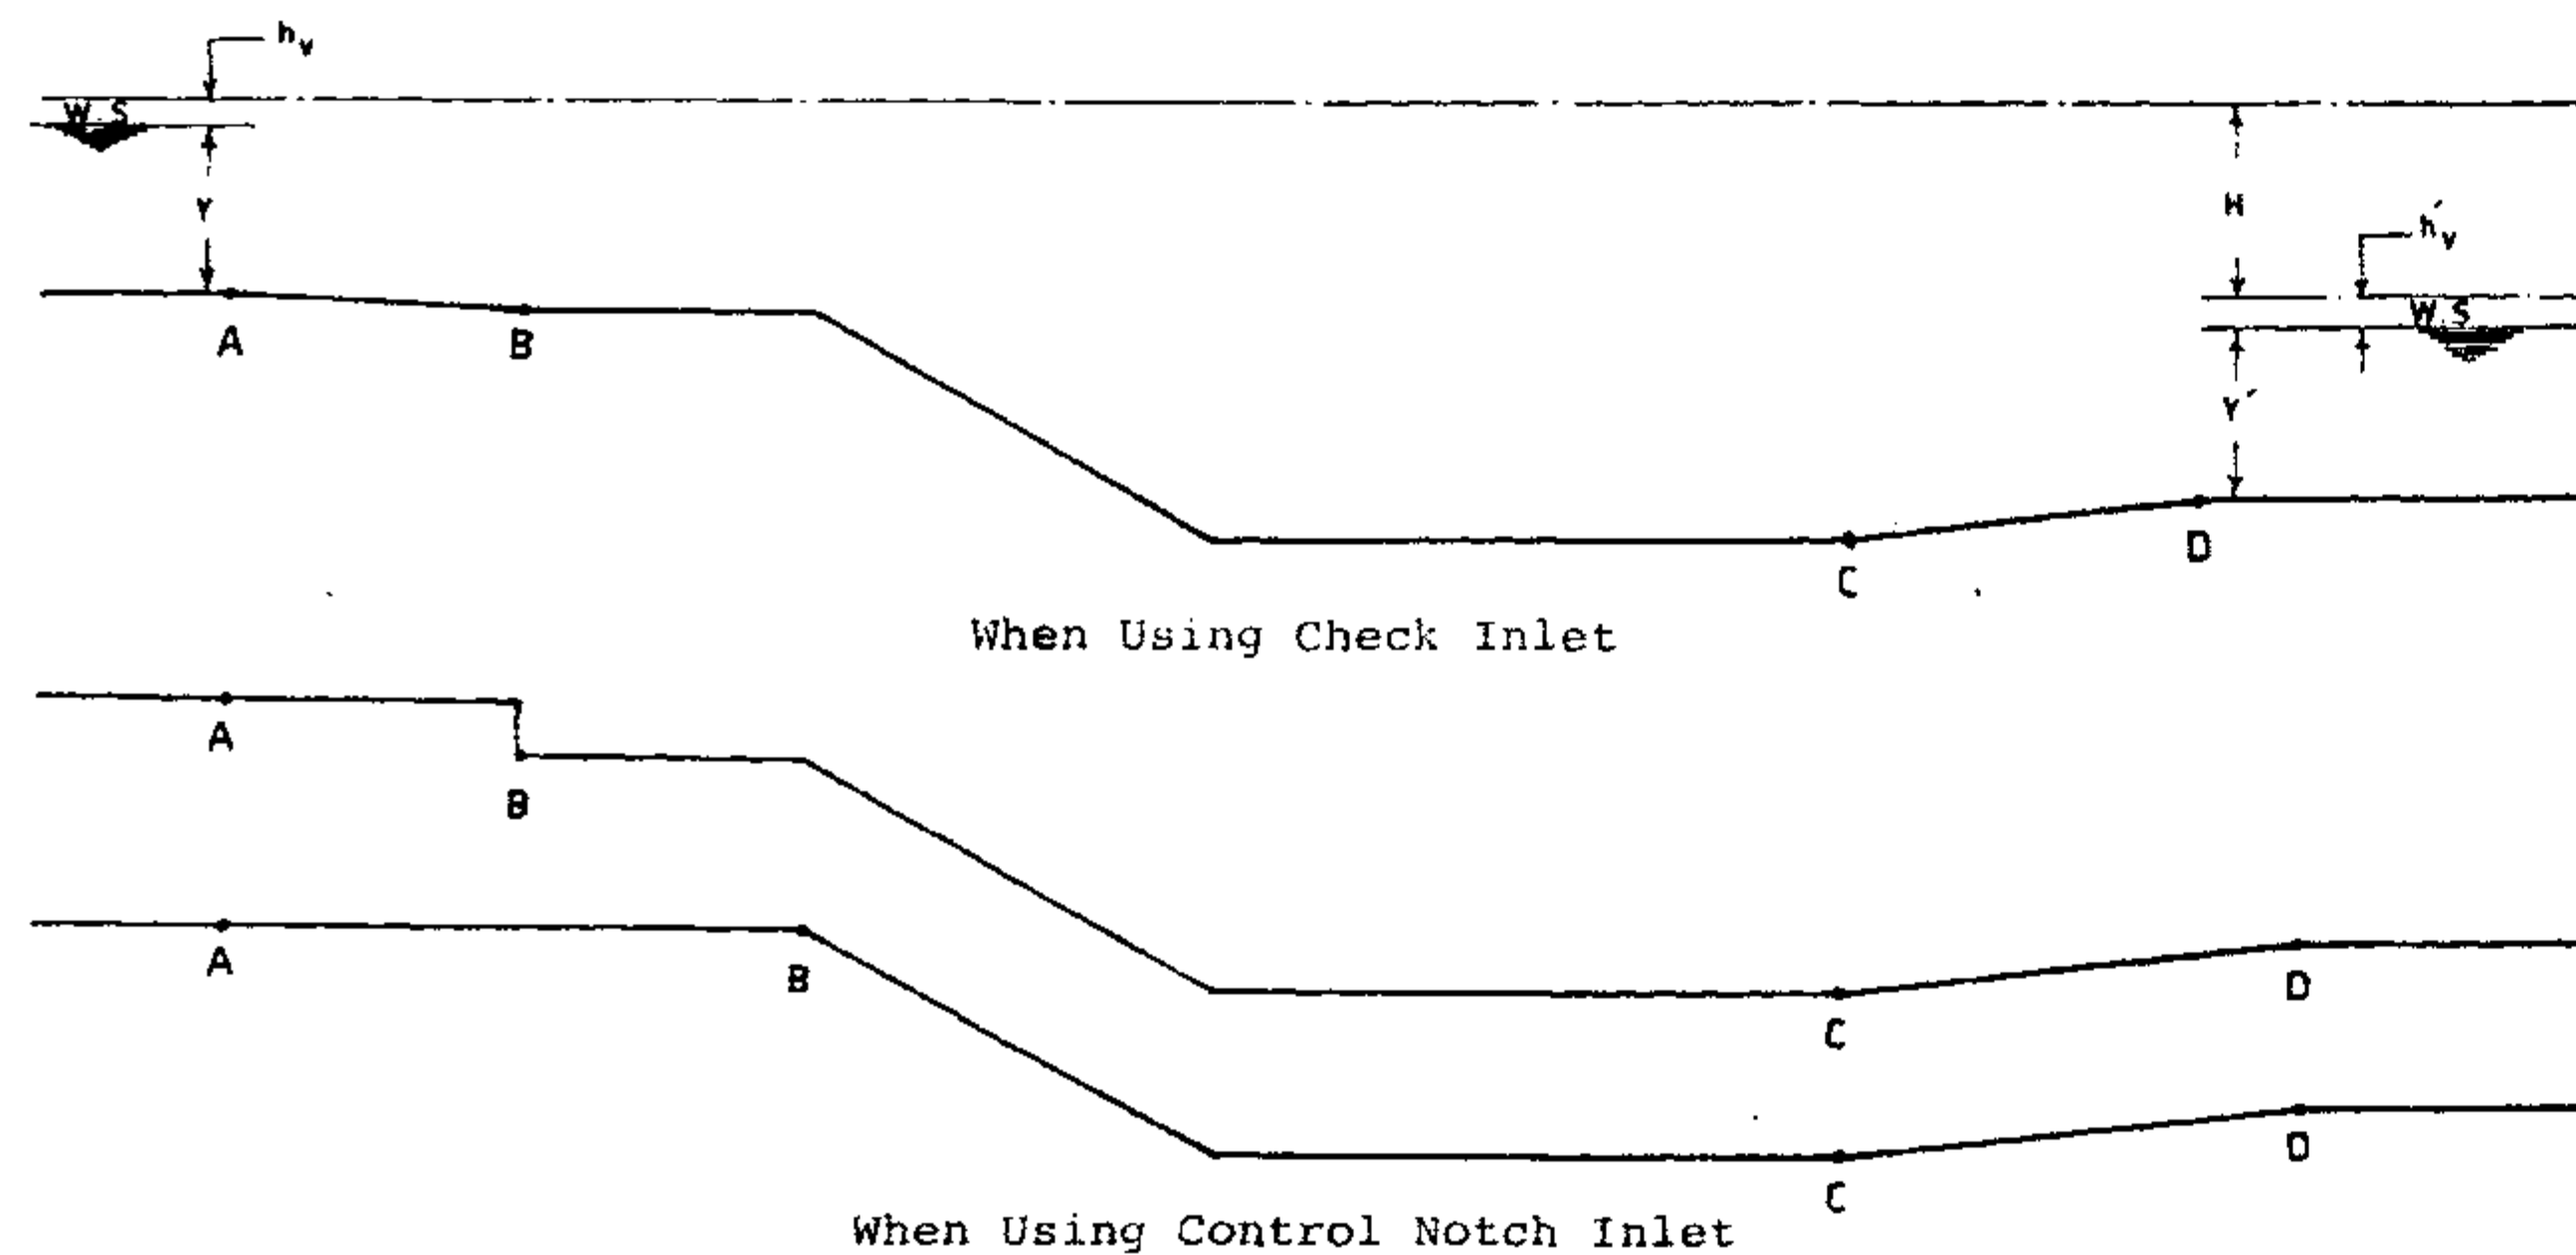

REFERENCE DWGS:

Scale:

Date:

Approved:


IRRIGATION & DRAINAGE STANDARDS

DWG No 11/1/0/01


Sheet No 1 of 32 Rev. No

**RECTANGULAR INCLINED DROP
DESIGN PROCEDURE AND EXAMPLE**


ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

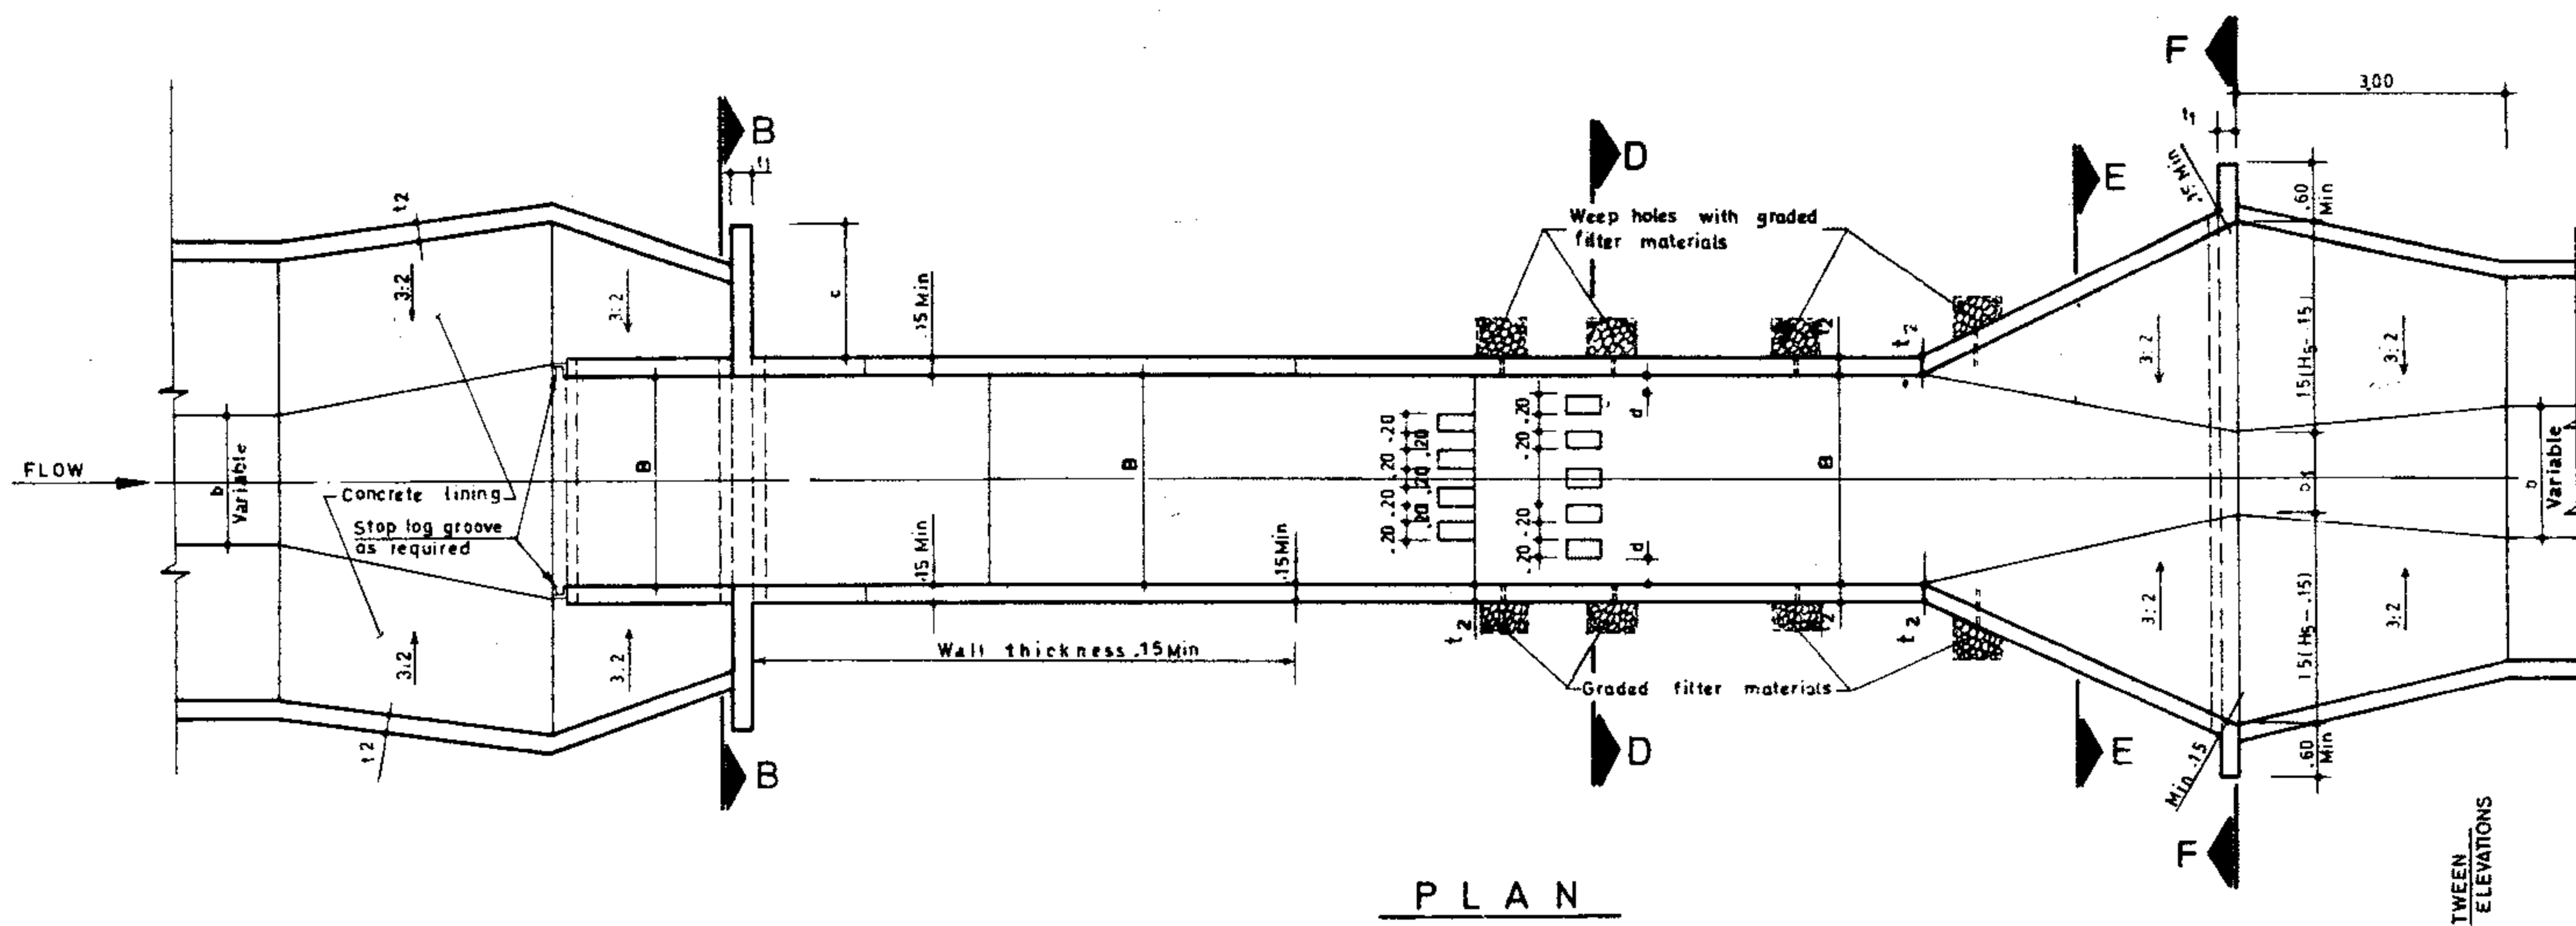


PLAN

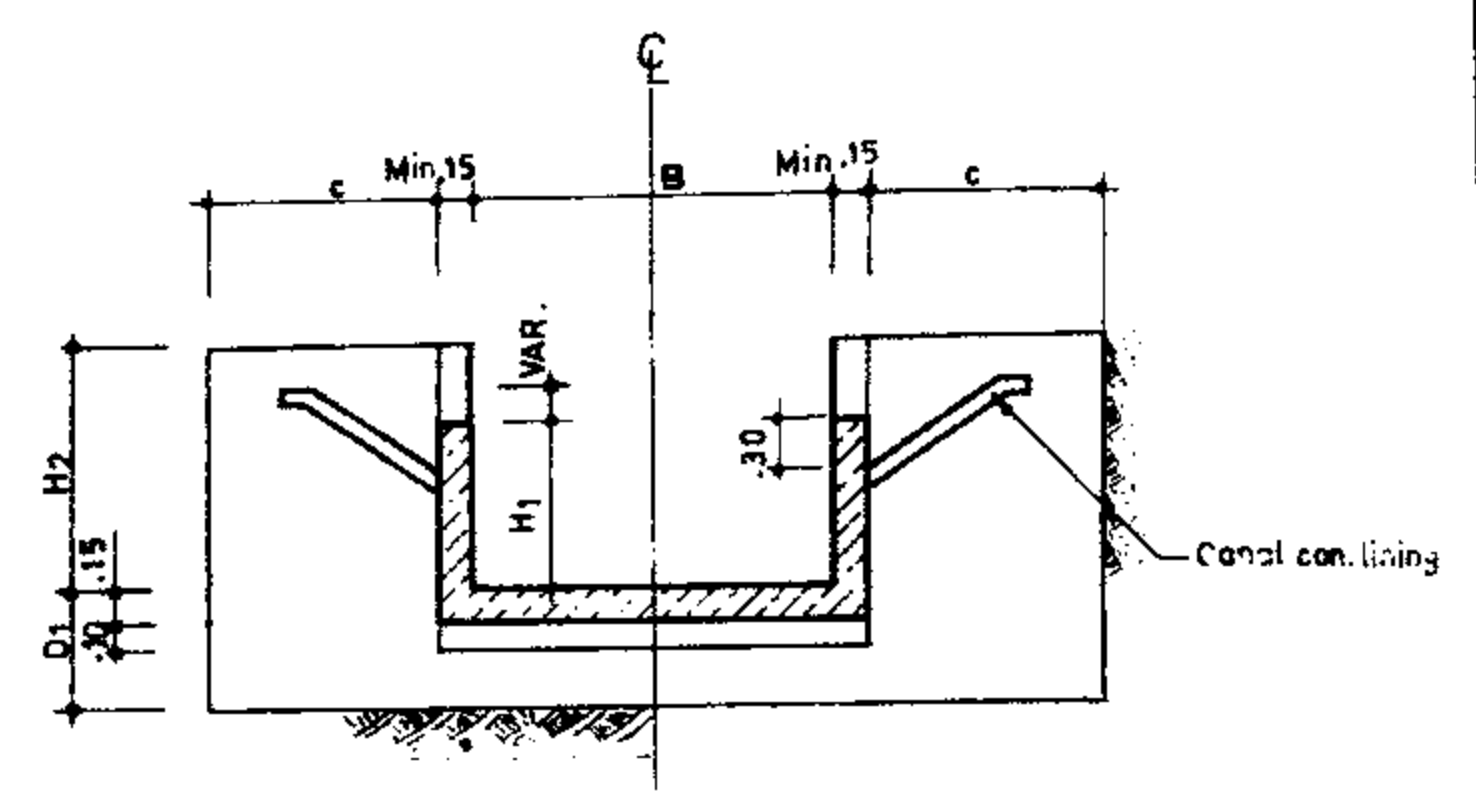


SECTION B-B
U/S HEAD WALL

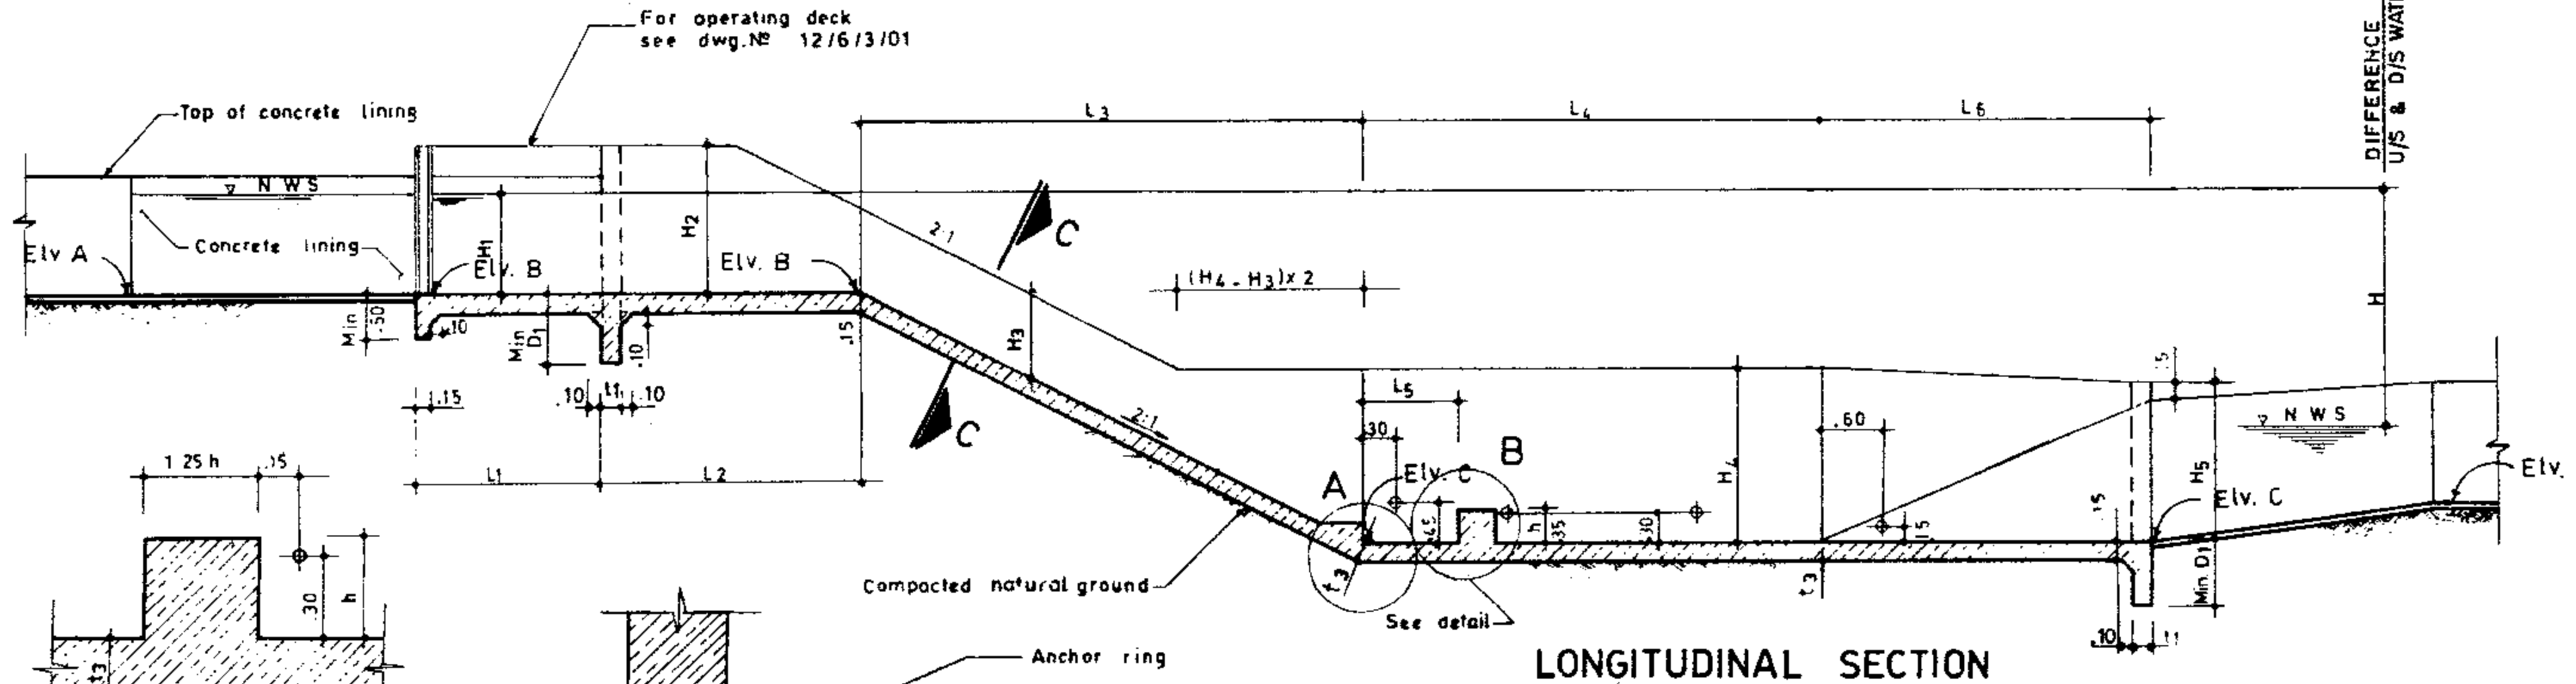

LONGITUDINAL SECTION

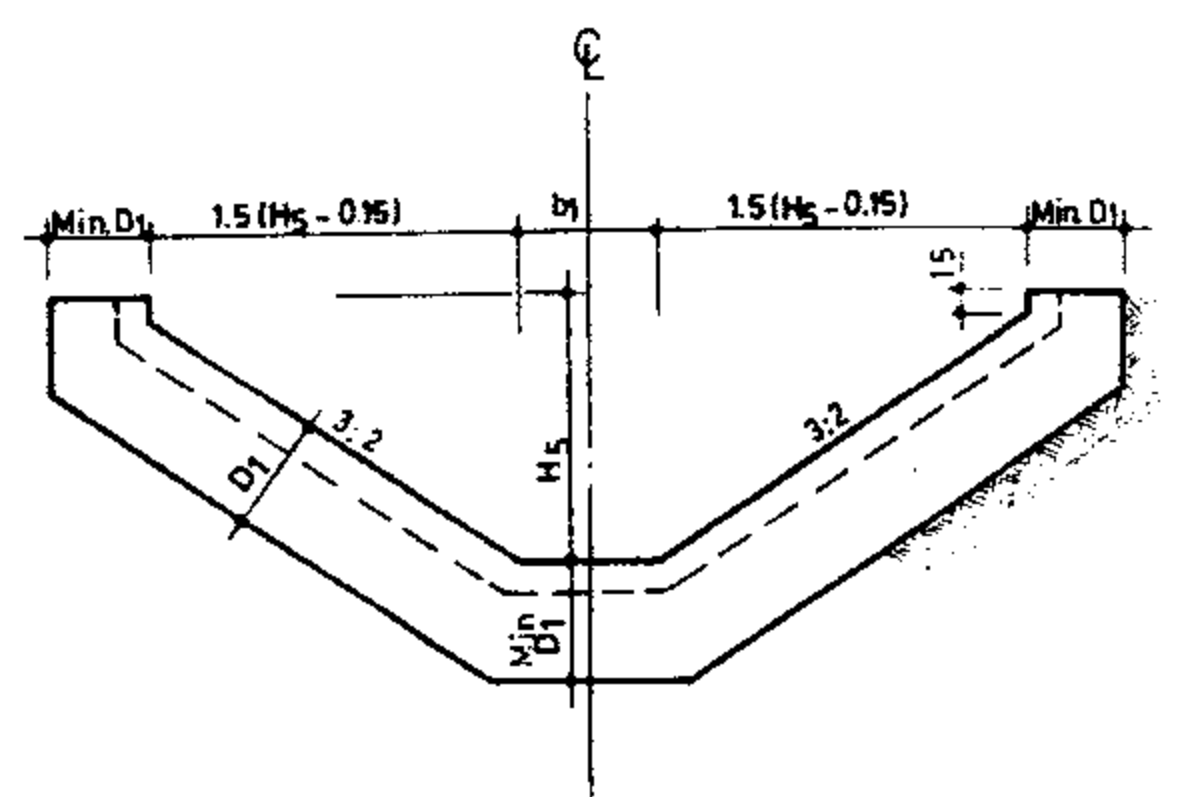


SECTION F-F
D/S HEAD WALL

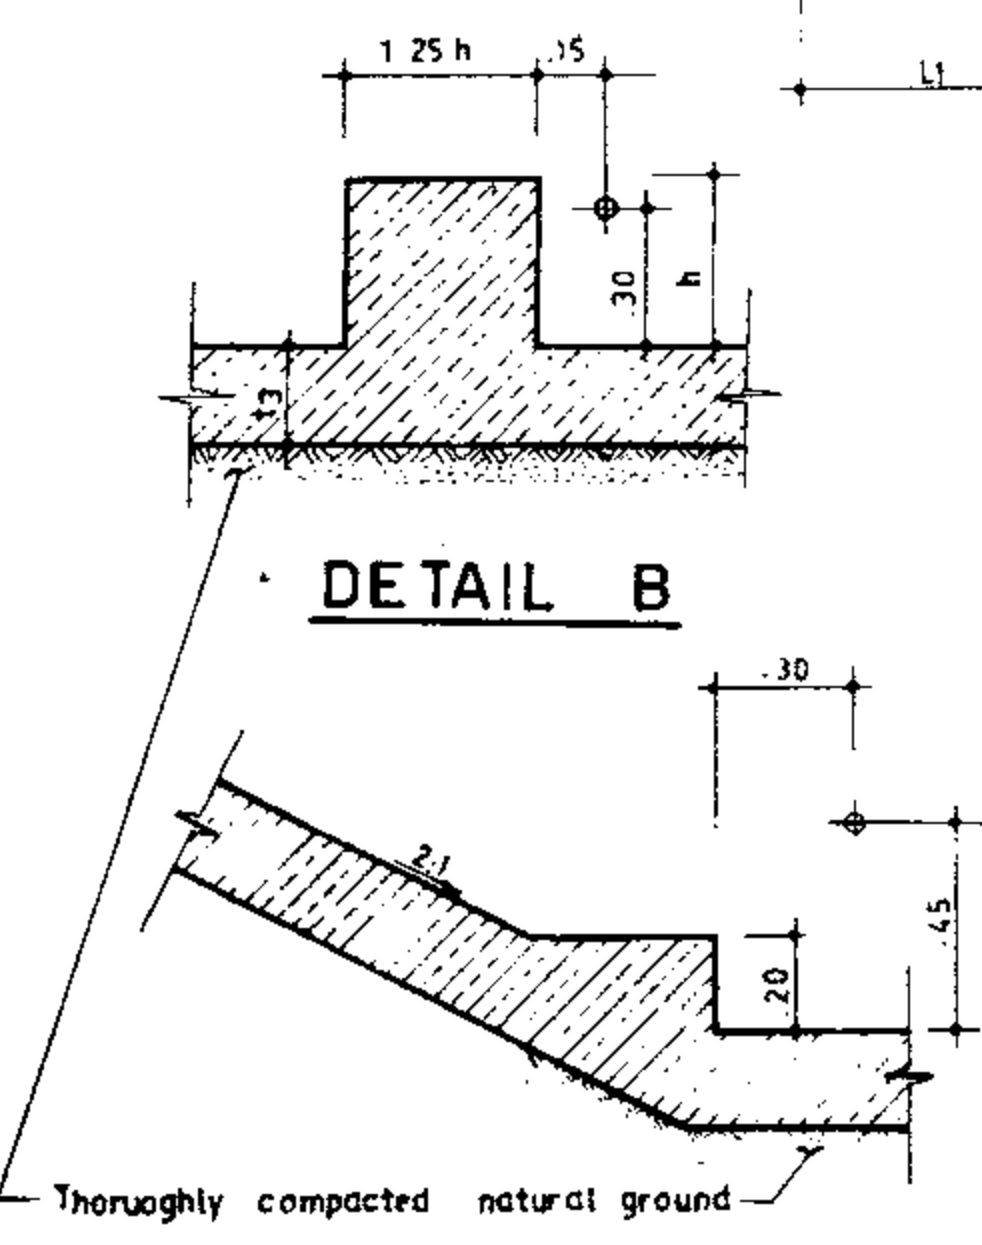


DETAIL B

DETAIL A

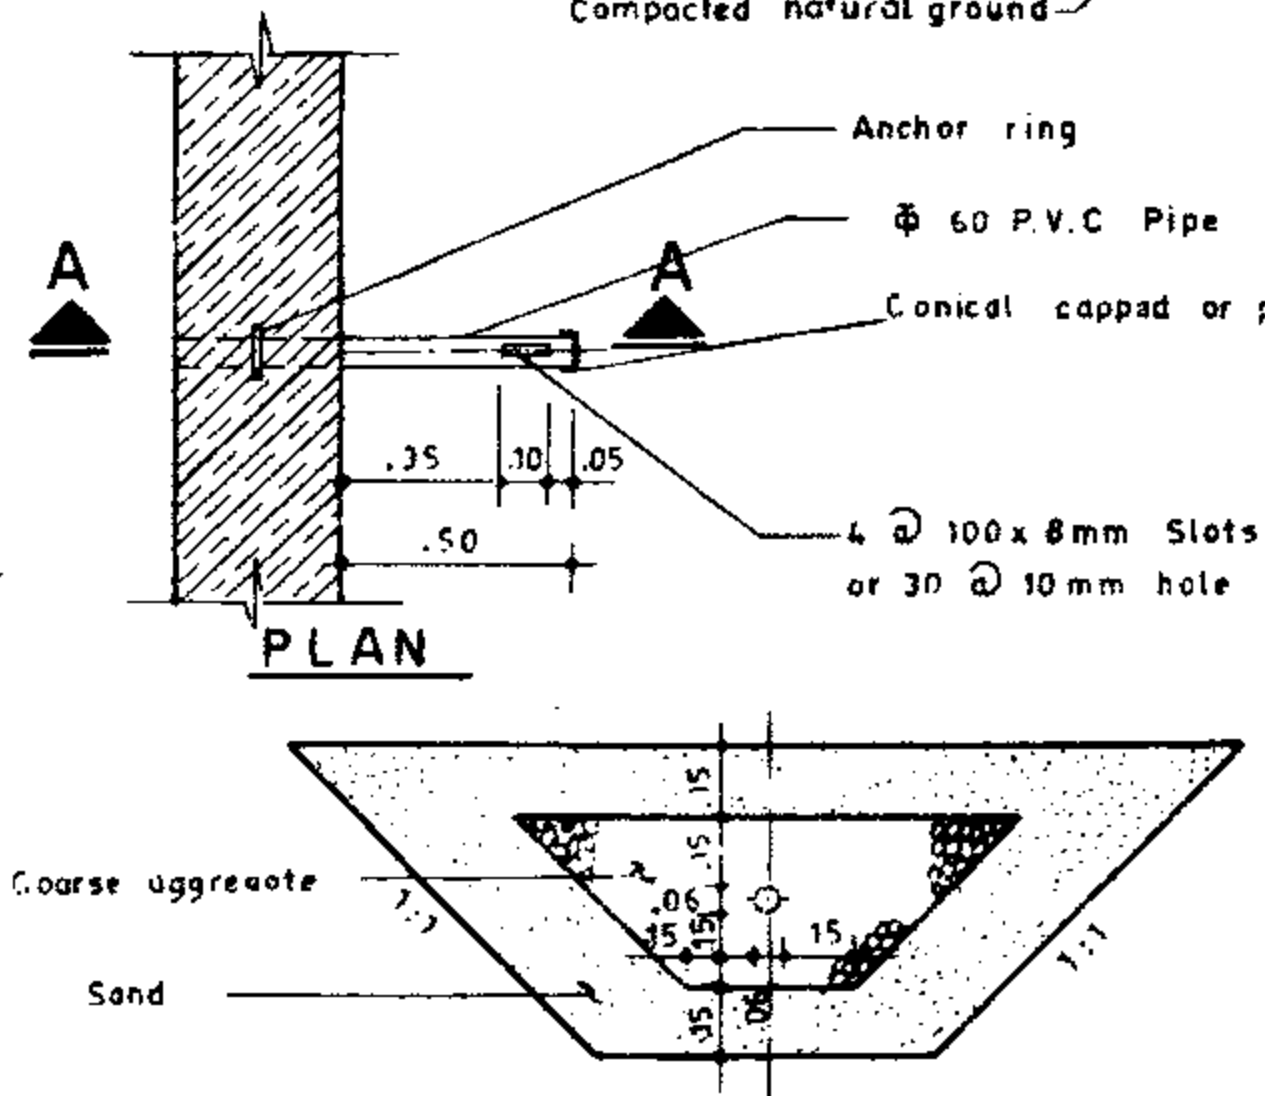


SECTION B-B


DETAIL C

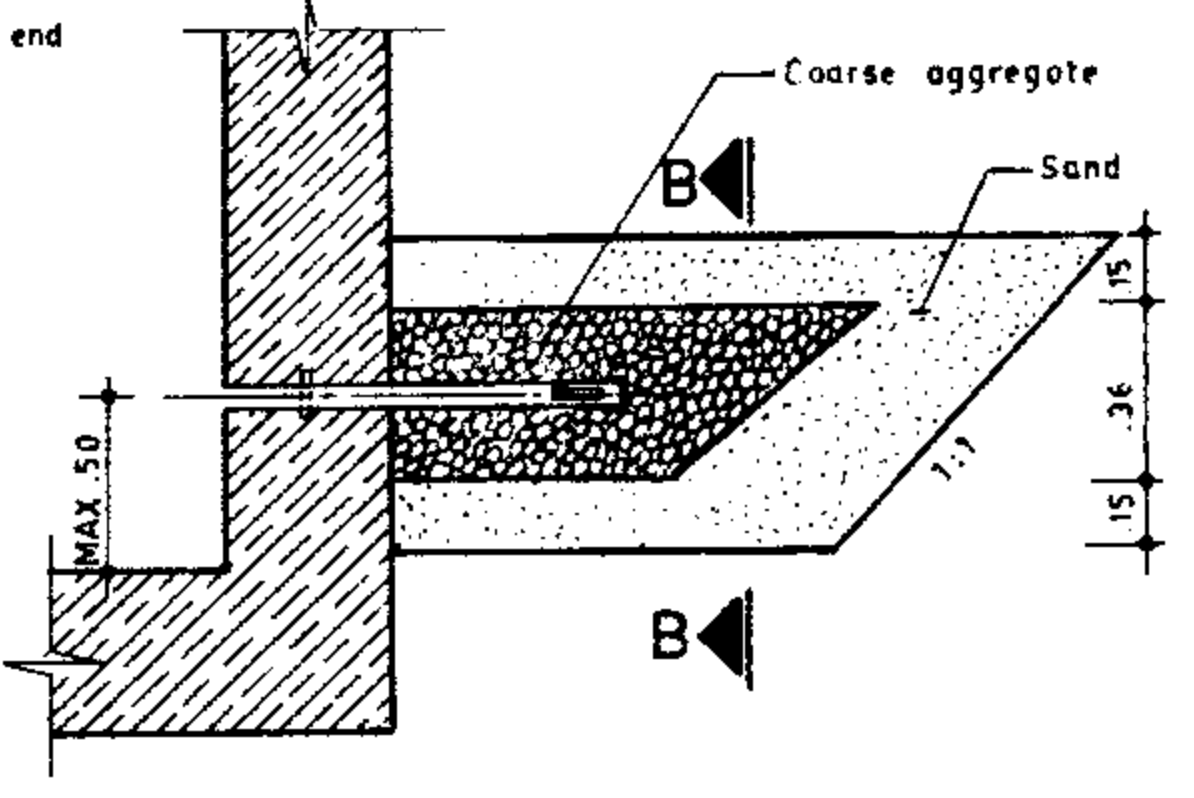


SECTION A-A

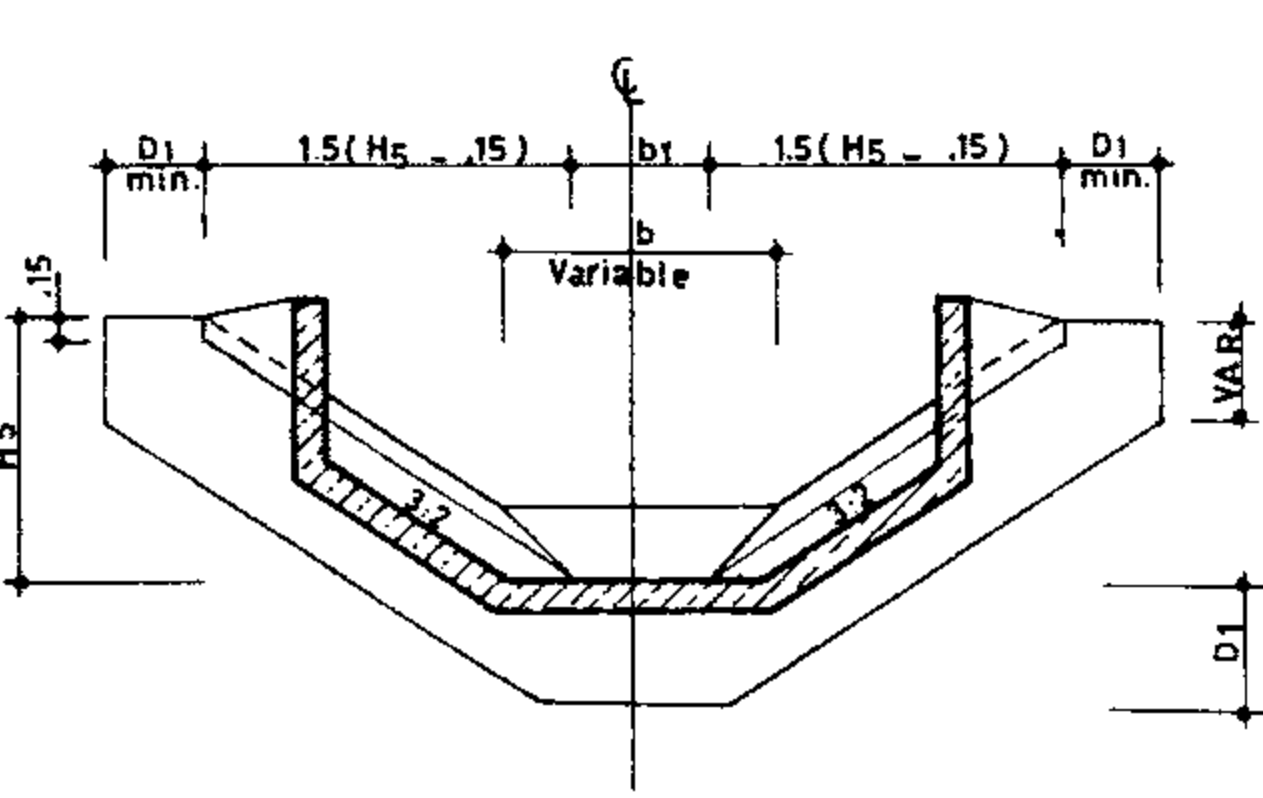

SECTION E-E

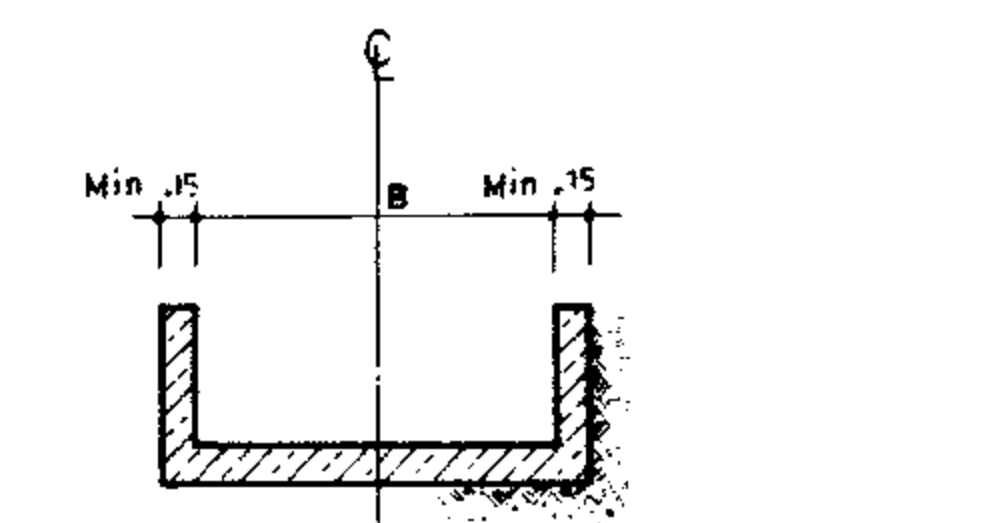

SECTION C-C

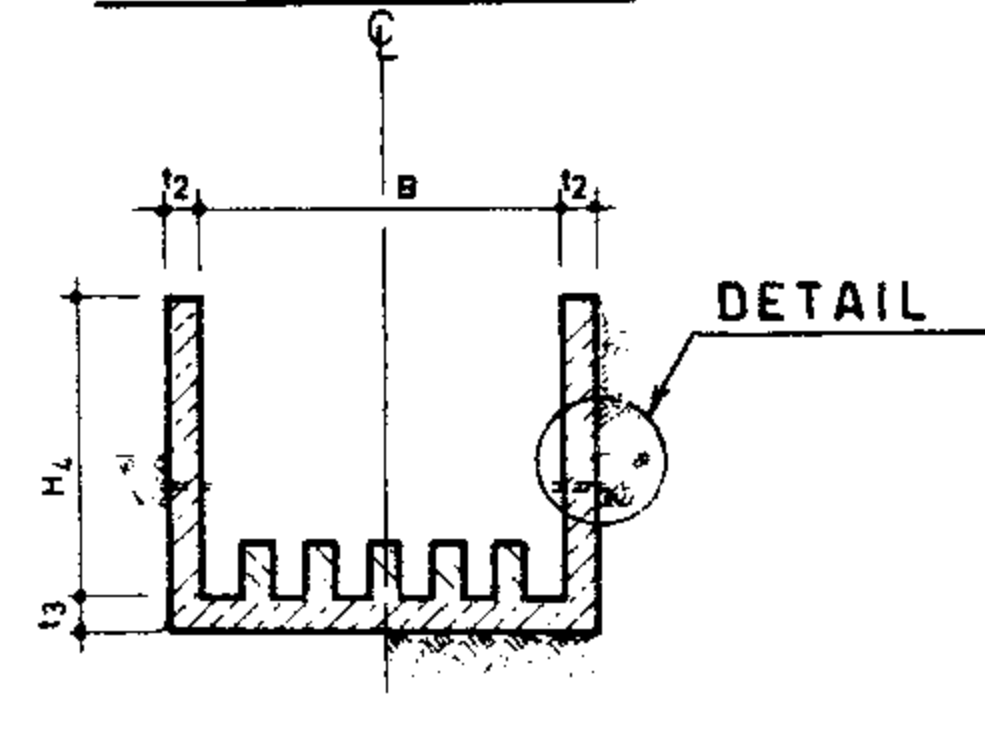

SECTION D-D

REFERENCE DWGS: For dimensions tables see dwgs. No 11/1/2/01 & 11/1/2/02
 For reinforcement see dwgs. No 11/1/3/01 TO 11/1/3/03
 For general notes see dwgs. No 20/2/1/01 TO 20/2/1/03

Scale: N.T.S
 Date:
 Approved


IRRIGATION & DRAINAGE STANDARDS
 DWG. No 11/1/1/01
 Sheet No 2 of 32 Rev No

RECTANGULAR INCLINED DROP
 PLAN & SECTION


ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

STR.	Q m ³ /s	H max. m.	H ₄ m.	H ₅ m.	L ₂ m.	L ₃ m.	L ₄ m.	L ₅ m.	Y ₂ +h _{v2} m.	t ₂ m.	t ₃ m.	h m.	R.B. ^② Kg	Conc. ^③ m ³	Gate m.	F.W. ^④ m ²
200-100	0.20	1.00	0.80	0.80	1.15	2.05	1.80	0.30	0.456	0.15	0.18	0.20	383.64	4.12	100x0.35	36.69
200-150	0.20	1.50	0.85	0.85	1.15	3.20	1.95	0.35	0.497	0.15	0.18	0.20	42916	4.76	/	41.01
200-200	0.20	2.00	0.90	0.90	1.20	4.30	2.10	0.40	0.529	0.15	0.18	0.20	47846	5.40	/	45.46
200-250	0.20	2.50	0.90	0.90	1.30	5.40	2.20	0.40	0.557	0.15	0.18	0.20	51626	5.94	/	48.98
200-300	0.20	3.00	0.95	0.95	1.35	6.50	2.30	0.45	0.578	0.15	0.18	0.20	561.11	6.57	/	53.32
200-350	0.20	3.50	1.00	1.00	1.45	7.55	2.40	0.45	0.599	0.15	0.18	0.20	606.86	7.21	/	57.79
200-400	0.20	4.00	1.00	1.00	1.55	8.60	2.45	0.45	0.618	0.15	0.18	0.20	642.81	7.70	/	61.00
300-100	0.30	1.00	0.85	0.85	1.25	2.05	2.05	0.35	0.525	0.15	0.18	0.20	432.79	4.87	1.15x0.45	42.30
300-150	0.30	1.50	0.95	0.95	1.30	3.20	2.25	0.40	0.571	0.15	0.18	0.20	497.65	5.73	/	48.35
300-200	0.30	2.00	1.00	1.00	1.35	4.30	2.40	0.45	0.608	0.15	0.18	0.20	538.75	6.44	/	53.20
300-250	0.30	2.50	1.05	1.05	1.45	5.40	2.55	0.45	0.636	0.15	0.18	0.20	598.22	7.19	/	58.34
300-300	0.30	3.00	1.05	1.05	1.55	6.50	2.65	0.50	0.665	0.15	0.18	0.20	641.96	7.79	/	62.17
300-350	0.30	3.50	1.10	1.10	1.65	7.55	2.75	0.50	0.688	0.15	0.18	0.20	698.07	8.51	/	67.04
300-400	0.30	4.00	1.15	1.15	1.75	8.60	2.85	0.50	0.709	0.15	0.18	0.20	746.82	9.20	/	71.96
400-100	0.40	1.00	0.95	0.95	1.35	2.05	2.25	0.40	0.574	0.15	0.18	0.20	481.08	5.54	1.30x0.50	47.34
400-150	0.40	1.50	1.00	0.95	1.40	3.20	2.45	0.45	0.624	0.15	0.18	0.20	536.61	6.41	/	53.02
400-200	0.40	2.00	1.05	1.00	1.50	4.30	2.60	0.50	0.662	0.15	0.18	0.20	607.76	7.21	/	58.41
400-250	0.40	2.50	1.10	1.05	1.60	5.40	2.75	0.50	0.695	0.15	0.18	0.20	662.08	8.02	/	63.88
400-300	0.40	3.00	1.15	1.05	1.70	6.50	2.85	0.55	0.723	0.15	0.18	0.20	707.93	8.75	/	68.94
400-350	0.40	3.50	1.20	1.10	1.80	7.55	2.95	0.55	0.748	0.15	0.18	0.20	765.13	9.52	/	74.16
400-400	0.40	4.00	1.20	1.15	1.90	8.60	3.05	0.55	0.771	0.15	0.18	0.20	822.52	10.20	/	78.38
500-100	0.50	1.00	1.00	0.90	1.45	2.05	2.45	0.45	0.621	0.15	0.18	0.20	532.42	6.34	1.40x0.55	52.64
500-150	0.50	1.50	1.10	1.00	1.50	3.20	2.65	0.50	0.671	0.15	0.18	0.20	604.61	7.34	/	59.57
500-200	0.50	2.00	1.15	1.05	1.60	4.30	2.80	0.55	0.714	0.15	0.18	0.20	675.59	8.20	/	65.34
500-250	0.50	2.50	1.20	1.10	1.70	5.40	3.00	0.55	0.752	0.15	0.18	0.20	728.13	9.11	/	71.45
500-300	0.50	3.00	1.25	1.15	1.80	6.50	3.10	0.60	0.779	0.15	0.18	0.25	797.98	9.95	/	77.12
500-350	0.50	3.50	1.25	1.15	1.95	7.55	3.20	0.60	0.807	0.15	0.18	0.25	843.95	10.65	/	81.58
500-400	0.50	4.00	1.30	1.20	2.10	8.60	3.30	0.60	0.834	0.15	0.18	0.25	906.75	11.50	/	87.40
600-100	0.60	1.00	1.05	0.95	1.50	2.05	2.60	0.50	0.661	0.15	0.18	0.20	595.39	6.90	1.50x0.60	56.71
600-150	0.60	1.50	1.15	1.05	1.60	3.20	2.80	0.55	0.716	0.15	0.18	0.20	673.40	7.99	/	64.23
600-200	0.60	2.00	1.20	1.10	1.70	4.30	3.00	0.60	0.761	0.15	0.18	0.20	740.99	8.93	/	70.57
600-250	0.60	2.50	1.25	1.15	1.80	5.40	3.15	0.60	0.797	0.15	0.18	0.25	805.67	9.87	/	76.97
600-300	0.60	3.00	1.30	1.15	1.95	6.50	3.30	0.65	0.827	0.15	0.18	0.25	878.36	10.76	/	83.22
600-350	0.60	3.50	1.35	1.20	2.10	7.55	3.40	0.65	0.854	0.15	0.18	0.25	950.15	11.65	/	89.33
600-400	0.60	4.00	1.35	1.20	2.20	8.60	3.50	0.65	0.884	0.15	0.18	0.25	1001.31	12.37	/	93.84
700-100	0.70	1.00	1.10	1.00	1.55	2.05	2.70	0.55	0.691	0.15	0.18	0.20	520.89	7.46	1.60x0.65	60.66
700-150	0.70	1.50	1.20	1.10	1.70	3.20	2.95	0.60	0.748	0.15	0.18	0.20	704.60	8.67	/	69.04
700-200	0.70	2.00	1.25	1.15	1.80	4.30	3.15	0.65	0.795	0.15	0.18	0.20	778.99	9.66	/	75.69
700-250	0.70	2.50	1.30	1.15	1.90	5.40	3.30	0.65	0.831	0.15	0.18	0.25	834.37	10.58	/	82.17
700-300	0.70	3.00	1.35	1.20	2.05	6.50	3.40	0.70	0.864	0.15	0.18	0.25	927.73	11.55	/	88.68
700-350	0.70	3.50	1.40	1.25	2.20	7.55	3.55	0.70	0.896	0.15	0.18	0.25	982.81	12.53	/	95.38
700-400	0.70	4.00	1.40	1.25	2.30	8.60	3.65	0.70	0.923	0.15	0.18	0.25	1040.27	13.29	/	100.14
800-100	0.80	1.00	1.15	1.00	1.60	2.05	2.90	0.60	0.744	0.15	0.18	0.20	657.88	8.18	1.60x0.70	64.44
800-150	0.80	1.50	1.25	1.10	1.75	3.20	3.15	0.65	0.805	0.15	0.18	0.20	746.16	9.09	/	73.04
800-200	0.80	2.00	1.30	1.15	1.85	4.30	3.35	0.70	0.854	0.15	0.18	0.25	826.26	10.12	/	80.13
800-250	0.80	2.50	1.40	1.25	2.00	5.40	3.50	0.70	0.893	0.15	0.18	0.25	902.88	11.28	/	88.41
800-300	0.80	3.00	1.45	1.25	2.15	6.50	3.70	0.75	0.929	0.15	0.18	0.25	978.39	12.27	/	95.46
800-350	0.80	3.50	1.50	1.35	2.30	7.55	3.80	0.75	0.962	0.15	0.18	0.25	1050.67	13.29	/	102.28
800-400	0.80	4.00	1.50	1.35	2.40	8.60	3.95	0.75	0.992	0.15	0.18	0.25	1107.96	14.10	/	107.42


STR.	Q m ³ /s	H max. m.	H ₄ m.	H ₅ m.	L ₂ m.	L ₃ m.	L ₄ m.	L ₅ m.	Y ₂ +h _{v2} m.	t ₂ m.	t ₃ m.	h m.	R.B. ^② Kg	Conc. ^③ m ³	Gate m.	F.W. ^④ m ²
900-100	0.90	1.00	1.20	1.05	1.70	2.05	3.00	0.65	0.768	0.15	0.18	0.20	687.92	8.56	1.70 x 0.70	68.71
900-150	0.90	1.50	1.30	1.15	1.80	3.20	3.25	0.70	0.831	0.15	0.18	0.20	782.75	9.79	/	77.20
900-200	0.90	2.00	1.35	1.20	1.90	4.30	3.45	0.75	0.882	0.15	0.18	0.25	862.08	10.85	/	84.38
900-250	0.90	2.50	1.40	1.25	2.10	5.40	3.65	0.75	0.921	0.15	0.18	0.25	942.31	11.97	/	91.87
900-300	0.90	3.00	1.45	1.25	2.20	6.50	3.80	0.80	0.958	0.15	0.18	0.25	1010.86	12.92	/	98.40
900-350	0.90	3.50	1.50	1.35	2.40	7.55	3.95	0.80	0.992	0.15	0.18	0.25	1076.44	14.04	/	105.82
900-400	0.90	4.00	1.55	1.35	2.50	8.60	4.05	0.80	1.018	0.15	0.18	0.25	1153.40	14.93	/	112.01
1000-100	1.00	1.00	1.25	1.10	1.75	2.05	3.15	0.70	0.815	0.15	0.18	0.20	726.13	9.37	1.70 x 0.75	74.61
1000-150	1.00	1.50	1.35	1.20	1.85	3.20	3.45	0.75	0.879	0.15	0.18	0.25	820.89	10.71	/	83.93
1000-200	1.00	2.00	1.45	1.30	2.00	4.30	3.65	0.80	0.930	0.15	0.18	0.25	910.40	11.97	/	92.75
1000-250	1.00	2.50	1.50	1.35	2.15	5.40	3.85	0.80	0.975	0.15	0.18	0.25	976.14	13.07	/	100.21
1000-300	1.00	3.00	1.55	1.40	2.30	6.50	4.00	0.85	1.008	0.15	0.18	0.30	1081.62	14.17	/	107.79
1000-350	1.00	3.50	1.65	1.45	2.50	7.55	4.15	0.85	1.046	0.15	0.18	0.30	1145.70	15.37	/	115.19
1000-400	1.00	4.00	1.65	1.50	2.60	8.60	4.25	0.85	1.079	0.15	0.18	0.30	1221.66	16.24	/	121.79
1200-100	1.20	1.00	1.30	1.15	1.85	2.05	3.35	0.75	0.859	0.15	0.18	0.25	820.88	10.52	1.85 x 0.80	81.54
1200-150	1.20	1.50	1.40	1.25	2.00	3.20	3.60	0.80	0.926	0.15	0.18	0.25	923.50	11.91	/	90.99
1200-200	1.20	2.00	1.50	1.35	2.10	4.30	3.85	0.85	0.979	0.15	0.18	0.25	1003.39	13.25	/	100.26
1200-250	1.20	2.50	1.55	1.40	2.25	5.40	4.05	0.85	1.027	0.15	0.18	0.30	1099.45	14.46	/	108.43
1200-300	1.20	3.00	1.60	1.40	2.45	6.50	4.20	0.90	1.064	0.15	0.18	0.30	1181.38	15.56	/	116.02
1200-350	1.20	3.50	1.65	1.45	2.60	7.55	4.35	0.90	1.103	0.15	0.18	0.30	1249.02	16.67	/	123.49
1200-400	1.20	4.00	1.70	1.50	2.75	8.60	4.45	0.90	1.128	0.18	0.18	0.30	1373.19	18.53	/	131.20
1400-100	1.40	1.00	1.35	1.20	1.90	2.05	3.45	0.75	0.854	0.15	0.18	0.25	859.27	11.21	2.00 x 0.85	85.71
1400-150	1.40	1.50	1.45	1.30	2.10	3.20	3.75	0.80	0.964	0.15						

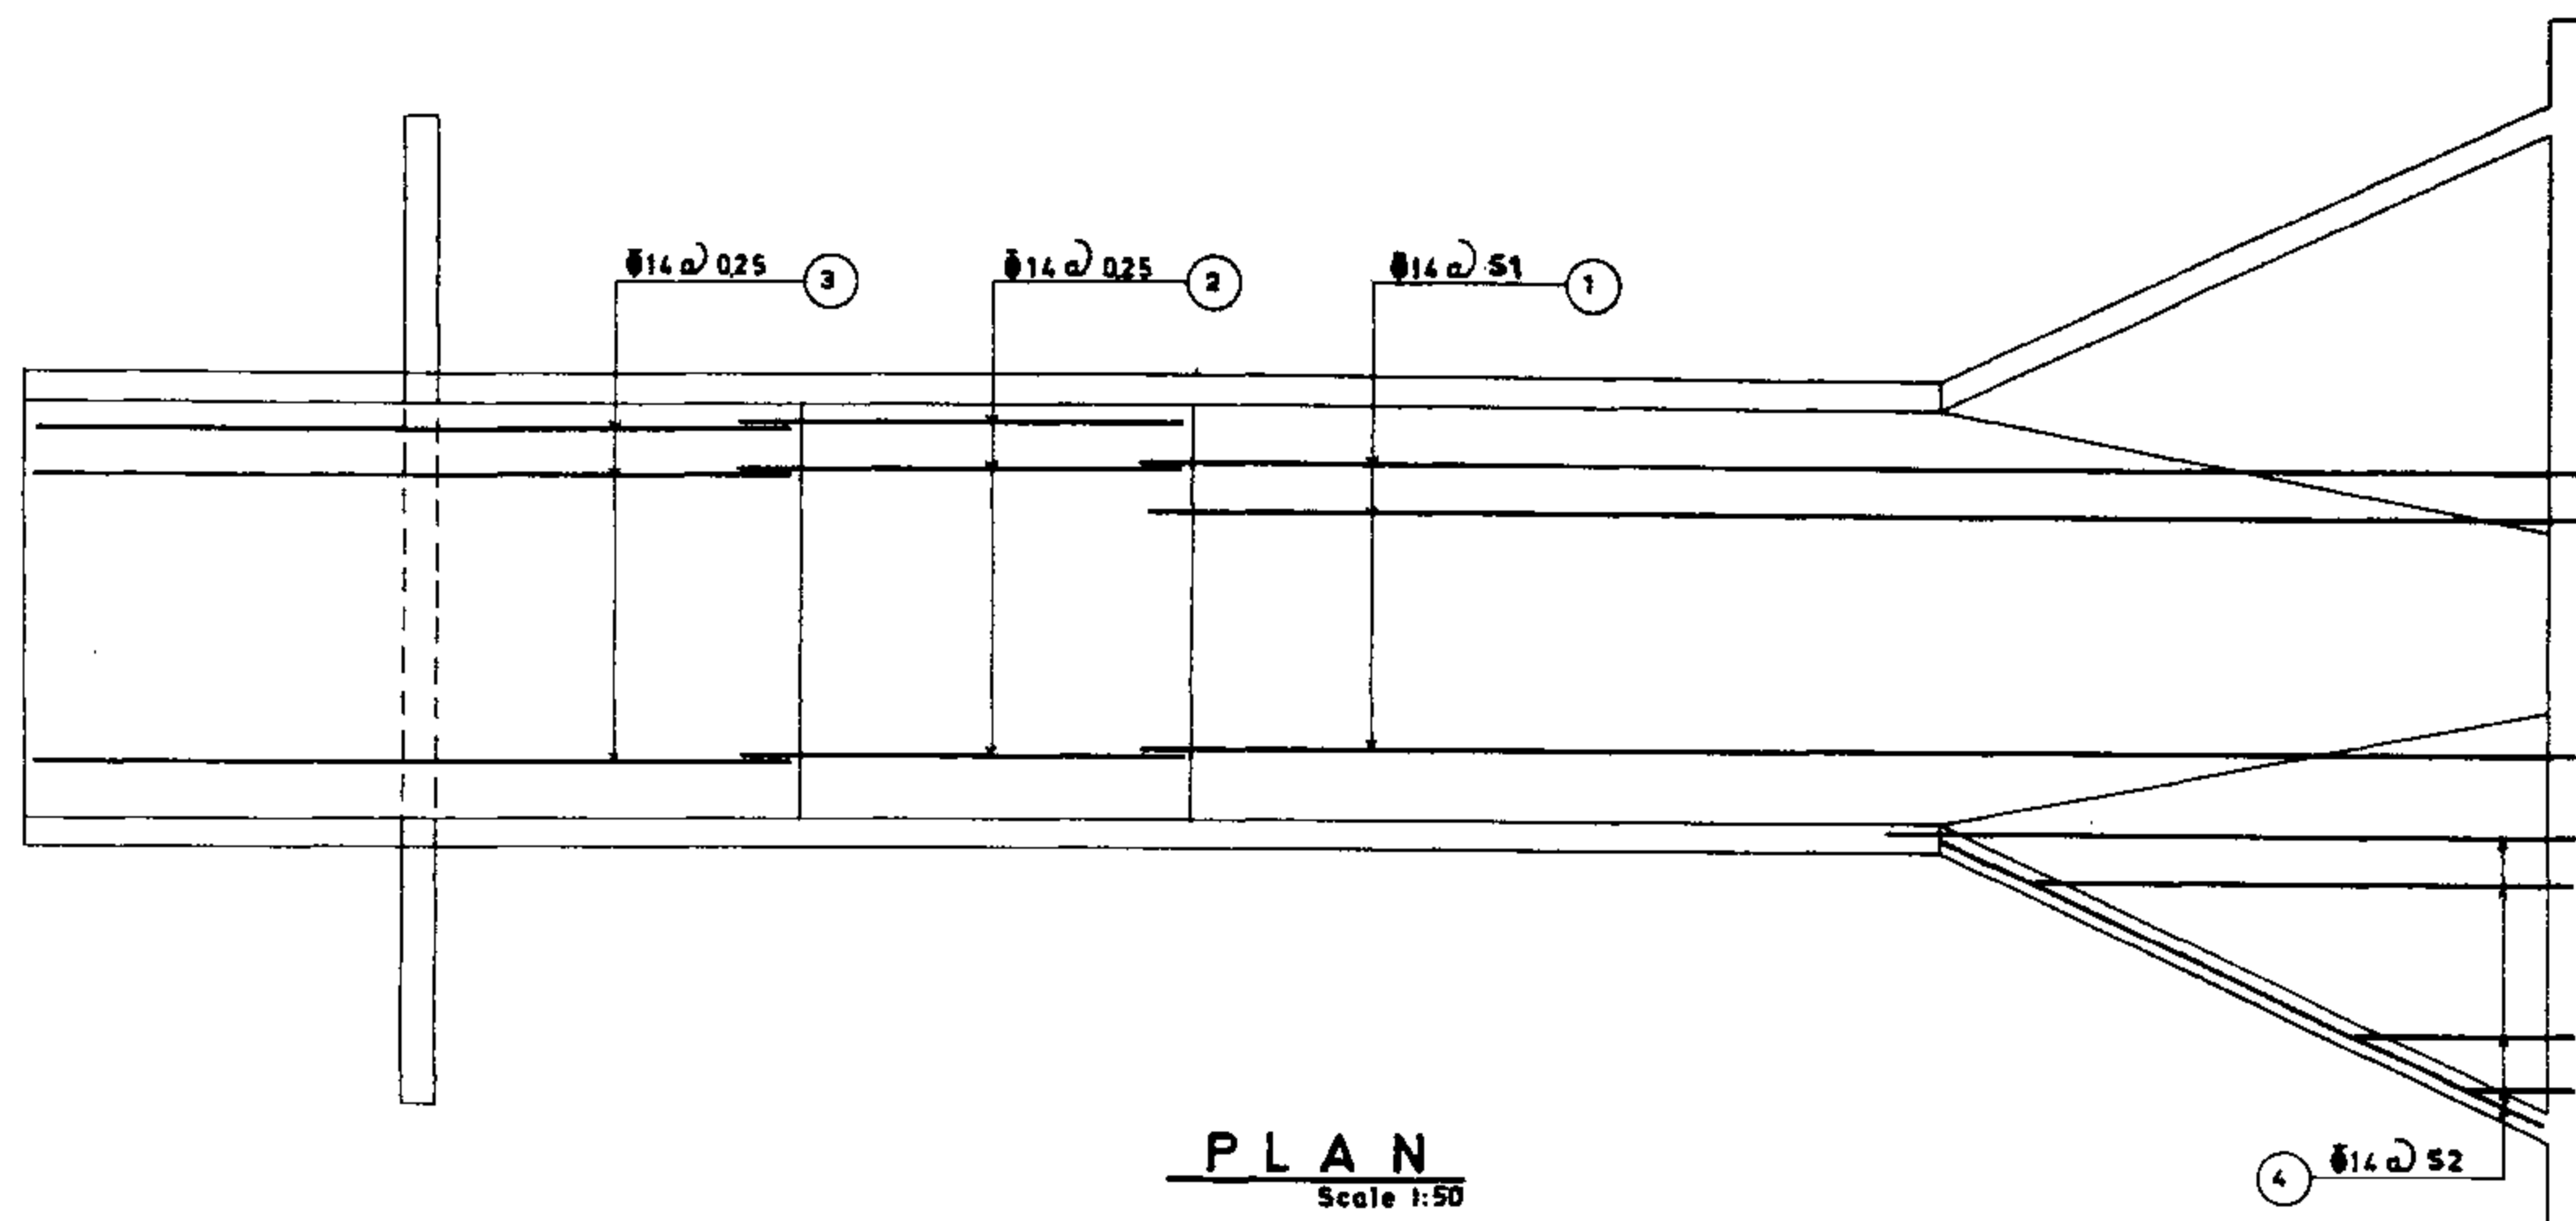


PLAN
Scale 1:50

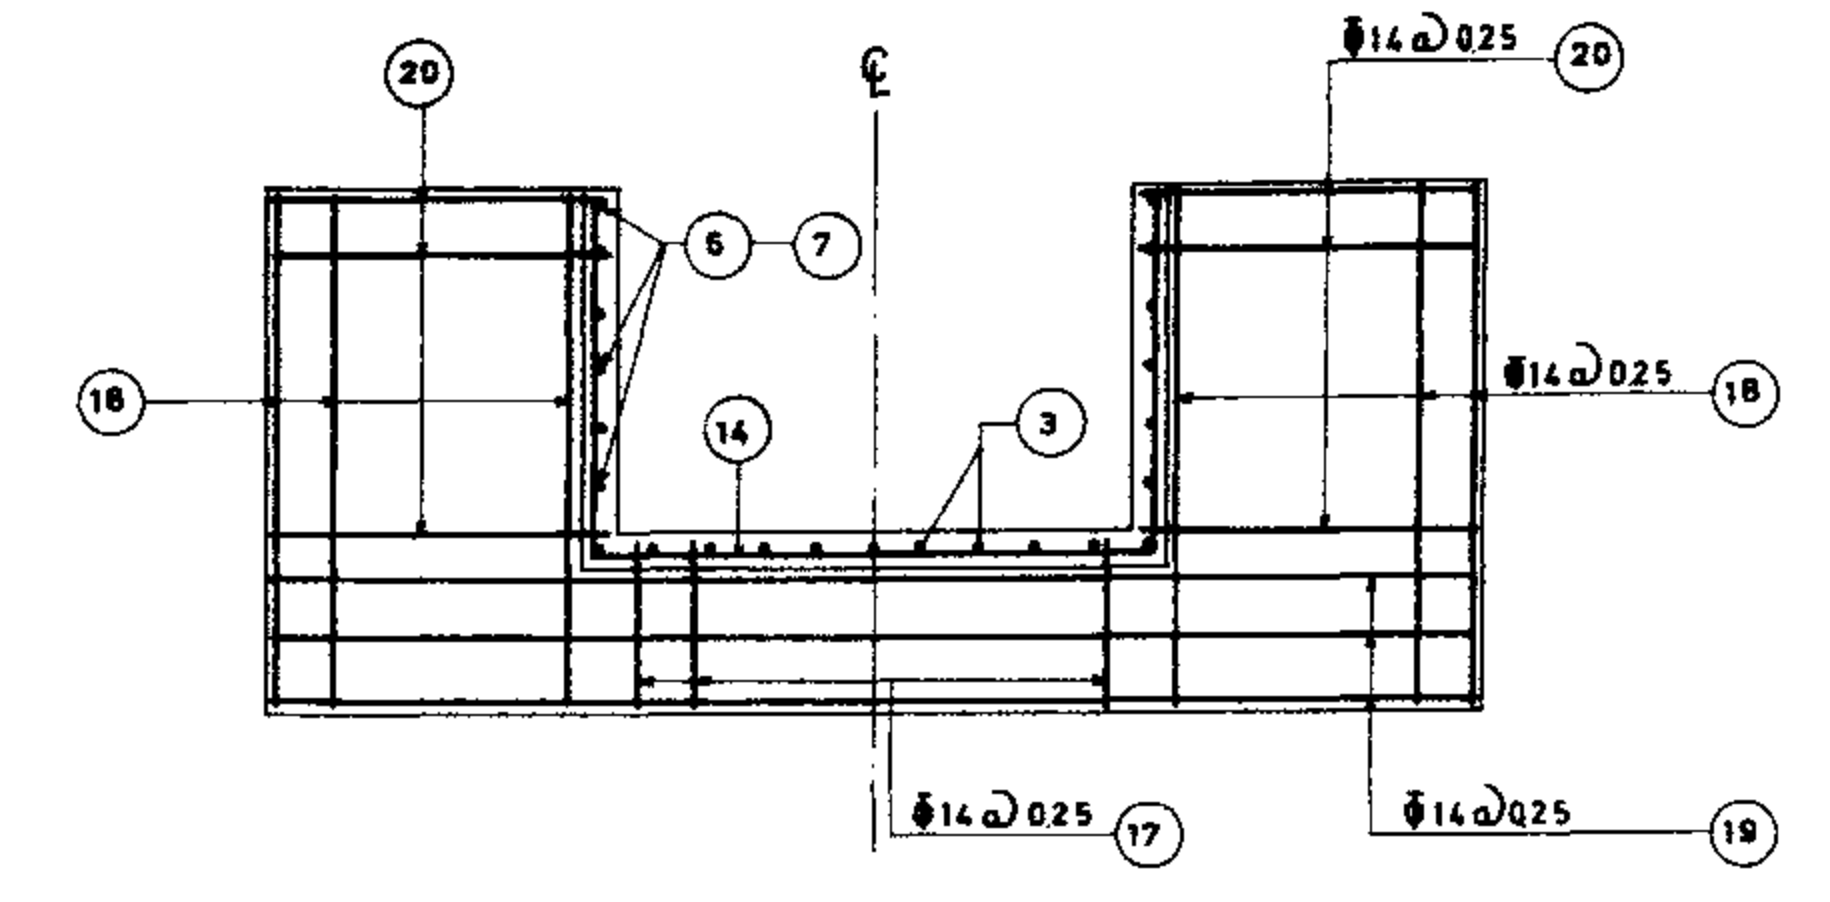


SECTION B_B
Scale 1:50

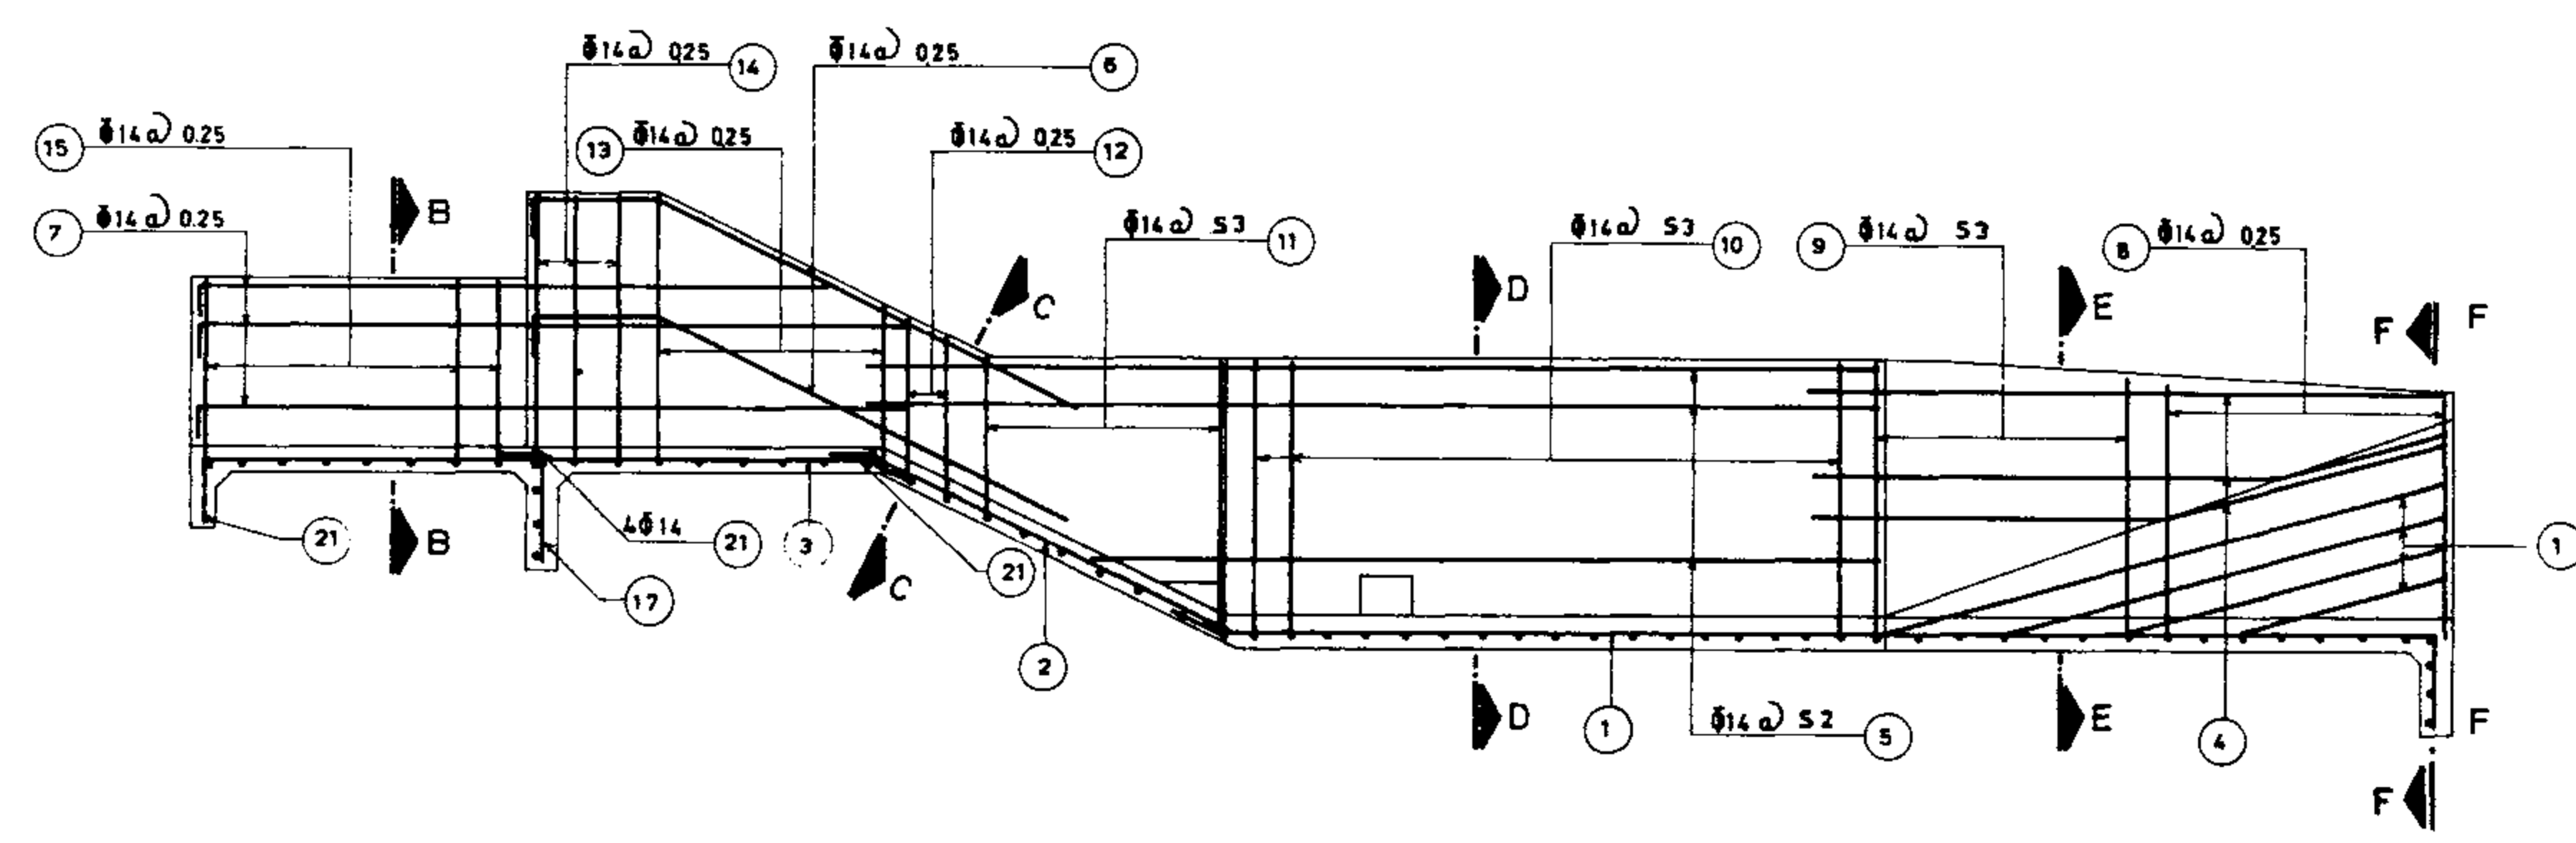


LONGITUDINAL SECTION
Scale 1:50

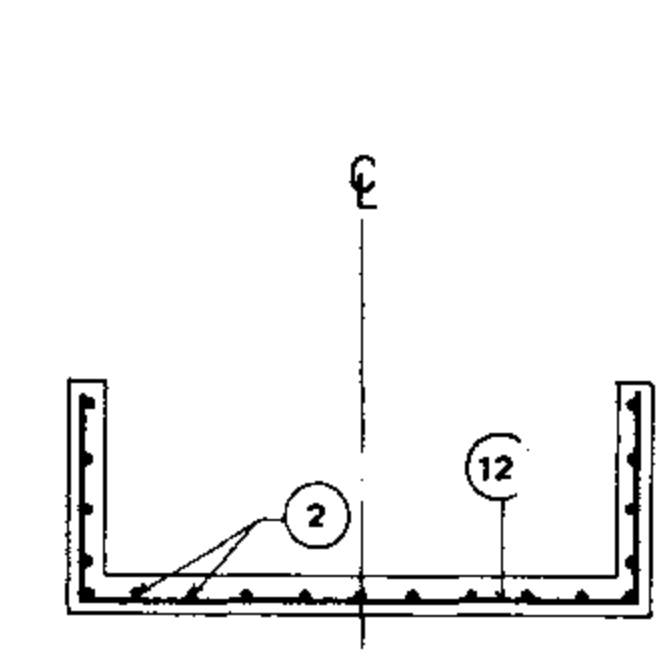


SECTION C_C
Scale 1:50

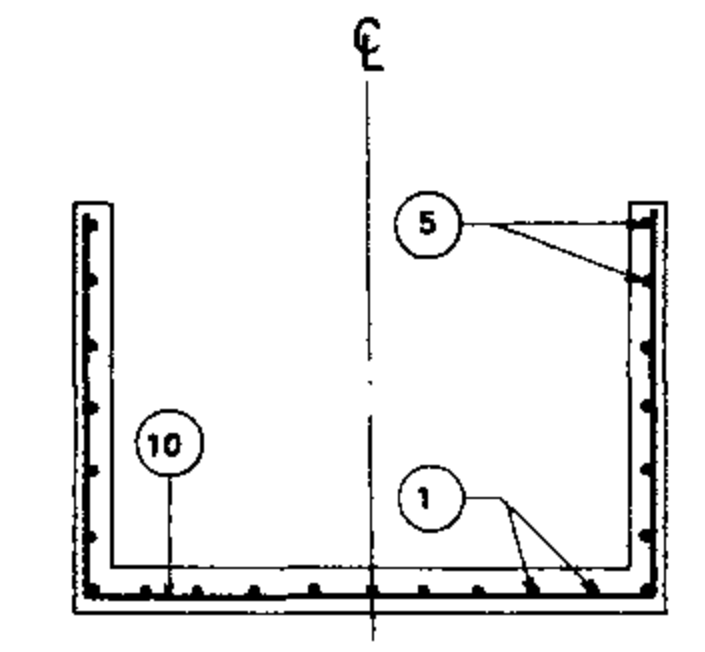

SECTION D_D
Scale 1:50

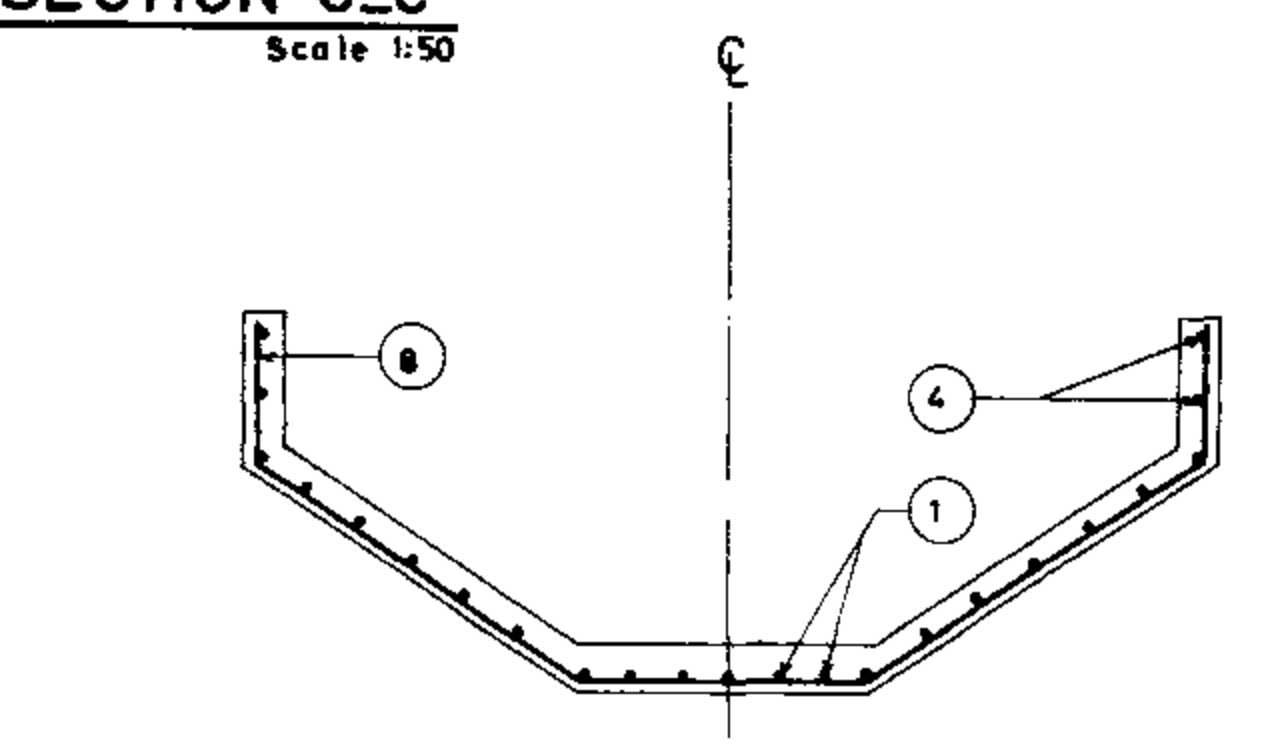


SECTION E_E
Scale 1:50

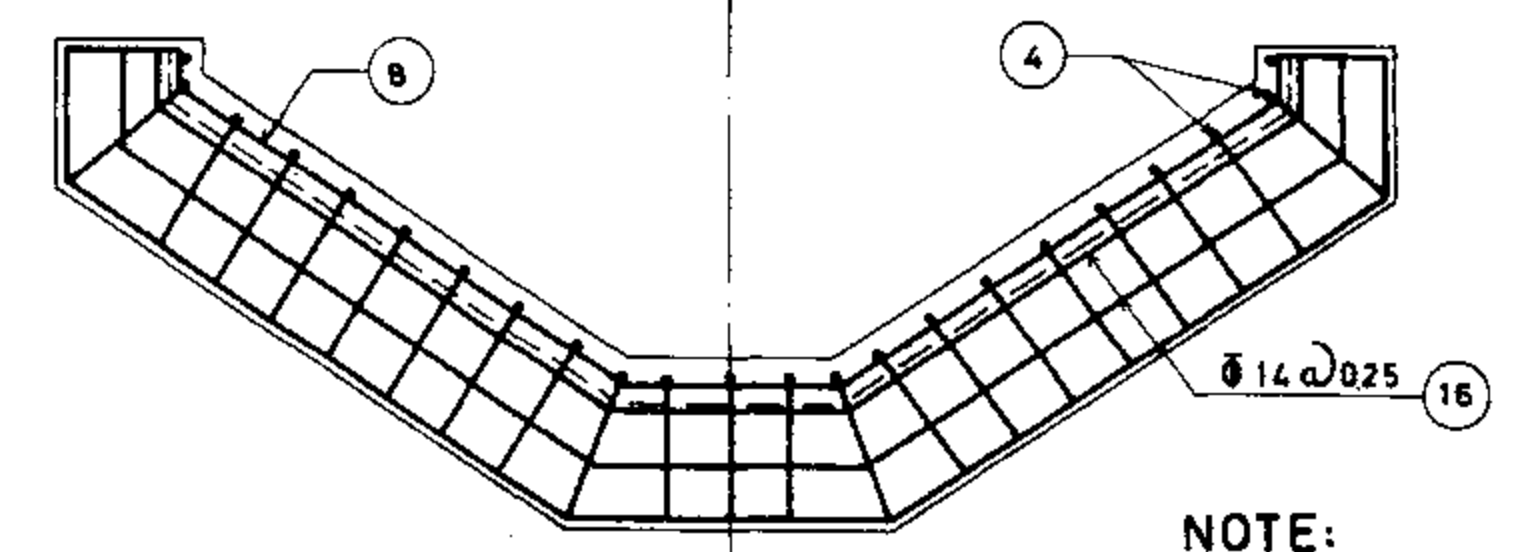

SECTION F_F
Scale 1:50

PARAMETRIC BAR SPACING

H4	S ₁	S ₂	S ₃
0.80 < H4 < 1.65	0.22	0.25	0.22
1.65 < H4 < 1.75	0.22	0.22	0.22
1.75 < H4 < 1.85	0.22	0.22	0.18

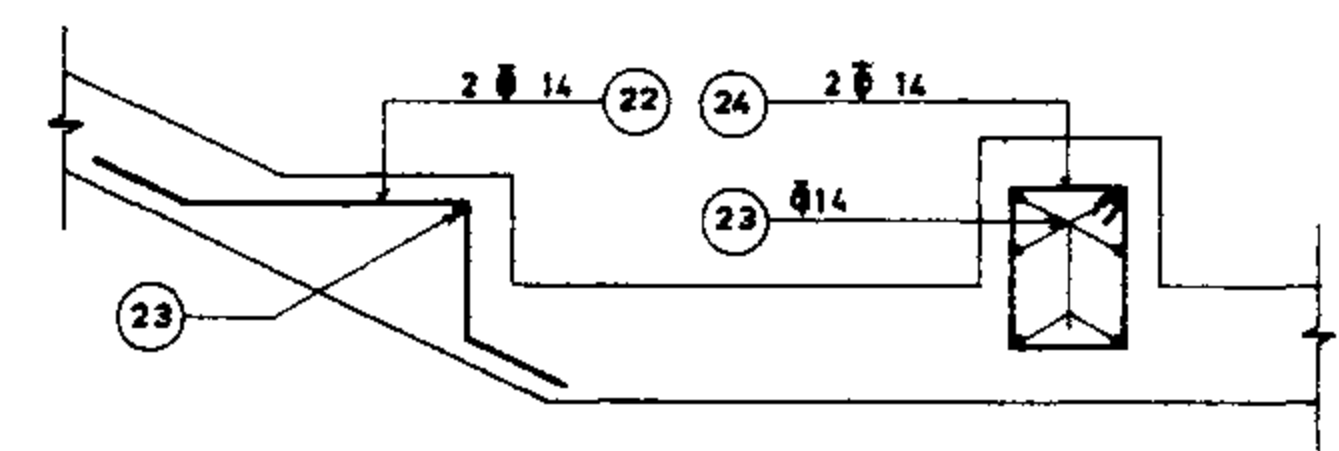

BAFFLE REINFORCEMENT DETAIL

NOTE:


- 1) Use this dwg. for $0.80 < H4 < 1.85$
- 2) For concrete & reinforcement specification see dwg. No.

REFERENCE DWGS: For dimensions see dwgs. No. 11/1/2/01 & 11/1/2/02
 For list of reinforcement see dwgs. No. 11/1/3/04 TO 11/1/3/28


Scale: 1:20 1:50
 Date:
 Approved:

IRRIGATION & DRAINAGE STANDARDS
 DWG. No. 11/1/3/01
 Sheet No. 5 of 32 Rev. No.

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

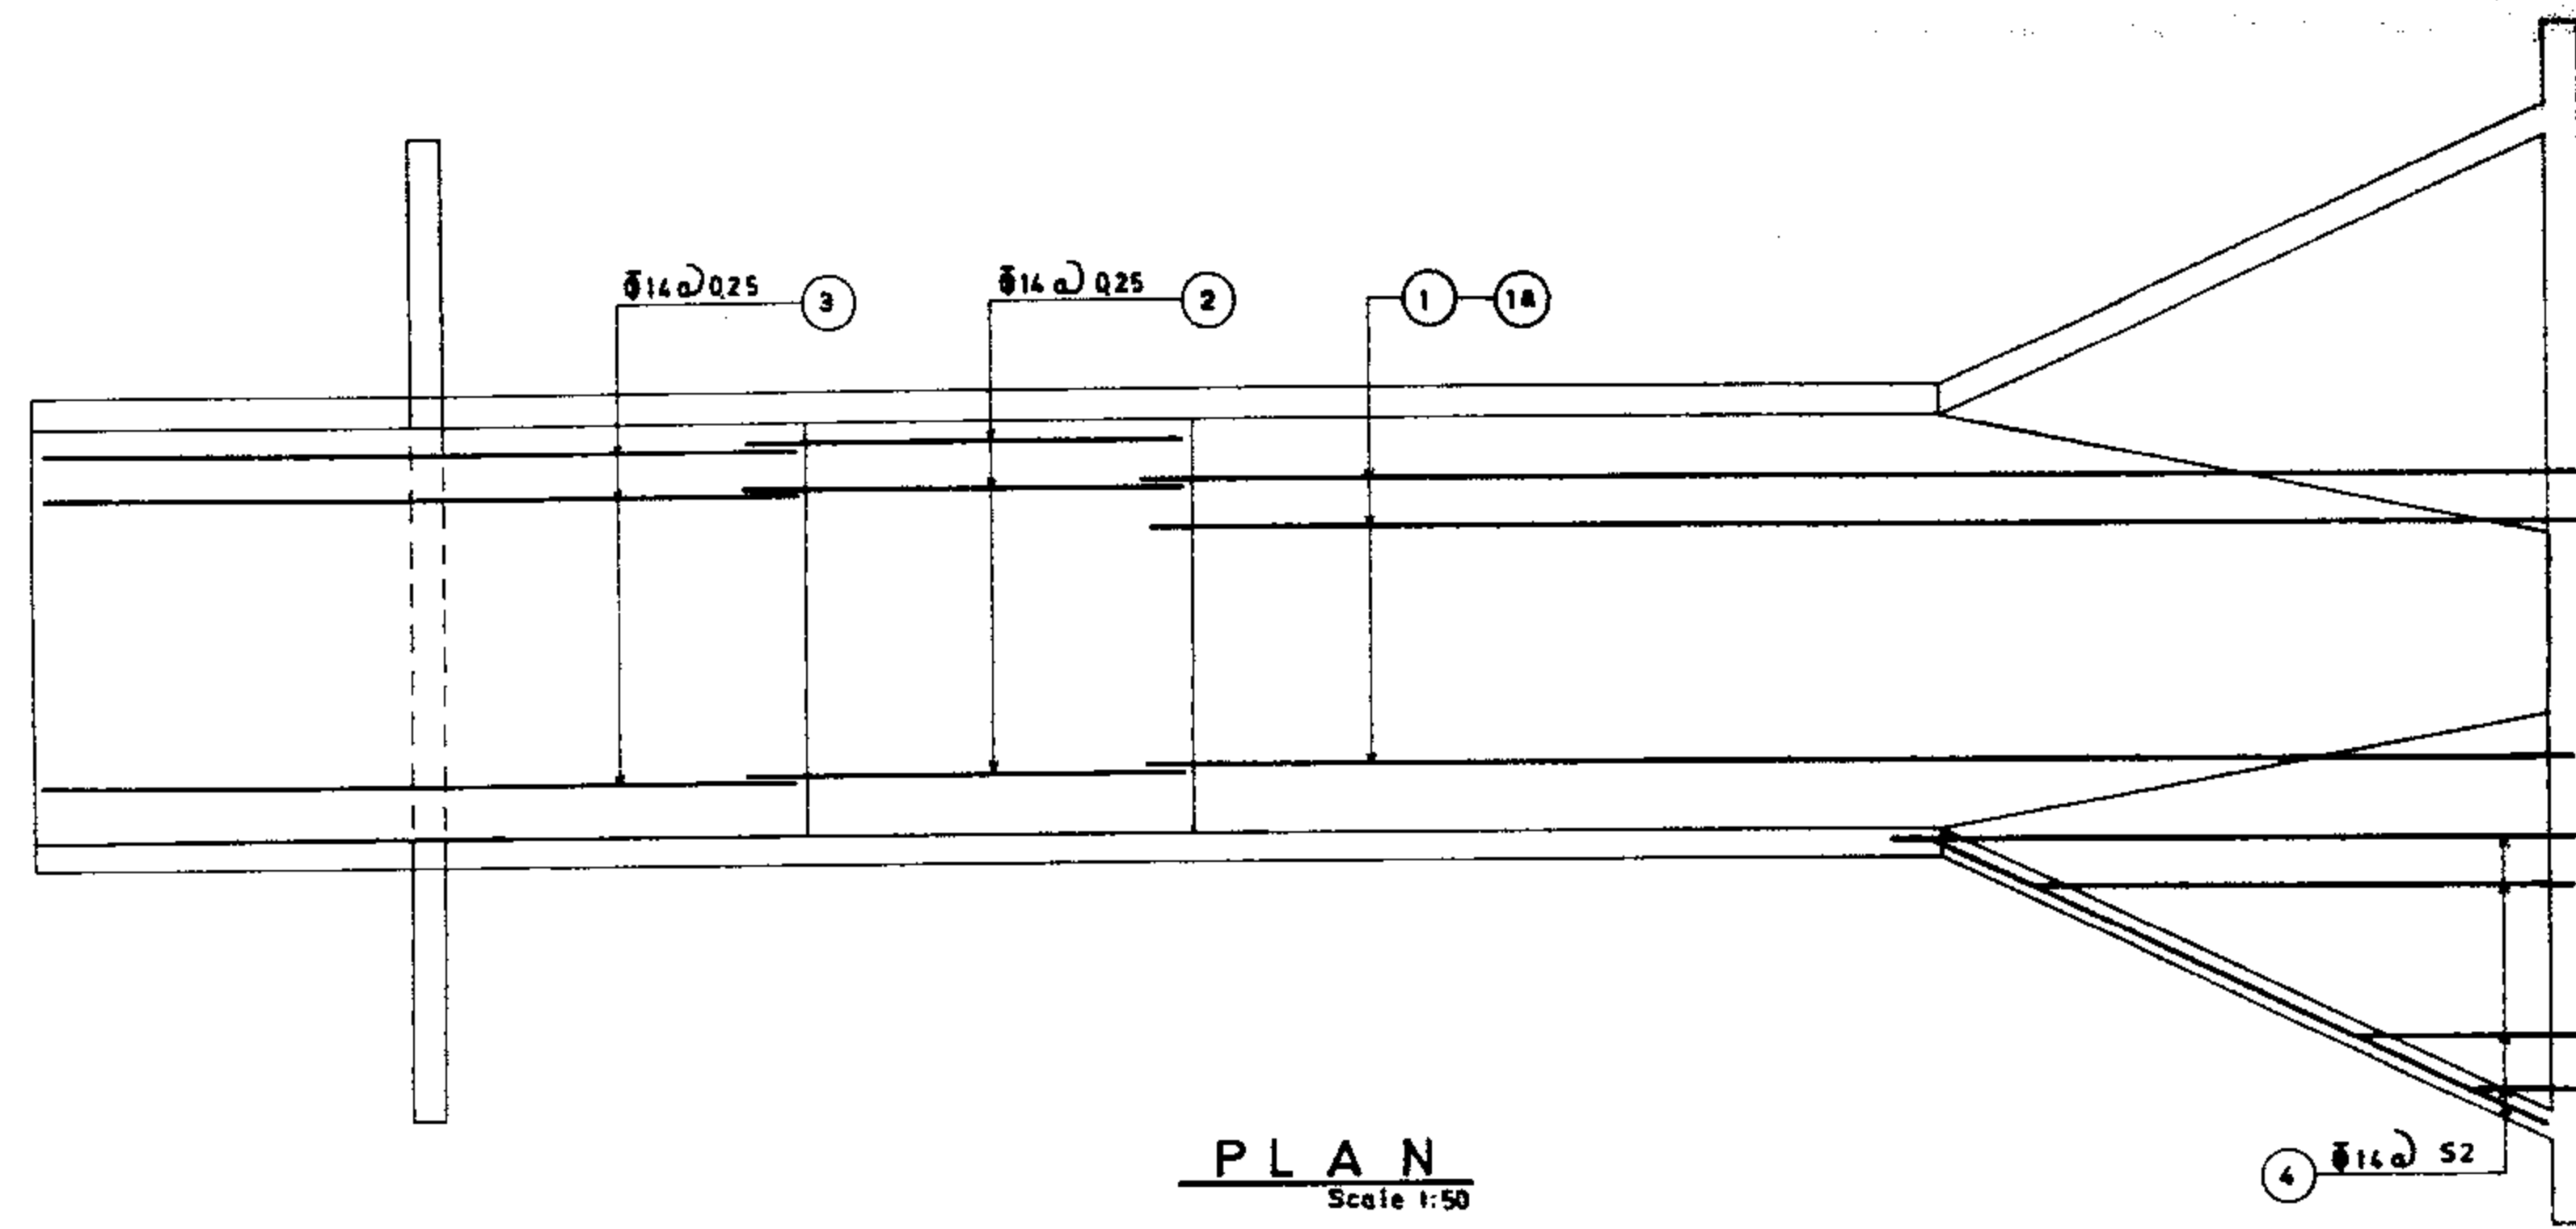


PLAN
Scale 1:50

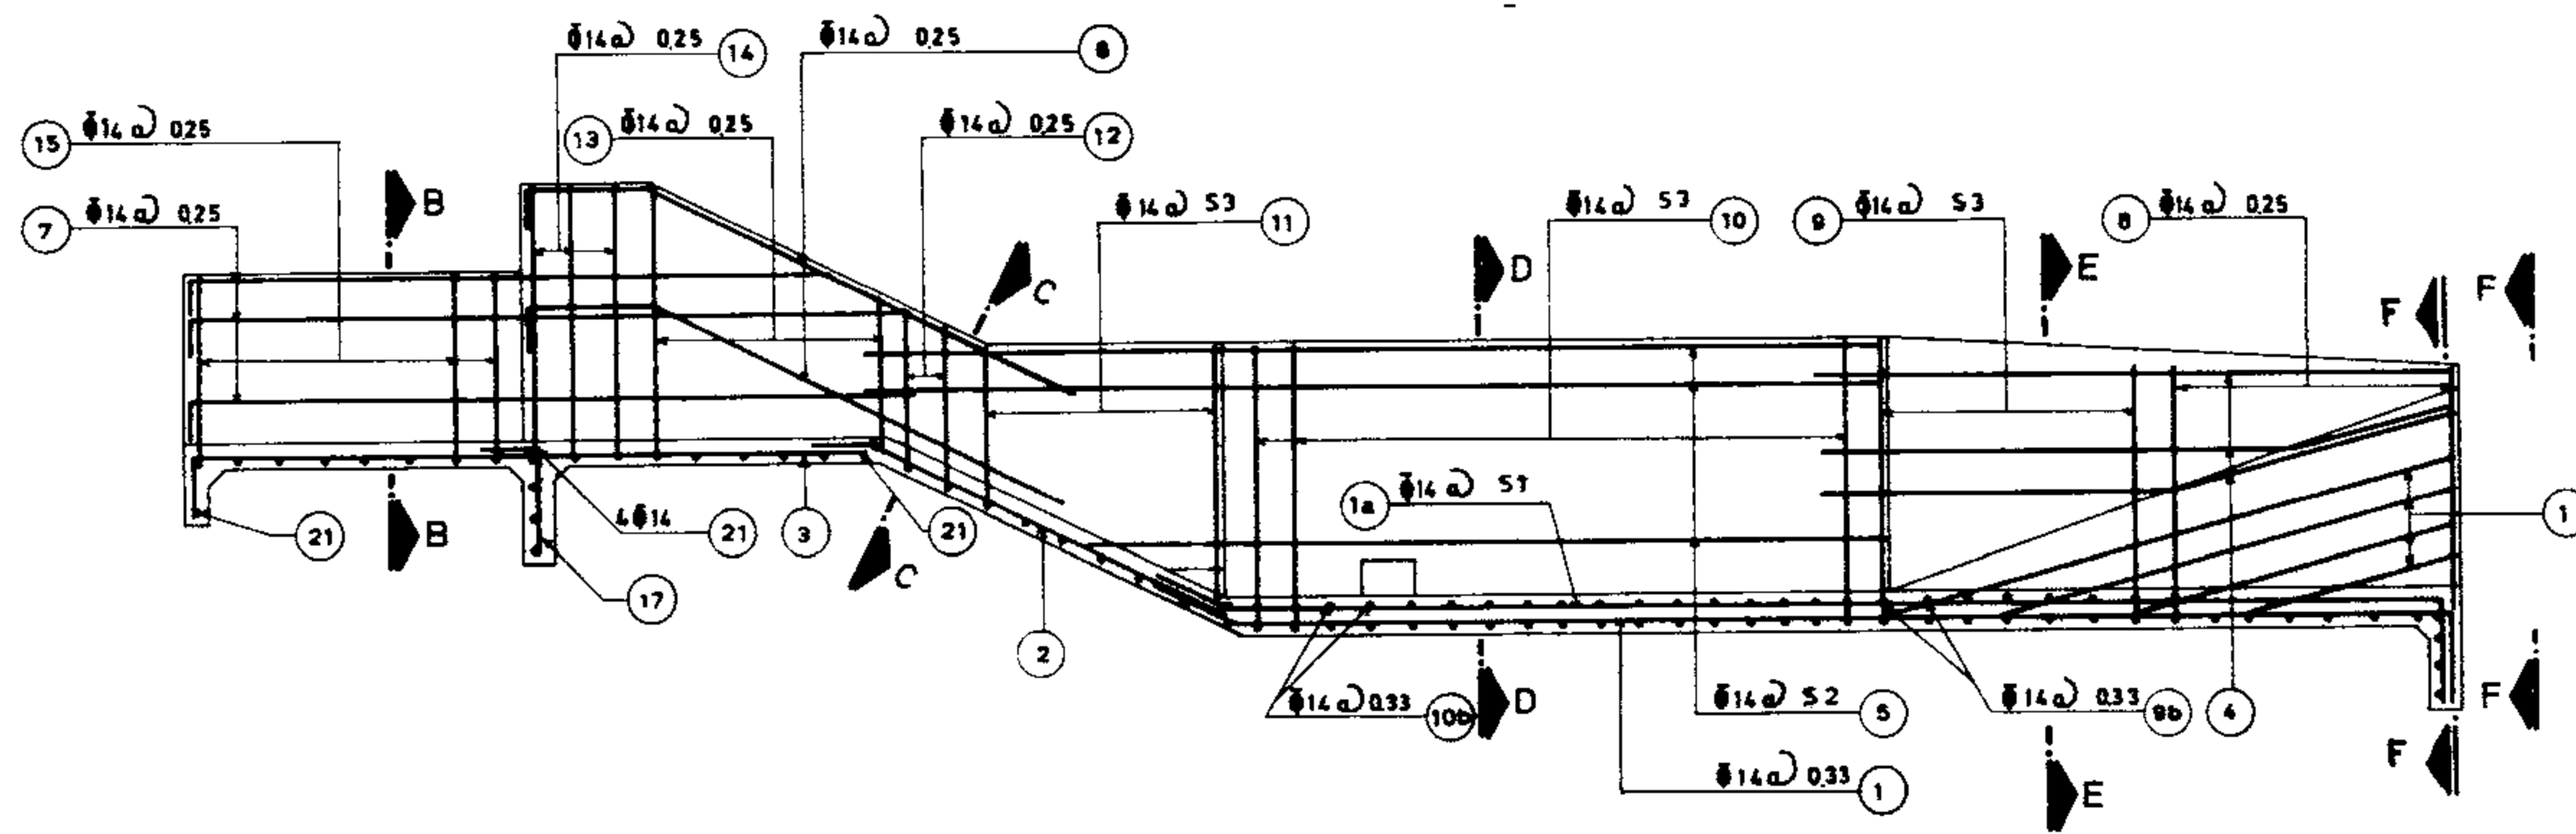


LONGITUDINAL SECTION
Scale 1:50

PARAMETRIC BAR SPACING


H4	S1	S2	S3
1.85 < H4 ≤ 1.95	0.30	0.22	0.18

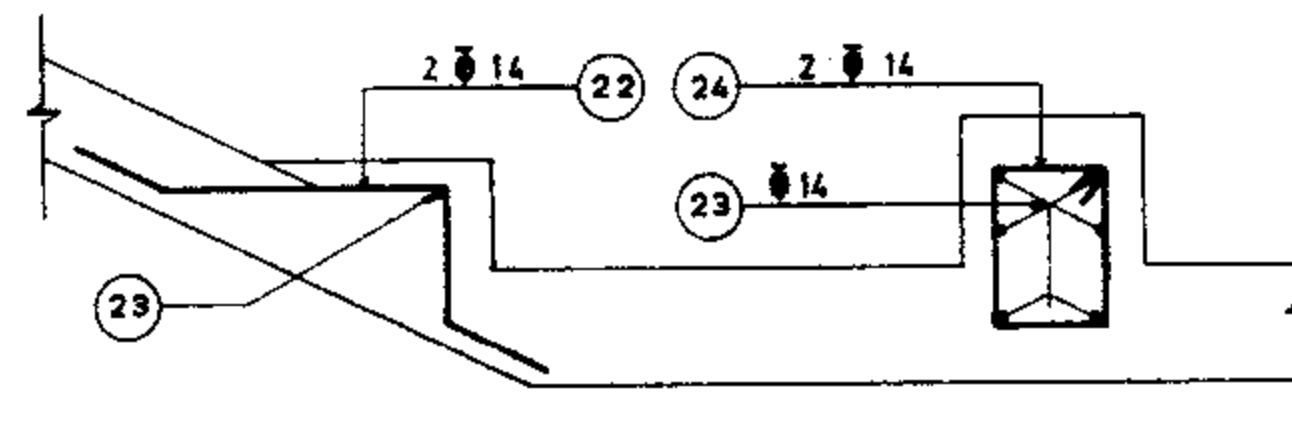


BAFFLE REINFORCEMENT DETAIL

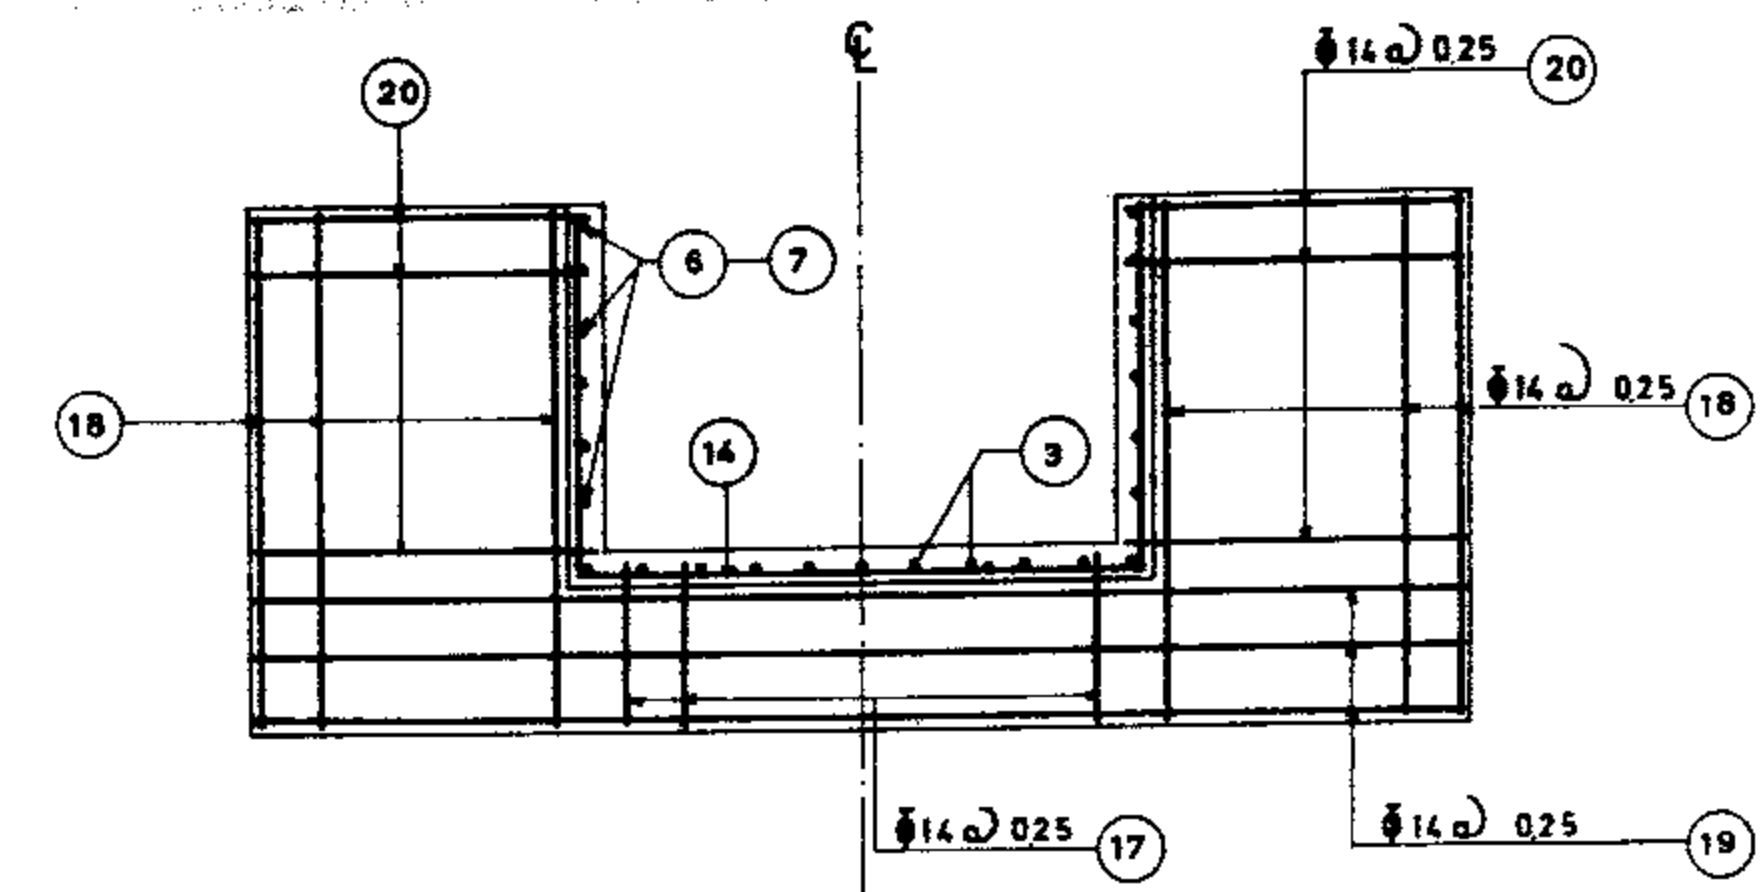


SECTION B_B
Scale 1:50

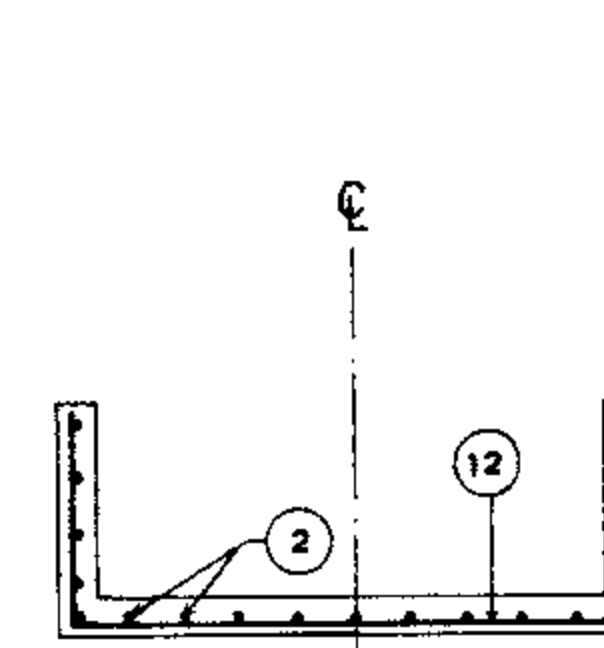


SECTION C_C
Scale 1:50

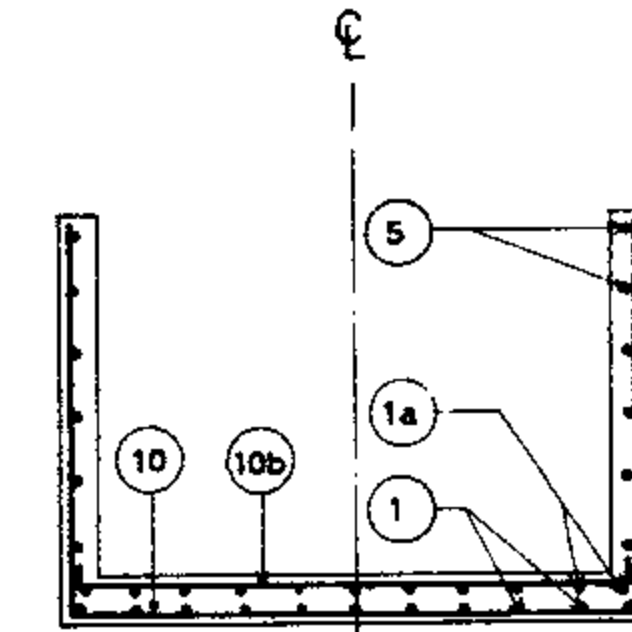

SECTION D_D
Scale 1:50

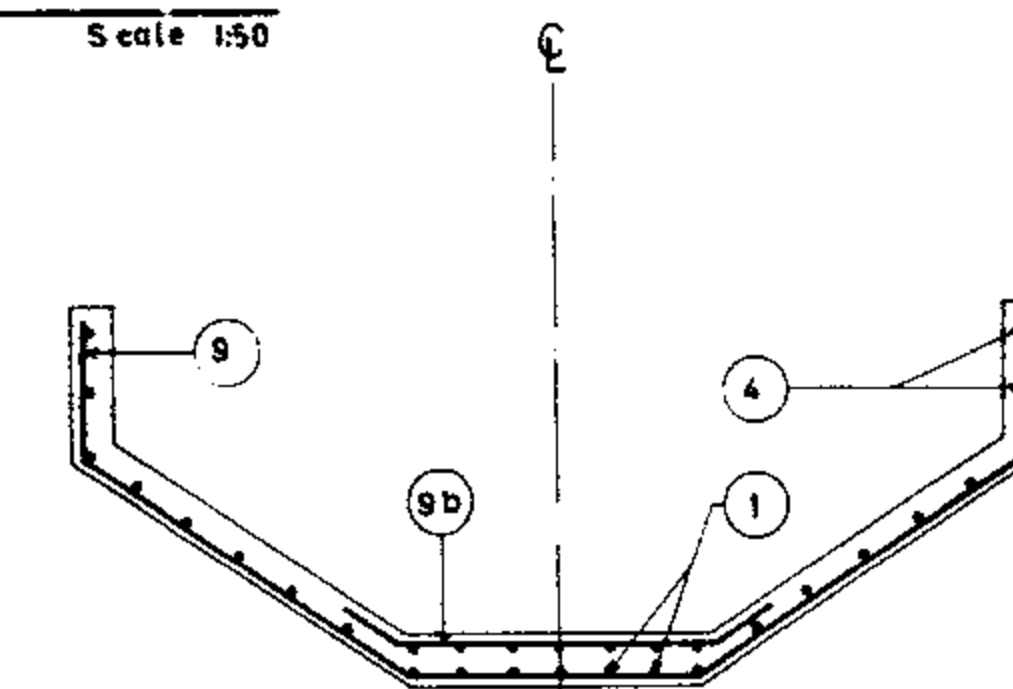

SECTION E_E
Scale 1:50

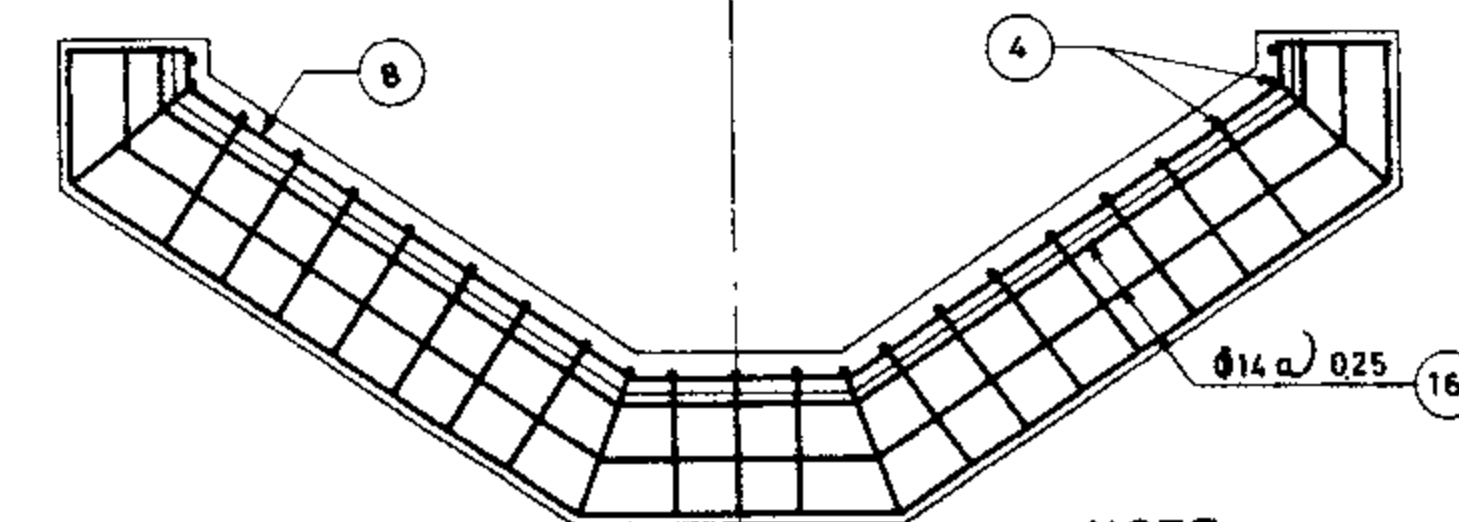

SECTION F_F
Scale 1:50

NOTE:

- 1) Use this dwg. for $1.85 < H4 \leq 1.95$
- 2) For concrete & reinforcement specification see dwg. No.

REFERENCE DWGS: For dimensions see dwgs. 11/1/2/01 & 11/1/2/02
For list of reinforcement see dwgs. 11/1/3/04 TO 11/1/3/28

Scale: 1:20 1:50



Date:
Approved:

DWG. NO. 11/1/3/02
Sheet No. 6 of 32 Rev. NO.

IRRIGATION & DRAINAGE STANDARDS






**RECTANGULAR INCLINED DROP
REINFORCEMENT
PLAN & SECTION**

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

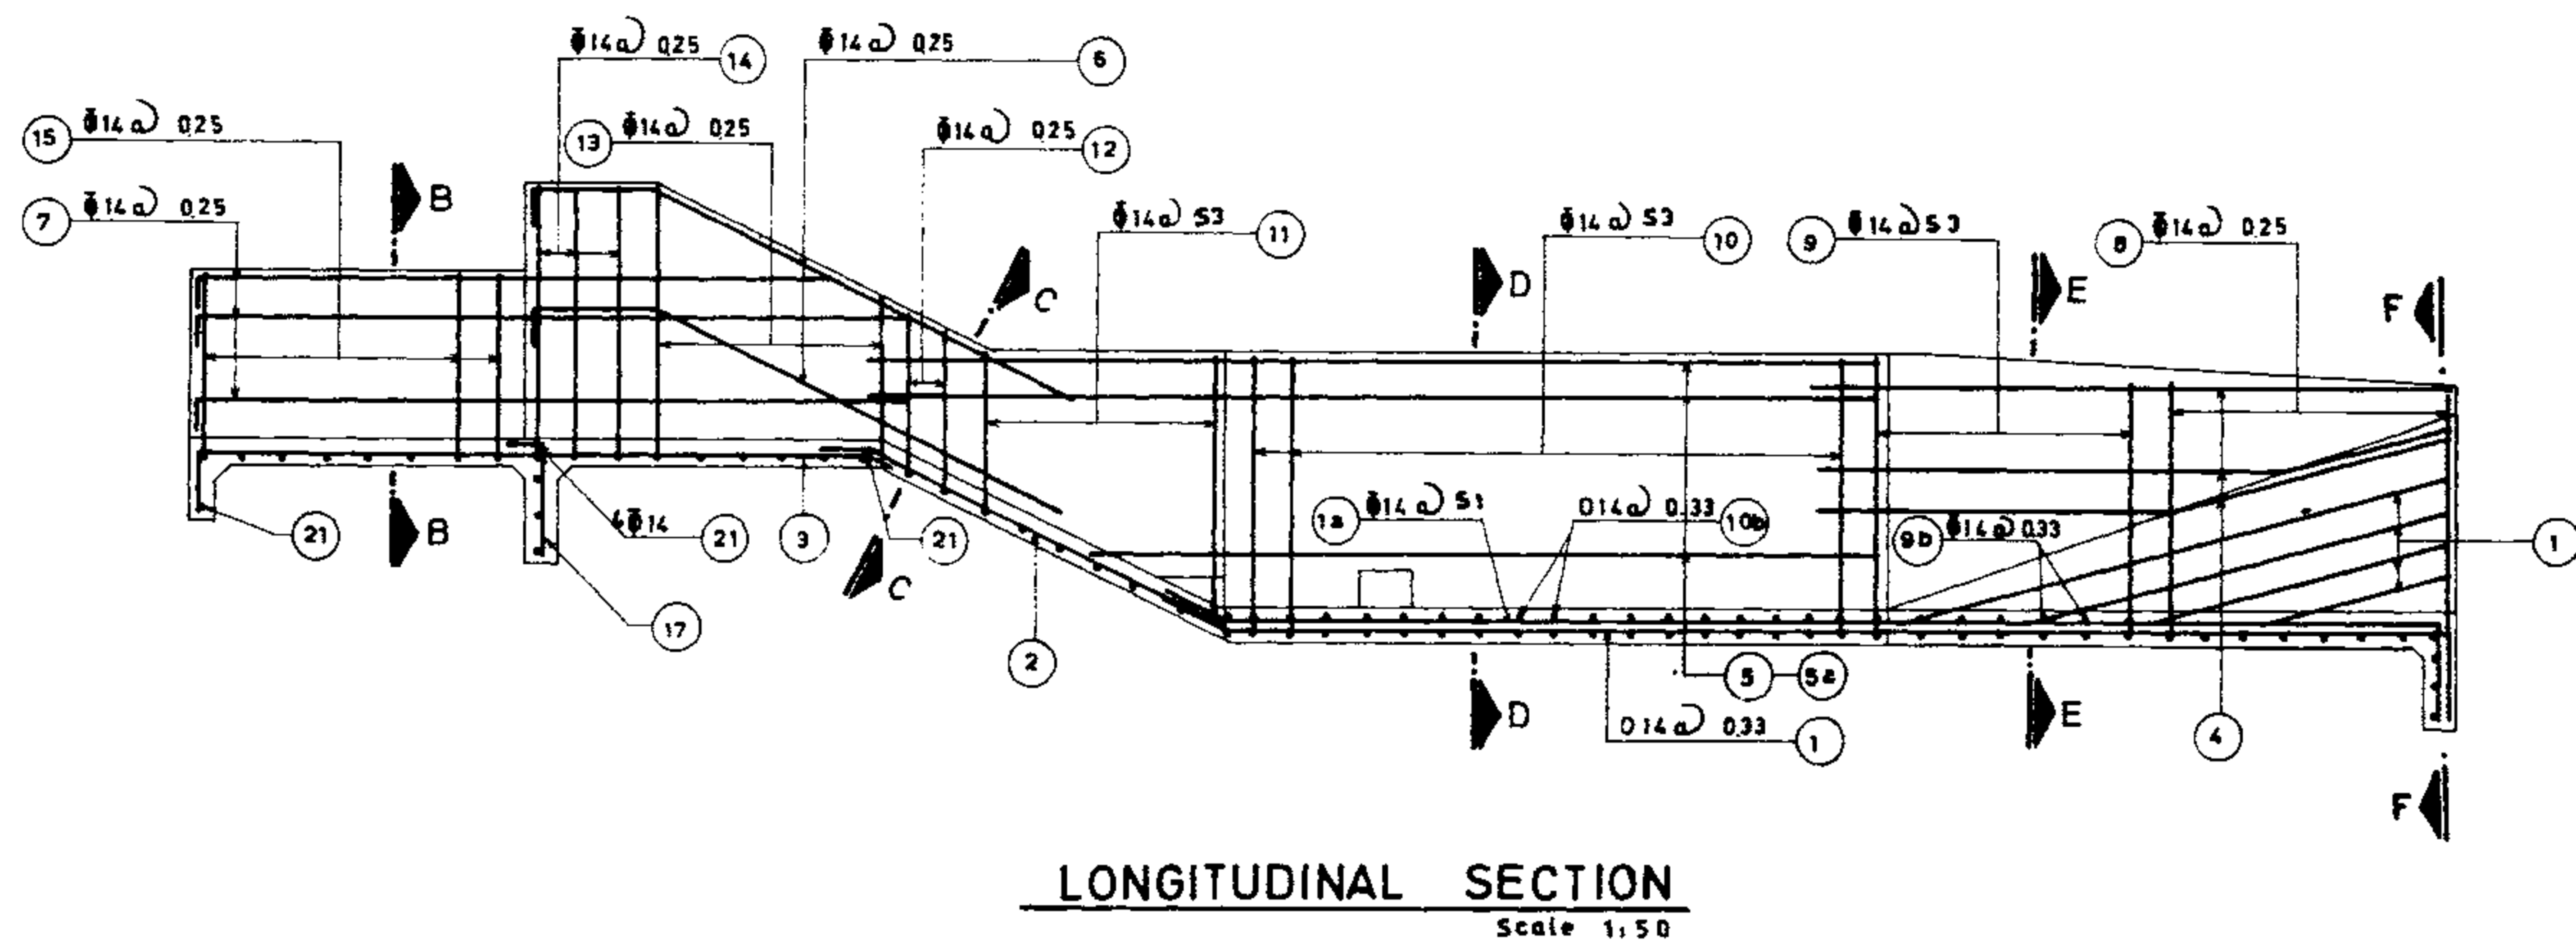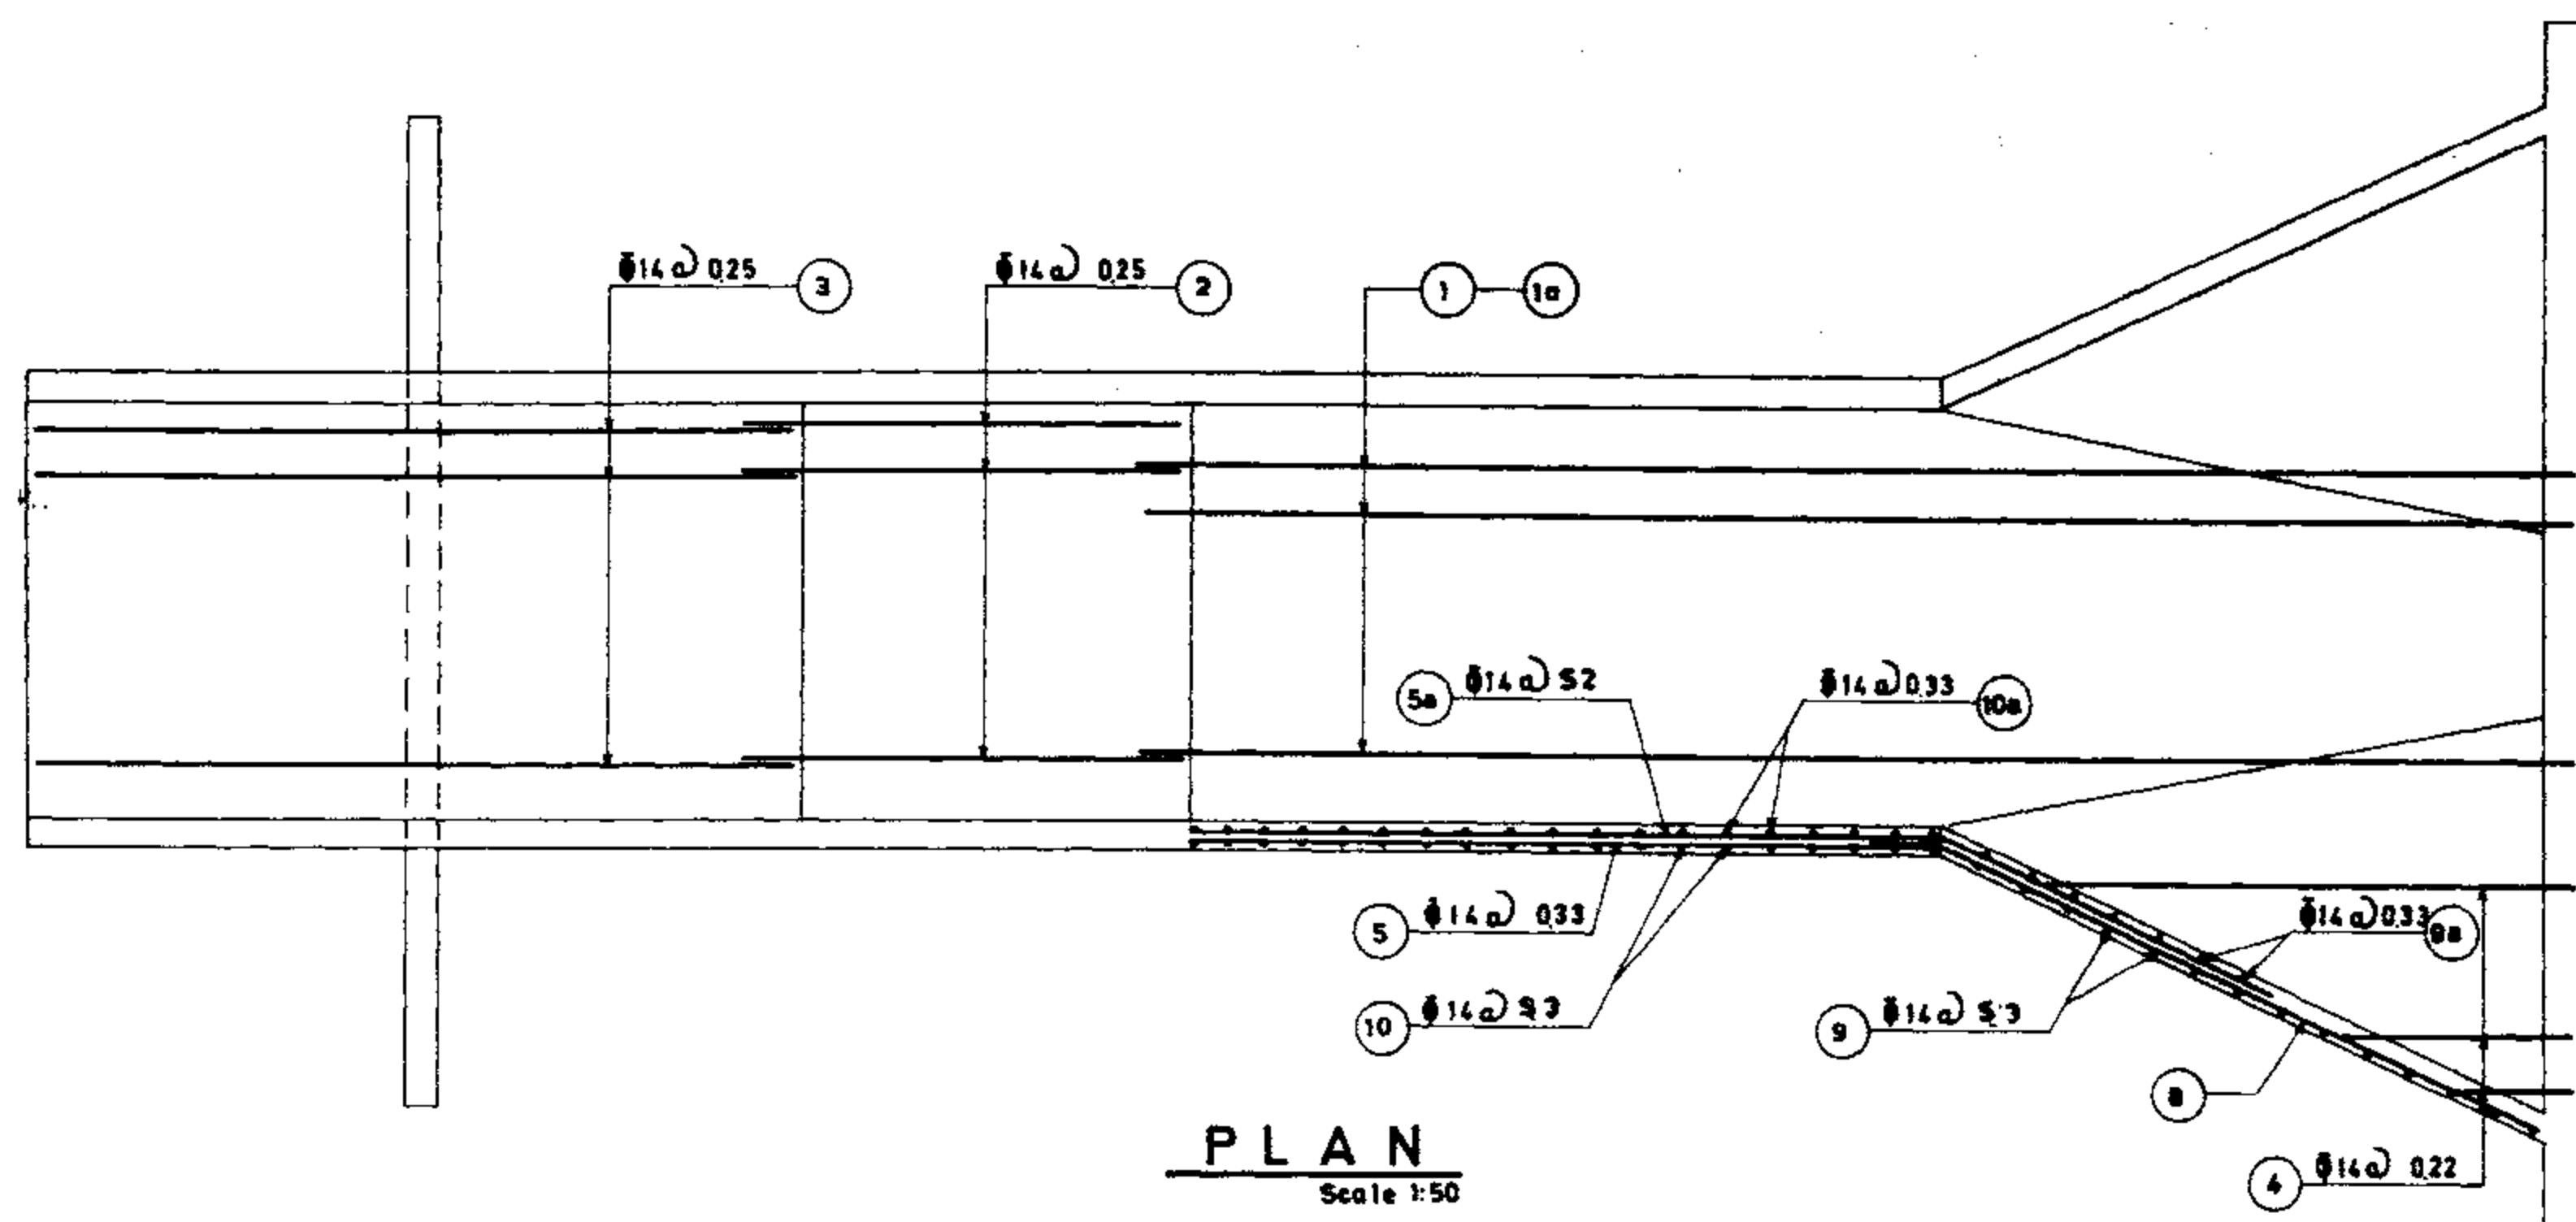

PARAMETRIC BAR SPACING

H4	S1	S2	S3
$1.95 < H4 \leq 2.05$	0.28	0.30	0.18
$2.05 < H4 \leq 2.20$	0.25	0.28	0.18

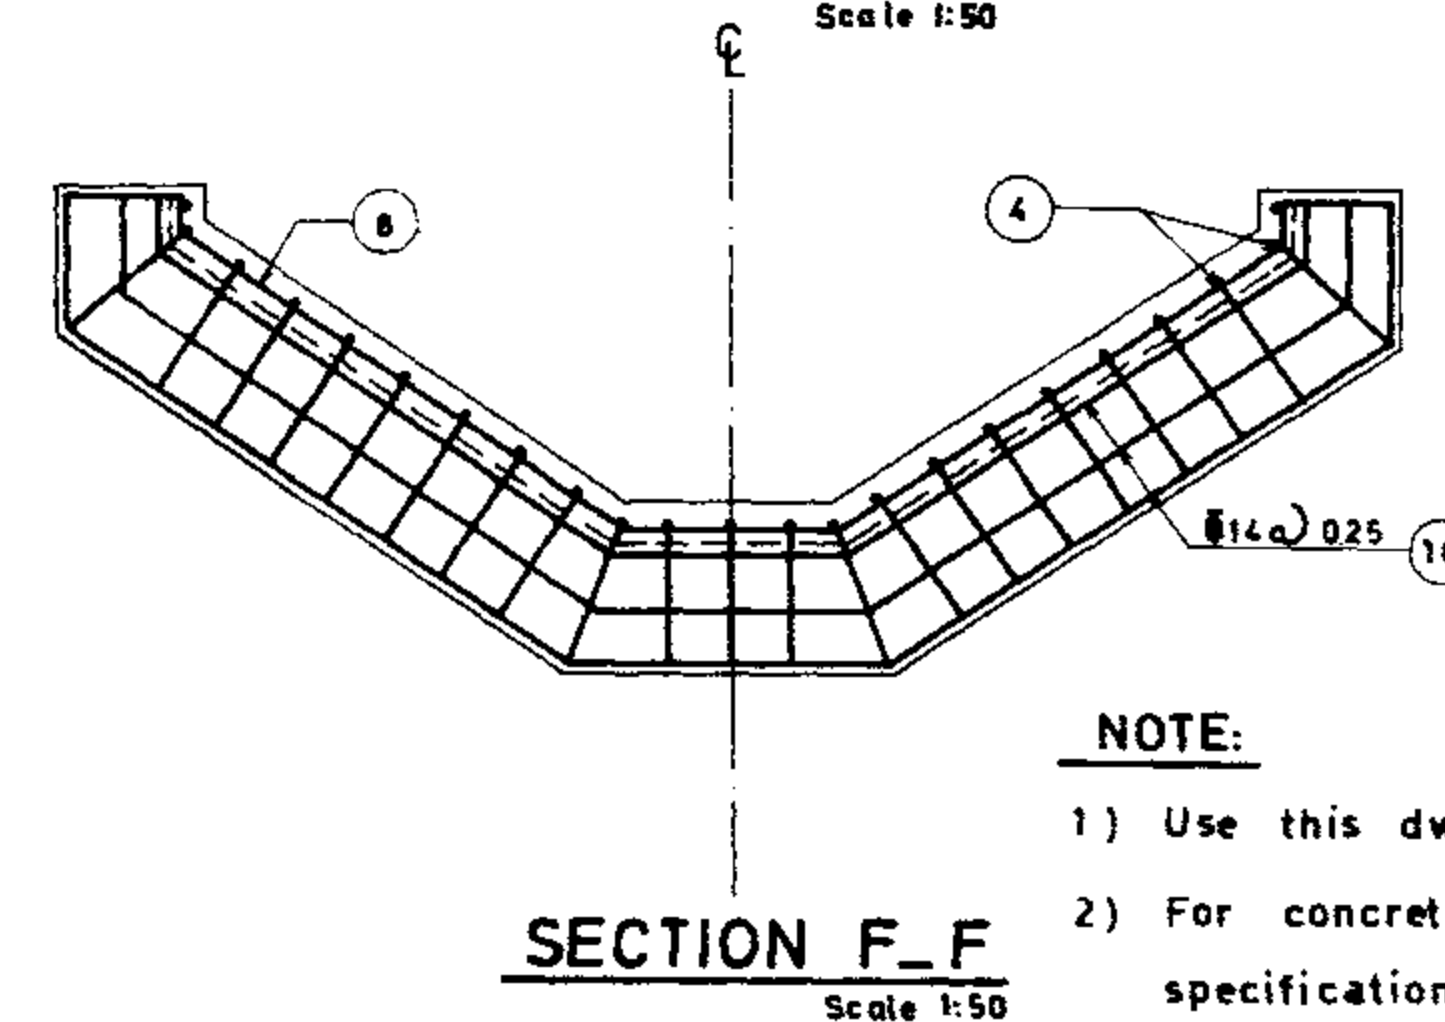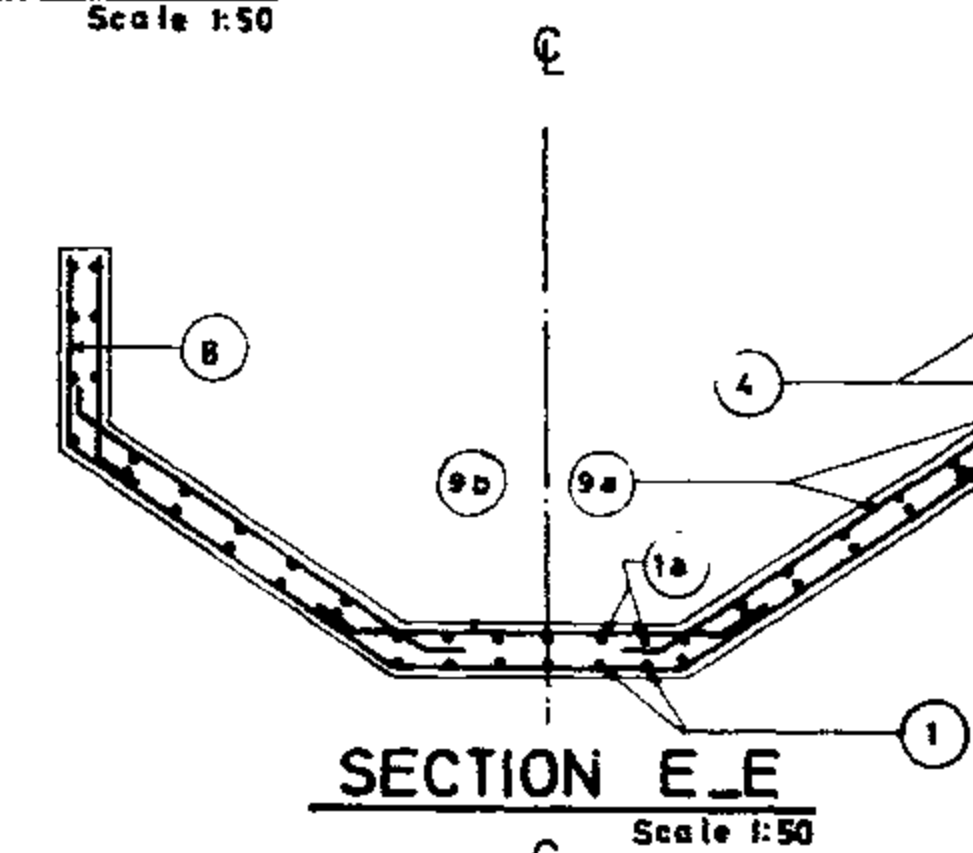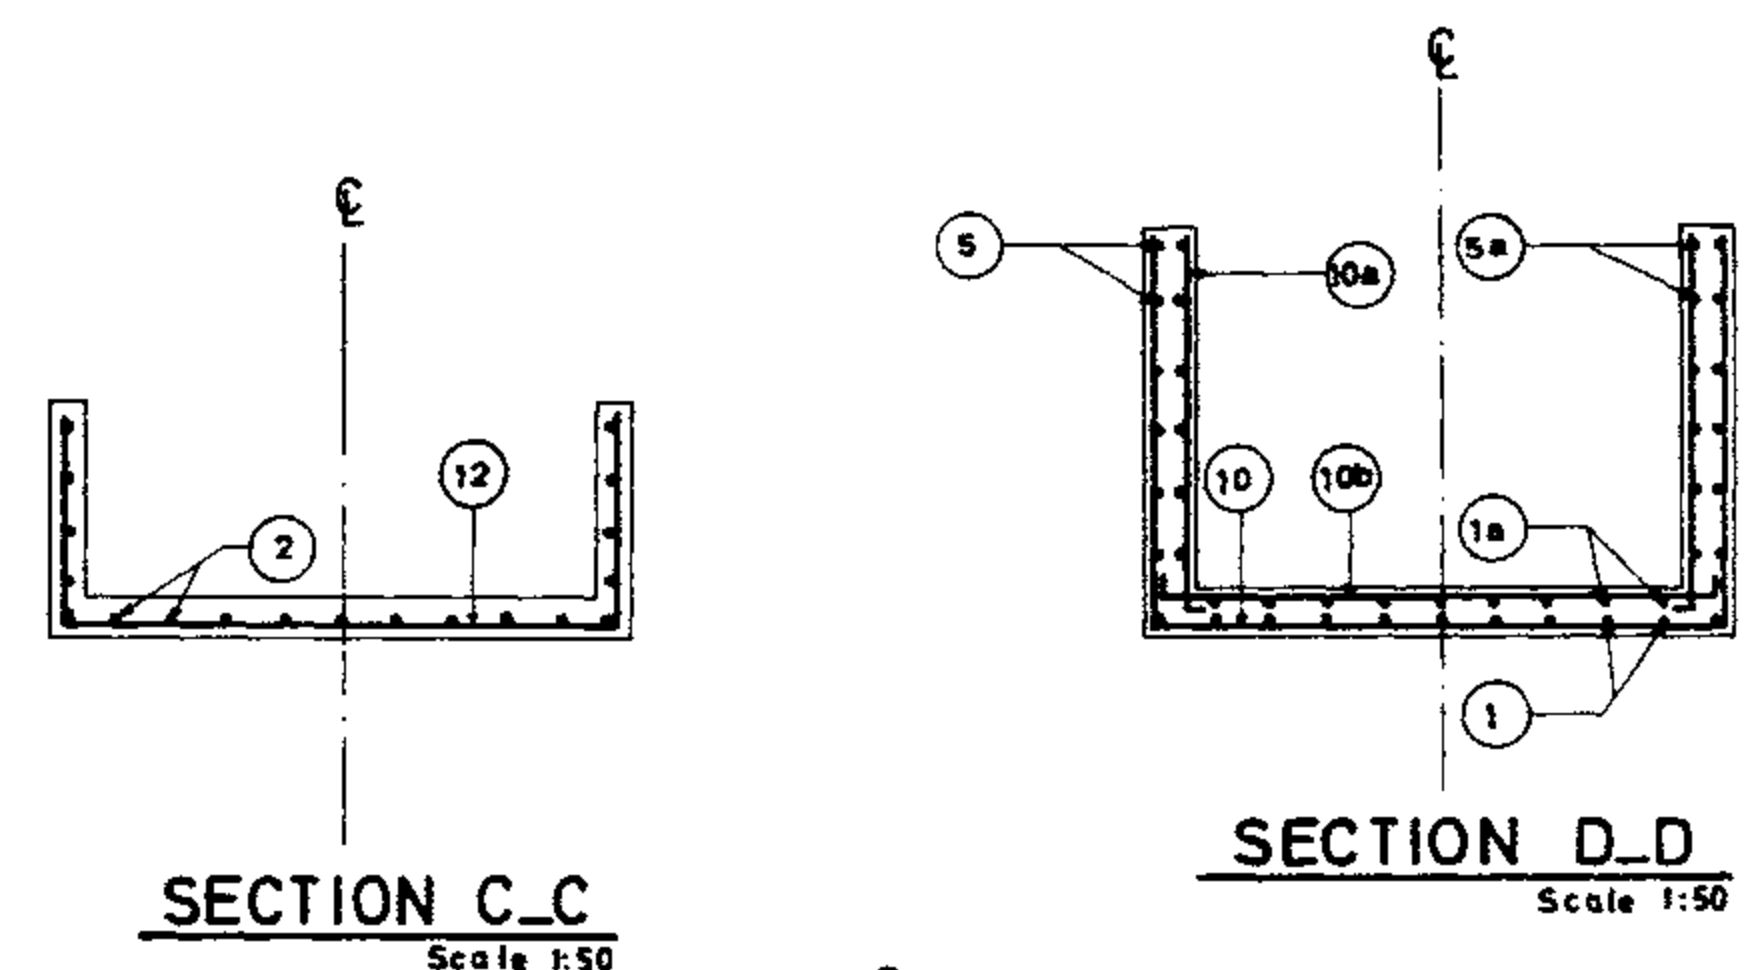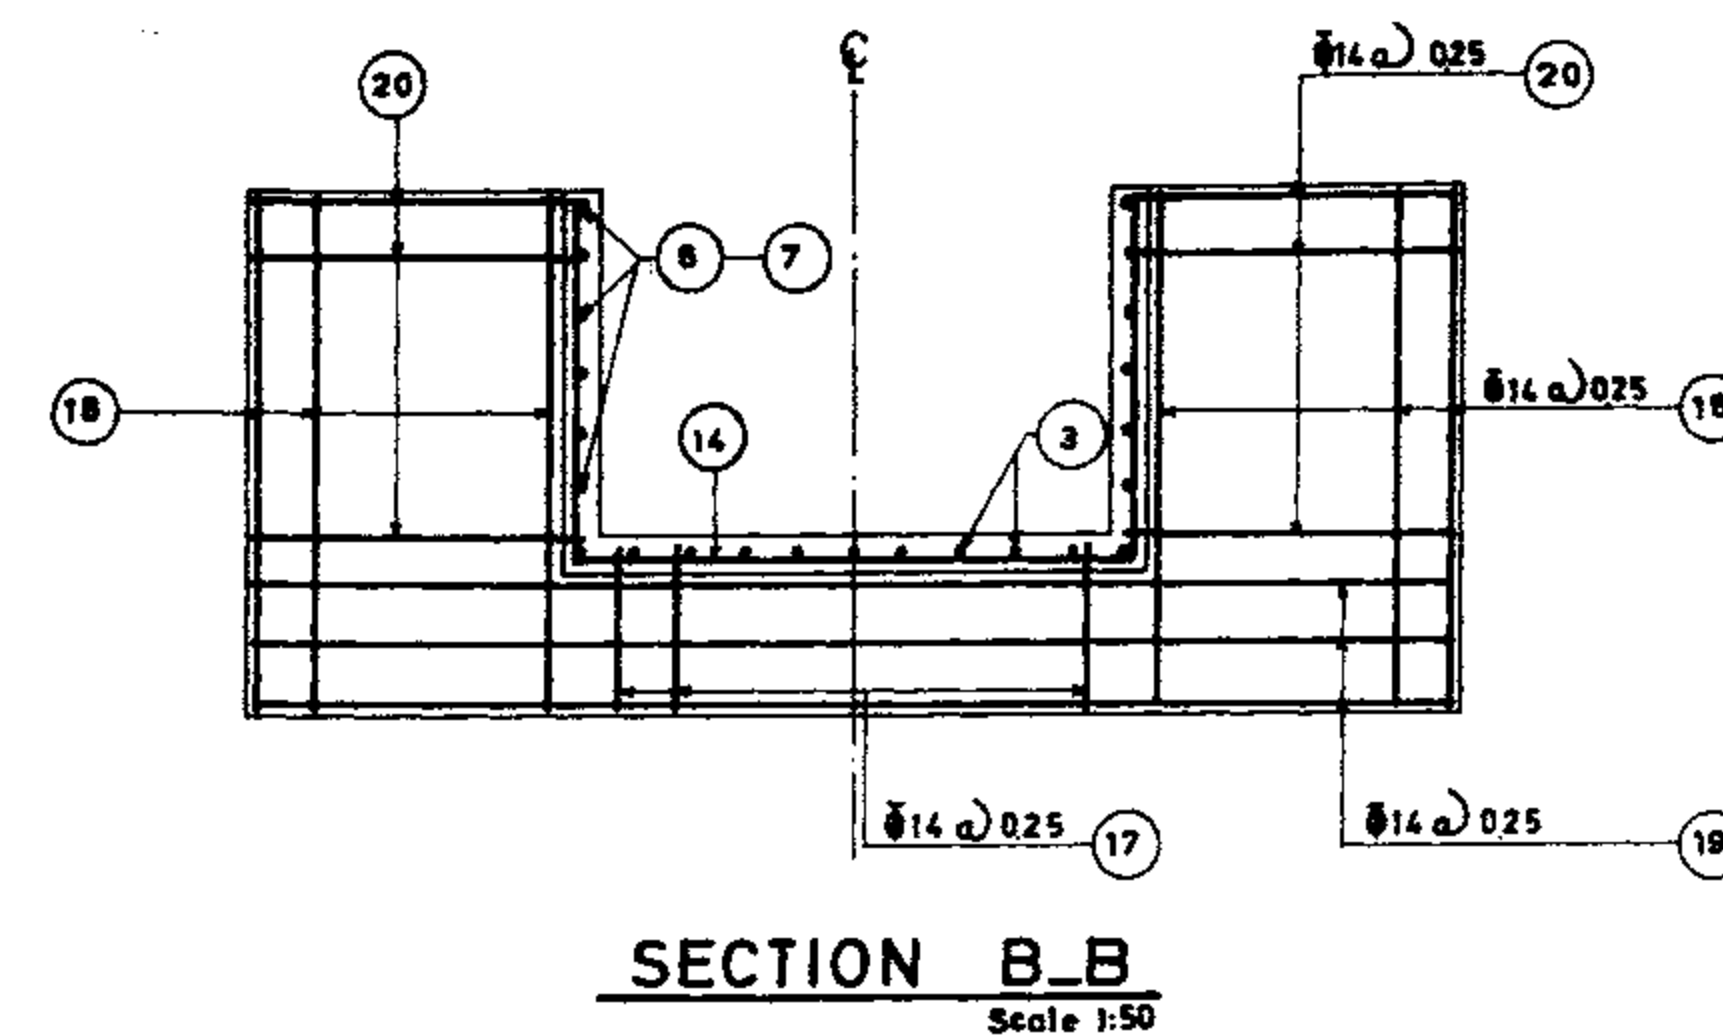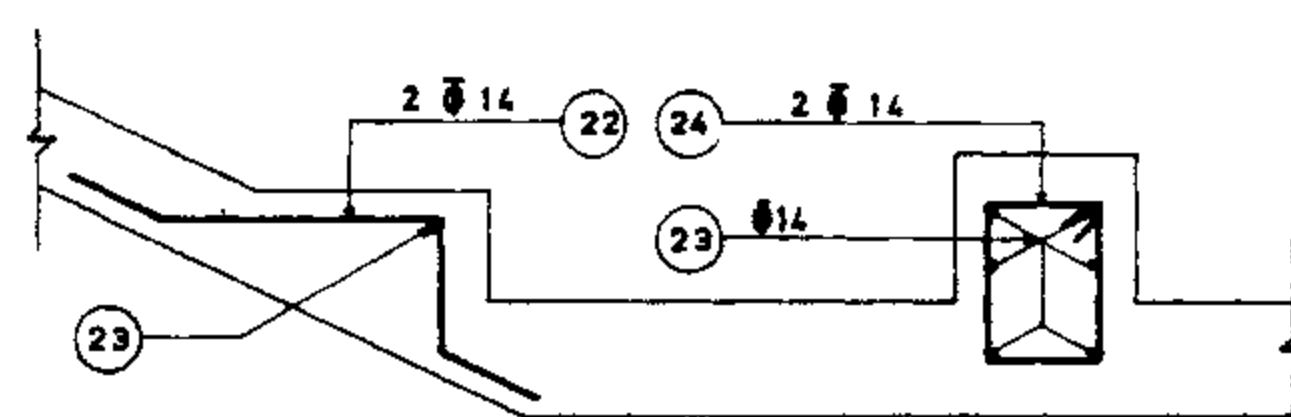

NOTE:

- 1) Use this dwg. for $1.95 < H4 \leq 2.20$
- 2) For concrete & reinforcement specification see dwg.No.

REFERENCE DWGS: For dimensions see dwgs. N° 11/1/1/01 & 11/1/2/02
For list of reinforcement see dwgs. N° 11/1/3/04 TO 11/1/3/28

Scale: 1:20 1:50

IRRIGATION & DRAINAGE STANDARD

Date:

DWG N° 11/1/3/03

Approved:

Sheet N° 7 of 32 Rev. N°

**RECTANGULAR INCLINED DROP
REINFORCEMENT
PLAN & SECTION**

ISLAMIC REPUBLIC OF IRAN
MINISTRY OF PLAN & BUDGET
TECHNICAL RESEARCH AND
STANDARD BUREAU

STR. 200-100				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	7		4.43	31.01
1a	—	—	—	—
2	7		2.55	17.85
3	7		2.80	19.60
4	2x5		2.82	28.20
5	2x4		2.80	22.40
5a	—	—	—	—
6	2x3		3.58	21.48
7	2x2		2.90	11.60
8	5		3.28	16.40
9	4		3.07	12.28
9a	—	—	—	—
9b	—	—	—	—
10	8		2.97	23.76
10a	—	—	—	—
10b	—	—	—	—
11	4		2.69	10.76
12	6		2.41	14.46
13	4		2.71	10.84
14	3		3.01	9.03
15	5		2.01	10.05
16	3		4.07	12.21
17	5		0.70	3.50
18	8		1.40	11.20
19	3		2.40	7.20
20	10		0.85	8.50
21	4		1.61	6.44
22	2		1.10	2.20
23	13		0.21	2.73
24	4		0.84	3.36
TOTAL LENGTH			317.06	
317.06 x 1.21 =			383.64 Kg	

STR. 200-150				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	7		4.58	32.06
1a	—	—	—	—
2	7		3.84	26.88
3	7		2.80	19.60
4	2x5		2.85	28.50
5	2x4		3.05	24.40
5a	—	—	—	—
6	2x3		4.76	28.56
7	2x2		2.90	11.60
8	5		3.45	17.25
9	5		3.20	16.00
9a	—	—	—	—
9b	—	—	—	—
10	8		3.07	24.56
10a	—	—	—	—
10b	—	—	—	—
11	4		2.74	10.96
12	11		2.41	26.51
13	4		2.71	10.84
14	3		3.01	9.03
15	5		2.01	10.05
16	3		4.25	12.75
17	5		0.70	3.50
18	8		1.40	11.20
19	3		2.40	7.20
20	10		0.85	8.50
21	4		1.61	6.44
22	2		1.10	2.20
23	13		0.21	2.73
24	4		0.84	3.36
TOTAL LENGTH			354.68	
354.68 x 1.21 =			429.16 Kg	

STR. 200-200				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	7		4.73	33.11
1a	—	—	—	—
2	7		5.07	35.49
3	7		2.85	19.95
4	2x6		2.89	34.68
5	2x4		3.30	26.40
5a	—	—	—	—
6	2x3		5.93	35.58
7	2x2		2.95	11.90
8	5		3.62	18.10
9	4		3.32	13.28
9a	—	—	—	—
9b	—	—	—	—
10	5		3.17	28.53
10a	—	—	—	—
10b	—	—	—	—
11	5		2.79	13.95
12	15		2.41	36.15
13	4		2.71	10.84
14	3		3.01	9.03
15	5		2.01	10.05
16	3		4.45	13.35
17	5		0.70	3.50
18	8		1.40	11.20
19	3		2.40	7.20
20	10		0.85	8.50
21	4		1.61	6.44
22	2		1.10	2.20
23	13		0.21	2.73
24	4		0.84	3.36
TOTAL LENGTH			395.42	
395.42 x 1.21 =			478.46 Kg	

STR. 200-250				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	7		4.83	33.81
1a	—	—	—	—
2	7		6.30	44.10
3	7		2.95	20.65
4	2x6		2.89	34.68
5	2x4		3.40	27.20
5a	—	—	—	—
6	2x3		7.26	43.56
7	2x2		3.05	12.20
8	5		3.62	18.10
9	4		3.32	13.28
9a	—	—	—	—
9b	—	—	—	—
10	9		3.17	28.53
10a	—	—	—	—
10b	—	—	—	—
11	5		2.79	13.95
12	20		2.41	48.20
13	4		2.71	10.84
14	3		3.01	9.03
15	5		2.01	10.05
16	3		4.45	13.35
17	5		0.70	3.50
18	8		1.40	11.20
19	3		2.40	7.20
20	10		0.85	8.50
21	4		1.61	6.44
22	2		1.10	2.20
23	13		0.21	2.73
24	4		0.84	3.36
TOTAL LENGTH			426.66	
426.66 x 1.21 =			516.26 Kg	

STR. 200-300				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	7		4.93	34.51
1a	—	—	—	—
2	7		7.53	52.71
3	7		3.00	21.00
4	2x6		2.92	35.04
5	2x4		3.60	28.80
5a	—	—	—	—
6	2x3		8.42	50.52
7	2x2		3.10	12.40
8	5		3.78	18.90
9	4		3.44	13.76
9a	—	—	—	—
9b	—	—	—	—
10	10		3.27	32.70
10a	—	—	—	—
10b	—	—	—	—
11	5		2.84	14.20
12	25		2.41	60.25
13	4		2.71	10.84
14	3		3.01	9.03
15	5		2.01	10.05
16	3		4.63	13.89
17	5		0.70	3.50
18	8		1.40	11.20
19	3		2.40	7.20
20	10		0.85	8.50
21	4		1.61	6.44
22	2		1.10	2.20
23	13		0.21	2.73
24	4		0.84	3.36
TOTAL LENGTH			463.73	
463.73 x 1.21 =			561.11 Kg	

ALL BARS ARE Ø14 (1.21 Kg/m)

REFERENCE DWGS: For plan & section see dwg. No. 11/1/1/01
 For reinforcement see dwgs. No. 11/1/3/01 TO 11/1/3/03
 For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale: IRRIGATION & DRAINAGE STANDARDS
 Date: DWG. No. 11/1/3/04
 Approved: Sheet No. 8 of 32 Rev. No. RECTANGULAR INCLINED DROP LIST OF REINFORCEMENT STR. 200-100 TO 200-300

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDJET
 TECHNICAL RESEARCH AND STANDARD BUREAU

STR. 200_350				
Pos.	Nº.	FORM	UNIT LENG.	LENG.
1	7		5.03	35.21
1a	—		—	—
2	7		8.70	6.90
3	7		3.10	21.70
4	2x6		2.96	35.52
5	2x4		3.80	30.40
5a	—		—	—
6	2x3		9.59	57.54
7	2x2		3.20	12.80
8	5		3.95	19.75
9	4		3.56	14.24
9a	—		—	—
9b	—		—	—
10	10		3.37	33.70
10a	—		—	—
10b	—		—	—
11	6		2.89	17.34
12	29		2.41	69.89
13	4		2.71	10.84
14	4		3.01	12.04
15	5		2.01	10.05
16	3		4.83	14.49
17	5		0.70	3.50
18	8		1.40	11.20
19	3		2.40	7.20
20	10		0.85	8.50
21	4		1.61	6.44
22	2		1.10	2.20
23	13		0.21	2.73
24	4		0.84	3.36
TOTAL LENGTH			501.54	
$501.54 \times 1.21 =$			606.86 Kg	

STR. 200_400				
Pos.	Nº.	FORM	UNIT LENG.	LENG.
1	7		5.08	35.56
1a	—		—	—
2	7		9.87	69.09
3	7		3.20	22.40
4	2x4		2.96	35.52
5	2x4		3.85	30.80
5a	—		—	—
6	2x3		10.86	65.16
7	2x2		3.30	13.20
8	5		3.95	19.75
9	4		3.56	14.24
9a	—		—	—
9b	—		—	—
10	10		3.37	33.70
10a	—		—	—
10b	—		—	—
11	6		2.89	17.34
12	34		2.41	81.94
13	4		2.71	10.84
14	4		3.01	12.04
15	5		2.01	10.05
16	3		4.83	14.49
17	5		0.70	3.50
18	8		1.40	11.20
19	3		2.40	7.20
20	10		0.85	8.50
21	4		1.61	6.44
22	2		1.10	2.20
23	13		0.21	2.73
24	4		0.84	3.36
TOTAL LENGTH			531.25	
$531.25 \times 1.21 =$			642.81 Kg	

STR. 300_100				
Pos.	Nº.	FORM	UNIT LENG.	LENG.
1	8		4.88	39.04
1a	—		—	—
2	7		2.55	17.85
3	7		2.90	20.30
4	2x5		3.00	30.00
5	2x4		3.05	24.40
5a	—		—	—
6	2x3		3.70	22.20
7	2x2		3.00	12.00
8	5		3.48	17.40
9	5		3.31	16.55
9a	—		—	—
9b	—		—	—
10	9		3.22	28.98
10a	—		—	—
10b	—		—	—
11	4		2.94	11.76
12	6		2.66	15.96
13	4		3.01	12.04
14	3		3.36	10.08
15	5		2.36	11.80
16	3		4.23	12.69
17	6		0.70	4.20
18	8		1.50	12.00
19	3		2.75	8.25
20	10		0.95	9.50
21	4		1.76	7.04
22	4		1.10	4.40
23	20		0.21	4.20
24	6		0.84	5.04
TOTAL LENGTH			357.68	
$357.68 \times 1.21 =$			432.79 Kg	

STR. 300_150				
Pos.	Nº.	FORM	UNIT LENG.	LENG.
1	8		5.08	40.64
1a	—		—	—
2	7		3.84	26.88
3	7		2.95	20.65
4	2x6		3.06	36.72
5	2x4		3.45	27.60
5a	—		—	—
6	2x3		4.81	28.86
7	2x2		3.05	12.20
8	5		3.81	19.05
9	5		3.55	17.75
9a	—		—	—
9b	—		—	—
10	10		3.42	34.20
10a	—		—	—
10b	—		—	—
11	5		3.04	15.20
12	11		2.66	29.26
13	4		3.01	12.04
14	3		3.36	10.08
15	5		2.36	11.80
16	3		4.63	13.89
17	6		0.70	4.20
18	8		1.50	12.00
19	3		2.75	8.25
20	10		0.95	9.50
21	4		1.76	7.04
22	4		1.10	4.40
23	20		0.21	4.20
24	6		0.84	5.04
TOTAL LENGTH			411.45	
$411.45 \times 1.21 =$			497.85 Kg	

STR. 300_200				
Pos.	Nº.	FORM	UNIT LENG.	LENG.
1	8		5.23	41.84
1a	—		—	—
2	7		5.07	35.49
3	7		3.00	21.00
4	2x6		3.10	37.20
5	2x4		3.70	29.60
5a	—		—	—
6	2x3		5.98	35.88
7	2x2		3.10	12.40
8	5		3.98	19.90
9	5		3.67	18.35
9a	—		—	—
9b	—		—	—
10	10		3.52	35.20
10a	—		—	—
10b	—		—	—
11	5		3.09	15.45
12	15		2.66	39.90
13	4		3.01	12.04
14	3		3.36	10.08
15	5		2.36	11.08
16	3		4.83	14.49
17	6		0.70	4.20
18	8		1.50	12.00
19	3		2.75	8.25
20	10		0.95	9.50
21	4		1.76	7.04
22	4		1.10	4.40
23	20		0.21	4.20
24	6		0.84	5.04
TOTAL LENGTH			445.25	
$445.25 \times 1.21 =$			538.75 Kg	

ALL BARS ARE Ø14 (1.21 Kg/m)

REFERENCE DWGS: For plan & section see dwg. No. 11/1/1/01
 For reinforcement see dwgs. No. 11/1/3/01 TO 11/1/3/03
 For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale: _____
 Date: _____
 Approved: _____

IRRIGATION & DRAINAGE STANDARDS

DWG. No. 11/1/3/05
 Sheet No. 9 of 32 Rev. No. _____

RECTANGULAR INCLINED DROP
 LIST OF REINFORCEMENT
 STR. 200_350 TO 300_200

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDJET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

STR. 300_250				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	8		5.38	4304
1a	—	—	—	—
2	7		6.30	4410
3	7		3.10	2170
4	2x6		3.13	3756
5	2x5		3.95	3950
5a	—	—	—	—
6	2x3		7.19	4314
7	2x2		3.20	1280
8	5		4.15	2075
9	5		3.80	1900
9a	—	—	—	—
9b	—	—	—	—
10	11		3.62	3982
10a	—	—	—	—
10b	—	—	—	—
11	6		3.14	1884
12	19		2.66	5054
13	4		3.01	1204
14	3		3.36	1008
15	5		2.36	1180
16	3		5.02	1506
17	6		0.70	420
18	8		1.50	1200
19	3		2.75	825
20	10		0.95	950
21	4		1.76	704
22	4		1.10	440
23	20		0.21	420
24	6		0.84	504
TOTAL LENGTH			494.40	
			$494.40 \times 1.21 = 598.22 \text{ Kg}$	

STR. 300_300				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	8		5.48	4384
1a	—	—	—	—
2	7		7.53	5271
3	7		3.20	2240
4	2x6		3.13	3756
5	2x5		4.05	4050
5a	—	—	—	—
6	2x3		8.52	5112
7	2x2		3.30	1320
8	5		4.15	2075
9	5		3.80	1900
9a	—	—	—	—
9b	—	—	—	—
10	11		3.62	3982
10a	—	—	—	—
10b	—	—	—	—
11	6		3.14	1884
12	24		2.66	6384
13	4		3.01	1204
14	4		3.36	1344
15	5		2.36	1180
16	3		5.02	1506
17	6		0.70	420
18	8		1.50	1200
19	3		2.75	825
20	10		0.95	950
21	4		1.76	704
22	4		1.10	440
23	20		0.21	420
24	6		0.84	504
TOTAL LENGTH			530.55	
			$530.55 \times 1.21 = 641.96 \text{ Kg}$	

STR. 300_350				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	8		5.58	4464
1a	—	—	—	—
2	7		8.70	6090
3	7		3.30	2310
4	2x7		3.17	4438
5	2x5		4.25	4250
5a	—	—	—	—
6	2x3		9.69	5814
7	2x2		3.40	1360
8	5		4.32	2160
9	5		3.92	1960
9a	—	—	—	—
9b	—	—	—	—
10	12		3.72	4464
10a	—	—	—	—
10b	—	—	—	—
11	6		3.19	1914
12	29		2.66	7714
13	4		3.01	1204
14	4		3.36	1344
15	5		2.36	1180
16	3		5.21	1563
17	6		0.70	420
18	8		1.50	1200
19	3		2.75	825
20	10		0.95	950
21	4		1.76	704
22	4		1.10	440
23	20		0.21	420
24	6		0.84	504
TOTAL LENGTH			576.92	
			$576.92 \times 1.21 = 698.07 \text{ Kg}$	

STR. 300_400				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	8		5.68	4544
1a	—	—	—	—
2	7		9.87	6909
3	7		3.40	2380
4	2x7		3.21	4494
5	2x5		4.45	4450
5a	—	—	—	—
6	2x3		10.85	6510
7	2x2		3.50	1400
8	5		4.48	2240
9	5		4.04	2020
9a	—	—	—	—
9b	—	—	—	—
10	12		3.82	4584
10a	—	—	—	—
10b	—	—	—	—
11	7		3.24	2268
12	33		2.66	8778
13	4		3.01	1204
14	5		3.36	1680
15	5		2.36	1180
16	3		5.39	1617
17	6		0.70	420
18	8		1.50	1200
19	3		2.75	825
20	10		0.95	950
21	4		1.76	704
22	4		1.10	440
23	20		0.21	420
24	6		0.84	504
TOTAL LENGTH			617.21	
			$617.21 \times 1.21 = 746.82 \text{ Kg}$	

STR. 400_100				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	9		5.28	4752
1a	—	—	—	—
2	8		2.55	2040
3	8		3.00	2400
4	2x5		3.17	3170
5	2x4		3.35	2680
5a	—	—	—	—
6	2x3		3.68	2208
7	2x2		3.10	1240
8	6		3.57	2142
9	5		3.58	1790
9a	—	—	—	—
9b	—	—	—	—
10	10		3.57	3570
10a	—	—	—	—
10b	—	—	—	—
11	4		3.24	1296
12	6		2.91	1746
13	4		3.26	1304
14	3		3.61	1083
15	5		2.61	1305
16	3		4.25	1275
17	7		0.70	490
18	8		1.55	1240
19	3		3.00	900
20	10		1.00	1000
21	4		1.91	764
22	4		1.10	440
23	20		0.21	420
24	6		0.84	504
TOTAL LENGTH			397.59	
			$397.59 \times 1.21 = 481.08 \text{ Kg}$	

ALL BARS ARE Ø 14 (1.21 Kg/m)

REFERENCE DWGS: For plan & section see dwg. No. 11/1/1/01
 For reinforcement see dwgs. No. 11/1/3/01 TO 11/1/1/3/03
 For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale: _____
 Date: _____
 Approved: _____

IRRIGATION & DRAINAGE STANDARDS

DWG. No. 11/1/3/08
 RECTANGULAR INCLINED DROP
 LIST OF REINFORCEMENT
 STR. 300_250 TO 400_100

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

STR. 400-150				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	9		5.48	49.32
1a	—	—	—	—
2	8		3.84	30.72
3	8		3.05	24.40
4	2x5		3.22	32.20
5	2x4		3.65	29.20
5a	—	—	—	—
6	2x3		4.91	29.46
7	2x2		3.15	12.60
8	6		3.88	23.28
9	5		3.75	18.75
9a	—	—	—	—
9b	—	—	—	—
10	10		3.67	36.70
10a	—	—	—	—
10b	—	—	—	—
11	5		3.29	16.45
12	11		2.91	32.01
13	4		3.26	13.04
14	3		3.61	10.83
15	5		2.61	13.05
16	3		4.63	13.89
17	7		0.70	4.90
18	8		1.55	12.40
19	3		3.00	9.00
20	10		1.00	10.00
21	4		1.91	7.64
22	4		1.10	4.40
23	20		0.21	4.21
24	6		0.84	5.04
TOTAL LENGTH			443.48	
			$443.48 \times 1.21 = 536.61 \text{ Kg}$	

STR. 400-200				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	9		5.63	50.67
1a	—	—	—	—
2	8		5.07	40.56
3	8		3.15	25.20
4	2x6		3.25	39.00
5	2x5		3.90	39.00
5a	—	—	—	—
6	2x3		6.13	36.78
7	2x2		3.25	13.00
8	6		4.05	24.30
9	5		3.87	19.35
9a	—	—	—	—
9b	—	—	—	—
10	11		3.77	41.47
10a	—	—	—	—
10b	—	—	—	—
11	5		3.34	16.70
12	15		2.91	43.65
13	4		3.26	13.04
14	4		3.61	14.44
15	5		2.61	13.05
16	3		4.83	14.49
17	7		0.70	4.90
18	8		1.55	12.40
19	3		3.00	9.00
20	10		1.00	10.00
21	4		1.91	7.64
22	4		1.10	4.40
23	20		0.21	4.20
24	6		0.84	5.04
TOTAL LENGTH			502.28	
			$502.28 \times 1.21 = 607.76 \text{ Kg}$	

STR. 400-250				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	9		5.78	52.02
1a	—	—	—	—
2	8		6.30	50.40
3	8		3.25	26.00
4	2x6		3.28	39.36
5	2x5		4.15	41.50
5a	—	—	—	—
6	2x3		7.34	44.04
7	2x2		3.35	13.40
8	6		4.21	25.26
9	5		3.99	19.95
9a	—	—	—	—
9b	—	—	—	—
10	12		3.87	46.44
10a	—	—	—	—
10b	—	—	—	—
11	6		3.39	20.34
12	19		2.91	55.29
13	4		3.26	13.04
14	4		3.61	14.44
15	5		2.61	13.05
16	3		5.02	15.06
17	7		0.70	4.90
18	8		1.55	12.40
19	3		3.00	9.00
20	10		1.00	10.00
21	4		1.91	7.64
22	4		1.10	4.40
23	20		0.21	4.20
24	6		0.84	5.04
TOTAL LENGTH			547.17	
			$547.17 \times 1.21 = 662.08 \text{ Kg}$	

STR. 400-300				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	9		5.88	52.92
1a	—	—	—	—
2	8		7.53	60.24
3	8		3.35	26.80
4	2x6		3.28	39.36
5	2x5		4.35	43.50
5a	—	—	—	—
6	2x3		8.56	51.36
7	2x2		3.45	13.80
8	6		4.24	25.44
9	5		4.07	20.35
9a	—	—	—	—
9b	—	—	—	—
10	12		3.97	47.64
10a	—	—	—	—
10b	—	—	—	—
11	6		3.44	20.64
12	24		2.91	69.84
13	4		3.26	13.04
14	4		3.61	14.44
15	5		2.61	13.05
16	3		5.02	15.06
17	7		0.70	4.90
18	8		1.55	12.40
19	3		3.00	9.00
20	10		1.00	10.00
21	4		1.91	7.64
22	4		1.10	4.40
23	20		0.21	4.20
24	6		0.84	5.04
TOTAL LENGTH			585.06	
			$585.06 \times 1.21 = 707.93 \text{ Kg}$	

STR. 400-350				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	9		5.98	53.82
1a	—	—	—	—
2	8		8.70	69.60
3	8		3.45	27.60
4	2x6		3.31	39.72
5	2x5		4.55	45.50
5a	—	—	—	—
6	2x3		9.72	58.32
7	2x2		3.55	14.20
8	6		4.41	26.46
9	5		4.91	20.95
9a	—	—	—	—
9b	—	—	—	—
10	13		4.07	52.91
10a	—	—	—	—
10b	—	—	—	—
11	7		3.49	24.43
12	28		2.91	81.48
13	4		3.26	13.04
14	5		3.61	18.05
15	5		2.61	13.05
16	3		5.21	15.63
17	7		0.70	4.90
18	8		1.55	12.40
19	3		3.00	9.00
20	10		1.00	10.00
21	4		1.91	7.64
22	4		1.10	4.40
23	20		0.21	4.20
24	6		0.84	5.04
TOTAL LENGTH			632.34	
			$632.34 \times 1.21 = 765.13 \text{ Kg}$	

ALL BARS ARE Ø 14 (1.21 Kg/m)

REFERENCE DWGS: For plan & section see dwg. No. 11/1/1/01
 For reinforcement see dwgs. No. 11/1/3/01 TO 11/1/3/03
 For bars with variable unit length see note under the same title at dwg. No. 20/2/V/01

Scale: IRRIGATION & DRAINAGE STANDARDS
 Date: DWG No. 11/V/307
 Approved: Sheet No. 11of32 Rev. No. RECTANGULAR INCLINED DROP LIST OF REINFORCEMENT STR. 400-150 TO 400-350

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND STANDARD BUREAU

STR. 400-400				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	9		6.08	54.72
1a	—		—	—
2	8		9.87	78.96
3	8		3.55	28.40
4	2x7		3.34	46.76
5	2x5		4.65	46.50
5a	—		—	—
6	2x3		1.10	66.00
7	2x2		3.65	14.60
8	6		4.55	27.30
9	5		4.24	21.20
9a	—		—	—
9b	—		—	—
10	14		4.07	56.98
10a	—		—	—
10b	—		—	—
11	7		3.49	24.43
12	33		2.91	96.03
13	4		3.26	13.04
14	5		3.61	18.05
15	5		2.61	13.05
16	3		5.39	16.17
17	7		0.70	4.90
18	8		1.55	12.40
19	3		3.00	9.00
20	10		1.00	10.00
21	4		1.91	7.64
22	4		1.10	4.40
23	20		0.21	4.20
24	6		0.84	5.04
TOTAL LENGTH			679.77	
679.77 x 1.21 =			822.52Kg	

STR. 500-100				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	9		5.68	51.12
1a	—		—	—
2	8		2.55	20.40
3	8		3.40	27.20
4	2x5		3.36	33.60
5	2x4		3.55	28.40
5a	—		—	—
6	2x3		3.78	22.68
7	2x3		3.50	21.00
8	6		3.77	22.62
9	6		3.77	22.62
9a	—		—	—
9b	—		—	—
10	10		3.77	37.70
10a	—		—	—
10b	—		—	—
11	4		3.44	13.76
12	6		3.11	18.66
13	4		3.46	13.84
14	3		3.81	11.43
15	6		2.81	16.86
16	3		4.45	13.35
17	7		0.70	4.90
18	10		1.60	16.00
19	3		3.20	9.60
20	12		1.05	12.60
21	4		2.01	8.04
22	4		1.10	4.40
23	20		0.21	4.20
24	6		0.84	5.04
TOTAL LENGTH			440.02	
440.02 x 1.21 =			532.42 Kg	

STR. 500-150				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	9		5.88	52.92
1a	—		—	—
2	8		3.84	30.72
3	8		3.45	27.60
4	2x5		3.41	34.10
5	2x5		3.95	39.50
5a	—		—	—
6	2x3		4.90	29.40
7	2x3		3.35	21.30
8	6		4.10	24.60
9	6		4.01	24.06
9a	—		—	—
9b	—		—	—
10	11		3.77	41.47
10a	—		—	—
10b	—		—	—
11	5		3.54	17.70
12	10		3.11	31.10
13	4		3.46	13.84
14	4		3.81	15.24
15	6		2.81	16.86
16	3		4.83	14.49
17	7		0.70	4.90
18	10		1.60	16.00
19	3		3.20	9.60
20	12		1.05	12.60
21	4		2.01	8.04
22	4		1.10	4.40
23	20		0.21	4.20
24	6		0.84	5.04
TOTAL LENGTH			499.68	
499.68 x 1.21 =			604.61 Kg	

STR. 500-200				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	9		6.03	54.27
1a	—		—	—
2	8		5.07	40.56
3	8		3.55	28.40
4	2x6		3.44	41.28
5	2x5		4.20	42.00
5a	—		—	—
6	2x3		6.11	36.66
7	2x3		3.65	21.90
8	6		4.27	25.62
9	6		4.14	24.84
9a	—		—	—
9b	—		—	—
10	12		4.07	48.84
10a	—		—	—
10b	—		—	—
11	6		3.59	21.54
12	15		3.11	46.65
13	4		3.46	13.84
14	4		3.81	15.24
15	6		2.81	16.86
16	3		5.02	15.06
17	7		0.70	4.90
18	10		1.60	16.00
19	3		3.20	9.60
20	12		1.05	12.60
21	4		2.01	8.04
22	4		1.10	4.40
23	20		0.21	4.20
24	6		0.84	5.04
TOTAL LENGTH			558.34	
558.34 x 1.21 =			675.59 Kg	

STR. 500-250				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	9		6.23	56.07
1a	—		—	—
2	8		6.30	50.40
3	8		3.65	29.20
4	2x6		3.47	41.64
5	2x5		4.50	45.00
5a	—		—	—
6	2x3		7.33	43.98
7	2x3		3.75	22.50
8	6		4.44	26.64
9	6		4.14	24.84
9a	—		—	—
9b	—		—	—
10	13		4.17	54.21
10a	—		—	—
10b	—		—	—
11	6		3.64	21.84
12	19		3.11	59.09
13	4		3.46	13.84
14	4		3.81	15.24
15	6		2.81	16.86
16	3		5.21	15.63
17	7		0.70	4.90
18	10		1.60	16.00
19	3		3.20	9.60
20	12		1.05	12.60
21	4		2.01	8.04
22	4		1.10	4.40
23	20		0.21	4.20
24	6		0.84	5.04
TOTAL LENGTH			601.76	
601.76 x 1.21 =			728.13Kg	

ALL BARS ARE Ø 14 (1.21 Kg / m)

REFERENCE DWGS: For plan & section see dwg. No. 11/1/1/01
 For reinforcement see dwgs. No. 11/1/3/01 TO 11/1/3/03
 For bars with variable unit length see note under the same title dwg. No. 20/2/1/01

Scale: IRRIGATION & DRAINAGE STANDARDS
 Date: DWG. No. 11/1/3/08
 Approved: Sheet No. 12 of 32 Rev. No. RECTANGULAR INCLINED DROP LIST OF REINFORCEMENT STR. 400-400 TO 500-250

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND STANDARD BUREAU

STR. 500_300				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	9		6.33	5697
1a	—	—	—	—
2	8		7.53	6024
3	8		3.75	3000
4	2x7		3.50	49.00
5	2x5		4.70	47.00
5a	—	—	—	—
6	2x3		8.55	51.30
7	2x3		3.85	23.10
8	6		4.60	27.60
9	6		4.38	26.28
9a	—	—	—	—
9b	—	—	—	—
10	13		4.27	55.51
10a	—	—	—	—
10b	—	—	—	—
11	7		3.69	25.83
12	24		3.11	74.64
13	4		3.46	13.84
14	5		3.81	19.05
15	6		2.81	16.86
16	3		5.39	16.17
17	7		0.70	4.90
18	10		1.60	16.00
19	3		3.20	9.60
20	12		1.05	12.60
21	4		2.01	8.04
22	4		1.10	4.40
23	20		0.21	4.20
24	6		1.06	6.36
TOTAL LENGTH			659.49	
659.49 x 1.21 =			797.98Kg	

STR. 500_350				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	9		6.43	57.87
1a	—	—	—	—
2	8		8.70	69.60
3	8		3.90	31.20
4	2x7		3.50	49.00
5	2x5		4.80	48.00
5a	—	—	—	—
6	2x3		9.81	59.22
7	2x3		4.00	24.00
8	6		4.60	27.60
9	6		4.38	26.28
9a	—	—	—	—
9b	—	—	—	—
10	14		4.27	59.78
10a	—	—	—	—
10b	—	—	—	—
11	7		3.69	25.83
12	28		3.11	87.08
13	4		3.64	13.84
14	5		3.81	19.05
15	6		2.81	16.86
16	3		5.39	16.17
17	7		0.70	4.90
18	10		1.60	16.00
19	3		3.20	9.60
20	12		1.05	12.60
21	4		2.01	8.04
22	4		1.10	4.40
23	20		0.21	4.20
24	6		1.06	6.36
TOTAL LENGTH			697.48	
697.48 x 1.21 =			843.95Kg	

STR. 500_400				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	9		6.53	58.77
1a	—	—	—	—
2	8		9.87	78.96
3	8		4.05	32.40
4	2x7		3.53	49.42
5	2x6		4.90	58.80
5a	—	—	—	—
6	2x3		11.20	67.20
7	2x3		4.15	24.90
8	6		4.77	28.62
9	6		4.50	27.00
9a	—	—	—	—
9b	—	—	—	—
10	14		4.37	61.18
10a	—	—	—	—
10b	—	—	—	—
11	7		3.74	26.18
12	32		3.11	99.52
13	4		3.64	13.84
14	6		3.81	22.86
15	6		2.81	16.86
16	3		5.59	16.77
17	7		0.70	4.90
18	10		1.60	16.00
19	3		3.20	9.60
20	12		1.05	12.60
21	4		2.01	8.04
22	4		1.10	4.40
23	20		0.21	4.20
24	6		1.06	6.36
TOTAL LENGTH			749.38	
749.38 x 1.21 =			906.75Kg	

STR. 600_100				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		5.93	59.30
1a	—	—	—	—
2	9		2.55	22.95
3	9		3.45	31.05
4	2x5		3.47	34.70
5	2x5		3.70	37.00
5a	—	—	—	—
6	2x4		3.83	30.64
7	2x3		3.55	21.30
8	6		3.95	23.70
9	6		3.97	23.82
9a	—	—	—	—
9b	—	—	—	—
10	11		3.97	43.67
10a	—	—	—	—
10b	—	—	—	—
11	4		3.64	14.56
12	6		3.31	19.86
13	4		3.66	14.64
14	4		4.01	16.04
15	6		3.01	18.06
16	3		4.63	13.89
17	7		0.70	4.90
18	10		1.65	16.50
19	3		3.40	10.20
20	12		1.10	13.20
21	4		2.11	8.44
22	4		1.10	4.40
23	20		0.21	4.20
24	6		0.84	5.04
TOTAL LENGTH			492.06	
492.06 x 1.21 =			595.39Kg	

STR. 600_150				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		6.13	61.30
1a	—	—	—	—
2	9		3.84	34.56
3	9		3.55	31.95
4	2x6		3.52	42.24
5	2x5		4.10	41.00
5a	—	—	—	—
6	2x4		5.00	40.00
7	2x3		3.65	21.90
8	6		4.29	25.74
9	6		4.22	25.32
9a	—	—	—	—
9b	—	—	—	—
10	12		4.17	50.04
10a	—	—	—	—
10b	—	—	—	—
11	5		3.74	18.70
12	10		3.31	33.10
13	4		3.66	14.64
14	4		4.01	16.04
15	6		3.01	18.06
16	3		5.02	15.06
17	7		0.70	4.90
18	10		1.65	16.50
19	3		3.40	10.20
20	12		1.10	13.20
21	4		2.11	8.44
22	4		1.10	4.40
23	20		0.21	4.20
24	6		0.84	5.04
TOTAL LENGTH			556.53	
556.53 x 1.21 =			673.40Kg	

ALL BARS ARE ϕ 14 (1.21 Kg/m)

REFERENCE DWGS: For plan & section see dwg. No. 11/1/01
 For reinforcement see dwgs. No. 11/1/3/01 TO 11/1/3/03
 For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale: IRRIGATION & DRAINAGE STANDARDS
 Date: DWG. No. 11/1/09
 Approved: Sheet No. 13 of 32 Rev. No. RECTANGULAR INCLINED DROP LIST OF REINFORCEMENT STR. 500_300 TO 600_150

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND STANDARD BUREAU

STR. 600-200				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		6.33	63.30
1a	—		—	—
2	9		5.07	45.63
3	9		3.65	32.85
4	2x6		3.54	42.48
5	2x5		4.40	44.00
5a	—		—	—
6	2x4		6.21	49.68
7	2x3		3.75	22.50
8	6		4.46	26.76
9	6		4.34	26.04
9a	—		—	—
9b	—		—	—
10	13		4.27	55.51
10a	—		—	—
10b	—		—	—
11	6		3.79	22.74
12	15		3.31	49.65
13	4		3.66	14.64
14	4		4.01	16.04
15	6		3.01	18.06
16	3		5.21	15.63
17	7		0.70	4.90
18	10		1.65	16.50
19	3		3.40	10.20
20	12		1.10	13.20
21	4		2.11	8.44
22	4		1.10	4.40
23	20		0.21	4.20
24	6		0.84	5.04
TOTAL LENGTH			612.39	
612.39 x 1.21 =			740.99 Kg	

STR. 600-250				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		6.48	64.80
1a	—		—	—
2	9		6.30	56.70
3	9		3.75	33.75
4	2x6		3.57	42.84
5	2x5		4.65	46.50
5a	—		—	—
6	2x4		7.43	59.44
7	2x3		3.85	23.10
8	6		4.62	27.72
9	6		4.46	26.76
9a	—		—	—
9b	—		—	—
10	14		4.37	61.18
10a	—		—	—
10b	—		—	—
11	6		3.84	23.04
12	19		3.31	62.89
13	4		3.66	14.64
14	5		4.01	20.05
15	6		3.01	18.06
16	3		5.39	16.17
17	7		0.70	4.90
18	10		1.65	16.50
19	3		3.40	10.20
20	12		1.10	13.20
21	4		2.11	8.44
22	4		1.10	4.40
23	20		0.21	4.20
24	6		1.06	6.36
TOTAL LENGTH			665.84	
665.84 x 1.21 =			805.67 Kg	

STR. 600-300				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		6.63	66.30
1a	—		—	—
2	9		7.53	67.77
3	9		3.90	35.10
4	2x6		3.57	42.84
5	2x6		4.90	58.80
5a	—		—	—
6	2x4		8.70	69.60
7	2x3		4.00	24.00
8	6		4.65	27.90
9	6		4.54	27.24
9a	—		—	—
9b	—		—	—
10	14		4.47	62.58
10a	—		—	—
10b	—		—	—
11	7		3.89	27.23
12	24		3.31	79.44
13	4		3.66	14.64
14	5		4.01	20.05
15	6		3.01	18.06
16	3		5.39	16.17
17	7		0.70	4.90
18	10		1.65	16.50
19	3		3.40	10.20
20	12		1.10	13.20
21	4		2.11	8.44
22	4		1.10	4.40
23	20		0.21	4.20
24	6		1.06	6.36
TOTAL LENGTH			725.92	
725.92 x 1.21 =			878.36 Kg	

STR. 600-350				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		6.73	67.30
1a	—		—	—
2	9		8.70	78.30
3	9		4.05	36.45
4	2x7		3.60	50.40
5	2x6		5.10	61.20
5a	—		—	—
6	2x4		9.91	79.28
7	2x3		4.15	24.90
8	6		4.82	28.92
9	6		4.66	27.96
9a	—		—	—
9b	—		—	—
10	15		4.57	68.55
10a	—		—	—
10b	—		—	—
11	7		3.94	27.58
12	28		3.31	92.68
13	4		3.66	14.64
14	6		4.01	24.06
15	6		3.01	18.06
16	3		5.59	16.77
17	7		0.70	4.90
18	10		1.65	16.50
19	3		3.40	10.20
20	12		1.10	13.20
21	4		2.11	8.44
22	4		1.10	4.40
23	20		0.21	4.20
24	6		1.06	6.36
TOTAL LENGTH			785.25	
785.25 x 1.21 =			950.15 Kg	

STR. 600-400				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		6.83	68.30
1a	—		—	—
2	9		9.87	88.83
3	9		4.15	37.35
4	2x7		3.60	50.40
5	2x6		5.20	62.40
5a	—		—	—
6	2x4		11.19	89.52
7	2x3		4.25	25.50
8	6		4.82	28.92
9	6		4.66	27.96
9a	—		—	—
9b	—		—	—
10	16		4.57	73.12
10a	—		—	—
10b	—		—	—
11	7		3.94	27.58
12	32		3.31	105.92
13	4		3.66	14.64
14	6		4.01	24.06
15	6		3.01	18.06
16	3		5.59	16.77
17	7		0.70	4.90
18	10		1.65	16.50
19	3		3.40	10.20
20	12		1.10	13.20
21	4		2.11	8.44
22	4		1.10	4.40
23	20		0.21	4.20
24	6		1.06	6.36
TOTAL LENGTH			827.53	
827.53 x 1.21 =			1001.31 Kg	

ALL BARS ARE Ø14 (1.21 Kg/m)

REFERENCE DWGS: For plan & section see dwg.No 11/1/1/01
 For reinforcement see dwgs.No 11/1/3/01 TO 11/1/3/03
 For bars with variable unit length see note under the same title at dwg.No 20/2/1/01

Scale: IRRIGATION & DRAINAGE STANDARDS
 Date: DWG.No. 11/1/3/10
 Approved: Sheet No.14 of 32 Rev.No. RECTANGULAR INCLINED DROP LIST OF REINFORCEMENT STR. 600-200 TO 600-400

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDJE
 TECHNICAL RESEARCH AND STANDARD BUREAU

STR. 700_100				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		6.13	61.30
1a	—	—	—	—
2	9		2.55	22.95
3	9		3.50	31.50
4	2x5		3.57	35.70
5	2x5		3.80	3.80
5a	—	—	—	—
6	2x4		3.88	31.04
7	2x3		3.60	21.60
8	6		4.15	24.90
9	6		4.16	24.96
9a	—	—	—	—
9b	—	—	—	—
10	12		4.17	50.04
10a	—	—	—	—
10b	—	—	—	—
11	4		3.84	15.36
12	6		3.51	21.06
13	4		3.86	15.44
14	4		4.21	16.84
15	6		3.21	19.26
16	3		4.50	13.50
17	8		0.70	5.60
18	10		1.70	17.00
19	3		3.60	10.80
20	12		1.15	13.80
21	4		2.21	8.84
22	4		1.10	4.40
23	20		0.21	4.20
24	6		0.84	5.04
TOTAL LENGTH			513.13	
513.13 x 1.21 =			620.89Kg	

STR. 700_150				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		6.38	63.80
1a	—	—	—	—
2	9		3.84	34.56
3	9		3.65	32.85
4	2x6		3.62	43.44
5	2x5		4.25	42.50
5a	—	—	—	—
6	2x4		5.10	40.80
7	2x3		3.75	22.50
8	6		4.49	26.94
9	6		4.41	26.46
9a	—	—	—	—
9b	—	—	—	—
10	13		4.37	56.81
10a	—	—	—	—
10b	—	—	—	—
11	5		3.94	19.70
12	10		3.51	35.10
13	4		3.86	15.44
14	4		4.21	16.84
15	6		3.21	19.26
16	3		5.21	15.63
17	8		0.70	5.60
18	10		1.70	17.00
19	3		3.60	10.80
20	12		1.15	13.80
21	4		2.21	8.84
22	4		1.10	4.40
23	20		0.21	4.20
24	6		0.84	5.04
TOTAL LENGTH			582.31	
582.31 x 1.21 =			704.60Kg	

STR. 700_200				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		6.58	65.80
1a	—	—	—	—
2	9		5.07	45.63
3	9		3.75	33.75
4	2x6		3.64	43.68
5	2x5		4.55	45.50
5a	—	—	—	—
6	2x4		6.31	50.48
7	2x3		3.85	23.10
8	6		4.65	27.90
9	6		4.53	27.18
9a	—	—	—	—
9b	—	—	—	—
10	14		4.47	62.58
10a	—	—	—	—
10b	—	—	—	—
11	6		3.99	23.94
12	15		3.51	52.65
13	4		3.86	15.44
14	5		4.21	21.05
15	6		3.21	19.26
16	3		5.39	16.17
17	8		0.70	5.60
18	10		1.70	17.00
19	3		3.60	10.80
20	12		1.15	13.80
21	4		2.21	8.84
22	4		1.10	4.40
23	20		0.21	4.20
24	6		0.84	5.04
TOTAL LENGTH			643.79	
643.79 x 1.21 =			778.99Kg	

STR. 700_250				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		6.73	67.30
1a	—	—	—	—
2	9		6.30	56.70
3	9		3.85	34.65
4	2x6		3.65	43.80
5	2x6		4.80	57.60
5a	—	—	—	—
6	2x4		7.53	60.24
7	2x3		3.95	23.70
8	6		4.68	20.08
9	6		4.61	27.66
9a	—	—	—	—
9b	—	—	—	—
10	14		4.57	63.98
10a	—	—	—	—
10b	—	—	—	—
11	6		4.04	24.24
12	19		3.51	66.69
13	4		3.86	15.44
14	5		4.21	21.05
15	6		3.21	19.26
16	3		5.39	16.17
17	8		0.70	5.60
18	10		1.70	17.00
19	3		3.60	10.80
20	12		1.15	13.80
21	4		2.21	8.84
22	4		1.10	4.40
23	20		0.21	4.20
24	6		1.06	6.36
TOTAL LENGTH			689.56	
689.56 x 1.21 =			834.37Kg	

STR. 700_300				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		6.83	68.30
1a	—	—	—	—
2	9		7.53	67.77
3	9		4.00	36.00
4	2x7		3.68	51.52
5	2x6		5.00	60.00
5a	—	—	—	—
6	2x4		8.60	70.40
7	2x3		4.10	24.60
8	6		4.85	29.10
9	6		4.73	28.38
9a	—	—	—	—
9b	—	—	—	—
10	15		4.67	70.05
10a	—	—	—	—
10b	—	—	—	—
11	7		4.09	28.63
12	24		3.51	84.24
13	4		3.86	15.44
14	6		4.21	25.26
15	6		3.21	19.26
16	3		5.59	16.77
17	8		0.70	5.60
18	10		1.70	17.00
19	3		3.60	10.80
20	12		1.15	13.80
21	4		2.21	8.84
22	4		1.10	4.40
23	20		0.21	4.20
24	6		1.06	6.63
TOTAL LENGTH			766.72	
766.72 x 1.21 =			927.73Kg	

ALL BARS ARE ϕ 14 (1.21 Kg / m)

REFERENCE DWGS: For pipe section see dwg. No. 11/1/1/01
 For reinforcement see dwgs. No. 11/1/3/01 TO 11/1/3/03
 For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale: _____
 Date: _____ DWG. No. 11/1/3/11
 Approved: _____ Sheet No. 15 of 32 Rev. No. _____
IRRIGATION & DRAINAGE STANDARDS
 RECTANGULAR INCLINED DROP
 LIST OF REINFORCEMENT
 STR. 700_100 TO 700_300

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

STR. 700-350				
Pos.	N ^o .	FORM	UNIT LENG.	LENG.
1	10		6.98	69.80
1a	—	—	—	—
2	9		8.70	78.30
3	9		4.15	37.35
4	2x7		3.71	51.94
5	2x6		5.25	63.00
5a	—	—	—	—
6	2x4		10.01	80.08
7	2x3		4.25	25.50
8	6		5.01	30.06
9	6		4.85	29.10
9a	—	—	—	—
9b	—	—	—	—
10	15		4.77	71.55
10a	—	—	—	—
10b	—	—	—	—
11	7		4.14	28.98
12	28		3.51	98.28
13	4		3.86	15.44
14	6		4.21	25.26
15	6		3.21	19.26
16	3		5.78	17.34
17	8		0.70	5.60
18	10		1.70	17.00
19	3		3.60	10.80
20	12		1.15	13.80
21	4		2.21	8.84
22	4		1.10	4.40
23	20		0.21	4.20
24	6		1.06	6.36
TOTAL LENGTH			812.24	
812.24			x 1.21	= 982.81 Kg

STR. 700-400				
Pos.	N ^o .	FORM	UNIT LENG.	LENG.
1	10		7.08	70.80
1a	—	—	—	—
2	9		9.87	88.83
3	9		4.25	38.25
4	2x7		3.71	51.94
5	2x6		5.35	64.20
5a	—	—	—	—
6	2x4		11.29	90.32
7	2x3		4.35	26.10
8	6		5.01	30.06
9	6		4.85	29.10
9a	—	—	—	—
9b	—	—	—	—
10	16		4.77	76.32
10a	—	—	—	—
10b	—	—	—	—
11	7		4.14	28.98
12	32		3.51	112.32
13	4		3.86	15.44
14	7		4.21	29.47
15	6		3.21	19.26
16	3		5.78	17.34
17	8		0.70	5.60
18	10		1.70	17.00
19	3		3.60	10.80
20	12		1.15	13.80
21	4		2.21	8.84
22	4		1.10	4.40
23	20		0.21	4.20
24	6		1.06	6.36
TOTAL LENGTH			859.73	
859.73			x 1.21	= 1040.27 Kg

STR. 800-100				
Pos.	N ^o .	FORM	UNIT LENG.	LENG.
1	10		6.43	64.30
1a	—	—	—	—
2	9		2.55	22.95
3	9		3.55	31.95
4	10		3.67	36.70
5	2x5		4.10	41.00
5a	—	—	—	—
6	2x4		3.83	30.64
7	6		3.65	21.90
8	7		4.18	29.26
9	6		4.24	25.44
9a	—	—	—	—
9b	—	—	—	—
10	13		4.23	54.99
10a	—	—	—	—
10b	—	—	—	—
11	5		3.89	19.45
12	5		3.51	17.55
13	5		3.91	19.55
14	4		4.31	17.24
15	6		3.31	19.86
16	3		4.83	14.49
17	8		0.70	5.60
18	10		1.75	17.50
19	3		3.70	11.10
20	12		1.20	14.40
21	4		2.21	8.84
22	6		1.10	6.60
23	27		0.21	5.67
24	8		0.84	6.72
TOTAL LENGTH			543.70	
543.70			x 1.21	= 657.88 Kg

STR. 800-150				
Pos.	N ^o .	FORM	UNIT LENG.	LENG.
1	10		6.68	66.80
1a	—	—	—	—
2	9		3.84	34.56
3	9		3.70	33.30
4	2x6		3.71	44.52
5	2x5		4.55	45.50
5a	—	—	—	—
6	2x4		5.05	40.40
7	2x3		3.80	22.80
8	7		4.51	31.57
9	6		4.48	26.88
9a	—	—	—	—
9b	—	—	—	—
10	14		4.47	62.58
10a	—	—	—	—
10b	—	—	—	—
11	6		3.99	23.94
12	10		3.51	35.10
13	5		3.91	19.55
14	4		4.31	17.24
15	6		3.31	19.86
16	3		5.21	15.63
17	8		0.70	5.60
18	10		1.75	17.50
19	3		3.70	11.10
20	12		1.20	14.40
21	4		2.21	8.84
22	6		1.10	6.60
23	27		0.21	5.67
24	8		0.84	6.72
TOTAL LENGTH			616.66	
616.66			x 1.21	= 746.16 Kg

STR. 800-200				
Pos.	N ^o .	FORM	UNIT LENG.	LENG.
1	10		6.88	68.80
1a	—	—	—	—
2	9		5.07	45.63
3	9		3.80	34.20
4	2x6		3.74	44.88
5	2x6		4.85	58.20
5a	—	—	—	—
6	2x4		6.26	50.08
7	2x3		3.90	23.40
8	7		4.68	32.76
9	6		4.61	27.66
9a	—	—	—	—
9b	—	—	—	—
10	15		4.57	68.55
10a	—	—	—	—
10b	—	—	—	—
11	6		4.04	24.24
12	14		3.51	49.14
13	5		3.91	19.55
14	5		4.31	21.55
15	6		3.31	19.86
16	3		5.39	16.17
17	8		0.70	5.60
18	10		1.75	17.50
19	3		3.70	11.10
20	12		1.20	14.40
21	4		2.21	8.84
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.06	8.48
TOTAL LENGTH			682.86	
682.86			x 1.21	= 826.26 Kg

ALL BARS ARE Ø 14 (1.21 Kg / m)

REFERENCE DWGS: For plan & section see dwg. No. 11/1/1/01
 For reinforcement see dwgs. No. 11/1/3/01 TO 11/1/3/03
 For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale: IRRIGATION & DRAINAGE STANDARDS
 Date: DWG. No. 11/1/3/12
 Approved: Sheet No. 16 of 32 Rev. No. RECTANGULAR INCLINED DROP
 LIST OF REINFORCEMENT
 STR. 700-350 TO 800-200

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

STR. 800-250				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		7.03	70.30
1a	—		—	—
2	9		6.30	56.70
3	9		3.95	35.55
4	2x7		3.80	53.20
5	2x6		5.20	62.40
5a	—		—	—
6	2x4		7.42	59.36
7	2x3		4.05	24.30
8	7		5.01	35.07
9	6		4.85	29.10
9a	—		—	—
9b	—		—	—
10	15		4.77	71.55
10a	—		—	—
10b	—		—	—
11	7		4.14	28.98
12	18		3.51	63.18
13	5		3.91	19.55
14	5		4.31	21.55
15	6		3.31	19.86
16	3		5.78	17.34
17	8		0.70	5.60
18	10		1.75	17.50
19	3		3.70	11.10
20	12		1.20	14.40
21	4		2.21	8.84
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.06	8.48
TOTAL LENGTH			746.18	
746.18 x 1.21 =			902.88 Kg	

STR. 800-300				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		7.23	72.30
1a	—		—	—
2	9		7.53	67.77
3	9		4.10	36.90
4	2x7		3.80	53.20
5	2x6		5.50	66.00
5a	—		—	—
6	2x4		8.69	69.52
7	2x3		4.20	25.20
8	7		5.03	35.21
9	6		4.92	29.52
9a	—		—	—
9b	—		—	—
10	16		4.87	77.92
10a	—		—	—
10b	—		—	—
11	8		4.19	33.52
12	23		3.51	80.73
13	5		3.91	19.55
14	6		4.31	25.86
15	6		3.31	19.86
16	3		5.78	17.34
17	8		0.70	5.60
18	10		1.75	17.50
19	3		3.70	11.10
20	12		1.20	14.40
21	4		2.21	8.84
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.06	8.48
TOTAL LENGTH			808.59	
808.59 x 1.21 =			978.39 Kg	

STR. 800-350				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		7.33	73.30
1a	—		—	—
2	9		8.70	78.30
3	9		4.25	38.25
4	2x8		3.86	61.76
5	2x6		5.70	68.40
5a	—		—	—
6	2x4		9.90	79.20
7	2x3		4.35	26.10
8	7		5.34	37.38
9	6		5.09	30.54
9a	—		—	—
9b	—		—	—
10	17		4.97	84.49
10a	—		—	—
10b	—		—	—
11	8		4.24	33.92
12	27		3.51	94.77
13	5		3.91	19.55
14	6		4.31	25.86
15	6		3.31	19.86
16	3		6.15	18.45
17	8		0.70	5.60
18	10		1.75	17.50
19	3		3.70	11.10
20	12		1.20	14.40
21	4		2.21	8.84
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.06	8.48
TOTAL LENGTH			868.32	
868.32 x 1.21 =			1050.67 Kg	

STR. 800-400				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		7.48	74.80
1a	—		—	—
2	9		9.87	88.83
3	9		4.35	39.15
4	2x8		3.86	61.76
5	2x6		5.85	70.20
5a	—		—	—
6	2x4		11.17	89.36
7	2x3		4.45	26.70
8	7		5.34	37.38
9	6		5.09	30.54
9a	—		—	—
9b	—		—	—
10	17		4.97	84.49
10a	—		—	—
10b	—		—	—
11	8		4.24	33.92
12	32		3.51	112.32
13	5		3.91	19.55
14	7		4.31	30.17
15	6		3.31	19.86
16	3		6.15	18.45
17	8		0.70	5.60
18	10		1.75	17.50
19	3		3.90	11.70
20	12		1.20	14.40
21	4		2.21	8.84
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.06	8.48
TOTAL LENGTH			915.67	
915.67 x 1.21 =			1107.96 Kg	

STR. 900-100				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		6.63	66.30
1a	—		—	—
2	9		2.55	22.95
3	9		3.95	35.55
4	2x5		3.77	37.70
5	2x5		4.30	43.00
5a	—		—	—
6	2x4		3.82	30.56
7	2x3		4.05	24.30
8	7		4.36	30.52
9	6		4.44	26.64
9a	—		—	—
9b	—		—	—
10	13		4.47	58.11
10a	—		—	—
10b	—		—	—
11	5		4.04	20.20
12	5		3.61	18.05
13	5		4.01	20.05
14	4		4.41	17.64
15	7		3.41	23.87
16	3		5.02	15.06
17	8		0.70	5.60
18	10		1.75	17.50
19	3		3.90	11.70
20	12		1.25	15.00
21	4		2.31	9.24
22	6		1.10	6.60
23	27		0.21	5.67
24	8		0.84	6.72
TOTAL LENGTH			568.53	
568.53 x 1.21 =			687.92 Kg	

ALL BARS ARE Ø14 (1.21 Kg/m)

REFERENCE DWGS: For plan & section see dwg. No. 11/1/1/01
 For reinforcement see dwgs. No. 11/1/3/01 TO 11/1/3/03
 For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale: IRRIGATION & DRAINAGE STANDARDS
 Date: DWG. No. 11/1/3/13
 Approved: Sheet No. 17 of 32 Rev. No. RECTANGULAR INCLINED DROP LIST OF REINFORCEMENT STR. 800-250 TO 900-100

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BU
 TECHNICAL RESEARCH AND STANDARD BUREAU

STR. 800-250				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		7.03	70.30
1a	—	—	—	—
2	9		6.30	56.70
3	9		3.95	35.55
4	2x7		3.80	53.20
5	2x6		5.20	62.40
5a	—	—	—	—
6	2x4		7.42	59.36
7	2x3		4.05	24.30
8	7		5.01	35.07
9	6		4.85	29.10
9a	—	—	—	—
9b	—	—	—	—
10	15		4.77	71.55
10a	—	—	—	—
10b	—	—	—	—
11	7		4.14	28.98
12	18		3.51	63.18
13	5		3.91	19.55
14	5		4.31	21.55
15	6		3.31	19.86
16	3		5.78	17.34
17	8		0.70	5.60
18	10		1.75	17.50
19	3		3.70	11.10
20	12		1.20	14.40
21	4		2.21	8.84
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.06	8.48
TOTAL LENGTH			746.18	
746.18 x 1.21 =			902.88 Kg	

STR. 800-300				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		7.23	72.30
1a	—	—	—	—
2	9		7.53	67.77
3	9		4.10	36.90
4	2x7		3.80	53.20
5	2x6		5.50	66.00
5a	—	—	—	—
6	2x4		8.69	69.52
7	2x3		4.20	25.20
8	7		5.03	35.21
9	6		4.92	29.52
9a	—	—	—	—
9b	—	—	—	—
10	16		4.87	77.92
10a	—	—	—	—
10b	—	—	—	—
11	8		4.19	33.52
12	23		3.51	80.73
13	5		3.91	19.55
14	6		4.31	25.86
15	6		3.31	19.86
16	3		5.78	17.34
17	8		0.70	5.60
18	10		1.75	17.50
19	3		3.70	11.10
20	12		1.20	14.40
21	4		2.21	8.84
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.06	8.48
TOTAL LENGTH			808.59	
808.59 x 1.21 =			978.39 Kg	

STR. 800-350				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		7.33	73.30
1a	—	—	—	—
2	9		8.70	78.30
3	9		4.25	38.25
4	2x8		3.86	61.76
5	2x6		5.70	68.40
5a	—	—	—	—
6	2x4		9.90	79.20
7	2x3		4.35	26.10
8	7		5.34	37.38
9	6		5.09	30.54
9a	—	—	—	—
9b	—	—	—	—
10	17		4.97	84.49
10a	—	—	—	—
10b	—	—	—	—
11	8		4.24	33.92
12	27		3.51	94.77
13	5		3.91	19.55
14	6		4.31	25.86
15	6		3.31	19.86
16	3		6.15	18.45
17	8		0.70	5.60
18	10		1.75	17.50
19	3		3.70	11.10
20	12		1.20	14.40
21	4		2.21	8.84
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.06	8.48
TOTAL LENGTH			868.32	
868.32 x 1.21 =			1050.67 Kg	

STR. 800-400				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		7.48	74.80
1a	—	—	—	—
2	9		9.87	88.83
3	9		4.35	39.15
4	2x8		3.86	61.76
5	2x6		5.85	70.20
5a	—	—	—	—
6	2x4		11.17	89.36
7	2x3		4.45	26.70
8	7		5.34	37.38
9	6		5.09	30.54
9a	—	—	—	—
9b	—	—	—	—
10	17		4.97	84.49
10a	—	—	—	—
10b	—	—	—	—
11	8		4.24	33.92
12	32		3.51	112.32
13	5		3.91	19.55
14	7		4.31	30.17
15	6		3.31	19.86
16	3		6.15	18.45
17	8		0.70	5.60
18	10		1.75	17.50
19	3		3.70	11.10
20	12		1.20	14.40
21	4		2.21	8.84
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.06	8.48
TOTAL LENGTH			915.67	
915.67 x 1.21 =			1107.96 Kg	

STR. 900-100				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		6.63	66.30
1a	—	—	—	—
2	9		2.55	22.95
3	9		3.95	35.55
4	2x5		3.77	37.70
5	2x5		4.30	43.00
5a	—	—	—	—
6	2x4		3.82	30.56
7	2x3		4.05	24.30
8	7		4.36	30.52
9	6		4.44	26.64
9a	—	—	—	—
9b	—	—	—	—
10	13		4.47	58.11
10a	—	—	—	—
10b	—	—	—	—
11	5		4.04	20.20
12	5		3.51	18.05
13	5		4.01	20.05
14	4		4.41	17.64
15	7		3.41	23.87
16	3		5.02	15.06
17	8		0.70	5.60
18	10		1.75	17.50
19	3		3.90	11.70
20	12		1.25	15.00
21	4		2.31	9.24
22	6		1.10	6.60
23	27		0.21	5.67
24	8		0.84	6.72
TOTAL LENGTH			568.53	
568.53 x 1.21 =			687.92 Kg	

ALL BARS ARE $\phi 14$ (1.21 Kg/m)

REFERENCE DWGS: For plan & section see dwg. No. 11/1/01
 For reinforcement see dwgs. No. 11/1/3/01 TO 11/1/3/03
 For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale: IRRIGATION & DRAINAGE STANDARDS
 Date: DWG. No. 11/1/3/13
 Approved: Sheet No. 17 of 32 Rev. No. RECTANGULAR INCLINED DROP LIST OF REINFORCEMENT STR. 800-250 TO 900-100

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND STANDARD BUREAU

STR. 900-150				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		6.88	68.80
1a	—	—	—	—
2	9		3.84	34.56
3	9		4.05	36.45
4	2x6		3.82	45.84
5	2x6		4.75	57.00
5a	—	—	—	—
6	2x4		4.98	39.84
7	2x3		4.15	24.90
8	7		4.70	32.90
9	6		4.69	28.14
9a	—	—	—	—
9b	—	—	—	—
10	14		4.67	65.38
10a	—	—	—	—
10b	—	—	—	—
11	6		4.14	24.84
12	9		3.61	32.49
13	5		4.01	20.05
14	4		4.41	17.64
15	7		3.41	23.87
16	3		5.39	16.17
17	8		0.70	5.60
18	10		1.75	17.50
19	3		3.90	11.70
20	12		1.25	15.00
21	4		2.31	9.24
22	6		1.10	6.60
23	27		0.21	5.67
24	8		0.84	6.72
TOTAL LENGTH			646.90	
646.90 x 1.21 =			782.75 Kg	

STR. 900-200				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		7.08	70.80
1a	—	—	—	—
2	9		5.07	45.63
3	9		4.15	37.35
4	2x6		3.84	46.08
5	2x6		5.05	60.60
5a	—	—	—	—
6	2x4		6.20	49.60
7	2x3		4.25	25.50
8	7		4.87	34.09
9	6		4.81	28.86
9a	—	—	—	—
9b	—	—	—	—
10	15		4.77	71.55
10a	—	—	—	—
10b	—	—	—	—
11	7		4.19	29.33
12	14		3.61	50.54
13	5		4.01	20.05
14	5		4.41	22.05
15	7		3.41	23.87
16	3		5.59	16.77
17	8		0.70	5.60
18	10		1.75	17.50
19	3		3.90	11.70
20	12		1.25	15.00
21	4		2.31	9.24
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.06	8.48
TOTAL LENGTH			712.46	
712.46 x 1.21 =			862.08 Kg	

STR. 900-250				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		7.28	72.80
1a	—	—	—	—
2	9		6.30	56.70
3	9		4.35	39.15
4	2x7		3.87	54.18
5	2x6		5.35	64.20
5a	—	—	—	—
6	2x4		7.52	60.16
7	2x3		4.45	26.70
8	7		5.03	35.21
9	6		4.93	29.58
9a	—	—	—	—
9b	—	—	—	—
10	16		4.87	77.92
10a	—	—	—	—
10b	—	—	—	—
11	7		4.24	29.60
12	18		3.61	64.98
13	5		4.01	20.05
14	6		4.41	26.46
15	7		3.41	23.87
16	3		5.70	17.34
17	8		0.70	5.60
18	10		1.75	17.50
19	3		3.90	11.70
20	12		1.50	15.00
21	4		2.31	9.24
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.06	8.48
TOTAL LENGTH			778.77	
778.77 x 1.21 =			942.31 Kg	

STR. 900-300				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		7.43	74.30
1a	—	—	—	—
2	9		7.53	67.77
3	9		4.45	40.05
4	2x7		3.87	54.18
5	2x6		5.60	67.20
5a	—	—	—	—
6	2x4		8.74	69.92
7	2x3		4.55	27.30
8	7		5.05	35.35
9	6		5.00	30.00
9a	—	—	—	—
9b	—	—	—	—
10	17		4.97	84.49
10a	—	—	—	—
10b	—	—	—	—
11	8		4.29	34.32
12	23		3.61	83.03
13	5		4.01	20.05
14	6		4.41	26.46
15	7		3.41	23.87
16	3		5.78	17.34
17	8		0.70	5.60
18	10		1.75	17.50
19	3		3.90	11.70
20	12		1.25	15.00
21	4		2.31	9.24
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.06	8.48
TOTAL LENGTH			835.42	
835.42 x 1.21 =			1010.86 Kg	

STR. 900-350				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		7.58	75.80
1a	—	—	—	—
2	9		8.70	78.30
3	9		4.65	41.85
4	2x7		3.93	55.02
5	2x6		5.85	70.20
5a	—	—	—	—
6	2x4		10.00	80.00
7	2x3		4.75	28.50
8	7		5.36	37.52
9	6		5.17	31.02
9a	—	—	—	—
9b	—	—	—	—
10	17		5.07	86.19
10a	—	—	—	—
10b	—	—	—	—
11	8		4.34	34.72
12	27		3.61	97.47
13	5		4.01	20.05
14	7		4.41	30.87
15	7		3.41	23.87
16	3		6.15	18.45
17	8		0.70	5.60
18	10		1.75	17.50
19	3		3.90	11.70
20	12		1.25	15.00
21	4		2.31	9.24
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.06	8.48
TOTAL LENGTH			889.62	
889.62 x 1.21 =			1076.44 Kg	

ALL BARS ARE $\phi 14$ (1.21 Kg/m)

REFERENCE DWGS: For plan & section see dwg. No. 11/1/1/01
 For reinforcement see dwgs. No. 11/1/3/01 TO 11/1/3/03
 For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale: IRRIGATION & DRAINAGE STANDARDS
 Date: DWG. No. 11/1/3/14
 Approved: Sheet No. 18 of 32 Rev. No. RECTANGULAR INCLINED DROP LIST OF REINFORCEMENT STR. 900-150 TO 900-350

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & CONSTRUCTION
 TECHNICAL RESEARCH CENTER
 STANDARD BUREAU

STR. 900_400				
Pos.	N ^o .	FORM	UNIT LENG.	LENG.
1	10		7.68	76.80
1a	-	-	-	-
2	9		9.87	88.83
3	9		4.75	42.75
4	2x7		3.93	55.02
5	2x7		6.05	84.70
5a	-	-	-	-
6	2x4		11.16	89.28
7	2x3		4.85	29.10
8	7		5.39	37.73
9	6		5.25	31.50
9a	-	-	-	-
9b	-	-	-	-
10	18		5.17	93.06
10a	-	-	-	-
10b	-	-	-	-
11	9		4.39	39.51
12	31		3.61	111.91
13	5		4.01	20.05
14	7		4.41	30.87
15	7		3.41	23.87
16	3		6.15	18.45
17	8		0.70	5.60
18	10		1.75	17.50
19	3		3.90	11.70
20	12		1.25	15.00
21	4		2.31	9.24
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.06	8.48
TOTAL LENGTH			953.22	
953.22 x 1.21 =			1153.40 Kg	

STR. 1000_100				
Pos.	N ^o .	FORM	UNIT LENG.	LENG.
1	10		6.85	68.50
1a	-	-	-	-
2	9		2.88	22.95
3	9		4.00	36.00
4	2x6		3.89	46.68
5	2x5		4.55	45.50
5a	-	-	-	-
6	2x4		3.76	29.92
7	2x3		4.10	24.60
8	7		4.53	31.71
9	6		4.56	27.36
9a	-	-	-	-
9b	-	-	-	-
10	14		4.57	63.98
10a	-	-	-	-
10b	-	-	-	-
11	6		4.09	24.54
12	4		3.61	14.44
13	5		4.06	20.30
14	4		4.51	18.04
15	7		3.51	24.57
16	3		5.33	15.99
17	8		0.80	6.40
18	12		1.90	22.80
19	3		4.00	12.00
20	12		1.30	15.60
21	4		2.31	9.24
22	6		1.10	6.60
23	27		0.21	5.67
24	8		0.84	6.72
TOTAL LENGTH			600.11	
600.11 x 1.21 =			726.13 Kg	

STR. 1000_150				
Pos.	N ^o .	FORM	UNIT LENG.	LENG.
1	10		7.15	71.50
1a	-	-	-	-
2	9		3.84	34.56
3	9		4.10	36.90
4	2x6		3.94	47.28
5	2x6		5.05	60.60
5a	-	-	-	-
6	2x4		4.90	39.20
7	2x3		4.20	25.20
8	7		4.87	34.09
9	6		4.81	28.86
9a	-	-	-	-
9b	-	-	-	-
10	15		4.77	71.55
10a	-	-	-	-
10b	-	-	-	-
11	7		4.19	29.33
12	9		3.61	32.49
13	5		4.06	20.30
14	4		4.51	18.04
15	7		3.51	24.57
16	3		5.72	17.16
17	8		0.80	6.40
18	12		1.90	22.80
19	3		4.00	12.00
20	12		1.30	15.60
21	4		2.31	9.24
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.06	8.48
TOTAL LENGTH			678.42	
678.42 x 1.21 =			820.89 Kg	

STR. 1000_200				
Pos.	N ^o .	FORM	UNIT LENG.	LENG.
1	10		7.35	73.50
1a	-	-	-	-
2	9		4.98	44.82
3	9		4.25	38.25
4	2x7		4.00	56.00
5	2x6		5.45	65.40
5a	-	-	-	-
6	2x4		6.06	48.48
7	2x3		4.35	26.10
8	7		5.19	36.33
9	6		5.05	30.30
9a	-	-	-	-
9b	-	-	-	-
10	16		4.97	79.52
10a	-	-	-	-
10b	-	-	-	-
11	8		4.29	34.32
12	13		3.61	46.93
13	5		4.06	20.30
14	5		4.51	22.55
15	7		3.51	24.57
16	3		6.08	18.24
17	8		0.80	6.40
18	12		1.90	22.80
19	3		4.00	12.00
20	12		1.30	15.60
21	4		2.31	9.24
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.06	8.48
TOTAL LENGTH			752.40	
752.40 x 1.21 =			910.40 Kg	

STR. 1000_250				
Pos.	N ^o .	FORM	UNIT LENG.	LENG.
1	10		7.55	75.50
1a	-	-	-	-
2	9		6.30	56.70
3	9		4.40	39.60
4	2x7		4.03	56.42
5	2x6		5.75	69.00
5a	-	-	-	-
6	2x4		7.33	58.64
7	2x3		4.50	27.00
8	7		5.36	37.52
9	6		5.17	31.02
9a	-	-	-	-
9b	-	-	-	-
10	17		5.07	86.19
10a	-	-	-	-
10b	-	-	-	-
11	8		4.34	34.72
12	17		3.61	61.37
13	5		4.06	20.30
14	5		4.51	22.55
15	7		3.51	24.57
16	3		6.28	18.84
17	8		0.80	6.40
18	12		1.90	22.80
19	3		4.00	12.00
20	12		1.30	15.60
21	4		2.31	9.24
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.06	8.48
TOTAL LENGTH			806.73	
806.73 x 1.21 =			976.14 Kg	

ALL BARS ARE ϕ 14 (1.21 Kg/m)

REFERENCE DWGS: For plan & section see dwg. No. 11/1/1/01
 For reinforcement see dwgs. No. 11/1/3/01 TO 11/1/3/03
 For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale:	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG. No. 11/1/3/15	RECTANGULAR INCLINED DROP
Approved:	Sheet No. 19 of 32	Rev. No. _____
		LIST OF REINFORCEMENT
		STR. 900_400 TO 1000_250

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDJET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

STR. 1000_300				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		7.70	77.00
1a	—	—	—	—
2	9		7.53	67.77
3	9		4.55	40.95
4	2x8		4.05	64.95
5	2x7		6.00	84.00
5a	—	—	—	—
6	2x4		8.60	68.80
7	2x3		4.55	27.90
8	7		5.53	38.71
9	6		5.30	31.80
9a	—	—	—	—
9b	—	—	—	—
10	18		5.17	93.06
10a	—	—	—	—
10b	—	—	—	—
11	9		4.39	39.51
12	22		3.61	79.42
13	5		4.06	20.30
14	6		4.51	27.06
15	7		3.51	24.57
16	3		6.46	19.38
17	8		0.80	6.40
18	12		1.90	22.80
19	3		4.00	12.00
20	12		1.30	15.60
21	4		2.31	9.24
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.30	10.40
TOTAL LENGTH			839.90	
839.90 x 1.21 =			1081.62 Kg	

STR. 1000_350				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		7.85	78.50
1a	—	—	—	—
2	9		8.70	78.30
3	9		4.75	42.75
4	2x8		4.10	65.60
5	2x7		6.25	87.50
5a	—	—	—	—
6	2x4		9.86	78.88
7	2x3		4.85	29.10
8	7		5.70	39.90
9	6		5.42	32.52
9a	—	—	—	—
9b	—	—	—	—
10	18		5.27	94.86
10a	—	—	—	—
10b	—	—	—	—
11	9		4.44	39.96
12	26		3.61	93.86
13	5		4.06	20.30
14	7		4.51	31.57
15	7		3.51	24.57
16	3		6.66	19.98
17	8		0.80	6.40
18	12		1.90	22.80
19	3		4.00	12.00
20	12		1.30	15.60
21	4		2.31	9.24
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.30	10.40
TOTAL LENGTH			946.86	
946.86 x 1.21 =			1145.70 Kg	

STR. 1000_400				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		7.95	79.50
1a	—	—	—	—
2	9		9.87	88.83
3	9		4.85	43.65
4	2x9		4.13	74.34
5	2x7		6.45	90.30
5a	—	—	—	—
6	2x4		11.02	88.16
7	2x3		4.95	29.70
8	7		5.86	41.02
9	6		5.54	33.24
9a	—	—	—	—
9b	—	—	—	—
10	19		5.37	102.03
10a	—	—	—	—
10b	—	—	—	—
11	10		4.49	44.90
12	30		3.61	108.30
13	5		4.06	20.30
14	7		4.51	31.57
15	7		3.51	24.57
16	3		6.84	20.52
17	8		0.80	6.40
18	12		1.90	22.80
19	3		4.00	12.00
20	12		1.30	15.60
21	4		2.31	9.24
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.30	10.40
TOTAL LENGTH			1009.64	
1009.64 x 1.21 =			1221.66 Kg	

STR. 1200_100				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	11		7.35	80.85
1a	—	—	—	—
2	10		2.55	25.50
3	10		4.10	41.00
4	2x6		4.20	50.40
5	2x6		4.75	57.00
5a	—	—	—	—
6	2x4		3.84	30.72
7	2x4		4.20	33.60
8	7		4.85	33.95
9	7		4.84	33.88
9a	—	—	—	—
9b	—	—	—	—
10	15		4.82	72.30
10a	—	—	—	—
10b	—	—	—	—
11	6		4.34	26.04
12	4		3.86	15.44
13	5		4.31	21.55
14	4		4.76	19.04
15	7		3.76	26.32
16	3		5.66	16.98
17	9		0.80	7.20
18	12		1.95	23.40
19	3		4.35	13.05
20	14		1.40	19.60
21	4		2.46	9.84
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.06	8.48
TOTAL LENGTH			678.41	
678.41 x 1.21 =			820.88 Kg	

STR. 1200_150				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	11		7.60	83.60
1a	—	—	—	—
2	10		3.84	38.40
3	10		4.25	42.50
4	2x7		4.25	59.50
5	2x6		5.20	62.40
5a	—	—	—	—
6	2x4		5.05	40.40
7	2x4		4.35	34.80
8	7		5.18	36.26
9	7		5.08	35.56
9a	—	—	—	—
9b	—	—	—	—
10	16		5.02	80.32
10a	—	—	—	—
10b	—	—	—	—
11	7		4.44	31.08
12	9		3.86	34.74
13	5		4.31	21.55
14	5		4.76	23.80
15	7		3.76	26.32
16	3		6.05	18.15
17	9			

STR. 1200_200				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	11		7.85	8635
1a	-		-	-
2	10		5.07	5070
3	10		4.35	4350
4	2x7		4.30	6020
5	2x6		5.65	6780
5a	-		-	-
6	2x4		6.16	4928
7	2x4		4.45	3560
8	7		5.51	3857
9	7		5.32	3724
9a	-		-	-
9b	-		-	-
10	17		5.22	8874
10a	-		-	-
10b	-		-	-
11	8		4.54	3632
12	13		3.86	5018
13	5		4.31	2155
14	5		4.76	2380
15	7		3.76	2632
16	3		6.42	1926
17	9		0.80	720
18	12		1.95	2340
19	3		4.35	1305
20	14		1.40	1960
21	4		2.46	984
22	6		1.10	660
23	27		0.21	567
24	8		1.06	848
TOTAL LENGTH			829.25	
829.25 x 1.21 =			1003.39 Kg	

STR. 1200_250				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	11		8.05	8855
1a	-		-	-
2	10		6.30	6300
3	10		4.50	4500
4	2x8		4.33	6928
5	2x7		5.95	8330
5a	-		-	-
6	2x4		7.43	5944
7	2x4		4.60	3680
8	7		5.68	3976
9	7		5.45	3815
9a	-		-	-
9b	-		-	-
10	18		5.32	9576
10a	-		-	-
10b	-		-	-
11	8		4.59	3672
12	17		3.86	6562
13	5		4.31	2155
14	6		4.76	2380
15	7		3.76	2632
16	3		6.61	1983
17	9		0.80	720
18	12		1.95	2340
19	3		4.35	1305
20	14		1.40	1960
21	4		2.46	984
22	6		1.10	660
23	27		0.21	567
24	8		1.30	1040
TOTAL LENGTH			908.64	
908.64 x 1.21 =			1099.45 Kg	

STR. 1200_350				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	11		8.20	9020
1a	-		-	-
2	10		7.53	7530
3	10		4.70	4700
4	2x8		4.34	6944
5	2x7		6.20	8680
5a	-		-	-
6	2x4		8.75	7000
7	2x4		4.80	3840
8	7		5.70	3980
9	7		5.47	3829
9a	-		-	-
9b	-		-	-
10	18		5.42	9756
10a	-		-	-
10b	-		-	-
11	9		4.64	4176
12	22		3.86	8492
13	5		4.31	2155
14	7		4.76	3332
15	7		3.76	2632
16	3		6.61	1983
17	9		0.80	720
18	12		1.95	2340
19	3		4.35	1305
20	14		1.40	1960
21	4		2.46	984
22	6		1.10	660
23	27		0.21	567
24	8		1.30	1040
TOTAL LENGTH			976.35	
976.35 x 1.21 =			1181.38 Kg	

STR. 1200_350				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	11		8.35	9185
1a	-		-	-
2	10		8.70	8700
3	10		4.85	4850
4	2x8		4.37	6992
5	2x7		6.45	9030
5a	-		-	-
6	2x4		9.96	7968
7	2x4		4.95	3960
8	7		5.87	4109
9	7		5.64	3948
9a	-		-	-
9b	-		-	-
10	19		5.52	10488
10a	-		-	-
10b	-		-	-
11	9		4.69	4221
12	26		3.86	10036
13	5		4.31	2155
14	7		4.76	3332
15	7		3.76	2632
16	3		6.81	2043
17	9		0.80	720
18	12		1.95	2340
19	3		4.35	1305
20	14		1.40	1960
21	4		2.46	984
22	6		1.10	660
23	27		0.21	567
24	8		1.30	1040
TOTAL LENGTH			1032.25	
1032.25 x 1.21 =			1249.02 Kg	

STR. 1200_400				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	11		8.45	9295
1a	-		-	-
2	10		9.87	9870
3	10		5.00	5000
4	2x10		4.43	8860
5	2x8		6.65	10640
5a	-		-	-
6	2x4		11.17	8936
7	2x4		5.10	4080
8	7		6.08	4256
9	7		5.84	4088
9a	-		-	-
9b	-		-	-
10	20		5.68	11360
10a	-		-	-
10b	-		-	-
11	10		4.080	4800
12	30		3.92	11760
13	5		4.37	2185
14	8		4.82	3856
15	7		3.82	2674
16	3		6.98	2094
17	9		0.80	720
18	12		1.95	2340
19	3		4.35	1305
20	14		1.40	1960
21	4		2.52	1008
22	6		1.10	660
23	27		0.21	567
24	8		1.30	1040
TOTAL LENGTH			1133.54	
1133.54 x 1.21 =			1371.58 Kg	

ALL BARS ARE ϕ 14 (1.21 Kg/m)

REFERENCE DWGS: For plan section see dwg. No. 11/1/1/01
 For reinforcement see dwgs. No. 11/1/3/01 TO 11/1/3/03
 For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale:	IRRIGATION & DRAINAGE STANDARDS		ISLAMIC REPUBLIC OF IRAN MINISTRY OF PLAN & BUD. TECHNICAL RESEARCH AND STANDARD BUREAU
Date:	DWG. No. 11/1/3/17	RECTANGULAR INCLINED DROP LIST OF REINFORCEMENT	
Approved:	Sheet No. 21 of 32	Rev. No. STR. 1200_200 TO 1200_400	

STR. 1400-100				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	12		7.45	89.40
1a	—		—	—
2	10		2.55	25.50
3	10		4.15	41.50
4	2x6		4.20	50.40
5	2x6		4.95	59.40
5a	—		—	—
6	2x4		3.79	30.32
7	2x4		4.25	34.00
8	7		5.07	35.49
9	7		5.08	35.56
9a	—		—	—
9b	—		—	—
10	15		5.07	76.05
10a	—		—	—
10b	—		—	—
11	6		4.54	27.24
12	4		4.01	16.04
13	6		4.51	27.06
14	4		5.01	20.04
15	7		4.01	28.07
16	3		5.86	17.58
17	9		0.80	7.20
18	12		2.00	24.00
19	3		4.60	13.80
20	14		1.45	20.30
21	4		2.61	10.44
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.06	8.48
TOTAL LENGTH			710.14	
710.14 x 1.21 =			859.27Kg	

STR. 1400-150				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	12		7.75	93.00
1a	—		—	—
2	10		3.84	38.40
3	10		4.35	63.50
4	2x7		4.25	59.50
5	2x6		5.45	65.40
5a	—		—	—
6	2x4		5.05	40.40
7	2x4		4.45	35.60
8	7		5.39	37.73
9	7		5.32	37.24
9a	—		—	—
9b	—		—	—
10	16		5.27	84.32
10a	—		—	—
10b	—		—	—
11	7		4.64	32.48
12	8		4.01	32.08
13	6		4.51	27.06
14	5		5.01	25.05
15	7		4.01	28.07
16	3		6.23	18.69
17	9		0.80	7.20
18	12		2.00	24.00
19	3		4.60	13.80
20	14		1.45	20.30
21	4		2.61	10.44
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.06	8.48
TOTAL LENGTH			795.01	
795.01 x 1.21 =			961.96Kg	

STR. 1400-200				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	12		8.00	96.00
1a	—		—	—
2	10		5.07	50.70
3	10		4.45	44.50
4	2x7		4.28	59.92
5	2x7		5.90	82.60
5a	—		—	—
6	2x4		6.16	49.28
7	2x4		4.55	36.40
8	7		5.59	39.13
9	7		5.52	38.64
9a	—		—	—
9b	—		—	—
10	18		5.47	98.46
10a	—		—	—
10b	—		—	—
11	8		4.74	37.92
12	12		4.01	48.12
13	6		4.51	27.06
14	5		5.01	25.05
15	7		4.01	28.07
16	3		6.42	19.26
17	9		0.80	7.20
18	12		2.00	24.00
19	3		4.60	13.80
20	14		1.45	20.30
21	4		2.61	10.44
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.06	8.48
TOTAL LENGTH			877.60	
877.60 x 1.21 =			1061.90Kg	

STR. 1400-250				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	12		8.20	98.40
1a	—		—	—
2	10		6.30	63.00
3	10		4.65	46.50
4	2x8		4.31	68.96
5	2x7		6.20	86.80
5a	—		—	—
6	2x4		7.48	59.84
7	2x4		4.75	38.00
8	7		5.75	40.25
9	7		5.64	39.48
9a	—		—	—
9b	—		—	—
10	18		5.57	100.26
10a	—		—	—
10b	—		—	—
11	9		4.79	43.11
12	17		4.01	68.17
13	6		4.51	27.06
14	6		5.01	30.06
15	7		4.01	28.07
16	3		6.61	19.83
17	9		0.80	7.20
18	12		2.00	24.00
19	3		4.60	13.80
20	14		1.45	20.30
21	4		2.61	10.44
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.30	10.40
TOTAL LENGTH			956.20	
956.20 x 1.21 =			1157.00Kg	

STR. 1400-300				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	12		8.35	100.20
1a	—		—	—
2	10		7.53	75.30
3	10		4.85	48.50
4	2x8		4.34	69.44
5	2x7		6.45	90.30
5a	—		—	—
6	2x4		8.80	70.40
7	2x4		4.95	39.60
8	7		5.92	41.44
9	7		5.76	40.32
9a	—		—	—
9b	—		—	—
10	19		5.67	107.73
10a	—		—	—
10b	—		—	—
11	9		4.84	43.56
12	21		4.01	84.21
13	6		4.51	27.06
14	7		5.01	35.07
15	7		4.01	28.07
16	3		6.81	20.43
17	9		0.80	7.20
18	12		2.00	24.00
19	3		4.60	13.80
20	14		1.45	20.30
21	4		2.61	10.44
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.30	10.40
TOTAL LENGTH			1020.04	
1020.04 x 1.21 =			1234.25Kg	

ALL BARS ARE ϕ 14 (1.21 Kg/m)

REFERENCE DWGS: For plan section see dwg. No. 11/1/1/01
 For reinforcement see dwgs. No. 11/1/3/01 TO 11/1/3/03
 For bars with variable unit length see note under the same title at dwg. No. 20/2/03

Scale: IRRIGATION & DRAINAGE STANDARDS
 Date: DWG. No. 11/1/3/16
 Approved: Sheet No. 22 of 32 Rev. No.
 RECTANGULAR INCLINED DROP
 LIST OF REINFORCEMENT
 STR. 1400-100 TO 1400-300

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUD
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

STR. 1400-350				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	12		8.55	102.60
1a	—	—	—	—
2	10		8.70	87.00
3	10		5.00	50.00
4	2x9		4.37	78.66
5	2x8		6.75	108.00
5a	—	—	—	—
6	2x4		10.01	80.08
7	2x4		5.10	40.80
8	7		6.09	42.63
9	7		5.92	41.44
9a	—	—	—	—
9b	—	—	—	—
10	20		5.83	116.60
10a	—	—	—	—
10b	—	—	—	—
11	10		4.95	49.50
12	26		4.07	105.82
13	6		4.57	27.42
14	7		5.07	35.49
15	7		4.07	28.49
16	3		6.99	20.97
17	9		0.80	7.20
18	12		2.00	24.00
19	3		4.60	13.80
20	14		1.45	20.30
21	4		2.67	10.68
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.30	10.40
TOTAL LENGTH			1114.15	
1114.15 x 1.21 =			1348.12 Kg	

STR. 1400-400				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	12		8.65	103.80
1a	—	—	—	—
2	10		9.87	98.70
3	10		5.15	51.50
4	2x10		4.40	88.00
5	2x8		6.95	111.20
5a	—	—	—	—
6	2x4		11.22	89.76
7	2x4		5.25	42.00
8	7		6.26	43.82
9	7		6.04	42.28
9a	—	—	—	—
9b	—	—	—	—
10	21		5.93	124.53
10a	—	—	—	—
10b	—	—	—	—
11	11		5.00	55.00
12	30		4.07	122.10
13	6		4.57	27.42
14	8		5.07	40.56
15	7		4.07	28.49
16	3		7.19	21.57
17	9		0.80	7.20
18	12		2.00	24.00
19	3		4.60	13.80
20	14		1.45	20.30
21	4		2.67	10.68
22	6		1.10	6.60
23	27		0.21	5.67
24	8		1.30	10.40
TOTAL LENGTH			1189.38	
1189.38 x 1.21 =			1439.15 Kg	

STR. 1600-100				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	12		8.00	96.00
1a	—	—	—	—
2	11		2.55	28.05
3	11		4.55	50.05
4	2x7		4.53	63.42
5	2x6		5.40	64.80
5a	—	—	—	—
6	2x4		3.68	29.44
7	2x4		4.65	37.20
8	8		5.39	43.12
9	8		5.32	42.56
9a	—	—	—	—
9b	—	—	—	—
10	16		5.27	84.32
10a	—	—	—	—
10b	—	—	—	—
11	7		4.64	32.48
12	3		4.01	12.03
13	6		4.56	27.36
14	4		5.11	20.44
15	8		4.11	32.88
16	3		6.23	18.69
17	9		0.80	7.20
18	12		2.05	24.60
19	3		4.70	14.10
20	14		1.50	21.00
21	4		2.61	10.44
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.06	10.60
TOTAL LENGTH			786.72	
786.72 x 1.21 =			951.93 Kg	

STR. 1600-150				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	12		8.30	99.60
1a	—	—	—	—
2	11		3.84	42.24
3	11		4.70	51.70
4	2x8		4.58	73.28
5	2x7		5.90	82.60
5a	—	—	—	—
6	2x4		4.89	39.12
7	2x4		4.80	38.40
8	8		5.73	45.84
9	8		5.57	44.56
9a	—	—	—	—
9b	—	—	—	—
10	18		5.47	98.46
10a	—	—	—	—
10b	—	—	—	—
11	8		4.74	37.92
12	7		4.01	28.07
13	6		4.56	27.36
14	5		5.11	25.55
15	8		4.11	32.88
16	3		6.61	19.83
17	9		0.80	7.20
18	12		2.05	24.60
19	3		4.70	14.10
20	14		1.50	21.00
21	4		2.61	10.44
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.06	10.60
TOTAL LENGTH			891.29	
891.29 x 1.21 =			1078.46 Kg	

STR. 1600-200				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	12		8.60	103.20
1a	—	—	—	—
2	11		5.07	55.77
3	11		4.85	53.35
4	2x8		4.61	73.76
5	2x7		6.40	89.60
5a	—	—	—	—
6	2x4		6.05	48.40
7	2x4		4.95	39.60
8	8		5.92	47.36
9	8		5.76	46.08
9a	—	—	—	—
9b	—	—	—	—
10	19		5.67	107.73
10a	—	—	—	—
10b	—	—	—	—
11	9		4.84	43.56
12	11		4.01	44.11
13	6		4.56	27.36
14	5		5.11	25.55
15	8		4.11	32.88
16	3		6.81	20.43
17	9		0.80	7.20
18	12		2.05	24.60
19	3		4.70	14.10
20	14		1.50	21.00
21	4		2.61	10.44
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.30	13.00
TOTAL LENGTH			965.02	
965.02 x 1.21 =			1167.67 Kg	

ALL BARS ARE Ø 14 (1.21 Kg/m)

REFERENCE DWGS: For plan section see dwg. No. 11/1/1/01
 For reinforcement see dwgs. No. 11/1/3/01 TO 11/1/3/03
 For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale: **IRRIGATION & DRAINAGE STANDARDS**
 Date: DWG. No. 11/1/3/19
 Approved: Sheet No. 23 of 32 Rev. No.
 RECTANGULAR INCLINED DROP
 LIST OF REINFORCEMENT
 STR. 1400-350 TO 1600-200

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND
 STANDARD BUREAU

STR. 1600-250				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	12		8.80	105.60
1a	—	—	—	—
2	11		6.30	69.30
3	11		5.05	55.55
4	2x9		4.64	83.52
5	2x8		6.70	107.20
5a	—	—	—	—
6	2x4		7.37	58.96
7	2x4		5.15	41.20
8	8		6.09	48.72
9	8		5.92	47.36
9a	—	—	—	—
9b	—	—	—	—
10	20		5.83	116.60
10a	—	—	—	—
10b	—	—	—	—
11	10		4.95	49.50
12	16		4.07	65.12
13	6		4.62	27.72
14	6		5.17	31.02
15	8		4.17	33.36
16	3		6.99	20.97
17	9		0.80	7.20
18	12		2.05	24.60
19	3		4.70	14.10
20	14		1.50	21.00
21	4		2.67	10.68
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.30	13.00
TOTAL LENGTH			1068.22	
1068.22 x 1.21 =			1292.55Kg	

STR. 1600-300				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	12		9.00	108.00
1a	—	—	—	—
2	11		7.53	82.83
3	11		5.25	57.75
4	2x10		4.67	93.40
5	2x8		7.00	112.00
5a	—	—	—	—
6	2x4		8.68	69.44
7	2x4		5.35	42.80
8	8		6.26	50.08
9	8		6.04	48.32
9a	—	—	—	—
9b	—	—	—	—
10	21		5.93	124.53
10a	—	—	—	—
10b	—	—	—	—
11	11		5.00	55.00
12	20		4.07	81.40
13	6		4.62	27.72
14	7		5.17	36.19
15	8		4.17	33.36
16	3		7.19	21.57
17	9		0.80	7.20
18	12		2.05	24.60
19	3		4.70	14.10
20	14		1.50	21.00
21	4		2.67	10.68
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.30	13.00
TOTAL LENGTH			1150.91	
1150.91 x 1.21 =			1392.60Kg	

STR. 1600-350				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	12		9.15	109.80
1a	—	—	—	—
2	11		8.70	95.70
3	11		5.45	59.95
4	2x10		4.70	94.00
5	2x9		7.25	130.50
5a	—	—	—	—
6	2x4		9.95	79.60
7	2x4		5.55	44.40
8	8		6.42	51.36
9	10		6.16	61.60
9a	—	—	—	—
9b	—	—	—	—
10	26		6.03	156.78
10a	—	—	—	—
10b	—	—	—	—
11	13		5.05	65.65
12	25		4.07	101.75
13	6		4.62	27.72
14	8		5.17	41.36
15	8		4.17	33.36
16	3		7.37	22.11
17	9		0.80	7.20
18	12		2.05	24.60
19	3		4.70	14.10
20	14		1.50	21.00
21	4		2.67	10.68
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.52	15.20
TOTAL LENGTH			1284.36	
1284.36 x 1.21 =			1554.08Kg	

STR. 1600-400				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	12		9.30	111.60
1a	—	—	—	—
2	11		9.87	108.57
3	11		5.60	61.60
4	2x10		4.70	94.00
5	2x9		7.50	135.00
5a	—	—	—	—
6	2x4		11.16	89.28
7	2x4		5.70	45.60
8	8		6.45	51.60
9	10		6.24	62.40
9a	—	—	—	—
9b	—	—	—	—
10	27		6.13	165.51
10a	—	—	—	—
10b	—	—	—	—
11	14		5.10	71.40
12	29		4.07	118.03
13	6		4.62	27.72
14	8		5.17	41.36
15	8		4.17	33.36
16	3		7.37	22.11
17	9		0.80	7.20
18	12		2.05	24.60
19	3		4.70	14.10
20	14		1.50	21.00
21	4		2.67	10.68
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.52	15.20
TOTAL LENGTH			1347.26	
1347.26 x 1.21 =			1630.18Kg	

STR. 1800-100				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	12		8.15	97.80
1a	—	—	—	—
2	11		2.55	28.05
3	11		4.60	50.60
4	2x7		4.56	63.84
5	2x6		5.65	67.80
5a	—	—	—	—
6	2x4		3.63	29.04
7	2x4		4.70	37.60
8	8		5.70	45.60
9	8		5.56	44.48
9a	—	—	—	—
9b	—	—	—	—
10	17		5.47	92.99
10a	—	—	—	—
10b	—	—	—	—
11	8		4.79	38.32
12	3		4.11	12.33
13	7		4.71	32.96
14	4		5.31	21.24
15	8		4.31	34.48
16	3		6.57	19.71
17	10		0.80	8.00
18	14		2.10	29.40
19	3		4.90	14.70
20	14		1.55	21.70
21	4		2.71	10.84
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.06	10.60
TOTAL LENGTH			828.03	
828.03 x 1.21 =			1001.92Kg	

ALL BARS ARE Ø14 (1.21 Kg/m)

REFERENCE DWGS: For plan section see dwg. No. 11/1/1/01
 For reinforcement see dwgs. No. 11/1/3/01 TO 11/1/3/03
 For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale: IRRIGATION & DRAINAGE STANDARDS
 Date: DWG. No. 11/1/3/20
 Approved: Sheet No. 24 of 32 Rev. No. RECTANGULAR INCLINED DROP LIST OF REINFORCEMENT STR. 1600-250 TO 1800-100

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUL
 TECHNICAL RESEARCH AND STANDARD BUREAU

STR. 1800-150				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	12		8.50	102.00
1a	—	—	—	—
2	11		3.84	42.24
3	11		4.75	52.25
4	2x8		4.62	73.92
5	2x7		6.20	86.80
5a	—	—	—	—
6	2x4		4.84	38.72
7	2x4		4.85	38.80
8	8		6.04	48.32
9	8		5.81	46.48
9a	—	—	—	—
9b	—	—	—	—
10	18		5.67	102.06
10a	—	—	—	—
10b	—	—	—	—
11	9		4.89	44.01
12	7		4.11	28.77
13	7		4.71	32.97
14	4		5.31	21.24
15	8		4.31	34.48
16	3		6.95	20.85
17	10		0.80	8.00
18	14		2.10	29.90
19	3		4.90	14.70
20	14		1.55	21.70
21	4		2.71	10.84
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.30	13.00
TOTAL LENGTH			927.99	
927.99 x 1.21 =			1122.87Kg	

STR. 1800-200				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	13		8.75	113.75
1a	—	—	—	—
2	11		5.07	55.77
3	11		4.95	54.45
4	2x9		4.65	83.70
5	2x8		6.65	106.40
5a	—	—	—	—
6	2x4		6.05	48.40
7	2x4		5.05	40.40
8	8		6.23	49.84
9	8		6.04	48.32
9a	—	—	—	—
9b	—	—	—	—
10	20		5.93	118.60
10a	—	—	—	—
10b	—	—	—	—
11	10		5.05	50.50
12	11		4.17	45.87
13	7		4.77	33.39
14	5		5.37	26.85
15	8		4.73	34.96
16	3		7.14	21.42
17	10		0.80	8.00
18	14		2.10	29.90
19	3		4.90	14.70
20	14		1.55	21.70
21	4		2.77	11.08
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.30	13.00
TOTAL LENGTH			1046.94	
1046.94 x 1.21 =			1266.80Kg	

STR. 1800-250				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	13		8.95	116.35
1a	—	—	—	—
2	11		6.30	69.30
3	11		5.15	56.65
4	2x10		4.71	94.20
5	2x9		7.05	126.90
5a	—	—	—	—
6	2x4		7.25	58.00
7	2x4		5.25	42.00
8	8		6.56	52.48
9	10		6.28	62.80
9a	—	—	—	—
9b	—	—	—	—
10	25		6.13	153.25
10a	—	—	—	—
10b	—	—	—	—
11	13		5.15	66.95
12	15		4.17	62.55
13	7		4.77	33.39
14	6		5.37	32.22
15	8		4.37	34.96
16	3		7.52	22.56
17	10		0.80	8.00
18	14		2.10	29.90
19	3		4.90	14.70
20	14		1.55	21.70
21	4		2.77	11.08
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.30	13.00
TOTAL LENGTH			1198.88	
1198.88 x 1.21 =			1450.64Kg	

STR. 1800-300				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	13		9.15	118.95
1a	—	—	—	—
2	11		7.53	82.83
3	11		5.35	58.85
4	2x11		4.74	104.28
5	2x9		7.35	132.30
5a	—	—	—	—
6	2x4		8.57	68.56
7	2x4		5.45	43.60
8	8		6.73	53.84
9	10		6.40	64.00
9a	—	—	—	—
9b	—	—	—	—
10	26		6.23	161.98
10a	—	—	—	—
10b	—	—	—	—
11	14		5.20	72.80
12	20		4.17	83.40
13	7		4.77	33.39
14	7		5.37	37.59
15	8		4.37	34.96
16	3		7.72	23.16
17	10		0.80	8.00
18	14		2.10	29.90
19	3		4.90	14.70
20	14		1.55	21.70
21	4		2.77	11.08
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.52	15.20
TOTAL LENGTH			1291.01	
1291.01 x 1.21 =			1562.12 Kg	

STR. 1800-350				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	9		9.30	83.70
1a	10		9.20	92.00
2	11		8.70	95.70
3	11		5.55	61.05
4	2x11		4.78	105.16
5	2x9		7.60	136.80
5a	—	—	—	—
6	2x4		9.83	78.64
7	2x4		5.65	45.20
8	8		6.91	55.28
9	10		6.56	65.60
9a	—	—	—	—
9b	6		2.41	14.46
10	27		6.37	171.99
10a	—	—	—	—
10b	16		2.77	44.32
11	14		5.27	73.78
12	24		4.17	100.08
13	7		4.77	33.39
14	8		5.37	42.96
15	8		4.37	34.96
16	3		7.90	23.70
17	10		0.80	8.00
18	14		2.10	29.90
19	3		4.90	14.70
20	14		1.55	21.70
21	4		2.77	11.08
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.56	15.60
TOTAL LENGTH			1475.69	
1475.69 x 1.21 =			1785.58Kg	

ALL BARS ARE Ø14 (1.21 Kg/m)

REFERENCE DWGS: For plan & section see dwg. No. 11/1/1/01
 For reinforcement see dwgs. No. 11/1/3/01 TO 11/1/3/03
 For bars with variable unit length see note under the same title at dwg. No. 29/2/1/01

Scale: IRRIGATION & DRAINAGE STANDARDS
 Date: DWG. No. 11/1/3/21
 Approved: Sheet No. 25 of 32 Rev. No.
 RECTANGULAR INCLINED DROP LIST OF REINFORCEMENT
 STR. 1800-150 TO 1800-350

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDJET
 TECHNICAL RESEARCH AND STANDARD BUREAU

STR. 1800-400				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	9		9.50	85.50
1a	10		9.40	94.00
2	11		9.87	108.57
3	11		5.75	63.25
4	2x11		4.78	105.16
5	2x9		7.90	142.20
5a	—	—	—	—
6	2x4		11.20	89.60
7	2x4		5.85	46.80
8	8		6.93	55.44
9	10		6.63	66.30
9a	—	—	—	—
9b	6		2.41	14.46
10	28		6.47	181.16
10a	—	—	—	—
10b	16		2.77	44.32
11	15		5.32	79.80
12	28		4.17	116.76
13	7		4.77	33.39
14	8		5.37	42.96
15	8		4.37	34.96
16	3		7.50	23.70
17	10		0.80	8.00
18	14		2.10	29.90
19	3		4.90	14.70
20	14		1.55	21.70
21	4		2.77	11.08
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.56	15.60
TOTAL LENGTH			1545.25	
1545.25 x 1.21 =			1869.75 Kg	

STR. 2000-100				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	13		8.35	108.55
1a	—	—	—	—
2	11		2.55	28.05
3	11		4.65	51.15
4	2x7		4.64	64.96
5	2x7		5.85	81.90
5a	—	—	—	—
6	2x4		3.58	28.64
7	2x4		4.75	38.00
8	8		5.77	46.16
9	8		5.72	45.76
9a	—	—	—	—
9b	—	—	—	—
10	17		5.67	96.39
10a	—	—	—	—
10b	—	—	—	—
11	9		4.94	44.46
12	2		4.21	8.42
13	7		4.86	34.02
14	4		5.51	22.04
15	8		4.51	36.08
16	3		6.57	19.71
17	10		0.80	8.00
18	14		2.15	30.10
19	3		5.10	15.30
20	14		1.60	22.40
21	4		2.81	11.24
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.06	10.60
TOTAL LENGTH			867.87	
867.87 x 1.21 =			1050.12 Kg	

STR. 2000-150				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	13		8.70	113.10
1a	—	—	—	—
2	11		3.84	42.24
3	11		4.85	53.35
4	2x8		4.70	75.20
5	2x7		6.40	89.60
5a	—	—	—	—
6	2x4		4.84	38.72
7	2x4		4.95	39.60
8	8		6.10	48.80
9	8		5.96	47.68
9a	—	—	—	—
9b	—	—	—	—
10	19		5.87	111.53
10a	—	—	—	—
10b	—	—	—	—
11	10		5.04	50.40
12	7		4.21	29.47
13	7		4.86	34.02
14	4		5.51	22.04
15	8		4.51	36.08
16	3		6.95	20.85
17	10		0.80	8.00
18	14		2.15	30.10
19	3		5.10	15.30
20	14		1.60	22.40
21	4		2.81	11.24
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.30	13.00
TOTAL LENGTH			968.66	
968.66 x 1.21 =			1172.08 Kg	

STR. 2000-200				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	13		9.00	117.00
1a	—	—	—	—
2	12		5.07	60.84
3	11		5.05	55.55
4	2x9		4.75	85.50
5	2x8		6.90	110.40
5a	—	—	—	—
6	2x4		6.05	48.40
7	2x4		5.15	41.20
8	8		6.44	51.52
9	8		6.24	49.92
9a	—	—	—	—
9b	—	—	—	—
10	20		6.13	122.60
10a	—	—	—	—
10b	—	—	—	—
11	11		5.20	57.20
12	11		4.27	46.97
13	7		4.92	34.44
14	5		5.57	27.85
15	8		4.57	36.56
16	3		7.33	21.99
17	10		0.80	8.00
18	14		2.15	30.10
19	3		5.10	15.30
20	14		1.60	22.40
21	4		2.87	11.48
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.30	13.00
TOTAL LENGTH			1084.16	
1084.16 x 1.21 =			1311.83 Kg	

STR. 2000-250				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	13		9.20	119.60
1a	—	—	—	—
2	12		6.30	75.60
3	11		5.25	57.75
4	2x10		4.78	95.60
5	2x9		7.20	129.60
5a	—	—	—	—
6	2x4		7.37	58.96
7	2x4		5.35	42.80
8	8		6.60	52.80
9	10		6.36	63.60
9a	—	—	—	—
9b	—	—	—	—
10	26		6.23	161.98
10a	—	—	—	—
10b	—	—	—	—
11	13		5.25	68.25
12	15		4.27	64.05
13	7		4.92	34.44
14	6		5.57	33.42
15	8		4.57	36.56
16	3		7.52	22.56
17	10		0.80	8.00
18	14		2.15	30.10
19	3		5.10	15.30
20	14		1.60	22.40
21	4		2.87	11.48
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.52	15.20
TOTAL LENGTH			1235.99	
1235.99 x 1.21 =			1495.55 Kg	

ALL BARS ARE Ø14 (1.21 Kg/m)

REFERENCE DWGS: For plan & section see dwg. No. 11/1/1/01
 For reinforcement see dwgs. No. 11/1/3/01 TO 11/1/3/03
 For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale: IRRIGATION & DRAINAGE STANDARDS
 Date: DWG. No. 11/1/3/22
 Approved: Sheet No. 26 of 32 Rev. No. RECTANGULAR INCLINED DROP LIST OF REINFORCEMENT STR. 1800-400 TO 2000-250

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUD.
 TECHNICAL RESEARCH AND STANDARD BUREAU

STR. 2000_300				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	9		9.40	84.60
1a	10		9.30	93.00
2	12		7.53	90.36
3	11		5.45	59.95
4	2x11		4.85	106.70
5	2x9		7.60	136.80
5a	—	—	—	—
6	2x4		8.57	68.56
7	2x4		5.55	44.40
8	8		6.95	55.60
9	10		6.64	66.40
9a	—	—	—	—
9b	7		2.49	17.43
10	27		6.47	174.69
10a	—	—	—	—
10b	17		2.87	48.79
11	14		5.37	75.18
12	19		4.27	81.13
13	7		4.92	34.44
14	6		5.57	33.42
15	8		4.57	36.56
16	3		7.90	23.70
17	10		0.80	8.00
18	14		2.15	30.10
19	3		5.10	15.30
20	14		1.60	22.40
21	4		2.87	11.48
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.56	15.60
TOTAL LENGTH			1450.53	
1450.53 x 1.21 =			1755.14Kg	

STR. 2000_350				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	9		9.55	85.95
1a	10		9.45	94.50
2	12		8.70	104.40
3	11		5.65	62.15
4	2x11		4.85	106.70
5	2x9		7.85	141.30
5a	—	—	—	—
6	2x4		9.83	78.64
7	2x4		5.75	46.00
8	8		6.97	55.76
9	10		6.71	67.10
9a	—	—	—	—
9b	7		2.49	17.43
10	28		6.57	183.96
10a	—	—	—	—
10b	17		2.87	48.79
11	15		5.42	81.30
12	23		4.27	98.21
13	7		4.92	34.44
14	8		5.57	44.56
15	8		4.57	36.56
16	3		7.90	23.70
17	10		0.80	8.00
18	14		2.15	30.10
19	3		5.10	15.30
20	14		1.60	22.40
21	4		2.87	11.48
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.56	15.60
TOTAL LENGTH			1530.27	
1530.27 x 1.21 =			1851.63Kg	

STR. 2000_400				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	9		9.75	87.75
1a	11		9.69	106.59
2	12		9.87	118.44
3	12		5.85	70.20
4	2x11		4.88	107.36
5	2x7		8.15	114.10
5a	2x7		9.95	139.30
6	2x4		11.10	88.80
7	2x4		5.95	47.60
8	8		7.15	57.20
9	10		6.88	68.80
9a	2x7		2.99	41.86
9b	7		2.51	17.57
10	29		6.75	195.75
10a	2x17		2.32	78.88
10b	17		2.91	49.47
11	16		5.53	88.48
12	28		4.31	120.68
13	7		4.96	34.72
14	8		5.61	44.88
15	8		4.61	36.88
16	3		8.09	24.27
17	10		0.80	8.00
18	14		2.15	30.10
19	3		5.10	15.30
20	14		1.60	22.40
21	4		2.91	11.64
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.60	16.00
TOTAL LENGTH			1858.96	
1858.96 x 1.21 =			2249.34Kg	

STR. 2250_100				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	13		8.66	112.45
1a	—	—	—	—
2	12		2.55	30.60
3	12		4.75	57.00
4	2x7		4.75	66.50
5	2x7		6.05	84.70
5a	—	—	—	—
6	2x4		3.62	28.96
7	2x5		4.85	48.50
8	8		5.95	47.60
9	8		5.92	47.36
9a	—	—	—	—
9b	—	—	—	—
10	18		5.87	105.66
10a	—	—	—	—
10b	—	—	—	—
11	9		5.14	46.26
12	2		4.41	8.82
13	7		5.06	35.42
14	4		5.71	22.84
15	8		4.71	37.68
16	3		6.76	20.28
17	11		0.80	8.80
18	14		2.20	30.80
19	3		5.40	16.20
20	16		1.70	27.20
21	4		2.91	11.64
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.06	10.60
TOTAL LENGTH			921.81	
921.81 x 1.21 =			1115.39Kg	

STR. 2250_150				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	13		9.00	117.00
1a	—	—	—	—
2	12		3.84	46.08
3	12		4.95	59.40
4	2x9		4.70	84.60
5	2x8		6.60	105.60
5a	—	—	—	—
6	2x4		4.94	39.52
7	2x5		5.05	50.50
8	8		6.29	50.32
9	8		6.20	49.60
9a	—	—	—	—
9b	—	—	—	—
10	20		6.13	122.60
10a	—	—	—	—
10b	—	—	—	—
11	10		5.30	53.00
12	7		4.47	31.29
13	7		5.12	35.84
14	5		5.77	28.85
15	8		4.77	38.16
16	3		7.14	21.42
17	11		0.80	8.80
18	14		2.20	30.80
19	3		5.40	16.20
20	16		1.70	27.20
21	4		2.97	11.88
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.30	13.00
TOTAL LENGTH			1057.60	
1057.60 x 1.21 =			1279.70Kg	

ALL BARS ARE Ø14 (1.21 Kg/m)

REFERENCE DWGS: For plan section see dwg. No. 11/1/1/01
 For reinforcement see dwgs. No. 11/1/3/01 TO 11/1/3/03
 For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale:	IRRIGATION & DRAINAGE STANDARDS	
Date:	DWG No. 11/1/3/23	RECTANGULAR INCLINED DROP LIST OF REINFORCEMENT
Approved:	Sheet No. 27 of 32	Rev. No.
	STR. 2000_300 TO 2250_150	

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUL
 TECHNICAL RESEARCH AND STANDARD BUREAU

STR. 2250-200				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	13		9.25	120.25
1a	—	—	—	—
2	12		5.07	60.84
3	12		5.15	61.80
4	2x10		4.85	97.00
5	2x9		7.05	126.90
5a	—	—	—	—
6	2x4		6.15	49.20
7	2x5		5.25	52.50
8	8		6.62	52.96
9	10		6.44	64.40
9a	—	—	—	—
9b	—	—	—	—
10	26		6.33	164.58
10a	—	—	—	—
10b	—	—	—	—
11	13		5.40	70.20
12	11		4.47	49.17
13	7		5.12	35.84
14	6		5.77	34.62
15	8		4.77	38.16
16	3		7.52	22.56
17	11		0.80	8.80
18	14		2.20	30.80
19	3		5.40	16.20
20	16		1.70	27.20
21	4		2.97	11.88
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.30	13.00
TOTAL LENGTH			1224.80	
1224.80 x 1.21 =			1482.01Kg	

STR. 2250-250				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	9		9.50	85.50
1a	10		9.40	94.00
2	12		6.30	75.60
3	12		5.35	64.20
4	2x11		4.91	108.02
5	2x9		7.50	135.00
5a	—	—	—	—
6	2x4		7.35	58.80
7	2x5		5.45	54.50
8	8		6.97	55.76
9	10		6.72	67.20
9a	—	—	—	—
9b	7		2.57	17.99
10	27		6.57	177.39
10a	—	—	—	—
10b	16		2.97	47.52
11	14		5.52	77.28
12	15		4.47	67.05
13	7		5.12	35.84
14	6		5.77	34.62
15	8		4.77	38.16
16	3		7.90	23.70
17	11		0.80	8.80
18	14		2.20	30.80
19	3		5.40	16.20
20	16		1.70	27.20
21	4		2.97	11.88
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.56	15.60
TOTAL LENGTH			1444.55	
1444.55 x 1.21 =			1747.91Kg	

STR. 2250-300				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	9		9.70	87.30
1a	10		9.60	96.00
2	12		7.53	90.36
3	12		5.55	66.60
4	2x11		4.95	108.90
5	2x9		7.80	140.40
5a	—	—	—	—
6	2x4		8.67	69.36
7	2x5		5.65	56.50
8	8		7.14	57.12
9	10		6.84	68.40
9a	—	—	—	—
9b	7		2.57	17.99
10	28		6.87	186.76
10a	—	—	—	—
10b	16		2.97	47.52
11	14		5.57	77.98
12	19		4.47	84.93
13	7		5.12	35.84
14	7		5.77	40.39
15	8		4.77	38.16
16	3		8.09	24.27
17	11		0.80	8.80
18	14		2.20	30.80
19	3		5.40	16.20
20	16		1.70	27.20
21	4		2.97	11.88
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.56	15.60
TOTAL LENGTH			1521.20	
1521.20 x 1.21 =			1840.65Kg	

STR. 2250-350				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		9.90	99.00
1a	11		9.84	108.24
2	12		8.70	104.40
3	12		5.80	69.60
4	2x11		4.95	108.90
5	2x7		8.10	113.40
5a	2x7		9.90	138.60
6	2x4		9.98	79.84
7	2x5		5.90	59.00
8	8		7.17	57.36
9	10		6.96	69.60
9a	2x7		2.99	41.86
9b	7		2.59	18.13
10	29		6.85	198.65
10a	2x17		2.32	78.88
10b	17		3.01	51.17
11	15		5.68	85.20
12	23		4.51	103.73
13	7		5.16	36.12
14	8		5.81	46.48
15	8		4.81	38.48
16	3		8.09	24.27
17	11		0.80	8.80
18	14		2.20	30.80
19	3		5.40	16.20
20	16		1.70	27.20
21	4		3.01	12.04
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.60	16.00
TOTAL LENGTH			1857.89	
1857.89 x 1.21 =			2248.05Kg	

STR. 2250-400				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		10.10	101.00
1a	11		9.99	109.89
2	12		9.87	118.44
3	12		5.95	71.40
4	2x11		4.98	109.56
5	2x7		8.35	116.90
5a	2x7		10.15	142.10
6	2x4		11.25	90.00
7	2x5		6.05	60.50
8	8		7.34	58.72
9	10		7.09	70.90
9a	2x7		3.05	42.70
9b	7		2.59	18.13
10	30		6.95	208.50
10a	2x17		2.37	80.58
10b	17		3.01	51.17
11	16		5.73	91.68
12	28		4.51	126.28
13	7		5.16	36.12
14	9		5.81	52.29
15	8		4.81	38.48
16	3		8.09	24.27
17	11		0.80	8.80
18	14		2.20	30.80
19	3		5.40	16.20
20	16		1.70	27.20
21	4		3.01	12.04
22	8		1.10	8.80
23	34		0.21	7.14
24	10		1.60	16.00
TOTAL LENGTH			1946.59	
1946.59 x 1.21 =			2355.37Kg	

ALL BARS ARE ϕ 14 (1.21 Kg/m)

REFERENCE DWGS: For pipe section see dwg. No. 11/1/1/01
 For reinforcement see dwgs. No. 11/1/3/01 TO 11/1/3/03
 For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale: IRRIGATION & DRAINAGE STANDARDS
 Date: DWG. No. 11/1/3/24
 Approved: Sheet No. 28 of 32 Rev. No.
 RECTANGULAR INCLINED DROP LIST OF REINFORCEMENT
 STR. 2250-200 TO 2250-400

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH AND STANDARD BUREAU

STR. 2500_100				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	14		8.90	124.50
1a	—	—	—	—
2	12		2.55	30.60
3	12		5.10	61.20
4	2x8		4.87	77.92
5	2x7		6.30	88.20
5a	—	—	—	—
6	2x4		3.63	29.04
7	2x5		5.20	52.00
8	9		6.27	56.43
9	9		6.16	55.44
9a	—	—	—	—
9b	—	—	—	—
10	19		6.07	115.33
10a	—	—	—	—
10b	—	—	—	—
11	9		5.29	47.61
12	2		4.51	9.02
13	7		5.21	36.47
14	4		5.91	23.64
15	10		4.91	49.10
16	3		7.10	21.30
17	11		0.80	8.80
18	14		2.25	31.50
19	3		5.60	16.80
20	16		1.75	28.00
21	4		3.01	12.04
22	10		1.10	11.00
23	41		0.21	8.61
24	12		1.30	15.60
			1010.25	
1010.25 x 1.21 =			1222.40Kg	

STR. 2500_150				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	14		9.25	129.50
1a	—	—	—	—
2	12		3.84	46.08
3	12		5.30	63.60
4	2x9		4.93	88.74
5	2x8		6.85	109.60
5a	—	—	—	—
6	2x4		4.89	39.12
7	2x5		5.40	54.00
8	9		6.61	59.49
9	9		6.44	57.96
9a	—	—	—	—
9b	—	—	—	—
10	21		6.33	132.93
10a	—	—	—	—
10b	—	—	—	—
11	10		5.45	54.50
12	6		4.57	27.42
13	7		5.27	36.89
14	5		5.97	29.85
15	10		4.97	49.70
16	3		7.48	22.44
17	11		0.80	8.80
18	14		2.25	31.50
19	3		5.60	16.80
20	16		1.75	28.00
21	4		3.07	12.28
22	10		1.10	11.00
23	41		0.21	8.61
24	12		1.30	15.60
			1134.41	
1134.41 x 1.21 =			1372.64Kg	

STR. 2500_200				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	14		9.50	133.00
1a	—	—	—	—
2	12		5.07	60.84
3	12		5.55	66.60
4	2x10		4.98	99.60
5	2x9		7.30	131.40
5a	—	—	—	—
6	2x4		6.15	49.20
7	2x5		5.65	56.50
8	9		6.94	62.42
9	10		6.68	66.80
9a	—	—	—	—
9b	—	—	—	—
10	27		6.53	176.31
10a	—	—	—	—
10b	—	—	—	—
11	13		5.55	72.15
12	10		4.57	45.70
13	7		5.27	36.89
14	6		5.97	35.82
15	10		4.97	49.70
16	3		7.86	23.58
17	11		0.80	8.80
18	14		2.25	31.50
19	3		5.60	16.80
20	16		1.75	28.00
21	4		3.07	12.28
22	10		1.10	11.00
23	41		0.21	8.61
24	12		1.52	18.24
			1301.74	
1301.74 x 1.21 =			1575.11Kg	

STR. 2500_250				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		9.75	97.50
1a	11		9.65	106.15
2	12		6.30	75.60
3	12		5.75	69.00
4	2x11		5.02	110.44
5	2x9		7.75	139.50
5a	—	—	—	—
6	2x4		7.35	58.80
7	2x5		5.85	58.50
8	9		7.14	64.26
9	10		6.91	69.10
9a	—	—	—	—
9b	7		2.69	18.83
10	28		6.77	189.56
10a	—	—	—	—
10b	16		3.07	49.12
11	14		5.67	79.38
12	14		4.57	63.98
13	7		5.27	36.89
14	6		5.97	35.82
15	10		4.97	49.70
16	3		8.09	24.27
17	11		0.80	8.80
18	14		2.25	31.50
19	3		5.60	16.80
20	16		1.75	28.00
21	4		3.07	12.28
22	10		1.10	11.00
23	41		0.21	8.61
24	12		1.56	18.72
			1532.11	
1532.11 x 1.21 =			1853.85Kg	

STR. 2500_300				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		9.95	99.50
1a	11		9.89	108.79
2	13		8.43	109.59
3	13		5.95	77.35
4	2x11		5.05	111.10
5	2x7		8.05	112.70
5a	2x7		9.85	137.90
6	2x4		8.67	69.36
7	2x5		6.05	60.50
8	9		7.32	65.88
9	11		7.08	77.88
9a	2x7		2.99	41.86
9b	2x7		2.71	37.94
10	28		6.95	194.60
10a	2x17		2.32	78.88
10b	17		3.11	52.87
11	15		5.76	86.40
12	19		4.57	86.83
13	7		5.27	36.89
14	7		5.97	41.79
15	10		4.97	49.70
16	3		8.24	24.72
17	11		0.80	8.80
18	14		2.25	31.50
19	3		5.60	16.80
20	16		1.75	28.00
21	4		3.11	12.44
22	10		1.10	11.00
23	41		0.21	8.61
24	12		1.60	19.20
			1899.38	
1899.38 x 1.21 =			2298.25Kg	

ALL BARS ARE Ø14 (1.21 Kg/m)

REFERENCE DWGS: For plan & section see dwg. No. 11/1/1/01
 For reinforcement see dwgs. No. 11/1/3/01 TO 11/1/3/03
 For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale: IRRIGATION & DRAINAGE STANDARDS
 Date: DWG. No. 11/1/3/25
 Approved: Sheet No. 29 of 32 Rev. No.
 RECTANGULAR INCLINED DROP LIST OF REINFORCEMENT STR. 2500_100 TO 2500_300

ISLAMIC REPUBLIC OF
 MINISTRY OF PLAN & BUDGET
 TECHNICAL RESEARCH & STANDARD BUREAU

STR. 2500-350				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		10.15	101.50
1a	11		10.09	110.99
2	13		8.70	113.10
3	13		6.20	80.60
4	2x11		4.98	109.56
5	2x7		8.35	116.90
5a	2x7		10.15	142.10
6	2x4		9.98	79.84
7	2x5		6.30	63.00
8	9		7.49	67.41
9	11		7.21	79.31
9a	2x7		3.05	42.70
9b	7		2.71	18.97
10	30		7.05	211.50
10a	2x17		2.37	80.58
10b	17		3.11	52.87
11	16		5.81	52.96
12	23		4.57	105.11
13	7		5.27	36.89
14	8		5.97	47.76
15	10		4.97	49.70
16	3		8.52	25.56
17	11		0.80	8.80
18	14		2.25	31.50
19	3		5.60	16.80
20	16		1.75	28.00
21	4		3.11	12.44
22	10		1.10	11.00
23	47		0.21	9.87
24	12		1.82	21.84
TOTAL LENGTH			1969.16	
1969.16 x 1.21 =			2382.68Kg	

STR. 2500-400				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		10.30	103.00
1a	13		10.28	133.64
2	13		9.87	128.31
3	13		6.40	83.20
4	2x14		5.12	143.36
5	2x7		8.60	120.40
5a	2x8		10.40	166.40
6	2x4		11.25	90.00
7	2x5		6.50	65.00
8	9		7.67	69.03
9	11		7.38	81.18
9a	2x7		3.13	43.82
9b	7		2.73	19.11
10	31		7.23	224.13
10a	2x18		2.44	87.84
10b	18		3.15	56.70
11	16		5.90	94.40
12	27		4.57	123.39
13	7		5.27	36.89
14	9		5.97	53.73
15	10		4.97	49.70
16	3		8.62	25.86
17	11		0.80	8.80
18	14		2.25	31.50
19	3		5.60	16.80
20	16		1.75	28.00
21	4		3.15	12.60
22	10		1.10	11.00
23	47		0.21	9.87
24	12		1.86	22.32
TOTAL LENGTH			2139.98	
2139.98 x 1.21 =			2589.38Kg	

STR. 2750-100				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	14		9.10	127.40
1a	—	—	—	—
2	13		2.55	33.15
3	13		5.15	66.95
4	2x9		4.98	89.64
5	2x8		6.40	102.40
5a	—	—	—	—
6	2x5		3.68	36.80
7	2x5		5.25	52.50
8	9		6.46	58.14
9	9		6.39	57.51
9a	—	—	—	—
9b	—	—	—	—
10	19		6.33	120.27
10a	—	—	—	—
10b	—	—	—	—
11	9		5.52	49.68
12	2		4.71	9.42
13	7		5.41	37.87
14	4		6.11	24.44
15	10		5.11	51.10
16	3		7.29	21.87
17	11		0.80	8.80
18	16		2.30	36.80
19	3		5.80	17.40
20	16		1.80	28.80
21	4		3.17	12.68
22	10		1.10	11.00
23	41		0.21	8.61
24	12		1.30	15.60
TOTAL LENGTH			1078.83	
1078.83 x 1.21 =			1305.38Kg	

STR. 2750-150				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	14		9.50	133.00
1a	—	—	—	—
2	13		3.84	49.92
3	13		5.35	69.55
4	2x10		5.03	100.60
5	2x9		7.00	126.00
5a	—	—	—	—
6	2x5		4.94	49.40
7	2x5		5.45	54.50
8	9		6.79	61.11
9	11		6.63	72.93
9a	—	—	—	—
9b	—	—	—	—
10	26		6.53	169.78
10a	—	—	—	—
10b	—	—	—	—
11	12		5.62	67.44
12	6		4.71	28.26
13	7		5.41	37.87
14	5		6.11	30.55
15	10		5.11	51.10
16	3		7.66	22.98
17	11		0.80	8.80
18	16		2.30	36.80
19	3		5.80	17.40
20	16		1.80	28.80
21	4		3.17	12.68
22	10		1.10	11.00
23	41		0.21	8.61
24	12		1.30	15.60
TOTAL LENGTH			1264.68	
1264.68 x 1.21 =			1530.26Kg	

STR. 2750-200				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		9.75	97.50
1a	11		9.65	106.15
2	13		5.07	65.91
3	13		5.60	72.80
4	2x10		5.06	101.20
5	2x9		7.45	134.10
5a	—	—	—	—
6	2x5		6.20	62.00
7	2x5		5.70	57.00
8	9		7.00	63.00
9	11		6.86	75.46
9a	—	—	—	—
9b	7		2.76	19.32
10	27		6.77	182.79
10a	—	—	—	—
10b	16		3.17	50.72
11	13		5.74	74.62
12	10		4.71	47.10
13	7		5.41	37.87
14	6		6.11	36.66
15	10		5.11	51.10
16	3		7.86	23.58
17	11		0.80	8.80
18	16		2.30	36.80
19	3		5.80	17.40
20	16		1.80	28.80
21	4		3.17	12.68
22	10		1.10	11.00
23	41		0.21	8.61
24	12		1.56	18.72
TOTAL LENGTH			1501.69	
1501.69 x 1.21 =			1817.04Kg	

ALL BARS ARE Ø14 (1.21 Kg/m)

REFERENCE DWGS: For plan & section see dwg. No. 11/1/1/01
 For reinforcement see dwgs. No. 11/1/3/01 TO 11/1/3/03
 For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale: IRRIGATION & DRAINAGE STANDARDS
 Date: DWG. No. 11/1/3/26
 Approved: Sheet No. 30 of 32 Rev. No.
 RECTANGULAR INCLINED DROP LIST OF REINFORCEMENT
 STR. 2500-350 TO 2750-200

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & BUD

STR. 2750-250				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		10.00	100.00
1a	12		9.94	119.28
2	13		6.30	81.90
3	13		5.85	76.05
4	2x11		5.12	112.64
5	2x7		7.90	110.60
5a	2x7		9.70	135.80
6	2x5		7.45	74.50
7	2x5		5.95	59.60
8	9		7.34	66.06
9	11		7.15	78.65
9a	2x7		2.99	41.86
9b	7		2.78	19.46
10	29		7.05	204.45
10a	2x16		2.32	74.24
10b	16		3.21	51.36
11	14		5.88	82.32
12	14		4.71	65.94
13	7		5.41	37.87
14	7		6.11	42.77
15	10		5.11	51.10
16	3		8.24	24.72
17	11		0.80	8.80
18	16		2.30	36.80
19	3		5.80	17.40
20	16		1.80	28.80
21	4		3.21	12.84
22	10		1.10	11.00
23	41		0.21	8.61
24	12		1.60	19.20
TOTAL LENGTH			1854.52	
1854.52 x 1.21 =			2243.97Kg	

STR. 2750-300				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		10.20	102.00
1a	12		10.14	121.68
2	13		7.53	97.89
3	13		6.05	78.65
4	2x11		5.15	113.30
5	2x7		8.20	114.80
5a	2x7		10.00	140.00
6	2x5		8.77	87.70
7	2x5		6.15	61.50
8	9		7.51	67.59
9	12		7.28	87.36
9a	2x7		3.05	42.70
9b	7		2.78	19.46
10	30		7.15	214.50
10a	2x17		2.37	80.58
10b	17		3.21	54.57
11	15		5.93	88.95
12	17		4.71	80.07
13	7		5.41	37.87
14	8		6.11	48.88
15	10		5.11	51.10
16	3		8.42	25.26
17	11		0.80	8.80
18	16		2.30	36.80
19	3		5.80	17.40
20	16		1.80	28.80
21	4		3.21	12.84
22	10		1.10	11.00
23	41		0.21	8.61
24	12		1.60	19.20
TOTAL LENGTH			1960.86	
1960.86 x 1.21 =			2372.64Kg	

STR. 2750-350				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		10.40	104.00
1a	13		10.38	134.94
2	13		8.70	113.10
3	13		6.30	81.90
4	2x11		5.18	113.96
5	2x7		8.50	119.00
5a	2x7		10.30	144.20
6	2x5		10.08	100.80
7	2x5		6.40	64.00
8	9		7.69	69.21
9	12		7.45	89.40
9a	2x7		3.13	43.82
9b	7		2.80	19.60
10	31		7.33	227.23
10a	2x18		2.44	87.84
10b	18		3.25	58.50
11	16		6.02	96.32
12	23		4.71	108.33
13	7		5.41	37.87
14	9		6.11	54.99
15	10		5.11	51.10
16	3		8.62	25.86
17	11		0.80	8.80
18	16		2.30	36.80
19	3		5.80	17.40
20	16		1.80	28.80
21	4		3.25	13.00
22	10		1.10	11.00
23	47		0.21	9.87
24	12		1.86	22.32
TOTAL LENGTH			2093.96	
2093.96 x 1.21 =			2533.69 Kg	

STR. 2750-400				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	10		10.60	106.00
1a	13		10.58	137.54
2	13		9.87	128.31
3	13		6.50	84.50
4	2x11		5.19	114.18
5	2x7		8.80	123.20
5a	2x8		10.60	169.60
6	2x5		11.35	113.50
7	2x5		6.60	66.00
8	9		7.71	69.39
9	12		7.52	90.24
9a	2x7		3.16	44.24
9b	7		2.80	19.60
10	32		7.43	237.76
10a	2x18		2.49	89.64
10b	18		3.25	58.50
11	16		6.07	97.12
12	24		4.71	113.04
13	7		5.41	37.87
14	9		6.11	54.99
15	10		5.11	51.10
16	3		8.62	25.86
17	11		0.80	8.80
18	16		2.30	36.80
19	3		5.80	17.40
20	16		1.80	28.80
21	4		3.25	13.00
22	10		1.10	11.00
23	47		0.21	9.87
24	12		1.86	22.32
TOTAL LENGTH			2180.17	
2180.17 x 1.21 =			2638.01Kg	

STR. 3000-100				
Pos.	No.	FORM	UNIT LENG.	LENG.
1	15		9.40	141.00
1a	-		-	-
2	13		2.55	33.15
3	13		5.20	67.60
4	2x9		5.10	91.80
5	2x8		6.70	107.20
5a	-		-	-
6	2x5		3.63	36.30
7	2x5		5.30	53.00
8	9		6.77	60.93
9	9		6.63	59.67
9a	-		-	-
9b	-		-	-
10	20		6.53	130.60
10a	-		-	-
10b	-		-	-
11	10		5.67	56.70
12	1		4.81	4.81
13	7		5.56	38.92
14	4		6.31	25.24
15	10		5.31	53.10
16	3		7.63	22.89
17	12		0.80	9.60
18	16		2.35	37.60
19	3		6.00	18.00
20	16		1.85	29.60
21	4		3.27	13.08
22	10		1.10	11.00
23	41		0.21	8.61
24	12		1.30	15.60
TOTAL LENGTH			1126.00	
1126.00 x 1.21 =			1362.46 Kg	

ALL BARS ARE $\phi 14$ (1.21 Kg/m)

REFERENCE DWGS: For plan & section see dwg. No. 11/1/1/01
 For reinforcement see dwgs. No. 11/1/3/01 TO 11/1/3/03
 For bars with variable unit length see note under the same title at dwg. No. 20/2/1/01

Scale: IRRIGATION & DRAINAGE STANDARDS
 Date: DWG. No. 11/1/3/27
 Approved: Sheet No. 31 of 32 Rev. No. RECTANGULAR INCLINED DROP LIST OF REINFORCEMENT STR. 2750-250 TO 3000-100

ISLAMIC REPUBLIC OF IRAN
 MINISTRY OF PLAN & CONSTRUCTION
 TECHNICAL RESEARCH STANDARD BUREAU

STR. 3000_150				
Pos.	Nº.	FORM	UNIT LENG.	LENG.
1	15		9.70	145.50
1a	—		—	—
2	13		3.84	49.92
3	13		5.45	70.85
4	2x10		5.13	102.60
5	2x9		7.20	129.60
5a	—		—	—
6	2x5		4.94	49.40
7	2x5		5.55	55.50
8	9		6.96	62.64
9	11		6.83	75.13
9a	—		—	—
9b	—		—	—
10	27		6.73	181.71
10a	—		—	—
10b	—		—	—
11	13		5.77	75.01
12	6		4.81	28.86
13	7		5.56	38.92
14	5		6.31	31.55
15	10		5.31	53.10
16	3		7.81	23.43
17	12		0.80	9.60
18	16		2.35	37.60
19	3		6.00	18.00
20	16		1.85	29.60
21	4		3.27	13.08
22	10		1.10	11.00
23	41		0.21	8.61
24	12		1.30	15.60
TOTAL LENGTH			1316.81	
1316.81 x 1.21 =			1593.34 Kg	

STR. 3000_200				
Pos.	Nº.	FORM	UNIT LENG.	LENG.
1	10		10.00	100.00
1a	11		9.90	108.90
2	13		5.07	65.91
3	13		5.65	73.45
4	2x10		5.19	103.80
5	2x9		7.70	138.60
5a	—		—	—
6	2x5		6.15	61.50
7	2x5		5.75	57.50
8	9		7.30	65.70
9	11		7.10	78.10
9a	—		—	—
9b	7		2.88	20.16
10	28		6.97	195.16
10a	—		—	—
10b	16		3.27	52.32
11	14		5.89	82.46
12	9		4.81	43.29
13	7		5.56	38.92
14	6		6.31	37.86
15	10		5.31	53.10
16	3		8.20	24.60
17	12		0.80	9.60
18	16		2.35	37.60
19	3		6.00	18.00
20	16		1.85	29.60
21	4		3.27	13.08
22	10		1.10	11.00
23	41		0.21	8.61
24	12		1.56	18.72
TOTAL LENGTH			1547.54	
1547.54 x 1.21 =			1872.52 Kg	

STR. 3000_250				
Pos.	Nº.	FORM	UNIT LENG.	LENG.
1	10		10.25	102.50
1a	12		10.19	122.28
2	13		6.30	81.90
3	13		5.95	77.35
4	2x11		5.22	114.84
5	2x7		8.05	112.70
5a	2x7		9.85	137.90
6	2x5		7.57	75.70
7	2x5		6.05	60.50
8	9		7.48	67.32
9	11		7.27	79.97
9a	2x7		2.99	41.86
9b	7		2.90	20.30
10	30		7.15	214.50
10a	2x17		2.32	78.88
10b	17		3.31	56.27
11	14		5.98	83.72
12	14		4.81	67.34
13	7		5.56	38.92
14	6		6.31	37.86
15	10		5.31	53.10
16	3		8.39	25.17
17	12		0.80	9.60
18	16		2.35	37.60
19	3		6.00	18.00
20	16		1.85	29.60
21	4		3.31	13.24
22	10		1.10	11.00
23	41		0.21	8.61
24	12		1.60	19.20
TOTAL LENGTH			1897.73	
1897.73 x 1.21 =			2296.25 Kg	

STR. 3000_300				
Pos.	Nº.	FORM	UNIT LENG.	LENG.
1	11		10.45	114.95
1a	14		10.43	146.02
2	14		7.53	105.42
3	13		6.15	79.95
4	2x11		5.25	115.50
5	2x7		8.45	118.30
5a	2x8		10.25	164.00
6	2x5		8.77	87.70
7	2x5		6.25	62.50
8	9		7.59	68.31
9	11		7.49	82.39
9a	2x7		3.09	43.26
9b	7		2.92	20.44
10	31		7.43	230.33
10a	2x18		2.44	87.84
10b	18		3.35	60.30
11	16		6.12	97.92
12	18		4.81	86.58
13	7		5.56	38.92
14	8		6.31	50.48
15	10		5.31	53.10
16	3		8.57	25.71
17	12		0.80	9.60
18	16		2.35	37.60
19	3		6.00	18.00
20	16		1.85	29.60
21	4		3.35	13.40
22	10		1.10	11.00
23	47		0.21	9.87
24	12		1.86	22.32
TOTAL LENGTH			2091.31	
2091.31 x 1.21 =			2530.49 Kg	

STR. 3000_350				
Pos.	Nº.	FORM	UNIT LENG.	LENG.
1	11		10.65	117.15
1a	14		10.63	148.82
2	14		8.70	121.80
3	13		6.40	83.20
4	2x12		5.29	126.96
5	2x7		8.75	122.50
5a	2x8		10.55	168.80
6	2x5		10.08	100.80
7	2x5		6.50	65.00
8	9		7.85	70.65
9	11		7.64	84.04
9a	2x7			

<u>Group No.</u>	<u>DESIGNATION</u>	<u>DWG NO.</u>	<u>REMARKS</u>
19/3	<u>TYPICAL CANAL SECTION WITH EARTH LINING</u>		#of sheets:2
19/3	Typical canal section in fill and cut with earth lining	19/3/1/01	
19/3	" " " " cut with earth lining	19/3/1/02	
19/4	<u>TYPICAL ROAD SECTION</u>	19/4/1/01	#of sheets:1
20/2	<u>GENERAL NOTES</u>		#fo sheets:3
20/2	Concrete reinforcement	20/2/1/01	
20/2	Detailing reinforcement - Joint Waterstop	20/2/1/02	
20/2	" " - " "	20/2/1/03	

Group No.	DESIGNATION	DWG No.	REMARKS
15/3	<u>WEIR GAGE INSTALLATION - PLAN AND SECTIONS</u>	15/3/1/01	# of sheets: 1
16	<u>ENERGY DISSIPATORS</u>		
16/1	<u>BAFFLED OUTLET</u>		# of sheets: 12
16/1	Baffled outlet - Plan and sections	16/1/1/01	
16/1	" " - Dimension Table	16/1/2/01	
16/1	" " - Reinforcement - Plan and section Group 1	16/1/3/01	
16/1	" " - " - Plan and section Group 2	16/1/3/02	
16/1	" " - " - Plan and section Group 3	16/1/3/03	
16/1	" " - " - Plan and section Group 4	16/1/3/04	
16/1	" " - " - Plan and section Group 5	16/1/3/05	
16/1	" " - " - Plan and section Group 6	16/1/3/06	
16/1	" " - List of reinforcement- STR 100 to 160	16/1/3/07	
16/1	" " - " " " - STR 180 to 240	16/1/3/08	
16/1	" " - " " " - STR 260 to 320	16/1/3/09	
16/1	" " - " " " - STR 340 to 400	16/1/3/10	
16/2	<u>BAFFLED APRON DROPS</u>		# of sheets: 4
16/2	Baffled apron drops - Design considerations- Page 1	16/2/2/01	
16/2	" " " - " " - Page 2	16/2/2/02	
16/2	" " " - " " example - Page 1	16/2/2/03	
16/2	" " " - " " - Page 2	16/2/2/04	
17	<u>PIPES</u>		
17/1	<u>TYPICAL PIPE CONNECTION</u>		# of sheets: 3
17/1	Typical pipe connection to structures - Option 1	17/1/1/01	

Group No.	DESIGNATION	DWG No.	REMARKS
17/1	Typical pipe connection to structures - Option 2	17/1/1/02	
17/1	" " " " " - Option 3	17/1/1/03	
17/2	<u>CONCRETE PIPES</u>		# of sheets: 4
17/2	Concrete pipes - Pipe placing & trench excavation	17/2/1/01	
17/2	" " - Reinforcement - Group 1	17/2/1/02	
17/2	" " - " - Group 2	17/2/1/03	
17/2	" " - " - Group 3	17/2/1/04	
17/3	<u>BEND AND COLLAR FOR PRECAST CONCRETE PRESSURE PIPE</u>	17/3/1/01	# of sheets: 1
18	<u>SAFETY FACILITIES</u>		
18/1	<u>FENCE</u>	18/1/1/01	# of sheets: 1
18/2	<u>PIPE HANDRAIL, GUARD POST, AND GUIDE POST</u>	18/2/1/01	# of sheets: 1
18/3	<u>GRATING, TRASHRACK AND LADDER</u> Plan, Sections and Details	18/3/1/01	# of sheets: 1
19	<u>TYPICAL CANAL SECTIONS</u>		
19/1	<u>TYPICAL UNLINED CANAL SECTIONS</u>		# of sheets: 1
19/1	Typical unlined canal sections	19/1/1/01	
19/2	<u>TYPICAL CONCRETE LINED CANAL SECTIONS</u>		# of sheets: 1
19/2	Typical concrete lined canal sections - Page 1	19/2/1/01	

Group No.	DESIGNATION	DWG No.	REMARKS	Group No.	DESIGNATION	DWG	REMARKS
13/2	<u>EROSION PROTECTION FOR CULVERT AND CANAL CROSS DRAINAGE</u>	13/2/1/01	#of sheets:1	13/12	<u>SIDE SPILLWAY</u>		#of sheets:3
13/3	<u>EROSION PROTECTION FOR CHECK DROP, PIPE INLET OR OUTLET, CONTROL AND PIPE INLET</u>	13/3/1/01	#of sheets:1	13/12	Side channel spillway - With slide gate	13/12/4/01	
13/4	<u>EROSION PROTECTION TYPE' QUANTITIES AND NOTES</u>	13/4/1/01	#of sheets:1	13/12	" " " - " " "	13/12/4/02	
13/5	<u>TRANSITION DESCRIPTION AND SELECTION</u>	13/5/1/01	#of sheets:1	13/12	" " " - " " "	13/12/4/03	
13/6	<u>CONCRETE TRANSITION - TYPE I</u>		#of sheets:3	13/13	Riprap inclined drop and protection in intersection of collector drain with lateral drain	13/13/1/01	#of sheets:1
13/6	Concrete transition - Type 1- Plan and sections	13/6/1/01		14	<u>DRAINAGE STRUCTURES</u>		
13/6	" " - " 1- Reinforcement			14/1	<u>HEAD WALLS</u>		#of sheets:9
13/6	" " - " 1-List of reinforcement	13/6/3/01		14/1	Typical head wall for box culverts-Plan and sections	14/1/1/01	
13/7	<u>CONCRETE TRANSITION - TYPE 2</u>		#of sheets:4	14/1	" " " " pipe " - " " "		
13/7	Concrete transition - Type 2- Plan and sections	13/7/1/01		14/1	(Straight)	14/1/1/02	
13/7	" " - Type 2- Reinforcement			14/1	" " " " " " -Plan and sections		
13/7	" " - Type 2- List of reinforcement	13/7/3/01		14/1	(Inclined)	14/1/1/03	
13/7	" " - Type 2- List of reinforcement	13/7/3/02		14/1	Head walls for 1 and 2 barrels box and pipe culverts-		
13/7	" " - Type 2- List of reinforcement	13/7/3/03		14/1	Reinforcement sections	14/1/3/01	
13/8	<u>CONCRETE TRANSITION- TYPE 3</u>		#of sheets:4	14/1	" " " 1 barrel box culvert- List of reinforcement- STR lto6	14/1/3/02	
13/8	Concrete transition - Type 3- Plan and sections	13/8/1/01		14/1	" " " 1 barrel box culvert- List of reinforcement- STR 7to12	14/1/3/03	
13/8	" " - " 3- Reinforcement			14/1	" " " 2 barrel box culvert- List of reinforcement -STR lto8	14/1/3/04	
13/8	" " - " 3- List of reinforcement	13/8/3/01		14/1	" " " 1 barrel pipe culvert-List of reinforcement- STR lto8	14/1/3/05	
13/8	" " - " 3- List of reinforcement	13/8/3/02		14/1	" " " 2 barrel pipe culvert- List of reinforcement -STR lto4	14/1/3/06	
13/8	" " - " 3- List of reinforcement	13/8/3/03		14/2	<u>CULVERT</u>		#of sheets:1
13/9	<u>CONCRETE TRANSITION - TYPE 4</u>		#of sheets:3	14/2	Culvert - Plan and sections	14/2/1/01	
13/9	Concrete transition - Type 4- Plan and sections	13/9/1/01		14/3	<u>TILE DRAIN OUTLET</u>	14/3/1/01	#of sheets:1
13/9	" " - " 4- Reinforcement			15	<u>WATER MEASUREMENT STRUCTURES</u>		
13/9	" " - Type 4- List of reinforcement	13/9/3/01		15/1	<u>PARSHALL FLUMES</u>		#of sheets:3
13/10	<u>CONCRETE TRANSITION - TYPE 5</u>		#of sheets:1	15/1	Parshall flumes - Plan and sections	15/1/1/01	
13/10	Concrete transition - Type 5- Plan and sections	13/10/1/01		15/1	" " - Reinforcement	15/1/3/01	
13/11	<u>DRAIN INLETS</u>	13/11/1/01	#of sheets: 1	15/1	" " - List of reinforcement-STR 1 to 9	15/1/3/02	
				15/2	<u>WEIRS</u>		#of sheets:6
				15/2	Contracted cippolletti and rectangular weirs (Plan and sections)	15/2/1/01	
				15/2	" rectangular weir- Dimension table	15/2/2/01	
				15/2	" cippolletti weir- Dimen.table	15/2/2/02	
				15/2	" and rectangular weirs-Rein.	15/2/3/01	
				15/2	weirs-List of reinforcement,STR 30to70	15/2/3/02	
				15/2	" -List of reinforcement ,STR.70to120	15/2/3/03	

GROUP NO.	DESIGNATION	DWG. NO.	REMARKS	GROUP NO.	DESIGNATION	DWG. NO.	REMARKS
11/3	Pipe drop with check inlet and concrete outlet (Pipe construction dimensions)	11/3/2/02		12	<u>REGULATING STRUCTURES</u>		#of sheets:6
11/3	" " " " inlet and concrete outlet (Pipe construction dimensions)	11/3/2/03		12/1	<u>CHECK STRUCTURES - (360 < Q < 1620 1/s)</u>		
11/3	" " " " inlet and concret outlet (Pipe construction dimensions)	11/3/2/04		12/1	Concrete Canal - Check structures - Q=360 ~ 1620 1/s (plan and sections)	12/1/1/01	
11/3	" " " " inlet and concret outlet (Pipe construction dimensions)	11/3/2/05		12/1	Earth canal Check structures - Q=360 ~ 1620 1/s (Plan and sections)	12/1/1/02	
11/3	" " " " inlet and concrete outlet (Pipe construction dimensions)	11/3/2/06		12/1	Check structures-Reinforcement - (Plan and sections)	12/1/3/01	
11/3	" " " " inlet and concrete outlet (Pipe construction dimensions)	11/3/2/07		12/1	" " -List of reinforcement-STR 1 to 8	12/1/3/02	
11/3	" " " " inlet and concrete outlet (Pipe construction dimensions)	11/3/2/08		12/1	" " - " " " -STR 9 to 16	12/1/3/03	
11/3	" " " " inlet and concrete outlet (Pipe construction dimensions)	11/3/2/09		12/1	" " - " " " -STR 16 to 24	12/1/3/04	
11/3	" " " " inlet and concrete outlet (Pipe construction dimensions)	11/3/2/10		12/2	<u>CHECK STRUCTURES-(1620 < Q < 3200 1/s)</u>		#of sheets:5
11/3	" " " " inlet and concrete outlet (Pipe construction dimensions)	11/3/2/11		12/2	Check structures-(Conc.canal)- Q=1600 ~ 3200 1/s (Plan and sections)	12/2/1/01	
11/3	" " " " inlet and concrete outlet (Pipe construction dimensions)	11/3/2/12		12/2	" " -(Earth canal- Q=1600 ~ 3200 1/s) (Plan and sections)	12/2/1/02	
11/3	" " " " inlet and concret outlet (Pipe construction dimensions)	11/3/2/13		12/2	" " -Reinforcement -Plan and sections	12/2/3/01	
11/3	" " " " inlet and concret outlet (Pipe construction dimensions)	11/3/2/14		12/2	" " -List of reinforcement-STR 1 to 6	12/2/3/02	
11/3	" " " " inlet and concret outlet (Pipe construction dimensions)	11/3/2/15		12/2	" " - " " " -STR 7 to 11	12/2/3/03	
11/3	" " " " inlet and concrete outlet (Pipe construction dimensions)	11/3/2/16		12/3	<u>CHECK DROPS- (300 < Q < 1620 1/s)</u>		#of sheets:6
11/3	" " " " inlet and concrete outlet (Pipe construction dimensions)	11/3/2/17		12/3	Check drops -(Conc.canal) - Q=300 ~ 1620 1/s (Plan and sections)	12/3/1/01	
11/3	" " " " inlet and concret outlet (Pipe construction dimensions)	11/3/2/18		12/3	" " -(Earth canal)- Q=300 ~ 1620 1/s (Plan and sections)	12/3/1/02	
11/4	<u>PIPE DROP WITH BAFFLED OUTLET</u>	11/4/1/01	#of sheets:1	12/3	" " -Reinforcement - (plan and sections)	12/3/3/01	
11/5	<u>ROAD CROSSING- TYPICAL POSITION</u>	11/5/1/01	#of sheets:1				
11/6	<u>INVERTED SIPHON-TYPICAL POSITION</u>	11/6/1/01	#of sheets:2				
11/6	<u>INVERTED SIPHON AND ROAD CROSSING</u>	11/6/1/02					